

FCC PART 15 SUBPART C TEST REPORT

FCC PART 15.247

Report Reference No.....: **TZ170100238-BLE**

FCC ID.....: **2ALGP-VJB-105**

Compiled by

(position+printed name+signature)..: File administrators Tony Li

Supervised by

(position+printed name+signature)..: Technique principal Hugo Chen

Approved by

(position+printed name+signature)..: Manager Andy Zhang

Date of issue.....: 2017/3/13

Representative Laboratory Name: Shenzhen Tongzhou Testing Co.,Ltd

Address: 1th floor, building 1, Haomai High-tech park, Huating Road 387,
Dalang street, Longhua, Shenzhen, China

Testing Laboratory Name: Dongguan Dongdian Testing Service Co.,Ltd

Address: No.17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park,
Dongguan City, Guangdong Province, China

Applicant's name: **Innovative Technology Electronics LLC**

Address: No.1 Channel Drive, Port Washington, NY 11050, USA

Test specification

Standard: **FCC Part 15.247: Operation within the bands 902-928 MHz,
2400-2483.5 MHz and 5725-5850 MHz**

TRF Originator.....: Shenzhen Tongzhou Testing Co.,Ltd

Master TRF.....: Dated 2012-06

Shenzhen Tongzhou Testing Co.,Ltd All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Tongzhou Testing Co.,Ltd is acknowledged as copyright owner and source of the material. Shenzhen Tongzhou Testing Co.,Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: Large Full Size Vinyl Turntable Jukebox

Trade Mark: Victoria

Model/Type reference.....: VJB-105

Listed Models: /

Manufacturer: **Innovative Technology Electronics LLC**

Modulation Type: GFSK

Operation Frequency.....: From 2402MHz to 2480MHz

Rating: DC 18.0V Adapter from AC 100V~240V-50/60Hz

Result.....: **PASS**

TEST REPORT

Test Report No. : TZ170100238-BLE	2017/3/13 Date of issue
---	---

Equipment under Test : Large Full Size Vinyl Turntable Jukebox

Model /Type : VJB-105

Listed Models : /

Applicant : **Innovative Technology Electronics LLC**

Address : No.1 Channel Drive, Port Washington, NY 11050, USA

Manufacturer : **Jin shun yan Electronic processing factory**

Address : Xin xu Town,hui yang,Guangdong,China

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1.	<u>TEST STANDARDS.....</u>	<u>4</u>
2.	<u>SUMMARY</u>	<u>5</u>
2.1.	General Remarks	5
2.2.	Product Description	5
2.3.	Equipment Under Test	5
2.4.	Short description of the Equipment under Test (EUT)	5
2.5.	EUT operation mode	6
2.6.	Block Diagram of Test Setup	6
2.7.	Related Submittal(s) / Grant (s)	6
2.8.	Modifications	7
2.9.	NOTE	8
3.	<u>TEST ENVIRONMENT.....</u>	<u>9</u>
3.1.	Address of the test laboratory	9
3.2.	Test Facility	9
3.3.	Environmental conditions	9
3.4.	Test Description	9
3.5.	Statement of the measurement uncertainty	10
3.6.	Equipments Used during the Test	10
4.	<u>TEST CONDITIONS AND RESULTS.....</u>	<u>12</u>
4.1.	AC Power Conducted Emission	12
4.2.	Radiated Emission.....	15
4.3.	Maximum Peak Output Power.....	21
4.4.	Power Spectral Density	22
4.5.	6dB Bandwidth	25
4.6.	Band Edge Compliance of RF Emission	28
4.7.	Spurious RF Conducted Emission	33
4.8.	Antenna Requirement.....	44

1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	2017/1/18
Testing commenced on	:	2017/1/18
Testing concluded on	:	2017/3/13

2.2. Product Description

The **Innovative Technology Electronics LLC**'s Model: VJB-105 or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

Name of EUT	Large Full Size Vinyl Turntable Jukebox
Model/Type reference	VJB-105
Listed Models	/
FCC ID	2ALGP-VJB-105
Bluetooth	Supported BT 4.0+EDR
Antenna Type	Integral
Bluetooth FCC Operation frequency	2402MHz-2480MHz
Bluetooth Modulation	EDR(GFSK,8DPSK, π /4DQPSK)/BLE(GFSK)

2.3. Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 120V / 60 Hz	☐ 115V / 60Hz
		☐ 12 V DC	☐ 24 V DC
		☒ Other (specified in blank below)	

DC 18.0V Adapter from AC 100V~240V-50/60Hz

2.4. Short description of the Equipment under Test (EUT)

2.4GHz (Large Full Size Vinyl Turntable Jukebox (M/N: VJB-105))

For more details, refer to the user's manual of the EUT.

2.5. EUT operation mode

The application provider specific test software (BlueTest) to control sample in continuous TX and RX (Duty Cycle >98%)


for testing meet KDB558074 test requirement.

The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing. There are 40 channels of EUT, and the test carried out at the lowest channel, middle channel and highest channel.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

2.6. Block Diagram of Test Setup

Fig. 2-1 Configuration of Tested System



Adapter:

Model: BX1800-7000 Input:AC 100~240V 50/60Hz 2A Output: DC 18V/7A
 ◇ Shielded ◆ Unshielded

Other Support Unit(s) :

Type Name	Manufacturer	Model Name	Series
PC	ASUS	X454L	15105-0038A100
Software	CSR	BlueTest	--

2.7. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2ALGP-VJB-105** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.8. Modifications

No modifications were implemented to meet testing criteria.

2.9. NOTE

1. The EUT is a Large Full Size Vinyl Turntable Jukebox with WLAN and Bluetooth function, The functions of the EUT listed as below:

	Test Standards	Reference Report
Bluetooth-EDR	FCC Part 15 Subpart C	TZ170100238-EDR
Bluetooth-BLE	FCC Part 15 Subpart C	TZ170100238-BLE

2. The frequency bands used in this EUT are listed as follows:

Frequency Band(MHz)	2400-2483.5	5150-5350	5470-5725	5725-5850
EUT	√	—	—	—

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Dongguan Dongdian Testing Service Co.,Ltd

No.17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2014) and CISPR Publication 22.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 10288A-1

The 3m alternate test site of Dongguan Dongdian Testing Service Co.,Ltd EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 10288A-1 on May, 2012.

FCC-Registration No.: 270092

Dongguan Dongdian Testing Service Co.,Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 270092, Mar, 2015.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.4. Test Description

Test Specification clause	Test case	Test Mode	Test Channel	Recorded In Report		Pass	Fail	NA	NP	Remark
§15.247(b)(4)	Antenna gain	GFSK	☒ Lowest ☒ Middle ☒ Highest	GFSK	☒ Lowest ☒ Middle ☒ Highest	☒	☐	☐	☐	complies
§15.247(e)	Power spectral density	GFSK	☒ Lowest ☒ Middle ☒ Highest	GFSK	☒ Lowest ☒ Middle ☒ Highest	☒	☐	☐	☐	complies
§15.247(a)(2)	Spectrum bandwidth – 6 dB bandwidth	GFSK	☒ Lowest ☒ Middle ☒ Highest	GFSK	☒ Lowest ☒ Middle ☒ Highest	☒ ☒	☐	☐	☐	complies
§15.247(b)(1)	Maximum output power	GFSK	☒ Lowest ☒ Middle ☒ Highest	GFSK	☒ Lowest ☒ Middle ☒ Highest	☒ ☒ ☒	☐	☐	☐	complies
§15.247(d)	Band edge compliance conducted	GFSK	☒ Lowest ☒ Highest	GFSK	☒ Lowest ☒ Highest	☒ ☒	☐	☐	☐	complies
§15.205	Band edge compliance radiated	GFSK	☒ Lowest ☒ Highest	GFSK	☒ Lowest ☒ Highest	☒	☐	☐	☐	complies
§15.247(d)	TX spurious emissions conducted	GFSK	☒ Lowest ☒ Middle ☒ Highest	GFSK	☒ Lowest ☒ Middle ☒ Highest	☒ ☒	☐	☐	☐	complies
§15.247(d)	TX spurious	GFSK	☒ Lowest	GFSK	☒ Lowest	☒	☐	☐	☐	complies

	emissions radiated		☒ Middle ☒ Highest		☒ Middle ☒ Highest					
§15.109	RX spurious emissions radiated	-/-	-/-	-/-	-/-	☒	☐	☐	☐	complies
§15.209(a)	TX spurious Emissions radiated < 30 MHz	GFSK	-/-	GFSK	-/-	☒	☐	☐	☐	complies
§15.107(a) §15.207	Conducted Emissions < 30 MHz	GFSK	-/-	GFSK	-/-	☒	☐	☐	☐	complies

Remark:

1. The measurement uncertainty is not included in the test result.
2. NA = Not Applicable; NP = Not Performed

3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Dongguan Dongdian Testing Service Co.,Ltd quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Dongguan Dongdian Testing Service Co.,Ltd laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	3.16 dB	(1)
Radiated Emission	1~18GHz	2.56 dB	(1)
Radiated Emission	18-40GHz	2.56 dB	(1)
Conducted Disturbance	0.15~30MHz	2.44 dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.6. Equipments Used during the Test

Radiated Method Test						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	462	2016/04/12	3 years
2	EMI TEST Receiver	Rohde&Schwarz	ESU8	100316	2016/10/25	1 years
3	EMI TEST Software	Audix	E3	6.111111	N/A	N/A
4	Horn Antennna	EMCO	3116	00060095	2016/04/12	3 years
5	Pre-Amplifer	Rohde&Schwarz	SCU-01	10049	2016/10/25	1 years
6	Pre-Amplifer	A.H.	PAM0-0118	360	2016/10/25	1 years
7	Pre-Amplifer	A.H.	PAM-1840VH	562	2016/10/25	1 years
8	Double Ridged Horn Antenna	Rohde&Schwarz	HF907	100265	2016/04/12	3 years
9	Active Loop Antenna	Schwarz beck	FMZB1519	0.38	2016/04/12	3 years
11	TURNTABLE	MATURO	TT2.0	----	N/A	N/A
12	ANTENNA MAST	MATURO	TAM-4.0-P	----	N/A	N/A
13	Spectrum Analyzer	R&S	FSU26	1166.1660.26	2016/10/25	1 years
14	Horn Antenna	SCHWARZBECK	BBHA 9170	1123	2016/08/19	1 years


Conducted Method Test						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Power Sensor	Rohde&Schwarz	NRP-Z81	102638	2016/11/02	1 years
2	Spectrum Analyzer	Agilent	N9030A	MY49430428	2016/11/02	1 years

AC Power Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Artificial Mains	Rohde&Schwarz	ENV216	101109	2016/10/25	1 years
2	Artificial Mains	Rohde&Schwarz	ESH3-Z5	100309	2016/10/25	1 years
3	EMI Test Receiver	Rohde&Schwarz	ESU8	100316	2016/10/25	1 years
4	Pulse Limiter	Rohde&Schwarz	ESH3-Z2	101242	2016/10/25	1 years

4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION

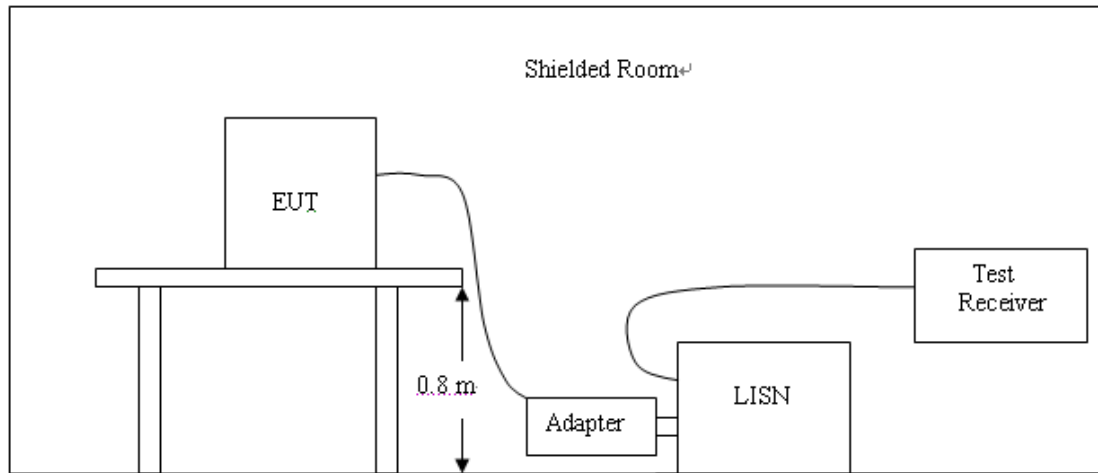

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a standfloor system and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013;
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013;
- 4 The EUT received DC18V power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit


For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency (MHz)	Maximum RF Line Voltage (dBμV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50


* Decreasing linearly with the logarithm of the frequency

TEST RESULTS

Pre-scan all mode and recorded the worst case results in this report (BT Link @120VAC).

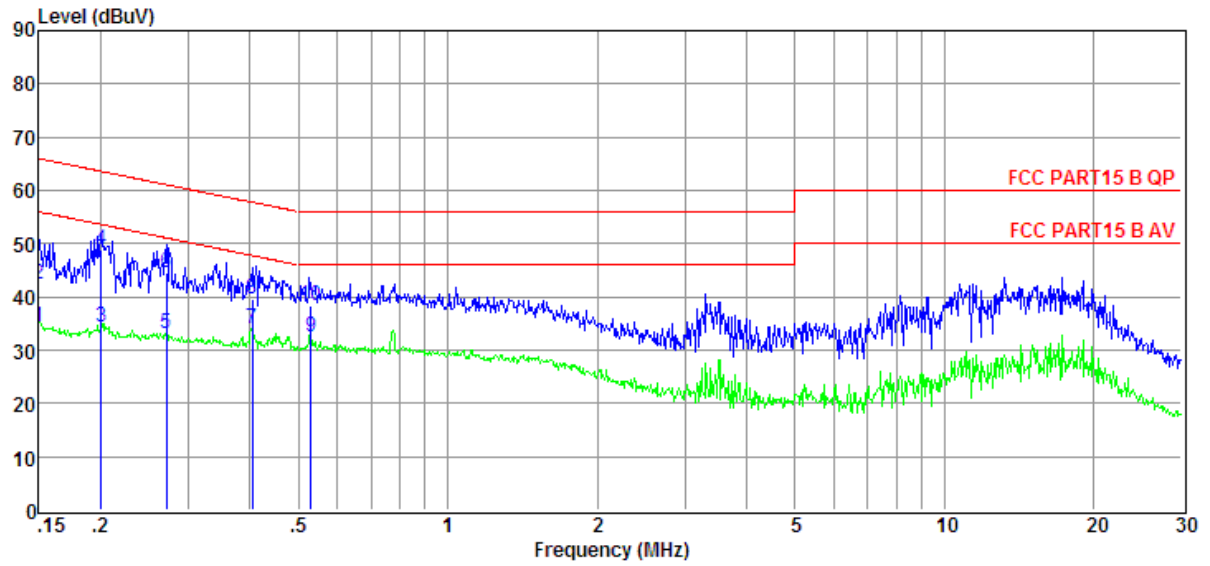

Item (Mark)	Freq (MHz)	Read Level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Results Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Detector	Phase
1	0.15	14.95	9.60	0.01	9.84	34.40	56.00	-21.60	Average	NEUTRAL
2	0.15	22.88	9.60	0.01	9.84	42.33	66.00	-23.67	QP	NEUTRAL
3	0.20	15.10	9.59	0.02	9.85	34.56	53.58	-18.89	Average	NEUTRAL
4	0.20	29.42	9.59	0.02	9.85	48.88	63.58	-14.57	QP	NEUTRAL
5	0.27	13.67	9.60	0.02	9.85	33.14	51.07	-17.98	Average	NEUTRAL
6	0.27	25.10	9.60	0.02	9.85	44.57	61.07	-16.55	QP	NEUTRAL
7	0.40	14.61	9.61	0.03	9.86	34.11	47.77	-13.66	Average	NEUTRAL
8	0.40	20.19	9.61	0.03	9.86	39.69	57.77	-18.08	QP	NEUTRAL
9	0.53	12.83	9.61	0.04	9.87	32.35	46.00	-14.01	Average	NEUTRAL
10	0.53	18.75	9.61	0.04	9.87	38.27	56.00	-18.09	QP	NEUTRAL

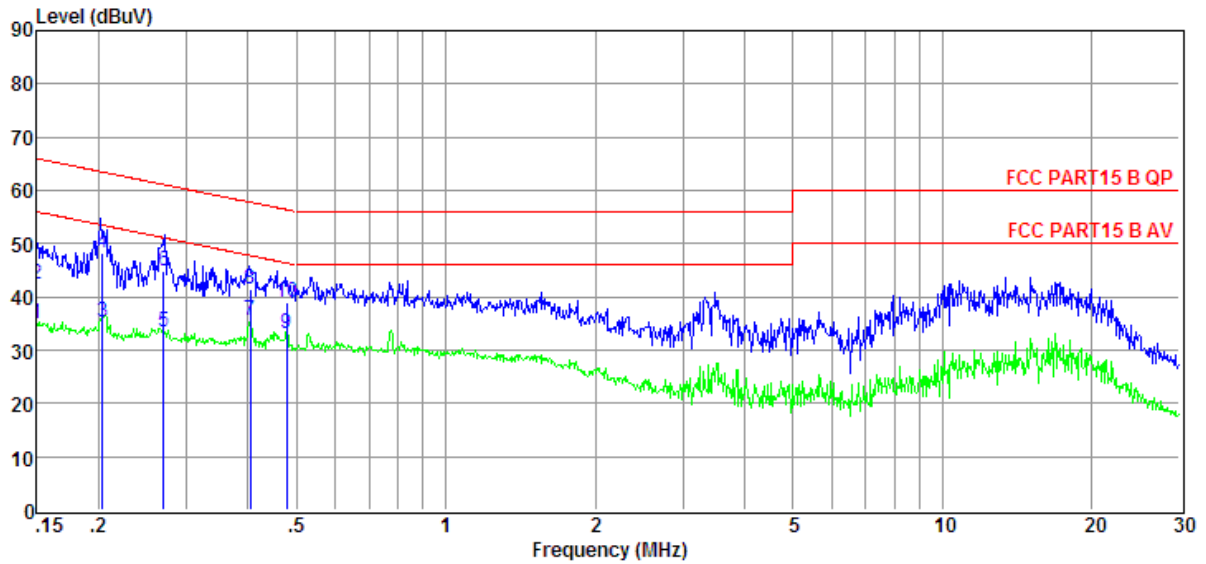

Item (Mark)	Freq (MHz)	Read Level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Results Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Detector	Phase
1	0.15	15.96	9.61	0.01	9.84	35.42	56.00	-20.58	Average	LINE
2	0.15	22.92	9.61	0.01	9.84	42.38	66.00	-23.62	QP	LINE
3	0.20	15.82	9.62	0.02	9.85	35.31	53.45	-18.14	Average	LINE
4	0.20	29.00	9.62	0.02	9.85	48.49	63.45	-14.96	QP	LINE
5	0.27	14.06	9.62	0.02	9.85	33.55	51.12	-17.57	Average	LINE
6	0.27	25.54	9.62	0.02	9.85	45.03	61.12	-16.09	QP	LINE
7	0.40	16.12	9.63	0.03	9.86	35.64	47.77	-12.13	Average	LINE
8	0.40	21.73	9.63	0.03	9.86	41.25	57.77	-16.52	QP	LINE
9	0.48	13.80	9.63	0.03	9.87	33.33	46.36	-13.03	Average	LINE
10	0.48	19.76	9.63	0.03	9.87	39.29	56.36	-17.07	QP	LINE


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz), Step size: 4 kHz, Scan time: auto.


4.2. Radiated Emission

TEST CONFIGURATION


Frequency range 9KHz – 30MHz

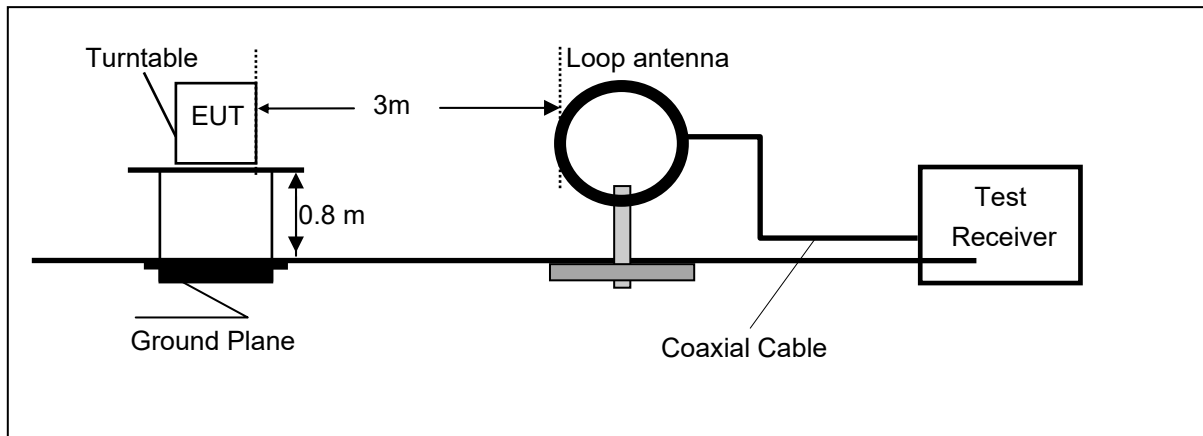

Frequency range 30MHz – 1000MHz

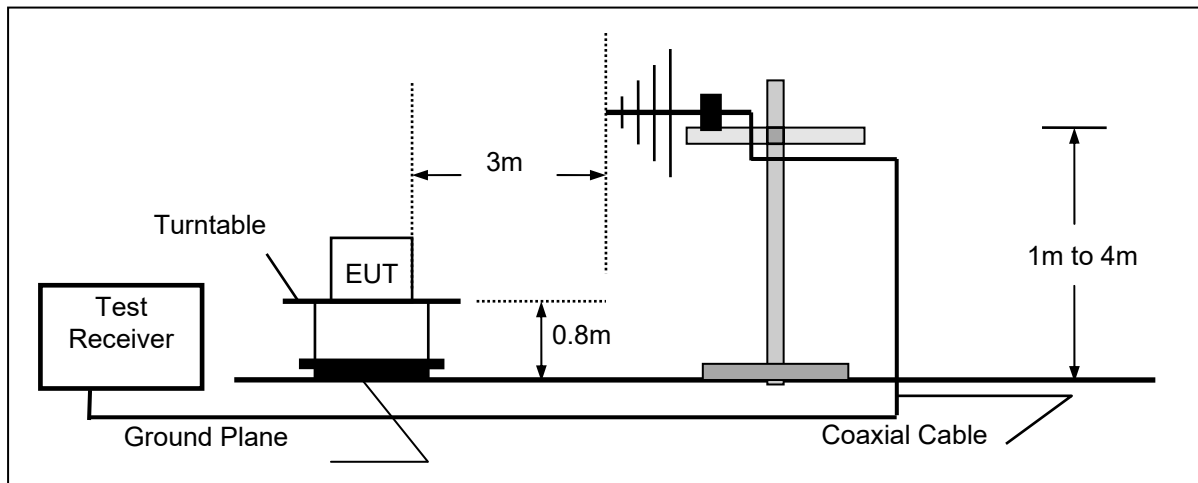

Frequency range above 1GHz-25GHz

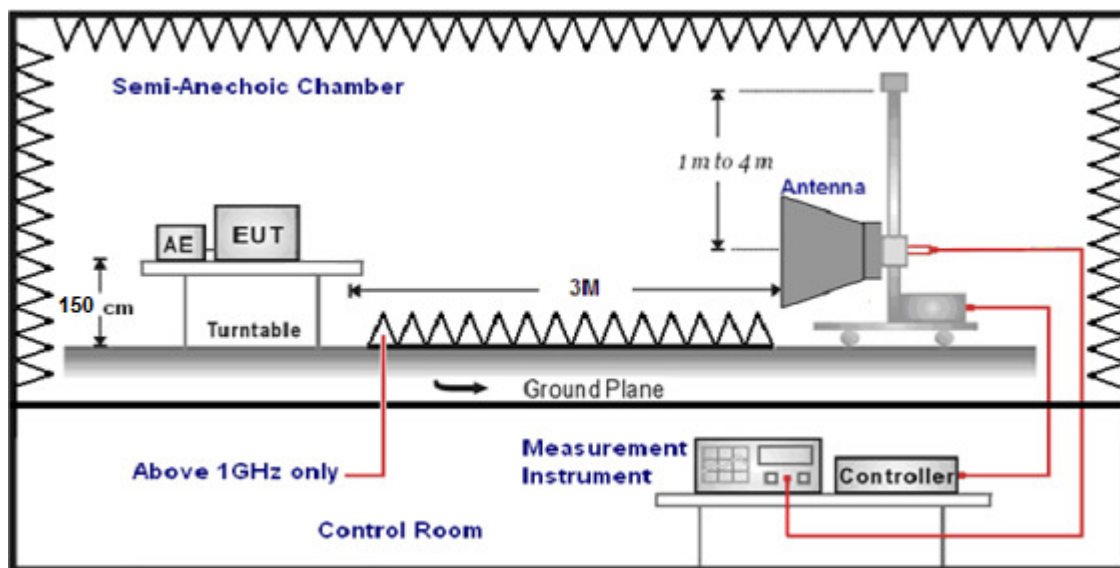

TEST PROCEDURE

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

Premeasurement:

- The antenna is moved spherical over the EUT in different polarisations of the antenna.

Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

Instruments Setting

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

For example

Frequency (MHz)	FS (dB μ V/m)	RA (dB μ V/m)	AF (dB)	CL (dB)	AG (dB)	Transd (dB)
300.00	40	58.1	12.2	1.6	31.90	-18.1

$$\text{Transd} = \text{AF} + \text{CL} - \text{AG}$$

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio

frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS

Remark: 1. We tested BT Link mode for below 1G;


For 9KHz to 30MHz

Frequency (MHz)	Corrected Reading (dBμV/m)@3m	FCC Limit (dBμV/m) @3m	Over Limit (dB)	Detector
---	---	---	---	QP


Remark:

- Over Limit = Emission level - Limit value
- “---” states emission level at least lower than limit 20dB, so without recorded any values;

For 30MHz to 1000MHz

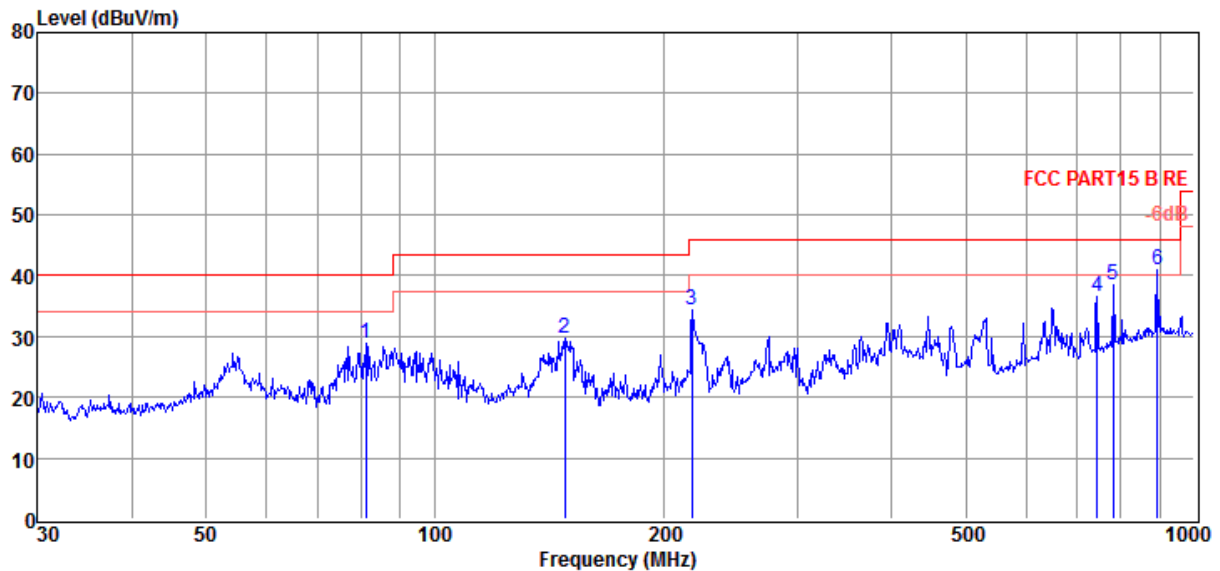

Item (Mark)	Frequency (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	81.35	18.52	9.15	1.36	29.03	40.00	-10.97	QP	HORIZONTAL
2	148.44	19.46	8.67	1.79	29.92	43.50	-13.58	QP	HORIZONTAL
3	218.22	20.94	10.90	2.20	34.04	46.00	-11.96	QP	HORIZONTAL
4	744.92	12.50	19.33	4.52	36.35	46.00	-9.65	QP	HORIZONTAL
5	782.79	13.76	20.17	4.66	38.59	46.00	-7.41	QP	HORIZONTAL
6	894.06	14.36	22.03	4.95	41.34	46.00	-4.66	QP	HORIZONTAL

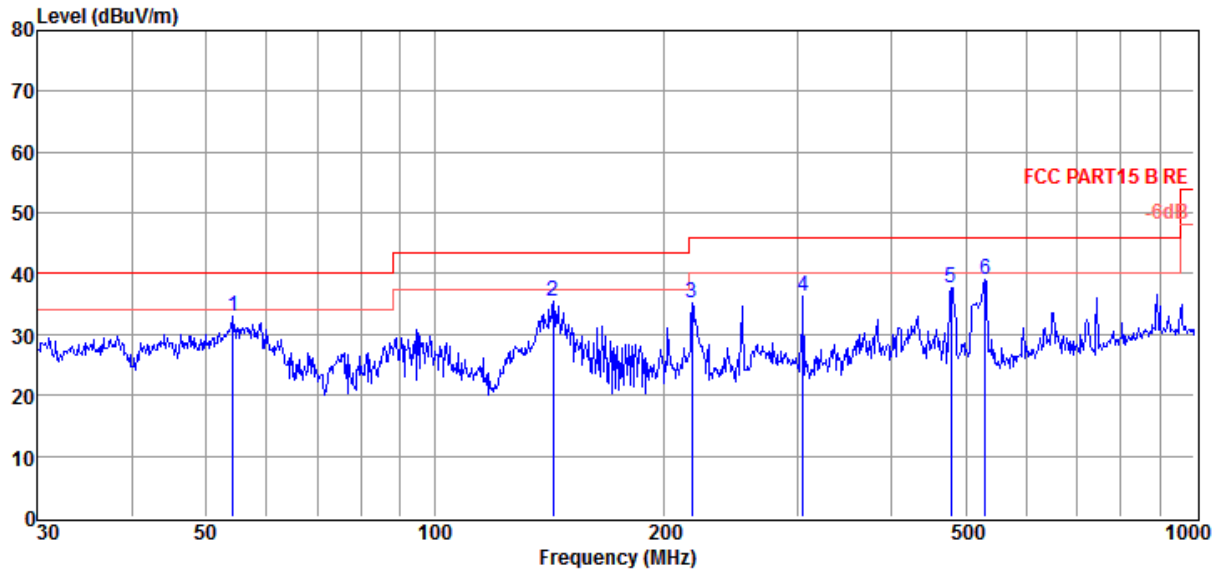

Item (Mark)	Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	54.61	16.96	14.20	1.09	32.25	40.00	-7.75	QP	VERTICAL
2	143.98	25.42	8.83	1.72	35.97	43.50	-7.53	QP	VERTICAL
3	217.79	22.48	10.90	2.20	35.58	46.00	-10.42	QP	VERTICAL
4	305.68	19.82	13.50	2.72	36.04	46.00	-9.96	QP	VERTICAL
5	479.42	18.56	15.98	3.62	38.16	46.00	-7.84	QP	VERTICAL
6	531.34	19.43	16.51	3.73	39.67	46.00	-6.33	QP	VERTICAL

Remark:

1. Over Limit = Emission level - Limit value
2. "---" states emission level at least lower than limit 20dB, so without recorded any values;
3. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
4. Pre-scan all mode and recorded the worst case results in this report (BT LE (Low Channel)).

For 1GHz to 25GHz**Low Channel @ Channel 00 @ 2402 MHz**

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	4804	35.98	35.40	29.13	12.07	54.32	74	-19.68	Peak	Horizontal
1	4804	18.78	35.40	29.13	12.07	37.12	54	-16.88	AV	Horizontal
2	7206	44.4	37.20	30.03	15.29	66.86	74	-7.14	Peak	Horizontal
2	7206	22.86	37.20	30.03	15.29	45.32	54	-8.68	AV	Horizontal

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	4804	44.15	35.40	29.13	12.07	62.49	74	-11.51	Peak	Vertical
1	4804	24.63	35.40	29.13	12.07	42.97	54	-11.03	AV	Vertical
2	7206	41.78	37.20	30.03	15.29	64.24	74	-9.76	Peak	Vertical
2	7206	23.09	37.20	30.03	15.29	45.55	54	-8.45	AV	Vertical

Middle Channel @ Channel 19 @ 2440 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	4880	38.17	35.46	29.16	12.17	56.64	74	-17.36	Peak	Horizontal
1	4880	27.58	35.46	29.16	12.17	46.05	54	-7.95	AV	Horizontal
2	7320	44.75	37.28	30.08	15.44	67.39	74	-6.61	Peak	Horizontal
2	7320	24.76	37.28	30.08	15.44	47.4	54	-6.6	AV	Horizontal

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	4880	45.62	35.46	29.16	12.17	64.09	74	-9.91	Peak	Vertical
1	4880	20.96	35.46	29.16	12.17	39.43	54	-14.57	AV	Vertical
2	7320	44.63	37.28	30.08	15.44	67.27	74	-6.73	Peak	Vertical
2	7320	25.06	37.28	30.08	15.44	47.7	54	-6.3	AV	Vertical

High Channel @ Channel 39 @ 2480 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	4960	48.17	35.52	29.19	12.28	66.78	74	-7.22	Peak	Horizontal
1	4960	22.43	35.52	29.19	12.28	41.04	54	-12.96	AV	Horizontal
2	7440	44.48	37.37	30.12	15.60	67.33	74	-6.67	Peak	Horizontal
2	7440	24.43	37.37	30.12	15.60	47.28	54	-6.72	AV	Horizontal


Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	4960	40.48	35.52	29.19	12.28	59.09	74	-14.91	Peak	Vertical
1	4960	17.53	35.52	29.19	12.28	36.14	54	-17.86	AV	Vertical
2	7440	41.36	37.37	30.12	15.60	64.21	74	-9.79	Peak	Vertical
2	7440	21.52	37.37	30.12	15.60	44.37	54	-9.63	AV	Vertical

REMARKS:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. The other emission levels were very low against the limit.
3. Over Limit=Emission Level - Limit.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. Detector AV is setting spectrum/receiver. RBW=1MHz/VBW=10Hz/Sweep time=Auto/Detector=Peak;

4.3. Maximum Peak Output Power

TEST CONFIGURATION



TEST PROCEDURE

According to KDB558074 D01 DTS Measurement Guidance Section 9.1 Maximum peak conducted output power, 9.1.2.

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

LIMIT

The Maximum Peak Output Power Measurement is 30dBm.

TEST RESULTS


A. Test Verdict

Channel	Frequency (MHz)	Measured Output Peak Power (dBm)	Limits (dBm)	Verdict
00	2402	-4.56	30	PASS
19	2440	-4.78	30	PASS
39	2480	-3.58	30	PASS

Note: 1. The test results including the cable loss.

4.4. Power Spectral Density

TEST CONFIGURATION



TEST PROCEDURE

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW = 100 kHz.
3. Set the VBW = 300 KHz.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level must be 8 dBm.

LIMIT

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST RESULTS

A. Test Verdict

Channel	Frequency (MHz)	Report PSD (dBm/100kHz)	Refer to Plot	Limits (dBm/3KHz)	Verdict
00	2402	-6.871	Plot 4.4.1 A	8	PASS
19	2440	-7.028	Plot 4.4.1 B	8	PASS
39	2480	-6.986	Plot 4.4.1 C	8	PASS

B. Test Plots



(Plot 4.4.1 A : Channel 00: 2402MHz @ GFSK)




(Plot 4.4.1 B : Channel 19: 2440MHz @ GFSK)



(Plot 4.4.1 C : Channel 39: 2480MHz @ GFSK)

4.5. 6dB Bandwidth

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=100 KHz and VBW=300KHz. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB. According to KDB558074 D01 V03 for one of the following procedures may be used to determine the modulated DTS device signal bandwidth.

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

LIMIT

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

TEST RESULTS

A. Test Verdict

Channel	Frequency (MHz)	6 dB Bandwidth (KHz)	Refer to Plot	Limits (kHz)	Verdict
00	2402	694.9	Plot 4.5.1 A	≥ 500	PASS
19	2440	704.1	Plot 4.5.1 B	≥ 500	PASS
39	2480	703.5	Plot 4.5.1 C	≥ 500	PASS

Note: 1.The test results including the cable lose.

B. Test Plots



(Plot 4.5.1 A: Channel 00: 2402MHz @ GFSK)



(Plot 4.5.1 B: Channel 19: 2440MHz @ GFSK)




(Plot 4.5.1 C: Channel 39: 2480MHz @ GFSK)

4.6. Band Edge Compliance of RF Emission

TEST REQUIREMENT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION

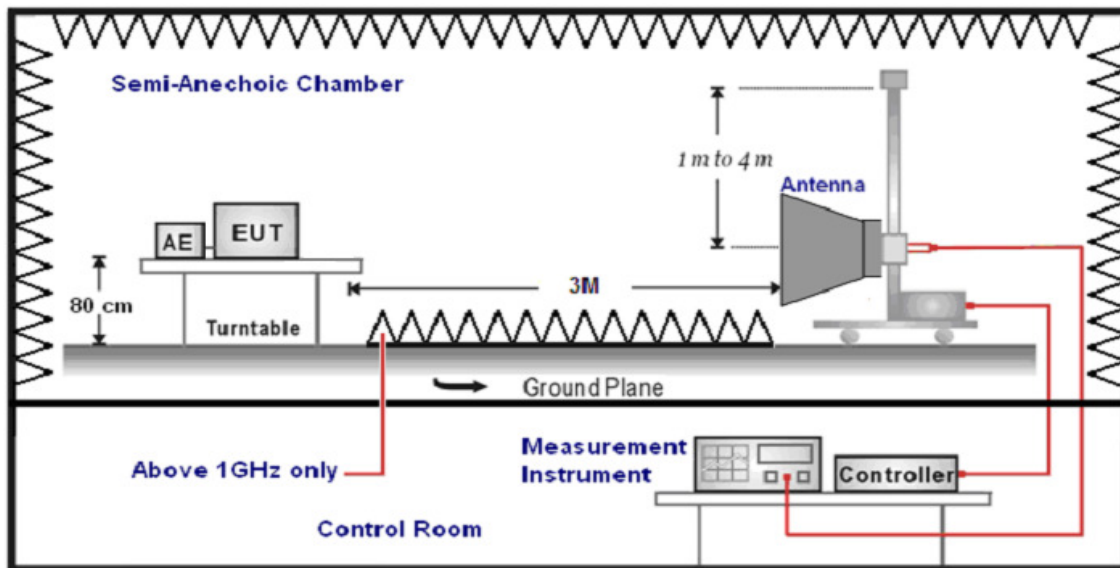

TEST PROCEDURE

1. The EUT was placed on the ground.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed..
5. The distance between test antenna and EUT was 3 meter:
6. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak


LIMIT

Below -20dB of the highest emission level in operating band.

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)

TEST RESULTS

Low Channel/Horizontal:

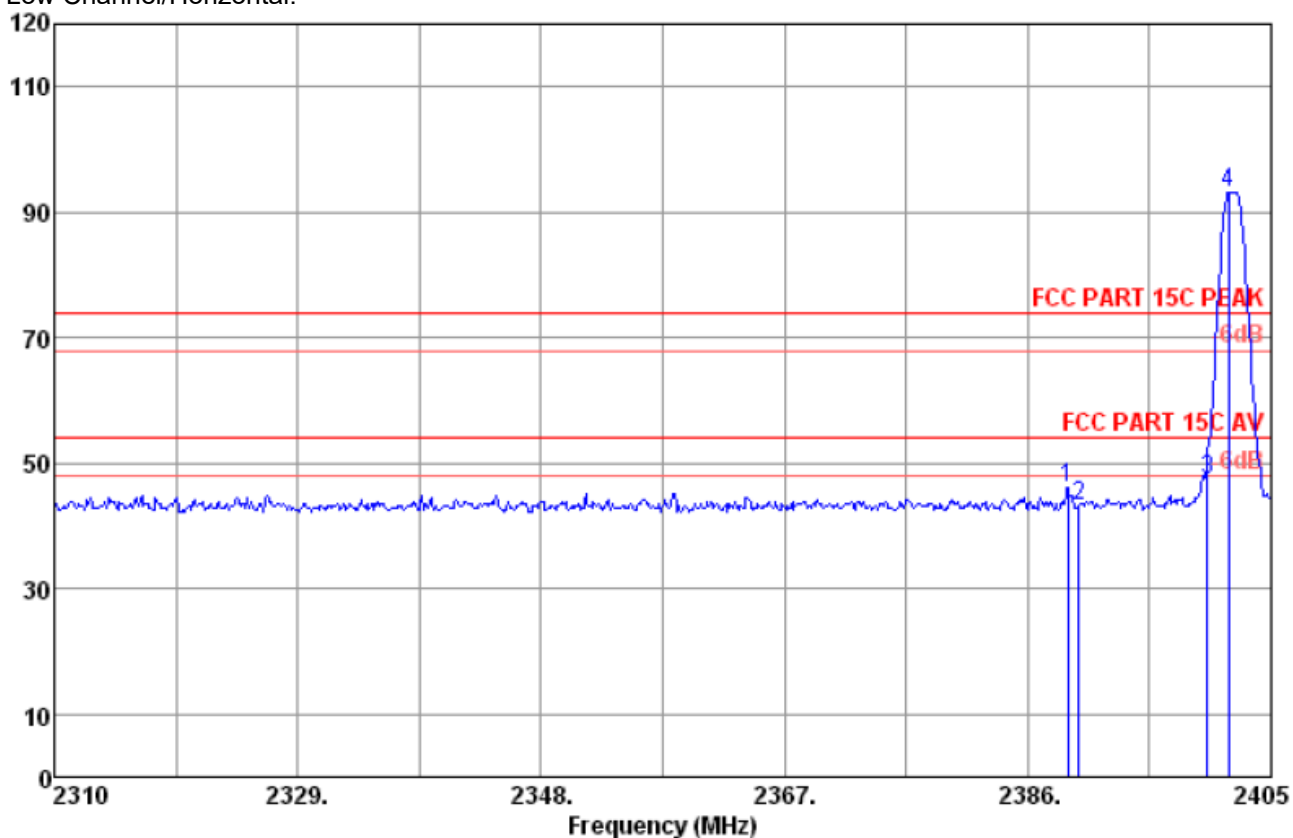


Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
2389.14	37.82	29.99	30.21	8.35	45.95	54	-28.05	Peak	Horizontal
2390	34.96	29.99	30.21	8.35	43.09	54	-30.91	Peak	Horizontal
2400	39.38	29.99	30.21	8.35	47.51	---	---	Peak	Horizontal
2401.68	85.14	29.99	30.21	8.35	93.27	---	---	Peak	Horizontal

REMARKS:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. The other emission levels were very low against the limit.
3. Over Limit=Emission Level - Limit.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. Detector AV is setting spectrum/receiver. RBW=1MHz/VBW=10Hz/Sweep time=Auto/Detector=Peak;

Low Channel/Vertical:

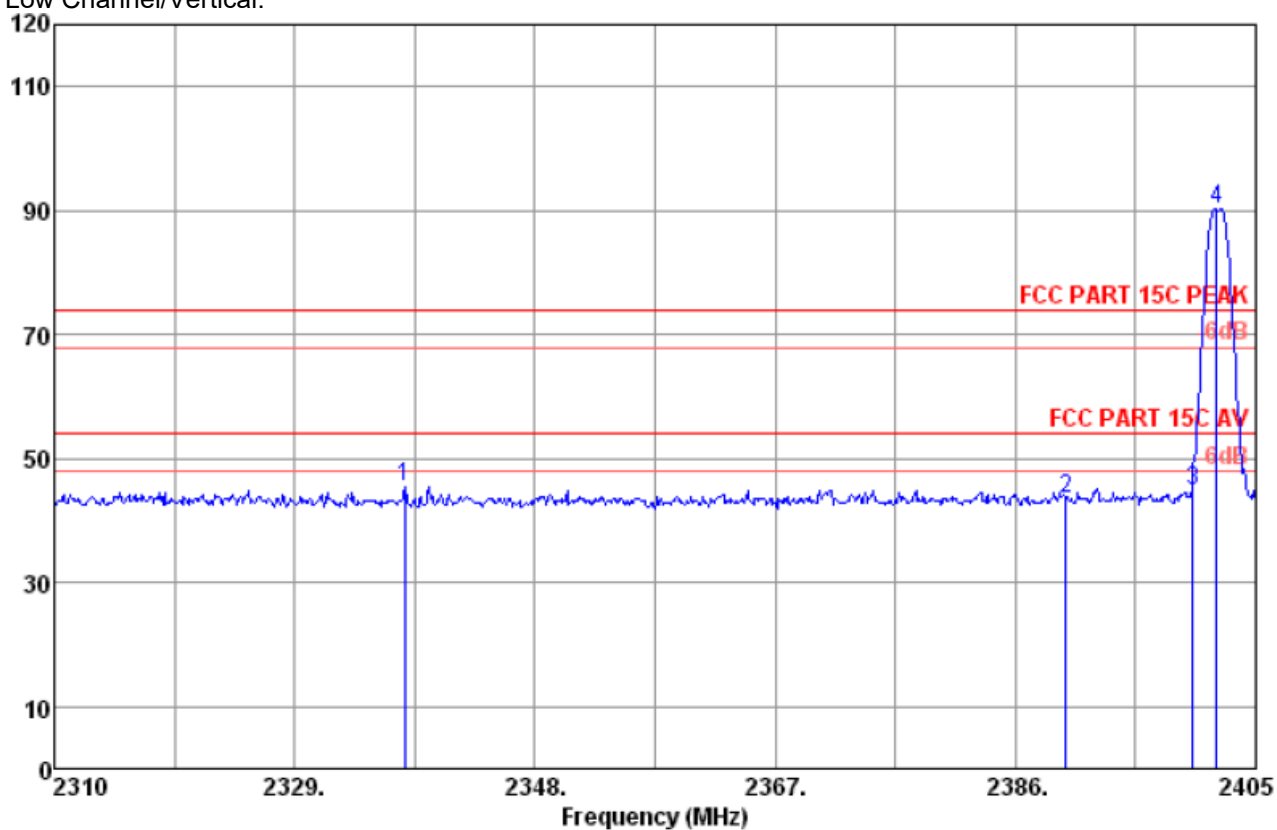


Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
2337.74	37.46	29.99	30.21	8.35	45.59	54	-28.41	Peak	Vertical
2390.00	35.65	29.99	30.21	8.35	43.78	54	-30.22	Peak	Vertical
2400.00	36.39	30.25	30.25	8.5	44.89	---	---	Peak	Vertical
2401.87	81.63	30.25	30.25	8.5	90.13	---	---	Peak	Vertical

REMARKS:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. The other emission levels were very low against the limit.
3. Over Limit=Emission Level - Limit.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. Detector AV is setting spectrum/receiver. RBW=1MHz/VBW=10Hz/Sweep time=Auto/Detector=Peak;

High Channel/Horizontal:

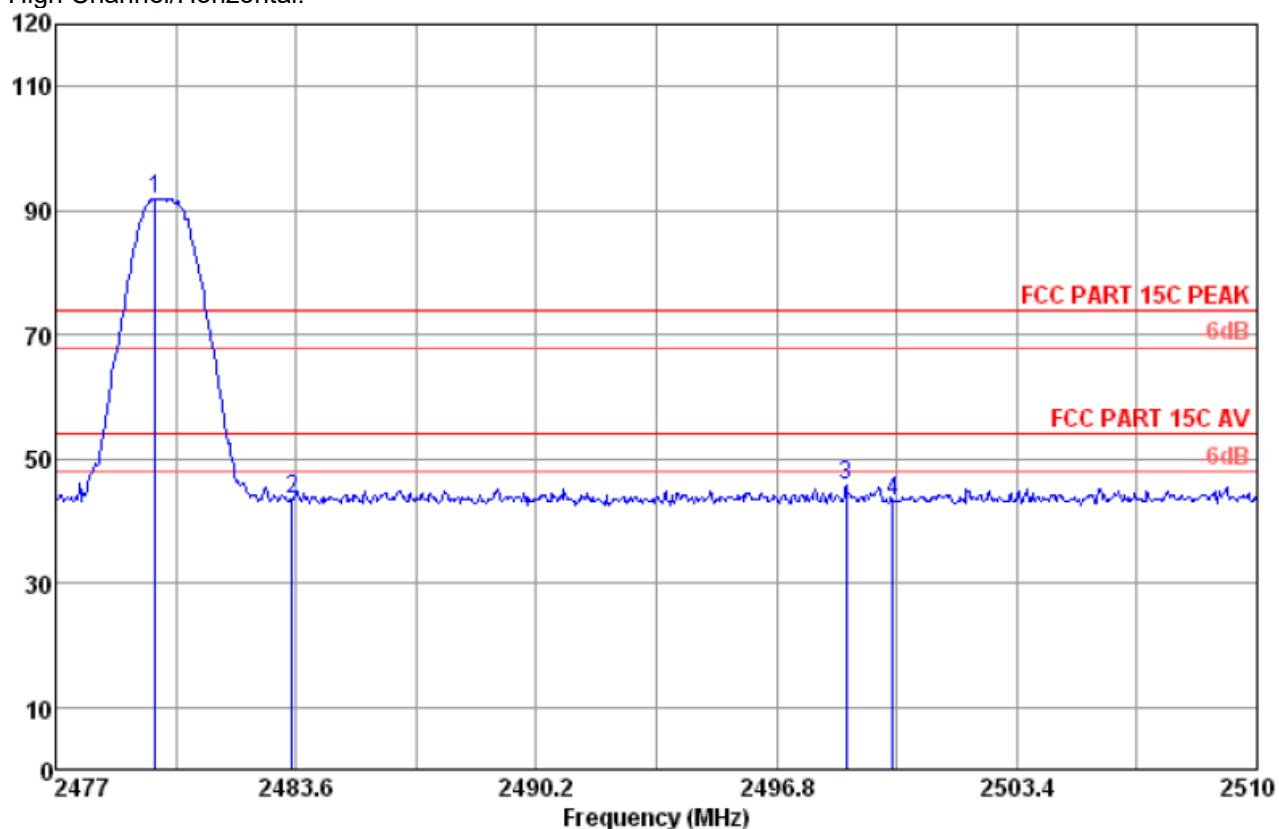


Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
2479.74	83.04	30.25	30.25	8.5	91.54	---	---	Peak	Horizontal
2483.5	35.27	30.25	30.25	8.5	43.77	54	-30.23	Peak	Horizontal
2498.71	37.19	30.25	30.25	8.5	45.69	54	-28.31	Peak	Horizontal
2500	34.83	30.25	30.25	8.5	43.33	54	-30.67	Peak	Horizontal

REMARKS:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. The other emission levels were very low against the limit.
3. Over Limit=Emission Level - Limit.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. Detector AV is setting spectrum/receiver. RBW=1MHz/VBW=10Hz/Sweep time=Auto/Detector=Peak;

High Channel/Vertical:

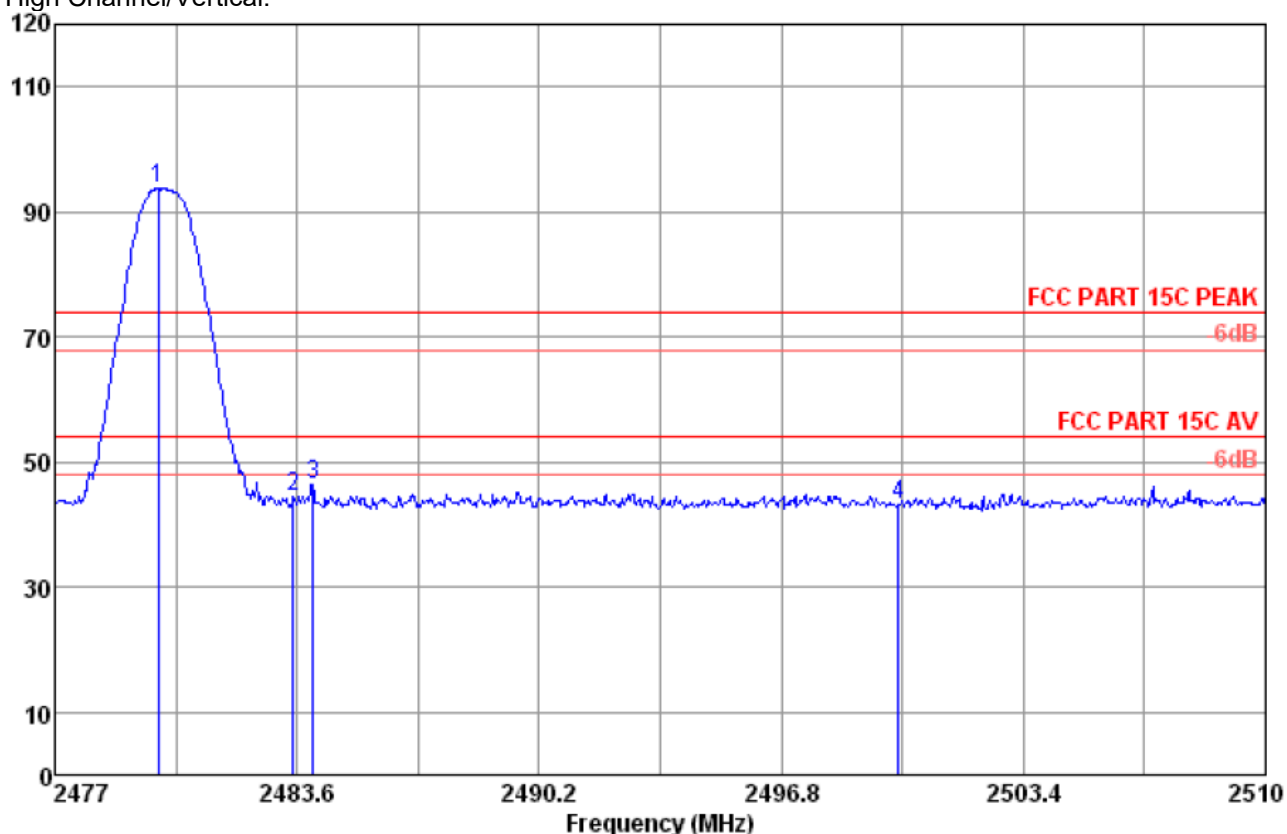


Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
2479.81	85.27	30.25	30.25	8.5	93.77	---	---	Peak	Vertical
2483.5	36.16	30.25	30.25	8.5	44.66	54	-29.34	Peak	Vertical
2484.03	37.99	30.25	30.25	8.5	46.49	54	-27.51	Peak	Vertical
2500	35.37	30.25	30.25	8.5	43.87	54	-30.13	Peak	Vertical

REMARKS:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. The other emission levels were very low against the limit.
3. Over Limit=Emission Level - Limit.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. Detector AV is setting spectrum/receiver. RBW=1MHz/VBW=10Hz/Sweep time=Auto/Detector=Peak;

4.7. Spurious RF Conducted Emission

TEST CONFIGURATION



TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength, and measure frequency range from 9KHz to 26.5GHz.

LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

TEST RESULTS

Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.

A. Test Verdict


Channel	Frequency (MHz)	Frequency Range	Refer to Plot	Limit (dBc)	Verdict
00	2402	2402MHz	Plot 4.7.1 A1	N/A	PASS
		9KHz-30MHz	Plot 4.7.1 A2	-20	PASS
		30MHz-1GHz	Plot 4.7.1 A3	-20	PASS
		1GHz-8GHz	Plot 4.7.1 A4	-20	PASS
		8GHz-16GHz	Plot 4.7.1 A5	-20	PASS
		16GHz-26.5GHz	Plot 4.7.1 A6	-20	PASS
19	2440	2440MHz	Plot 4.7.1 B1	N/A	PASS
		9KHz-30MHz	Plot 4.7.1 B2	-20	PASS
		30MHz-1GHz	Plot 4.7.1 B3	-20	PASS
		1GHz-8GHz	Plot 4.7.1 B4	-20	PASS
		8GHz-16GHz	Plot 4.7.1 B5	-20	PASS
		16GHz-26.5GHz	Plot 4.7.1 B6	-20	PASS
39	2480	2480MHz	Plot 4.7.1 C1	N/A	PASS
		9KHz-30MHz	Plot 4.7.1 C2	-20	PASS
		30MHz-1GHz	Plot 4.7.1 C3	-20	PASS
		1GHz-8GHz	Plot 4.7.1 C4	-20	PASS
		8GHz-16GHz	Plot 4.7.1 C5	-20	PASS
		16GHz-26.5GHz	Plot 4.7.1 C6	-20	PASS

Frequency (MHz)	Delta Peak to Band emission (dBc)	Detector	Limit (dBc)	Refer to Plot	Verdict
2400.00	-53.055	Peak	-20	Plot 4.7.1 D	PASS
2483.50	-55.423	Peak	-20	Plot 4.7.1 E	PASS


B. Test Plots




(Plot 4.7.1 A1: Channel 00: 2402MHz @ GFSK)

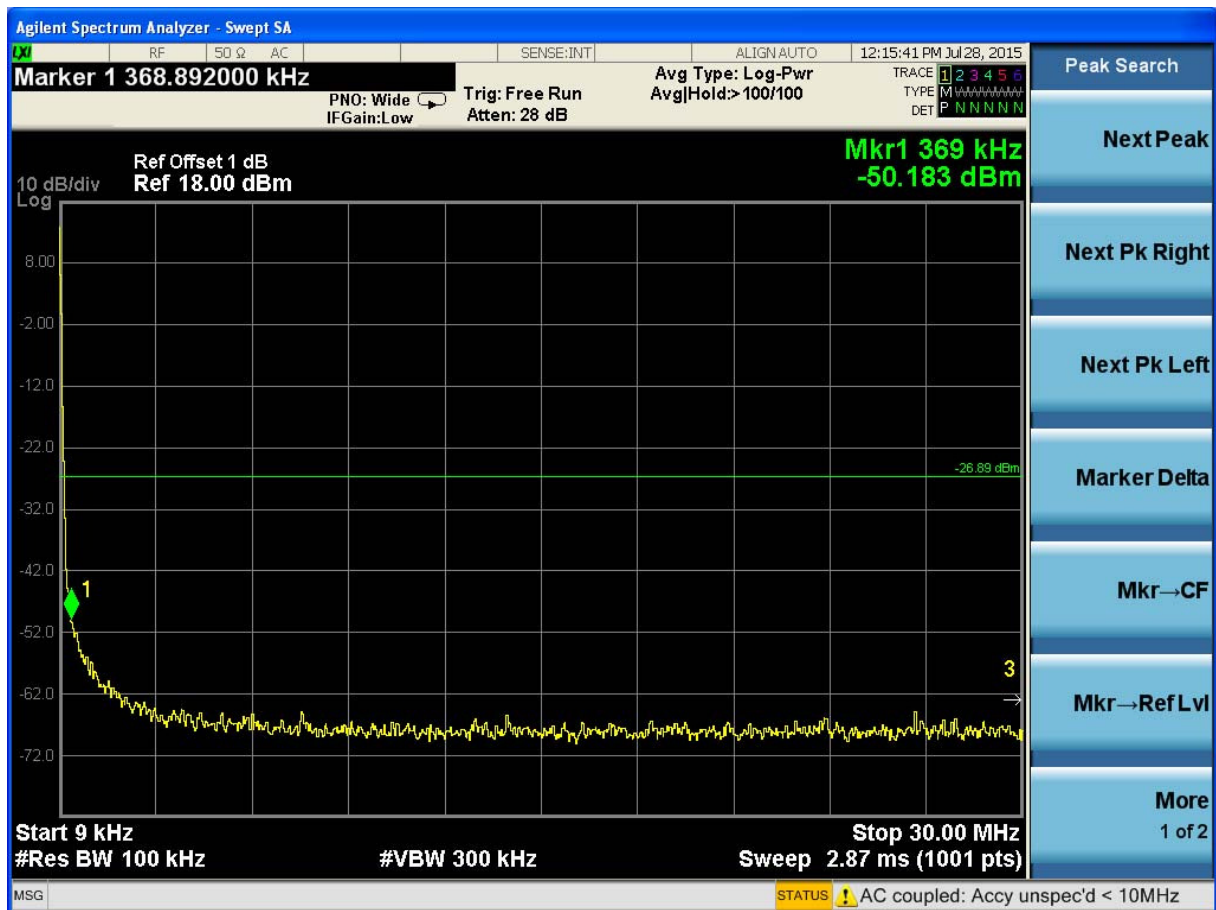


(Plot 4.7.1 A2: Channel 00: 2402MHz @ GFSK)

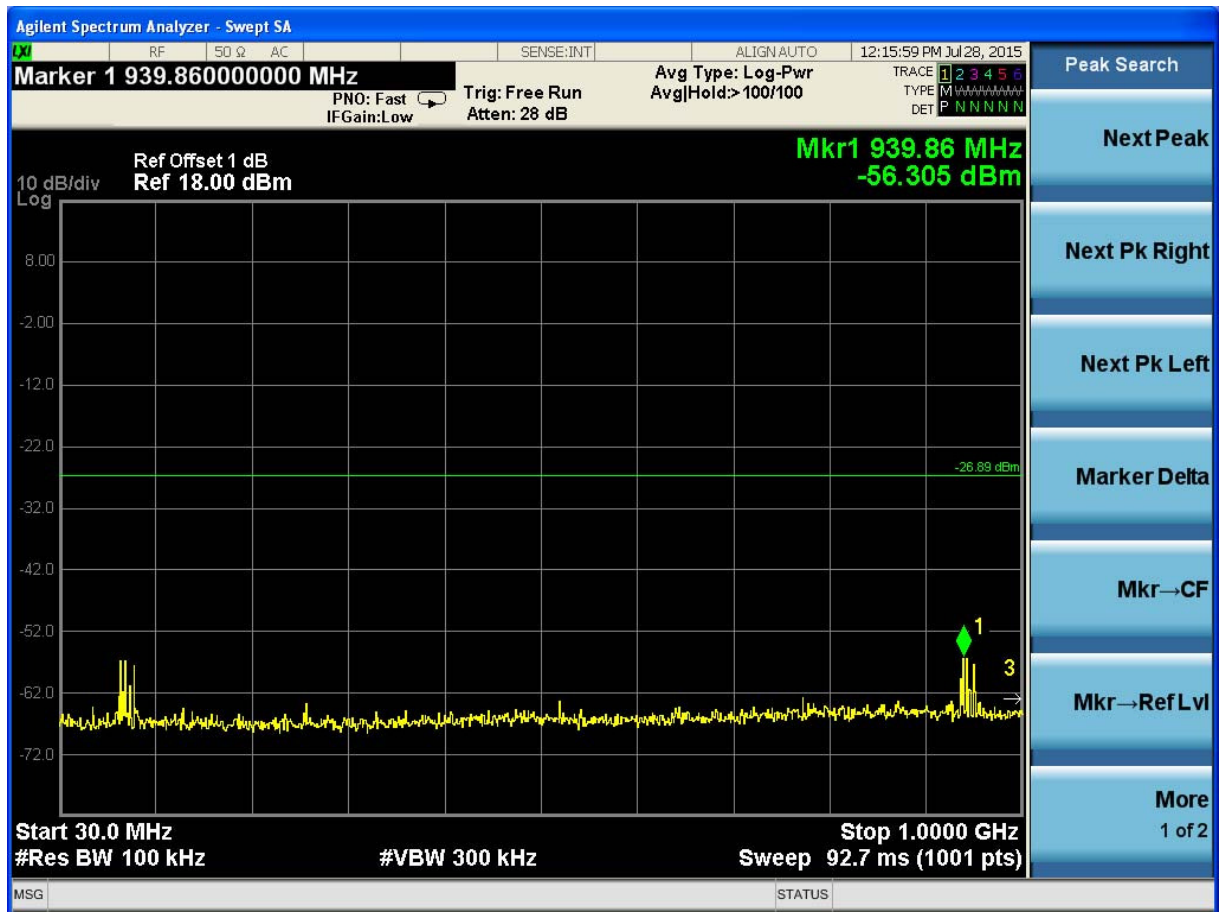

(Plot 4.7.1 A3: Channel 00: 2402MHz @ GFSK)

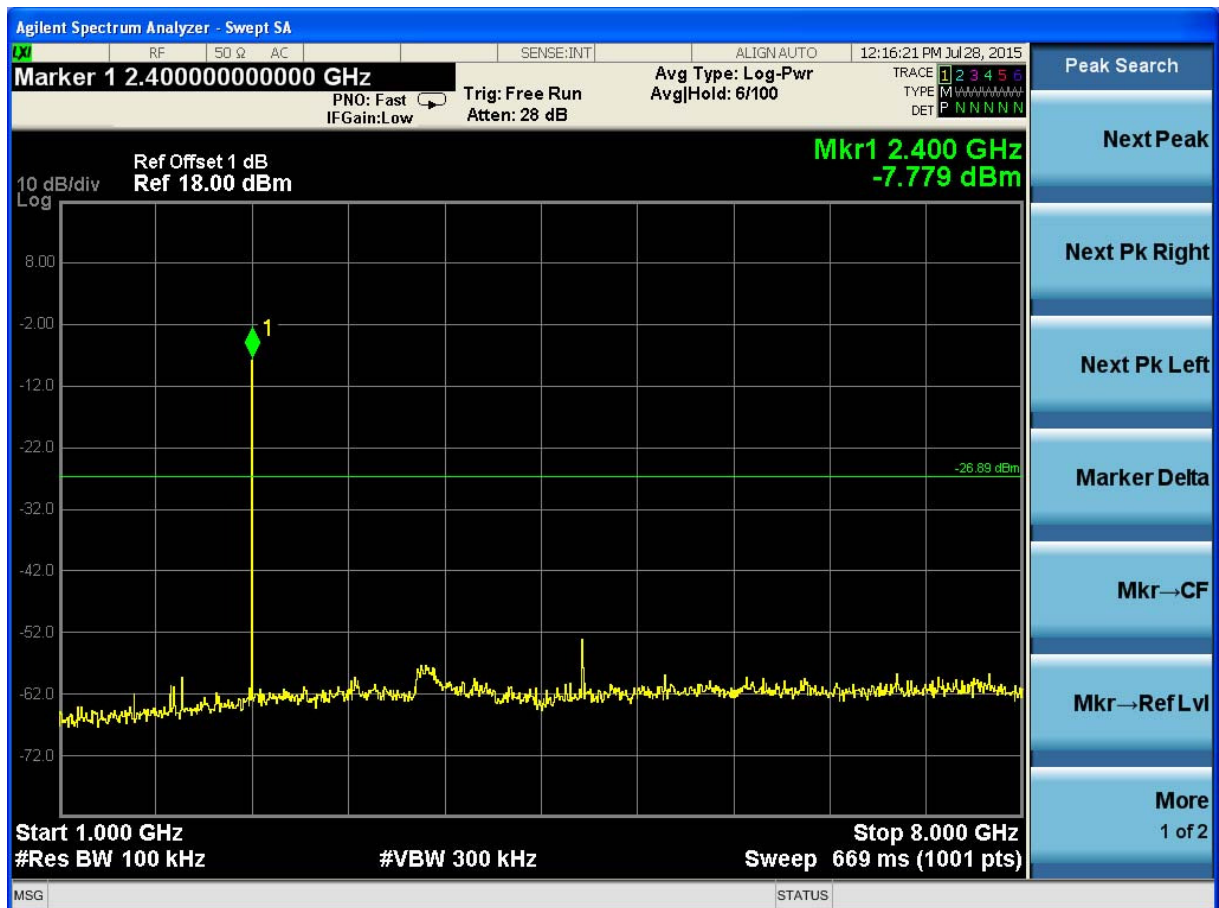

(Plot 4.7.1 A4: Channel 00: 2402MHz @ GFSK)

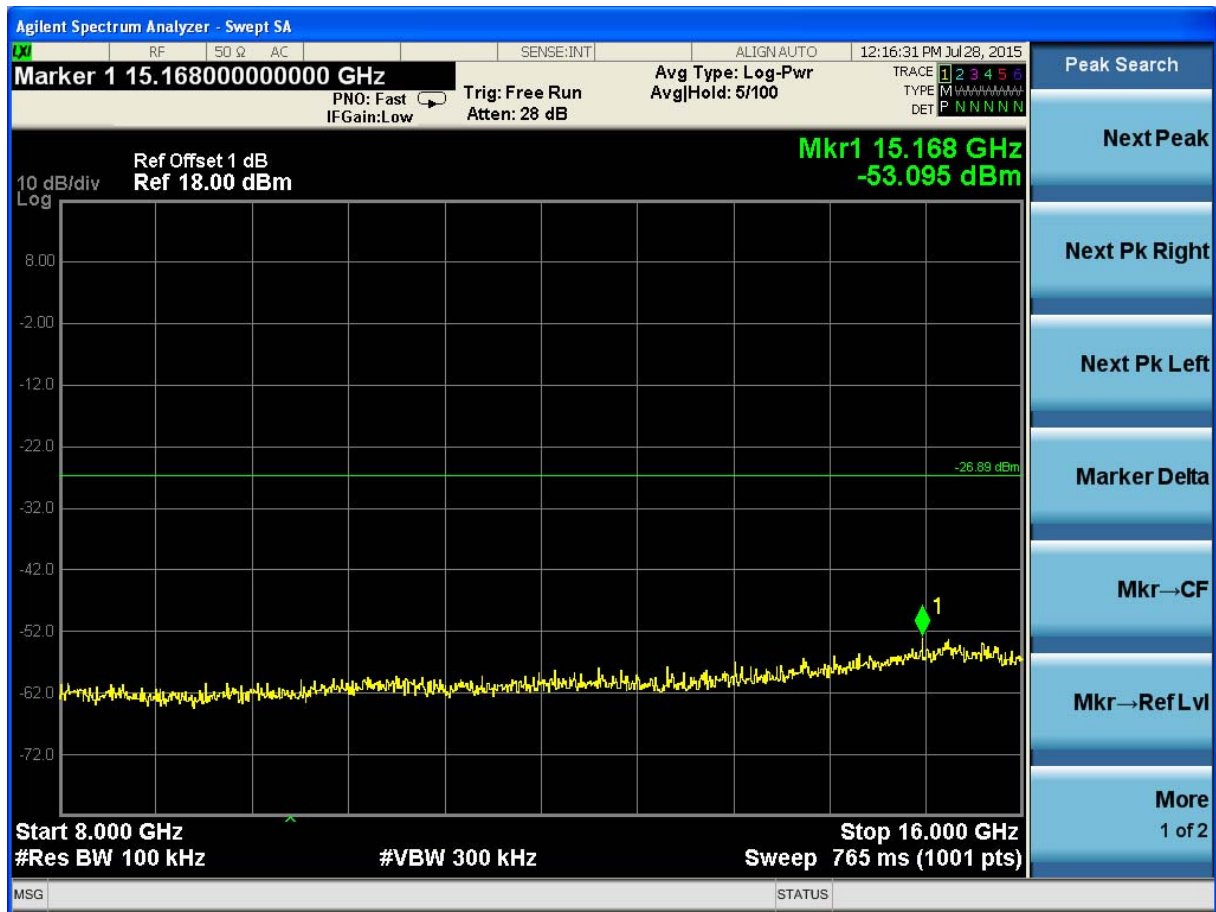


(Plot 4.7.1 A5: Channel 00: 2402MHz @ GFSK)




(Plot 4.7.1 A6: Channel 00: 2402MHz @ GFSK)




(Plot 4.7.1 B1: Channel 19: 2440MHz @ GFSK)

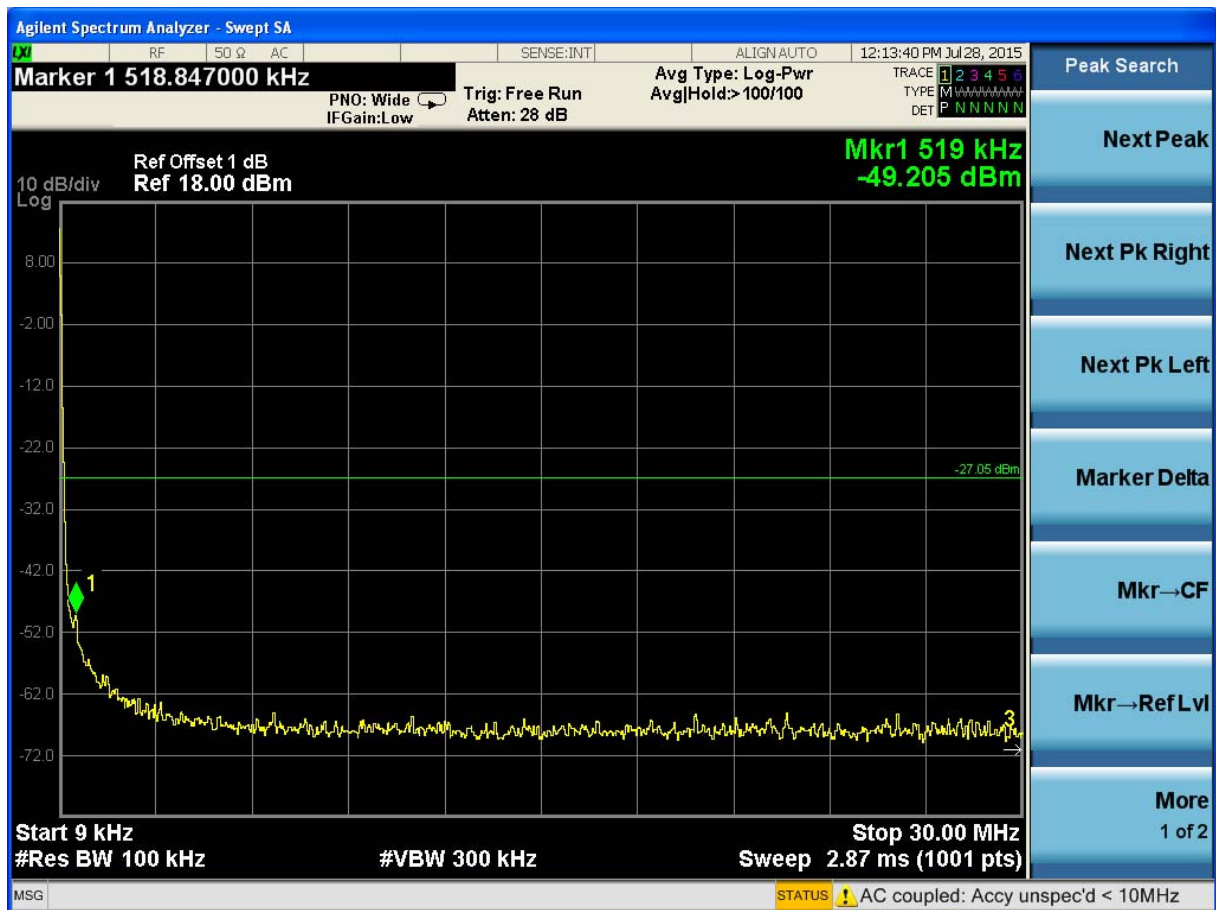

(Plot 4.7.1 B2: Channel 19: 2440MHz @ GFSK)

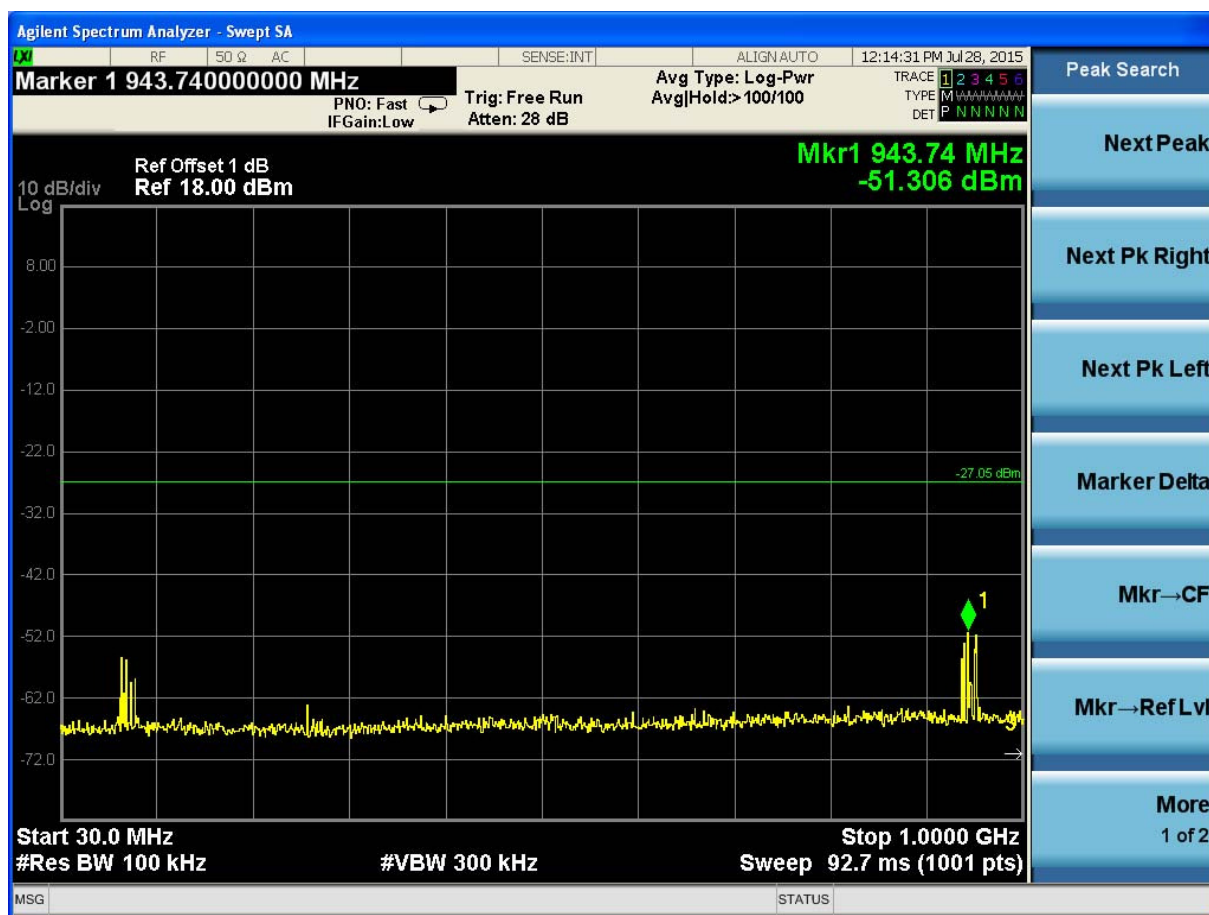

(Plot 4.7.1 B3: Channel 19: 2440MHz @ GFSK)

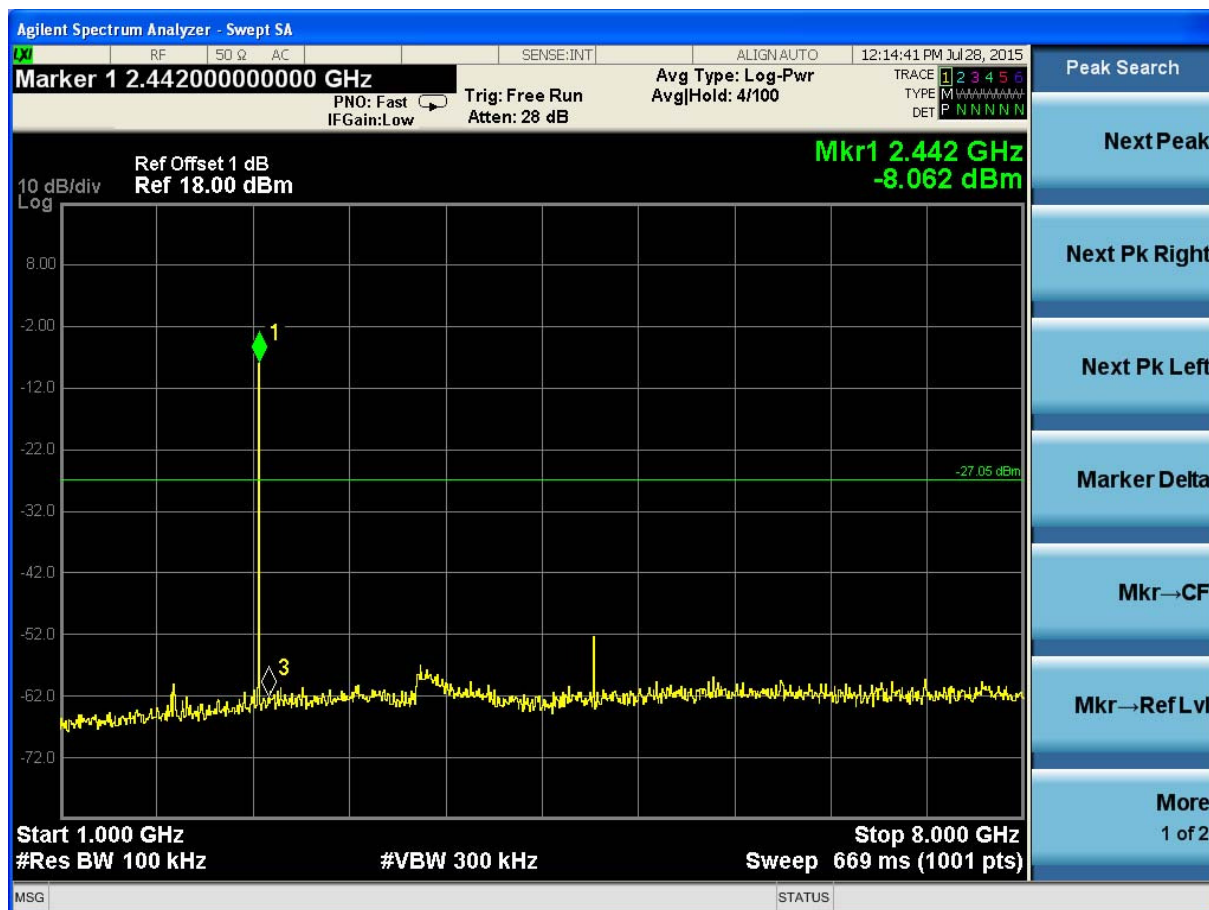

(Plot 4.7.1 B4: Channel 19: 2440MHz @ GFSK)




(Plot 4.7.1 B5: Channel 19: 2440MHz @ GFSK)




(Plot 4.7.1 B6: Channel 19: 2440MHz @ GFSK)




(Plot 4.7.1 C1: Channel 39: 2480MHz @ GFSK)

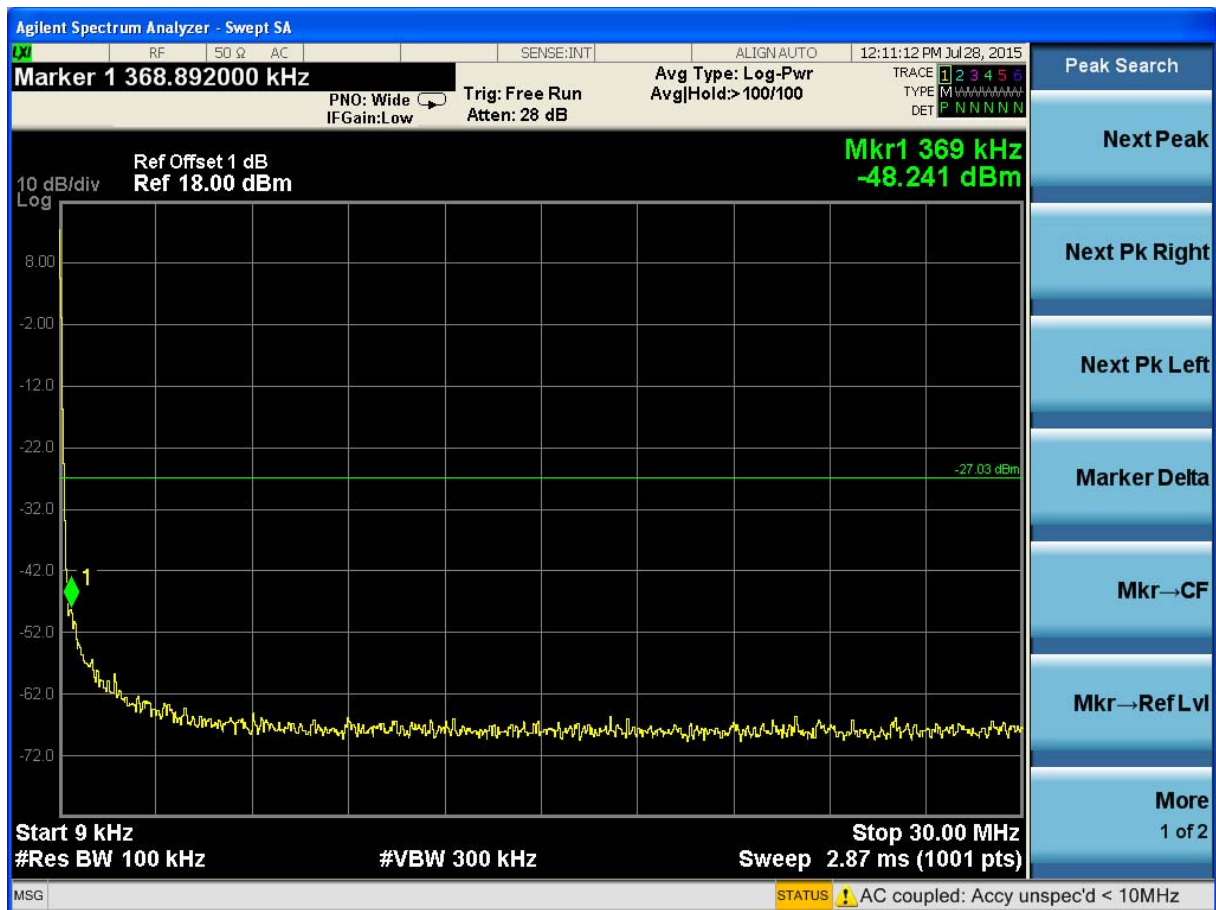

(Plot 4.7.1 C2: Channel 39: 2480MHz @ GFSK)

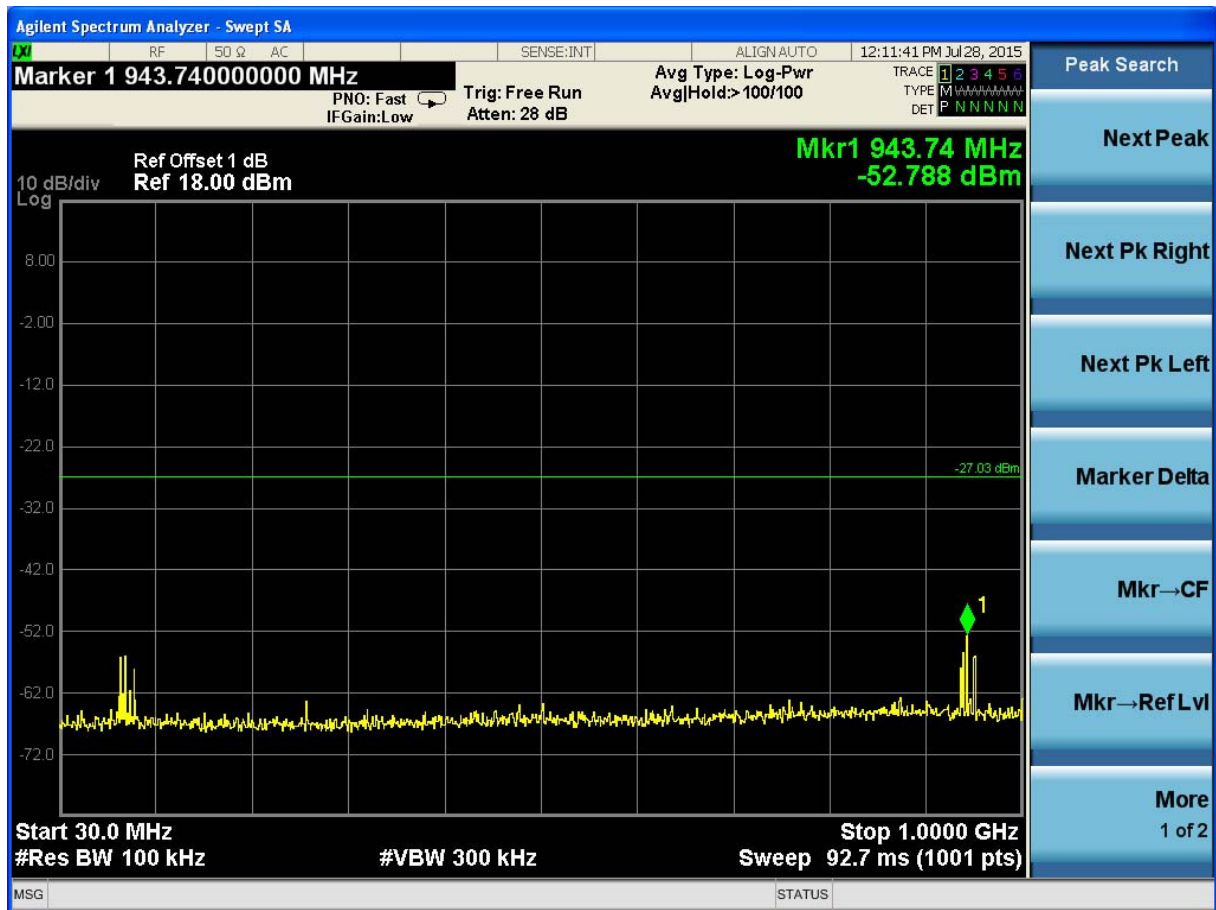

(Plot 4.7.1 C3: Channel 39: 2480MHz @ GFSK)

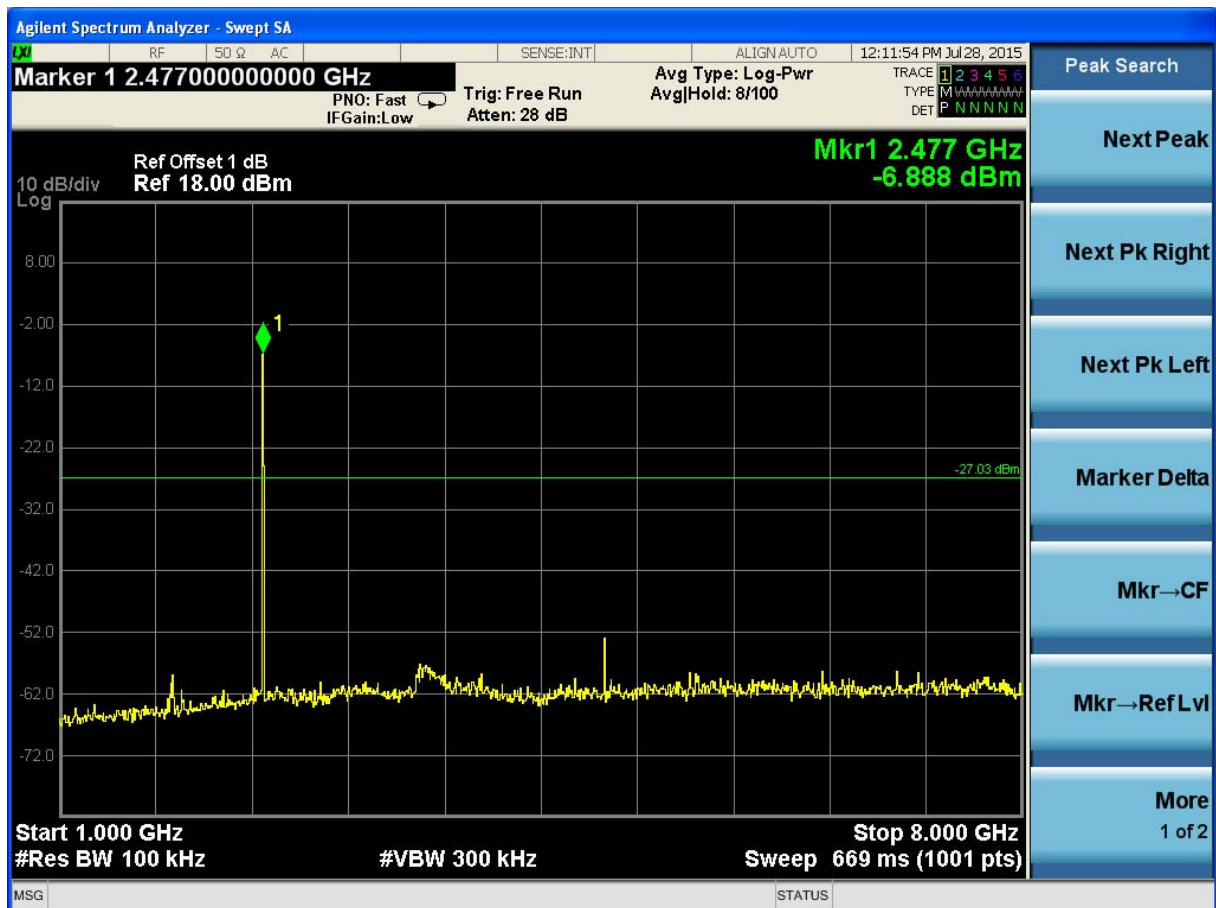


(Plot 4.7.1 C4: Channel 39: 2480MHz @ GFSK)




(Plot 4.7.1 C5: Channel 39: 2480MHz @ GFSK)



(Plot 4.7.1 C6: Channel 39: 2480MHz @ GFSK)

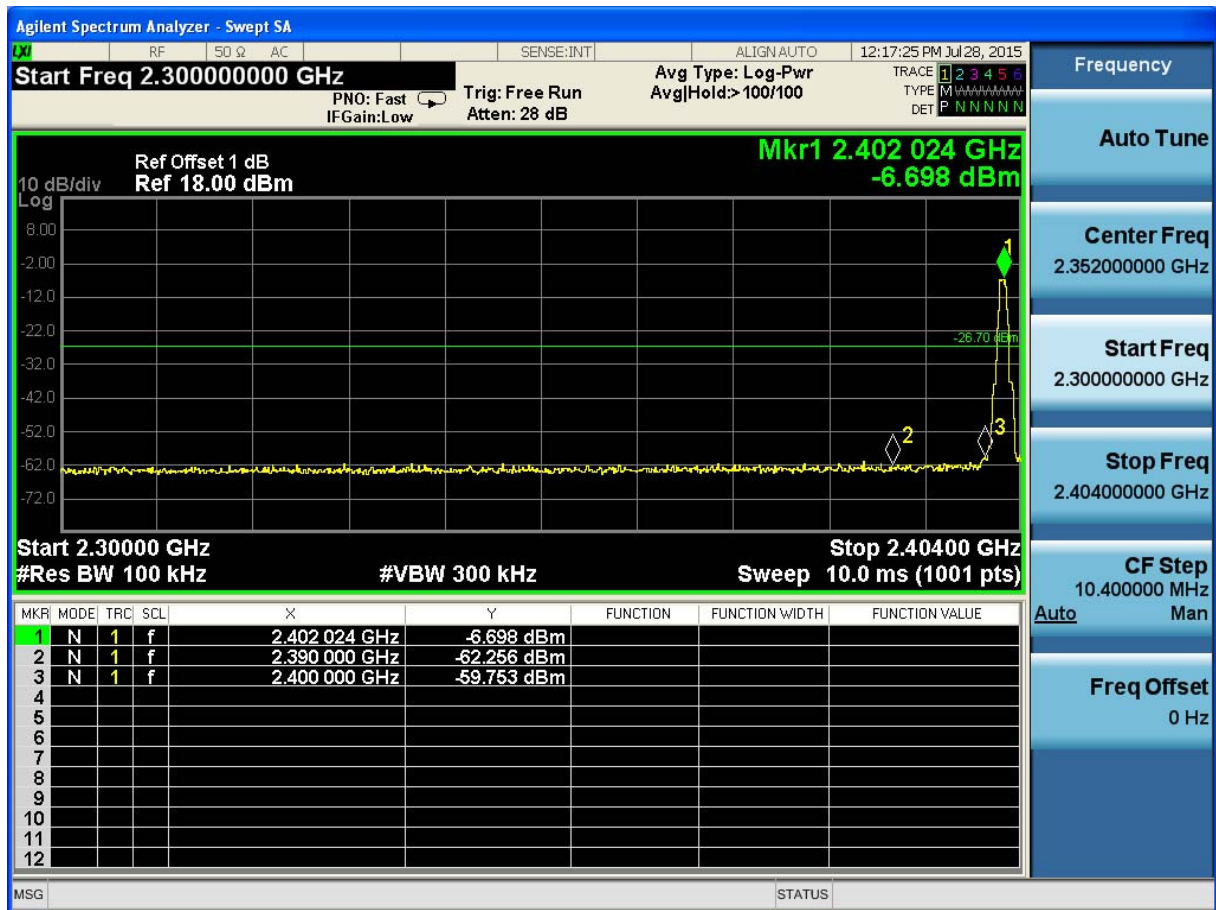

(Plot 4.7.1 D: Channel 00: 2402MHz @ GFSK)

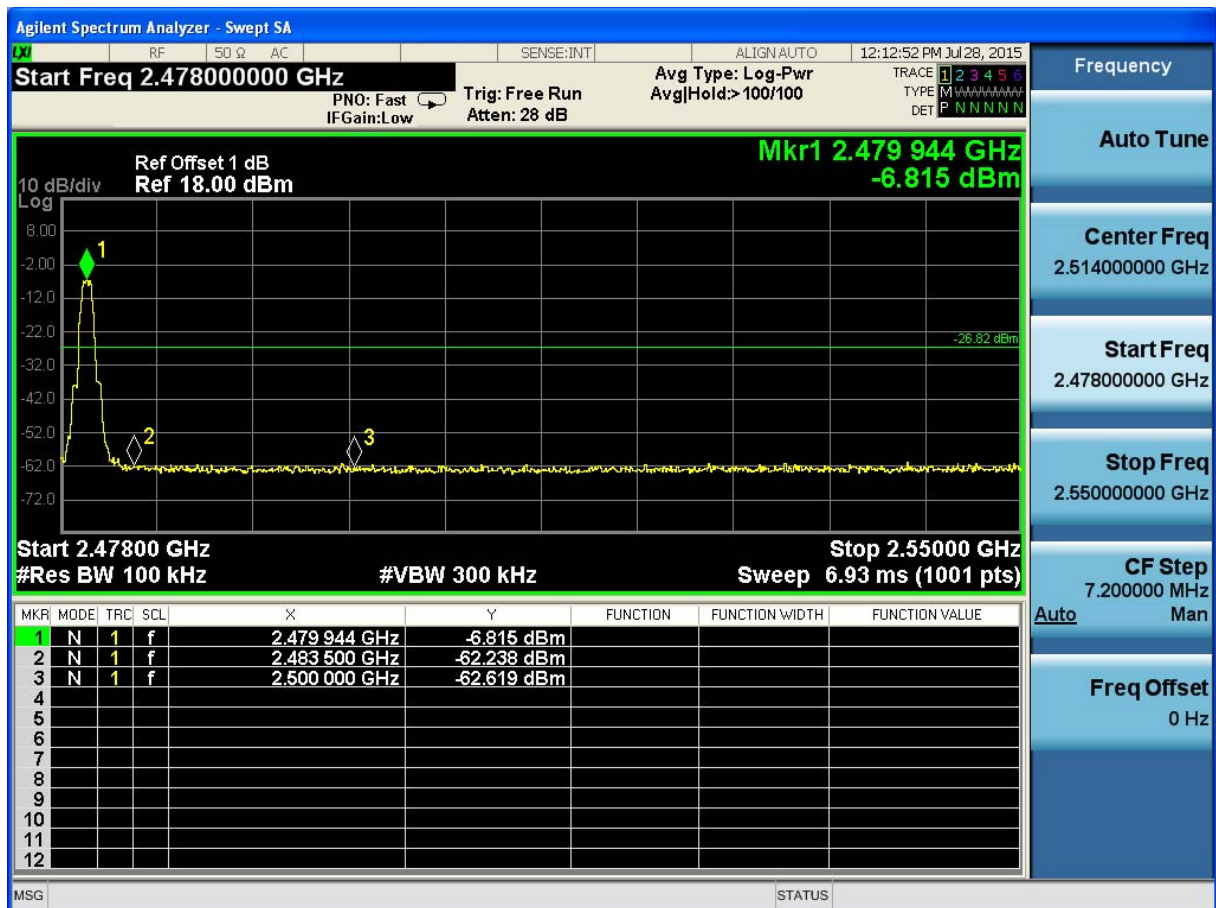

(Plot 4.7.1 E: Channel 39: 2480MHz @ GFSK)

4.8. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Measurement

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module.

Measurement parameters

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1MHz
Video bandwidth:	3MHz
Trace-Mode:	Max hold

Limits

FCC	IC
Antenna Gain	
6 dBi	

Results

T _{nom}	V _{nom}	Lowest Channel 2402 MHz	Middle Channel 2440 MHz	Highest Channel 2480 MHz
Conducted power [dBm] Measured with GFSK modulation		-4.56	-4.78	-3.58
Radiated power [dBm] Measured with GFSK modulation		-6.20	-6.28	-4.67
Gain [dBi] Calculated		-1.64	-1.50	-1.09
Measurement uncertainty		± 0.6 dB (cond.) / ± 2.56 dB (rad.)		

.....End of Report.....