

FCC SAR TEST REPORT

Test File No : F690501/RF-SAR002460

Equipment Under Test	Air Drop Equipment
Model Name	FAD-1000
Applicant	IO Factory Inc
Address of Applicant	31 st Floor S Bulding, Songdo Techno Park IT Center, 32, Songdogwahak-ro, Yeonsu-gu Incheon 21984 Republic of Korea
FCC ID	2ALHLFAD10000
Exposure Category	General Population/Uncontrolled Exposure
Standards	FCC 47 CFR Part 2 (2.1093) IEEE 1528, 2013 ANSI/IEEE C95.1, C95.3
Date of Receipt	2017-02-02
Date of Test(s)	2017-04-21
Date of Issue	2017-04-26
Test Result	Refer to the Page 05

In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Korea Co., Ltd. or testing done by SGS Korea Co., Ltd. in connection with distribution or use of the product described in this report must be approved by SGS Korea Co., Ltd. in writing.



**Report prepared by /
Matthew Park
Test Engineer**



**Approved by /
Jongwon Ma
Technical Manager**

Revision history

Revision	Date of issue	Revisions	Revised By
-	April 26, 2017	Initial issue	-

Contents

1	Testing Laboratory_____	5
2	Details of Manufacturer_____	5
3	Description of EUT(s)_____	5
4	The Highest Reported SAR Values_____	5
5	Test Methodology_____	6
6	Test Environment_____	6
7	Specific Absorption Rate (SAR)_____	7
7.1	Introduction_____	7
7.2	SAR Definition_____	7
7.3	Test Standards and Limits_____	7
8	The SAR Measurement System_____	9
9	System Components_____	10
9.1	Probe_____	10
9.2	SAM Phantom_____	10
9.3	Device Holder_____	10
10	SAR Measurement Procedures_____	11
10.1	Normal SAR Measurement Procedure_____	11
11	SAR System Verification_____	12
12	Tissue Simulant Fluid for the Frequency Band_____	13
13	Instruments List_____	14
14	FCC Power Measurement Procedures_____	15
15	Measured and Reported SAR_____	15
16	Maximum Output Power Specifications_____	15
16.1	LoRa Maximum Output Power Specifications _____	15
17	RF Conducted Power Measurement _____	15
18	Transmit Antenna Separation Distances _____	16
19	LoRa Duty Cycle used for SAR Testing _____	17
20	SAR Data Summary_____	18
21	SAR Measurement Variability_____	19
21.1	Measurement Variability_____	19
21.2	Measurement Uncertainty_____	19
	Appendixes List_____	20
	Appendixes A.1_____	21
	Appendixes A.2_____	22
	Appendixes B.1_____	23
	Appendixes C.1_____	24
	Appendixes C.2_____	62
	Appendixes C.3_____	67
	THE END _____	74

1 Testing Laboratory

Company Name	SGS Korea Co., Ltd. (Gunpo 3 Laboratory)
Address	10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, 15807 Republic of Korea
Telephone	+82 +31 - 428 - 5700
FAX	+82 +31 - 427 - 2371

2 Details of Manufacturer

Applicant	IO Factory Inc
Address	31 st Floor S Bulding, Songdo Techno Park IT Center, 32, Songdogwahak-ro, Yeonsu-gu Incheon 21984 Republic of Korea
Email	mspark@tvakorea.com
Phone No.	+82-270-7542-3737

3 Description of EUT(s)

EUT Type	Air Drop Equipment
Model Name	FAD-1000
Serial Number	#1
Mode of Operation	LoRa
Duty Cycle	1.153 (LoRa)
Body worn Accessory	None
Tx Frequency Range	905.0

5 Test Methodology

ANSI C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. It specifies the maximum exposure limit of 1.6 W/kg as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

Test tests documented in this report were performed in accordance with IEEE Standard 1528-2013 and the following published KDB procedures.

In additions;

☒	KDB 865664 D01v01r04	SAR Measurement Requirements for 100 MHz to 6 GHz
☒	KDB 447498 D01v06	Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies
☐	KDB 447498 D02v02r01	SAR Measurement Procedures for USB Dongle Transmitters
☐	KDB 248227 D01v02r02	SAR Guidance For IEEE 802.11 (Wi-Fi) Transmitters
☐	KDB 615223 D01v01r01	802.16e/WiMax SAR Measurement Guidance
☐	KDB 616217 D04v01r02	SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers
☐	KDB 643646 D01v01r03	SAR Test Reduction Considerations for Occupational PTT Radios
☐	KDB 648474 D03v01r04	Evaluation and Approval Considerations for Handsets with Specific Wireless Charging Battery Covers
☐	KDB 648474 D04v01r03	SAR Evaluation Considerations for Wireless Handsets
☐	KDB 680106 D01v02	RF Exposure Considerations for Low Power Consumer Wireless Power Transfer Applications
☐	KDB 941225 D01v03r01	3G SAR Measurement Procedures
☐	KDB 941225 D05v02r05	SAR Evaluation Considerations for LTE Devices
☐	KDB 941225 D06v02r01	SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities
☐	KDB 941225 D07v01r02	SAR Evaluation Procedures for UMPC Mini-Tablet Devices

6 Testing Environment

Ambient temperature	: 18°C ~ 25°C
Relative humidity	: 30% ~ 70%
Liquid temperature of during the test	: <

7 Specific Absorption Rate (SAR)

7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled

7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7.3 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields,"

3

source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100

8 The SAR Measurement System

A block diagram of the SAR measurement System is given in Fig. 1. This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY6 professional system). The model EX3DV4 field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E|^2) / \rho$ where σ and ρ are the conductivity and mass density of the tissue-simulant.

The DASY 6 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Staubli TX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- A dosimeter probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- Data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

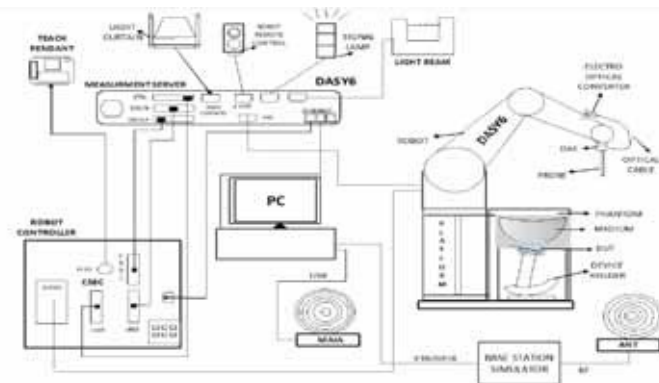


Fig 1. The microwave circuit arrangement used for SAR system verification

- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 8.1 Pro.
- DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Verification dipole kits allowing to validate the proper functioning of the system.

9 System Components

9.1 Probe

- Construction** : Symmetrical design with triangular core.
Built-in shielding against static charges.
PEEK enclosure material (resistant to organic solvents,
e.g., DGBE)
- Calibration** : Basic Broad Band Calibration in air Conversion Factors
(CF) for HSL 835 and HSL1900.
Additional CF-Calibration for other liquids and
frequencies upon request.
- Frequency** : 10

EX3DV4 E-Field Probe



10 SAR Measurement Procedures

10.1 Normal SAR Measurement Procedure

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The Minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 1.4

< Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04 >

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	½·δ·ln(2) ± 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx _{Area} , Δy _{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx _{Zoom} , Δy _{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz _{Zoom} (n)		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	Δz _{Zoom} (1): between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		Δz _{Zoom} (n>1): between subsequent points	≤ 1.5·Δz _{Zoom} (n-1)	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the area scan based <i>1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

11 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. 1. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. These tests were done at 835



12 Tissue Simulant Fluid for the Frequency Band

The dielectric properties for this simulant fluid were measured by using the Speag Model DAK-3.5 Dielectric Probe in conjunction with Agilent E5071C Network Analyzer(300

13 Instruments List

Test Platform	SPEAG DASY6 Professional				
Location	10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, 15807 Republic of Korea				
Manufacture	SPEAG				
Description	SAR Test System (Frequency range 300 MHz – 6 GHz)				
Software Reference	DASY52: 52.8.8(1258) SEMCAD X: 14.6.10(7373)				
Hardware Reference					
Equipment	Type	Serial Number	Cal Date	Cal Interval	Cal Due
Robot	TX60 L	F16/55FYA1/A/01	N/A	N/A	N/A
Phantom	SAM Phantom	1905	N/A	N/A	N/A
Verification Dipole	D835V2	490	2016-05-25	Biennial	2018-05-25
Dielectric Assessment Kit	DAK-3.5	1228	2016-11-17	Annual	2017-11-17
DAE	DAE4	1430	2017-03-16	Annual	2018-03-16
E-Field Probe	EX3DV4	7413	2016-06-29	Annual	2017-06-29
Network Analyzer	E5071C	MY46111535	2016-05-24	Annual	2017-05-24
Power Meter	N1914A	MY56120017	2016-07-06	Annual	2017-07-06
Power Sensor	N8481A	MY56120026	2016-07-06	Annual	2017-07-06
Power Sensor	N8481A	MY56120030	2016-07-06	Annual	2017-07-06
Vector Signal Generator	SMBV100A	262093	2016-07-06	Annual	2017-07-06
RF Amplifier	AMP2027	10008	2016-07-12	Annual	2017-07-12
Dual Directional Coupler	778D	MY52180578	2016-07-06	Annual	2017-07-06
LP Filter	WLJ5-1500-2355-6000-60EF	1	2016-08-19	Annual	2017-08-19
Attenuator	2	BY6201	2016-08-16	Annual	2017-08-16
Attenuator	2	CB6049	2016-08-16	Annual	2017-08-16
Attenuator	05AS102-K03	A2	2016-12-15	Annual	2017-12-15
Digital Hygro-Thermometer	TE-201	TE-201-1	2016-08-12	Annual	2017-08-12
Digital Thermometer	SDT25	16031500243	2016-08-12	Annual	2017-08-12
Signal Analyzer	FSV7	103082	2016-07-06	Annual	2017-07-06

14 FCC Power Measurement Procedures

The SAR measurement Software calculates a reference point at the start and end of the test to check for power drifts. If conducted power deviations of more than 5 % occurred, the tests were repeated.

15 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. Test highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

16 Maximum Output Power Specifications

This device operates using the following maximum output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06

16.1 LoRa Maximum Output Power Specifications


Average power for Production (



18 Transmit Antenna Separation Distances

Per FCC KDB 447498 D01v06, the SAR exclusion threshold for distances < 50

19 Duty Cycle used for SAR Testing

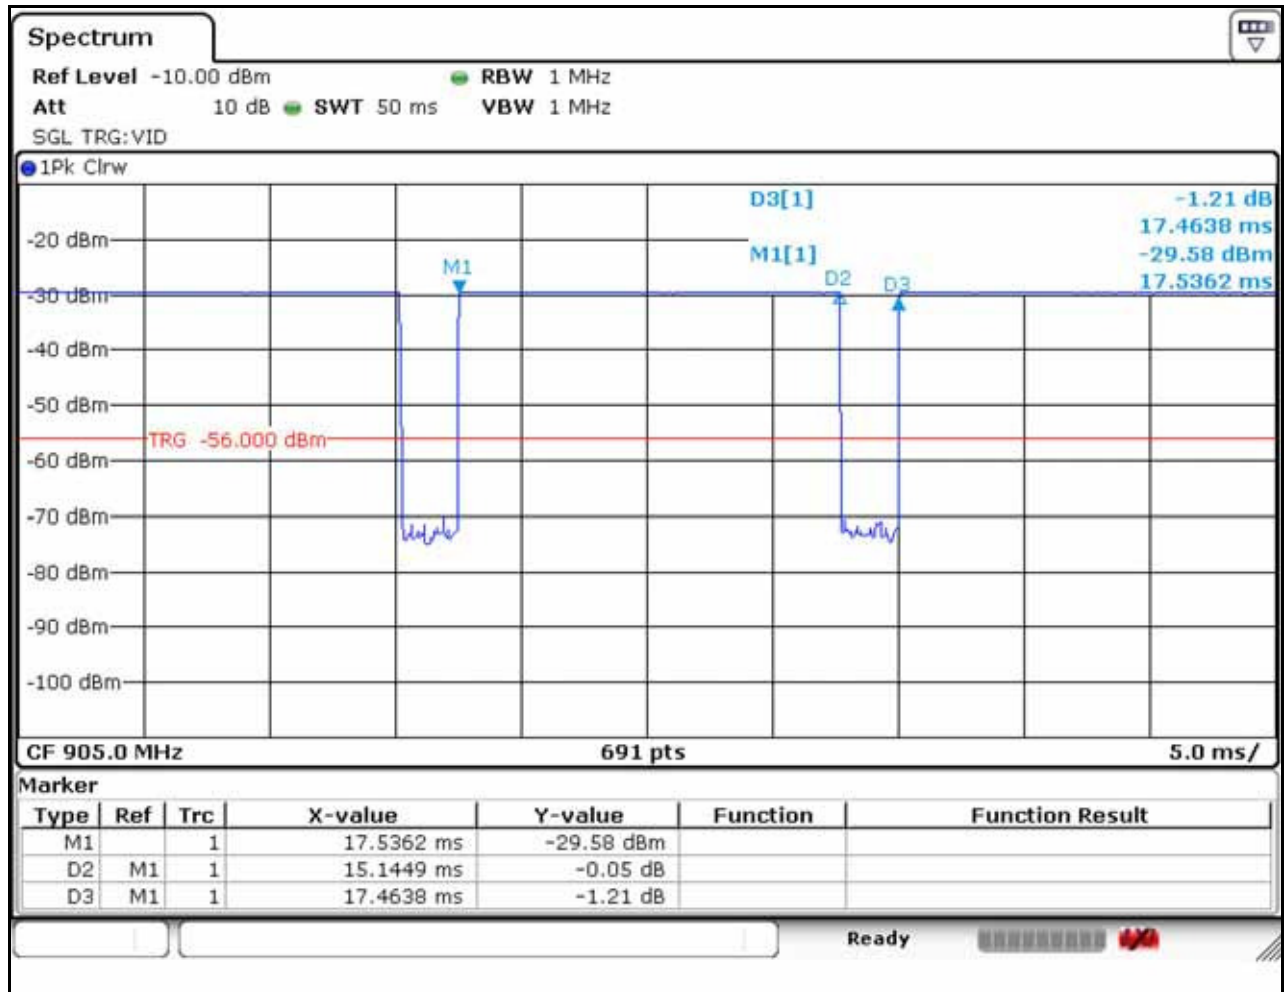

LoRa Duty cycle measurement

$$T_{on} = 15.14 \text{ ms}$$

$$T_{on} + T_{off} = 17.46 \text{ ms}$$

$$\text{Duty Cycle} = (T_{on} / T_{on} + T_{off}) \times 100$$

$$86.7 \% = (15.14 / 17.46) \times 100$$

$$\text{SAR Crest Factor} = 1 / 0.867 = 1.153$$

LoRa Duty cycle: 86.7%

20 SAR Data Summary

Body SAR

EUT Position	Mode	Traffic Channel Frequency (	Power(dBm)	Peak SAR of Area Scan(W/kg)	1-g SAR (W/kg)	Scaling Factor (Power)	1-g Scaled SAR (W/kg)	Plot No
-----------------	------	-----------------------------------	------------	-----------------------------------	-------------------	------------------------------	-----------------------------	------------

21 SAR Measurement Variability

21.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

1. When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
2. A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
3. A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

4. Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

21.2 Measurement Uncertainty

The measured SAR was < 1.5 W/kg for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

Appendixes List

Appendix A	A.1 Verification Test Plots for 835 MHz A.2 SAR Test Plots for LoRa
Appendix B	B.1 Uncertainty Analysis
Appendix C	C.1 Calibration certificate for Probe (S/N 7413) C.2 Calibration certificate for DAE (S/N 1430) C.3 Calibration certificate for Dipole (S/N 490)

Appendix A.1 Verification Test Plots for 835 MHz

Date: 2017-04-21

Test Laboratory : SGS Korea (Gunpo Laboratory)
 File Name: [835MHz Verification da53-0](#)

Input Power : 100 mW

Ambient Temp : 22.7 °C Tissue Temp : 21.9 °C

DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:490

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 835$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 53.786$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7413; ConvF(9.34, 9.34, 9.34); Calibrated: 6/29/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1430; Calibrated: 3/16/2017
- Phantom: Twin-SAM V.5.0 SN:1905; Type: SN:1905; Serial: SN:1905
- DASY52 52.8.8(1258)SEMCAD X 14.6.10(7372)

Verification/835MHz Verification/Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
 Maximum value of SAR (interpolated) = 1.35 W/kg


Verification/835MHz Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 39.29 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 0.999 W/kg; SAR(10 g) = 0.665 W/kg

Maximum value of SAR (measured) = 1.32 W/kg

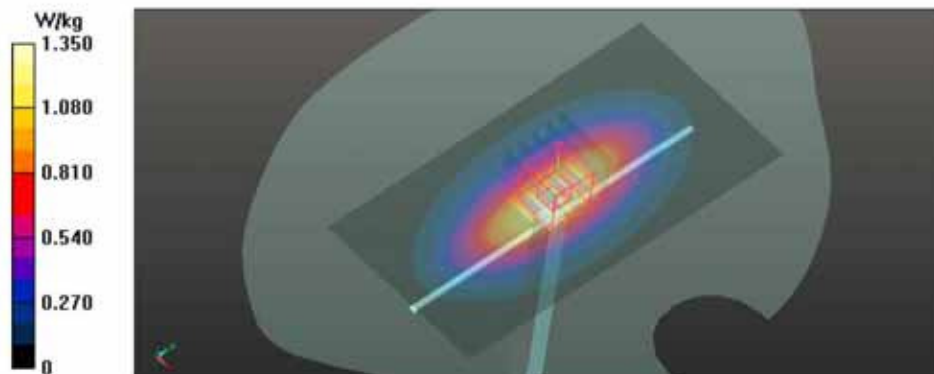

Appendix A.2 SAR Test Plots for LoRa

Date: 2017-04-21

Test Laboratory : SGS Korea (Gunpo Laboratory)
File Name: [LoRa_Low_Channel_905MHz_Edge1_da53.0](#)

Ambient Temp : 22.7 °C Tissue Temp : 21.9 °C

DUT: FAD-1000; Type: Air Drop Equipment; Serial: #1


Communication System: UID 0, LoRa (0); Frequency: 905 MHz; Duty Cycle: 1:1.153
Medium parameters used: $f = 905 \text{ MHz}$; $\sigma = 1.009 \text{ S/m}$; $\epsilon_r = 53.166$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7413; ConvF(9.34, 9.34, 9.34); Calibrated: 6/29/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1430; Calibrated: 3/16/2017
- Phantom: Twin-SAM V.5.0 SN:1905; Type: SN:1905; Serial: SN:1905
- DASY52 52.8.8(1258)SEMCAD X 14.6.10(7372)

Body/LoRa_Low_Channel_905MHz_Edge1/Area Scan (61x81x1): Interpolated grid: $dx=1.500 \text{ mm}$,
 $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.108 W/kg

Body/LoRa_Low_Channel_905MHz_Edge1/Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$,
 $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 8.862 V/m; Power Drift = 0.13 dB
Peak SAR (extrapolated) = 0.113 W/kg
SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.042 W/kg
Maximum value of SAR (measured) = 0.0936 W/kg

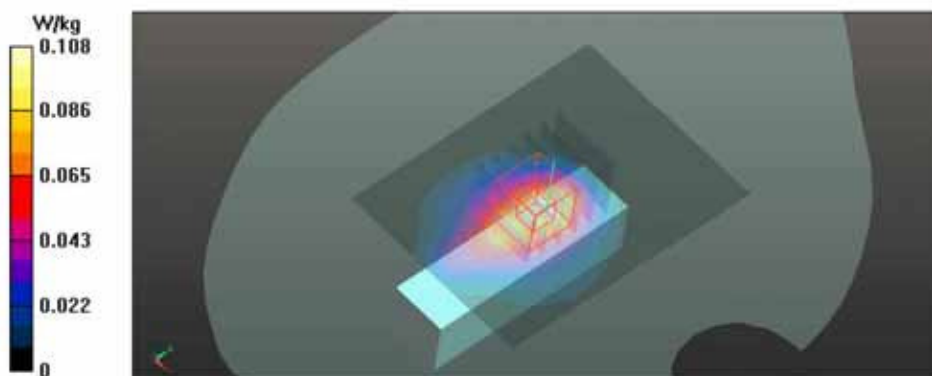

Appendix B.1 Uncertainty Analysis DASY6#2

Measurement uncertainty for 300 MHz to 6 GHz averaged over 1 gram

a	b	c	d	e = f(d,k)	g	i =	k
						cxg/e	
Uncertainty Component	Section in	Tol	Prob .	Div.	Ci	lg	Vi
	IEEE 1528	(%)	Dist.		(lg)	ui (%)	(Veff)
Probe calibration	E.2.1	6.55	N	1	1	6.55	∞
Axial isotropy	E.2.2	4.7	R	1.73	0.71	1.92	∞
Hemispherical isotropy	E.2.2	9.6	R	1.73	0.71	3.92	∞
Boundary effect	E.2.3	1.0	R	1.73	1	0.58	∞
Linearity	E.2.4	4.7	R	1.73	1	2.71	∞
System detection limit	E.2.5	0.3	R	1.73	1	0.14	∞
Readout electronics	E.2.6	0.3	N	1	1	0.30	∞
Response time	E.2.7	0.5	R	1.73	1	0.29	∞
Integration time	E.2.8	2.6	R	1.73	1	1.50	∞
RF ambient Condition - Noise	E.6.1	3.0	R	1.73	1	1.73	∞
RF ambient Condition - reflections	E.6.1	3.0	R	1.73	1	1.73	∞
Probe Positiones	E.6.2	1.5	R	1.73	1	0.87	∞
Probe Positioning	E.6.3	2.9	R	1.73	1	1.67	∞
Max. SAR evaluation	E.5.2	1.0	R	1.73	1	0.58	∞
Test sample positioning	E.4.2	0.3	N	1	1	0.31	9
Device holder uncertainty	E.4.1	3.6	N	1	1	3.63	4
Output power variation -SAR drift measurement	6.6.3	5.0	R	1.73	1	2.89	∞
Phantom uncertainty	E.3.1	6.1	R	1.73	1	3.52	∞
Liquid conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	1.85	∞
Liquid conductivity - measurement uncertainty	E.3.2	1.8	N	1	0.64	1.13	5
Liquid permittivity - deviation from target values	E.3.3	5.0	R	1.73	0.6	1.73	∞
Liquid permittivity - measurement uncertainty	E.3.3	1.7	N	1	0.6	1.03	9

Combined standard uncertainty

Appendix C.1 Calibration certificate for Probe(S/N 7413)

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **SGS Korea (Dymstec)**

Certificate No: **EX3-7413_Jun16**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:7413**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6**
 Calibration procedure for dosimetric E-field probes



Calibration date: **June 29, 2016**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	06-Apr-16 (No. 217-02288/02289)	Apr-17
Power sensor NRP-Z91	SN: 103244	06-Apr-16 (No. 217-02288)	Apr-17
Power sensor NRP-Z91	SN: 103245	06-Apr-16 (No. 217-02289)	Apr-17
Reference 20 dB Attenuator	SN: 55277 (20x)	05-Apr-16 (No. 217-02293)	Apr-17
Reference Probe ES3DV2	SN: 3013	31-Dec-15 (No. ES3-3013, Dec15)	Dec-16
DAE4	SN: 660	23-Dec-15 (No. DAE4-660, Dec15)	Dec-16
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-16)	In house check: Jun-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-15)	In house check: Oct-16

	Name	Function	Signature
Calibrated by:	Michael Weber	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	
Issued: June 29, 2016			

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: EX3-7413_Jun16

Page 1 of 38

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}:** Assessed for E-field polarization $\theta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}:** DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR:** PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}; A, B, C, D** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle:** The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

EX3DV4 – SN:7413

June 29, 2016

Probe EX3DV4

SN:7413

Manufactured: March 10, 2016
Calibrated: June 29, 2016

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

EX3DV4- SN:7413

June 29, 2016

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7413

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.46	0.60	0.43	± 10.1 %
DCP (mV) ^B	119.6	99.6	97.1	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	118.1	±3.5 %
		Y	0.0	0.0	1.0		137.1	
		Z	0.0	0.0	1.0		146.6	

Note: For details on UID parameters see Appendix.

Sensor Model Parameters

	C1 fF	C2 fF	α V ⁻¹	T1 ms.V ⁻²	T2 ms.V ⁻¹	T3 ms	T4 V ⁻²	T5 V ⁻¹	T6
X	51.84	351.8	30.35	15.19	0.528	4.987	0.328	0.295	0.994
Y	50.91	381	35.76	14.85	0.972	5.02	1.629	0.199	1.007
Z	54.25	410.3	36.43	15.21	1.066	5.005	0.612	0.491	1.005

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4- SN:7413

June 29, 2016

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7413

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	41.9	0.89	9.74	9.74	9.74	0.44	0.80	± 12.0 %
835	41.5	0.90	9.28	9.28	9.28	0.48	0.80	± 12.0 %
900	41.5	0.97	9.15	9.15	9.15	0.30	1.01	± 12.0 %
1750	40.1	1.37	7.94	7.94	7.94	0.31	0.80	± 12.0 %
1900	40.0	1.40	7.70	7.70	7.70	0.37	0.80	± 12.0 %
2000	40.0	1.40	7.67	7.67	7.67	0.26	0.80	± 12.0 %
2300	39.5	1.67	7.34	7.34	7.34	0.33	0.80	± 12.0 %
2450	39.2	1.80	6.98	6.98	6.98	0.27	0.93	± 12.0 %
2600	39.0	1.96	6.82	6.82	6.82	0.29	0.80	± 12.0 %
5200	36.0	4.66	5.41	5.41	5.41	0.35	1.80	± 13.1 %
5300	35.9	4.76	5.15	5.15	5.15	0.35	1.80	± 13.1 %
5600	35.5	5.07	4.54	4.54	4.54	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.58	4.58	4.58	0.45	1.80	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:7413

June 29, 2016

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7413

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^f	Conductivity (S/m) ^f	ConvF X	ConvF Y	ConvF Z	Alpha ^g	Depth ^g (mm)	Unc (k=2)
750	55.5	0.96	9.31	9.31	9.31	0.42	0.82	± 12.0 %
835	55.2	0.97	9.34	9.34	9.34	0.47	0.83	± 12.0 %
1750	53.4	1.49	7.66	7.66	7.66	0.39	0.80	± 12.0 %
1900	53.3	1.52	7.44	7.44	7.44	0.40	0.89	± 12.0 %
2450	52.7	1.95	7.07	7.07	7.07	0.42	0.80	± 12.0 %
2600	52.5	2.16	6.84	6.84	6.84	0.36	0.80	± 12.0 %
5200	49.0	5.30	4.68	4.68	4.68	0.45	1.90	± 13.1 %
5300	48.9	5.42	4.44	4.44	4.44	0.50	1.90	± 13.1 %
5600	48.5	5.77	3.85	3.85	3.85	0.50	1.90	± 13.1 %
5800	48.2	6.00	4.16	4.16	4.16	0.50	1.90	± 13.1 %

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


^f At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:7413

June 29, 2016

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)


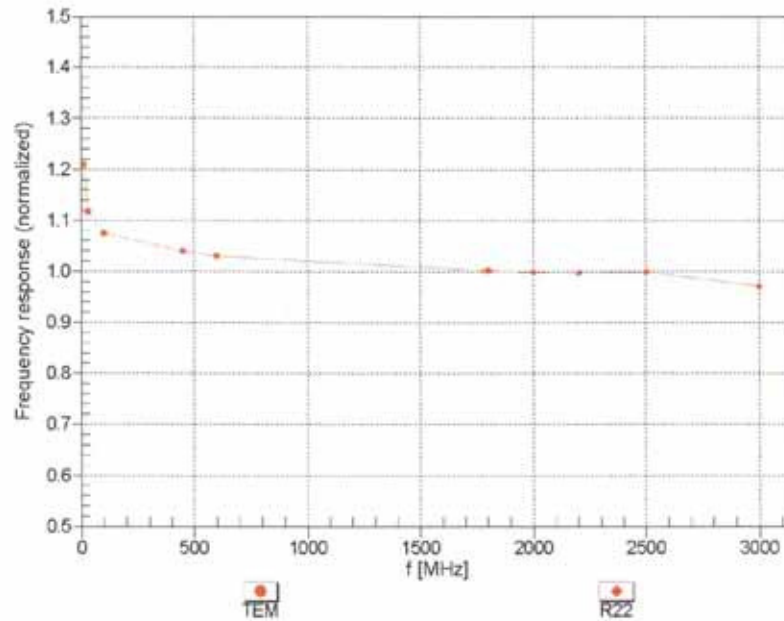


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

EX3DV4- SN:7413

June 29, 2016

Receiving Pattern (ϕ), $\theta = 0^\circ$

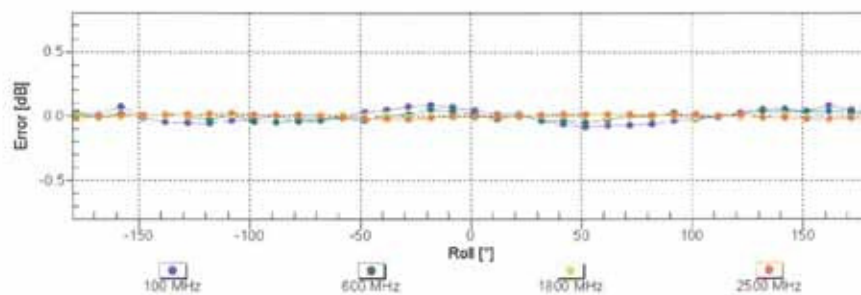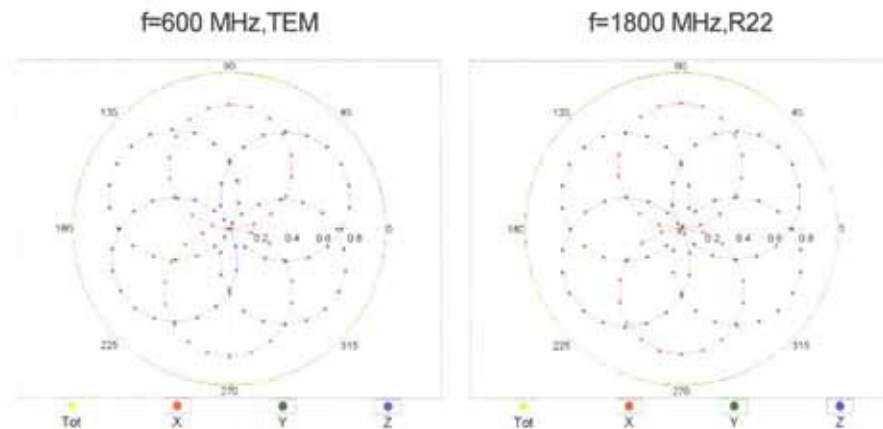


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

EX3DV4-- SN:7413

June 29, 2016

Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f_{\text{eval}} = 1900 \text{ MHz}$)

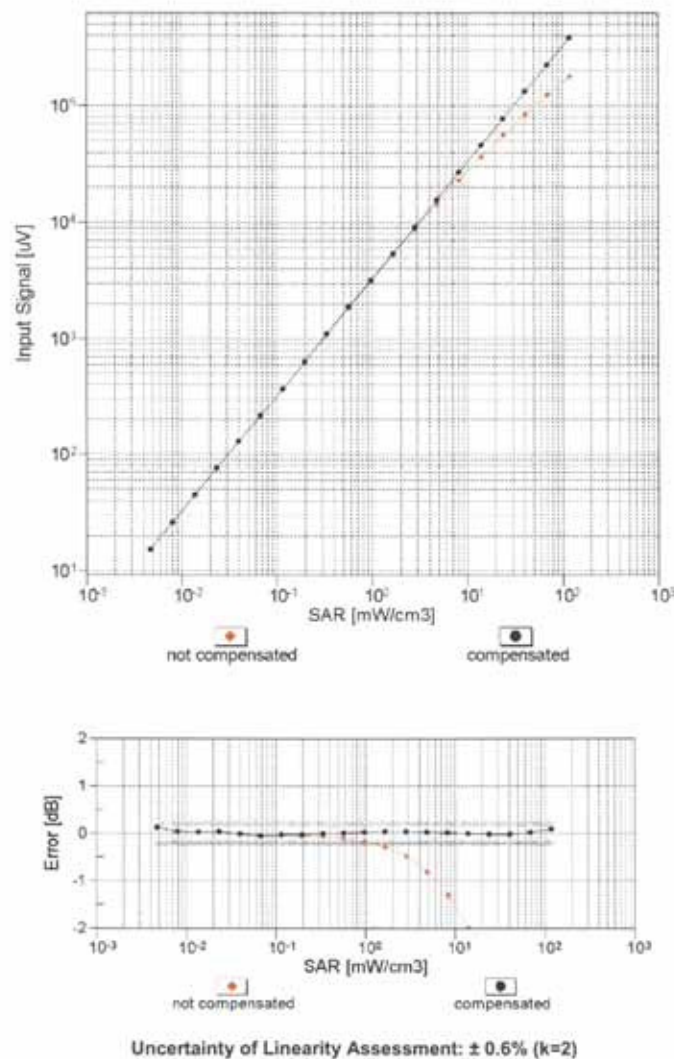

Certificate No: EX3-7413_Jun16

Page 9 of 38

Report File No : F690501/RF-SAR002460

Date of Issue : 2017-04-26

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)


RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)


EX3DV4- SN:7413

June 29, 2016

Conversion Factor Assessment

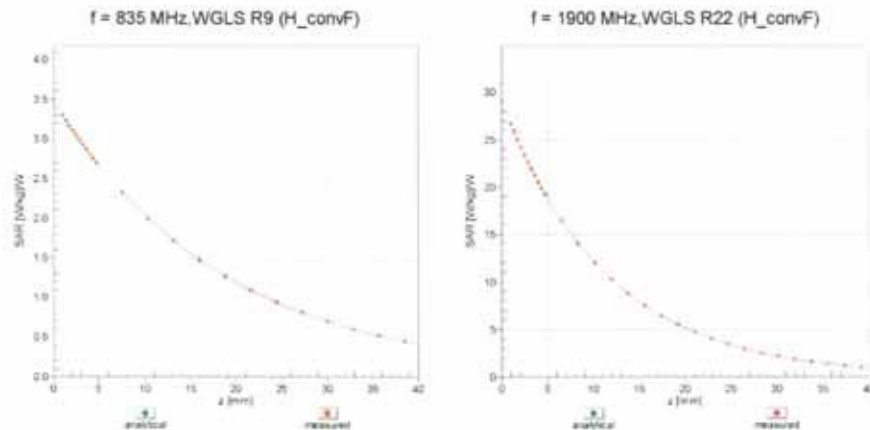

Deviation from Isotropy in Liquid Error (ϕ , θ), $f = 900$ MHz

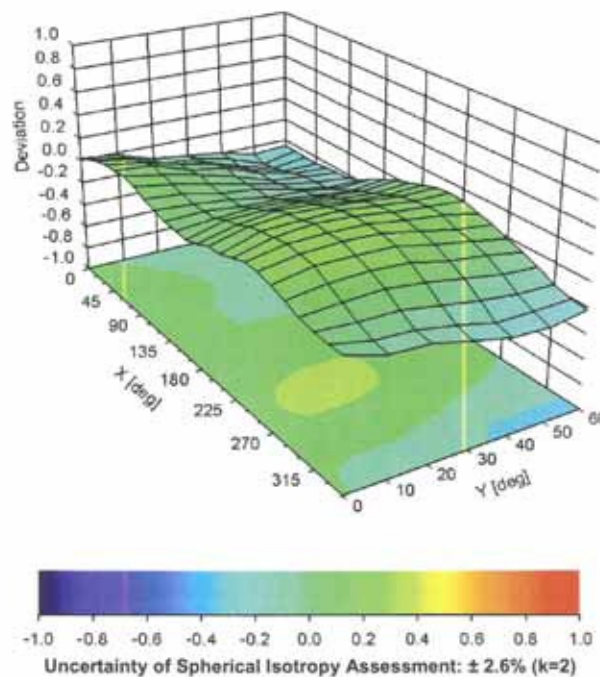

Certificate No: EX3-7413_Jun16

Page 10 of 38

EX3DV4- SN:7413

June 29, 2016

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7413

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	62
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

EX3DV4- SN:7413

June 29, 2016

Appendix: Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB μ V	C	D dB	VR mV	Max Unc ^E (k=2)
0	CW	X	0.00	0.00	1.00	0.00	118.1	$\pm 3.5\%$
		Y	0.00	0.00	1.00		137.1	
		Z	0.00	0.00	1.00		146.6	
10010- CAA	SAR Validation (Square, 100ms, 10ms)	X	2.41	64.88	9.47	10.00	20.0	$\pm 9.6\%$
		Y	3.52	69.66	12.77		20.0	
		Z	3.04	67.77	11.85		20.0	
10011- CAB	UMTS-FDD (WCDMA)	X	1.52	75.62	19.74	0.00	150.0	$\pm 9.6\%$
		Y	1.06	67.55	15.45		150.0	
		Z	1.01	66.54	14.85		150.0	
10012- CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	X	1.26	66.46	16.91	0.41	150.0	$\pm 9.6\%$
		Y	1.20	63.91	15.26		150.0	
		Z	1.17	63.46	14.93		150.0	
10013- CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	X	4.85	66.98	16.96	1.46	150.0	$\pm 9.6\%$
		Y	4.91	66.60	17.02		150.0	
		Z	4.92	66.40	16.90		150.0	
10021- DAB	GSM-FDD (TDMA, GMSK)	X	27.40	92.23	20.37	9.39	50.0	$\pm 9.6\%$
		Y	100.00	113.97	27.83		50.0	
		Z	38.89	100.98	24.44		50.0	
10023- DAB	GPRS-FDD (TDMA, GMSK, TN 0)	X	16.64	86.51	18.78	9.57	50.0	$\pm 9.6\%$
		Y	77.35	110.48	27.03		50.0	
		Z	24.41	94.85	22.81		50.0	
10024- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1)	X	100.00	104.59	22.12	6.56	60.0	$\pm 9.6\%$
		Y	100.00	112.13	25.89		60.0	
		Z	100.00	110.44	25.10		60.0	
10025- DAB	EDGE-FDD (TDMA, 8PSK, TN 0)	X	4.97	73.74	26.31	12.57	50.0	$\pm 9.6\%$
		Y	12.62	102.74	40.61		50.0	
		Z	4.97	72.63	26.35		50.0	
10026- DAB	EDGE-FDD (TDMA, 8PSK, TN 0-1)	X	12.64	96.71	32.82	9.56	60.0	$\pm 9.6\%$
		Y	13.79	100.77	35.59		60.0	
		Z	9.58	90.06	31.02		60.0	
10027- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	X	100.00	104.57	21.47	4.80	80.0	$\pm 9.6\%$
		Y	100.00	112.09	25.09		80.0	
		Z	100.00	109.64	23.98		80.0	
10028- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	X	100.00	106.09	21.56	3.55	100.0	$\pm 9.6\%$
		Y	100.00	113.22	24.91		100.0	
		Z	100.00	109.92	23.45		100.0	
10029- DAB	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	X	7.64	85.93	27.95	7.80	80.0	$\pm 9.6\%$
		Y	7.47	86.25	29.10		80.0	
		Z	6.36	81.43	26.65		80.0	
10030- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	X	100.00	103.49	21.24	5.30	70.0	$\pm 9.6\%$
		Y	100.00	110.65	24.75		70.0	
		Z	100.00	108.68	23.85		70.0	
10031- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	X	100.00	109.31	21.77	1.88	100.0	$\pm 9.6\%$
		Y	100.00	113.43	23.69		100.0	
		Z	100.00	108.52	21.62		100.0	

Certificate No: EX3-7413_Jun16

Page 12 of 38

Report File No : F690501/RF-SAR002460

Date of Issue : 2017-04-26

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7413

June 29, 2016

10032-CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	X	100.00	126.66	27.83	1.17	100.0	± 9.6 %
		Y	100.00	120.12	25.51		100.0	
		Z	100.00	112.50	22.40		100.0	
10033-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	X	30.77	106.01	27.67	5.30	70.0	± 9.6 %
		Y	10.48	91.31	24.34		70.0	
		Z	7.05	84.65	21.99		70.0	
10034-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)	X	11.35	96.03	24.45	1.88	100.0	± 9.6 %
		Y	3.10	76.93	18.26		100.0	
		Z	2.57	73.97	17.07		100.0	
10035-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)	X	6.32	89.72	22.67	1.17	100.0	± 9.6 %
		Y	2.14	73.16	16.62		100.0	
		Z	1.87	71.01	15.72		100.0	
10036-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	X	64.87	117.23	30.56	5.30	70.0	± 9.6 %
		Y	13.64	95.62	25.73		70.0	
		Z	8.59	87.89	23.14		70.0	
10037-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	X	9.46	93.52	23.68	1.88	100.0	± 9.6 %
		Y	2.94	76.28	17.98		100.0	
		Z	2.45	73.44	16.83		100.0	
10038-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	X	6.74	91.05	23.22	1.17	100.0	± 9.6 %
		Y	2.16	73.51	16.87		100.0	
		Z	1.89	71.33	15.96		100.0	
10039-CAB	CDMA2000 (1xRTT, RC1)	X	13.14	102.35	26.80	0.00	150.0	± 9.6 %
		Y	1.91	72.32	16.12		150.0	
		Z	1.83	71.35	15.82		150.0	
10042-CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate)	X	31.53	91.97	19.04	7.78	50.0	± 9.6 %
		Y	100.00	110.31	25.33		50.0	
		Z	32.46	96.48	21.73		50.0	
10044-CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	X	0.00	108.02	0.06	0.00	150.0	± 9.6 %
		Y	0.00	94.69	0.00		150.0	
		Z	0.00	99.36	5.55		150.0	
10048-CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	X	7.23	74.46	16.06	13.80	25.0	± 9.6 %
		Y	13.30	84.94	21.38		25.0	
		Z	9.90	80.57	19.85		25.0	
10049-CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	X	7.54	76.74	15.84	10.79	40.0	± 9.6 %
		Y	17.29	90.16	21.90		40.0	
		Z	11.09	83.84	19.77		40.0	
10056-CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	X	19.62	94.10	24.27	9.03	50.0	± 9.6 %
		Y	16.22	93.30	25.22		50.0	
		Z	10.88	86.41	22.83		50.0	
10058-DAB	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	X	5.67	80.40	25.18	6.55	100.0	± 9.6 %
		Y	5.38	79.49	25.62		100.0	
		Z	4.93	76.78	24.05		100.0	
10059-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	X	1.35	68.10	17.67	0.61	110.0	± 9.6 %
		Y	1.25	65.06	15.85		110.0	
		Z	1.22	64.48	15.43		110.0	
10060-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	X	100.00	137.85	35.53	1.30	110.0	± 9.6 %
		Y	14.13	106.80	28.14		110.0	
		Z	4.75	89.77	22.92		110.0	

EX3DV4-SN:7413

June 29, 2016

10061-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	X	7.36	95.47	26.77	2.04	110.0	± 9.6 %
		Y	3.17	80.64	22.01		110.0	
		Z	2.63	76.91	20.28		110.0	
10062-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	X	4.70	67.21	16.59	0.49	100.0	± 9.6 %
		Y	4.72	66.61	16.48		100.0	
		Z	4.73	66.46	16.40		100.0	
10063-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)	X	4.71	67.26	16.66	0.72	100.0	± 9.6 %
		Y	4.73	66.69	16.57		100.0	
		Z	4.75	66.53	16.48		100.0	
10064-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)	X	5.00	67.47	16.83	0.86	100.0	± 9.6 %
		Y	5.03	66.98	16.81		100.0	
		Z	5.06	66.83	16.73		100.0	
10065-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)	X	4.86	67.35	16.90	1.21	100.0	± 9.6 %
		Y	4.90	66.87	16.89		100.0	
		Z	4.92	66.71	16.79		100.0	
10066-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)	X	4.86	67.32	17.01	1.46	100.0	± 9.6 %
		Y	4.92	66.90	17.05		100.0	
		Z	4.93	66.72	16.94		100.0	
10067-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)	X	5.12	67.28	17.31	2.04	100.0	± 9.6 %
		Y	5.20	67.03	17.47		100.0	
		Z	5.21	66.80	17.32		100.0	
10068-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)	X	5.17	67.36	17.50	2.55	100.0	± 9.6 %
		Y	5.27	67.16	17.73		100.0	
		Z	5.28	66.94	17.56		100.0	
10069-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	X	5.24	67.26	17.64	2.67	100.0	± 9.6 %
		Y	5.35	67.14	17.91		100.0	
		Z	5.36	66.89	17.73		100.0	
10071-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	X	4.93	67.00	17.19	1.99	100.0	± 9.6 %
		Y	5.01	66.69	17.32		100.0	
		Z	5.01	66.48	17.17		100.0	
10072-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	X	4.91	67.35	17.39	2.30	100.0	± 9.6 %
		Y	5.00	67.04	17.53		100.0	
		Z	5.00	66.81	17.37		100.0	
10073-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	X	4.96	67.43	17.64	2.83	100.0	± 9.6 %
		Y	5.06	67.21	17.85		100.0	
		Z	5.06	66.94	17.65		100.0	
10074-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	X	4.93	67.30	17.76	3.30	100.0	± 9.6 %
		Y	5.04	67.11	18.01		100.0	
		Z	5.03	66.82	17.79		100.0	
10075-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	X	4.98	67.44	18.05	3.82	90.0	± 9.6 %
		Y	5.10	67.31	18.35		90.0	
		Z	5.09	67.00	18.12		90.0	
10076-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	X	4.96	67.15	18.10	4.15	90.0	± 9.6 %
		Y	5.10	67.08	18.46		90.0	
		Z	5.08	66.74	18.19		90.0	
10077-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	X	4.98	67.20	18.19	4.30	90.0	± 9.6 %
		Y	5.13	67.15	18.55		90.0	
		Z	5.11	66.79	18.28		90.0	

Certificate No: EX3-7413_Jun16

Page 14 of 38

Report File No : F690501/RF-SAR002460

Date of Issue : 2017-04-26

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7413

June 29, 2016

10081-CAB	CDMA2000 (1xRTT, RC3)	X	2.18	81.13	20.04	0.00	150.0	± 9.6 %
		Y	0.89	66.39	13.08		150.0	
		Z	0.87	65.70	12.80		150.0	
10082-CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate)	X	0.84	60.00	4.53	4.77	80.0	± 9.6 %
		Y	0.87	60.00	5.05		80.0	
		Z	0.73	58.47	3.99		80.0	
10090-DAB	GPRS-FDD (TDMA, GMSK, TN 0-4)	X	100.00	104.61	22.14	6.56	60.0	± 9.6 %
		Y	100.00	112.15	25.92		60.0	
		Z	100.00	110.47	25.13		60.0	
10097-CAB	UMTS-FDD (HSDPA)	X	2.23	72.19	18.20	0.00	150.0	± 9.6 %
		Y	1.85	67.61	15.74		150.0	
		Z	1.82	67.08	15.48		150.0	
10098-CAB	UMTS-FDD (HSUPA, Subtest 2)	X	2.19	72.15	18.18	0.00	150.0	± 9.6 %
		Y	1.81	67.58	15.71		150.0	
		Z	1.78	67.02	15.44		150.0	
10099-DAB	EDGE-FDD (TDMA, 8PSK, TN 0-4)	X	12.73	96.81	32.84	9.56	60.0	± 9.6 %
		Y	13.87	100.85	35.61		60.0	
		Z	9.62	90.12	31.04		60.0	
10100-CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	3.87	74.78	18.70	0.00	150.0	± 9.6 %
		Y	3.19	70.44	16.76		150.0	
		Z	3.15	70.02	16.53		150.0	
10101-CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	3.46	69.47	16.86	0.00	150.0	± 9.6 %
		Y	3.29	67.58	15.98		150.0	
		Z	3.29	67.37	15.86		150.0	
10102-CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	3.57	69.38	16.93	0.00	150.0	± 9.6 %
		Y	3.39	67.52	16.06		150.0	
		Z	3.39	67.35	15.96		150.0	
10103-CAB	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	7.54	78.19	20.78	3.98	65.0	± 9.6 %
		Y	6.37	75.10	20.03		65.0	
		Z	6.36	74.71	19.73		65.0	
10104-CAB	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	6.93	75.13	20.40	3.98	65.0	± 9.6 %
		Y	6.62	74.13	20.48		65.0	
		Z	6.48	73.31	19.98		65.0	
10105-CAB	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	6.64	74.32	20.39	3.98	65.0	± 9.6 %
		Y	6.06	72.29	19.97		65.0	
		Z	6.20	72.39	19.89		65.0	
10108-CAC	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	3.33	73.74	18.49	0.00	150.0	± 9.6 %
		Y	2.79	69.63	16.58		150.0	
		Z	2.77	69.23	16.34		150.0	
10109-CAC	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	3.15	69.55	16.96	0.00	150.0	± 9.6 %
		Y	2.94	67.40	15.88		150.0	
		Z	2.95	67.18	15.77		150.0	
10110-CAC	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	2.70	72.75	18.23	0.00	150.0	± 9.6 %
		Y	2.27	68.73	16.21		150.0	
		Z	2.25	68.25	15.94		150.0	
10111-CAC	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	X	3.05	71.57	17.96	0.00	150.0	± 9.6 %
		Y	2.65	68.09	16.14		150.0	
		Z	2.66	67.88	16.07		150.0	

Certificate No: EX3-7413_Jun16

Page 15 of 38

Report File No : F690501/RF-SAR002460

Date of Issue : 2017-04-26

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7413

June 29, 2016

10112-CAC	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	3.27	69.43	16.95	0.00	150.0	± 9.6 %
		Y	3.07	67.37	15.93		150.0	
		Z	3.07	67.18	15.83		150.0	
10113-CAC	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	3.20	71.52	17.99	0.00	150.0	± 9.6 %
		Y	2.80	68.21	16.26		150.0	
		Z	2.82	68.03	16.21		150.0	
10114-CAB	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	X	5.15	67.86	16.59	0.00	150.0	± 9.6 %
		Y	5.16	67.18	16.44		150.0	
		Z	5.18	67.08	16.39		150.0	
10115-CAB	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	X	5.45	67.98	16.64	0.00	150.0	± 9.6 %
		Y	5.48	67.38	16.55		150.0	
		Z	5.53	67.37	16.55		150.0	
10116-CAB	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	X	5.25	68.06	16.61	0.00	150.0	± 9.6 %
		Y	5.27	67.40	16.48		150.0	
		Z	5.30	67.33	16.44		150.0	
10117-CAB	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	X	5.13	67.81	16.59	0.00	150.0	± 9.6 %
		Y	5.14	67.08	16.40		150.0	
		Z	5.17	67.01	16.38		150.0	
10118-CAB	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	X	5.51	68.08	16.70	0.00	150.0	± 9.6 %
		Y	5.56	67.57	16.65		150.0	
		Z	5.61	67.55	16.64		150.0	
10119-CAB	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	X	5.22	68.00	16.60	0.00	150.0	± 9.6 %
		Y	5.24	67.33	16.45		150.0	
		Z	5.27	67.26	16.42		150.0	
10140-CAB	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	3.61	69.35	16.83	0.00	150.0	± 9.6 %
		Y	3.43	67.53	15.98		150.0	
		Z	3.43	67.35	15.88		150.0	
10141-CAB	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	3.73	69.40	16.97	0.00	150.0	± 9.6 %
		Y	3.55	67.60	16.14		150.0	
		Z	3.56	67.45	16.05		150.0	
10142-CAC	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	2.60	73.76	18.49	0.00	150.0	± 9.6 %
		Y	2.05	68.71	15.92		150.0	
		Z	2.03	68.18	15.67		150.0	
10143-CAC	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	3.24	74.09	18.60	0.00	150.0	± 9.6 %
		Y	2.52	68.83	15.92		150.0	
		Z	2.53	68.59	15.89		150.0	
10144-CAC	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	2.63	69.71	16.09	0.00	150.0	± 9.6 %
		Y	2.31	66.75	14.43		150.0	
		Z	2.32	66.45	14.36		150.0	
10145-CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	2.58	76.48	17.82	0.00	150.0	± 9.6 %
		Y	1.33	65.87	12.56		150.0	
		Z	1.36	65.82	12.72		150.0	
10146-CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	1.64	64.90	10.89	0.00	150.0	± 9.6 %
		Y	2.28	67.92	12.65		150.0	
		Z	2.14	66.83	12.42		150.0	
10147-CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	1.89	66.60	11.89	0.00	150.0	± 9.6 %
		Y	2.79	70.42	13.92		150.0	
		Z	2.50	68.84	13.52		150.0	

Certificate No: EX3-7413_Jun16

Page 16 of 38

Report File No : F690501/RF-SAR002460

Date of Issue : 2017-04-26

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7413

June 29, 2016

10149-CAB	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	3.17	69.65	17.02	0.00	150.0	± 9.6 %
		Y	2.95	67.45	15.93		150.0	
		Z	2.96	67.24	15.81		150.0	
10150-CAB	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	X	3.28	69.51	17.01	0.00	150.0	± 9.6 %
		Y	3.07	67.42	15.97		150.0	
		Z	3.08	67.23	15.87		150.0	
10151-CAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	8.00	80.53	21.76	3.98	65.0	± 9.6 %
		Y	6.93	78.02	21.29		65.0	
		Z	6.56	76.58	20.57		65.0	
10152-CAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	6.45	75.03	20.11	3.98	65.0	± 9.6 %
		Y	6.16	74.09	20.19		65.0	
		Z	5.98	73.11	19.63		65.0	
10153-CAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	X	6.94	76.27	21.02	3.98	65.0	± 9.6 %
		Y	6.51	74.92	20.91		65.0	
		Z	6.35	74.05	20.42		65.0	
10154-CAC	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	2.86	73.81	18.77	0.00	150.0	± 9.6 %
		Y	2.32	69.12	16.46		150.0	
		Z	2.31	68.72	16.24		150.0	
10155-CAC	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	X	3.05	71.55	17.95	0.00	150.0	± 9.6 %
		Y	2.65	68.11	16.16		150.0	
		Z	2.66	67.89	16.08		150.0	
10156-CAC	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	2.62	75.28	19.00	0.00	150.0	± 9.6 %
		Y	1.90	68.84	15.77		150.0	
		Z	1.88	68.32	15.55		150.0	
10157-CAC	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	2.68	71.76	16.89	0.00	150.0	± 9.6 %
		Y	2.15	67.35	14.52		150.0	
		Z	2.15	67.02	14.45		150.0	
10158-CAC	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	X	3.22	71.63	18.05	0.00	150.0	± 9.6 %
		Y	2.81	68.26	16.30		150.0	
		Z	2.82	68.09	16.26		150.0	
10159-CAC	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	2.93	72.88	17.46	0.00	150.0	± 9.6 %
		Y	2.26	67.79	14.79		150.0	
		Z	2.27	67.53	14.78		150.0	
10160-CAB	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	3.07	71.36	17.69	0.00	150.0	± 9.6 %
		Y	2.78	68.62	16.33		150.0	
		Z	2.77	68.29	16.14		150.0	
10161-CAB	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	3.19	69.55	17.03	0.00	150.0	± 9.6 %
		Y	2.97	67.35	15.90		150.0	
		Z	2.98	67.15	15.82		150.0	
10162-CAB	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	X	3.30	69.58	17.07	0.00	150.0	± 9.6 %
		Y	3.08	67.47	16.00		150.0	
		Z	3.09	67.26	15.91		150.0	
10166-CAC	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	3.25	68.13	17.75	3.01	150.0	± 9.6 %
		Y	3.70	70.04	19.37		150.0	
		Z	3.64	69.02	18.72		150.0	
10167-CAC	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	X	3.83	70.28	17.95	3.01	150.0	± 9.6 %
		Y	4.77	73.90	20.20		150.0	
		Z	4.50	71.81	19.15		150.0	

Certificate No: EX3-7413_Jun16

Page 17 of 38

Report File No : F690501/RF-SAR002460

Date of Issue : 2017-04-26

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7413

June 29, 2016

10168-CAC	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	X	4.31	72.71	19.43	3.01	150.0	± 9.6 %
		Y	5.34	76.31	21.55		150.0	
		Z	5.00	74.11	20.51		150.0	
10169-CAB	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	2.59	67.50	17.43	3.01	150.0	± 9.6 %
		Y	3.16	70.49	19.62		150.0	
		Z	3.10	69.08	18.71		150.0	
10170-CAB	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	3.46	73.11	19.77	3.01	150.0	± 9.6 %
		Y	4.97	79.09	22.88		150.0	
		Z	4.39	75.29	21.13		150.0	
10171-AAB	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	2.73	68.39	16.58	3.01	150.0	± 9.6 %
		Y	3.85	73.76	19.71		150.0	
		Z	3.52	70.70	18.17		150.0	
10172-CAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	6.92	84.75	24.17	6.02	65.0	± 9.6 %
		Y	10.46	94.74	29.37		65.0	
		Z	8.03	87.14	26.09		65.0	
10173-CAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	9.25	86.12	22.76	6.02	65.0	± 9.6 %
		Y	31.50	109.27	31.36		65.0	
		Z	11.70	90.10	25.29		65.0	
10174-CAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	7.05	81.04	20.53	6.02	65.0	± 9.6 %
		Y	15.68	96.07	27.03		65.0	
		Z	9.37	85.45	23.26		65.0	
10175-CAC	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	2.55	67.14	17.14	3.01	150.0	± 9.6 %
		Y	3.12	70.16	19.37		150.0	
		Z	3.06	68.73	18.44		150.0	
10176-CAC	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	3.46	73.13	19.78	3.01	150.0	± 9.6 %
		Y	4.97	79.12	22.89		150.0	
		Z	4.39	75.31	21.15		150.0	
10177-CAE	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	2.58	67.33	17.26	3.01	150.0	± 9.6 %
		Y	3.15	70.32	19.46		150.0	
		Z	3.09	68.91	18.55		150.0	
10178-CAC	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	X	3.41	72.80	19.60	3.01	150.0	± 9.6 %
		Y	4.90	78.82	22.75		150.0	
		Z	4.33	75.01	20.99		150.0	
10179-CAC	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	X	3.03	70.44	17.94	3.01	150.0	± 9.6 %
		Y	4.36	76.25	21.14		150.0	
		Z	3.89	72.76	19.47		150.0	
10180-CAC	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	X	2.71	68.29	16.51	3.01	150.0	± 9.6 %
		Y	3.84	73.67	19.65		150.0	
		Z	3.51	70.61	18.11		150.0	
10181-CAB	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	2.57	67.31	17.25	3.01	150.0	± 9.6 %
		Y	3.14	70.30	19.46		150.0	
		Z	3.08	68.89	18.54		150.0	
10182-CAB	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	3.40	72.77	19.59	3.01	150.0	± 9.6 %
		Y	4.89	78.79	22.73		150.0	
		Z	4.32	74.99	20.98		150.0	
10183-AAA	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	X	2.71	68.27	16.50	3.01	150.0	± 9.6 %
		Y	3.83	73.64	19.64		150.0	
		Z	3.50	70.59	18.10		150.0	

Certificate No: EX3-7413_Jun16

Page 18 of 38

Report File No : F690501/RF-SAR002460

Date of Issue : 2017-04-26

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7413

June 29, 2016

10184-CAC	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	2.58	67.36	17.28	3.01	150.0	± 9.6 %
		Y	3.15	70.35	19.48		150.0	
		Z	3.10	68.93	18.57		150.0	
10185-CAC	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	3.42	72.85	19.63	3.01	150.0	± 9.6 %
		Y	4.92	78.88	22.78		150.0	
		Z	4.35	75.07	21.02		150.0	
10186-AAC	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	X	2.72	68.33	16.53	3.01	150.0	± 9.6 %
		Y	3.85	73.72	19.68		150.0	
		Z	3.52	70.65	18.13		150.0	
10187-CAC	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	2.59	67.39	17.33	3.01	150.0	± 9.6 %
		Y	3.16	70.40	19.54		150.0	
		Z	3.10	68.97	18.62		150.0	
10188-CAC	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	3.57	73.73	20.13	3.01	150.0	± 9.6 %
		Y	5.13	79.76	23.22		150.0	
		Z	4.52	75.87	21.46		150.0	
10189-AAC	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	2.79	68.79	16.84	3.01	150.0	± 9.6 %
		Y	3.97	74.27	19.99		150.0	
		Z	3.60	71.11	18.43		150.0	
10193-CAB	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	X	4.59	67.40	16.44	0.00	150.0	± 9.6 %
		Y	4.57	66.59	16.16		150.0	
		Z	4.59	66.48	16.13		150.0	
10194-CAB	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	X	4.78	67.73	16.54	0.00	150.0	± 9.6 %
		Y	4.74	66.92	16.28		150.0	
		Z	4.77	66.82	16.24		150.0	
10195-CAB	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	X	4.82	67.75	16.55	0.00	150.0	± 9.6 %
		Y	4.79	66.95	16.30		150.0	
		Z	4.82	66.84	16.26		150.0	
10196-CAB	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	X	4.60	67.48	16.46	0.00	150.0	± 9.6 %
		Y	4.57	66.67	16.19		150.0	
		Z	4.60	66.56	16.15		150.0	
10197-CAB	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	X	4.79	67.76	16.55	0.00	150.0	± 9.6 %
		Y	4.76	66.94	16.30		150.0	
		Z	4.79	66.84	16.26		150.0	
10198-CAB	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	X	4.82	67.76	16.56	0.00	150.0	± 9.6 %
		Y	4.79	66.97	16.31		150.0	
		Z	4.82	66.86	16.27		150.0	
10219-CAB	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	X	4.56	67.51	16.44	0.00	150.0	± 9.6 %
		Y	4.52	66.68	16.15		150.0	
		Z	4.55	66.57	16.11		150.0	
10220-CAB	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	X	4.79	67.73	16.54	0.00	150.0	± 9.6 %
		Y	4.75	66.92	16.29		150.0	
		Z	4.79	66.82	16.25		150.0	
10221-CAB	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	X	4.82	67.68	16.53	0.00	150.0	± 9.6 %
		Y	4.80	66.90	16.30		150.0	
		Z	4.83	66.79	16.26		150.0	
10222-CAB	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	X	5.12	67.84	16.59	0.00	150.0	± 9.6 %
		Y	5.11	67.09	16.40		150.0	
		Z	5.15	67.03	16.38		150.0	

Certificate No: EX3-7413_Jun16

Page 19 of 38

Report File No : F690501/RF-SAR002460

Date of Issue : 2017-04-26

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7413

June 29, 2016

10223-CAB	IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)	X	5.41	67.91	16.63	0.00	150.0	± 9.6 %
		Y	5.42	67.27	16.51		150.0	
		Z	5.46	67.23	16.50		150.0	
10224-CAB	IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	X	5.17	67.98	16.59	0.00	150.0	± 9.6 %
		Y	5.16	67.20	16.38		150.0	
		Z	5.19	67.13	16.35		150.0	
10225-CAB	UMTS-FDD (HSPA+)	X	2.98	67.76	16.31	0.00	150.0	± 9.6 %
		Y	2.84	66.11	15.39		150.0	
		Z	2.85	65.91	15.34		150.0	
10226-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	10.02	87.49	23.32	6.02	65.0	± 9.6 %
		Y	35.25	111.42	32.05		65.0	
		Z	12.47	91.31	25.78		65.0	
10227-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	8.64	83.95	21.57	6.02	65.0	± 9.6 %
		Y	26.75	104.64	29.49		65.0	
		Z	11.17	88.23	24.22		65.0	
10228-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	8.18	87.83	25.28	6.02	65.0	± 9.6 %
		Y	15.31	102.19	31.73		65.0	
		Z	9.11	89.79	27.08		65.0	
10229-CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	9.35	86.27	22.83	6.02	65.0	± 9.6 %
		Y	31.73	109.38	31.40		65.0	
		Z	11.78	90.21	25.34		65.0	
10230-CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	X	8.10	82.91	21.13	6.02	65.0	± 9.6 %
		Y	24.40	102.98	28.94		65.0	
		Z	10.58	87.26	23.83		65.0	
10231-CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	7.74	86.76	24.83	6.02	65.0	± 9.6 %
		Y	14.44	100.93	31.27		65.0	
		Z	8.71	88.86	26.68		65.0	
10232-CAB	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	X	9.33	86.24	22.81	6.02	65.0	± 9.6 %
		Y	31.71	109.38	31.40		65.0	
		Z	11.76	90.19	25.33		65.0	
10233-CAB	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	X	8.08	82.89	21.12	6.02	65.0	± 9.6 %
		Y	24.37	102.97	28.94		65.0	
		Z	10.56	87.24	23.82		65.0	
10234-CAB	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	7.35	85.71	24.35	6.02	65.0	± 9.6 %
		Y	13.68	99.69	30.77		65.0	
		Z	8.36	87.96	26.26		65.0	
10235-CAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	9.32	86.25	22.82	6.02	65.0	± 9.6 %
		Y	31.83	109.46	31.43		65.0	
		Z	11.77	90.21	25.34		65.0	
10236-CAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	X	8.14	82.97	21.14	6.02	65.0	± 9.6 %
		Y	24.77	103.21	29.00		65.0	
		Z	10.65	87.35	23.85		65.0	
10237-CAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	7.74	86.79	24.84	6.02	65.0	± 9.6 %
		Y	14.52	101.07	31.31		65.0	
		Z	8.72	88.91	26.70		65.0	
10238-CAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	9.30	86.21	22.80	6.02	65.0	± 9.6 %
		Y	31.66	109.37	31.40		65.0	
		Z	11.74	90.16	25.32		65.0	

Certificate No: EX3-7413_Jun16

Page 20 of 38

Report File No : F690501/RF-SAR002460

Date of Issue : 2017-04-26

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7413

June 29, 2016

10239-CAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	X	8.06	82.86	21.11	6.02	65.0	± 9.6 %
		Y	24.31	102.96	28.94		65.0	
		Z	10.53	87.22	23.81		65.0	
10240-CAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	7.72	86.75	24.82	6.02	65.0	± 9.6 %
		Y	14.46	101.01	31.29		65.0	
		Z	8.69	88.87	26.68		65.0	
10241-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	X	7.32	78.08	22.98	6.98	65.0	± 9.6 %
		Y	9.07	83.22	26.13		65.0	
		Z	8.09	79.38	24.23		65.0	
10242-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	X	6.82	76.72	22.33	6.98	65.0	± 9.6 %
		Y	7.76	79.93	24.73		65.0	
		Z	7.58	78.06	23.61		65.0	
10243-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	5.71	74.22	22.08	6.98	65.0	± 9.6 %
		Y	6.19	76.20	24.07		65.0	
		Z	6.19	75.06	23.19		65.0	
10244-CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	5.10	72.43	16.23	3.98	65.0	± 9.6 %
		Y	6.19	75.71	18.42		65.0	
		Z	5.69	73.92	17.72		65.0	
10245-CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	X	5.04	72.05	16.03	3.98	65.0	± 9.6 %
		Y	6.07	75.14	18.14		65.0	
		Z	5.63	73.53	17.50		65.0	
10246-CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	7.96	82.92	21.08	3.98	65.0	± 9.6 %
		Y	5.76	77.95	19.59		65.0	
		Z	5.31	76.30	18.93		65.0	
10247-CAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	6.03	76.23	19.29	3.98	65.0	± 9.6 %
		Y	5.28	73.85	18.59		65.0	
		Z	5.13	73.04	18.25		65.0	
10248-CAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	5.91	75.38	18.92	3.98	65.0	± 9.6 %
		Y	5.30	73.41	18.39		65.0	
		Z	5.17	72.64	18.06		65.0	
10249-CAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	9.42	85.93	22.94	3.98	65.0	± 9.6 %
		Y	6.89	80.95	21.56		65.0	
		Z	6.21	78.76	20.65		65.0	
10250-CAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	X	6.97	78.55	21.65	3.98	65.0	± 9.6 %
		Y	6.17	76.16	21.06		65.0	
		Z	5.99	75.22	20.58		65.0	
10251-CAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	X	6.32	75.52	20.05	3.98	65.0	± 9.6 %
		Y	5.95	74.32	19.96		65.0	
		Z	5.76	73.30	19.43		65.0	
10252-CAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	8.88	84.37	23.20	3.98	65.0	± 9.6 %
		Y	7.13	80.67	22.32		65.0	
		Z	6.56	78.68	21.40		65.0	
10253-CAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	6.27	74.40	19.87	3.98	65.0	± 9.6 %
		Y	6.01	73.52	19.96		65.0	
		Z	5.85	72.57	19.42		65.0	
10254-CAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	X	6.71	75.52	20.68	3.98	65.0	± 9.6 %
		Y	6.35	74.32	20.61		65.0	
		Z	6.20	73.46	20.13		65.0	

Certificate No: EX3-7413_Jun16

Page 21 of 38

Report File No : F690501/RF-SAR002460

Date of Issue : 2017-04-26

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7413

June 29, 2016

10255-CAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	7.48	79.63	21.67	3.98	65.0	± 9.6 %
		Y	6.62	77.43	21.29		65.0	
		Z	6.28	76.01	20.57		65.0	
10256-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	3.98	68.95	13.73	3.98	65.0	± 9.6 %
		Y	4.84	71.85	15.80		65.0	
		Z	4.62	70.76	15.41		65.0	
10257-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	3.94	68.54	13.47	3.98	65.0	± 9.6 %
		Y	4.73	71.16	15.42		65.0	
		Z	4.56	70.27	15.11		65.0	
10258-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	5.85	77.84	18.46	3.98	65.0	± 9.6 %
		Y	4.44	73.69	17.10		65.0	
		Z	4.27	72.85	16.79		65.0	
10259-CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	6.37	76.98	20.09	3.98	65.0	± 9.6 %
		Y	5.64	74.73	19.49		65.0	
		Z	5.47	73.83	19.08		65.0	
10260-CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	6.36	76.63	19.97	3.98	65.0	± 9.6 %
		Y	5.67	74.49	19.40		65.0	
		Z	5.52	73.65	19.02		65.0	
10261-CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	8.46	84.00	22.64	3.98	65.0	± 9.6 %
		Y	6.66	80.04	21.61		65.0	
		Z	6.08	78.02	20.72		65.0	
10262-CAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	X	6.95	78.47	21.59	3.98	65.0	± 9.6 %
		Y	6.17	76.12	21.02		65.0	
		Z	5.98	75.17	20.54		65.0	
10263-CAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	6.32	75.50	20.05	3.98	65.0	± 9.6 %
		Y	5.94	74.30	19.96		65.0	
		Z	5.75	73.28	19.43		65.0	
10264-CAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	8.75	84.09	23.08	3.98	65.0	± 9.6 %
		Y	7.07	80.50	22.23		65.0	
		Z	6.50	78.52	21.32		65.0	
10265-CAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	6.44	75.03	20.11	3.98	65.0	± 9.6 %
		Y	6.16	74.09	20.20		65.0	
		Z	5.98	73.11	19.64		65.0	
10266-CAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	6.93	76.25	21.01	3.98	65.0	± 9.6 %
		Y	6.51	74.91	20.90		65.0	
		Z	6.35	74.04	20.41		65.0	
10267-CAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	7.97	80.47	21.74	3.98	65.0	± 9.6 %
		Y	6.92	77.98	21.28		65.0	
		Z	6.55	76.55	20.55		65.0	
10268-CAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	7.05	74.88	20.43	3.98	65.0	± 9.6 %
		Y	6.76	73.93	20.51		65.0	
		Z	6.63	73.17	20.05		65.0	
10269-CAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	6.98	74.40	20.30	3.98	65.0	± 9.6 %
		Y	6.72	73.52	20.41		65.0	
		Z	6.60	72.80	19.96		65.0	
10270-CAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	7.40	77.26	20.66	3.98	65.0	± 9.6 %
		Y	6.76	75.49	20.42		65.0	
		Z	6.55	74.54	19.89		65.0	

Certificate No: EX3-7413_Jun16

Page 22 of 38

Report File No : F690501/RF-SAR002460

Date of Issue : 2017-04-26

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7413

June 29, 2016

10274-CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	X	2.77	68.41	16.38	0.00	150.0	± 9.6 %
		Y	2.62	66.45	15.30		150.0	
		Z	2.60	66.13	15.17		150.0	
10275-CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	X	2.09	73.40	18.48	0.00	150.0	± 9.6 %
		Y	1.65	67.98	15.67		150.0	
		Z	1.60	67.29	15.29		150.0	
10277-CAA	PHS (QPSK)	X	2.42	61.80	7.28	9.03	50.0	± 9.6 %
		Y	2.70	62.92	8.55		50.0	
		Z	2.70	62.80	8.53		50.0	
10278-CAA	PHS (QPSK, BW 884MHz, Rolloff 0.5)	X	5.48	73.30	15.48	9.03	50.0	± 9.6 %
		Y	5.48	73.80	16.53		50.0	
		Z	5.19	72.87	16.16		50.0	
10279-CAA	PHS (QPSK, BW 884MHz, Rolloff 0.38)	X	5.66	73.66	15.69	9.03	50.0	± 9.6 %
		Y	5.64	74.10	16.70		50.0	
		Z	5.33	73.14	16.32		50.0	
10290-AAB	CDMA2000, RC1, SO55, Full Rate	X	4.13	84.84	21.16	0.00	150.0	± 9.6 %
		Y	1.53	69.15	14.45		150.0	
		Z	1.50	68.44	14.23		150.0	
10291-AAB	CDMA2000, RC3, SO55, Full Rate	X	2.02	80.05	19.63	0.00	150.0	± 9.6 %
		Y	0.88	66.15	12.95		150.0	
		Z	0.85	65.49	12.68		150.0	
10292-AAB	CDMA2000, RC3, SO32, Full Rate	X	31.69	123.49	32.65	0.00	150.0	± 9.6 %
		Y	1.12	70.49	15.42		150.0	
		Z	1.04	69.09	14.85		150.0	
10293-AAB	CDMA2000, RC3, SO3, Full Rate	X	100.00	145.27	38.53	0.00	150.0	± 9.6 %
		Y	1.69	76.51	18.41		150.0	
		Z	1.50	74.53	17.70		150.0	
10295-AAB	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	X	7.78	81.06	21.76	9.03	50.0	± 9.6 %
		Y	8.55	82.70	22.99		50.0	
		Z	7.34	79.63	21.74		50.0	
10297-AAA	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	3.37	73.93	18.60	0.00	150.0	± 9.6 %
		Y	2.80	69.73	16.64		150.0	
		Z	2.78	69.34	16.41		150.0	
10298-AAB	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	2.76	77.13	18.96	0.00	150.0	± 9.6 %
		Y	1.64	67.99	14.49		150.0	
		Z	1.64	67.61	14.41		150.0	
10299-AAB	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	2.11	67.30	12.94	0.00	150.0	± 9.6 %
		Y	3.04	71.26	15.10		150.0	
		Z	2.68	69.19	14.38		150.0	
10300-AAB	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	X	1.69	63.89	10.55	0.00	150.0	± 9.6 %
		Y	2.18	66.11	12.03		150.0	
		Z	2.12	65.32	11.84		150.0	
10301-AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC)	X	4.58	65.03	17.13	4.17	50.0	± 9.6 %
		Y	4.90	65.89	17.77		50.0	
		Z	4.71	64.70	17.13		50.0	
10302-AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols)	X	5.12	65.95	17.98	4.96	50.0	± 9.6 %
		Y	5.36	66.42	18.45		50.0	
		Z	5.28	65.73	18.05		50.0	

Certificate No: EX3-7413_Jun16

Page 23 of 38

Report File No : F690501/RF-SAR002460

Date of Issue : 2017-04-26

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7413

June 29, 2016

10303-AAA	IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC)	X	4.88	65.60	17.84	4.96	50.0	± 9.6 %
		Y	5.11	66.11	18.32		50.0	
		Z	5.04	65.42	17.92		50.0	
10304-AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC)	X	4.71	65.62	17.43	4.17	50.0	± 9.6 %
		Y	4.89	65.84	17.72		50.0	
		Z	4.83	65.24	17.39		50.0	
10305-AAA	IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols)	X	4.26	66.69	19.17	6.02	35.0	± 9.6 %
		Y	4.74	68.89	20.52		35.0	
		Z	4.56	67.41	19.68		35.0	
10306-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols)	X	4.59	65.87	18.72	6.02	35.0	± 9.6 %
		Y	4.95	67.33	19.78		35.0	
		Z	4.84	66.29	19.15		35.0	
10307-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols)	X	4.50	66.11	18.74	6.02	35.0	± 9.6 %
		Y	4.88	67.65	19.82		35.0	
		Z	4.76	66.58	19.18		35.0	
10308-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)	X	4.47	66.27	18.86	6.02	35.0	± 9.6 %
		Y	4.86	67.90	19.98		35.0	
		Z	4.73	66.74	19.30		35.0	
10309-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols)	X	4.65	66.08	18.86	6.02	35.0	± 9.6 %
		Y	5.02	67.61	19.95		35.0	
		Z	4.91	66.54	19.30		35.0	
10310-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols)	X	4.54	65.95	18.71	6.02	35.0	± 9.6 %
		Y	4.90	67.44	19.77		35.0	
		Z	4.79	66.38	19.14		35.0	
10311-AAA	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	3.82	73.23	18.19	0.00	150.0	± 9.6 %
		Y	3.16	69.03	16.29		150.0	
		Z	3.14	68.69	16.09		150.0	
10313-AAA	iDEN 1:3	X	4.26	73.34	15.30	6.99	70.0	± 9.6 %
		Y	3.95	73.44	16.30		70.0	
		Z	3.42	71.14	15.17		70.0	
10314-AAA	iDEN 1:6	X	13.47	92.17	24.33	10.00	30.0	± 9.6 %
		Y	5.16	79.23	21.27		30.0	
		Z	4.48	76.56	20.07		30.0	
10315-AAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	X	1.18	66.73	17.16	0.17	150.0	± 9.6 %
		Y	1.10	63.75	15.16		150.0	
		Z	1.08	63.34	14.87		150.0	
10316-AAB	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)	X	4.61	67.28	16.42	0.17	150.0	± 9.6 %
		Y	4.62	66.62	16.27		150.0	
		Z	4.64	66.47	16.19		150.0	
10317-AAB	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)	X	4.61	67.28	16.42	0.17	150.0	± 9.6 %
		Y	4.62	66.62	16.27		150.0	
		Z	4.64	66.47	16.19		150.0	
10400-AAC	IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)	X	4.77	67.73	16.49	0.00	150.0	± 9.6 %
		Y	4.74	66.99	16.29		150.0	
		Z	4.77	66.86	16.23		150.0	
10401-AAC	IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle)	X	5.34	67.52	16.40	0.00	150.0	± 9.6 %
		Y	5.42	67.15	16.44		150.0	
		Z	5.45	67.02	16.37		150.0	

Certificate No: EX3-7413_Jun16

Page 24 of 38

Report File No : F690501/RF-SAR002460

Date of Issue : 2017-04-26

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7413

June 29, 2016

10402-AAC	IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle)	X	5.67	68.17	16.58	0.00	150.0	± 9.6 %
		Y	5.68	67.50	16.46		150.0	
		Z	5.72	67.46	16.44		150.0	
10403-AAB	CDMA2000 (1xEV-DO, Rev. 0)	X	4.13	84.84	21.16	0.00	115.0	± 9.6 %
		Y	1.53	69.15	14.45		115.0	
		Z	1.50	68.44	14.23		115.0	
10404-AAB	CDMA2000 (1xEV-DO, Rev. A)	X	4.13	84.84	21.16	0.00	115.0	± 9.6 %
		Y	1.53	69.15	14.45		115.0	
		Z	1.50	68.44	14.23		115.0	
10406-AAB	CDMA2000, RC3, SO32, SCH0, Full Rate	X	11.75	93.45	22.58	0.00	100.0	± 9.6 %
		Y	100.00	118.48	28.80		100.0	
		Z	19.61	98.98	24.92		100.0	
10410-AAA	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	24.11	60.63	1.60	2.23	80.0	± 9.6 %
		Y	0.74	60.00	3.86		80.0	
		Z	0.79	60.00	4.26		80.0	
10415-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	X	1.08	65.70	16.62	0.00	150.0	± 9.6 %
		Y	1.02	62.98	14.66		150.0	
		Z	1.01	62.61	14.40		150.0	
10416-AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)	X	4.59	67.43	16.48	0.00	150.0	± 9.6 %
		Y	4.57	66.64	16.23		150.0	
		Z	4.60	66.52	16.18		150.0	
10417-AAA	IEEE 802.11a/n WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	X	4.59	67.43	16.48	0.00	150.0	± 9.6 %
		Y	4.57	66.64	16.23		150.0	
		Z	4.60	66.52	16.18		150.0	
10418-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble)	X	4.59	67.62	16.52	0.00	150.0	± 9.6 %
		Y	4.56	66.79	16.24		150.0	
		Z	4.58	66.66	16.19		150.0	
10419-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble)	X	4.61	67.55	16.51	0.00	150.0	± 9.6 %
		Y	4.58	66.74	16.24		150.0	
		Z	4.60	66.62	16.20		150.0	
10422-AAA	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	X	4.72	67.51	16.49	0.00	150.0	± 9.6 %
		Y	4.70	66.74	16.26		150.0	
		Z	4.73	66.63	16.21		150.0	
10423-AAA	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	X	4.91	67.84	16.61	0.00	150.0	± 9.6 %
		Y	4.87	67.07	16.38		150.0	
		Z	4.91	66.97	16.34		150.0	
10424-AAA	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	X	4.82	67.81	16.59	0.00	150.0	± 9.6 %
		Y	4.79	67.02	16.35		150.0	
		Z	4.82	66.91	16.31		150.0	
10425-AAA	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	X	5.34	67.87	16.59	0.00	150.0	± 9.6 %
		Y	5.38	67.33	16.52		150.0	
		Z	5.42	67.27	16.49		150.0	
10426-AAA	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	X	5.35	67.89	16.60	0.00	150.0	± 9.6 %
		Y	5.39	67.34	16.52		150.0	
		Z	5.42	67.27	16.49		150.0	

Certificate No: EX3-7413_Jun16

Page 25 of 38

Report File No : F690501/RF-SAR002460

Date of Issue : 2017-04-26

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7413

June 29, 2016

10427-AAA	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	X	5.37	67.92	16.61	0.00	150.0	± 9.6 %
		Y	5.40	67.33	16.51		150.0	
		Z	5.44	67.26	16.48		150.0	
10430-AAA	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	X	4.95	74.23	19.98	0.00	150.0	± 9.6 %
		Y	4.23	70.36	18.00		150.0	
		Z	4.36	70.73	18.32		150.0	
10431-AAA	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	X	4.34	68.18	16.66	0.00	150.0	± 9.6 %
		Y	4.26	67.18	16.24		150.0	
		Z	4.29	67.04	16.19		150.0	
10432-AAA	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	X	4.61	67.93	16.61	0.00	150.0	± 9.6 %
		Y	4.56	67.06	16.30		150.0	
		Z	4.59	66.94	16.26		150.0	
10433-AAA	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	X	4.84	67.86	16.62	0.00	150.0	± 9.6 %
		Y	4.81	67.05	16.37		150.0	
		Z	4.84	66.95	16.33		150.0	
10434-AAA	W-CDMA (BS Test Model 1, 64 DPCH)	X	5.37	76.04	20.39	0.00	150.0	± 9.6 %
		Y	4.32	71.16	17.97		150.0	
		Z	4.48	71.59	18.33		150.0	
10435-AAA	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	23.03	60.77	1.67	2.23	80.0	± 9.6 %
		Y	0.74	60.00	3.85		80.0	
		Z	0.79	60.00	4.25		80.0	
10447-AAA	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	X	3.73	68.71	16.41	0.00	150.0	± 9.6 %
		Y	3.56	67.19	15.60		150.0	
		Z	3.59	67.02	15.59		150.0	
10448-AAA	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	X	4.18	68.00	16.55	0.00	150.0	± 9.6 %
		Y	4.10	66.96	16.10		150.0	
		Z	4.12	66.81	16.05		150.0	
10449-AAA	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	X	4.42	67.83	16.56	0.00	150.0	± 9.6 %
		Y	4.37	66.89	16.20		150.0	
		Z	4.39	66.77	16.15		150.0	
10450-AAA	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	X	4.60	67.69	16.52	0.00	150.0	± 9.6 %
		Y	4.56	66.82	16.22		150.0	
		Z	4.58	66.71	16.18		150.0	
10451-AAA	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	X	3.70	69.22	16.26	0.00	150.0	± 9.6 %
		Y	3.46	67.39	15.25		150.0	
		Z	3.50	67.24	15.27		150.0	
10456-AAA	IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle)	X	6.18	68.42	16.70	0.00	150.0	± 9.6 %
		Y	6.24	67.88	16.67		150.0	
		Z	6.28	67.84	16.65		150.0	
10457-AAA	UMTS-FDD (DC-HSDPA)	X	3.81	66.07	16.24	0.00	150.0	± 9.6 %
		Y	3.81	65.27	15.94		150.0	
		Z	3.82	65.15	15.89		150.0	
10458-AAA	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	X	3.48	68.28	15.61	0.00	150.0	± 9.6 %
		Y	3.29	66.78	14.72		150.0	
		Z	3.32	66.55	14.72		150.0	
10459-AAA	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	X	4.52	66.07	16.11	0.00	150.0	± 9.6 %
		Y	4.52	65.63	15.92		150.0	
		Z	4.43	64.88	15.61		150.0	

Certificate No: EX3-7413_Jun16

Page 26 of 38

Report File No : F690501/RF-SAR002460

Date of Issue : 2017-04-26

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7413

June 29, 2016

10460-AAA	UMTS-FDD (WCDMA, AMR)	X	1.56	80.13	22.34	0.00	150.0	± 9.6 %
		Y	0.92	68.16	16.20		150.0	
		Z	0.87	66.99	15.51		150.0	
10461-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	1.93	69.49	13.87	3.29	80.0	± 9.6 %
		Y	51.71	114.41	29.02		80.0	
		Z	5.52	82.54	20.04		80.0	
10462-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.91	60.00	6.95	3.23	80.0	± 9.6 %
		Y	1.68	65.15	10.62		80.0	
		Z	1.49	63.07	9.94		80.0	
10463-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.95	60.00	6.51	3.23	80.0	± 9.6 %
		Y	1.15	61.32	8.39		80.0	
		Z	1.22	60.87	8.44		80.0	
10464-AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	1.48	66.41	12.06	3.23	80.0	± 9.6 %
		Y	35.76	107.35	26.57		80.0	
		Z	4.21	78.46	18.15		80.0	
10465-AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.91	60.00	6.88	3.23	80.0	± 9.6 %
		Y	1.50	64.07	10.08		80.0	
		Z	1.40	62.47	9.59		80.0	
10466-AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.95	60.00	6.47	3.23	80.0	± 9.6 %
		Y	1.09	60.86	8.12		80.0	
		Z	1.18	60.54	8.22		80.0	
10467-AAA	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	1.52	66.74	12.23	3.23	80.0	± 9.6 %
		Y	44.94	110.43	27.34		80.0	
		Z	4.47	79.28	18.46		80.0	
10468-AAA	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.91	60.00	6.89	3.23	80.0	± 9.6 %
		Y	1.53	64.33	10.21		80.0	
		Z	1.42	62.61	9.67		80.0	
10469-AAA	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.95	60.00	6.46	3.23	80.0	± 9.6 %
		Y	1.09	60.87	8.12		80.0	
		Z	1.18	60.55	8.22		80.0	
10470-AAA	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	1.51	66.70	12.20	3.23	80.0	± 9.6 %
		Y	45.60	110.63	27.38		80.0	
		Z	4.45	79.26	18.45		80.0	
10471-AAA	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.91	60.00	6.88	3.23	80.0	± 9.6 %
		Y	1.52	64.26	10.17		80.0	
		Z	1.42	62.57	9.64		80.0	
10472-AAA	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.95	60.00	6.45	3.23	80.0	± 9.6 %
		Y	1.09	60.83	8.08		80.0	
		Z	1.18	60.52	8.20		80.0	
10473-AAA	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	1.51	66.68	12.19	3.23	80.0	± 9.6 %
		Y	45.41	110.55	27.35		80.0	
		Z	4.44	79.22	18.43		80.0	
10474-AAA	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.91	60.00	6.88	3.23	80.0	± 9.6 %
		Y	1.52	64.23	10.16		80.0	
		Z	1.41	62.55	9.63		80.0	
10475-AAA	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.95	60.00	6.45	3.23	80.0	± 9.6 %
		Y	1.08	60.81	8.08		80.0	
		Z	1.17	60.51	8.19		80.0	

EX3DV4-SN:7413

June 29, 2016

10477-AAA	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.91	60.00	6.86	3.23	80.0	± 9.6 %
		Y	1.48	64.00	10.03		80.0	
		Z	1.39	62.43	9.55		80.0	
10478-AAA	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.95	60.00	6.44	3.23	80.0	± 9.6 %
		Y	1.08	60.78	8.05		80.0	
		Z	1.17	60.48	8.17		80.0	
10479-AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	0.95	60.00	5.70	1.99	80.0	± 9.6 %
		Y	0.96	60.00	6.66		80.0	
		Z	1.01	60.00	6.94		80.0	
10480-AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	1.29	60.00	5.07	1.99	80.0	± 9.6 %
		Y	1.28	60.00	5.73		80.0	
		Z	1.31	60.00	6.25		80.0	
10481-AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.39	60.00	4.83	1.99	80.0	± 9.6 %
		Y	1.33	60.00	5.49		80.0	
		Z	1.35	60.00	6.03		80.0	
10482-AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	5.61	80.41	19.03	1.99	80.0	± 9.6 %
		Y	2.54	69.54	14.99		80.0	
		Z	2.30	67.89	14.32		80.0	
10483-AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.19	64.58	11.70	1.99	80.0	± 9.6 %
		Y	3.37	69.65	14.64		80.0	
		Z	2.93	67.40	13.74		80.0	
10484-AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	2.19	64.38	11.65	1.99	80.0	± 9.6 %
		Y	3.24	68.94	14.38		80.0	
		Z	2.88	66.99	13.59		80.0	
10485-AAA	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	6.24	82.78	20.91	1.99	80.0	± 9.6 %
		Y	3.21	72.72	17.32		80.0	
		Z	2.83	70.50	16.37		80.0	
10486-AAA	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.05	73.34	17.24	1.99	80.0	± 9.6 %
		Y	2.92	68.11	15.06		80.0	
		Z	2.79	67.15	14.67		80.0	
10487-AAA	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.94	72.61	16.96	1.99	80.0	± 9.6 %
		Y	2.92	67.77	14.92		80.0	
		Z	2.81	66.91	14.57		80.0	
10488-AAA	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	5.29	79.12	20.43	1.99	80.0	± 9.6 %
		Y	3.63	72.76	18.17		80.0	
		Z	3.32	70.95	17.31		80.0	
10489-AAA	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.99	72.10	18.02	1.99	80.0	± 9.6 %
		Y	3.38	68.80	16.71		80.0	
		Z	3.26	67.91	16.26		80.0	
10490-AAA	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.03	71.64	17.86	1.99	80.0	± 9.6 %
		Y	3.47	68.64	16.68		80.0	
		Z	3.37	67.80	16.26		80.0	
10491-AAA	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	4.78	75.35	19.23	1.99	80.0	± 9.6 %
		Y	3.80	71.14	17.74		80.0	
		Z	3.59	69.86	17.08		80.0	
10492-AAA	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.13	70.50	17.68	1.99	80.0	± 9.6 %
		Y	3.74	68.21	16.84		80.0	
		Z	3.66	67.52	16.46		80.0	

Certificate No: EX3-7413_Jun16

Page 28 of 38

Report File No : F690501/RF-SAR002460

Date of Issue : 2017-04-26

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7413

June 29, 2016

10493-AAA	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.17	70.22	17.58	1.99	80.0	± 9.6 %
		Y	3.81	68.08	16.81		80.0	
		Z	3.73	67.43	16.45		80.0	
10494-AAA	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	5.77	78.25	20.07	1.99	80.0	± 9.6 %
		Y	4.16	72.67	18.15		80.0	
		Z	3.88	71.19	17.41		80.0	
10495-AAA	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.24	71.18	17.96	1.99	80.0	± 9.6 %
		Y	3.78	68.64	17.03		80.0	
		Z	3.69	67.93	16.64		80.0	
10496-AAA	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.26	70.66	17.79	1.99	80.0	± 9.6 %
		Y	3.85	68.36	16.97		80.0	
		Z	3.78	67.71	16.60		80.0	
10497-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	2.78	71.14	14.64	1.99	80.0	± 9.6 %
		Y	1.60	64.00	11.51		80.0	
		Z	1.57	63.54	11.40		80.0	
10498-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	1.59	62.28	9.87	1.99	80.0	± 9.6 %
		Y	1.37	60.14	8.66		80.0	
		Z	1.44	60.36	8.95		80.0	
10499-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.53	61.65	9.43	1.99	80.0	± 9.6 %
		Y	1.38	60.00	8.45		80.0	
		Z	1.43	60.06	8.67		80.0	
10500-AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	5.38	80.15	20.39	1.99	80.0	± 9.6 %
		Y	3.34	72.50	17.61		80.0	
		Z	2.99	70.46	16.69		80.0	
10501-AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.02	72.80	17.53	1.99	80.0	± 9.6 %
		Y	3.14	68.52	15.77		80.0	
		Z	3.01	67.55	15.34		80.0	
10502-AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.04	72.44	17.35	1.99	80.0	± 9.6 %
		Y	3.19	68.35	15.65		80.0	
		Z	3.07	67.44	15.26		80.0	
10503-AAA	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	5.14	78.69	20.26	1.99	80.0	± 9.6 %
		Y	3.58	72.55	18.07		80.0	
		Z	3.27	70.74	17.20		80.0	
10504-AAA	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.95	71.93	17.93	1.99	80.0	± 9.6 %
		Y	3.36	68.71	16.66		80.0	
		Z	3.24	67.81	16.21		80.0	
10505-AAA	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.99	71.48	17.78	1.99	80.0	± 9.6 %
		Y	3.45	68.54	16.62		80.0	
		Z	3.35	67.70	16.20		80.0	
10506-AAA	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	5.65	77.94	19.95	1.99	80.0	± 9.6 %
		Y	4.13	72.52	18.08		80.0	
		Z	3.84	71.03	17.34		80.0	
10507-AAA	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.21	71.08	17.90	1.99	80.0	± 9.6 %
		Y	3.77	68.58	17.00		80.0	
		Z	3.67	67.87	16.60		80.0	

EX3DV4- SN:7413

June 29, 2016

10508-AAA	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.23	70.54	17.73	1.99	80.0	± 9.6 %
		Y	3.84	68.29	16.93		80.0	
		Z	3.76	67.64	16.56		80.0	
10509-AAA	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	5.44	75.05	18.94	1.99	80.0	± 9.6 %
		Y	4.39	71.08	17.58		80.0	
		Z	4.19	70.05	17.03		80.0	
10510-AAA	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.61	70.37	17.71	1.99	80.0	± 9.6 %
		Y	4.25	68.34	17.03		80.0	
		Z	4.18	67.79	16.71		80.0	
10511-AAA	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.62	69.95	17.59	1.99	80.0	± 9.6 %
		Y	4.30	68.08	16.98		80.0	
		Z	4.24	67.56	16.67		80.0	
10512-AAA	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	6.34	78.05	19.83	1.99	80.0	± 9.6 %
		Y	4.63	72.68	18.02		80.0	
		Z	4.34	71.36	17.36		80.0	
10513-AAA	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.56	70.92	17.91	1.99	80.0	± 9.6 %
		Y	4.15	68.64	17.14		80.0	
		Z	4.07	68.05	16.78		80.0	
10514-AAA	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.50	70.25	17.71	1.99	80.0	± 9.6 %
		Y	4.16	68.21	17.03		80.0	
		Z	4.09	67.66	16.70		80.0	
10515-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)	X	1.05	66.12	16.84	0.00	150.0	± 9.6 %
		Y	0.99	63.17	14.72		150.0	
		Z	0.97	62.76	14.44		150.0	
10516-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)	X	2.44	101.37	30.94	0.00	150.0	± 9.6 %
		Y	0.62	70.29	17.34		150.0	
		Z	0.54	67.97	15.98		150.0	
10517-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)	X	1.01	70.74	19.00	0.00	150.0	± 9.6 %
		Y	0.84	65.07	15.36		150.0	
		Z	0.81	64.38	14.88		150.0	
10518-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)	X	4.59	67.52	16.47	0.00	150.0	± 9.6 %
		Y	4.56	66.71	16.20		150.0	
		Z	4.59	66.59	16.16		150.0	
10519-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)	X	4.79	67.74	16.57	0.00	150.0	± 9.6 %
		Y	4.75	66.95	16.33		150.0	
		Z	4.79	66.85	16.29		150.0	
10520-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle)	X	4.65	67.76	16.53	0.00	150.0	± 9.6 %
		Y	4.60	66.91	16.25		150.0	
		Z	4.64	66.82	16.21		150.0	
10521-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle)	X	4.59	67.80	16.54	0.00	150.0	± 9.6 %
		Y	4.54	66.91	16.23		150.0	
		Z	4.57	66.81	16.19		150.0	
10522-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle)	X	4.64	67.81	16.59	0.00	150.0	± 9.6 %
		Y	4.60	66.99	16.32		150.0	
		Z	4.63	66.86	16.26		150.0	

Certificate No: EX3-7413_Jun16

Page 30 of 38

Report File No : F690501/RF-SAR002460

Date of Issue : 2017-04-26

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7413

June 29, 2016

10523-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle)	X	4.52	67.76	16.48	0.00	150.0	± 9.6 %
		Y	4.48	66.86	16.16		150.0	
		Z	4.50	66.73	16.11		150.0	
10524-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle)	X	4.58	67.74	16.56	0.00	150.0	± 9.6 %
		Y	4.54	66.91	16.28		150.0	
		Z	4.57	66.79	16.23		150.0	
10525-AAA	IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle)	X	4.57	66.86	16.20	0.00	150.0	± 9.6 %
		Y	4.52	65.96	15.87		150.0	
		Z	4.54	65.83	15.82		150.0	
10526-AAA	IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle)	X	4.75	67.24	16.33	0.00	150.0	± 9.6 %
		Y	4.70	66.33	16.02		150.0	
		Z	4.73	66.21	15.97		150.0	
10527-AAA	IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle)	X	4.68	67.24	16.30	0.00	150.0	± 9.6 %
		Y	4.62	66.29	15.96		150.0	
		Z	4.64	66.18	15.91		150.0	
10528-AAA	IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle)	X	4.69	67.25	16.33	0.00	150.0	± 9.6 %
		Y	4.63	66.31	15.99		150.0	
		Z	4.66	66.19	15.95		150.0	
10529-AAA	IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle)	X	4.69	67.25	16.33	0.00	150.0	± 9.6 %
		Y	4.63	66.31	15.99		150.0	
		Z	4.66	66.19	15.95		150.0	
10531-AAA	IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle)	X	4.70	67.39	16.36	0.00	150.0	± 9.6 %
		Y	4.63	66.42	16.01		150.0	
		Z	4.66	66.31	15.96		150.0	
10532-AAA	IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle)	X	4.56	67.29	16.32	0.00	150.0	± 9.6 %
		Y	4.48	66.27	15.94		150.0	
		Z	4.51	66.17	15.90		150.0	
10533-AAA	IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle)	X	4.71	67.30	16.32	0.00	150.0	± 9.6 %
		Y	4.64	66.35	15.98		150.0	
		Z	4.67	66.23	15.93		150.0	
10534-AAA	IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle)	X	5.18	67.23	16.28	0.00	150.0	± 9.6 %
		Y	5.16	66.42	16.05		150.0	
		Z	5.19	66.35	16.02		150.0	
10535-AAA	IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle)	X	5.24	67.37	16.33	0.00	150.0	± 9.6 %
		Y	5.23	66.58	16.12		150.0	
		Z	5.26	66.50	16.08		150.0	
10536-AAA	IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle)	X	5.13	67.41	16.34	0.00	150.0	± 9.6 %
		Y	5.10	66.54	16.08		150.0	
		Z	5.12	66.46	16.05		150.0	
10537-AAA	IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle)	X	5.18	67.34	16.31	0.00	150.0	± 9.6 %
		Y	5.15	66.51	16.07		150.0	
		Z	5.18	66.43	16.04		150.0	
10538-AAA	IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle)	X	5.26	67.32	16.33	0.00	150.0	± 9.6 %
		Y	5.25	66.54	16.12		150.0	
		Z	5.29	66.48	16.10		150.0	
10540-AAA	IEEE 802.11ac WiFi (40MHz, MCS6, 99pc duty cycle)	X	5.19	67.32	16.35	0.00	150.0	± 9.6 %
		Y	5.18	66.55	16.14		150.0	
		Z	5.20	66.46	16.10		150.0	

Certificate No: EX3-7413_Jun16

Page 31 of 38

Report File No : F690501/RF-SAR002460

Date of Issue : 2017-04-26

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7413

June 29, 2016

10541-AAA	IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle)	X	5.17	67.25	16.31	0.00	150.0	± 9.6 %
		Y	5.15	66.42	16.07		150.0	
		Z	5.18	66.35	16.04		150.0	
10542-AAA	IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle)	X	5.32	67.25	16.32	0.00	150.0	± 9.6 %
		Y	5.30	66.49	16.12		150.0	
		Z	5.34	66.42	16.09		150.0	
10543-AAA	IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle)	X	5.40	67.27	16.34	0.00	150.0	± 9.6 %
		Y	5.38	66.52	16.16		150.0	
		Z	5.42	66.45	16.12		150.0	
10544-AAA	IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)	X	5.47	67.33	16.25	0.00	150.0	± 9.6 %
		Y	5.47	66.54	16.04		150.0	
		Z	5.49	66.46	16.01		150.0	
10545-AAA	IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle)	X	5.63	67.60	16.32	0.00	150.0	± 9.6 %
		Y	5.65	66.93	16.19		150.0	
		Z	5.69	66.87	16.16		150.0	
10546-AAA	IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle)	X	5.54	67.56	16.32	0.00	150.0	± 9.6 %
		Y	5.53	66.75	16.12		150.0	
		Z	5.57	66.70	16.10		150.0	
10547-AAA	IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle)	X	5.61	67.57	16.32	0.00	150.0	± 9.6 %
		Y	5.60	66.79	16.12		150.0	
		Z	5.65	66.76	16.11		150.0	
10548-AAA	IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle)	X	5.71	68.01	16.51	0.00	150.0	± 9.6 %
		Y	5.84	67.67	16.54		150.0	
		Z	5.91	67.72	16.56		150.0	
10550-AAA	IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle)	X	5.57	67.55	16.32	0.00	150.0	± 9.6 %
		Y	5.56	66.75	16.13		150.0	
		Z	5.59	66.69	16.10		150.0	
10551-AAA	IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle)	X	5.57	67.57	16.30	0.00	150.0	± 9.6 %
		Y	5.57	66.81	16.11		150.0	
		Z	5.60	66.74	16.09		150.0	
10552-AAA	IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle)	X	5.50	67.43	16.25	0.00	150.0	± 9.6 %
		Y	5.48	66.61	16.02		150.0	
		Z	5.51	66.53	15.99		150.0	
10553-AAA	IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle)	X	5.58	67.46	16.28	0.00	150.0	± 9.6 %
		Y	5.57	66.65	16.07		150.0	
		Z	5.60	66.58	16.05		150.0	
10554-AAA	IEEE 1602.11ac WiFi (160MHz, MCS0, 99pc duty cycle)	X	5.85	67.64	16.30	0.00	150.0	± 9.6 %
		Y	5.87	66.90	16.13		150.0	
		Z	5.89	66.84	16.11		150.0	
10555-AAA	IEEE 1602.11ac WiFi (160MHz, MCS1, 99pc duty cycle)	X	5.97	67.89	16.39	0.00	150.0	± 9.6 %
		Y	5.99	67.19	16.25		150.0	
		Z	6.02	67.14	16.23		150.0	
10556-AAA	IEEE 1602.11ac WiFi (160MHz, MCS2, 99pc duty cycle)	X	5.99	67.93	16.41	0.00	150.0	± 9.6 %
		Y	6.02	67.24	16.27		150.0	
		Z	6.04	67.18	16.25		150.0	
10557-AAA	IEEE 1602.11ac WiFi (160MHz, MCS3, 99pc duty cycle)	X	5.97	67.89	16.41	0.00	150.0	± 9.6 %
		Y	5.99	67.16	16.25		150.0	
		Z	6.02	67.11	16.23		150.0	

Certificate No: EX3-7413_Jun16

Page 32 of 38

Report File No : F690501/RF-SAR002460

Date of Issue : 2017-04-26

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7413

June 29, 2016

10558-AAA	IEEE 1602.11ac WiFi (160MHz, MCS4, 99pc duty cycle)	X	6.01	68.01	16.48	0.00	150.0	± 9.6 %
		Y	6.03	67.31	16.35		150.0	
		Z	6.07	67.27	16.33		150.0	
10560-AAA	IEEE 1602.11ac WiFi (160MHz, MCS6, 99pc duty cycle)	X	6.03	67.92	16.47	0.00	150.0	± 9.6 %
		Y	6.03	67.18	16.31		150.0	
		Z	6.07	67.12	16.29		150.0	
10561-AAA	IEEE 1602.11ac WiFi (160MHz, MCS7, 99pc duty cycle)	X	5.93	67.84	16.47	0.00	150.0	± 9.6 %
		Y	5.95	67.14	16.33		150.0	
		Z	5.98	67.08	16.31		150.0	
10562-AAA	IEEE 1602.11ac WiFi (160MHz, MCS8, 99pc duty cycle)	X	6.02	68.12	16.61	0.00	150.0	± 9.6 %
		Y	6.08	67.52	16.52		150.0	
		Z	6.12	67.50	16.52		150.0	
10563-AAA	IEEE 1602.11ac WiFi (160MHz, MCS9, 99pc duty cycle)	X	6.25	68.38	16.68	0.00	150.0	± 9.6 %
		Y	6.33	67.88	16.66		150.0	
		Z	6.45	68.06	16.74		150.0	
10564-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle)	X	4.88	67.42	16.50	0.46	150.0	± 9.6 %
		Y	4.89	66.80	16.37		150.0	
		Z	4.91	66.66	16.30		150.0	
10565-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle)	X	5.14	67.94	16.85	0.46	150.0	± 9.6 %
		Y	5.12	67.24	16.68		150.0	
		Z	5.16	67.14	16.64		150.0	
10566-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle)	X	4.97	67.79	16.67	0.46	150.0	± 9.6 %
		Y	4.95	67.09	16.50		150.0	
		Z	4.99	66.98	16.45		150.0	
10567-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle)	X	5.03	68.35	17.13	0.46	150.0	± 9.6 %
		Y	4.98	67.45	16.83		150.0	
		Z	5.02	67.40	16.82		150.0	
10568-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle)	X	4.85	67.41	16.35	0.46	150.0	± 9.6 %
		Y	4.87	66.88	16.28		150.0	
		Z	4.89	66.70	16.18		150.0	
10569-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle)	X	4.99	68.46	17.20	0.46	150.0	± 9.6 %
		Y	4.93	67.52	16.87		150.0	
		Z	4.96	67.44	16.85		150.0	
10570-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle)	X	5.01	68.21	17.08	0.46	150.0	± 9.6 %
		Y	4.97	67.38	16.82		150.0	
		Z	5.01	67.30	16.79		150.0	
10571-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)	X	1.27	67.16	17.22	0.46	130.0	± 9.6 %
		Y	1.18	64.33	15.45		130.0	
		Z	1.16	63.83	15.08		130.0	
10572-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle)	X	1.31	68.13	17.79	0.46	130.0	± 9.6 %
		Y	1.20	64.86	15.77		130.0	
		Z	1.17	64.34	15.40		130.0	
10573-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)	X	100.00	156.68	42.65	0.46	130.0	± 9.6 %
		Y	1.76	82.46	22.02		130.0	
		Z	1.29	76.91	19.62		130.0	
10574-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)	X	2.02	80.92	23.70	0.46	130.0	± 9.6 %
		Y	1.28	70.02	18.39		130.0	
		Z	1.24	69.25	17.91		130.0	

Certificate No: EX3-7413_Jun16

Page 33 of 38

Report File No : F690501/RF-SAR002460

Date of Issue : 2017-04-26

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7413

June 29, 2016

10575-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle)	X	4.65	67.14	16.48	0.46	130.0	± 9.6 %
		Y	4.67	66.54	16.37		130.0	
		Z	4.69	66.39	16.29		130.0	
10576-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle)	X	4.69	67.35	16.58	0.46	130.0	± 9.6 %
		Y	4.69	66.70	16.43		130.0	
		Z	4.71	66.55	16.36		130.0	
10577-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle)	X	4.90	67.64	16.74	0.46	130.0	± 9.6 %
		Y	4.90	67.00	16.60		130.0	
		Z	4.93	66.88	16.55		130.0	
10578-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle)	X	4.82	67.92	16.92	0.46	130.0	± 9.6 %
		Y	4.79	67.13	16.69		130.0	
		Z	4.83	67.04	16.65		130.0	
10579-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle)	X	4.54	66.99	16.09	0.46	130.0	± 9.6 %
		Y	4.56	66.47	16.04		130.0	
		Z	4.58	66.29	15.93		130.0	
10580-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle)	X	4.58	66.95	16.07	0.46	130.0	± 9.6 %
		Y	4.61	66.51	16.07		130.0	
		Z	4.63	66.30	15.94		130.0	
10581-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty cycle)	X	4.72	67.99	16.87	0.46	130.0	± 9.6 %
		Y	4.69	67.15	16.62		130.0	
		Z	4.72	67.06	16.57		130.0	
10582-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle)	X	4.47	66.63	15.81	0.46	130.0	± 9.6 %
		Y	4.51	66.25	15.85		130.0	
		Z	4.53	66.04	15.71		130.0	
10583-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)	X	4.65	67.14	16.48	0.46	130.0	± 9.6 %
		Y	4.67	66.54	16.37		130.0	
		Z	4.69	66.39	16.29		130.0	
10584-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)	X	4.69	67.35	16.58	0.46	130.0	± 9.6 %
		Y	4.69	66.70	16.43		130.0	
		Z	4.71	66.55	16.36		130.0	
10585-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)	X	4.90	67.64	16.74	0.46	130.0	± 9.6 %
		Y	4.90	67.00	16.60		130.0	
		Z	4.93	66.88	16.55		130.0	
10586-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)	X	4.82	67.92	16.92	0.46	130.0	± 9.6 %
		Y	4.79	67.13	16.69		130.0	
		Z	4.83	67.04	16.65		130.0	
10587-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)	X	4.54	66.99	16.09	0.46	130.0	± 9.6 %
		Y	4.56	66.47	16.04		130.0	
		Z	4.58	66.29	15.93		130.0	
10588-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)	X	4.58	66.95	16.07	0.46	130.0	± 9.6 %
		Y	4.61	66.51	16.07		130.0	
		Z	4.63	66.30	15.94		130.0	
10589-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)	X	4.72	67.99	16.87	0.46	130.0	± 9.6 %
		Y	4.69	67.15	16.62		130.0	
		Z	4.72	67.06	16.57		130.0	
10590-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)	X	4.47	66.63	15.81	0.46	130.0	± 9.6 %
		Y	4.51	66.25	15.85		130.0	
		Z	4.53	66.04	15.71		130.0	

EX3DV4- SN:7413

June 29, 2016

10591-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle)	X	4.80	67.21	16.58	0.46	130.0	± 9.6 %
		Y	4.82	66.60	16.47		130.0	
		Z	4.84	66.47	16.40		130.0	
10592-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle)	X	4.97	67.56	16.71	0.46	130.0	± 9.6 %
		Y	4.97	66.94	16.60		130.0	
		Z	5.00	66.81	16.53		130.0	
10593-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle)	X	4.89	67.46	16.59	0.46	130.0	± 9.6 %
		Y	4.90	66.85	16.48		130.0	
		Z	4.92	66.72	16.42		130.0	
10594-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle)	X	4.95	67.66	16.77	0.46	130.0	± 9.6 %
		Y	4.95	67.01	16.63		130.0	
		Z	4.98	66.89	16.57		130.0	
10595-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle)	X	4.91	67.59	16.65	0.46	130.0	± 9.6 %
		Y	4.92	66.96	16.53		130.0	
		Z	4.95	66.83	16.46		130.0	
10596-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle)	X	4.85	67.58	16.64	0.46	130.0	± 9.6 %
		Y	4.85	66.96	16.53		130.0	
		Z	4.88	66.82	16.46		130.0	
10597-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle)	X	4.80	67.49	16.54	0.46	130.0	± 9.6 %
		Y	4.80	66.87	16.42		130.0	
		Z	4.83	66.73	16.35		130.0	
10598-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle)	X	4.80	67.85	16.88	0.46	130.0	± 9.6 %
		Y	4.78	67.08	16.66		130.0	
		Z	4.81	66.99	16.62		130.0	
10599-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle)	X	5.43	67.64	16.68	0.46	130.0	± 9.6 %
		Y	5.48	67.15	16.67		130.0	
		Z	5.51	67.05	16.61		130.0	
10600-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle)	X	5.51	67.84	16.74	0.46	130.0	± 9.6 %
		Y	5.61	67.54	16.84		130.0	
		Z	5.67	67.52	16.82		130.0	
10601-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle)	X	5.44	67.75	16.72	0.46	130.0	± 9.6 %
		Y	5.50	67.31	16.74		130.0	
		Z	5.54	67.24	16.70		130.0	
10602-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle)	X	5.51	67.66	16.58	0.46	130.0	± 9.6 %
		Y	5.59	67.32	16.67		130.0	
		Z	5.62	67.22	16.60		130.0	
10603-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle)	X	5.61	68.06	16.92	0.46	130.0	± 9.6 %
		Y	5.68	67.64	16.95		130.0	
		Z	5.72	67.58	16.91		130.0	
10604-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle)	X	5.43	67.58	16.68	0.46	130.0	± 9.6 %
		Y	5.49	67.11	16.68		130.0	
		Z	5.51	67.01	16.62		130.0	
10605-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle)	X	5.49	67.71	16.73	0.46	130.0	± 9.6 %
		Y	5.59	67.43	16.84		130.0	
		Z	5.62	67.32	16.77		130.0	
10606-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle)	X	5.29	67.26	16.37	0.46	130.0	± 9.6 %
		Y	5.36	66.84	16.41		130.0	
		Z	5.39	66.76	16.35		130.0	

Certificate No: EX3-7413_Jun16

Page 35 of 38

Report File No : F690501/RF-SAR002460

Date of Issue : 2017-04-26

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7413

June 29, 2016

10607-AAA	IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle)	X	4.66	66.63	16.27	0.46	130.0	± 9.6 %
		Y	4.65	65.90	16.08		130.0	
		Z	4.67	65.76	16.01		130.0	
10608-AAA	IEEE 802.11ac WiFi (20MHz, MCS1, 90pc duty cycle)	X	4.86	67.05	16.44	0.46	130.0	± 9.6 %
		Y	4.84	66.31	16.25		130.0	
		Z	4.87	66.17	16.18		130.0	
10609-AAA	IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle)	X	4.74	66.89	16.27	0.46	130.0	± 9.6 %
		Y	4.73	66.17	16.09		130.0	
		Z	4.75	66.01	16.01		130.0	
10610-AAA	IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle)	X	4.80	67.09	16.46	0.46	130.0	± 9.6 %
		Y	4.78	66.31	16.25		130.0	
		Z	4.81	66.18	16.18		130.0	
10611-AAA	IEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle)	X	4.71	66.86	16.29	0.46	130.0	± 9.6 %
		Y	4.70	66.13	16.10		130.0	
		Z	4.72	65.98	16.02		130.0	
10612-AAA	IEEE 802.11ac WiFi (20MHz, MCS5, 90pc duty cycle)	X	4.72	66.99	16.31	0.46	130.0	± 9.6 %
		Y	4.71	66.29	16.15		130.0	
		Z	4.73	66.12	16.05		130.0	
10613-AAA	IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle)	X	4.72	66.86	16.19	0.46	130.0	± 9.6 %
		Y	4.71	66.18	16.04		130.0	
		Z	4.74	66.02	15.95		130.0	
10614-AAA	IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle)	X	4.69	67.20	16.52	0.46	130.0	± 9.6 %
		Y	4.65	66.34	16.25		130.0	
		Z	4.68	66.22	16.19		130.0	
10615-AAA	IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle)	X	4.69	66.58	16.00	0.46	130.0	± 9.6 %
		Y	4.70	65.98	15.89		130.0	
		Z	4.72	65.79	15.79		130.0	
10616-AAA	IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle)	X	5.28	67.04	16.39	0.46	130.0	± 9.6 %
		Y	5.30	66.40	16.28		130.0	
		Z	5.33	66.31	16.23		130.0	
10617-AAA	IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle)	X	5.33	67.12	16.39	0.46	130.0	± 9.6 %
		Y	5.36	66.56	16.33		130.0	
		Z	5.39	66.43	16.26		130.0	
10618-AAA	IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle)	X	5.24	67.26	16.49	0.46	130.0	± 9.6 %
		Y	5.25	66.57	16.35		130.0	
		Z	5.28	66.47	16.30		130.0	
10619-AAA	IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle)	X	5.24	66.98	16.27	0.46	130.0	± 9.6 %
		Y	5.27	66.40	16.21		130.0	
		Z	5.30	66.30	16.15		130.0	
10620-AAA	IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle)	X	5.33	67.02	16.34	0.46	130.0	± 9.6 %
		Y	5.36	66.45	16.28		130.0	
		Z	5.40	66.37	16.23		130.0	
10621-AAA	IEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle)	X	5.36	67.27	16.60	0.46	130.0	± 9.6 %
		Y	5.36	66.55	16.44		130.0	
		Z	5.39	66.47	16.41		130.0	
10622-AAA	IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle)	X	5.34	67.34	16.62	0.46	130.0	± 9.6 %
		Y	5.37	66.70	16.51		130.0	
		Z	5.40	66.61	16.46		130.0	

Certificate No: EX3-7413_Jun16

Page 36 of 38

Report File No : F690501/RF-SAR002460

Date of Issue : 2017-04-26

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7413

June 29, 2016

10623-AAA	IEEE 802.11ac WiFi (40MHz, MCS7, 90pc duty cycle)	X	5.22	66.85	16.25	0.46	130.0	± 9.6 %
		Y	5.25	66.26	16.17		130.0	
		Z	5.27	66.14	16.10		130.0	
10624-AAA	IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle)	X	5.40	67.02	16.39	0.46	130.0	± 9.6 %
		Y	5.44	66.45	16.33		130.0	
		Z	5.47	66.36	16.28		130.0	
10625-AAA	IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle)	X	5.68	67.68	16.76	0.46	130.0	± 9.6 %
		Y	5.81	67.42	16.86		130.0	
		Z	5.87	67.40	16.85		130.0	
10626-AAA	IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle)	X	5.55	67.10	16.33	0.46	130.0	± 9.6 %
		Y	5.59	66.47	16.24		130.0	
		Z	5.61	66.37	16.19		130.0	
10627-AAA	IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle)	X	5.74	67.46	16.46	0.46	130.0	± 9.6 %
		Y	5.82	67.00	16.47		130.0	
		Z	5.85	66.92	16.42		130.0	
10628-AAA	IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle)	X	5.57	67.13	16.23	0.46	130.0	± 9.6 %
		Y	5.63	66.58	16.20		130.0	
		Z	5.65	66.49	16.14		130.0	
10629-AAA	IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle)	X	5.65	67.16	16.23	0.46	130.0	± 9.6 %
		Y	5.71	66.66	16.23		130.0	
		Z	5.74	66.58	16.18		130.0	
10630-AAA	IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle)	X	5.85	67.94	16.62	0.46	130.0	± 9.6 %
		Y	6.12	68.08	16.94		130.0	
		Z	6.22	68.15	16.96		130.0	
10631-AAA	IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle)	X	5.95	68.39	17.06	0.46	130.0	± 9.6 %
		Y	6.03	67.88	17.02		130.0	
		Z	6.11	67.96	17.06		130.0	
10632-AAA	IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle)	X	5.78	67.75	16.76	0.46	130.0	± 9.6 %
		Y	5.79	67.05	16.62		130.0	
		Z	5.82	67.00	16.60		130.0	
10633-AAA	IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle)	X	5.66	67.36	16.38	0.46	130.0	± 9.6 %
		Y	5.69	66.74	16.30		130.0	
		Z	5.72	66.66	16.26		130.0	
10634-AAA	IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle)	X	5.67	67.48	16.51	0.46	130.0	± 9.6 %
		Y	5.68	66.76	16.37		130.0	
		Z	5.71	66.70	16.34		130.0	
10635-AAA	IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle)	X	5.50	66.58	15.75	0.46	130.0	± 9.6 %
		Y	5.57	66.15	15.82		130.0	
		Z	5.59	66.01	15.72		130.0	
10636-AAA	IEEE 1602.11ac WiFi (160MHz, MCS0, 90pc duty cycle)	X	5.94	67.41	16.37	0.46	130.0	± 9.6 %
		Y	6.00	66.84	16.33		130.0	
		Z	6.02	66.76	16.29		130.0	
10637-AAA	IEEE 1602.11ac WiFi (160MHz, MCS1, 90pc duty cycle)	X	6.07	67.70	16.49	0.46	130.0	± 9.6 %
		Y	6.15	67.21	16.50		130.0	
		Z	6.18	67.14	16.45		130.0	
10638-AAA	IEEE 1602.11ac WiFi (160MHz, MCS2, 90pc duty cycle)	X	6.07	67.68	16.46	0.46	130.0	± 9.6 %
		Y	6.15	67.19	16.47		130.0	
		Z	6.18	67.11	16.42		130.0	

Certificate No: EX3-7413_Jun16

Page 37 of 38

Report File No : F690501/RF-SAR002460

Date of Issue : 2017-04-26

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7413

June 29, 2016

10639-AAA	IEEE 1602.11ac WiFi (160MHz, MCS3, 90pc duty cycle)	X	6.08	67.71	16.53	0.46	130.0	± 9.6 %
		Y	6.14	67.15	16.49		130.0	
		Z	6.17	67.09	16.46		130.0	
10640-AAA	IEEE 1602.11ac WiFi (160MHz, MCS4, 90pc duty cycle)	X	6.06	67.64	16.42	0.46	130.0	± 9.6 %
		Y	6.14	67.18	16.45		130.0	
		Z	6.18	67.11	16.40		130.0	
10641-AAA	IEEE 1602.11ac WiFi (160MHz, MCS5, 90pc duty cycle)	X	6.09	67.50	16.37	0.46	130.0	± 9.6 %
		Y	6.18	67.06	16.41		130.0	
		Z	6.20	66.95	16.34		130.0	
10642-AAA	IEEE 1602.11ac WiFi (160MHz, MCS6, 90pc duty cycle)	X	6.20	67.98	16.80	0.46	130.0	± 9.6 %
		Y	6.23	67.31	16.70		130.0	
		Z	6.26	67.27	16.68		130.0	
10643-AAA	IEEE 1602.11ac WiFi (160MHz, MCS7, 90pc duty cycle)	X	5.98	67.49	16.43	0.46	130.0	± 9.6 %
		Y	6.06	67.01	16.45		130.0	
		Z	6.09	66.92	16.39		130.0	
10644-AAA	IEEE 1602.11ac WiFi (160MHz, MCS8, 90pc duty cycle)	X	6.12	67.90	16.66	0.46	130.0	± 9.6 %
		Y	6.23	67.53	16.73		130.0	
		Z	6.28	67.50	16.70		130.0	
10645-AAA	IEEE 1602.11ac WiFi (160MHz, MCS9, 90pc duty cycle)	X	6.40	68.30	16.80	0.46	130.0	± 9.6 %
		Y	6.61	68.23	17.04		130.0	
		Z	6.73	68.38	17.09		130.0	

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Appendix C.2

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- **DC Voltage Measurement:** Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- **Connector angle:** The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - **DC Voltage Measurement Linearity:** Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - **Common mode sensitivity:** Influence of a positive or negative common mode voltage on the differential measurement.
 - **Channel separation:** Influence of a voltage on the neighbor channels not subject to an input voltage.
 - **AD Converter Values with inputs shorted:** Values on the internal AD converter corresponding to zero input voltage
 - **Input Offset Measurement:** Output voltage and statistical results over a large number of zero voltage measurements.
 - **Input Offset Current:** Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - **Input resistance:** Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - **Low Battery Alarm Voltage:** Typical value for information. Below this voltage, a battery alarm signal is generated.
 - **Power consumption:** Typical value for information. Supply currents in various operating modes.

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1μV , full range = -100...+300 mV
 Low Range: 1LSB = 61nV , full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	403.936 ± 0.02% (k=2)	404.124 ± 0.02% (k=2)	403.958 ± 0.02% (k=2)
Low Range	3.99686 ± 1.50% (k=2)	3.98021 ± 1.50% (k=2)	3.99881 ± 1.50% (k=2)

Connector Angle

Connector Angle to be used in DASY system	253.5 ° ± 1 °
---	---------------

Appendix (Additional assessments outside the scope of SCS0108)

1. DC Voltage Linearity

High Range		Reading (μV)	Difference (μV)	Error (%)
Channel X	+ Input	200033.73	-2.26	-0.00
Channel X	+ Input	20008.28	3.63	0.02
Channel X	- Input	-20004.55	1.38	-0.01
Channel Y	+ Input	200034.82	-0.96	-0.00
Channel Y	+ Input	20004.90	0.21	0.00
Channel Y	- Input	-20006.47	-0.42	0.00
Channel Z	+ Input	200034.13	-1.37	-0.00
Channel Z	+ Input	20004.91	0.31	0.00
Channel Z	- Input	-20007.89	-1.74	0.01

Low Range		Reading (μV)	Difference (μV)	Error (%)
Channel X	+ Input	2001.06	0.21	0.01
Channel X	+ Input	200.89	0.00	0.00
Channel X	- Input	-198.61	0.62	-0.31
Channel Y	+ Input	2000.84	-0.01	-0.00
Channel Y	+ Input	199.99	-0.65	-0.32
Channel Y	- Input	-200.22	-0.87	0.44
Channel Z	+ Input	2000.72	0.03	0.00
Channel Z	+ Input	199.54	-1.04	-0.52
Channel Z	- Input	-200.62	-1.20	0.60

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (μV)	Low Range Average Reading (μV)
Channel X	200	3.51	1.53
	- 200	-0.24	-1.92
Channel Y	200	-20.17	-20.84
	- 200	19.65	19.47
Channel Z	200	-17.69	-18.24
	- 200	15.64	15.92

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (μV)	Channel Y (μV)	Channel Z (μV)
Channel X	200	-	2.15	-3.78
Channel Y	200	7.94	-	2.96
Channel Z	200	9.76	5.35	-

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	16021	16044
Channel Y	16227	15939
Channel Z	15849	15529

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec
Input 10M Ω

	Average (μ V)	min. Offset (μ V)	max. Offset (μ V)	Std. Deviation (μ V)
Channel X	0.86	-0.36	2.02	0.44
Channel Y	-1.17	-2.17	0.41	0.44
Channel Z	-0.84	-2.34	1.10	0.59

6. Input Offset Current

Nominal input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)


Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9

Appendix C.3 Calibration certificate for Dipole(S/N 490)

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **SGS Korea (Dymstec)**

Certificate No: **D835V2-490_May16**

CALIBRATION CERTIFICATE

Object **D835V2 - SN:490**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **May 25, 2016**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	06-Apr-16 (No. 217-02288/02289)	Apr-17
Power sensor NRP-Z91	SN: 103244	06-Apr-16 (No. 217-02288)	Apr-17
Power sensor NRP-Z91	SN: 103245	06-Apr-16 (No. 217-02289)	Apr-17
Reference 20 dB Attenuator	SN: 5058 (20k)	05-Apr-16 (No. 217-02292)	Apr-17
Type-N mismatch combination	SN: 5047.2 / 06327	05-Apr-16 (No. 217-02295)	Apr-17
Reference Probe EX3DV4	SN: 7349	31-Dec-15 (No. EX3-7349_Dec15)	Dec-16
DAE4	SN: 601	30-Dec-15 (No. DAE4-601_Dec15)	Dec-16

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (No. 217-02223)	In house check: Oct-16
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Jun-15)	In house check: Oct-16
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-15)	In house check: Oct-16

Calibrated by:	Name Leif Klynsner	Function Laboratory Technician	Signature 
Approved by:	Katja Pokovic	Technical Manager	

Issued: May 26, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: **D835V2-490_May16**

Page 1 of 8

Report File No : F690501/RF-SAR002460

Date of Issue : 2017-04-26

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	41.4 $\pm$ 6 %	0.93 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.38 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.28 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.55 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.08 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	55.2 $\pm$ 6 %	1.02 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.44 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.40 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.59 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	6.17 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	49.7 Ω - 5.3 j Ω
Return Loss	- 25.5 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.5 Ω - 6.7 j Ω
Return Loss	- 22.2 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.379 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	May 19, 2003

DASY5 Validation Report for Head TSL

Date: 25.05.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:490

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 41.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.83, 9.83, 9.83); Calibrated: 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 61.33 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 3.56 W/kg

SAR(1 g) = 2.38 W/kg; SAR(10 g) = 1.55 W/kg

Maximum value of SAR (measured) = 3.14 W/kg



Impedance Measurement Plot for Head TSL

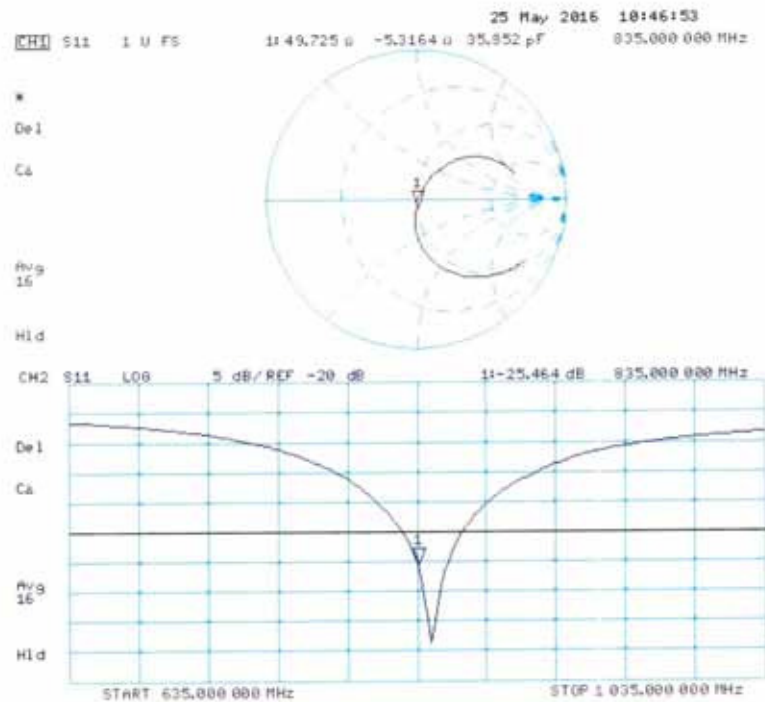

DASY5 Validation Report for Body TSL

Date: 25.05.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:490

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 1.02$ S/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.73, 9.73, 9.73); Calibrated: 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.38 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 3.57 W/kg

SAR(1 g) = 2.44 W/kg; SAR(10 g) = 1.59 W/kg

Maximum value of SAR (measured) = 3.21 W/kg

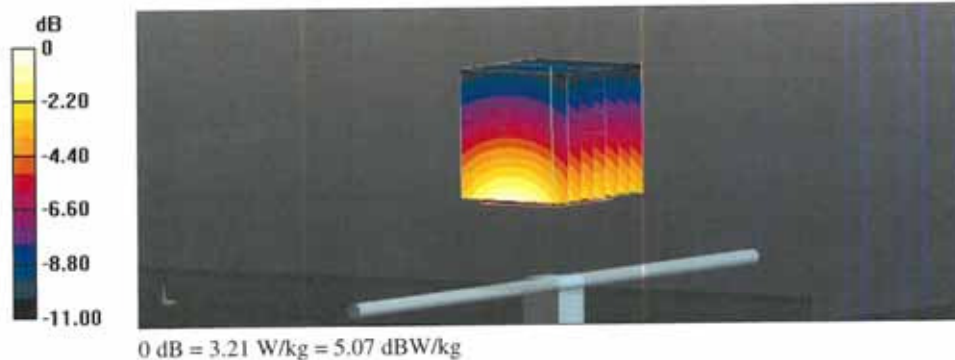

Impedance Measurement Plot for Body TSL

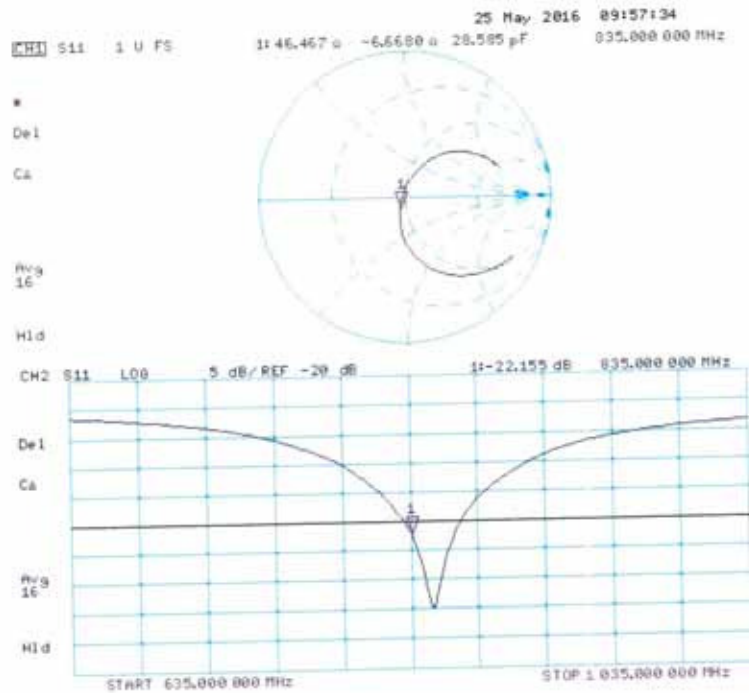

-THE END-