



RF MEASUREMENT REPORT

FCC ID: 2ALJ3AP50X
Applicant: HAN Networks Co., Ltd.
Product: HAN Access Point
Model No.: AP501
Brand Name: HAN NETWORKS, HANNETWORKS
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part 15 Subpart C (Section 15.247)
Result: Complies
Received Date: 2025-09-29
Test Date: 2025-10-09 ~ 2025-11-14

Reviewed By:

Vincent Yu

Vincent Yu

Approved By:

Robin Wu

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report. Testing was performed in accordance with the applicable measurement procedures. The test results reported herein apply only to the specific item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
R25S1009127-U201	V01	Initial Report	2026-09-23	Valid

Note: This report is a copy report based on MRT original report (Report No.: R25S1071098-U201). Only applicant & manufacturer information and product information (name, model and brand name) has changed in this report, others are identical. The test data are all copied from the original report.

CONTENTS

Description	Page
1. General Information	5
1.1. Applicant	5
1.2. Manufacturer	5
1.3. Testing Facility	5
1.4. Product Information	6
1.5. Radio Specification under Test	6
1.6. Working Frequencies	7
1.7. Antenna Details	7
2. Test Configuration	8
2.1. Test Mode	8
2.2. Test System Connection Diagram	9
2.3. Test Software	9
2.4. Applied Standards	9
2.5. Test Environment Condition	10
3. Antenna Requirements	11
4. Measuring Instrument	12
5. Decision Rules and Measurement Uncertainty	13
5.1. Decision Rules	13
5.2. Measurement Uncertainty	13
6. Test Result	14
6.1. Summary	14
6.2. 6 dB Bandwidth Measurement	15
6.2.1. Test Limit	15
6.2.2. Test Procedure	15
6.2.3. Test Setting	15
6.2.4. Test Setup	15
6.2.5. Test Result	15
6.3. Output Power Measurement	16
6.3.1. Test Limit	16
6.3.2. Test Procedure	16
6.3.3. Test Setting	16
6.3.4. Test Setup	16
6.3.5. Test Result	16
6.4. Power Spectral Density Measurement	17
6.4.1. Test Limit	17

6.4.2.	Test Procedure	17
6.4.3.	Test Setting	17
6.4.4.	Test Setup	17
6.4.5.	Test Result	18
6.5.	Conducted Band Edge and Out-of-Band Emissions Measurement	19
6.5.1.	Test Limit	19
6.5.2.	Test Procedure	19
6.5.3.	Test Setting	19
6.5.4.	Test Setup	19
6.5.5.	Test Result	20
6.6.	Radiated Spurious Emissions Measurement.....	21
6.6.1.	Test Limit	21
6.6.2.	Test Procedure	21
6.6.3.	Test Setting	21
6.6.4.	Test Setup	23
6.6.5.	Test Result	24
6.7.	Radiated Restricted Band Edge Measurement	25
6.7.1.	Test Limit	25
6.7.2.	Test Procedure	26
6.7.3.	Test Setting	26
6.7.4.	Test Setup	27
6.7.5.	Test Result	27
6.8.	AC Conducted Emissions Measurement	28
6.8.1.	Test Limit	28
6.8.2.	Test Setup	28
6.8.3.	Test Result	28
Appendix A - Test Result.....		29
A.1	Duty Cycle Test Result	29
A.2	6 dB Bandwidth Test Result	31
A.3	Output Power Test Result	35
A.4	Power Spectral Density Test Result	36
A.5	Conducted Band Edge and Out-of-Band Emissions Test Result	43
A.6	Radiated Spurious Emissions Test Result	68
A.7	Radiated Restricted Band Edge Test Result	76
A.8	AC Conducted Emissions Test Result	140
Appendix B - Test Setup Photograph		148
Appendix C - EUT Photograph		149

1. General Information

1.1. Applicant

HAN Networks Co., Ltd.

101, 3rd Floor, Building 3, No.9 Compound, Yongfeng Road, Haidian District, Beijing, P.R. China

1.2. Manufacturer

HAN Networks Co., Ltd.

101, 3rd Floor, Building 3, No.9 Compound, Yongfeng Road, Haidian District, Beijing, P.R. China

1.3. Testing Facility

Test Site - MRT Suzhou Laboratory	
☐ Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China	
☐ Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China	
☒ Laboratory Location (Suzhou - Wujiang) Building 1, No.1 Xingdong Road, Wujiang, Suzhou, Jiangsu, People's Republic of China	
Laboratory Accreditations	
A2LA: 3628.01	CNAS: L10551
FCC: CN1166	ISED: CN0001

1.4. Product Information

Product Name	HAN Access Point
Model No.	AP501
EUT Identification No.	20250929Sample#02 (Conducted) 20250929Sample#01 (Radiated)
Wi-Fi Specification	802.11a/b/g/n/ac/ax/be
Antenna Information	Refer to section 1.7
Operating Temperature	0 ~ 50 °C
Power Type	AC/DC Adapter or PoE Injector
Accessory(ies)	
AC/DC Adapter	Model: ADP-50GR B Input: 100 - 240 V ~ 1.3 A, 50/60 Hz Output: 48 VDC, 1.042 A, 50.1 W
PoE Injector	Model: POE60U-1BT-X (ALE P/N: POE60U-1BT-X-R) Input: 100 - 240 V ~ 1.5 A, 50/60 Hz, 98 - 104 VA Output: 56 VDC, 0.535 A, 30.0 W
Notes:	
1. The information of the EUT (Equipment Under Test) was provided by the manufacturer. The accuracy, completeness, and validity of the information are solely the responsibility of the manufacturer.	
2. For this report, we select AC Adapter for testing.	
3. AC/DC Adapter and PoE Injector are not marketed in conjunction with the device.	

1.5. Radio Specification under Test

Frequency Range	2400 ~ 2483.5 MHz	
Channel Number	802.11b/g/n-HT20/ax-HE20/be-EHT20: 11 802.11n-HT40/ax-HE40/be-EHT40: 7	
Modulation Technology	802.11b: DSSS 802.11g/n: OFDM 802.11ax/be: OFDMA	
Data Rate	802.11b: 1/2/5.5/11 Mbps 802.11g: 6/9/12/18/24/36/48/54 Mbps 802.11n: up to 300 Mbps 802.11ax: up to 573.6 Mbps 802.11be: up to 688 Mbps	
Channel Puncturing Function	☐ Supported	☒ Unsupported
Support RU	☒ Full RU	☐ Partial RU

1.6. Working Frequencies

802.11b/g/n-HT20/ax-HE20/be-EHT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--

802.11n-HT40/ax-HE40/be-EHT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
03	2422 MHz	04	2427 MHz	05	2432 MHz
06	2437 MHz	07	2442 MHz	08	2447 MHz
09	2452 MHz	--	--	--	--

1.7. Antenna Details

Antenna Type	Frequency Band (MHz)	Tx Path	Directional Gain (dBi)	
			Uncorrelated	Correlated
Wi-Fi Antennas				
Dipole	2400 ~ 2483.5	2	4.00	6.85
	5150 ~ 5350	2	3.75	3.75
	5470 ~ 5725	2	4.21	4.21
	5725 ~ 5850	2	3.90	3.90
	5925 ~ 6425	2	3.21	6.22
	6425 ~ 6525	2	4.24	6.88
	6525 ~ 6875	2	4.24	6.88
	6875 ~ 7125	2	3.95	6.87

Notes:

1. The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.
2. The EUT also supports Beamforming mode for 802.11n/ac/ax/be, not include 802.11a/b/g.
3. For beamforming operation, the software automatically backs power down based on CDD power.
4. All antenna information is provided by the manufacturer.
5. Uncorrelated Directional Gain is for EIRP calculation, and Correlated Directional Gain is for PSD calculation


2. Test Configuration

2.1. Test Mode

CDD Mode
Mode 1: Transmit by 802.11b (1 Mbps)
Mode 2: Transmit by 802.11g (6 Mbps)
Mode 3: Transmit by 802.11n-HT20 (MCS0)
Mode 4: Transmit by 802.11n-HT40 (MCS0)
Mode 5: Transmit by 802.11ax-HE20 (MCS0)
Mode 6: Transmit by 802.11ax-HE40 (MCS0)
Mode 7: Transmit by 802.11be-EHT20 (MCS0)
Mode 8: Transmit by 802.11be-EHT40 (MCS0)
Note 1: All modes of operation and data rates were investigated, so all RF test requirements shall be executed at the worst data rate which power is the greatest. Note 2: For Beamforming operation, the manufacturer automatically reduces power based on a factor calculated as the difference between the Beamforming directional gain and the CDD directional power gain. Thus, only the CDD mode was evaluated in this report. Note 3: 802.11ax and 802.11be have same modulation type and same power parameter declared by the manufacturer, and we have verified that the same power parameter, the power of 802.11ax is slightly less than the power of 802.11be, so all tests were performed based on 802.11be in this report.

2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10-2020 was used to reference the appropriate EUT setup for radiated emissions testing and AC conducted emissions testing.

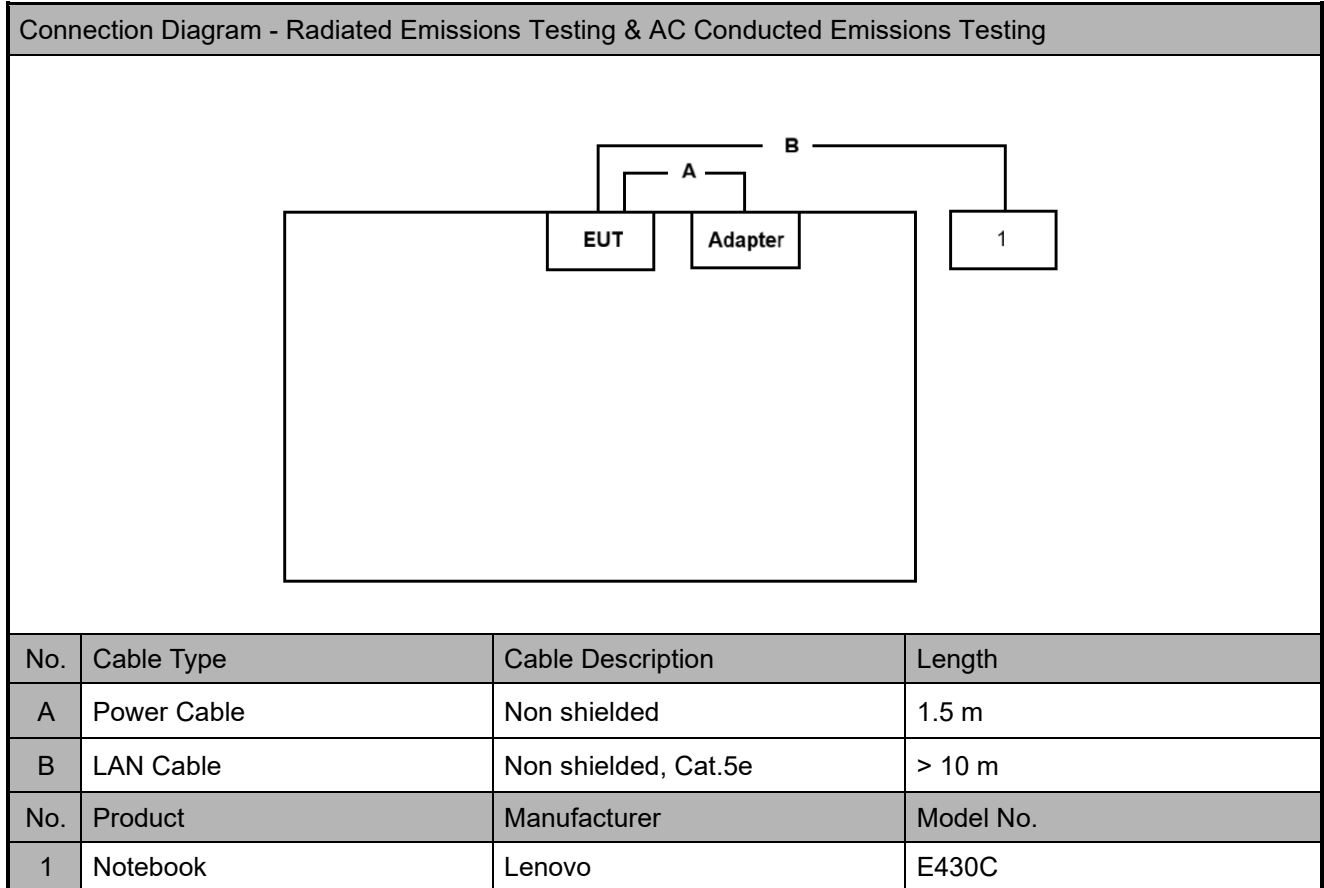

2.3. Test Software

The test utility software used during testing was “QSPR” and the version was “V 5.0-00202”.

2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.247
- KDB 558074 D01 v05r02
- KDB 662911 D01 v02r01
- ANSI C63.10-2020
- ANSI C63.10-2020/Cor1-2023
- ANSI C63.10a-2024

2.5. Test Environment Condition

Ambient Temperature	15 ~ 35 °C
Relative Humidity	20 ~ 75%RH

3. Antenna Requirements

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Active Loop Antenna	Schwarzbeck	FMZB 1519-60 D	MRTSUE07076	1 year	2025-11-19	WJ-AC1
EMI Test Receiver	R&S	ESR3	MRTSUE07110	1 year	2026-04-19	WJ-AC1
TRILOG Broad Band Antenna	Schwarzbeck	VULB 9163	MRTSUE07099	1 year	2026-04-22	WJ-AC1
EMI Test Receiver	R&S	ESR3	MRTSUE07110	1 year	2026-04-19	WJ-AC1
Anechoic Chamber	TDK	WJ-AC1	MRTSUE07115	1 year	2026-07-09	WJ-AC1
Thermohygrometer	testo	608-H1	MRTSUE11333	1 year	2026-06-16	WJ-AC1
Thermohygrometer	testo	608-H1	MRTSUE11402	1 year	2025-12-01	WJ-AC1
Horn Antenna	RFSPIN	DRH18-E	MRTSUE07105	1 year	2026-05-12	WJ-AC2
Preamplifier	EMCI	EMC118A45SE	MRTSUE07102	1 year	2026-04-09	WJ-AC2
Signal Analyzer	Keysight	N9010B	MRTSUE07285	1 year	2026-02-18	WJ-AC2
Broadband Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE07100	1 year	2026-04-10	WJ-AC2
Preamplifier	EMCI	EMC184045SE	MRTSUE07103	1 year	2026-04-09	WJ-AC2
Signal Analyzer	Keysight	N9010B	MRTSUE07285	1 year	2026-02-18	WJ-AC2
Anechoic Chamber	TDK	WJ-AC2	MRTSUE07117	1 year	2026-05-12	WJ-AC2
Thermohygrometer	testo	608-H1	MRTSUE11315	1 year	2026-06-16	WJ-AC2
Thermohygrometer	testo	608-H1	MRTSUE11332	1 year	2026-06-05	WJ-AC2
EMI Test Receiver	R&S	ESR3	MRTSUE07110	1 year	2026-04-19	WJ-SR5
Two-Line V-Network	R&S	ENV216	MRTSUE07202	1 year	2026-05-26	WJ-SR5
Impedance Stabilization Network	Schwarzbeck	CAT5 8158	MRTSUE07183	1 year	2026-05-19	WJ-SR5
EMC Cable	HUBER+SUHNER	RG 233/U	MRTSUE11310	1 year	2026-05-24	WJ-SR5
Shielding Room	TDK	WJ-SR5	MRTSUE07127	N/A	N/A	WJ-SR5
Thermohygrometer	R&S	608-H1	MRTSUE11317	1 year	2026-06-05	WJ-SR5
USB Power Sensor	Keysight	U2021XA	MRTSUE07142	1 year	2026-03-24	WJ-SR9
EXA Signal Analyzer	Keysight	N9010B	MRTSUE07148	1 year	2026-04-26	WJ-SR9
Thermohygrometer	testo	608-H1	MRTSUE11335	1 year	2026-06-16	WJ-SR9
Shielding Room	TDK	WJ-SR9	MRTSUE07131	N/A	N/A	WJ-SR9
Fixed Attenuator	MVE	MVE2213	MRTSUE07319	1 year	2026-06-24	WJ-SR9
Cable	UCwave	UCE500	MRTSUE07338	Note	Note	WJ-SR9

Note: The loss of the RF cable will be measured before testing.

Software	Version	Function
e3	230711	RE & CE
CONTROLLER CO3000	V 1.03.02	RE Antenna & Turntable
Agilent Power Panel	V 3.9	Power

5. Decision Rules and Measurement Uncertainty

5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2.

(Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement	
The maximum measurement uncertainty is evaluated as:	
9 kHz ~ 150 kHz:	3.58 dB
150 kHz ~ 30 MHz:	3.20 dB
Radiated Emission Measurement	
The maximum measurement uncertainty is evaluated as:	
Coaxial:	9 kHz ~ 30 MHz: 2.35 dB
Coplanar:	9 kHz ~ 30 MHz: 2.37 dB
Horizontal:	30 MHz ~ 200 MHz: 3.47 dB
	200 MHz ~ 1 GHz: 4.17 dB
	1 GHz ~ 40 GHz: 4.97 dB
Vertical:	30 MHz ~ 200 MHz: 4.07 dB
	200 MHz ~ 1 GHz: 5.28 dB
	1 GHz ~ 40 GHz: 4.84 dB
Spurious Emissions, Conducted	
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$): 2.5 dB	
Output Power	
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$): 1.5 dB	
Power Spectrum Density	
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$): 2.5 dB	
Occupied Bandwidth	
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$): 3.2%	

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.247(a)(2)	6 dB Bandwidth	Conducted	Pass
15.247(b)(3)	Output Power		Pass
15.247(e)	Power Spectral Density		Pass
15.247(d)	Band Edge / Out-of-Band Emissions		Pass
15.205 15.209	General Field Strength (Restricted Bands and Radiated Emissions)	Radiated	Pass
15.207	AC Conducted Emissions 150 kHz ~ 30 MHz	Line Conducted	Pass

Notes:

1. The analyzer plots shown in this section were captured using a correction table to account for cable and attenuator losses in the system connecting the EUT to the analyzer across relevant frequencies.
2. For radiated emission tests, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.

6.2. 6 dB Bandwidth Measurement

6.2.1. Test Limit

The minimum 6 dB bandwidth shall be at least 500 kHz.


6.2.2. Test Procedure

ANSI C63.10-2020 - Section 11.8

6.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6 dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1% to 5% of the OBW, but not less than 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace to stabilize

6.2.4. Test Setup

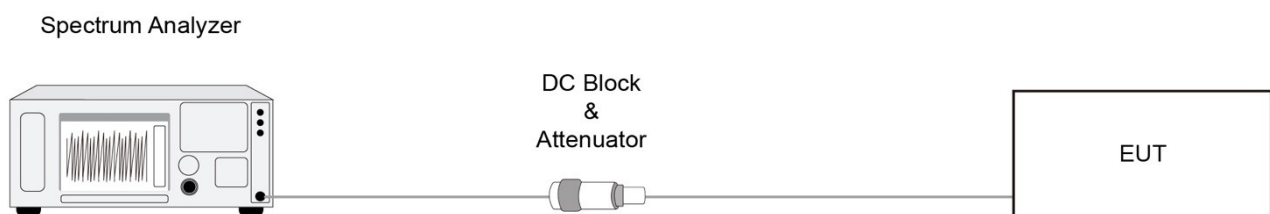

6.2.5. Test Result

Refer to Appendix A.2.

6.3. Output Power Measurement

6.3.1. Test Limit

The maximum output power shall be less 1 Watt (30 dBm).

The conducted output power limit specified in paragraph FCC Part 15.247(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs FCC Part 15.247(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.3.2. Test Procedure


ANSI C63.10-2020 - Section 11.9.2.3.2

6.3.3. Test Setting

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

6.3.4. Test Setup

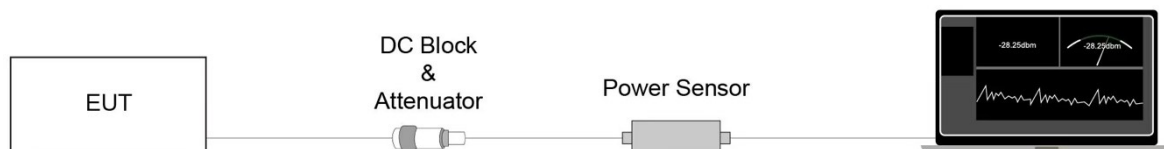

6.3.5. Test Result

Refer to Appendix A.3.

6.4. Power Spectral Density Measurement

6.4.1. Test Limit

The maximum permissible power spectral density is 8 dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.

6.4.2. Test Procedure


ANSI C63.10-2020 - Section 11.10.5

6.4.3. Test Setting

1. Measure the duty cycle (x) of the transmitter output signal
2. Set instrument center frequency to DTS channel center frequency
3. Span > 1.5 times the OBW
4. RBW = 10 kHz
5. VBW $\geq 3 \times$ RBW
6. Detector = RMS
7. Ensure that the number of measurement points in the sweep $\geq 2 \times$ Span/RBW
8. Sweep time = Auto couple
9. Don't use sweep triggering; Allow sweep to "free run".
10. Employ trace averaging (RMS) mode over a minimum of 100 traces
11. Use the peak marker function to determine the maximum amplitude level
12. If duty cycle < 98%, add $10\log(1/x)$, where x is the duty cycle measured in step 1, to the measured PSD to compute the average PSD during the actual transmission time. If duty cycle $\geq 98\%$, no need to add $10\log(1/x)$.
13. If measured value exceeds requirement specified by regulatory agency, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

6.4.4. Test Setup

Spectrum Analyzer

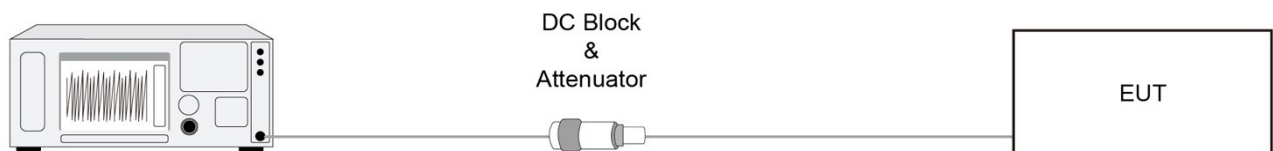

6.4.5. Test Result

Refer to Appendix A.4.

6.5. Conducted Band Edge and Out-of-Band Emissions Measurement

6.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 30 dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

6.5.2. Test Procedure

ANSI C63.10-2020 - Section 11.11

6.5.3. Test Setting

Reference level measurement


1. Set instrument center frequency to DTS channel center frequency
2. Span ≥ 1.5 times the DTS bandwidth
3. RBW = 100 kHz
4. VBW $\geq 3 \times$ RBW
5. Detector = Peak
6. Sweep time = Auto couple
7. Trace mode = Max hold
8. Allow trace to fully stabilize

Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep time = Auto couple
7. The trace was allowed to stabilize

6.5.4. Test Setup

Spectrum Analyzer

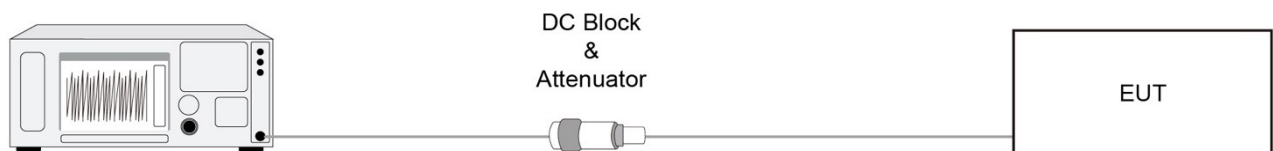

6.5.5. Test Result

Refer to Appendix A.5.

6.6. Radiated Spurious Emissions Measurement

6.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.6.2. Test Procedure

ANSI C63.10-2020 - Section 11.11 & 11.12

ANSI C63.10-2020 - Section 6.3 (General Requirements)

ANSI C63.10-2020 - Section 6.4 (Standard test method below 30 MHz)

ANSI C63.10-2020 - Section 6.5 (Standard test method above 30 MHz to 1 GHz)

ANSI C63.10-2020 - Section 6.6 (Standard test method above 1 GHz)

6.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Quasi-Peak Measurements below 1 GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1 MHz
3. RBW = as specified in Table 1
4. $VBW \geq 3 \times RBW$
5. Detector = CISPR quasi-peak
6. Sweep time = Auto couple
7. Trace was allowed to stabilize

Peak Measurements above 1 GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

Average Measurements above 1 GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW; if the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz
If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.
4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

6.6.4. Test Setup


Below 30 MHz Test Setup:

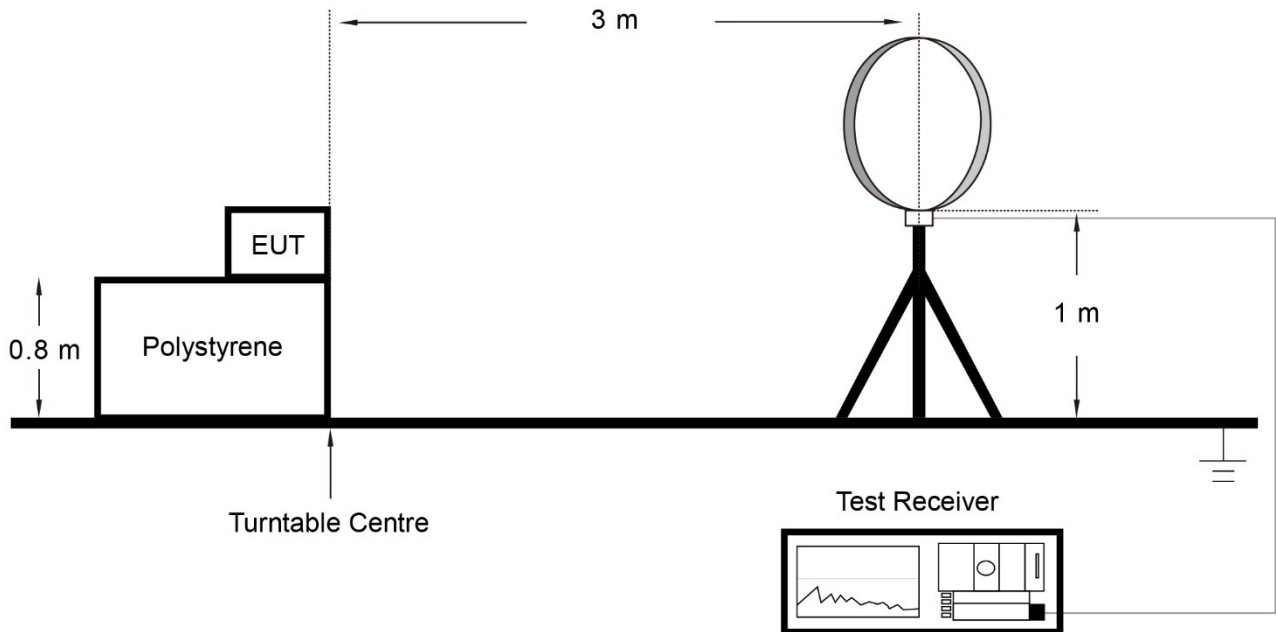

Below 1 GHz Test Setup:

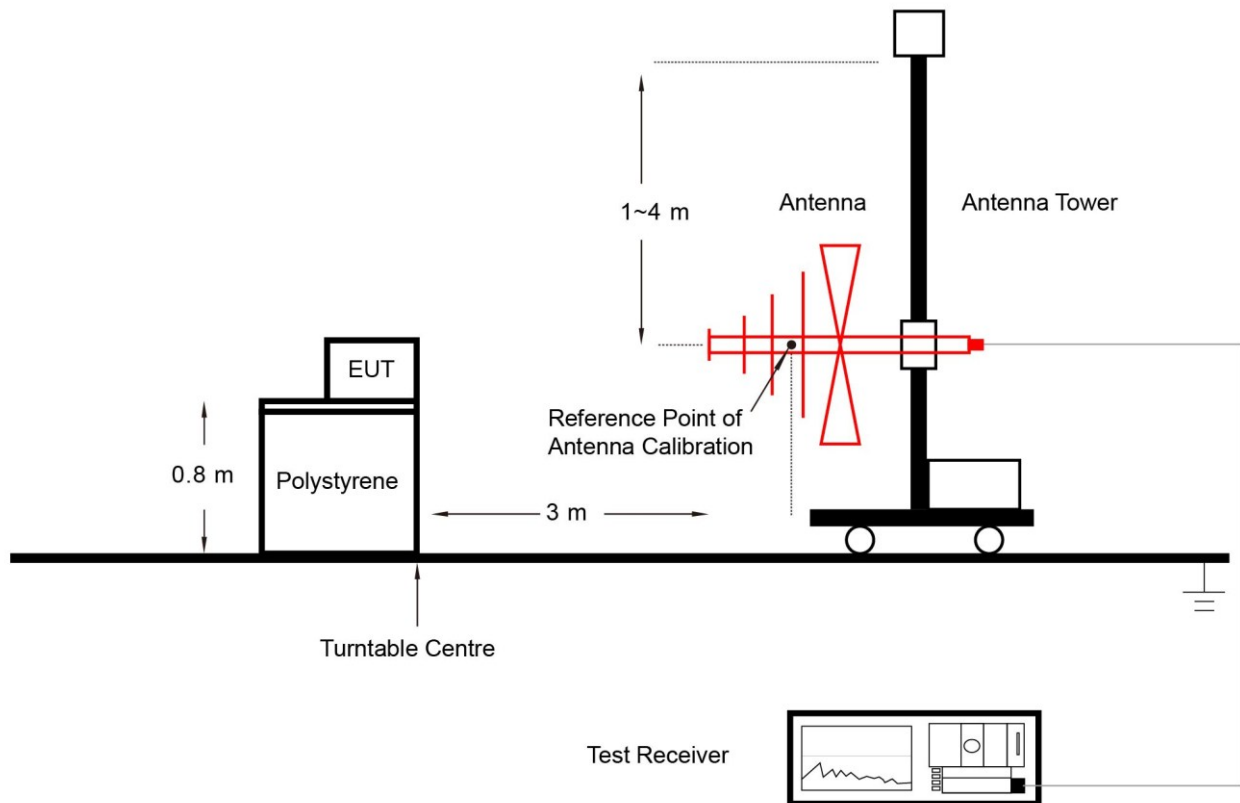

Above 1 GHz Test Setup:

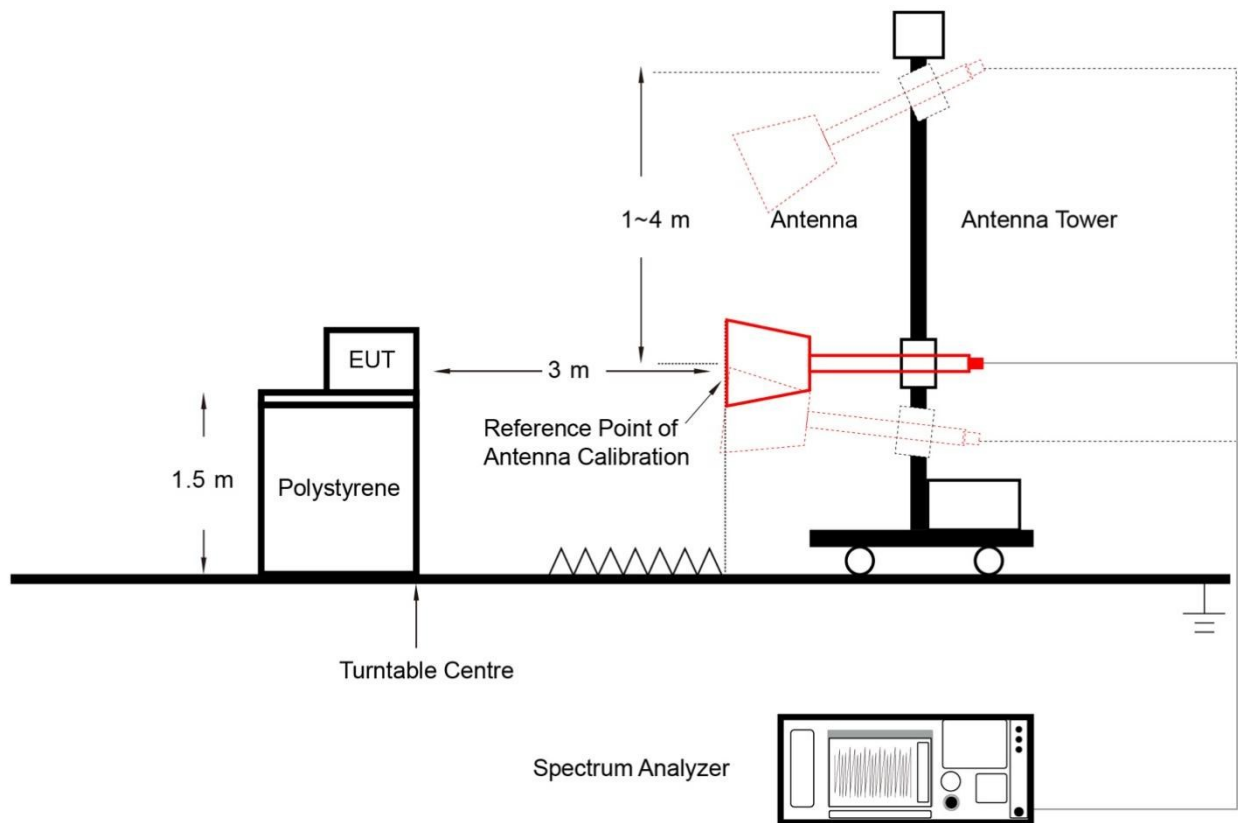

6.6.5. Test Result

Refer to Appendix A.6.

6.7. Radiated Restricted Band Edge Measurement

6.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.7.2. Test Procedure

ANSI C63.10-2020 - Section 6.3 & 6.6 & 11.12

6.7.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize


Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.

If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.

4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

6.7.4. Test Setup

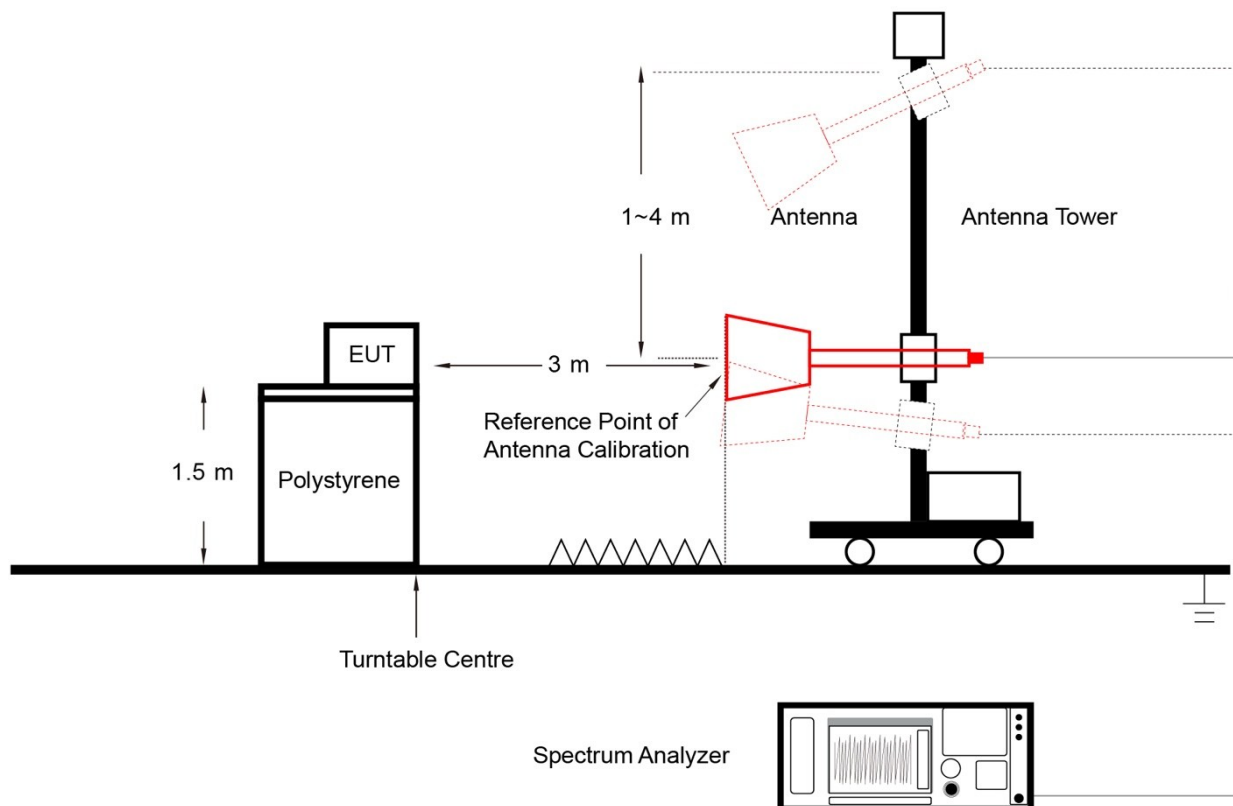

6.7.5. Test Result

Refer to Appendix A.7.

6.8. AC Conducted Emissions Measurement


6.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

6.8.2. Test Setup

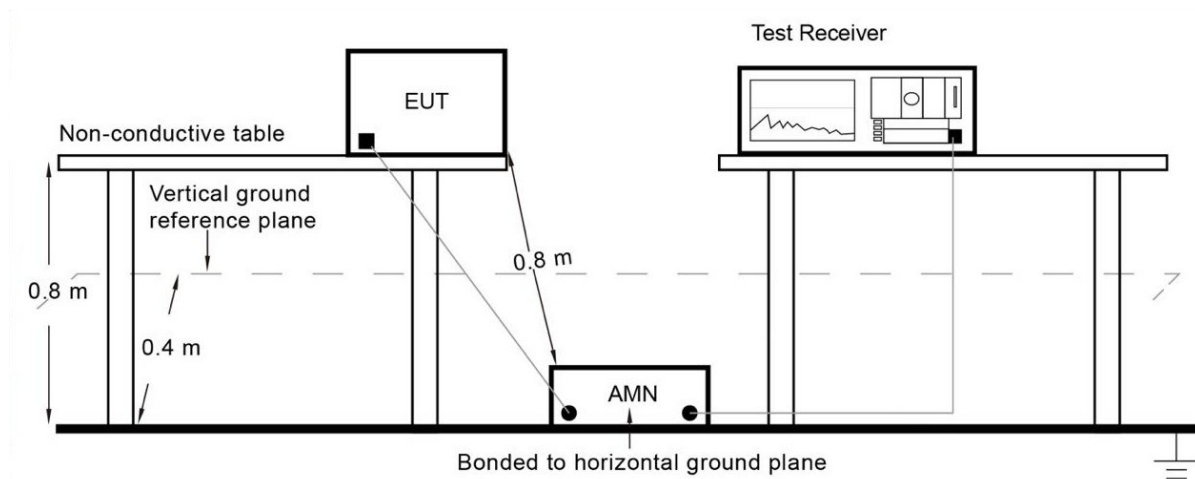

6.8.3. Test Result


Refer to Appendix A.8.

Appendix A - Test Result

A.1 Duty Cycle Test Result


Test Site	WJ-SR9	Test Engineer	Simon Lu
Test Date	2025-10-15		

Test Mode	Duty Cycle
802.11b	98.10%
802.11g	99.20%
802.11n-HT20	98.74%
802.11n-HT40	98.92%
802.11be-EHT20	99.65%
802.11be-EHT40	98.76%

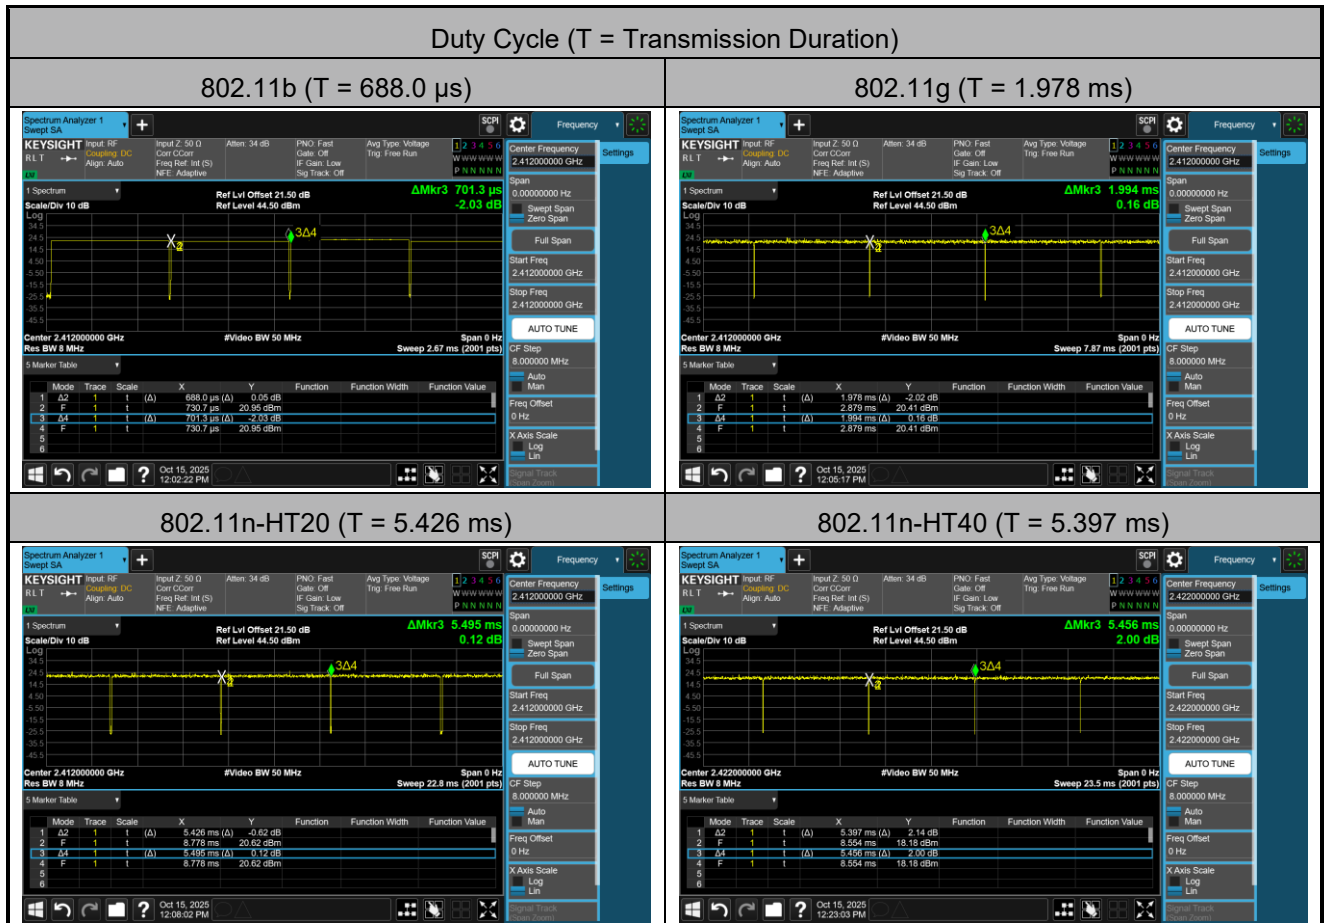


Duty Cycle (T = Transmission Duration)

802.11be-EHT20 (T = 5.451 ms)

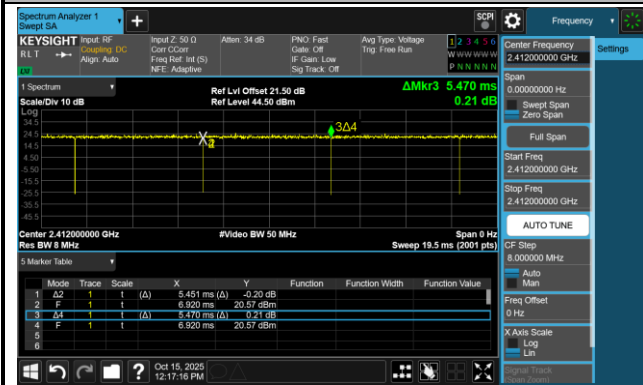

802.11be-EHT40 (T = 5.402 ms)

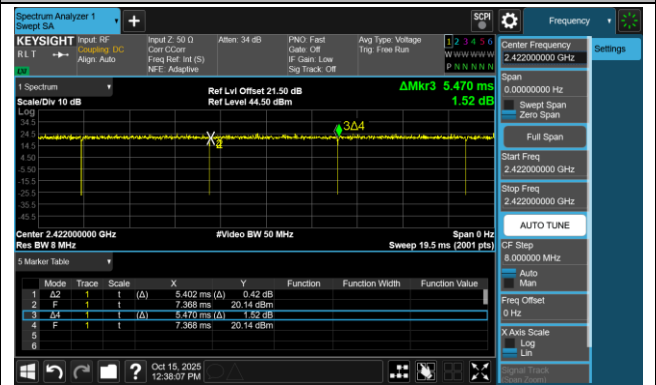


A.2 6 dB Bandwidth Test Result

Test Site	WJ-SR9	Test Engineer	Simon Lu
Test Date	2025-10-21		

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
11b	1 Mbps	01	2412	7.134	≥ 0.5
11b	1 Mbps	06	2437	7.124	≥ 0.5
11b	1 Mbps	11	2462	7.120	≥ 0.5
11g	6 Mbps	01	2412	15.34	≥ 0.5
11g	6 Mbps	06	2437	15.31	≥ 0.5
11g	6 Mbps	11	2462	15.32	≥ 0.5
11n-HT20	MCS0	01	2412	15.54	≥ 0.5
11n-HT20	MCS0	06	2437	15.55	≥ 0.5
11n-HT20	MCS0	11	2462	15.73	≥ 0.5
11n-HT40	MCS0	03	2422	34.69	≥ 0.5
11n-HT40	MCS0	06	2437	33.99	≥ 0.5
11n-HT40	MCS0	09	2452	35.70	≥ 0.5
11be-EHT20	MCS0	01	2412	18.89	≥ 0.5
11be-EHT20	MCS0	06	2437	17.42	≥ 0.5
11be-EHT20	MCS0	11	2462	14.62	≥ 0.5
11be-EHT40	MCS0	03	2422	38.29	≥ 0.5
11be-EHT40	MCS0	06	2437	38.17	≥ 0.5
11be-EHT40	MCS0	09	2452	38.35	≥ 0.5

802.11b 6 dB Bandwidth


Channel 01 (2412 MHz)

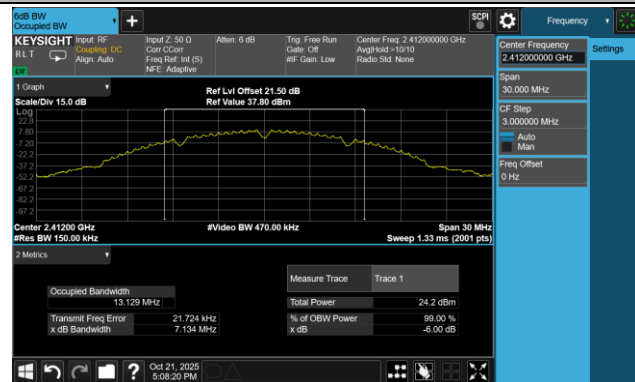

Channel 06 (2437 MHz)




Channel 11 (2462 MHz)

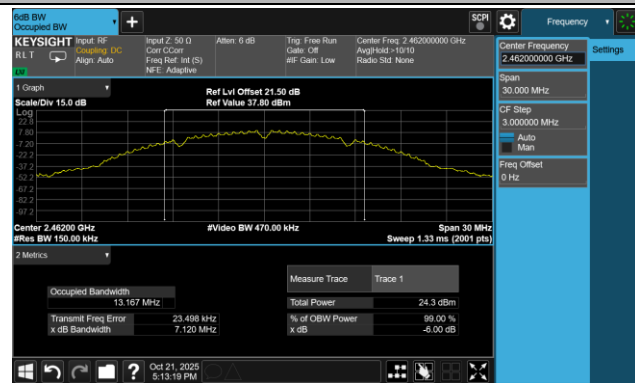

802.11g 6 dB Bandwidth


Channel 01 (2412 MHz)

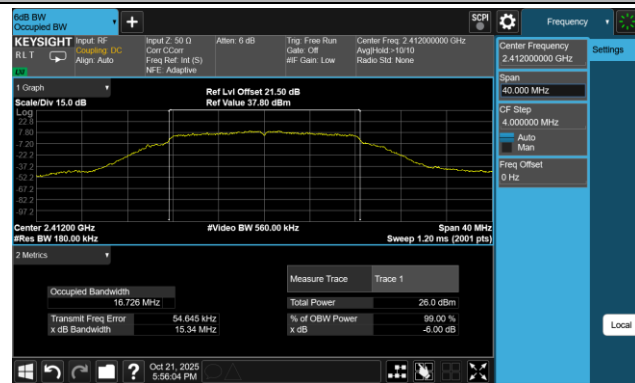

Channel 06 (2437 MHz)




Channel 11 (2462 MHz)

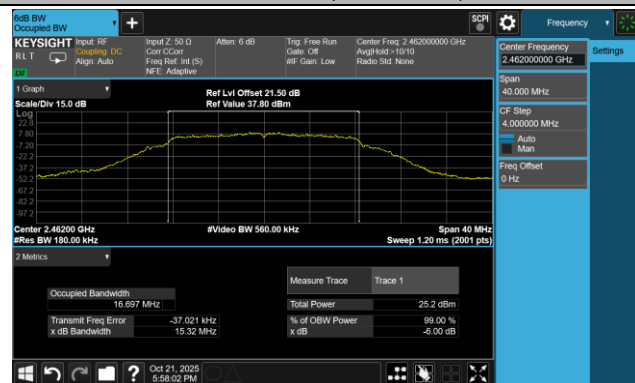

802.11n-HT20 6 dB Bandwidth

Channel 01 (2412 MHz)

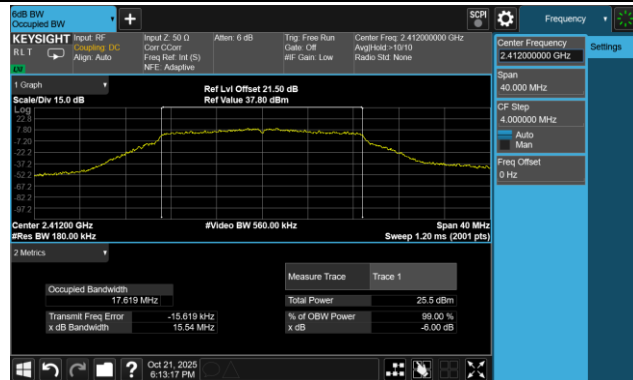

Channel 06 (2437 MHz)



Channel 11 (2462 MHz)




802.11n-HT40 6 dB Bandwidth

Channel 03 (2422 MHz)



Channel 06 (2437 MHz)

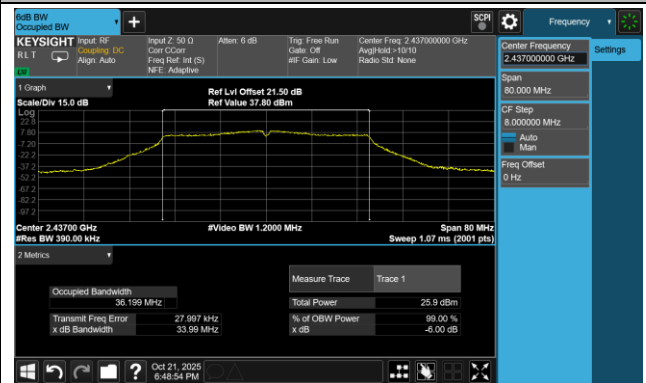

Channel 09 (2452 MHz)



802.1be-EHT20 6 dB Bandwidth

Channel 01 (2412 MHz)



Channel 06 (2437 MHz)




Channel 11 (2462 MHz)




802.11be-EHT40 6 dB Bandwidth


Channel 03 (2422 MHz)

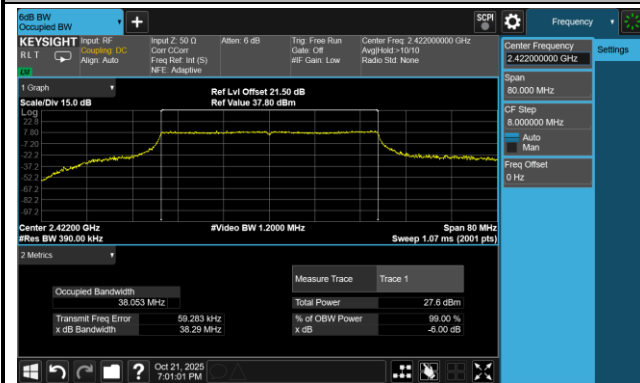

Channel 06 (2437 MHz)

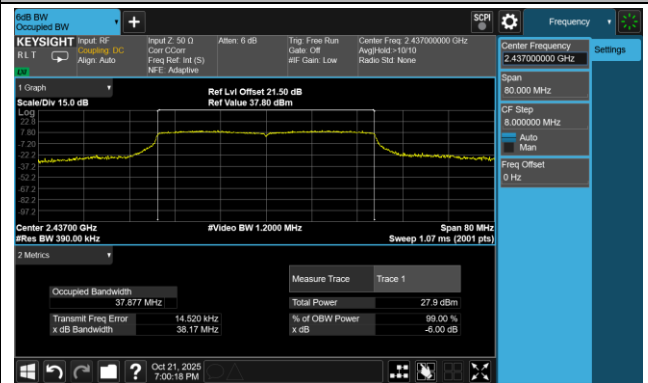

Channel 09 (2452 MHz)

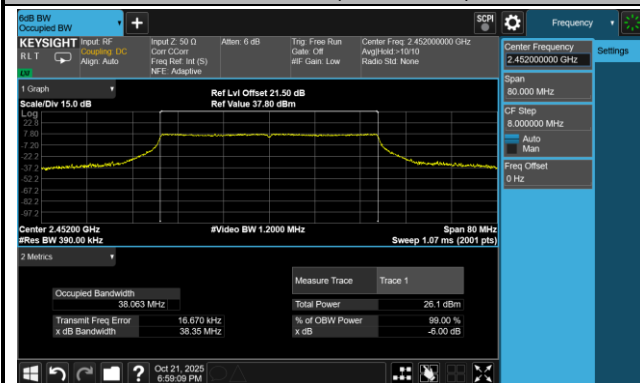

A.3 Output Power Test Result

Test Site	WJ-SR9	Test Engineer	Simon Lu
Test Date	2025-10-09 ~ 2025-10-16		

Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Average Power (dBm)	Limit (dBm)
				Ant 0	Ant 1		
11b	1 Mbps	01	2412	17.71	17.84	20.79	≤ 30.00
11b	1 Mbps	06	2437	17.91	18.02	20.98	≤ 30.00
11b	1 Mbps	11	2462	17.88	17.84	20.87	≤ 30.00
11g	6 Mbps	01	2412	17.95	17.94	20.96	≤ 30.00
11g	6 Mbps	06	2437	17.60	17.74	20.68	≤ 30.00
11g	6 Mbps	11	2462	17.63	17.68	20.67	≤ 30.00
11n-HT20	MCS0	01	2412	17.59	18.51	21.08	≤ 30.00
11n-HT20	MCS0	06	2437	17.73	18.59	21.19	≤ 30.00
11n-HT20	MCS0	11	2462	17.77	18.31	21.06	≤ 30.00
11n-HT40	MCS0	03	2422	18.40	18.66	21.54	≤ 30.00
11n-HT40	MCS0	06	2437	17.70	18.27	21.00	≤ 30.00
11n-HT40	MCS0	09	2452	16.84	16.12	19.51	≤ 30.00
11ax-HE20	MCS0	01	2412	18.01	17.47	20.76	≤ 30.00
11ax-HE20	MCS0	06	2437	18.31	17.68	21.02	≤ 30.00
11ax-HE20	MCS0	11	2462	18.41	17.54	21.01	≤ 30.00
11ax-HE40	MCS0	03	2422	18.25	18.09	21.18	≤ 30.00
11ax-HE40	MCS0	06	2437	17.97	18.46	21.23	≤ 30.00
11ax-HE40	MCS0	09	2452	16.45	15.65	19.08	≤ 30.00
11be-EHT20	MCS0	01	2412	17.51	18.39	20.98	≤ 30.00
11be-EHT20	MCS0	06	2437	18.35	17.71	21.05	≤ 30.00
11be-EHT20	MCS0	11	2462	18.36	17.95	21.17	≤ 30.00
11be-EHT40	MCS0	03	2422	18.33	18.02	21.19	≤ 30.00
11be-EHT40	MCS0	06	2437	17.90	18.56	21.25	≤ 30.00
11be-EHT40	MCS0	09	2452	16.74	15.94	19.37	≤ 30.00

Note: Total Average Power (dBm) = $10 \times \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$ (dBm).

A.4 Power Spectral Density Test Result

Test Site	WJ-SR9	Test Engineer	Simon Lu
Test Date	2025-10-16 ~ 2025-11-14		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	PSD (dBm/10 kHz)		Duty Cycle (%)	10×log (1/x)	Total PSD (dBm/10 kHz)	Limit (dBm/3 kHz)
				Ant 0	Ant 1				
11b	1 Mbps	01	2412	-7.025	-7.569	98.10	0.08	-4.28	≤ 8.00
11b	1 Mbps	06	2437	-7.467	-6.196	98.10	0.08	-3.77	≤ 8.00
11b	1 Mbps	11	2462	-7.584	-6.286	98.10	0.08	-3.88	≤ 8.00
11g	6 Mbps	01	2412	-8.234	-9.357	99.20	0.03	-5.75	≤ 8.00
11g	6 Mbps	06	2437	-8.529	-9.945	99.20	0.03	-6.17	≤ 8.00
11g	6 Mbps	11	2462	-8.721	-9.388	99.20	0.03	-6.03	≤ 8.00
11n-HT20	MCS0	01	2412	-8.746	-10.414	98.74	0.06	-6.49	≤ 8.00
11n-HT20	MCS0	06	2437	-10.055	-7.625	98.74	0.06	-5.66	≤ 8.00
11n-HT20	MCS0	11	2462	-10.099	-7.897	98.74	0.06	-5.85	≤ 8.00
11n-HT40	MCS0	03	2422	-13.059	-10.806	98.92	0.05	-8.78	≤ 8.00
11n-HT40	MCS0	06	2437	-12.856	-11.505	98.92	0.05	-9.12	≤ 8.00
11n-HT40	MCS0	09	2452	-13.009	-14.760	98.92	0.05	-10.79	≤ 8.00
11be-EHT20	MCS0	01	2412	-11.650	-9.176	99.65	0.02	-7.23	≤ 8.00
11be-EHT20	MCS0	06	2437	-9.763	-11.513	99.65	0.02	-7.54	≤ 8.00
11be-EHT20	MCS0	11	2462	-11.509	-9.304	99.65	0.02	-7.26	≤ 8.00
11be-EHT40	MCS0	03	2422	-14.030	-12.221	98.76	0.05	-10.02	≤ 8.00
11be-EHT40	MCS0	06	2437	-12.554	-14.344	98.76	0.05	-10.35	≤ 8.00
11be-EHT40	MCS0	09	2452	-15.111	-13.788	98.76	0.05	-11.39	≤ 8.00

Note:

Duty Cycle ≥ 98%, Total PSD (dBm/10 kHz) = $10 \times \log\{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\}$ (dBm/10 kHz).

Duty Cycle < 98%, Total PSD (dBm/10 kHz) = $10 \times \log\{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\}$ (dBm/10 kHz) + $10 \times \log(1/\text{Duty Cycle})$.

802.11b - AVGPDS - Ant 0


Channel 01 (2412 MHz)



Channel 06 (2437 MHz)




Channel 11 (2462 MHz)

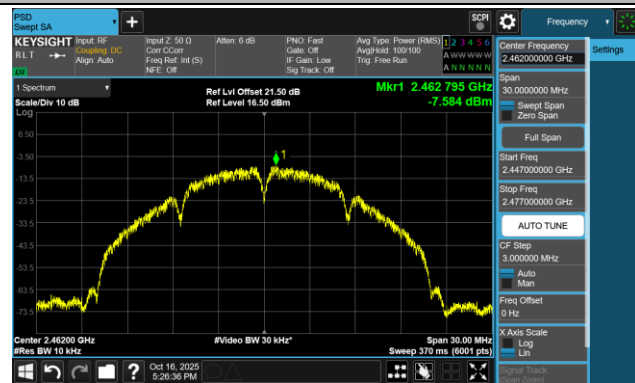


802.11g - AVGPDS - Ant 0


Channel 01 (2412 MHz)

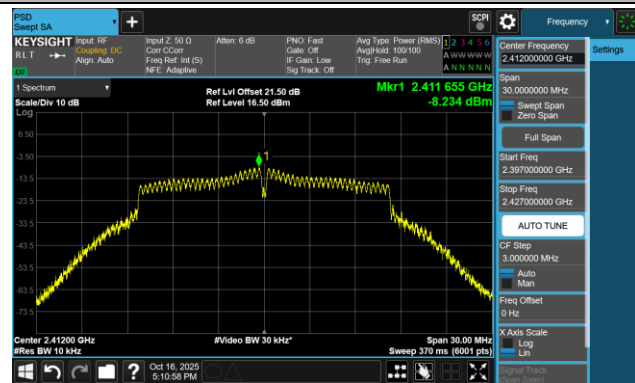

Channel 06 (2437 MHz)

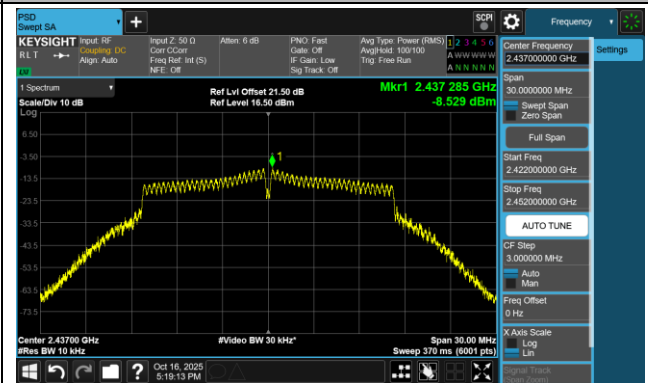


Channel 11 (2462 MHz)

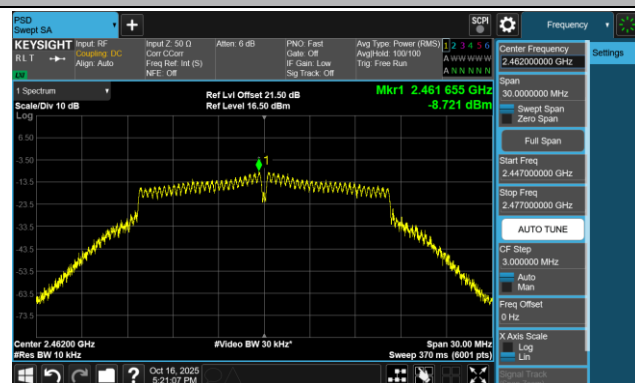


802.11n-HT20 - AVGPDS - Ant 0


Channel 01 (2412 MHz)

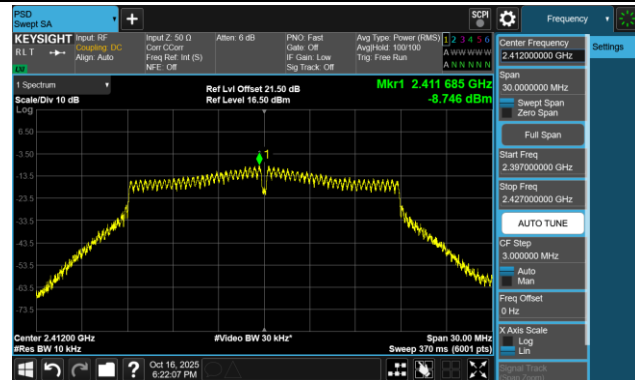

Channel 06 (2437 MHz)

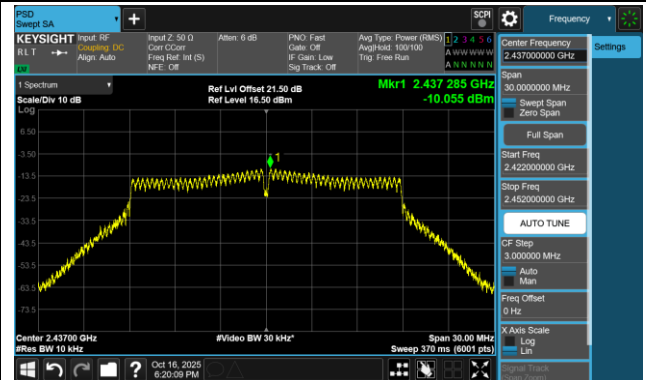


Channel 11 (2462 MHz)

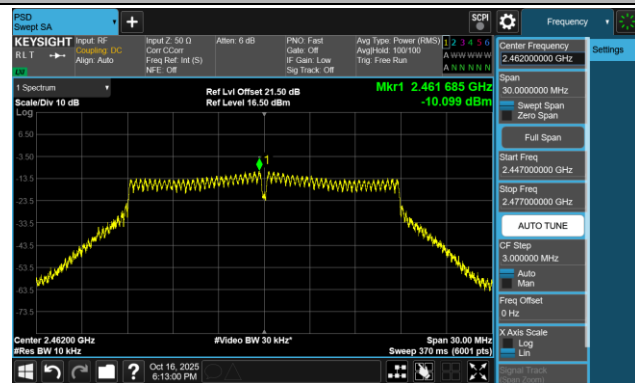


802.11n-HT40 - AVGPDS - Ant 0


Channel 03 (2422 MHz)

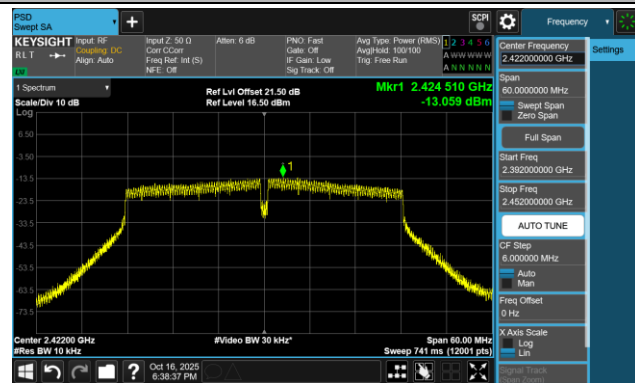

Channel 06 (2437 MHz)

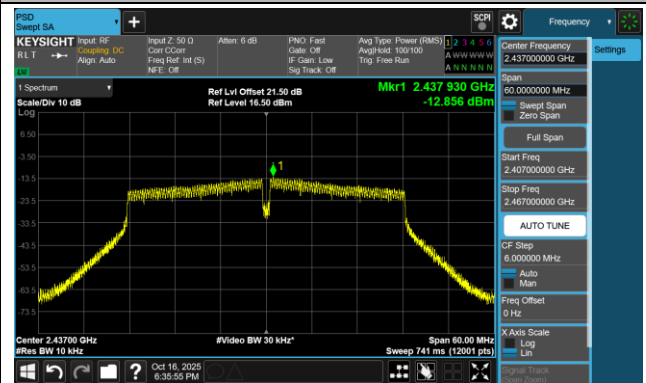


Channel 09 (2452 MHz)

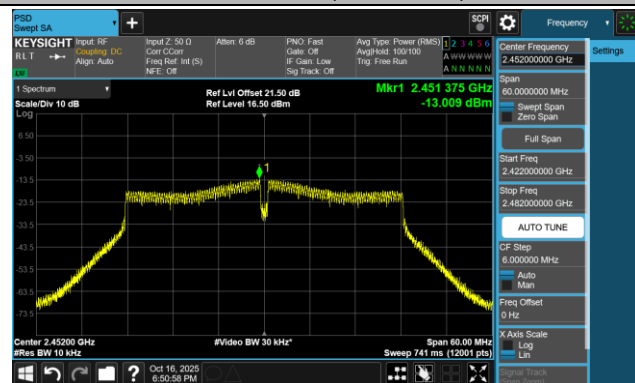


802.11be-EHT20 - AVGPSPD - Ant 0


Channel 01 (2412 MHz)

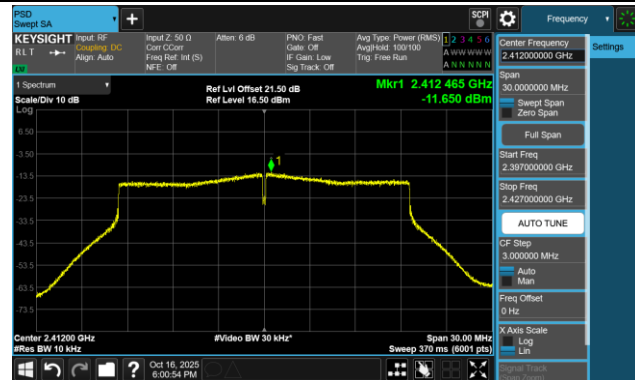

Channel 06 (2437 MHz)

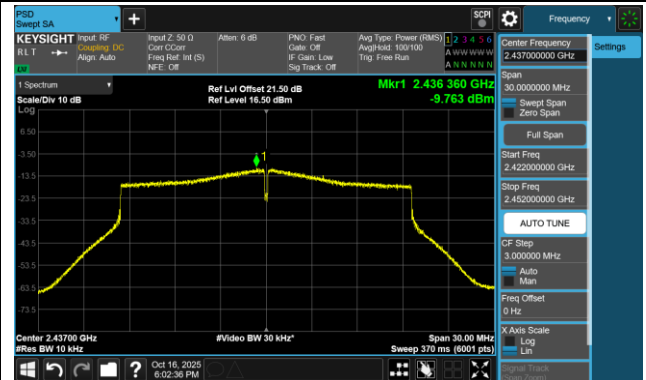


Channel 11 (2462 MHz)

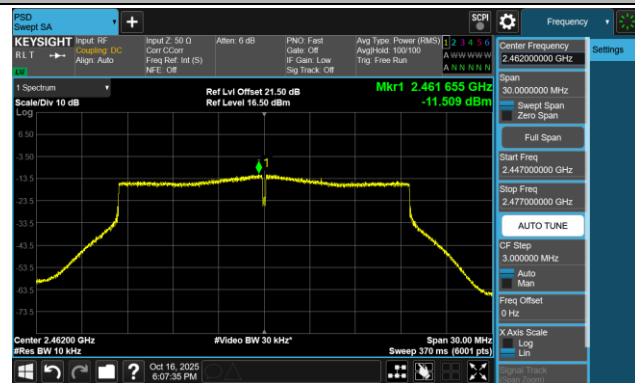


802.11be-EHT40 - AVGPSPD - Ant 0


Channel 03 (2422 MHz)

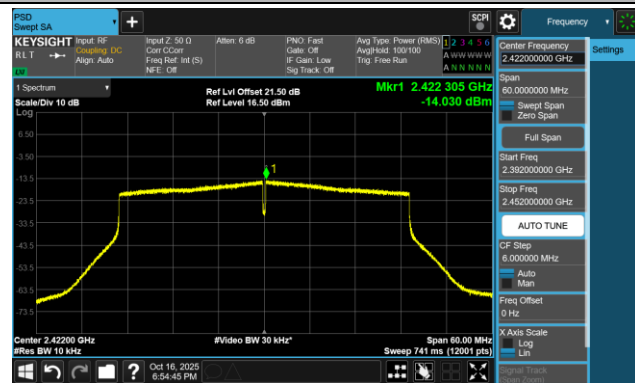

Channel 06 (2437 MHz)

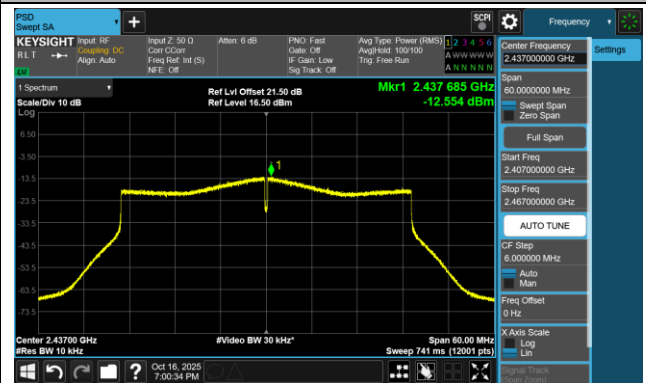


Channel 09 (2452 MHz)

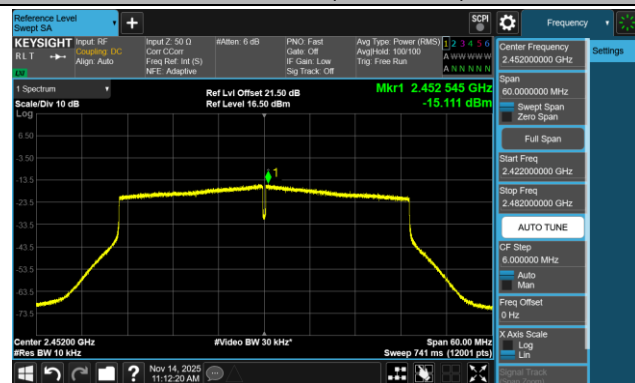

802.11b - AVGPDS - Ant 1


Channel 01 (2412 MHz)

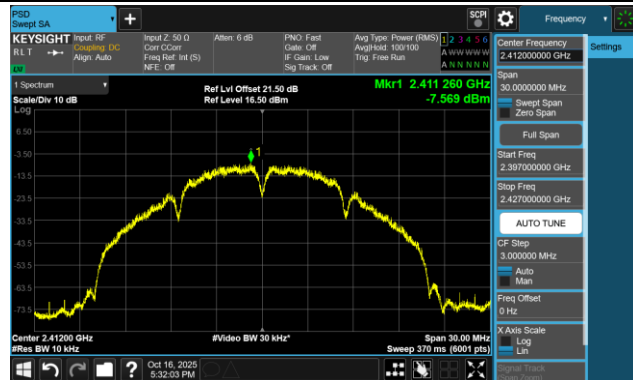

Channel 06 (2437 MHz)




Channel 11 (2462 MHz)

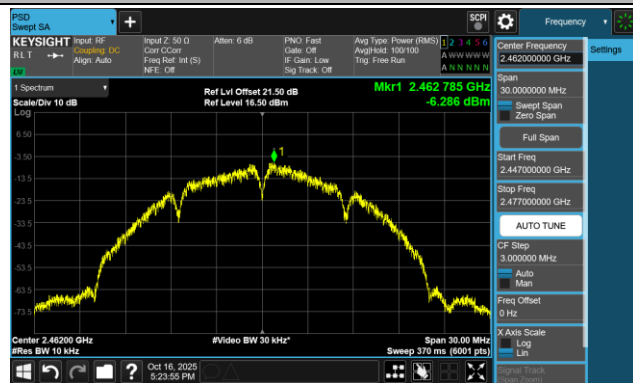


802.11g - AVGPDS - Ant 1

Channel 01 (2412 MHz)

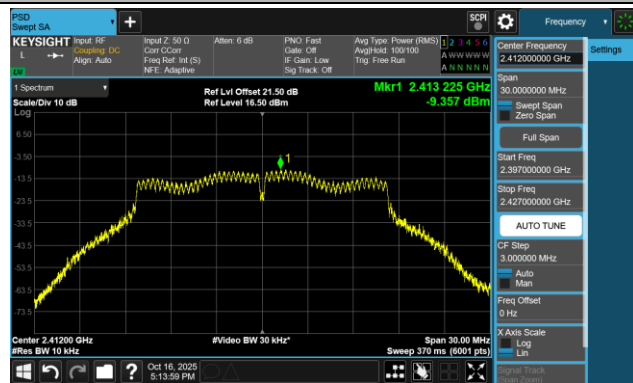

Channel 06 (2437 MHz)

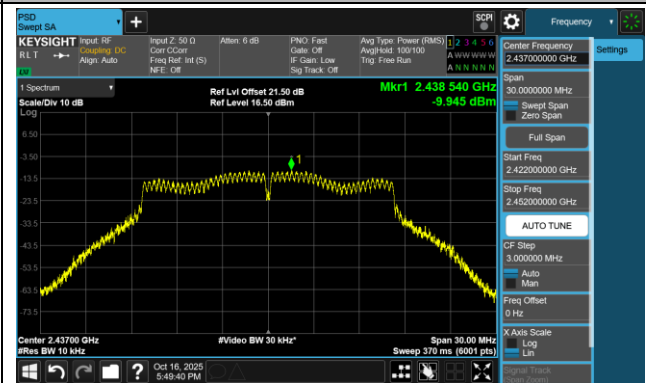

Channel 11 (2462 MHz)

