


Site	WJ-AC2	Test Date	2026-01-06
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5190 MHz		

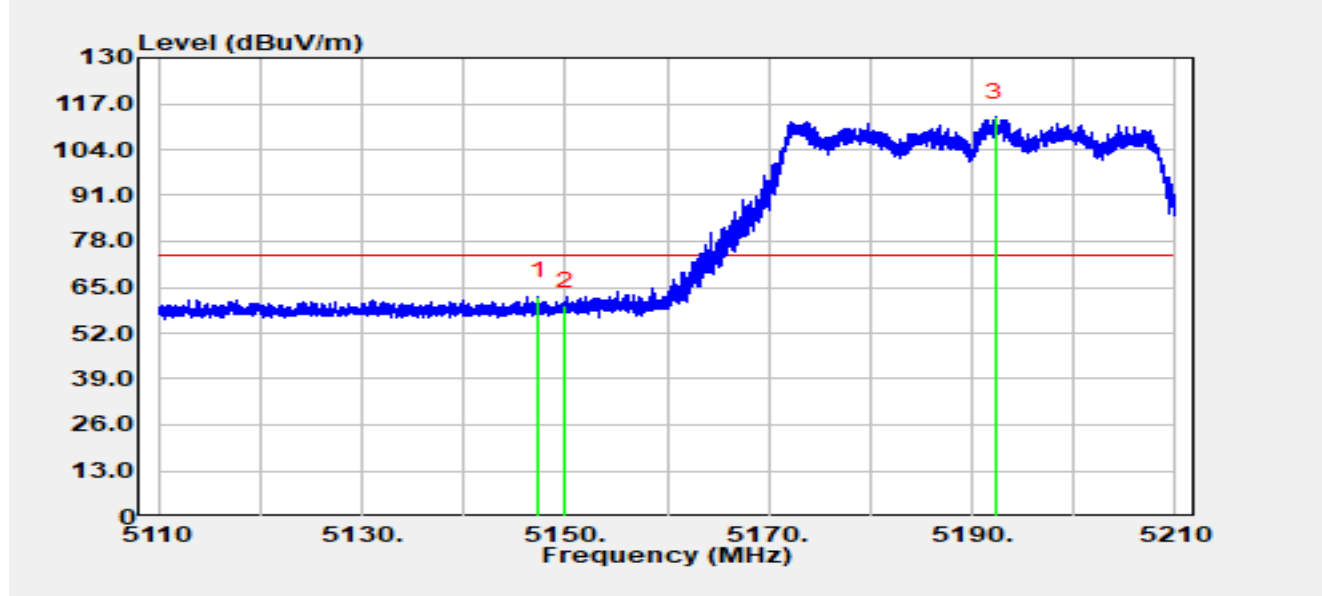


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.39	46.39	15.94	62.33	-11.67	74.00	Peak
2		5150.00	43.87	15.96	59.82	-14.18	74.00	Peak
3		5192.27	97.28	15.93	113.21	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-06
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5190 MHz		

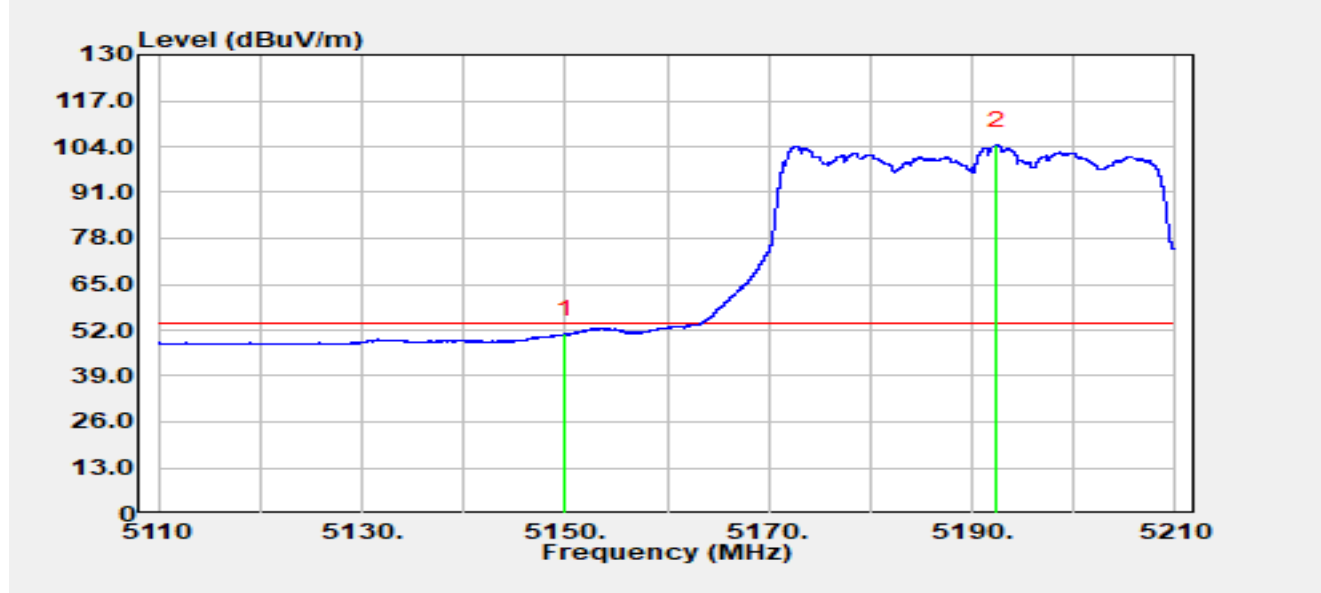


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.00	34.95	15.96	50.91	-3.09	54.00	Average
2		5192.42	88.43	15.93	104.36	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-06
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5310 MHz		

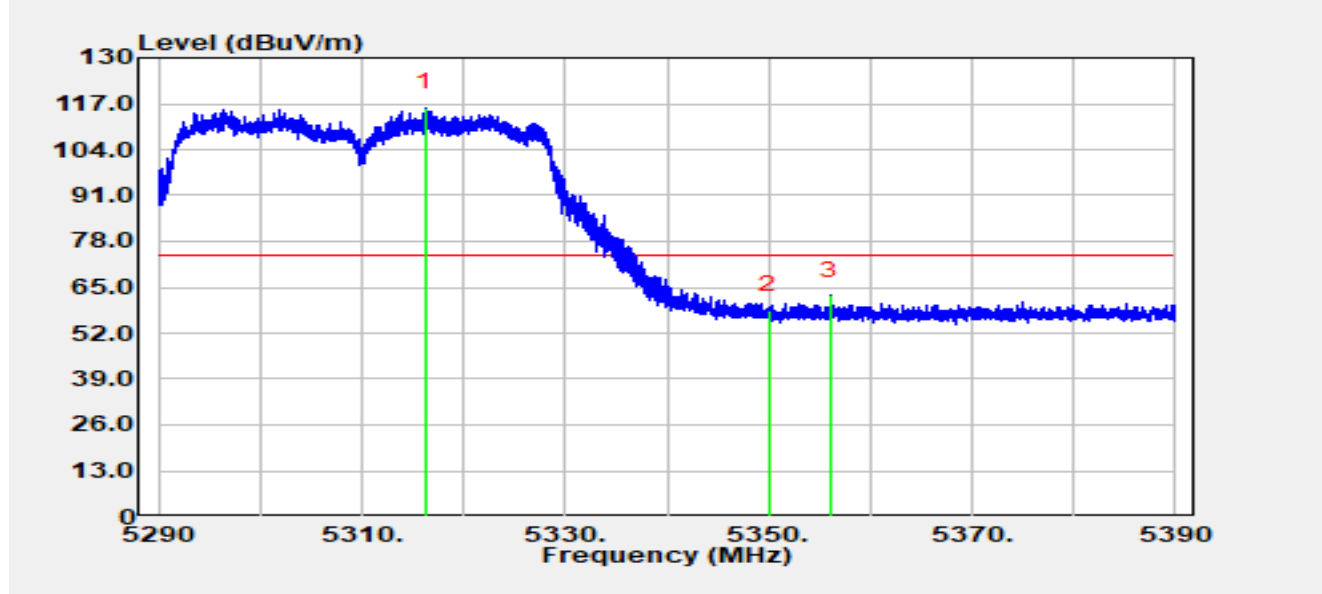


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5316.26	100.23	15.77	116.00	N/A	N/A	Peak
2		5350.00	42.91	15.69	58.60	-15.40	74.00	Peak
3	*	5356.00	46.88	15.76	62.64	-11.36	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-06
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5310 MHz		

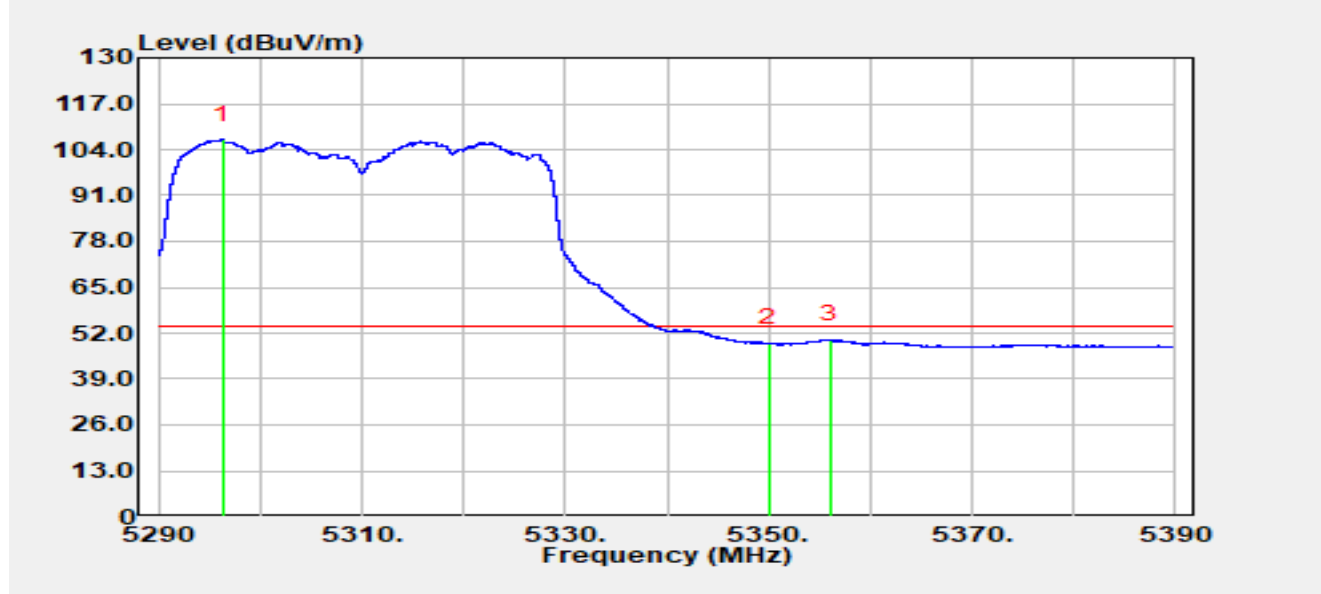


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5296.26	90.88	15.84	106.71	N/A	N/A	Average
2		5350.00	33.36	15.69	49.06	-4.94	54.00	Average
3	*	5356.05	34.31	15.76	50.07	-3.93	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-06
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5310 MHz		

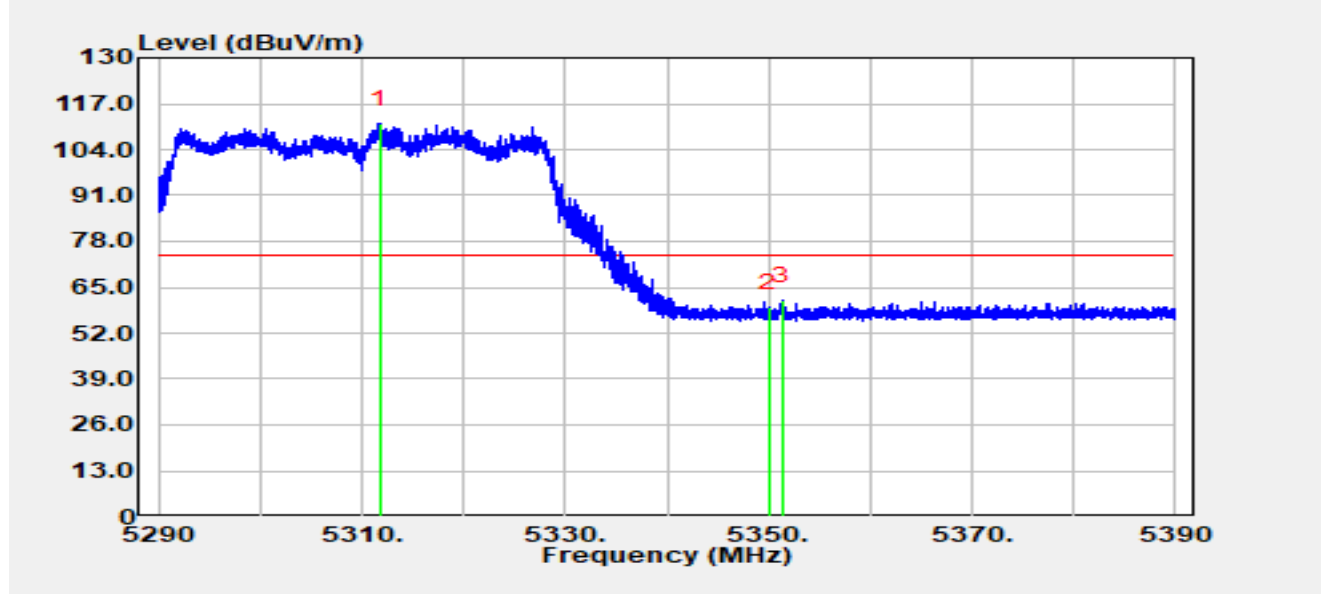


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5311.71	95.55	15.78	111.32	N/A	N/A	Peak
2		5350.00	43.62	15.69	59.31	-14.69	74.00	Peak
3	*	5351.28	45.44	15.71	61.14	-12.86	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-06
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5310 MHz		

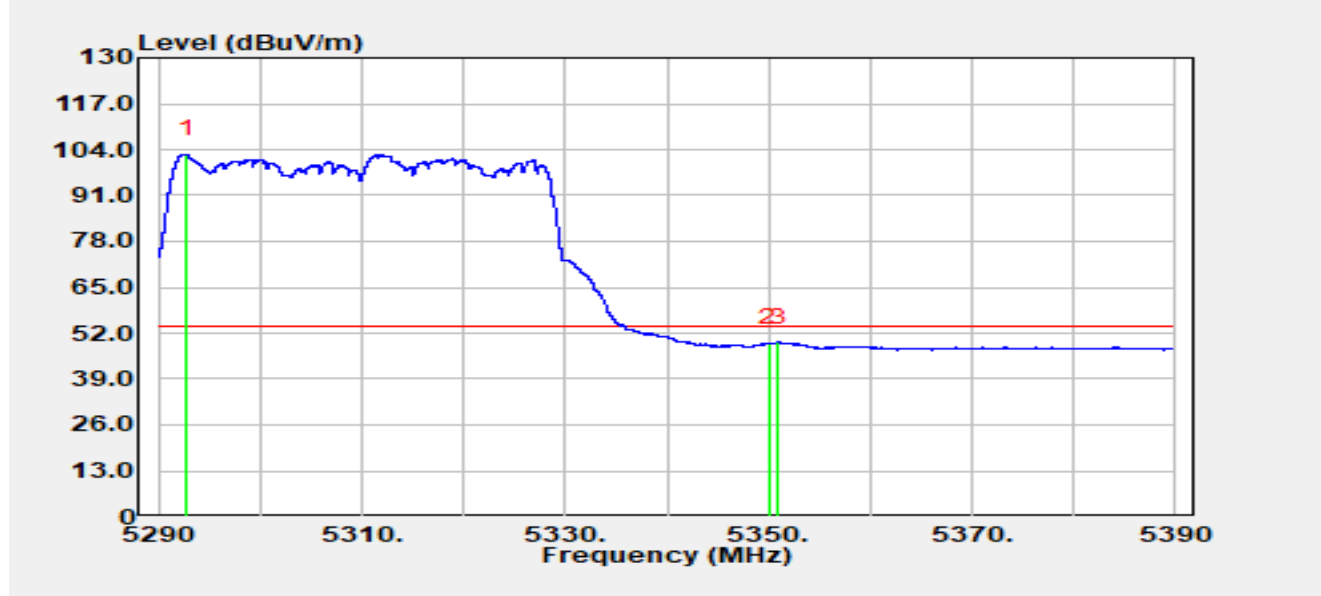


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5292.78	86.73	15.82	102.55	N/A	N/A	Average
2		5350.00	33.41	15.69	49.11	-4.89	54.00	Average
3	*	5350.89	33.61	15.70	49.31	-4.69	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-06
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

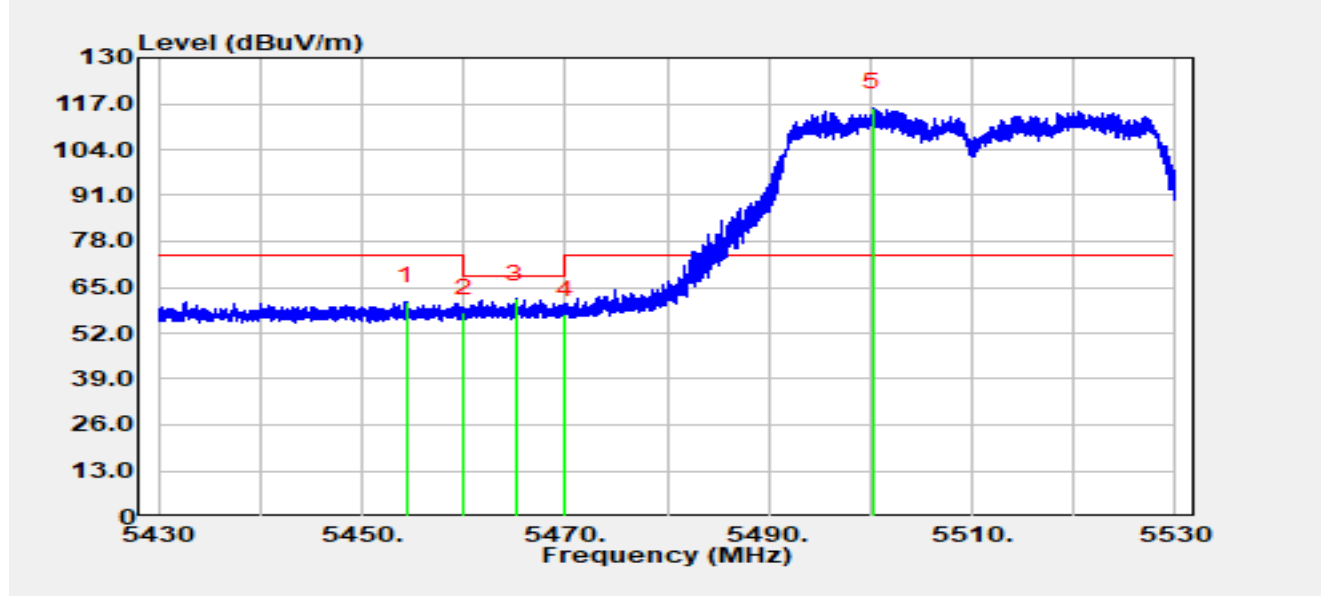


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5454.33	45.00	16.02	61.01	-12.99	74.00	Peak
2		5460.00	41.75	15.99	57.74	-10.46	68.20	Peak
3	*	5465.15	45.66	15.95	61.61	-6.59	68.20	Peak
4		5470.00	41.44	15.94	57.38	-10.82	68.20	Peak
5		5500.28	99.58	16.24	115.81	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-06
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

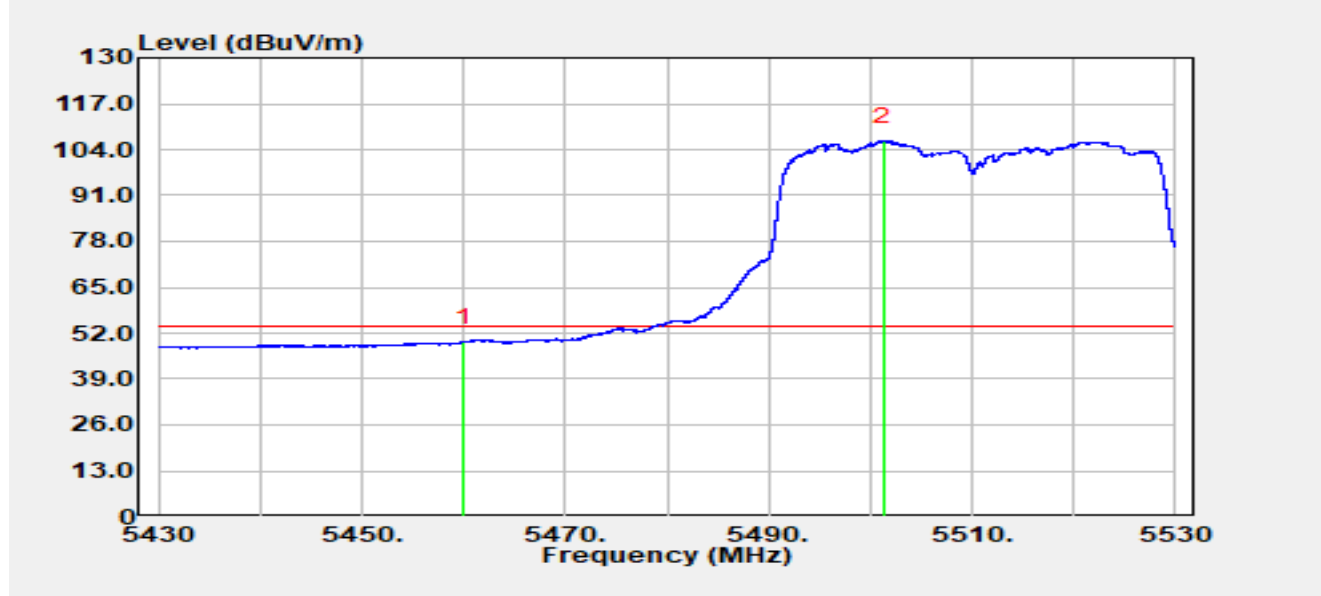


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.00	33.38	15.99	49.36	-4.64	54.00	Average
2		5501.29	90.17	16.24	106.41	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-06
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

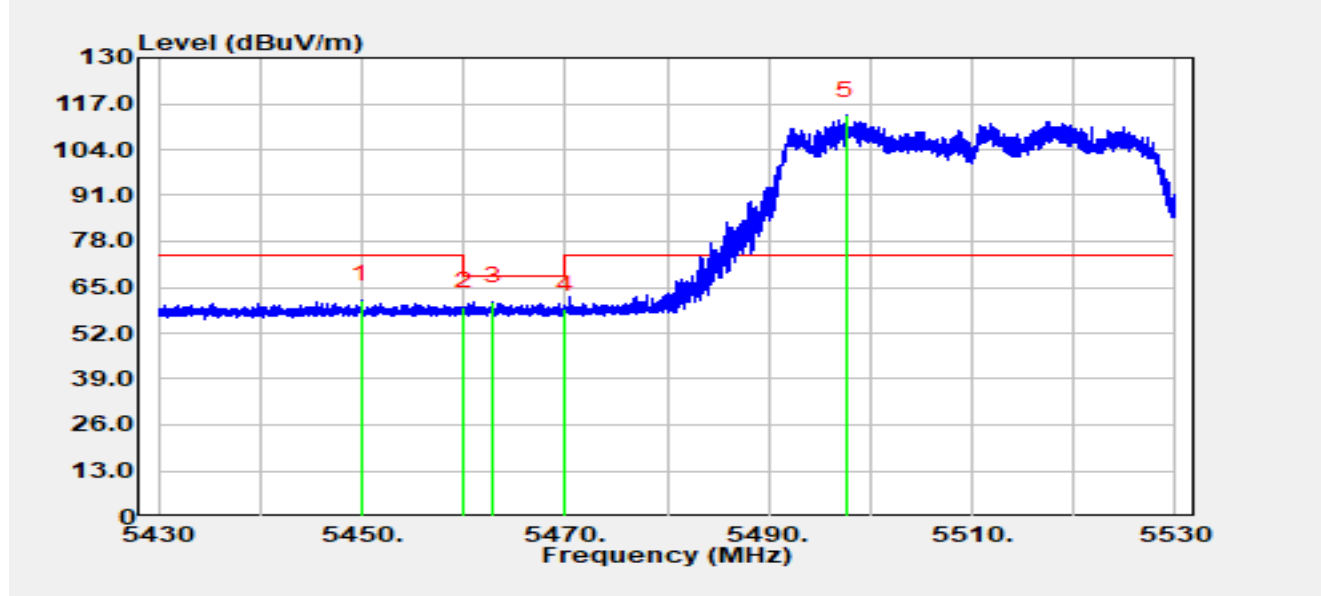


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5449.93	45.37	16.00	61.37	-12.63	74.00	Peak
2		5460.00	43.57	15.99	59.55	-8.65	68.20	Peak
3	*	5462.86	45.10	15.97	61.07	-7.13	68.20	Peak
4		5470.00	42.78	15.94	58.72	-9.48	68.20	Peak
5		5497.61	97.39	16.22	113.61	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-06
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

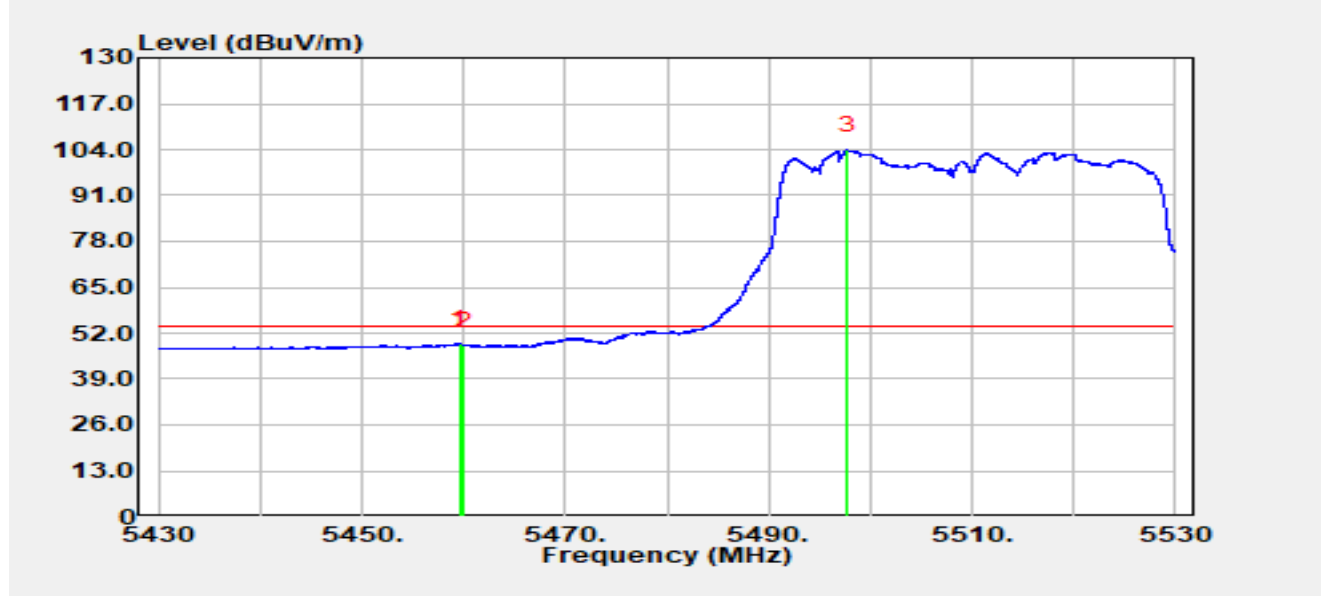


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.60	32.89	15.99	48.88	-5.12	54.00	Average
2		5460.00	32.35	15.99	48.34	-5.66	54.00	Average
3		5497.72	87.56	16.22	103.78	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-06
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5670 MHz		

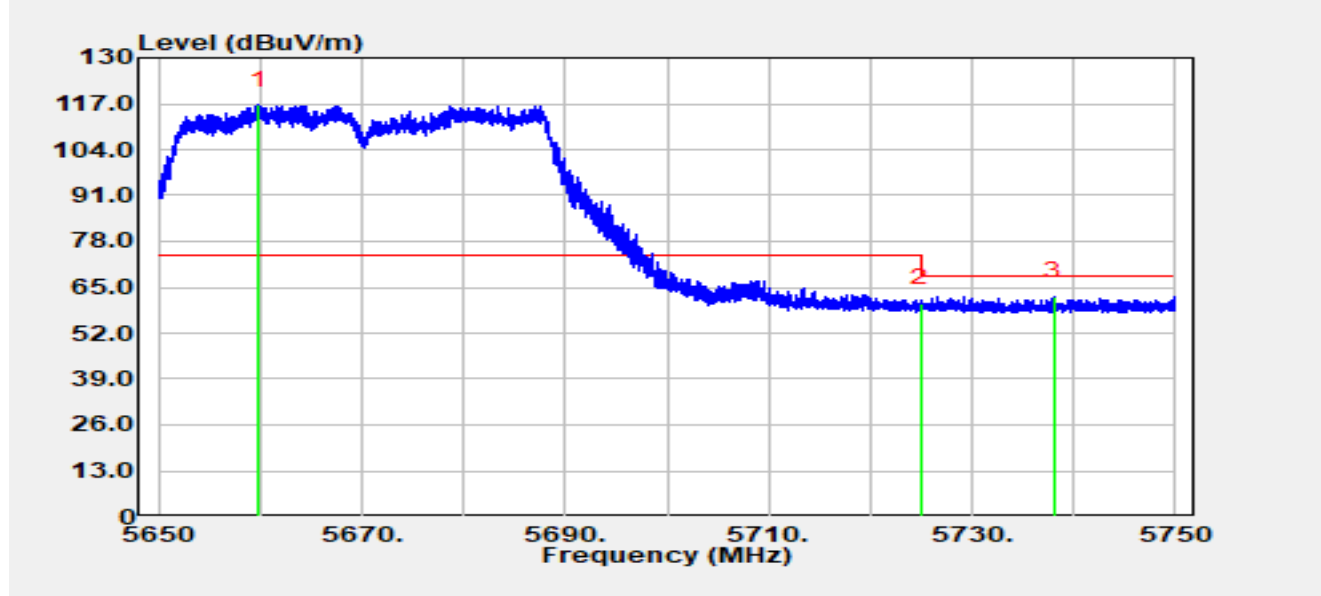


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5659.84	99.69	16.83	116.52	N/A	N/A	Peak
2		5725.00	43.67	16.86	60.53	-7.67	68.20	Peak
3	*	5737.99	45.72	16.82	62.54	-5.66	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-06
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5670 MHz		

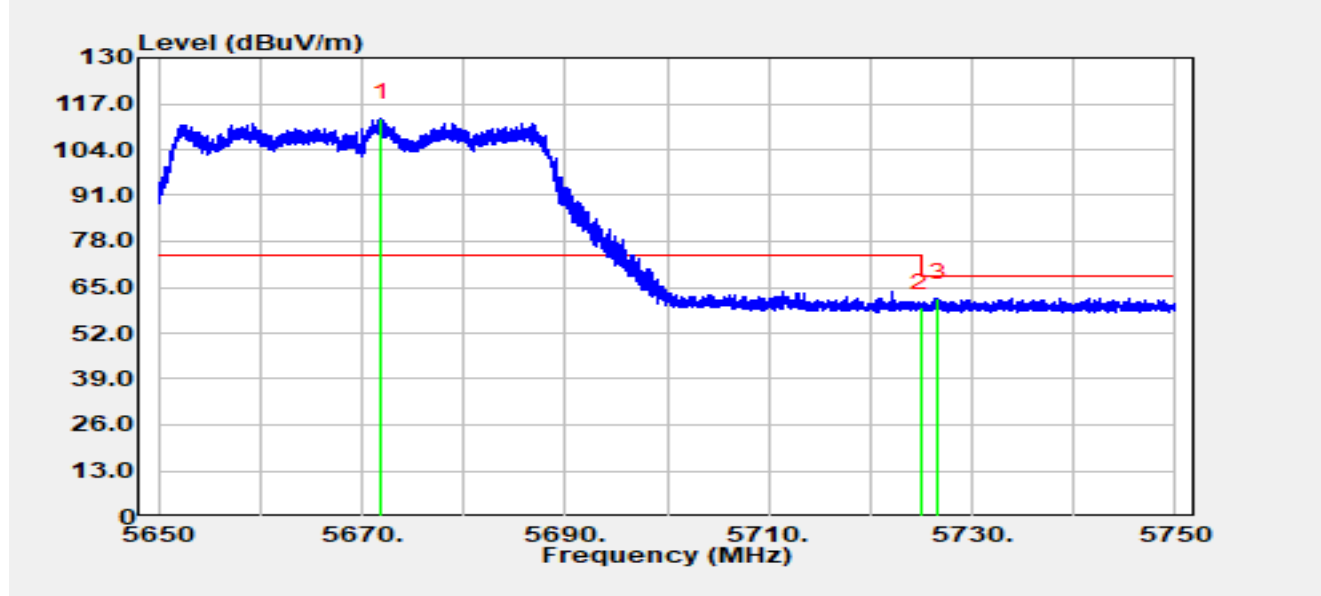


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5671.91	95.96	16.91	112.88	N/A	N/A	Peak
2		5725.00	42.47	16.86	59.34	-8.86	68.20	Peak
3	*	5726.62	45.17	16.86	62.02	-6.18	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-06
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5755 MHz		

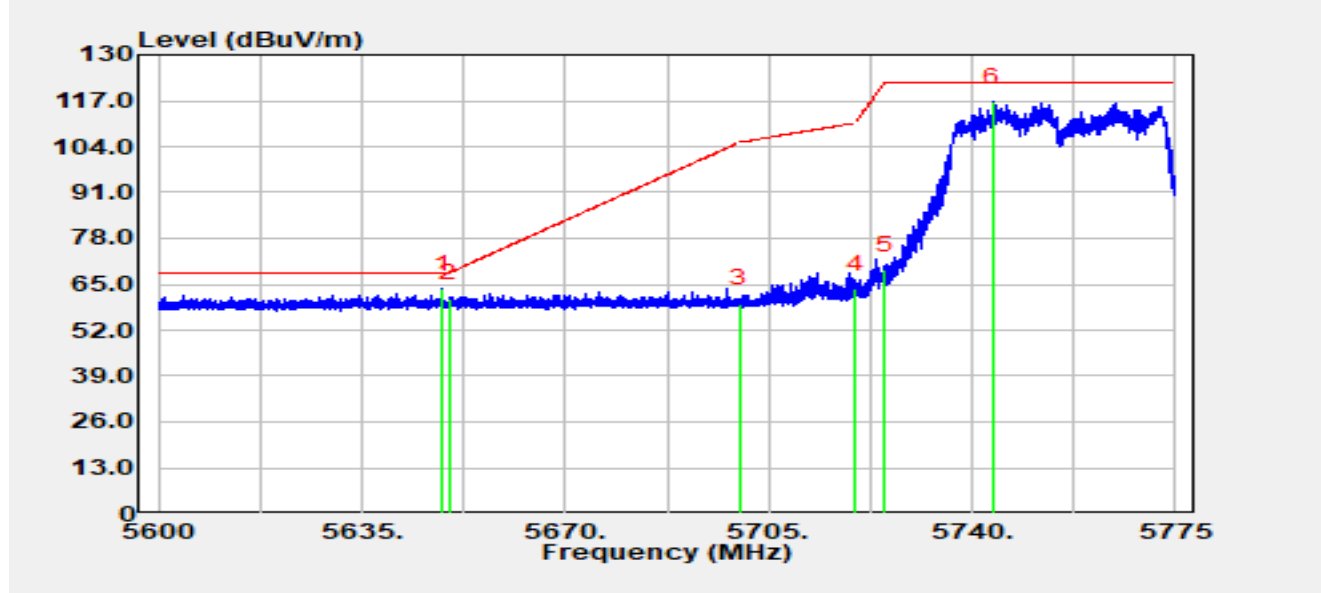


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5648.91	46.79	16.78	63.57	N/A	N/A	Peak
2		5650.00	44.14	16.78	60.92	-7.28	68.20	Peak
3		5700.00	42.46	16.98	59.44	-45.76	105.20	Peak
4		5720.00	46.76	16.89	63.65	-47.15	110.80	Peak
5		5725.00	52.16	16.86	69.03	-53.17	122.20	Peak
6	*	5743.48	99.91	16.82	116.73	-5.47	122.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-06
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5755 MHz		

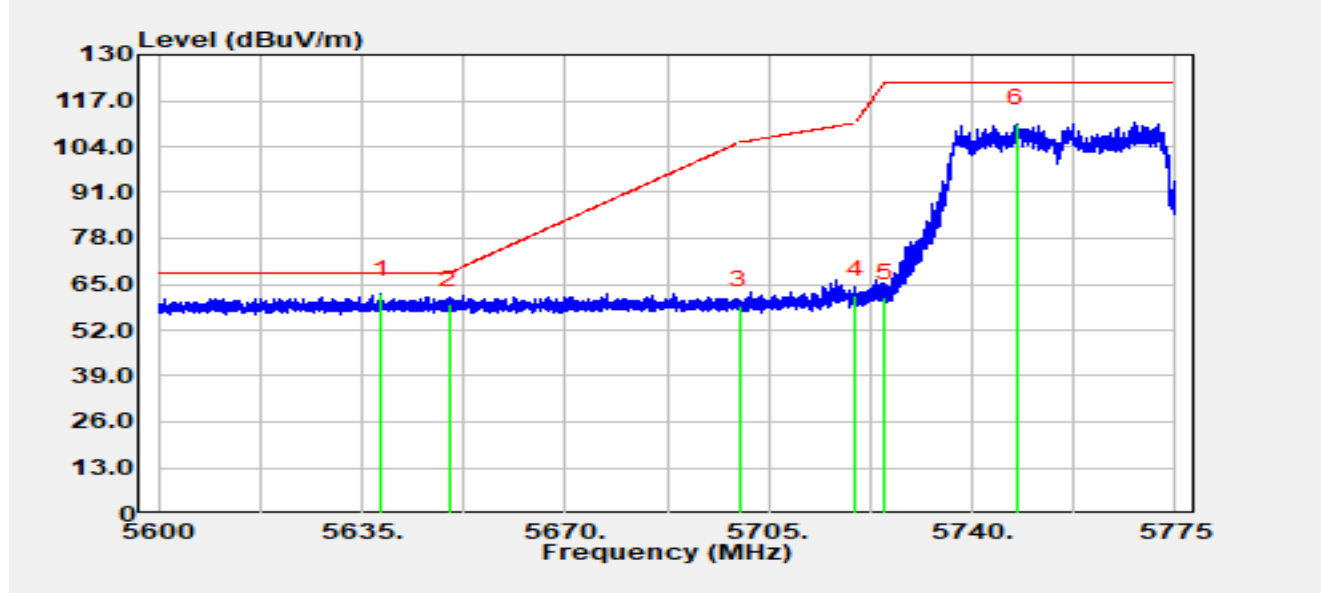


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5638.34	45.44	16.73	62.17	N/A	N/A	Peak
2	*	5650.00	42.34	16.78	59.13	-9.07	68.20	Peak
3		5700.00	41.90	16.98	58.89	-46.31	105.20	Peak
4		5720.00	45.16	16.89	62.04	-48.76	110.80	Peak
5		5725.00	44.40	16.86	61.27	-60.93	122.20	Peak
6		5747.56	93.62	16.84	110.46	-11.74	122.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-06
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5795 MHz		

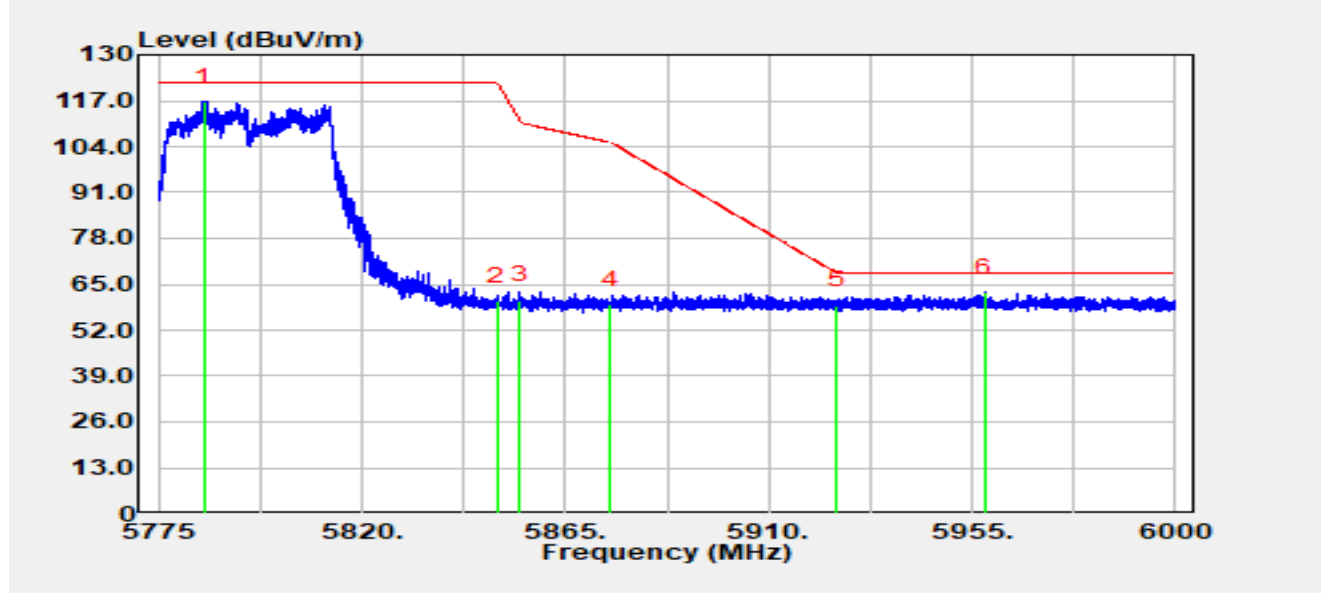


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5785.19	99.59	17.01	116.60	N/A	N/A	Peak
2		5850.00	42.97	17.36	60.33	-61.87	122.20	Peak
3		5855.00	43.07	17.33	60.39	-50.41	110.80	Peak
4		5875.00	41.87	17.43	59.30	-45.90	105.20	Peak
5		5925.00	41.50	17.40	58.90	-9.30	68.20	Peak
6	*	5957.75	44.91	17.64	62.55	-5.65	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-06
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5795 MHz		

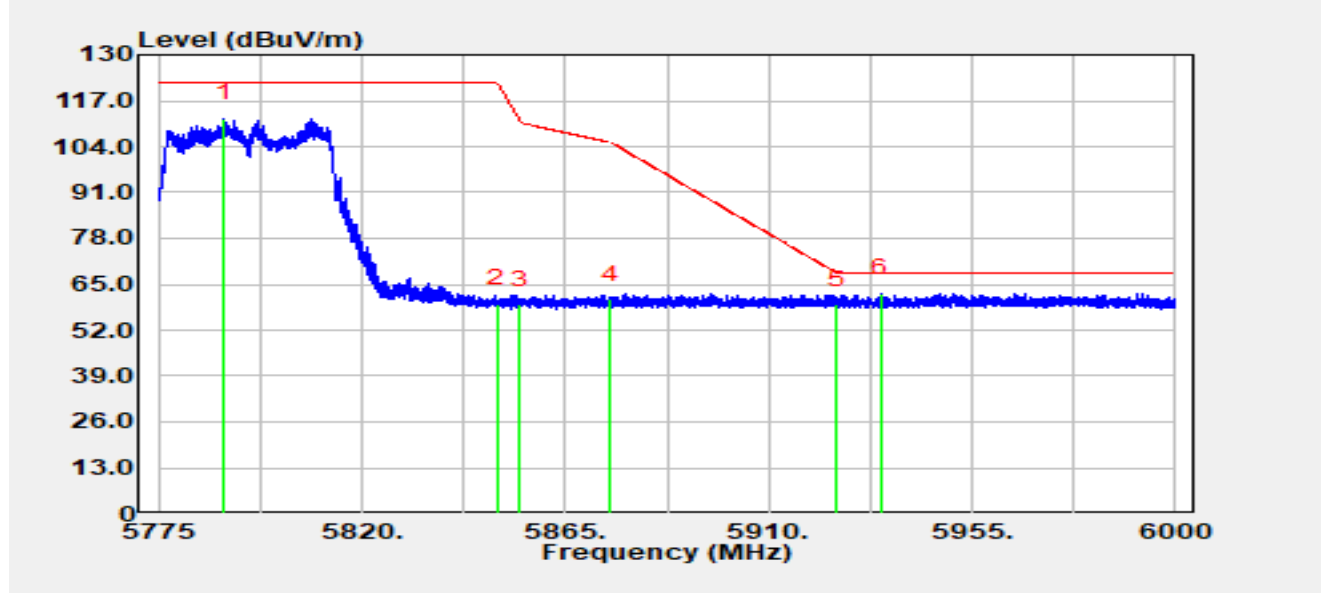


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5789.51	94.88	17.01	111.89	-10.31	122.20	Peak
2		5850.00	42.13	17.36	59.49	-62.71	122.20	Peak
3		5855.00	41.79	17.33	59.12	-51.68	110.80	Peak
4		5875.00	43.37	17.43	60.80	-44.40	105.20	Peak
5	*	5925.00	41.75	17.40	59.15	-9.05	68.20	Peak
6		5934.75	44.92	17.47	62.40	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5210 MHz		

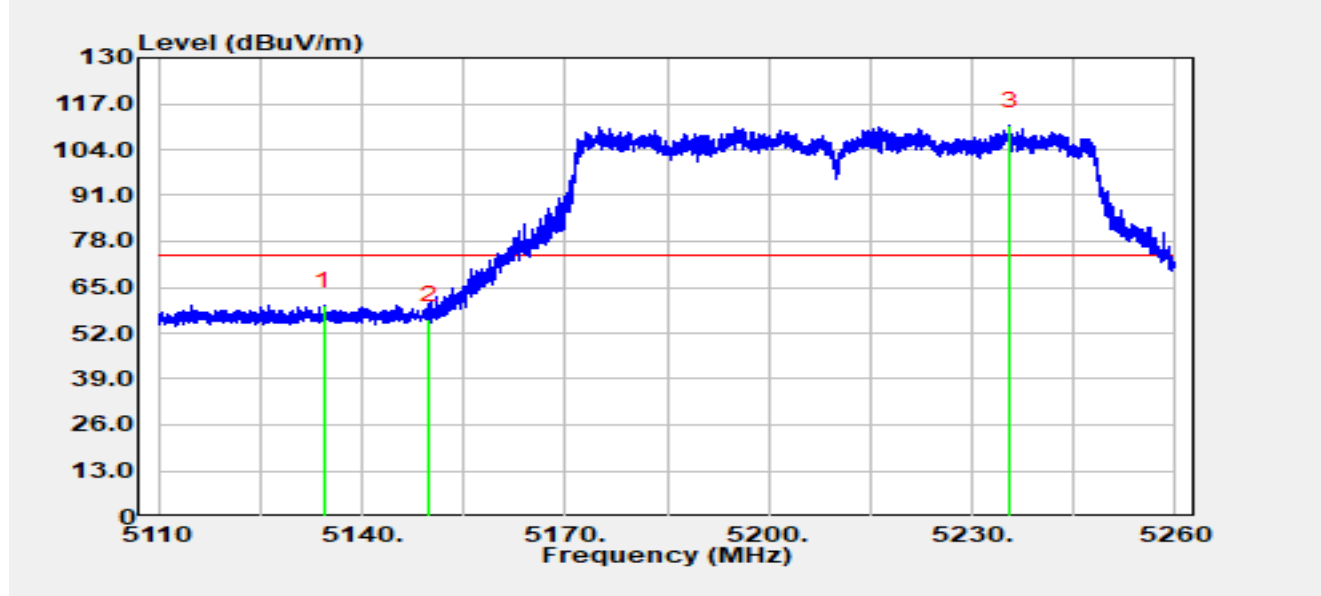


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5134.50	43.82	15.96	59.78	-14.22	74.00	Peak
2		5150.00	39.95	15.96	55.91	-18.09	74.00	Peak
3		5235.54	94.54	16.10	110.64	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5210 MHz		

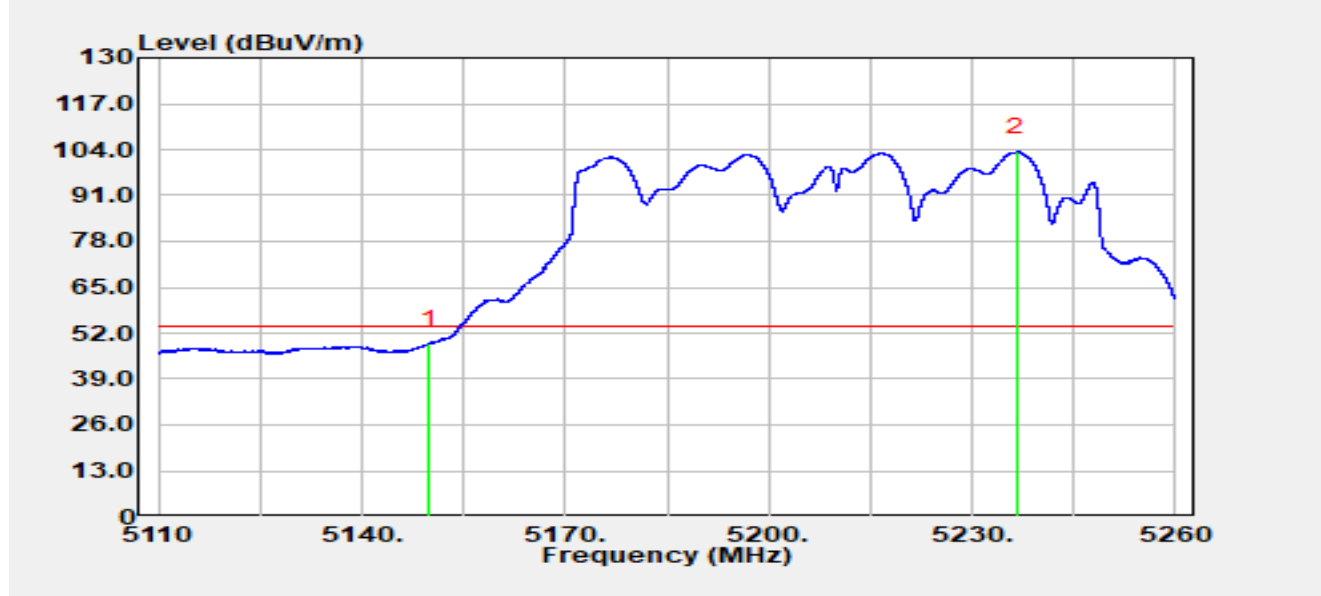


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.00	32.97	15.96	48.93	-5.07	54.00	Average
2		5236.65	87.22	16.07	103.30	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5210 MHz		

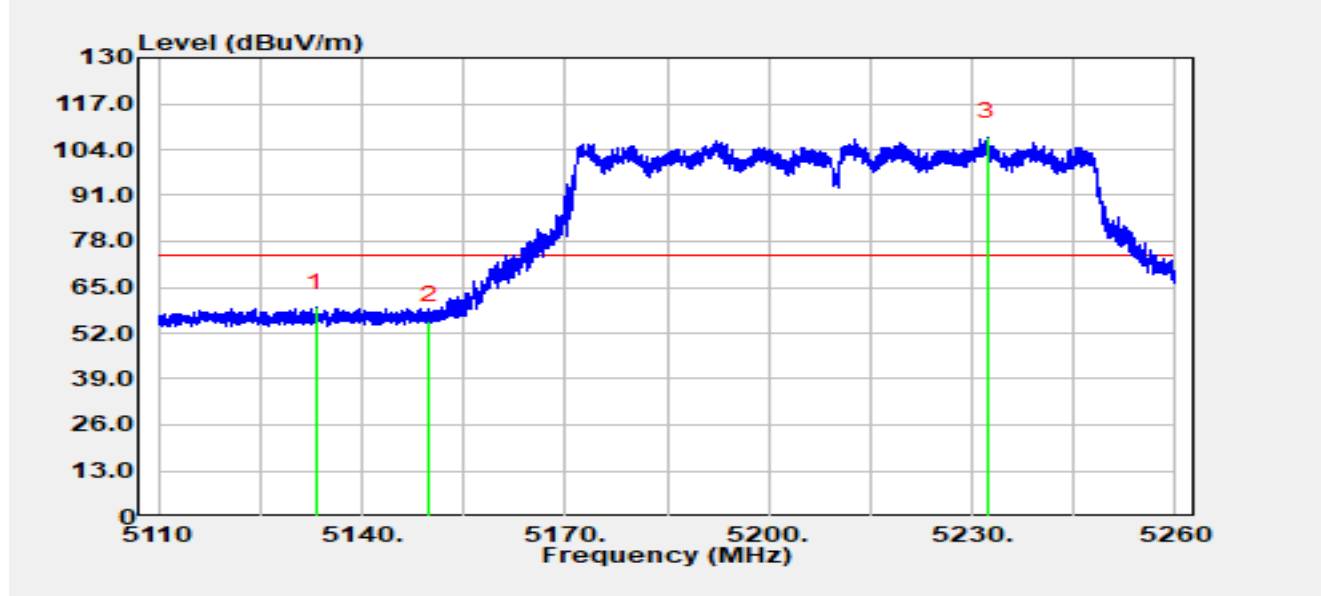


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5133.22	43.24	15.96	59.20	-14.80	74.00	Peak
2		5150.00	39.63	15.96	55.59	-18.41	74.00	Peak
3		5232.28	91.50	16.17	107.66	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5210 MHz		

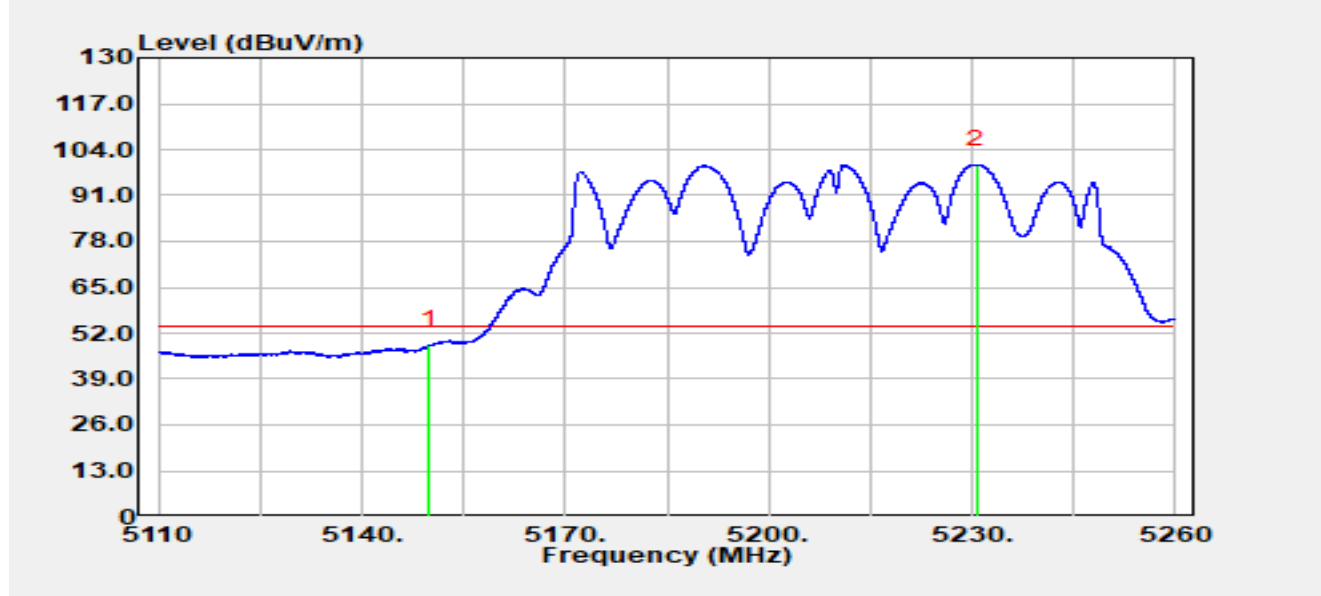


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.00	32.67	15.96	48.63	-5.37	54.00	Average
2		5230.71	83.57	16.20	99.77	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5290 MHz		

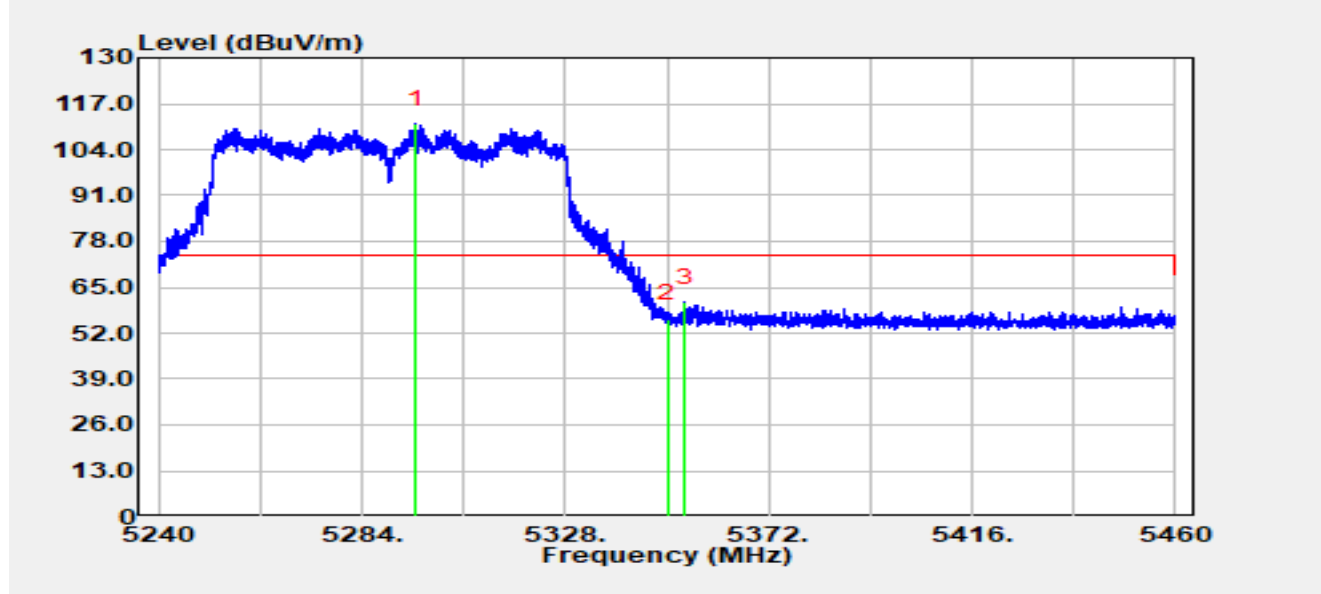


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5295.59	95.40	15.83	111.23	N/A	N/A	Peak
2		5350.00	40.39	15.69	56.08	-17.92	74.00	Peak
3	*	5353.83	45.09	15.74	60.83	-13.17	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5290 MHz		

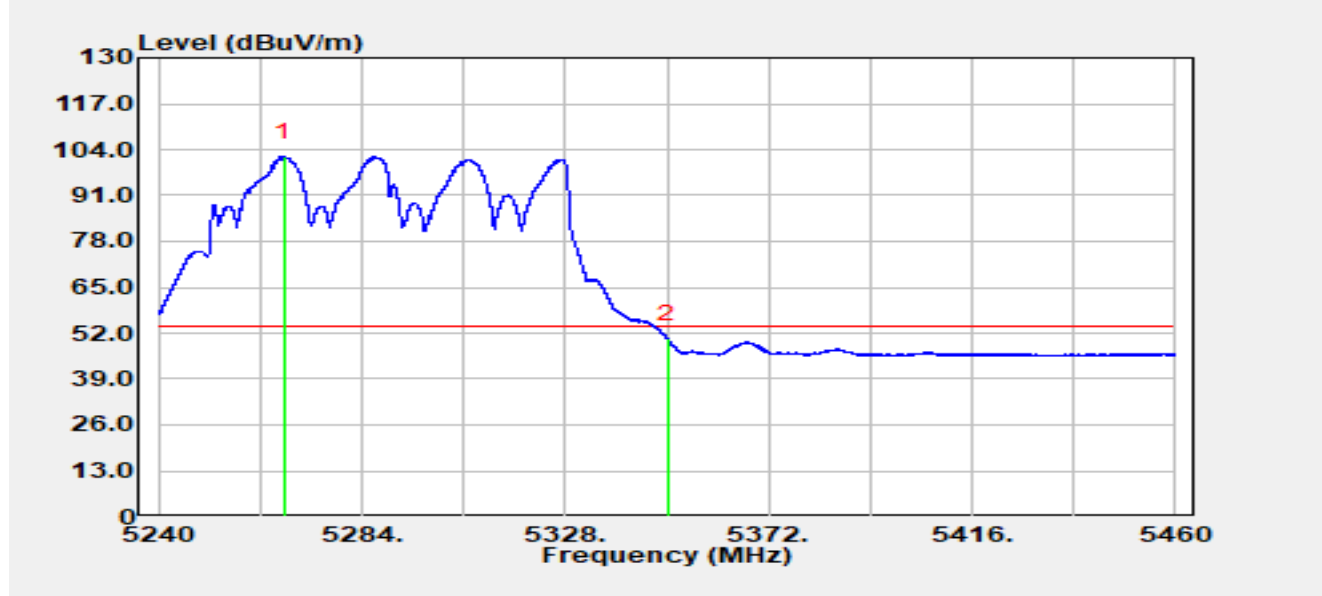


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5267.10	86.15	15.79	101.94	N/A	N/A	Average
2	*	5350.00	34.76	15.69	50.45	-3.55	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5290 MHz		

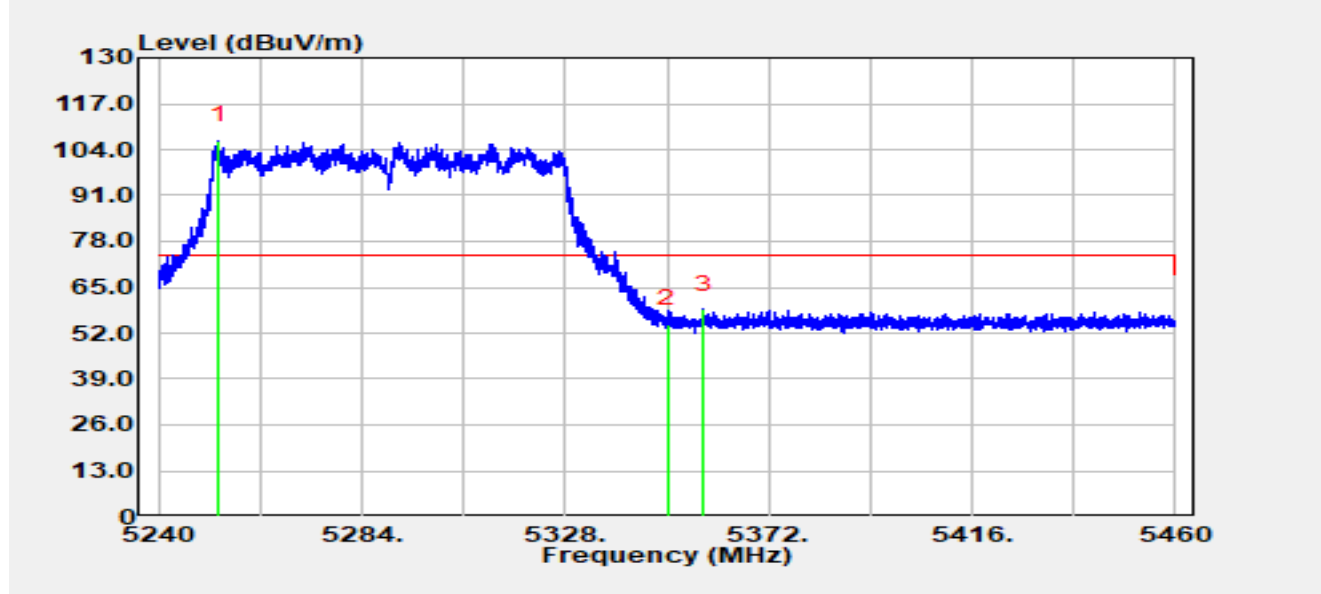


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5252.94	90.86	15.83	106.68	N/A	N/A	Peak
2		5350.00	38.97	15.69	54.66	-19.34	74.00	Peak
3	*	5357.81	42.98	15.78	58.76	-15.24	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5290 MHz		

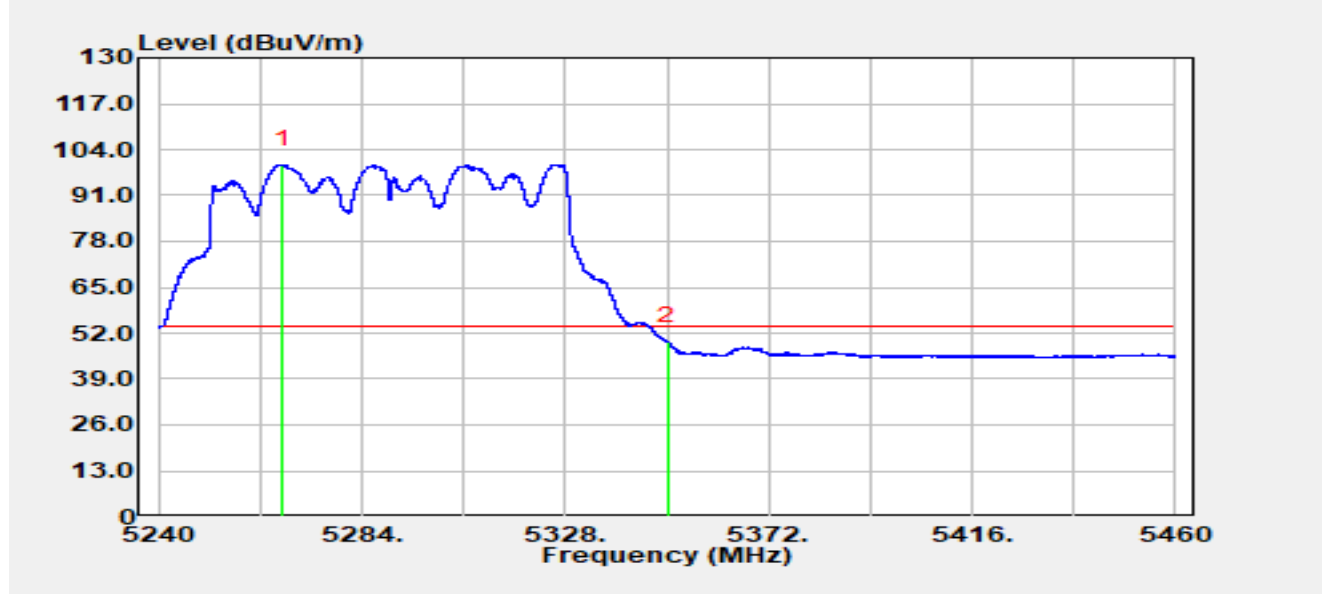


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5266.80	83.95	15.79	99.74	N/A	N/A	Average
2	*	5350.00	33.94	15.69	49.63	-4.37	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

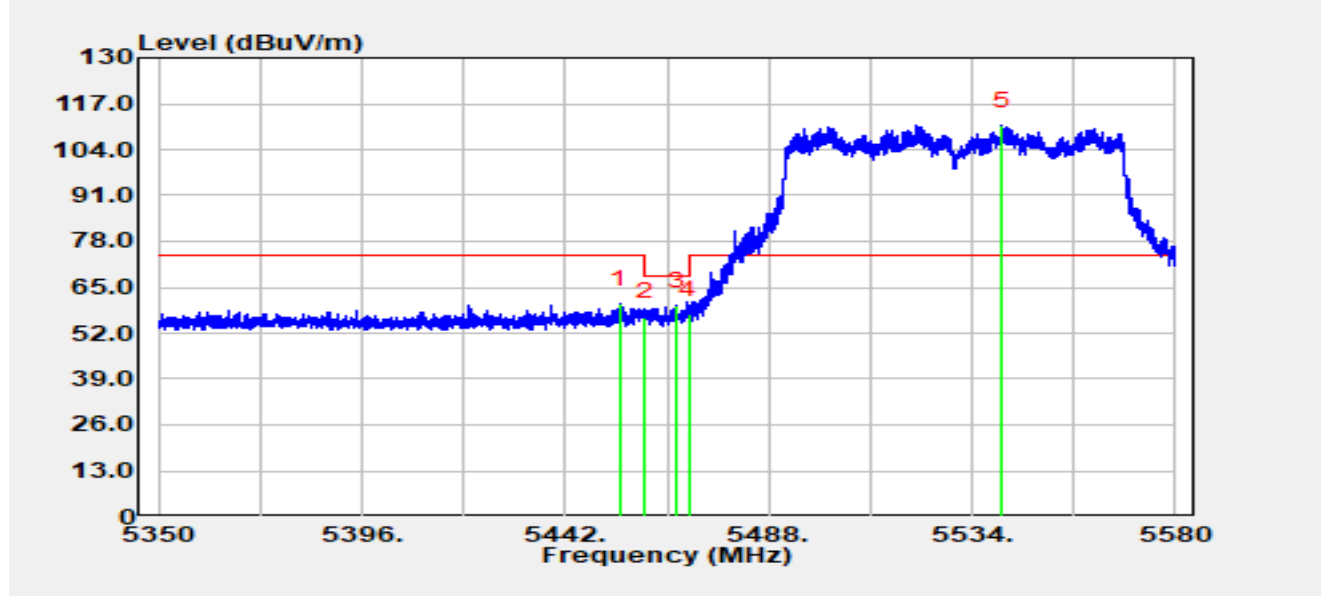


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5454.28	44.18	16.02	60.19	-13.81	74.00	Peak
2		5460.00	40.62	15.99	56.61	-11.59	68.20	Peak
3	*	5467.16	43.69	15.93	59.62	-8.58	68.20	Peak
4		5470.00	41.37	15.94	57.32	-10.88	68.20	Peak
5		5540.76	94.32	16.51	110.83	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

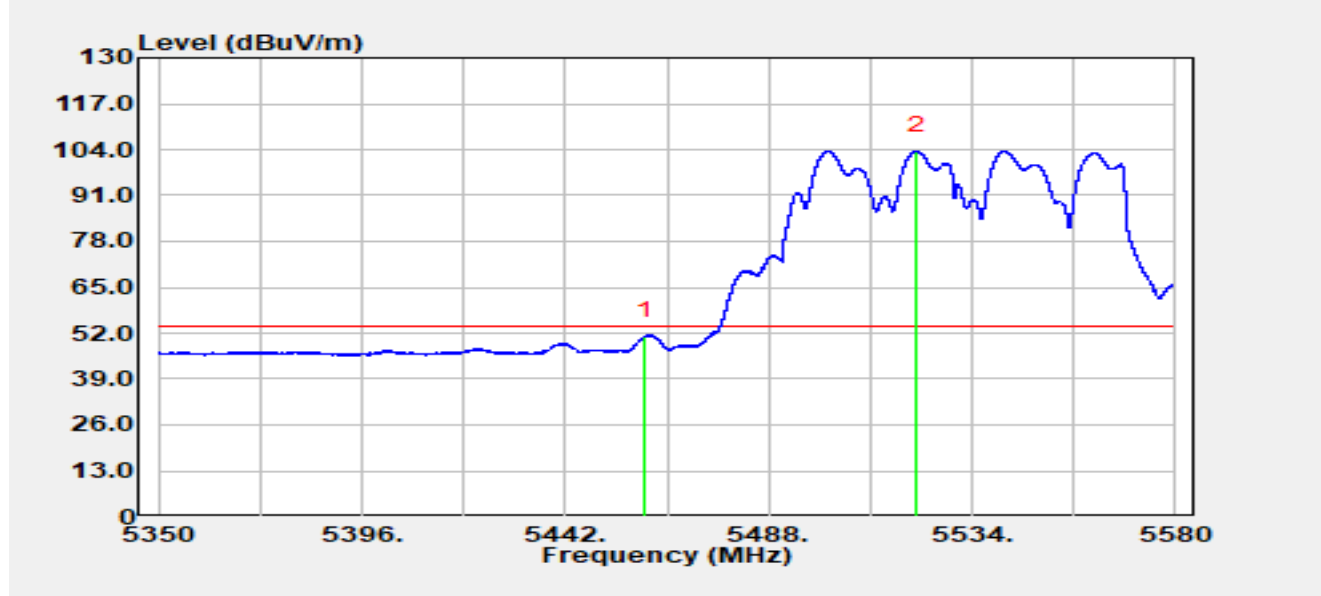


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5460.00	35.05	15.99	51.04	-2.96	54.00	Average
2		5521.49	87.26	16.27	103.52	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

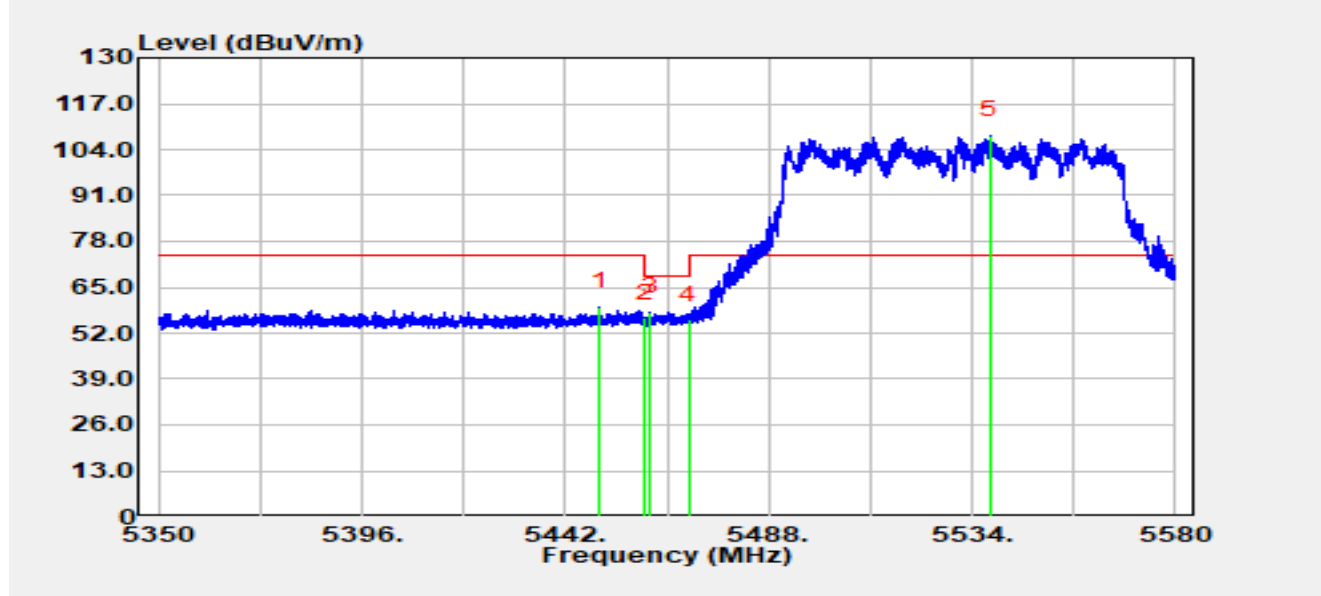


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5449.84	43.41	16.00	59.40	-14.60	74.00	Peak
2		5460.00	40.40	15.99	56.39	-11.81	68.20	Peak
3	*	5461.23	42.08	15.98	58.05	-10.15	68.20	Peak
4		5470.00	39.85	15.94	55.80	-12.40	68.20	Peak
5		5538.07	91.58	16.51	108.09	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

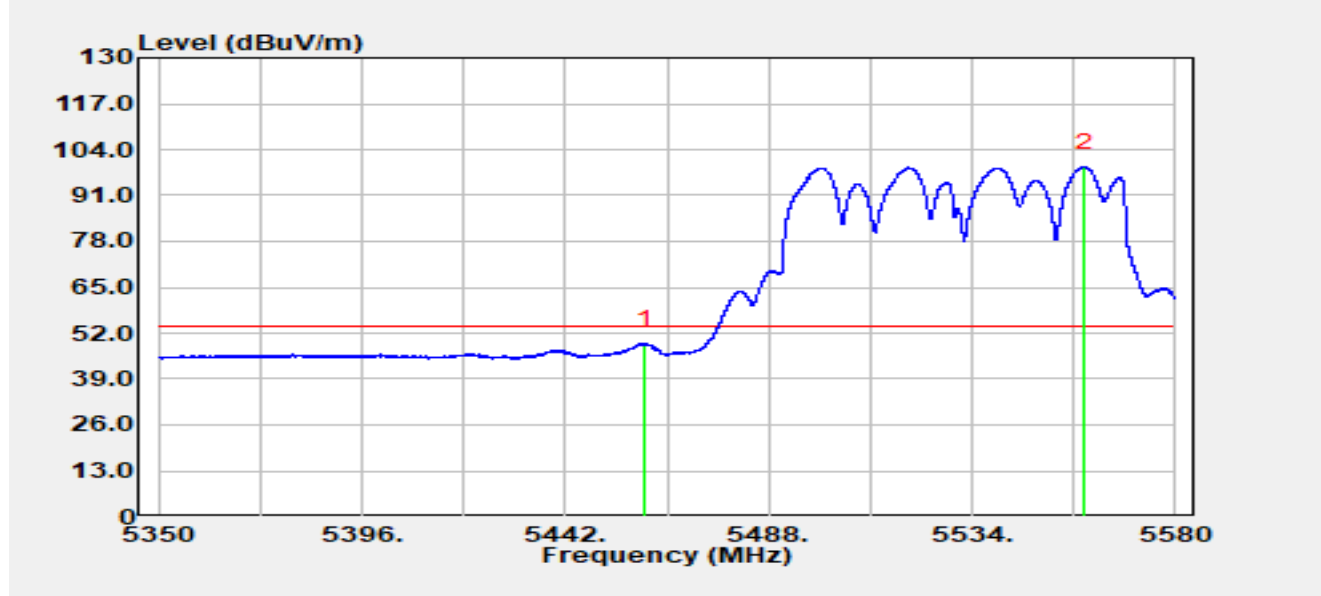


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.00	32.61	15.99	48.60	-5.40	54.00	Average
2		5559.35	82.54	16.47	99.01	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5610 MHz		

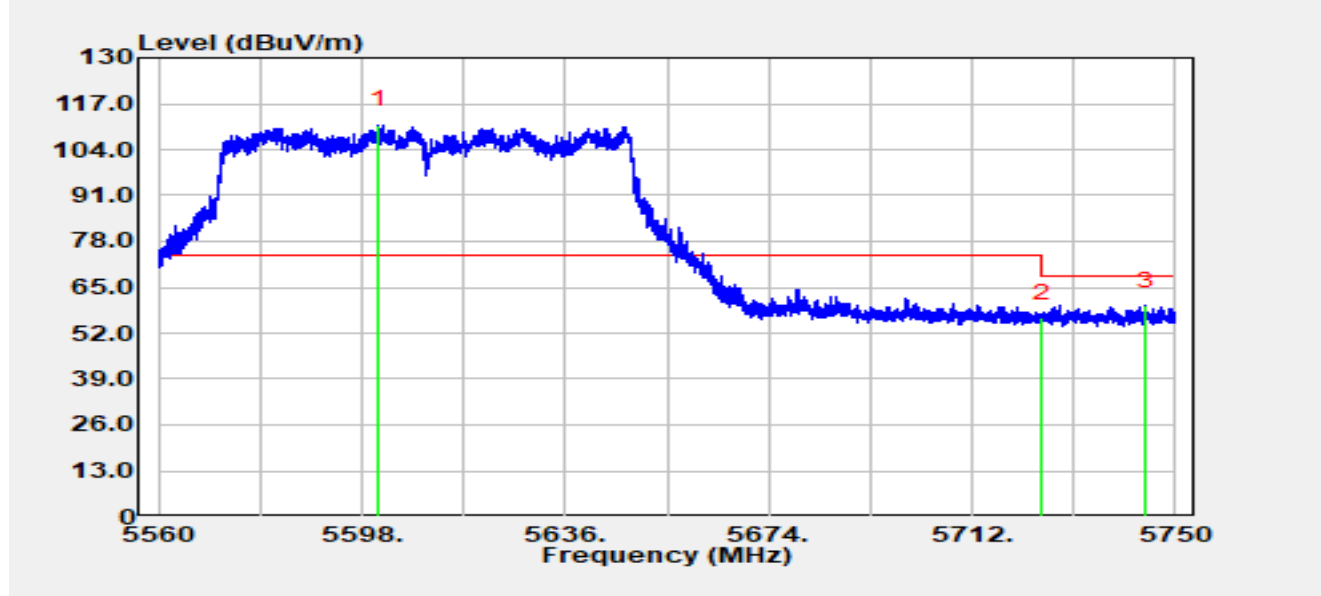


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5601.17	94.52	16.56	111.08	N/A	N/A	Peak
2		5725.00	39.41	16.86	56.27	-11.93	68.20	Peak
3	*	5744.43	43.01	16.82	59.83	-8.37	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5610 MHz		

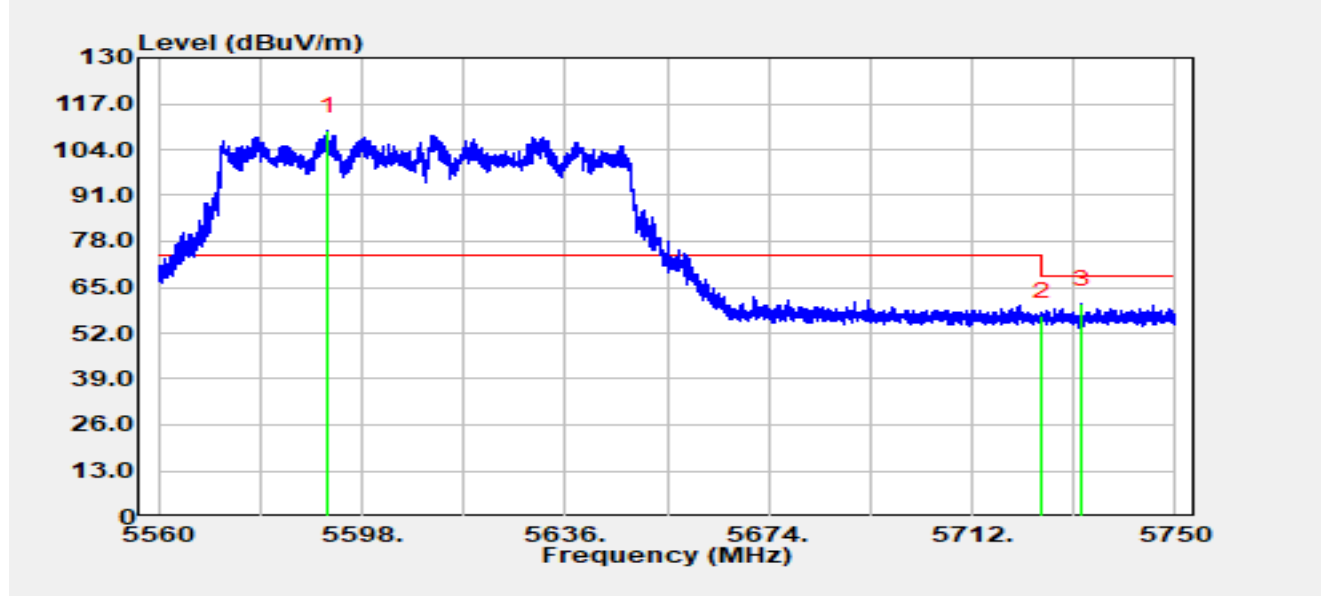


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5591.69	92.84	16.46	109.31	N/A	N/A	Peak
2		5725.00	39.84	16.86	56.70	-11.50	68.20	Peak
3	*	5732.52	43.37	16.84	60.21	-7.99	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5775 MHz		

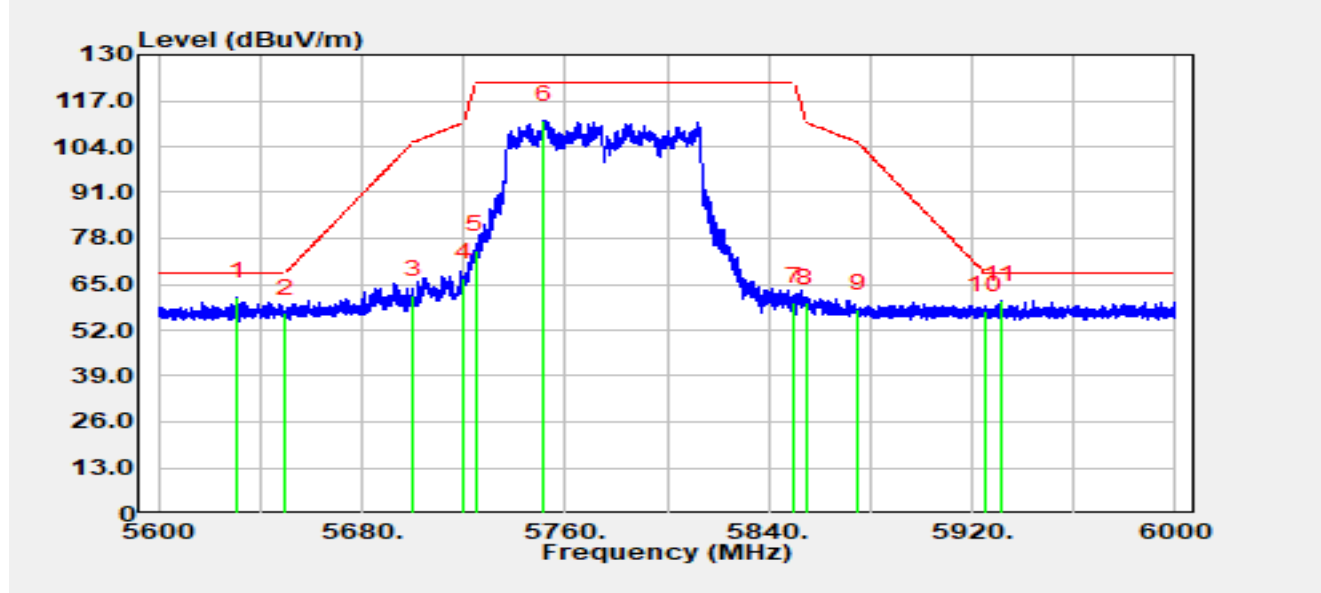


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5631.04	44.76	16.61	61.37	N/A	N/A	Peak
2		5650.00	39.98	16.78	56.76	-11.44	68.20	Peak
3		5700.00	44.87	16.98	61.85	-43.35	105.20	Peak
4		5720.00	49.84	16.89	66.73	-44.07	110.80	Peak
5		5725.00	57.77	16.86	74.64	-47.56	122.20	Peak
6		5751.48	94.55	16.87	111.42	-10.78	122.20	Peak
7		5850.00	42.67	17.36	60.03	-62.17	122.20	Peak
8		5855.00	42.47	17.33	59.80	-51.00	110.80	Peak
9		5875.00	40.57	17.43	58.00	-47.20	105.20	Peak
10		5925.00	40.02	17.40	57.42	-10.78	68.20	Peak
11	*	5931.08	43.06	17.43	60.49	-7.71	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5775 MHz		

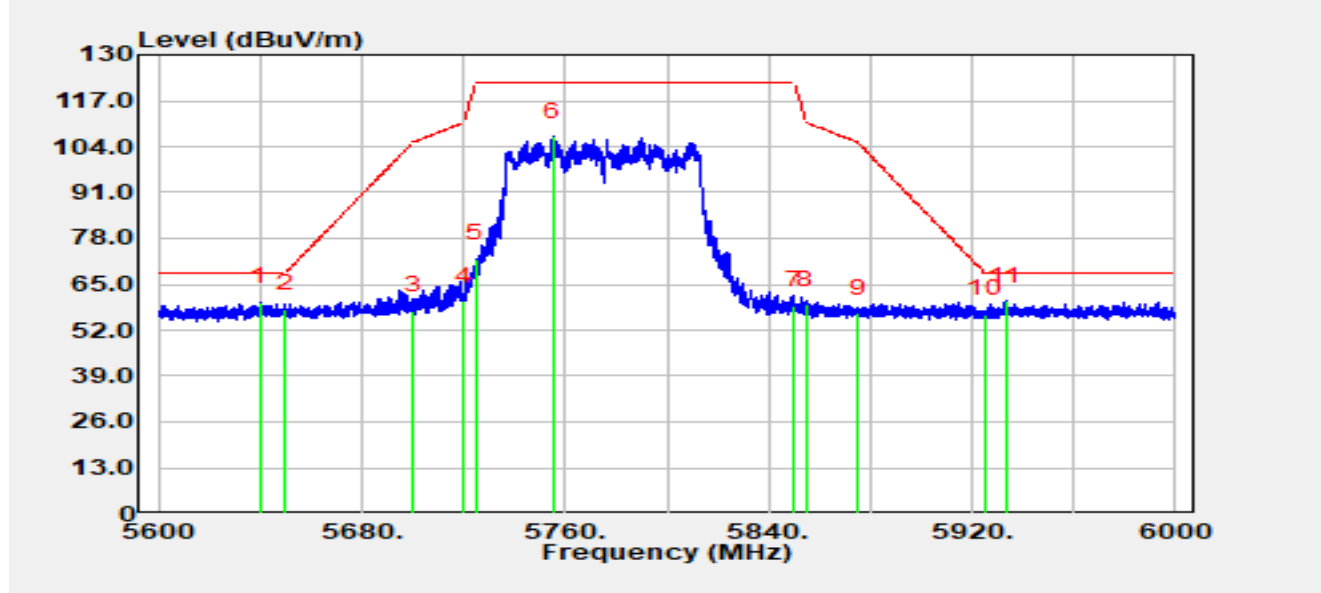


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5640.00	43.14	16.74	59.88	-8.32	68.20	Peak
2		5650.00	41.11	16.78	57.89	-10.31	68.20	Peak
3		5700.00	40.55	16.98	57.53	-47.67	105.20	Peak
4		5720.00	43.34	16.89	60.23	-50.57	110.80	Peak
5		5725.00	55.26	16.86	72.13	-50.07	122.20	Peak
6		5755.44	90.02	16.89	106.91	-15.29	122.20	Peak
7		5850.00	41.52	17.36	58.88	-63.32	122.20	Peak
8		5855.00	41.83	17.33	59.16	-51.64	110.80	Peak
9		5875.00	39.26	17.43	56.69	-48.51	105.20	Peak
10		5925.00	39.16	17.40	56.55	-11.65	68.20	Peak
11		5933.12	42.88	17.45	60.34	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT160 at 5250 MHz		

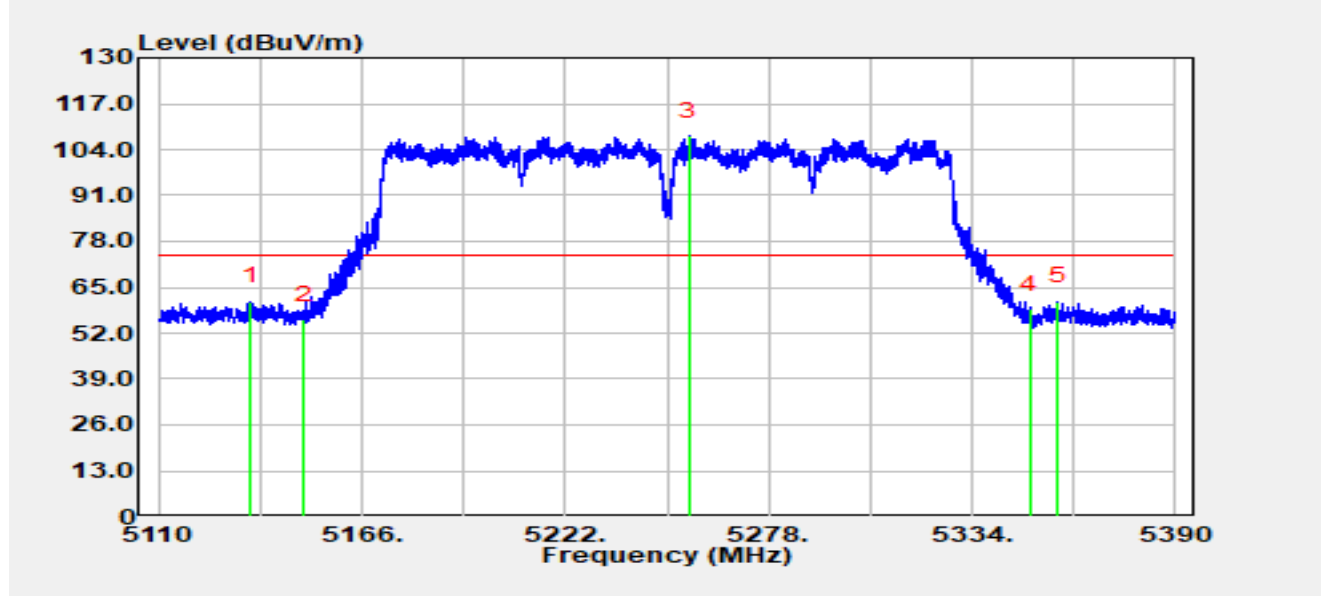


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5135.54	44.96	15.95	60.92	-13.08	74.00	Peak
2		5150.00	39.72	15.96	55.68	-18.32	74.00	Peak
3		5256.22	92.04	15.82	107.86	N/A	N/A	Peak
4		5350.00	43.17	15.69	58.86	-15.14	74.00	Peak
5	*	5357.46	45.18	15.78	60.95	-13.05	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT160 at 5250 MHz		

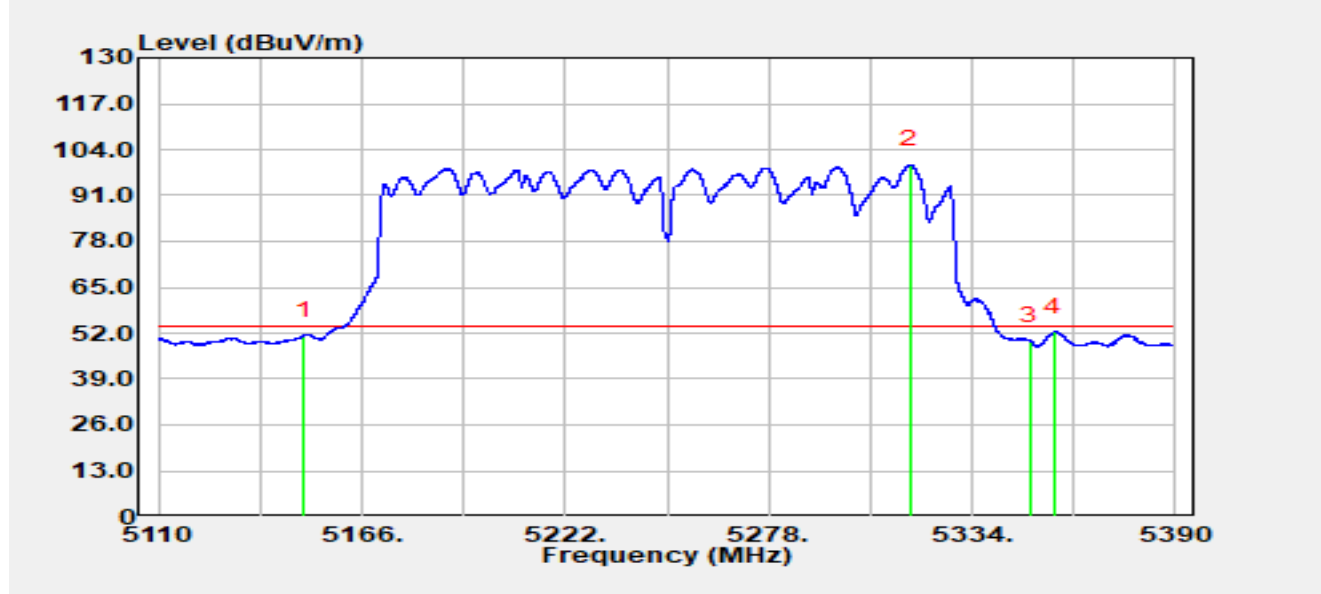


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5150.00	35.26	15.96	51.21	-2.79	54.00	Average
2		5317.09	83.88	15.78	99.66	N/A	N/A	Average
3		5350.00	34.07	15.69	49.76	-4.24	54.00	Average
4	*	5356.68	36.54	15.77	52.30	-1.70	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT160 at 5250 MHz		

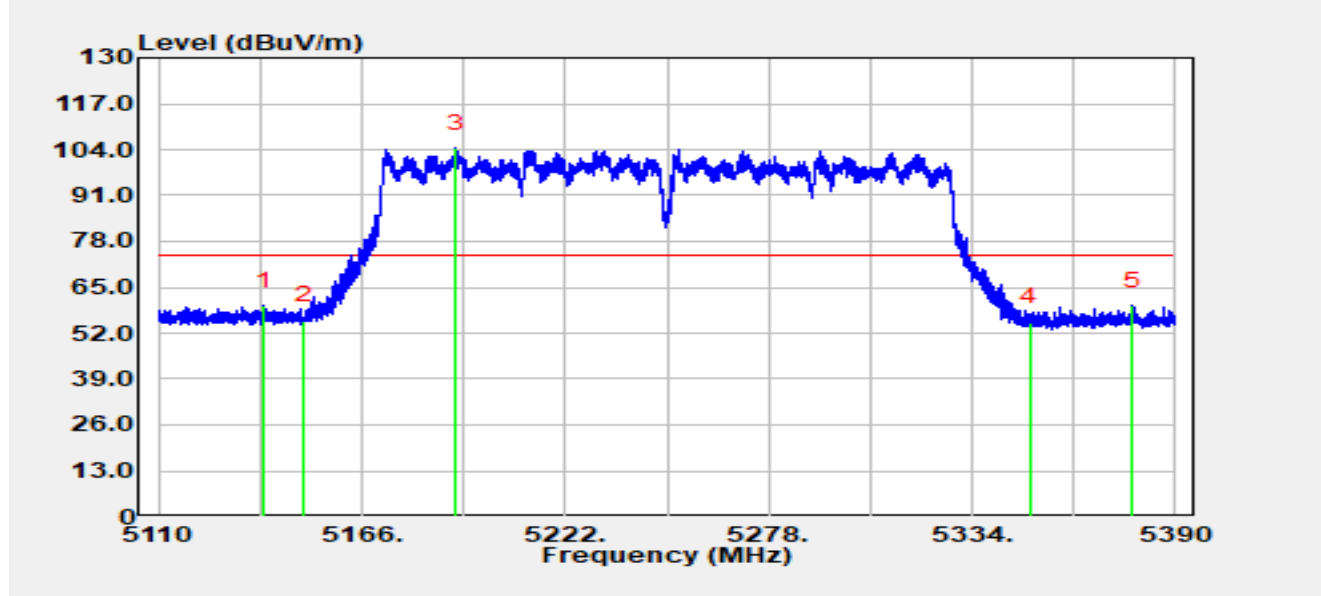


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5139.20	43.81	15.94	59.75	-14.25	74.00	Peak
2		5150.00	39.59	15.96	55.55	-18.45	74.00	Peak
3		5192.01	88.38	15.93	104.31	N/A	N/A	Peak
4		5350.00	39.41	15.69	55.10	-18.90	74.00	Peak
5		5378.02	43.70	15.98	59.69	-14.31	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT160 at 5250 MHz		

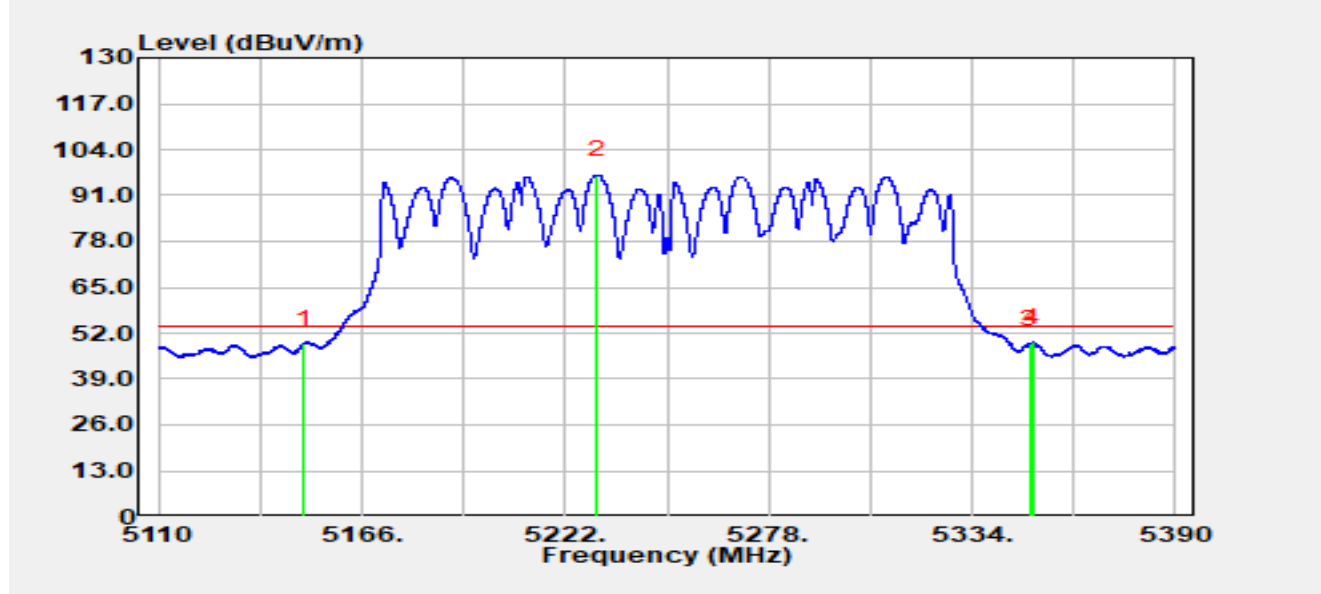


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5150.00	32.92	15.96	48.88	-5.12	54.00	Average
2		5230.74	80.65	16.20	96.85	N/A	N/A	Average
3		5350.00	33.16	15.69	48.85	-5.15	54.00	Average
4	*	5350.77	33.61	15.70	49.31	-4.69	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

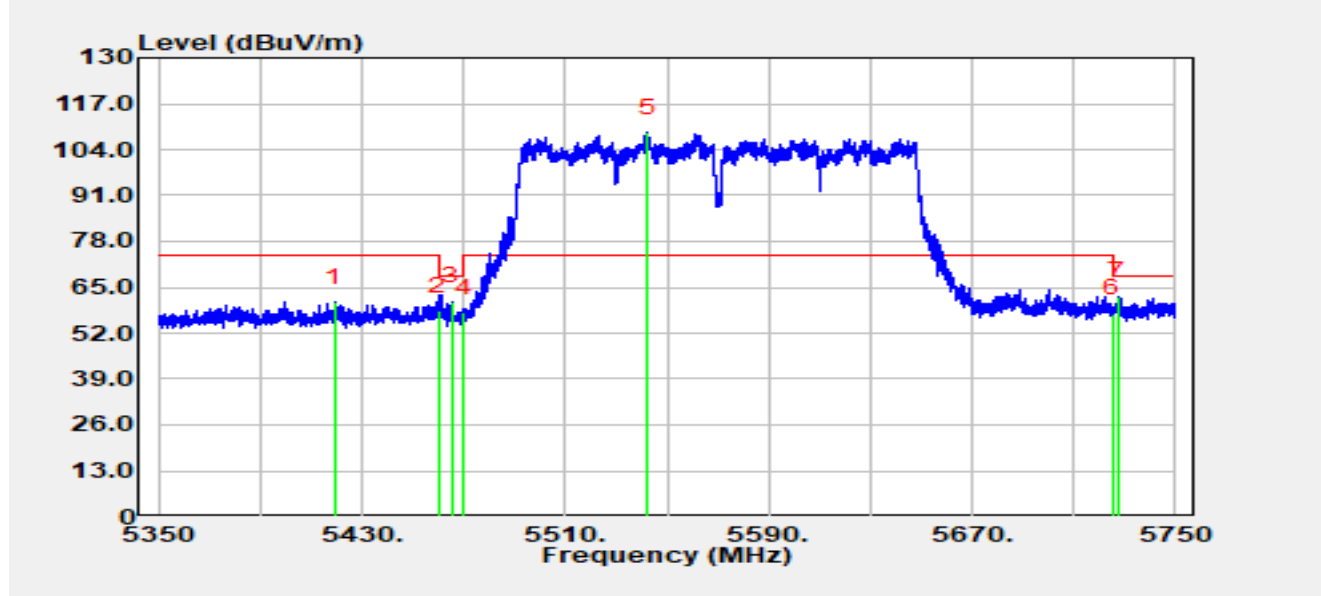


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5419.44	45.02	15.78	60.81	-13.19	74.00	Peak
2		5460.00	42.32	15.99	58.31	-9.89	68.20	Peak
3		5465.28	44.91	15.95	60.85	-7.35	68.20	Peak
4		5470.00	41.83	15.94	57.77	-10.43	68.20	Peak
5		5542.24	92.39	16.51	108.90	N/A	N/A	Peak
6		5725.00	40.58	16.86	57.45	-10.75	68.20	Peak
7	*	5727.40	45.48	16.86	62.34	-5.86	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

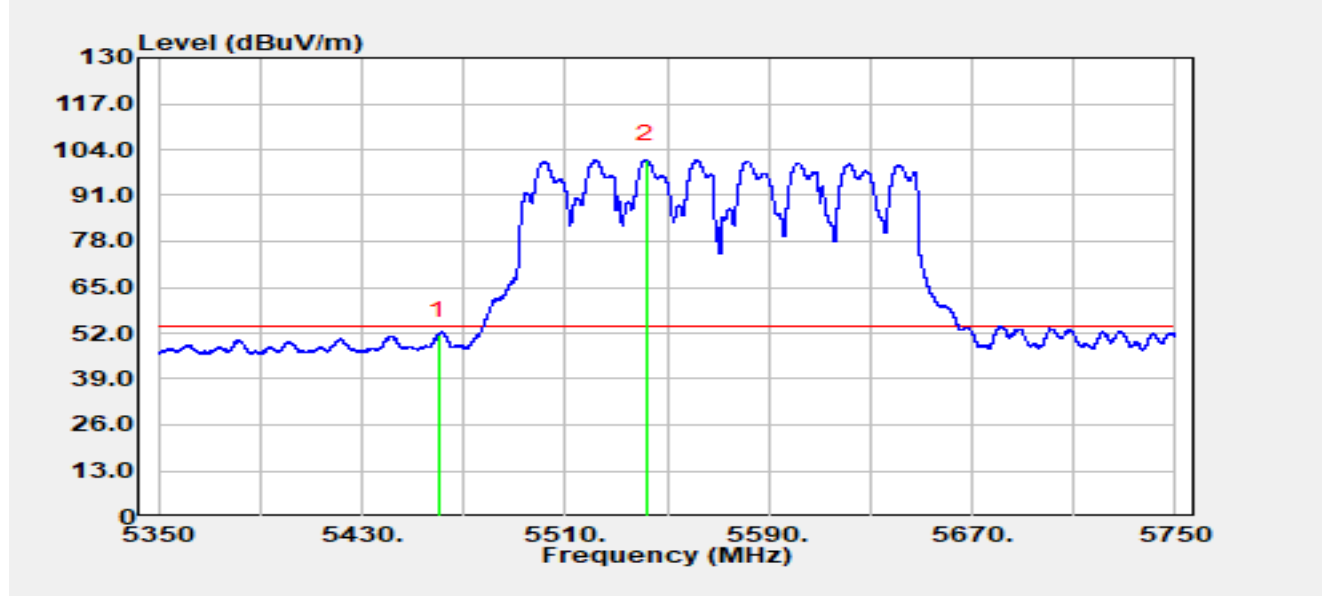


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.00	35.50	15.99	51.49	-2.51	54.00	Average
2		5541.68	84.64	16.51	101.15	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

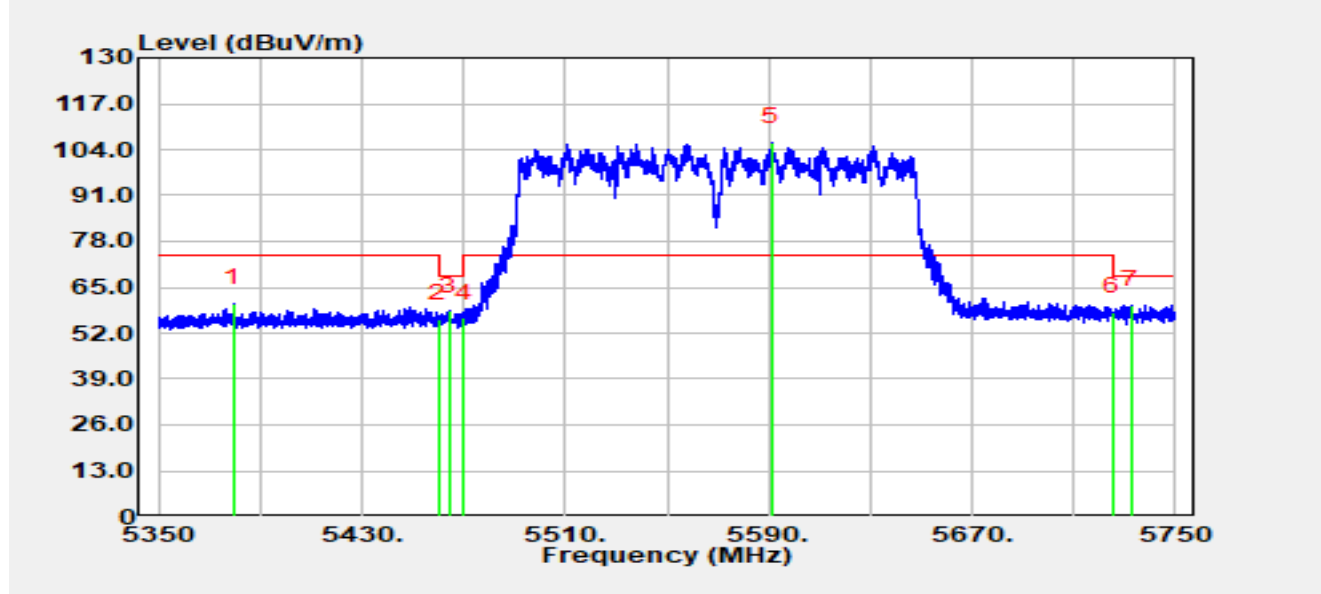


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5379.60	44.36	16.00	60.36	-13.64	74.00	Peak
2		5460.00	40.13	15.99	56.11	-12.09	68.20	Peak
3		5464.12	42.32	15.96	58.28	-9.92	68.20	Peak
4		5470.00	40.46	15.94	56.40	-11.80	68.20	Peak
5		5591.08	89.68	16.46	106.14	N/A	N/A	Peak
6		5725.00	41.25	16.86	58.12	-10.08	68.20	Peak
7	*	5732.44	43.22	16.84	60.06	-8.14	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

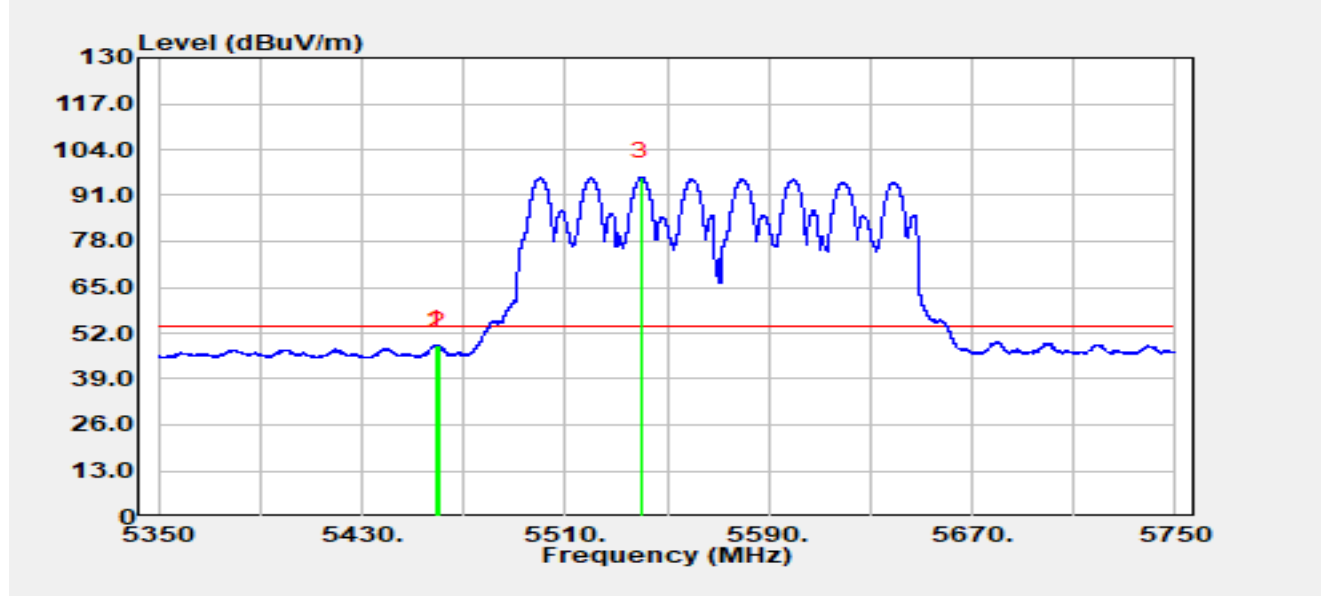


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.28	32.62	15.99	48.61	-5.39	54.00	Average
2		5460.00	32.42	15.99	48.40	-5.60	54.00	Average
3		5540.00	79.72	16.51	96.24	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5180 MHz		

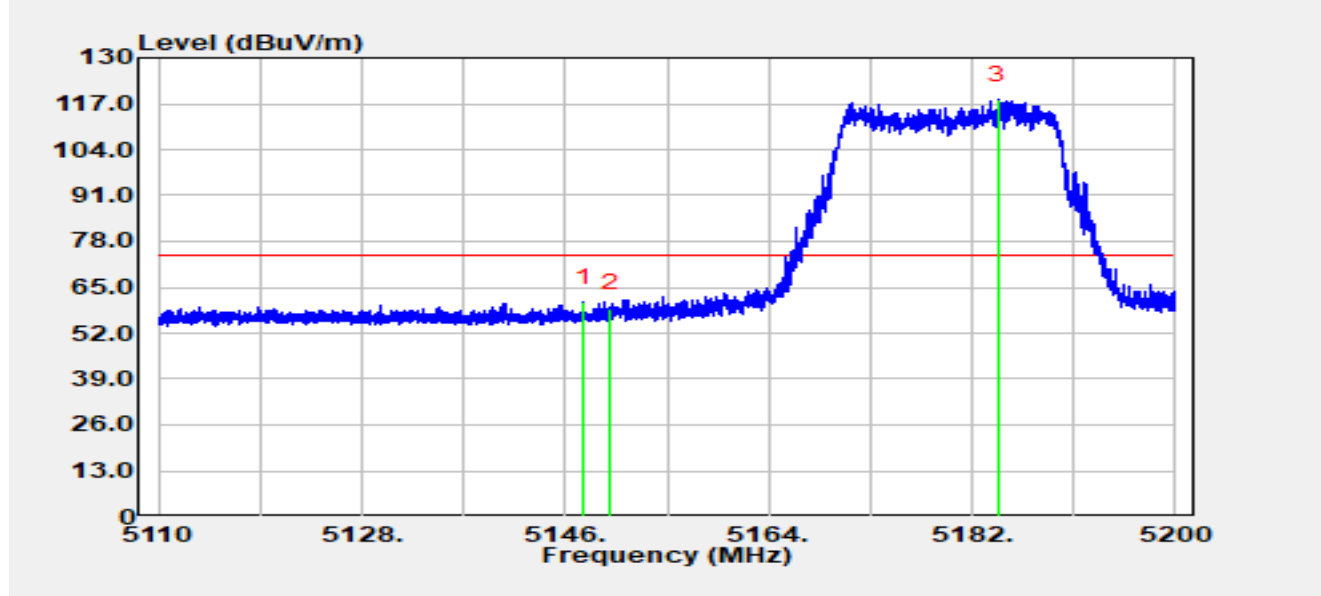


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.65	44.67	15.98	60.65	-13.35	74.00	Peak
2		5150.00	43.02	15.99	59.01	-14.99	74.00	Peak
3		5184.34	102.10	16.01	118.11	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5180 MHz		

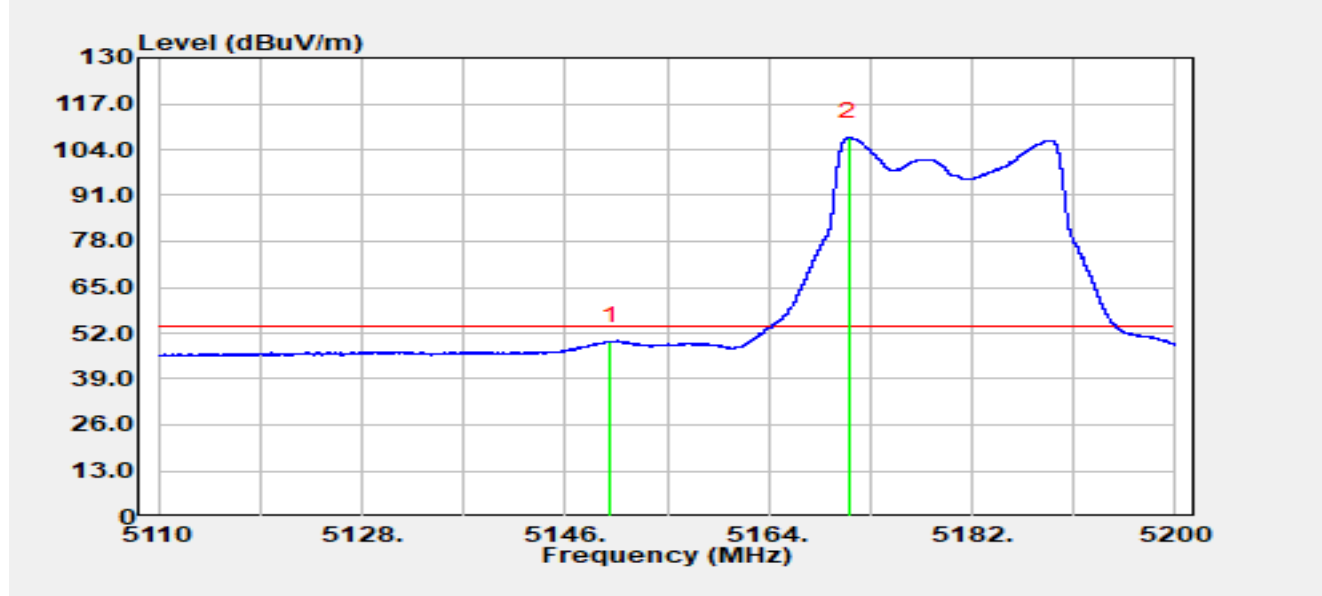


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.00	33.66	15.99	49.65	-4.35	54.00	Average
2		5171.04	91.43	16.02	107.45	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5180 MHz		

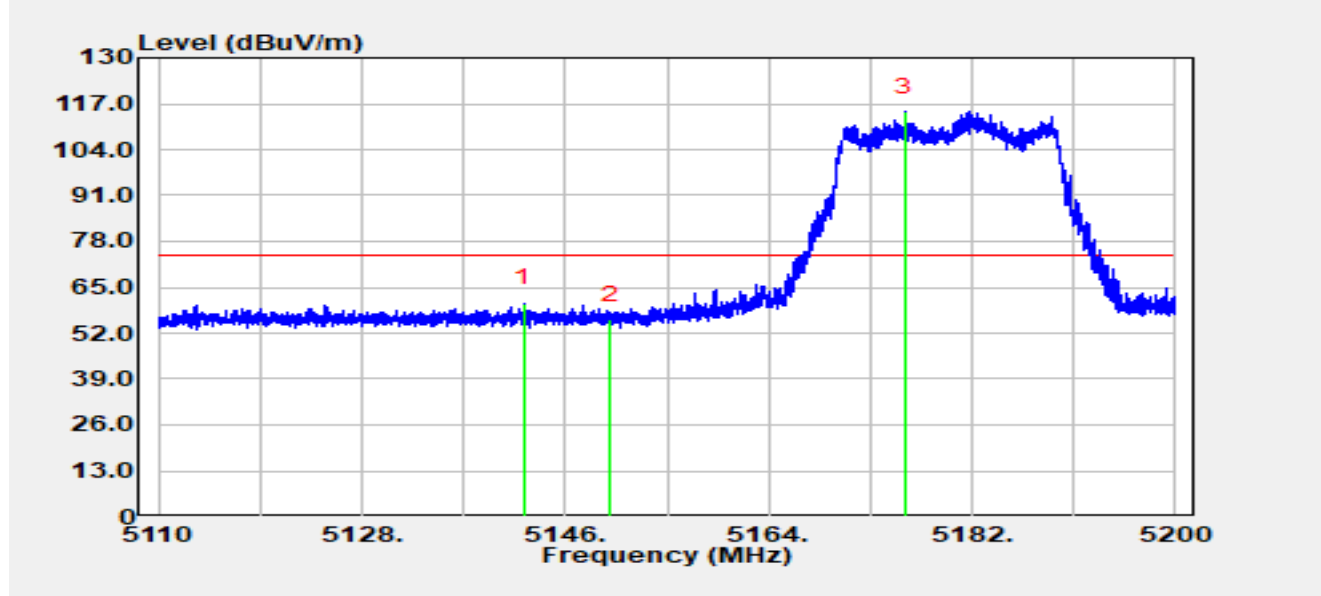


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5142.37	44.64	15.93	60.57	-13.43	74.00	Peak
2		5150.00	39.75	15.96	55.71	-18.29	74.00	Peak
3		5176.04	98.79	15.96	114.75	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5180 MHz		

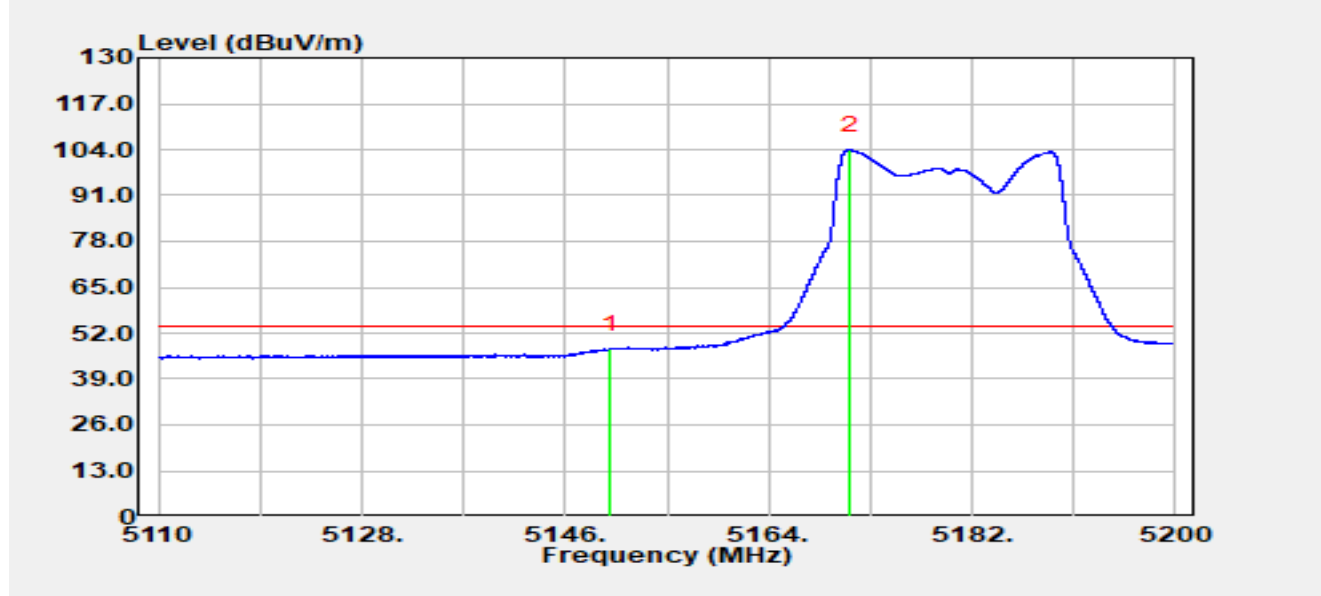


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.00	31.61	15.96	47.57	-6.43	54.00	Average
2		5171.16	87.95	15.97	103.92	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5320 MHz		

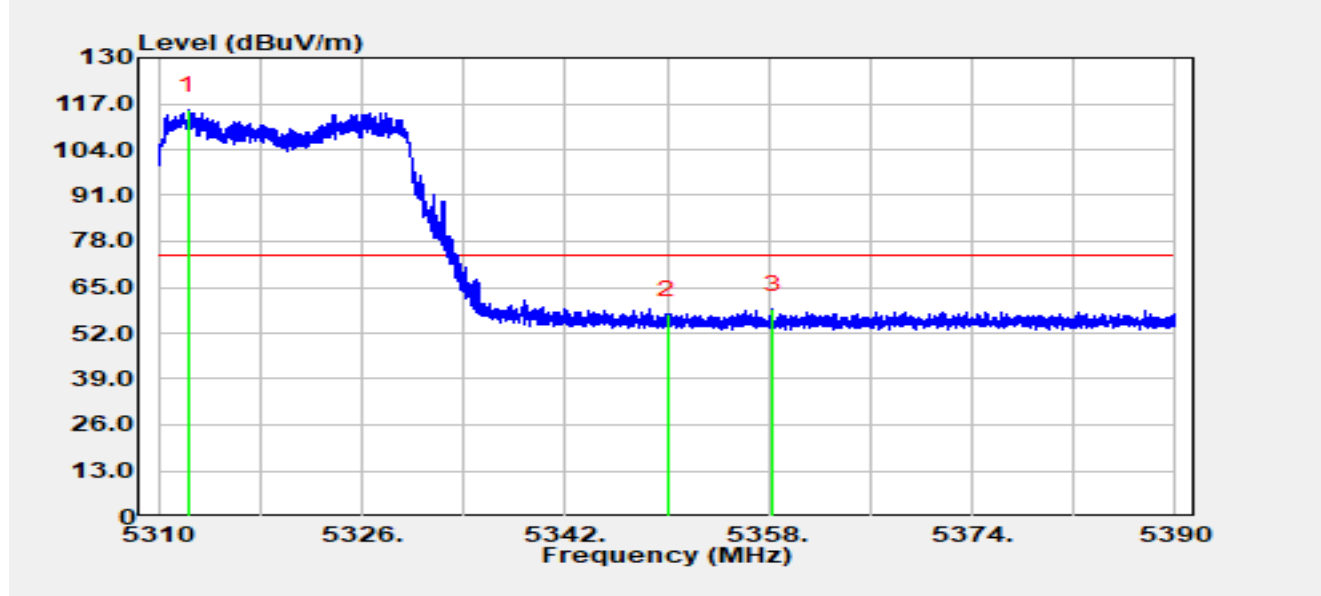


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		5312.35	99.39	15.77	115.16	N/A	N/A	Peak
2		5350.00	41.59	15.69	57.28	-16.72	74.00	Peak
3	*	5358.30	42.86	15.78	58.64	-15.36	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5320 MHz		

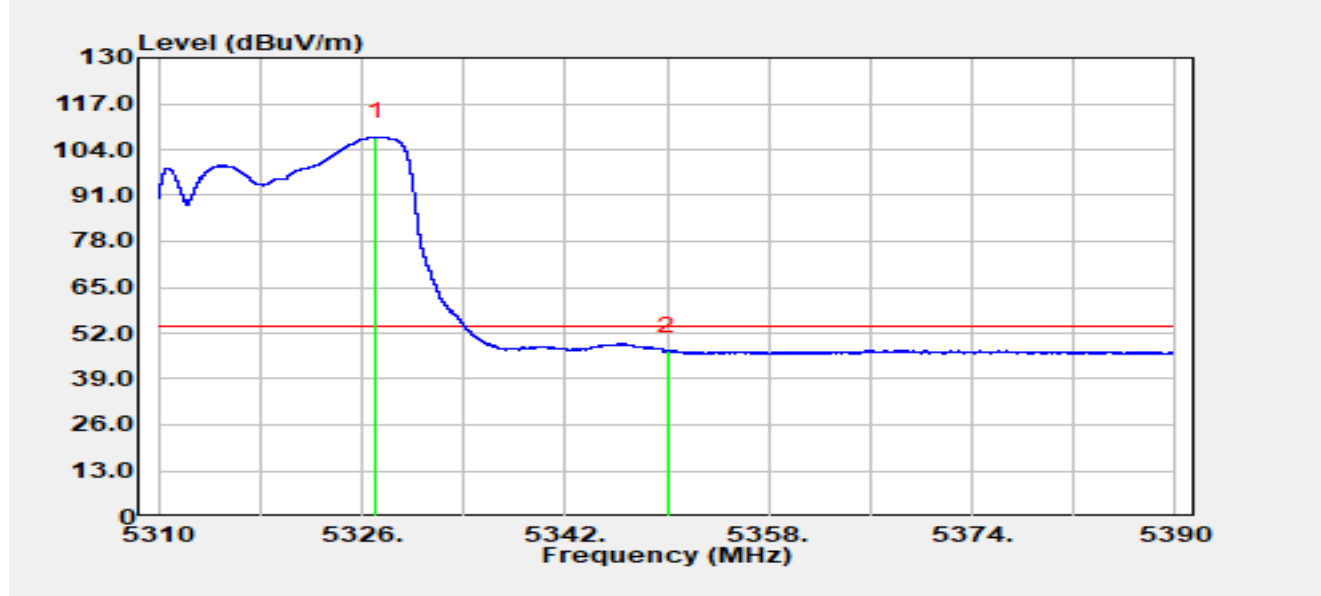


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5327.08	91.83	15.81	107.65	N/A	N/A	Average
2	*	5350.00	31.25	15.69	46.94	-7.06	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5320 MHz		

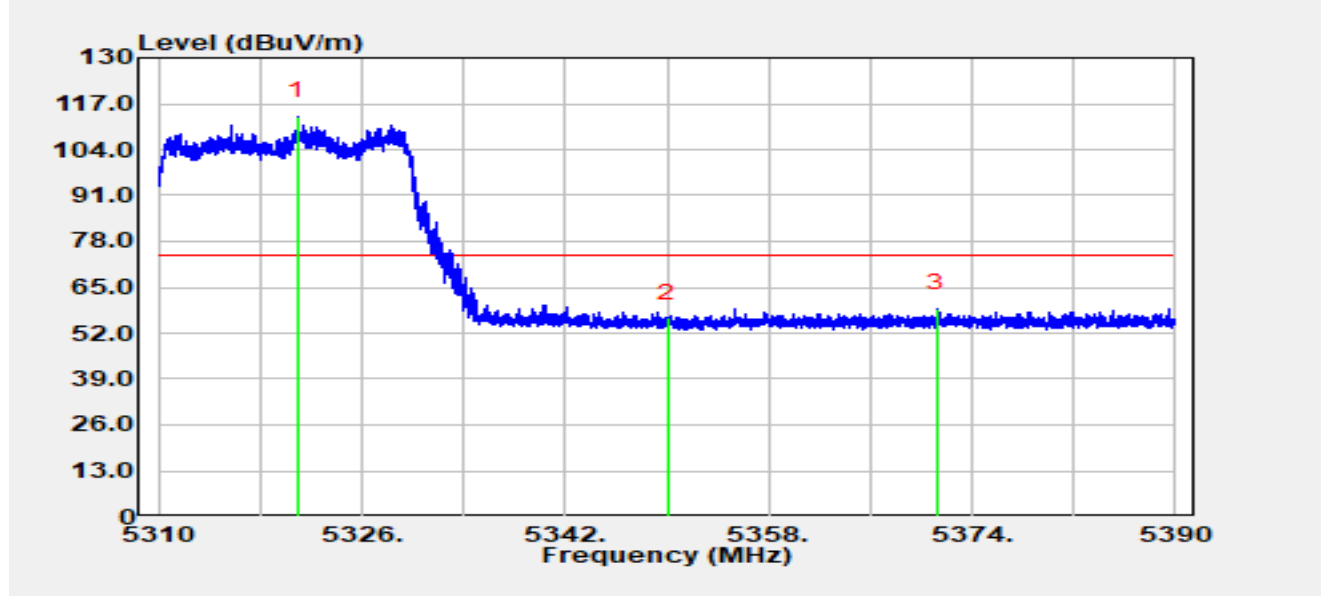


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5320.91	97.54	15.79	113.33	N/A	N/A	Peak
2		5350.00	40.68	15.69	56.37	-17.63	74.00	Peak
3	*	5371.19	43.16	15.92	59.08	-14.92	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5320 MHz		

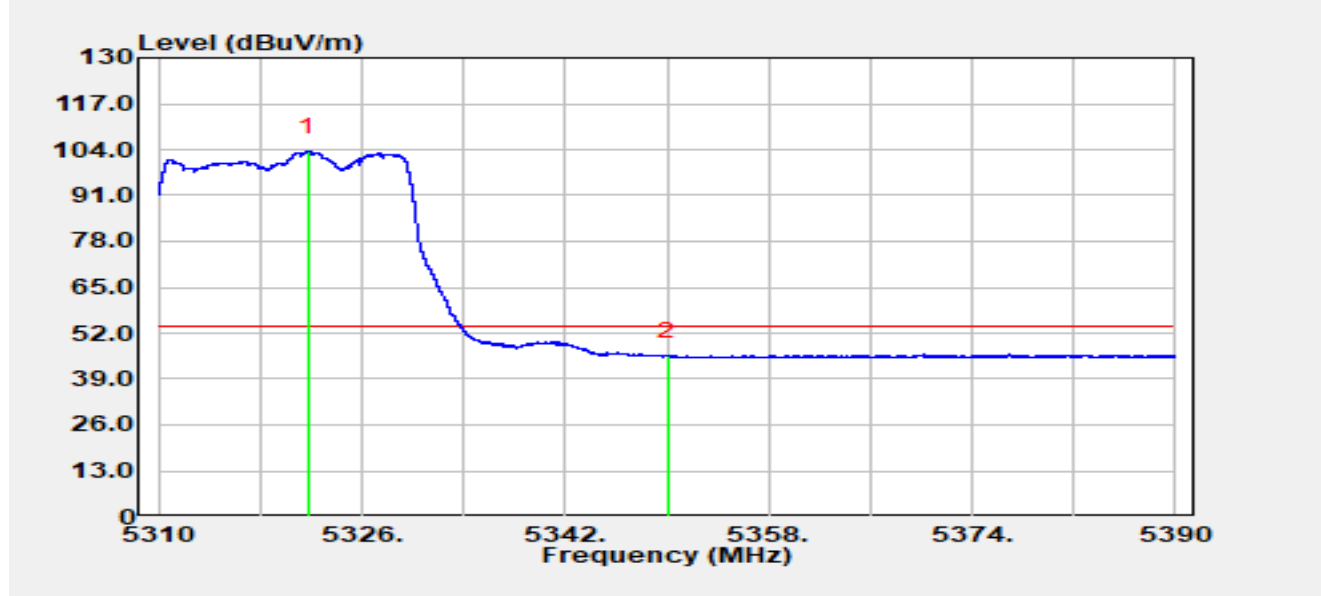


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5321.78	87.61	15.79	103.40	N/A	N/A	Average
2	*	5350.00	29.83	15.69	45.52	-8.48	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

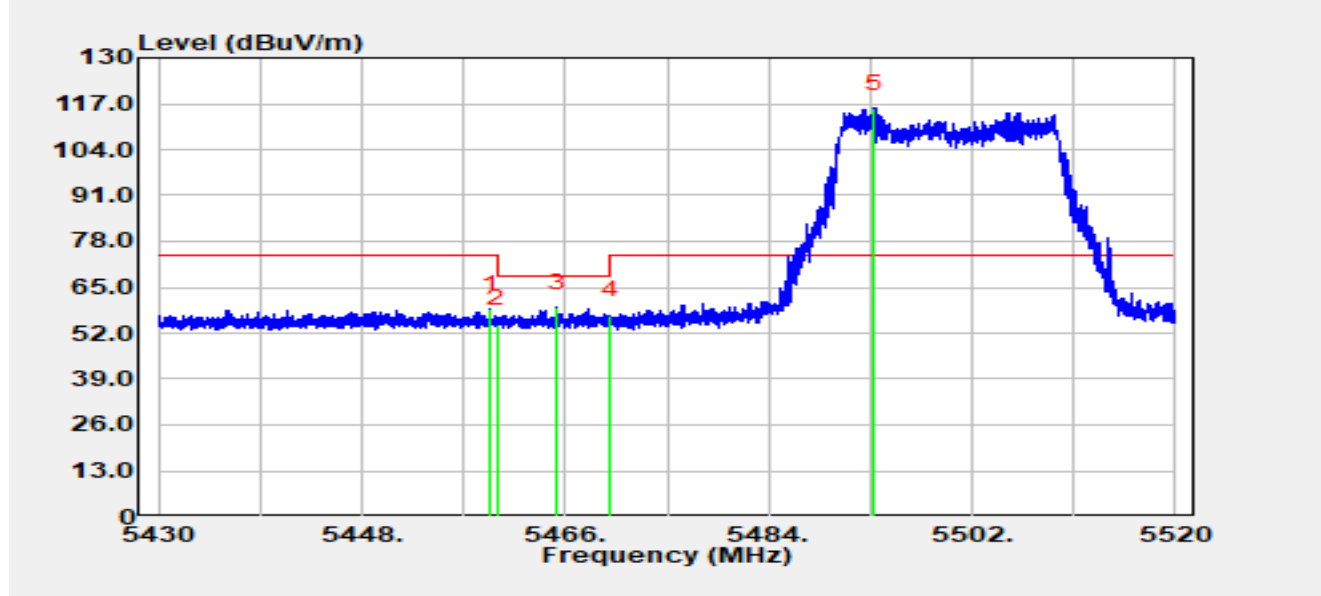


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.32	42.74	15.99	58.73	-15.27	74.00	Peak
2		5460.00	38.69	15.99	54.68	-13.52	68.20	Peak
3	*	5465.29	43.18	15.95	59.12	-9.08	68.20	Peak
4		5470.00	41.09	15.94	57.04	-11.16	68.20	Peak
5		5493.39	99.38	16.19	115.57	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

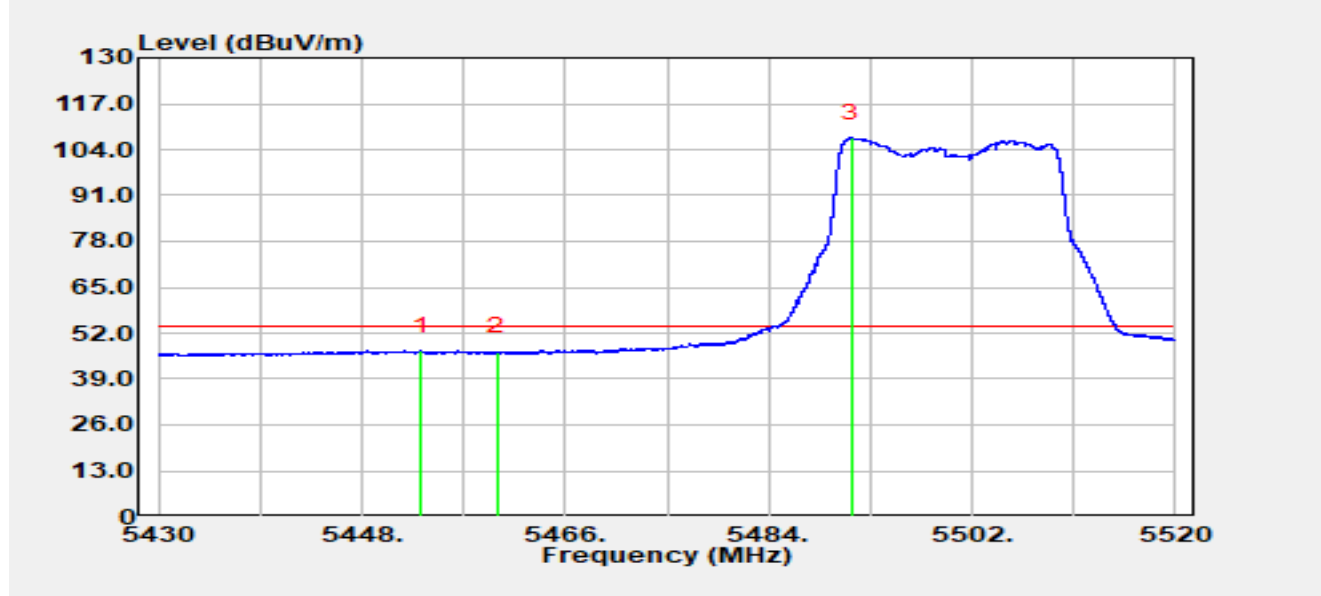


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5453.23	31.01	16.02	47.03	-6.97	54.00	Average
2		5460.00	30.64	15.99	46.63	-7.37	54.00	Average
3		5491.33	91.03	16.18	107.20	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

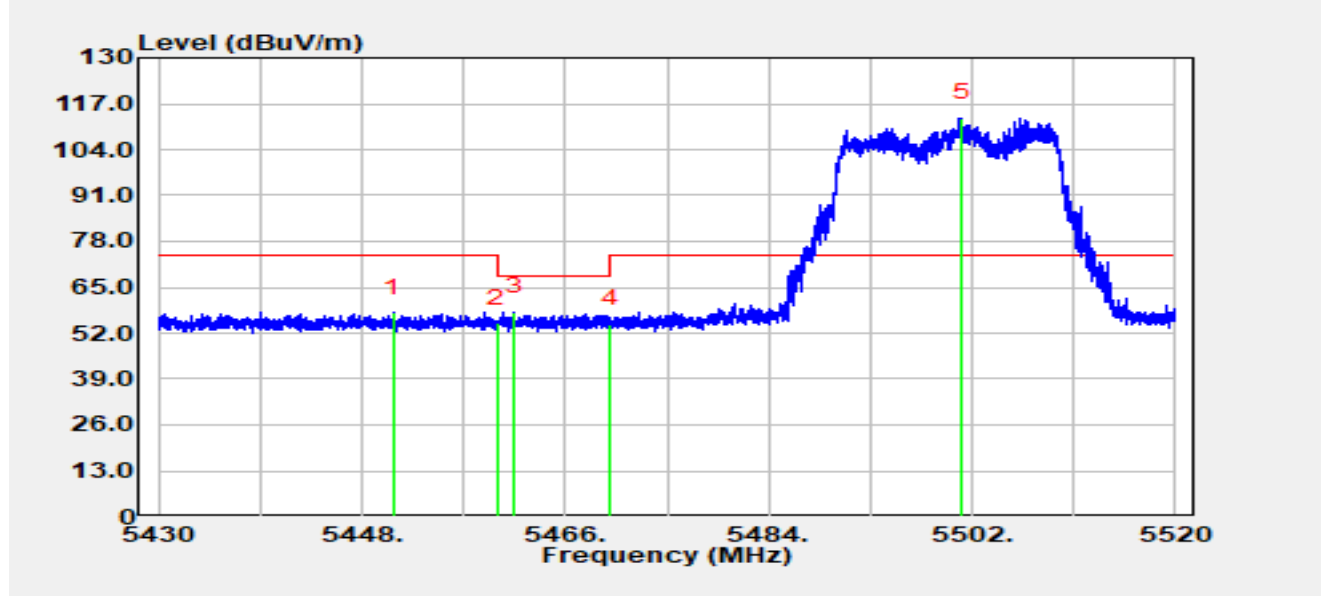


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5450.80	41.80	16.02	57.82	-16.18	74.00	Peak
2		5460.00	38.72	15.99	54.70	-13.50	68.20	Peak
3	*	5461.48	42.08	15.98	58.06	-10.14	68.20	Peak
4		5470.00	38.69	15.94	54.63	-13.57	68.20	Peak
5		5501.06	96.77	16.24	113.01	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

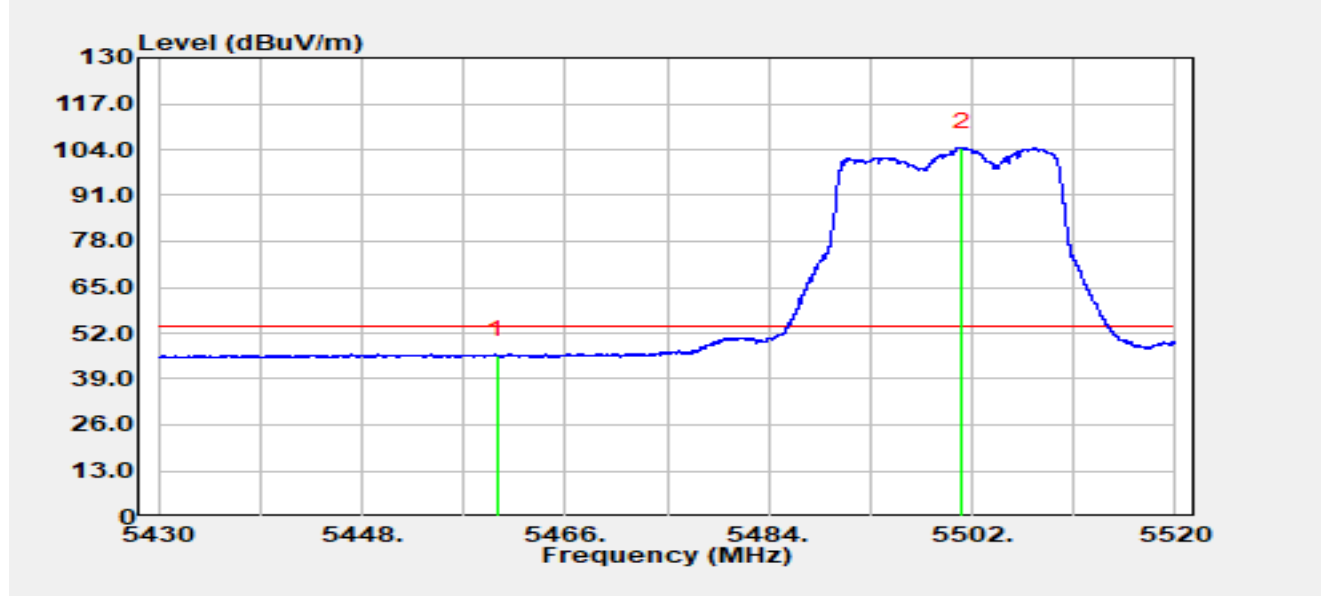


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.00	29.69	15.99	45.68	-8.32	54.00	Average
2		5501.14	88.37	16.24	104.61	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5700 MHz		

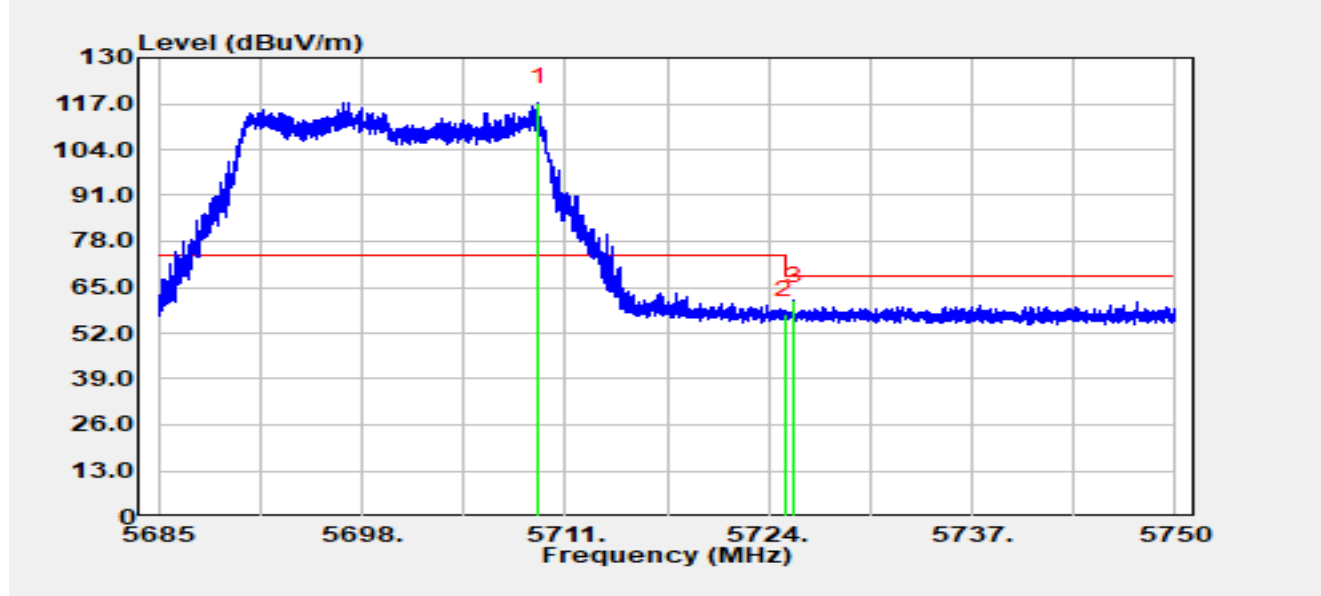


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5709.28	100.46	16.94	117.40	N/A	N/A	Peak
2		5725.00	40.47	16.86	57.33	-10.87	68.20	Peak
3	*	5725.61	44.33	16.86	61.19	-7.01	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5700 MHz		

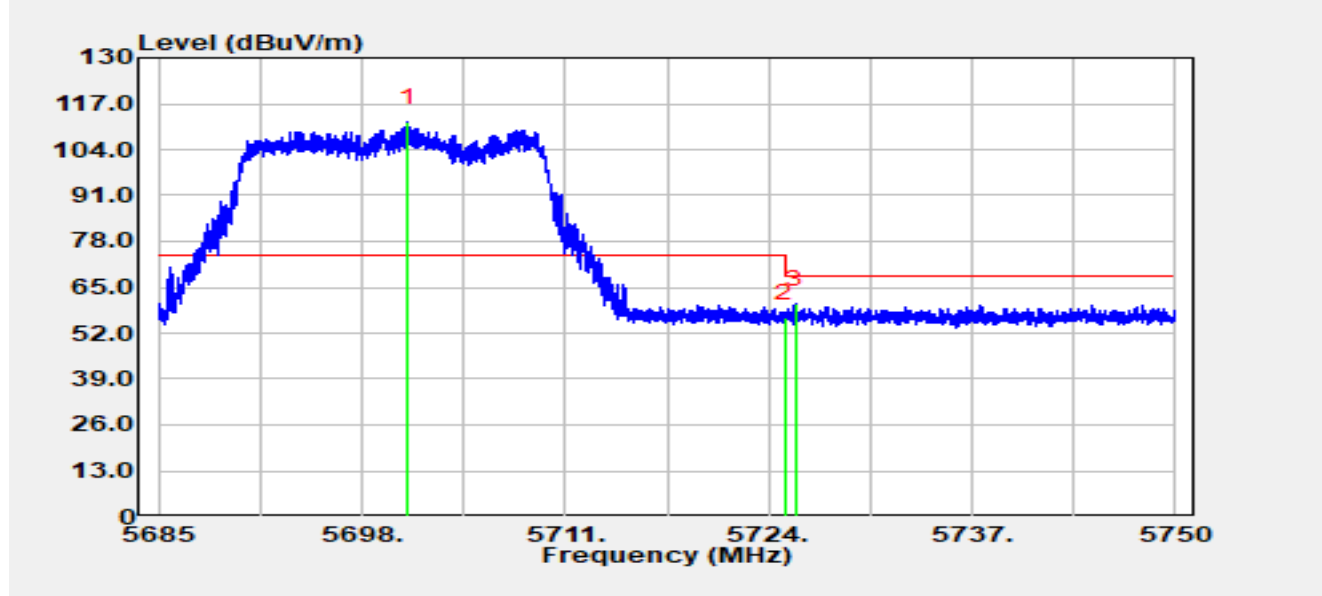


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5700.96	94.79	16.98	111.76	N/A	N/A	Peak
2		5725.00	39.45	16.86	56.31	-11.89	68.20	Peak
3	*	5725.68	43.38	16.86	60.24	-7.96	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5745 MHz		

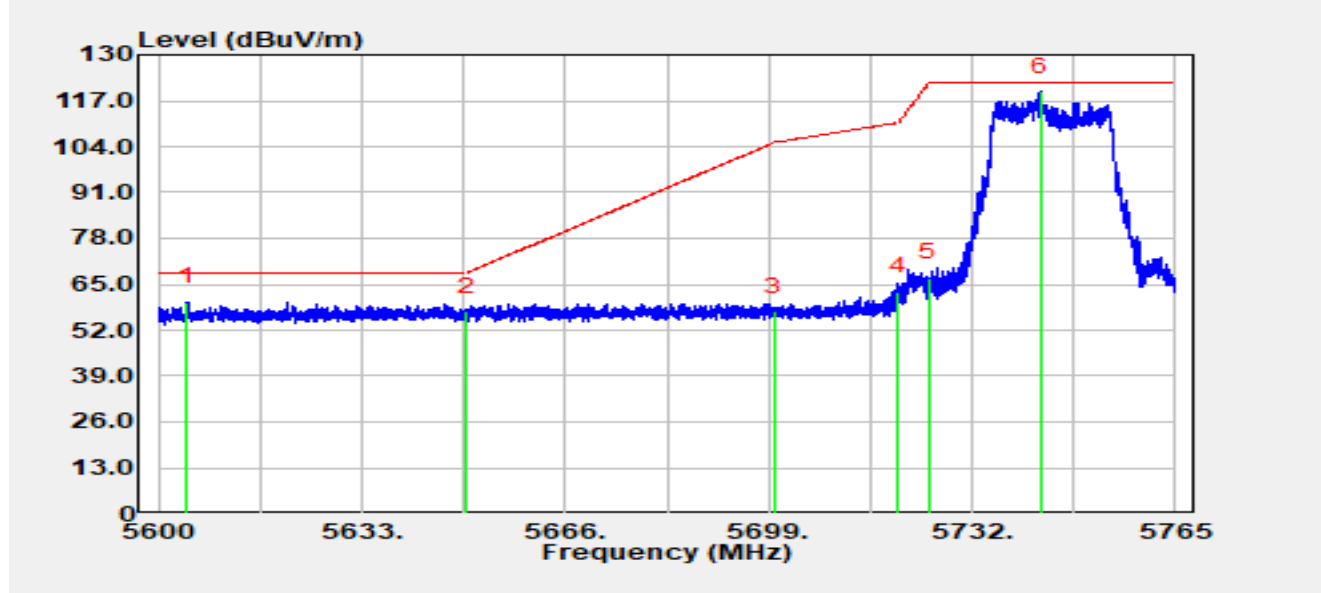


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5604.65	43.50	16.59	60.09	-8.11	68.20	Peak
2		5650.00	40.49	16.78	57.27	-10.93	68.20	Peak
3		5700.00	40.29	16.98	57.28	-47.92	105.20	Peak
4		5720.00	45.95	16.89	62.83	-47.97	110.80	Peak
5		5725.00	50.01	16.86	66.87	-55.33	122.20	Peak
6		5743.02	102.72	16.82	119.53	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5745 MHz		

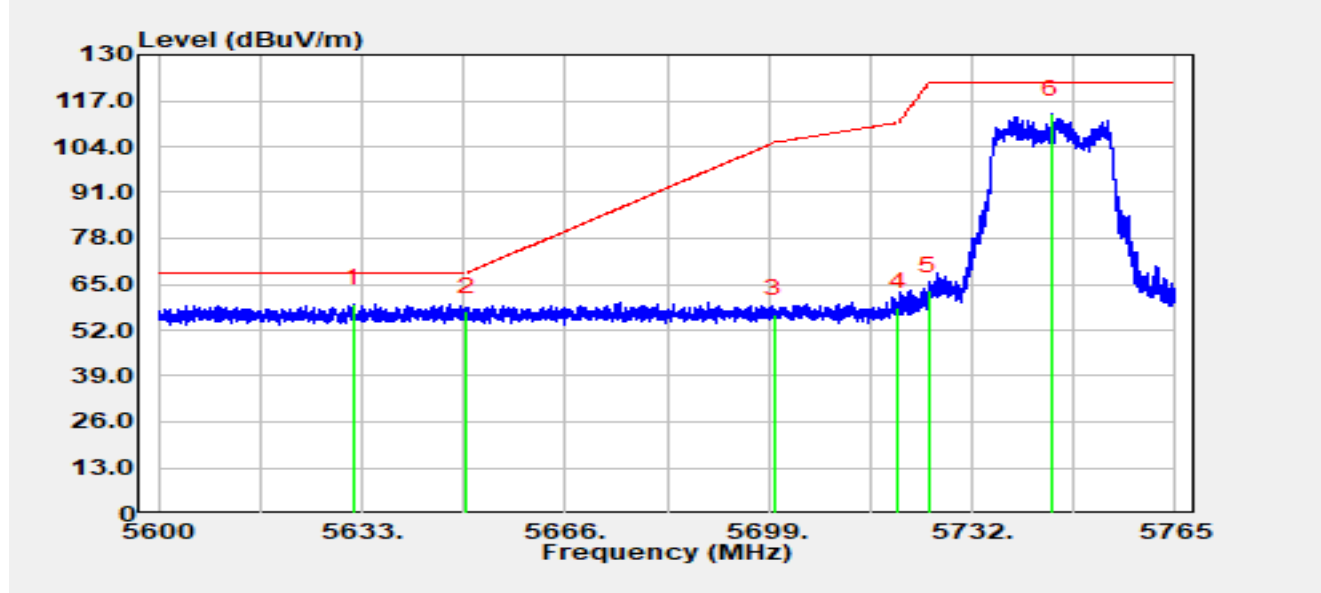


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5631.70	42.97	16.62	59.59	N/A	N/A	Peak
2		5650.00	40.37	16.78	57.15	-11.05	68.20	Peak
3		5700.00	39.56	16.98	56.54	-48.66	105.20	Peak
4		5720.00	41.72	16.89	58.60	-52.20	110.80	Peak
5		5725.00	46.29	16.86	63.15	-59.05	122.20	Peak
6	*	5744.90	96.33	16.82	113.15	-9.05	122.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5825 MHz		

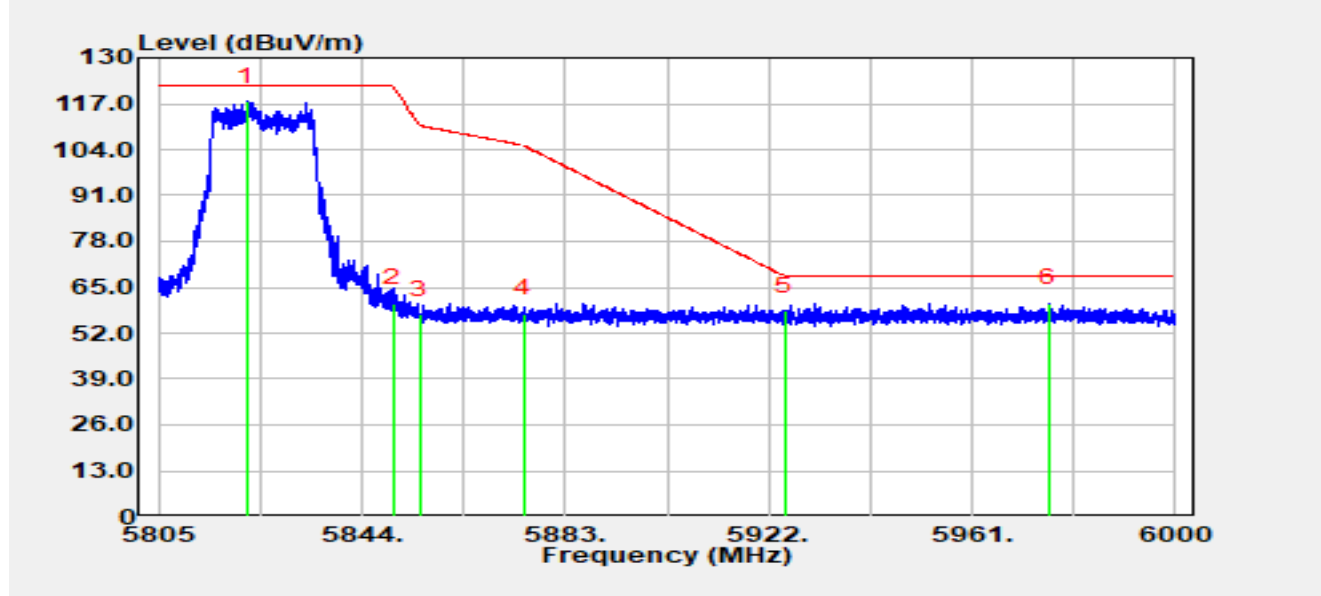


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5821.87	100.44	17.20	117.64	N/A	N/A	Peak
2		5850.00	43.05	17.36	60.40	-61.80	122.20	Peak
3		5855.00	39.92	17.33	57.25	-53.55	110.80	Peak
4		5875.00	39.98	17.43	57.41	-47.79	105.20	Peak
5		5925.00	40.74	17.40	58.14	-10.06	68.20	Peak
6	*	5975.74	42.72	17.77	60.49	-7.71	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5825 MHz		

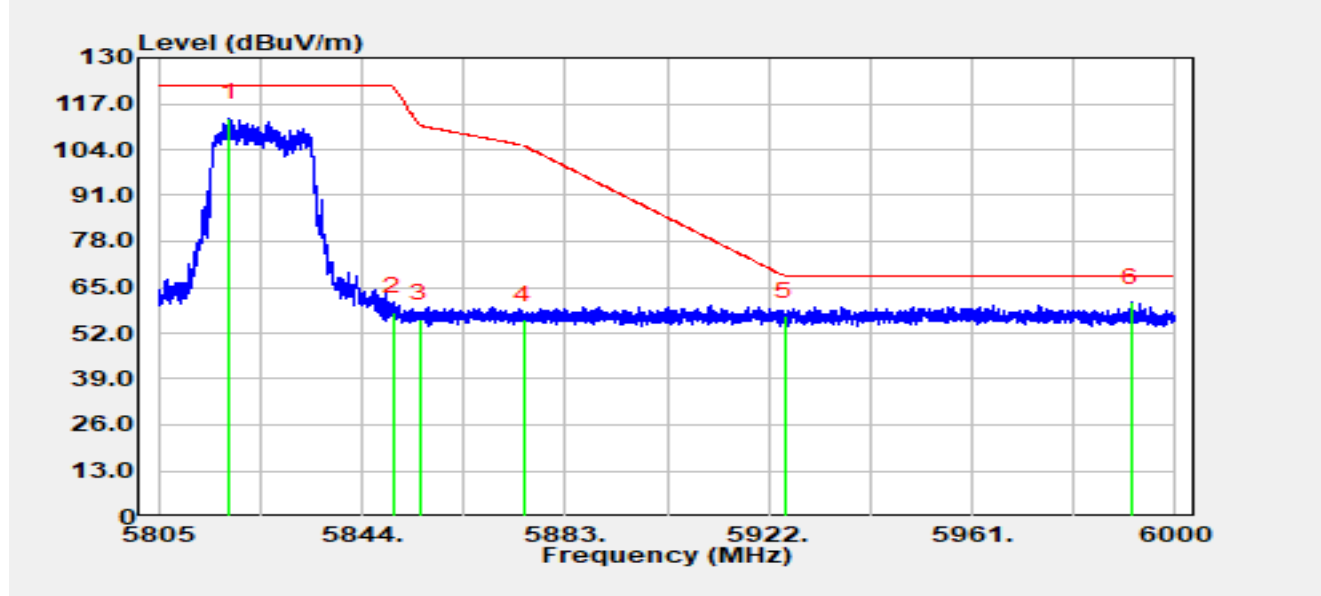


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5818.59	95.65	17.19	112.84	-9.36	122.20	Peak
2		5850.00	40.56	17.36	57.92	-64.28	122.20	Peak
3		5855.00	38.82	17.33	56.14	-54.66	110.80	Peak
4		5875.00	38.34	17.43	55.77	-49.43	105.20	Peak
5		5925.00	39.27	17.40	56.66	-11.54	68.20	Peak
6		5991.62	43.09	17.55	60.64	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5190 MHz		

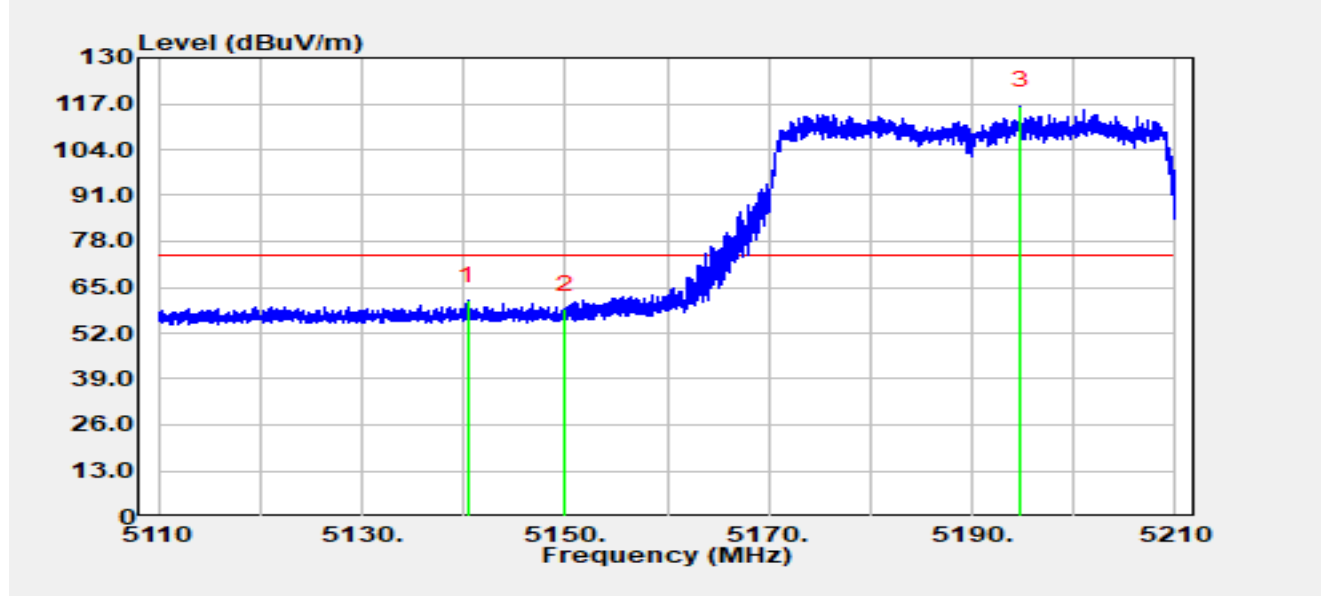


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5140.38	45.23	15.94	61.17	-12.83	74.00	Peak
2		5150.00	42.68	15.96	58.64	-15.36	74.00	Peak
3		5194.78	100.58	15.92	116.50	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5190 MHz		

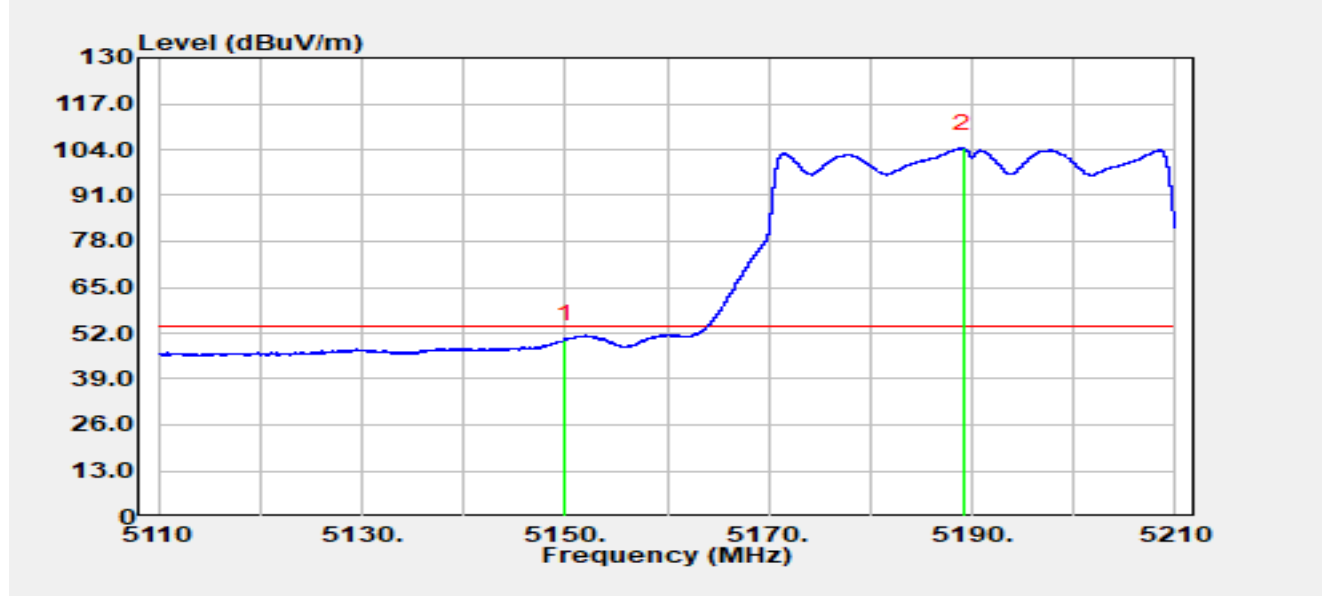


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.00	34.25	15.96	50.21	-3.79	54.00	Average
2		5189.11	88.44	15.94	104.37	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5190 MHz		

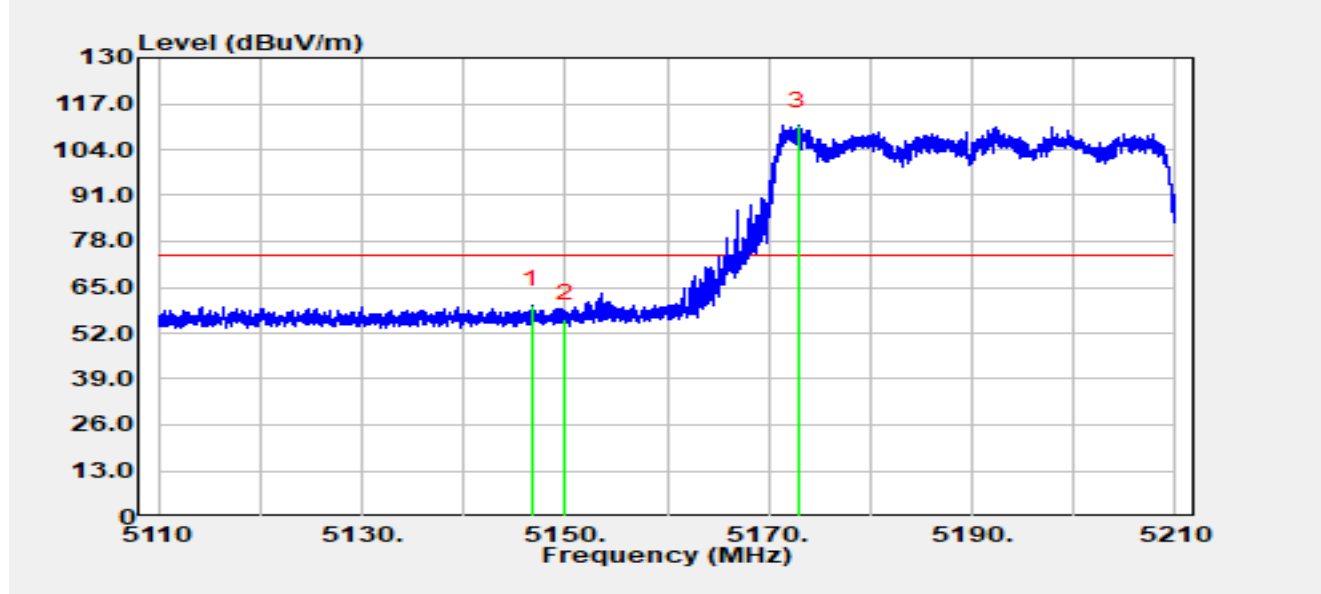


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5146.77	44.01	15.94	59.95	-14.05	74.00	Peak
2		5150.00	40.00	15.96	55.96	-18.04	74.00	Peak
3		5172.88	94.88	15.97	110.85	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5190 MHz		

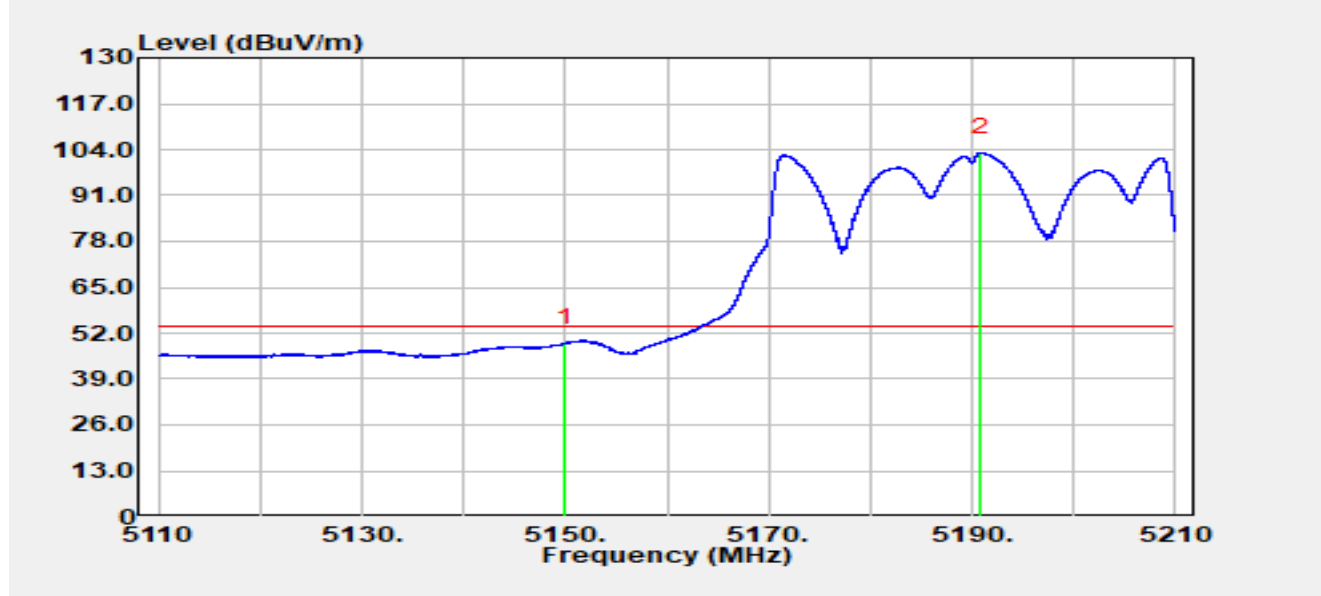


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.00	33.14	15.96	49.10	-4.90	54.00	Average
2		5190.86	87.22	15.93	103.15	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5310 MHz		

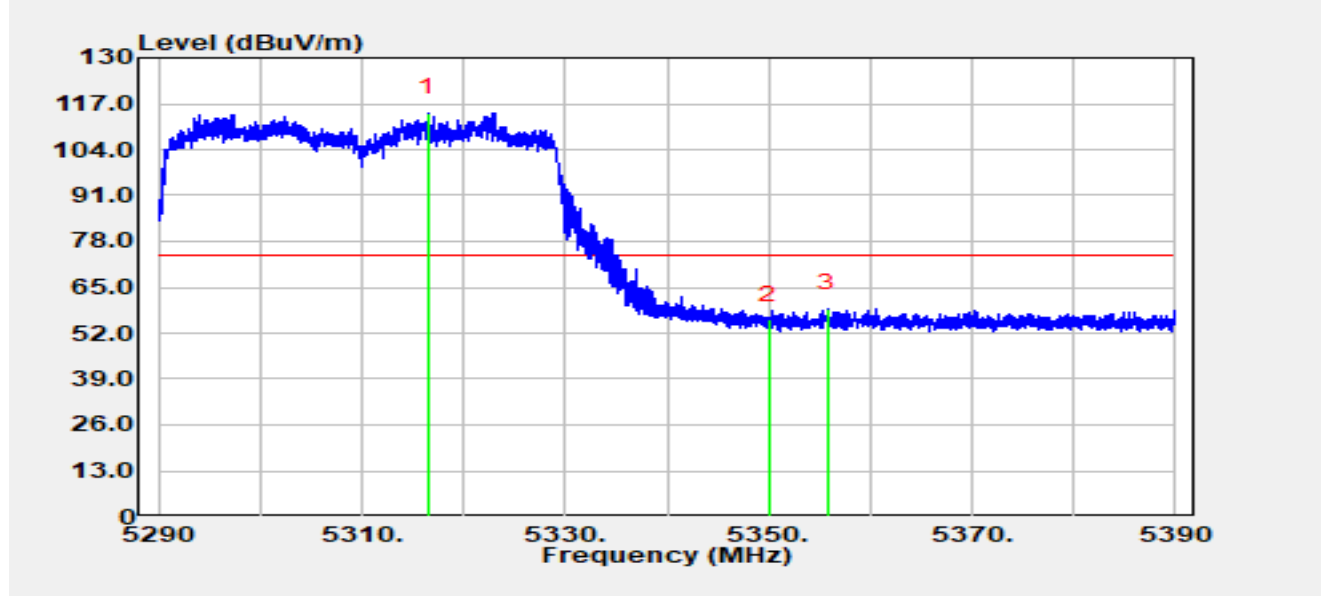


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5316.48	98.63	15.77	114.40	N/A	N/A	Peak
2		5350.00	40.07	15.69	55.76	-18.24	74.00	Peak
3	*	5355.77	43.17	15.76	58.93	-15.07	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5310 MHz		

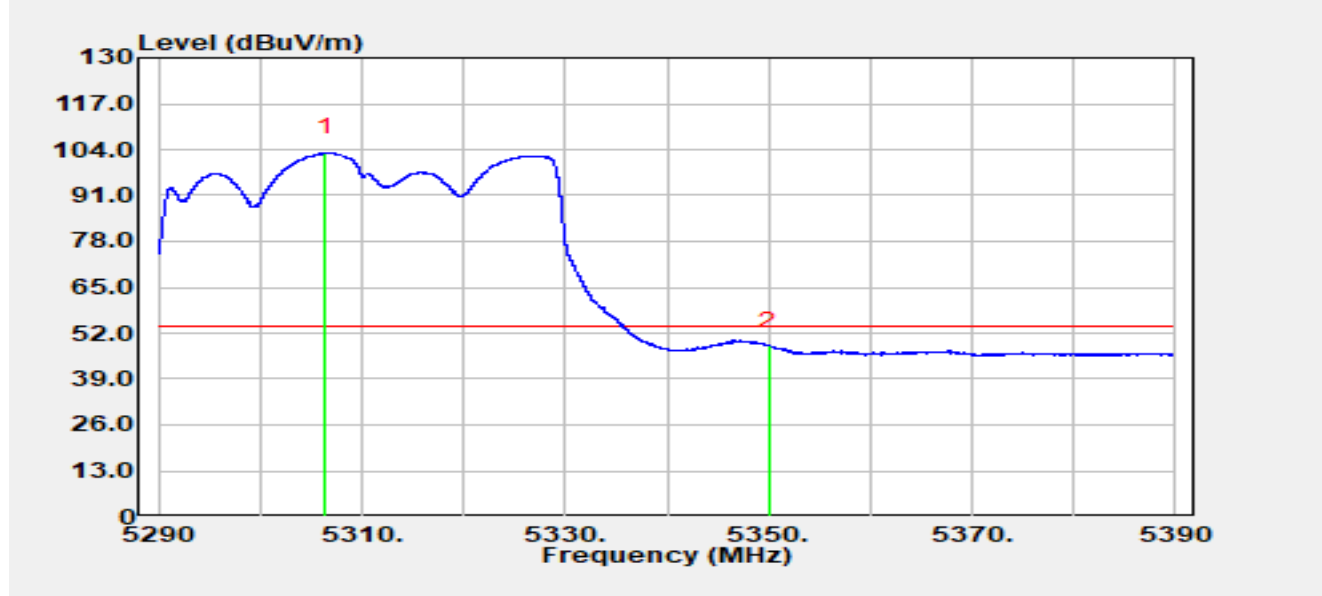


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5306.43	87.22	15.80	103.02	N/A	N/A	Average
2	*	5350.00	32.76	15.69	48.45	-5.55	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5310 MHz		

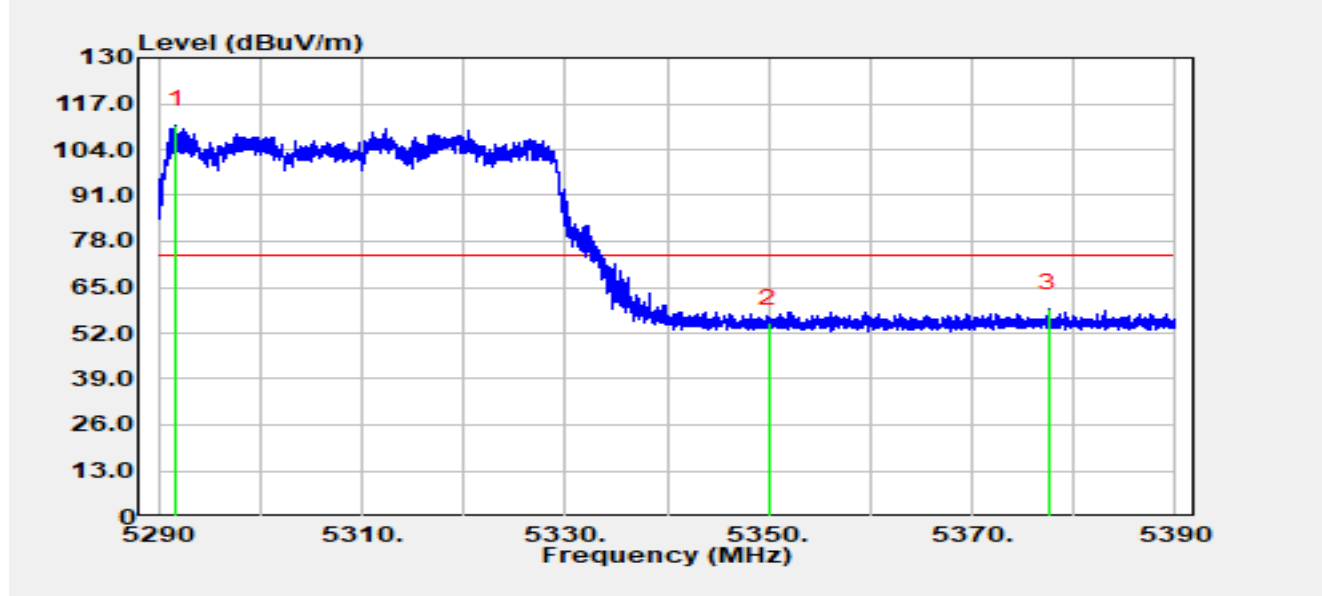


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5291.74	95.13	15.81	110.94	N/A	N/A	Peak
2		5350.00	39.10	15.69	54.80	-19.20	74.00	Peak
3	*	5377.52	42.98	15.98	58.96	-15.04	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5310 MHz		

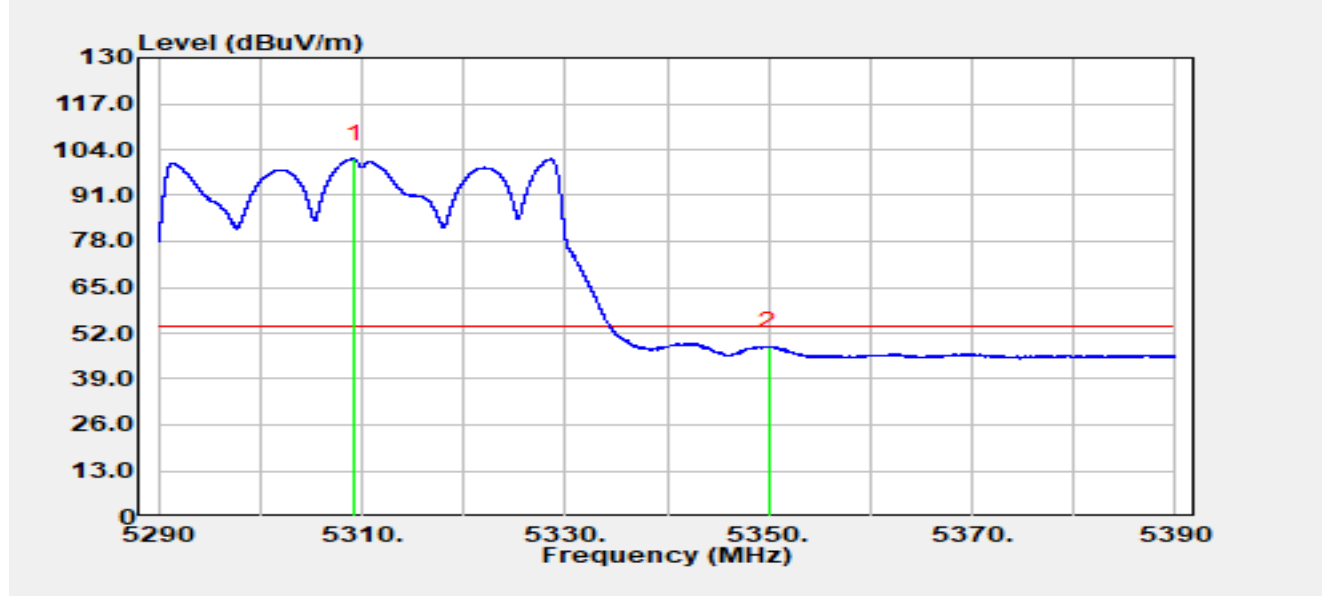


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5309.22	85.64	15.79	101.43	N/A	N/A	Average
2	*	5350.00	32.49	15.69	48.18	-5.82	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5510 MHz		

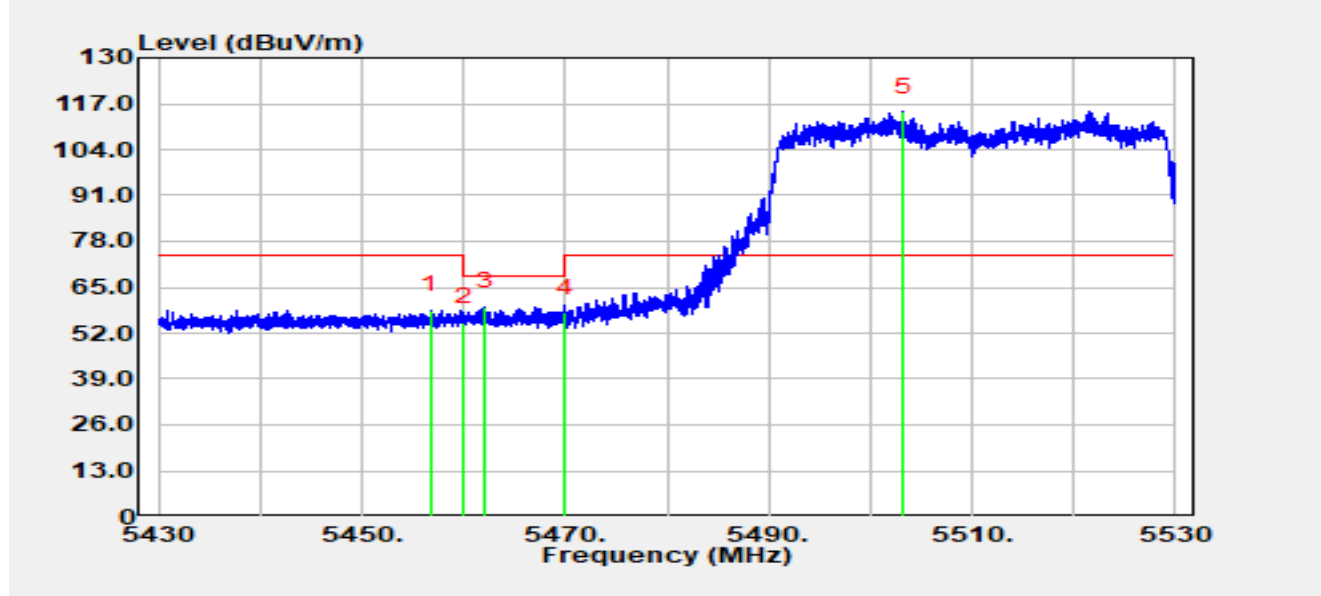


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5456.73	42.41	16.01	58.42	-15.58	74.00	Peak
2		5460.00	39.02	15.99	55.00	-13.20	68.20	Peak
3	*	5462.07	43.53	15.97	59.51	-8.69	68.20	Peak
4		5470.00	41.78	15.94	57.72	-10.48	68.20	Peak
5		5503.20	98.48	16.25	114.74	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5510 MHz		

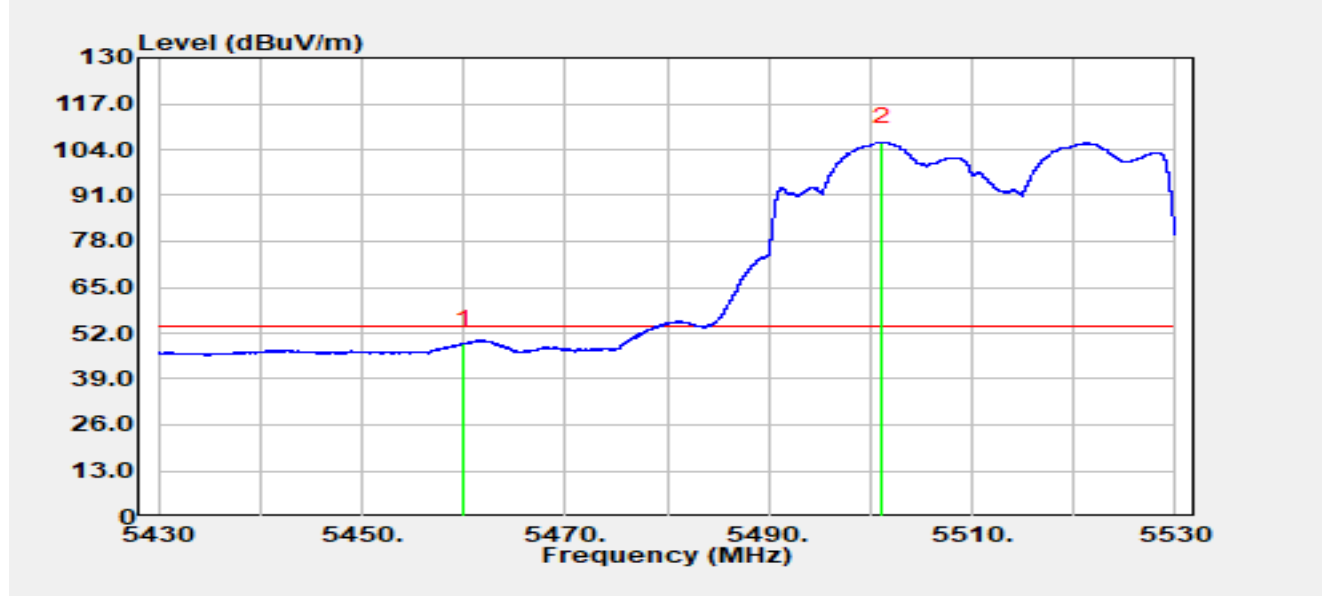


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.00	32.90	15.99	48.89	-5.11	54.00	Average
2		5501.19	89.75	16.24	105.99	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5510 MHz		

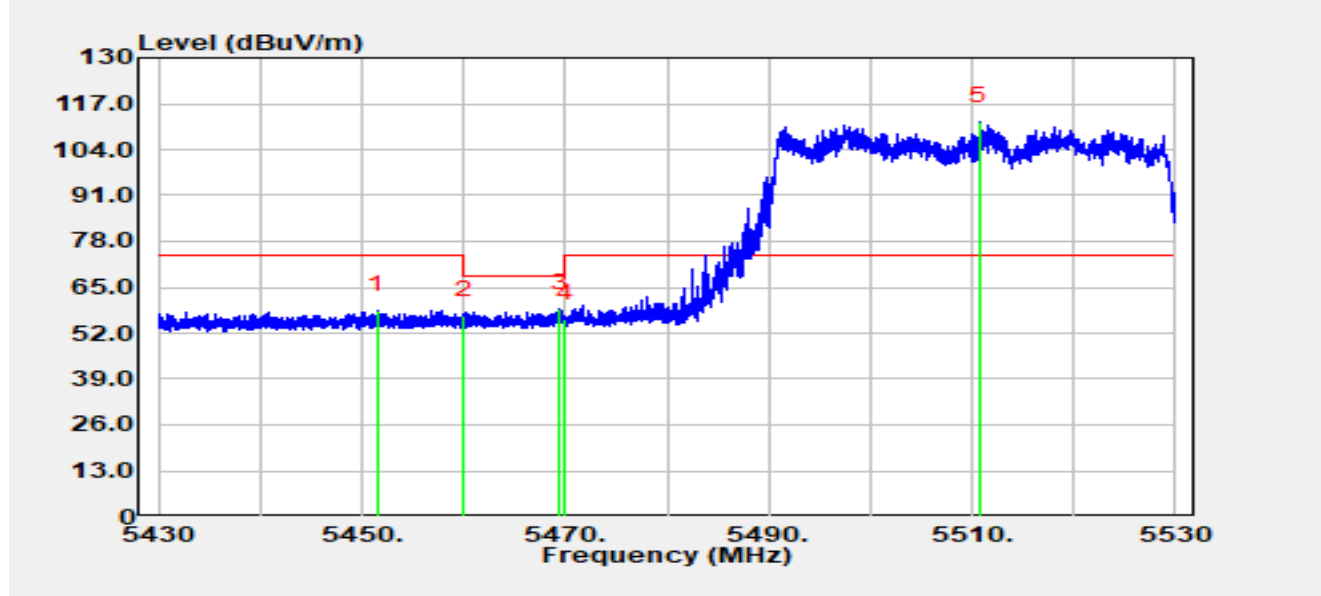


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5451.57	42.55	16.02	58.57	-15.43	74.00	Peak
2		5460.00	41.05	15.99	57.03	-11.17	68.20	Peak
3	*	5469.52	43.03	15.94	58.97	-9.23	68.20	Peak
4		5470.00	40.04	15.94	55.99	-12.21	68.20	Peak
5		5510.76	95.68	16.25	111.93	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5510 MHz		

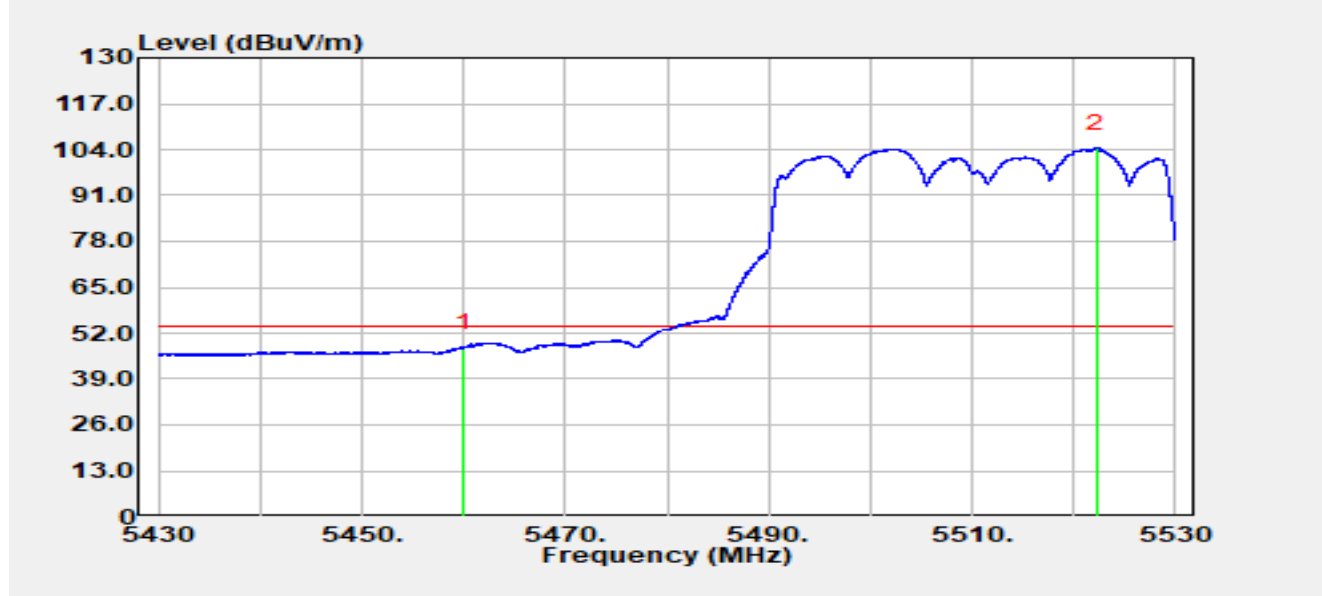


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.00	31.82	15.99	47.80	-6.20	54.00	Average
2		5522.24	88.08	16.28	104.36	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5670 MHz		

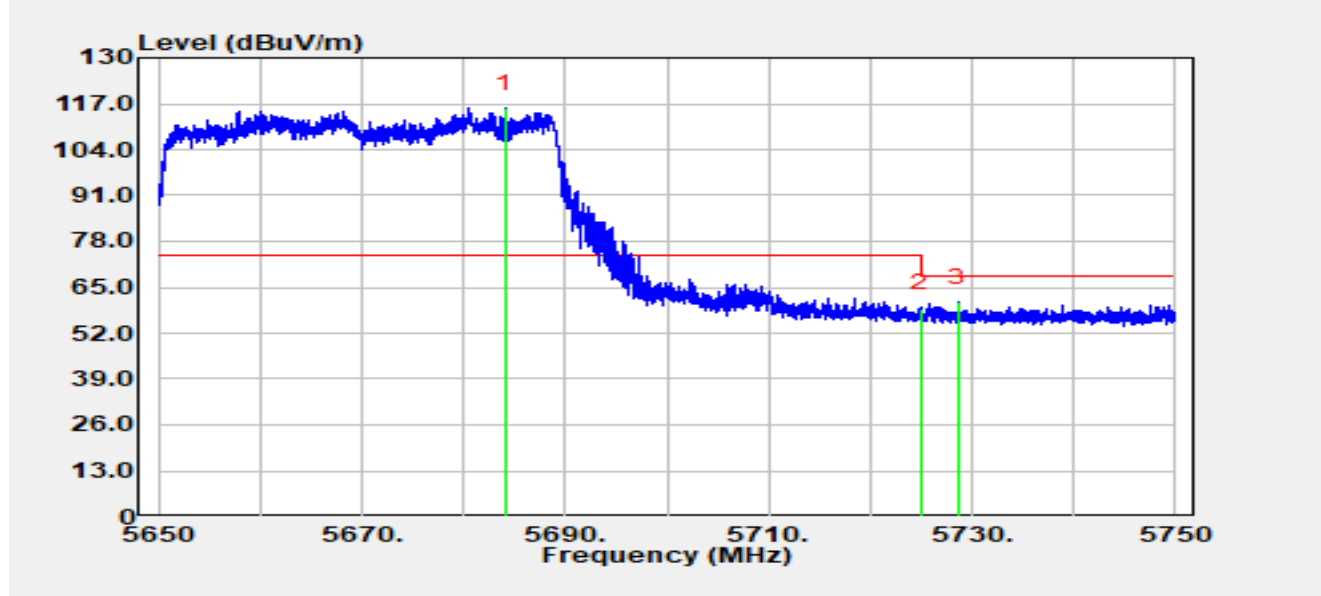


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5684.10	98.68	16.99	115.67	N/A	N/A	Peak
2		5725.00	42.17	16.86	59.04	-9.16	68.20	Peak
3	*	5728.68	43.75	16.85	60.60	-7.60	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5670 MHz		

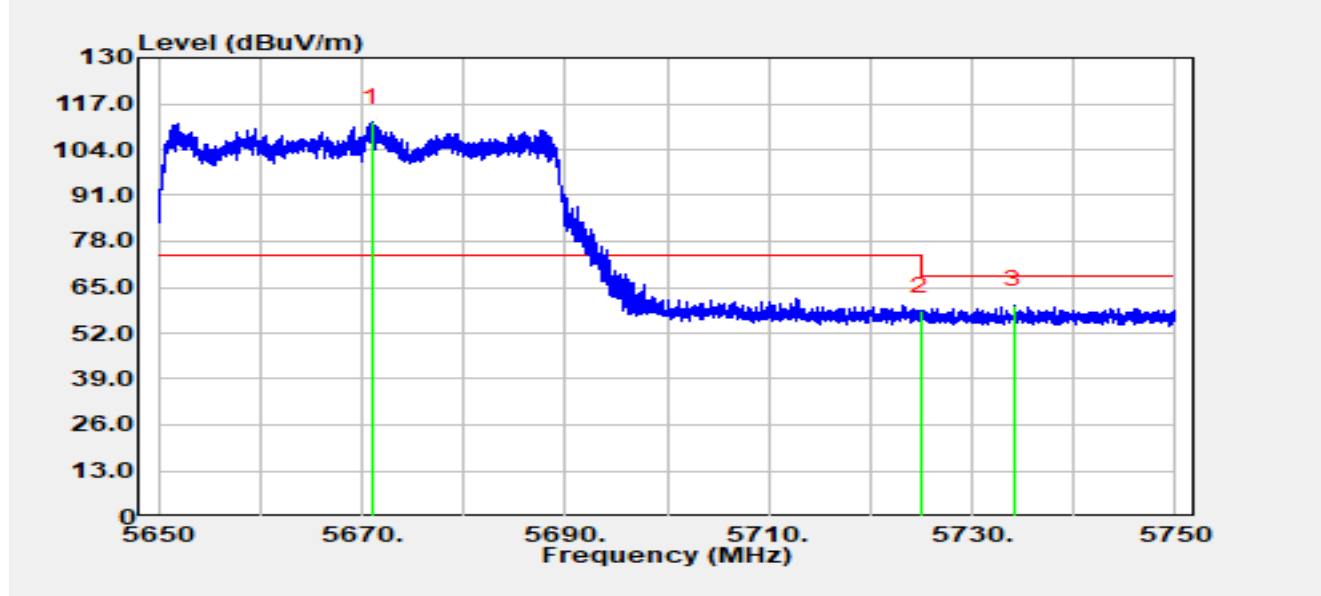


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5670.94	94.92	16.91	111.83	N/A	N/A	Peak
2		5725.00	41.33	16.86	58.19	-10.01	68.20	Peak
3	*	5734.10	43.08	16.83	59.92	-8.28	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5755 MHz		

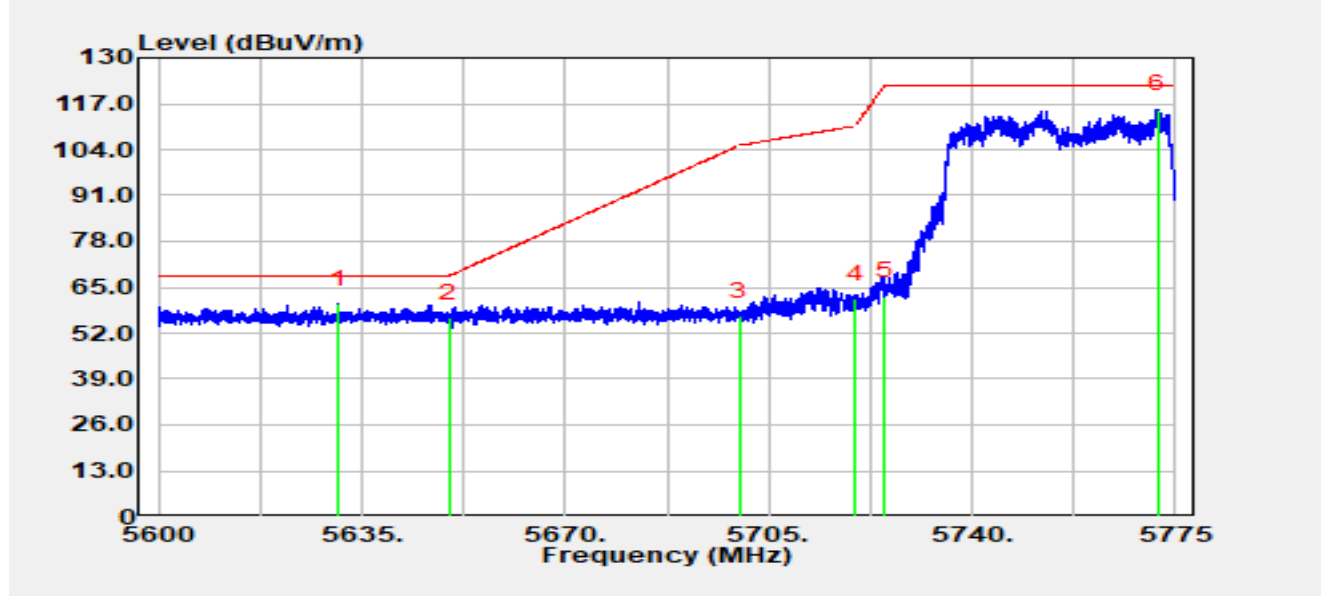


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5631.05	43.68	16.61	60.29	-7.91	68.20	Peak
2		5650.00	39.61	16.78	56.39	-11.81	68.20	Peak
3		5700.00	39.86	16.98	56.85	-48.35	105.20	Peak
4		5720.00	44.84	16.89	61.73	-49.07	110.80	Peak
5		5725.00	45.60	16.86	62.47	-59.73	122.20	Peak
6		5771.87	98.44	16.99	115.43	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5755 MHz		

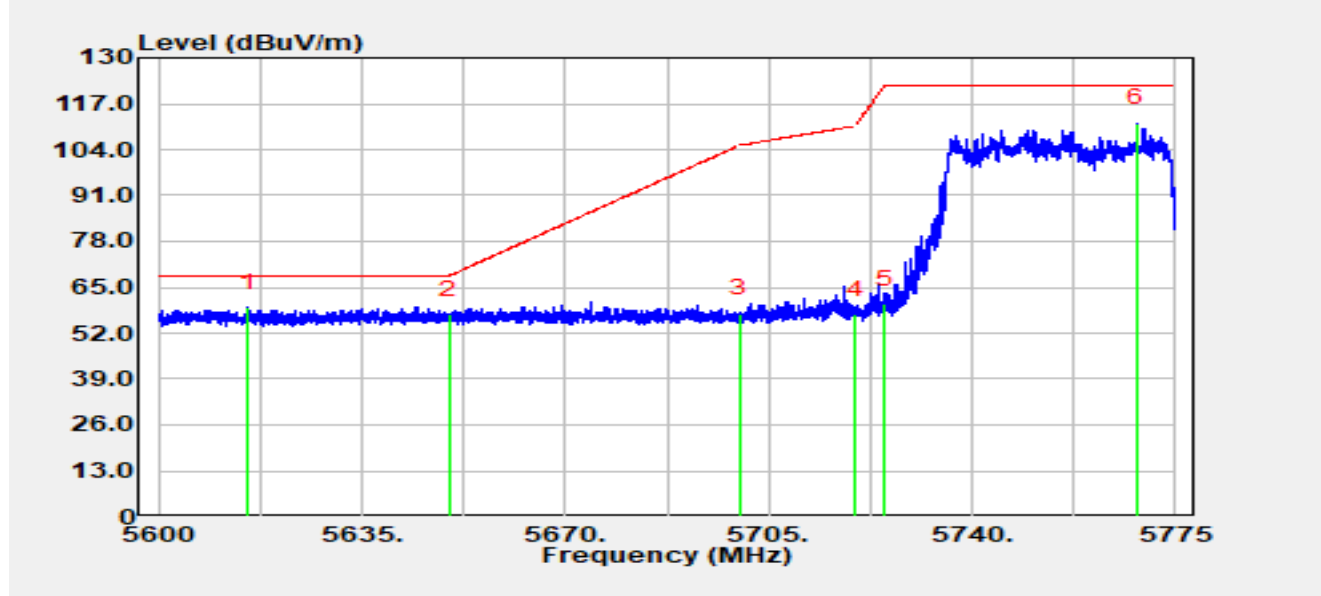


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5615.35	42.77	16.49	59.26	N/A	N/A	Peak
2		5650.00	40.47	16.78	57.25	-10.95	68.20	Peak
3		5700.00	40.65	16.98	57.64	-47.56	105.20	Peak
4		5720.00	40.37	16.89	57.25	-53.55	110.80	Peak
5		5725.00	43.23	16.86	60.10	-62.10	122.20	Peak
6	*	5768.30	94.49	16.98	111.47	-10.73	122.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5795 MHz		

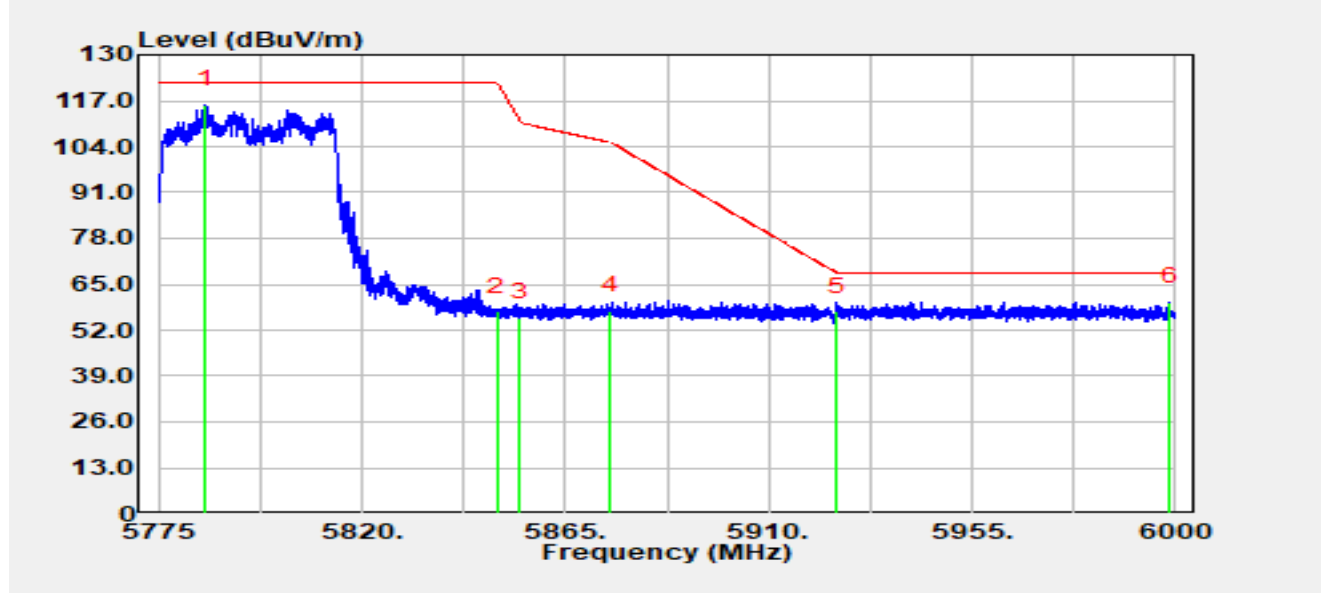


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5785.51	98.82	17.01	115.83	N/A	N/A	Peak
2		5850.00	39.93	17.36	57.29	-64.91	122.20	Peak
3		5855.00	38.14	17.33	55.47	-55.33	110.80	Peak
4		5875.00	40.14	17.43	57.57	-47.63	105.20	Peak
5		5925.00	39.81	17.40	57.21	-10.99	68.20	Peak
6	*	5998.72	42.58	17.48	60.06	-8.14	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5795 MHz		

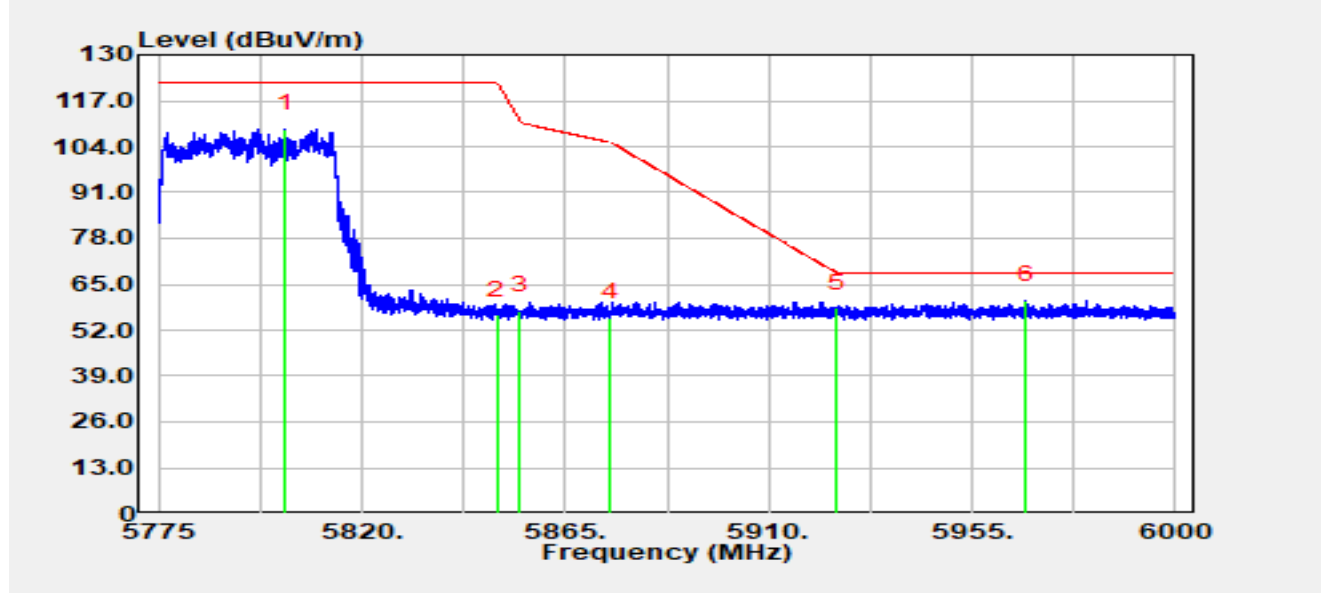


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5803.06	91.88	17.12	109.00	-13.20	122.20	Peak
2		5850.00	38.92	17.36	56.28	-65.92	122.20	Peak
3		5855.00	40.11	17.33	57.43	-53.37	110.80	Peak
4		5875.00	38.18	17.43	55.61	-49.59	105.20	Peak
5	*	5925.00	40.88	17.40	58.28	-9.92	68.20	Peak
6		5966.88	42.69	17.69	60.38	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5210 MHz		

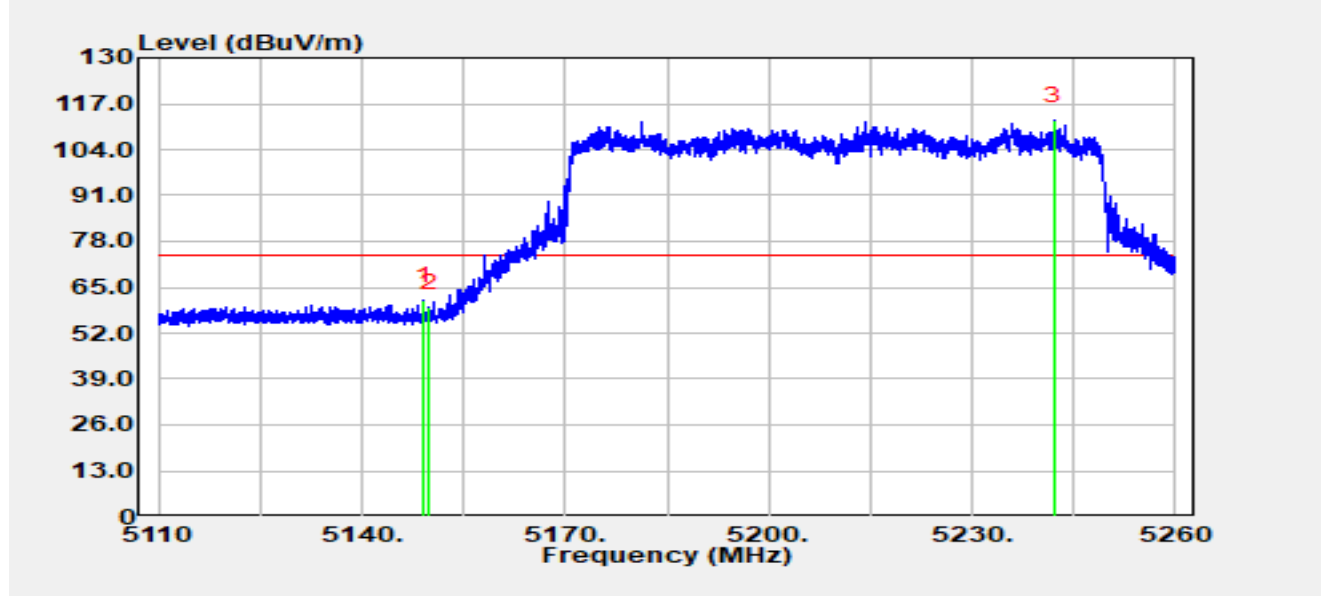


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.11	45.25	15.95	61.20	-12.80	74.00	Peak
2		5150.00	43.16	15.96	59.12	-14.88	74.00	Peak
3		5242.09	96.23	15.95	112.18	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5210 MHz		

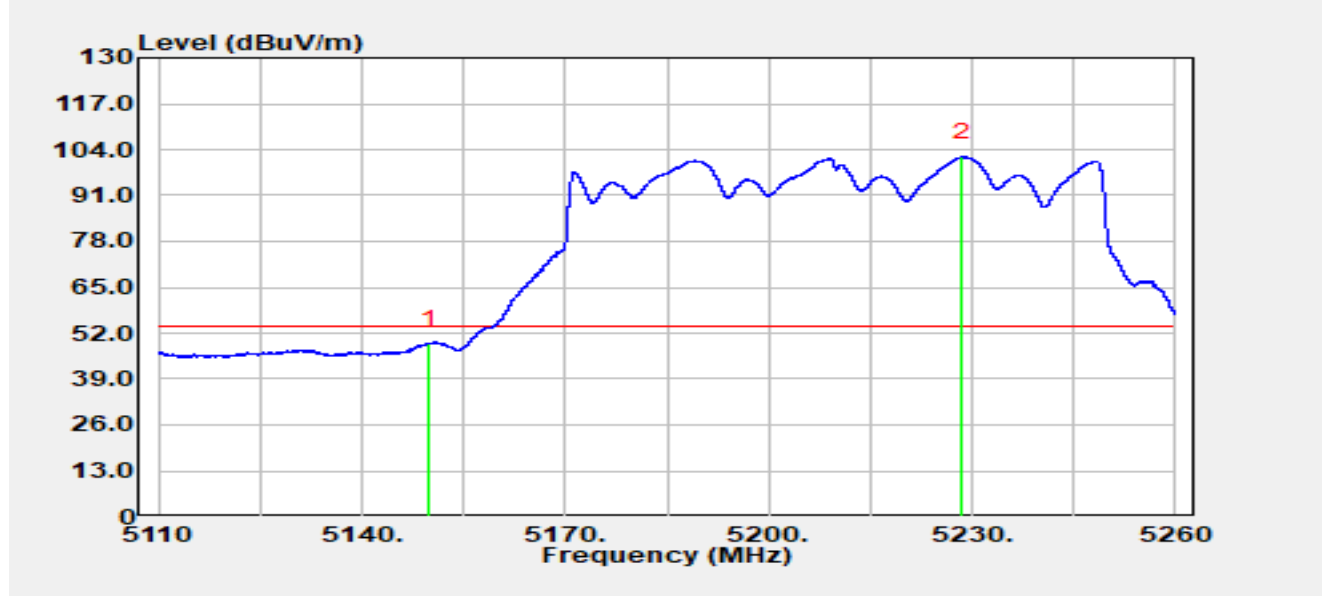


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.00	33.04	15.96	49.00	-5.00	54.00	Average
2		5228.52	85.68	16.20	101.88	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5210 MHz		

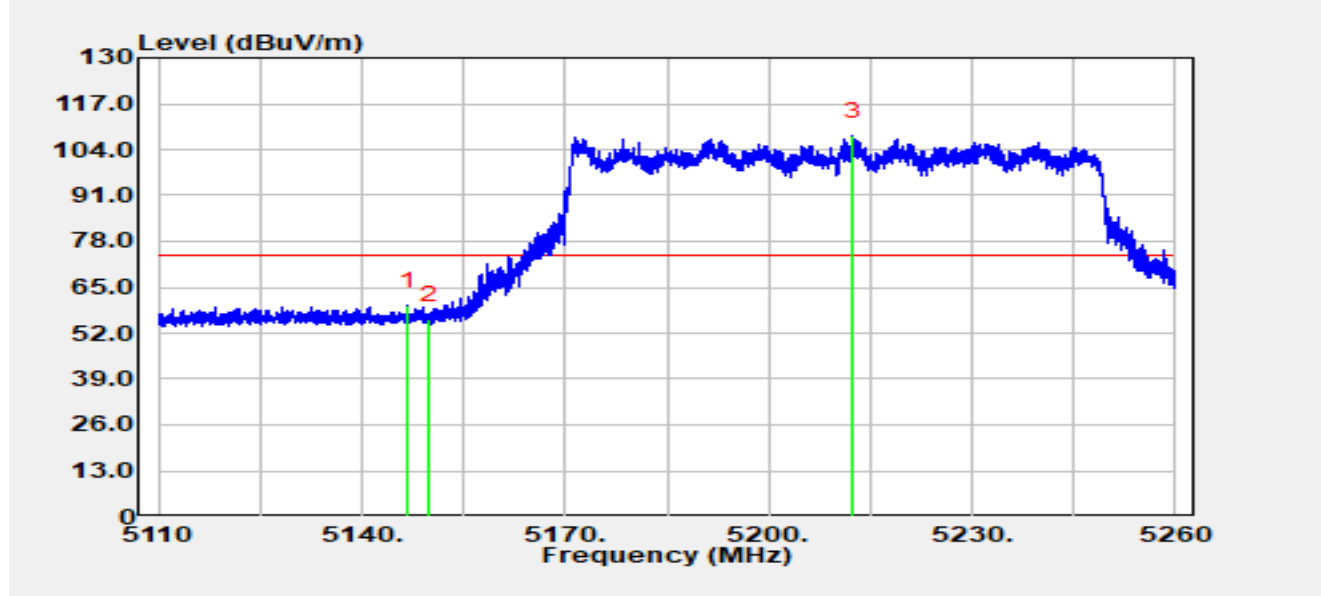


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5146.75	43.90	15.94	59.84	-14.16	74.00	Peak
2		5150.00	39.75	15.96	55.70	-18.30	74.00	Peak
3		5212.45	91.82	15.87	107.69	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5210 MHz		

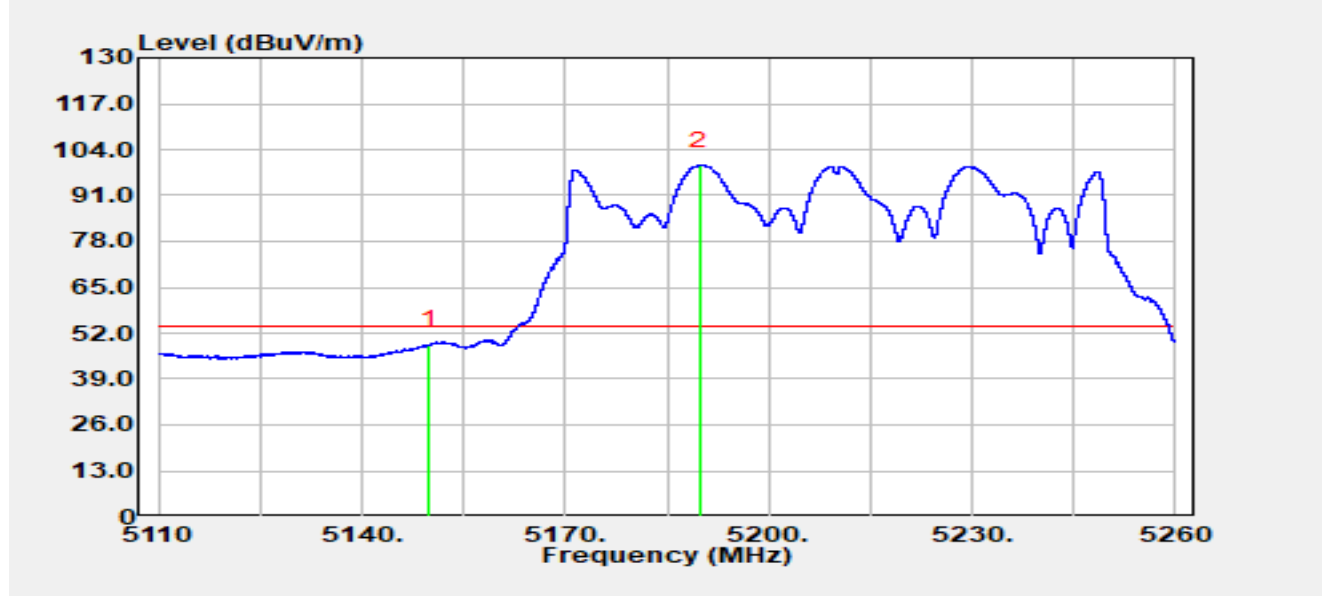


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.00	32.73	15.96	48.69	-5.31	54.00	Average
2		5189.83	83.64	15.93	99.58	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5290 MHz		

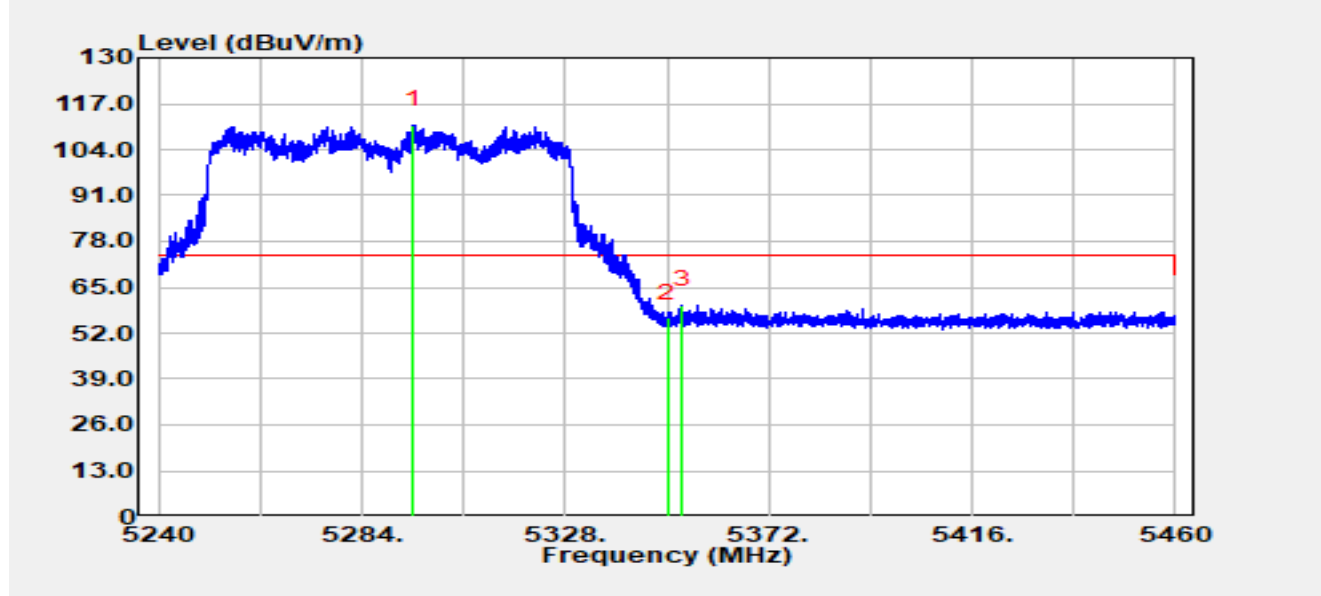


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5294.98	95.06	15.83	110.90	N/A	N/A	Peak
2		5350.00	40.53	15.69	56.22	-17.78	74.00	Peak
3	*	5353.32	44.20	15.73	59.93	-14.07	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5290 MHz		

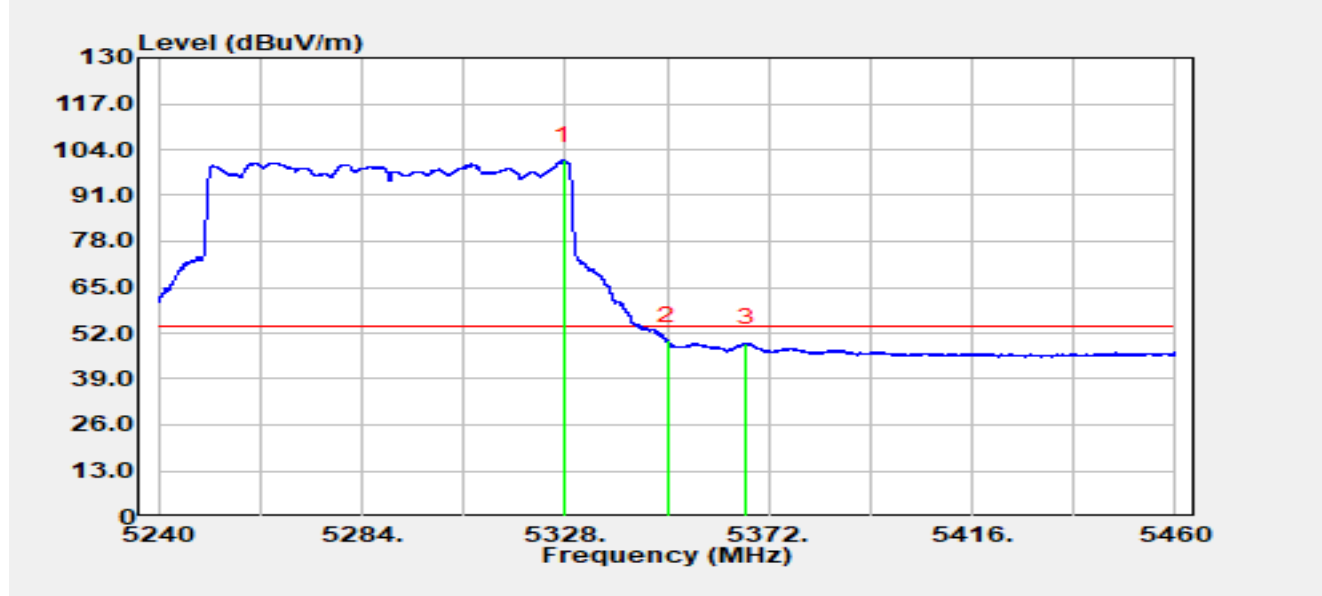


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5327.76	85.12	15.81	100.93	N/A	N/A	Average
2	*	5350.00	34.26	15.69	49.95	-4.05	54.00	Average
3		5367.25	33.29	15.88	49.17	-4.83	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5290 MHz		

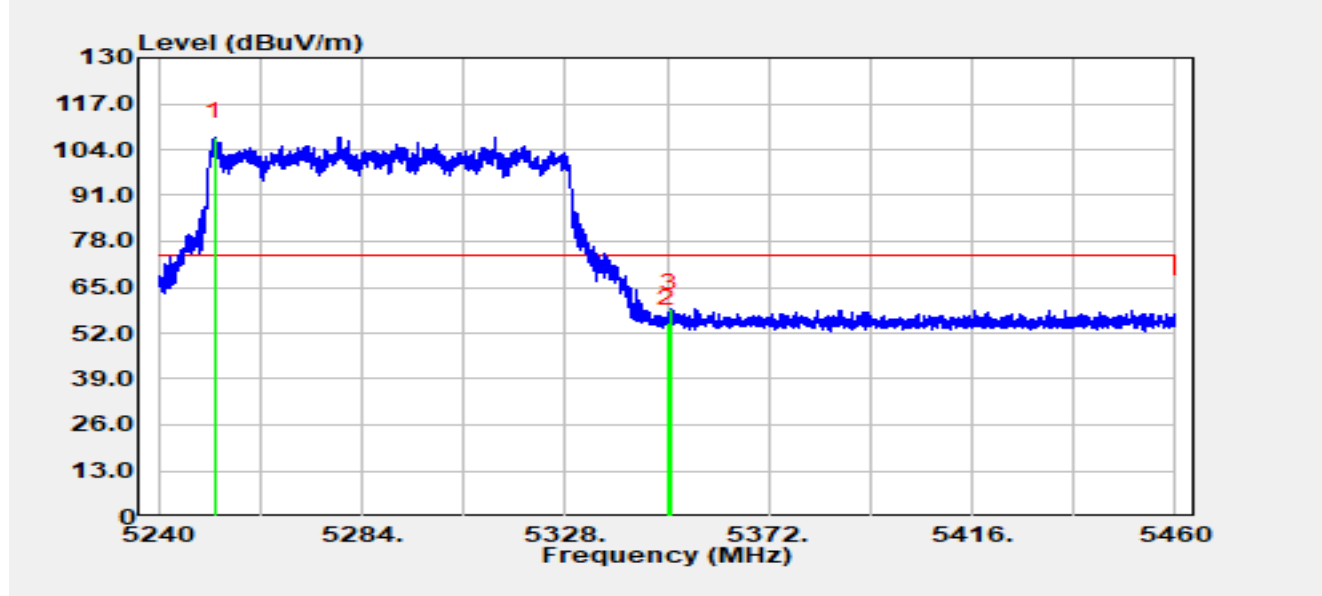


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5252.08	91.82	15.83	107.65	N/A	N/A	Peak
2		5350.00	39.24	15.69	54.93	-19.07	74.00	Peak
3	*	5350.86	43.33	15.70	59.04	-14.96	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5290 MHz		

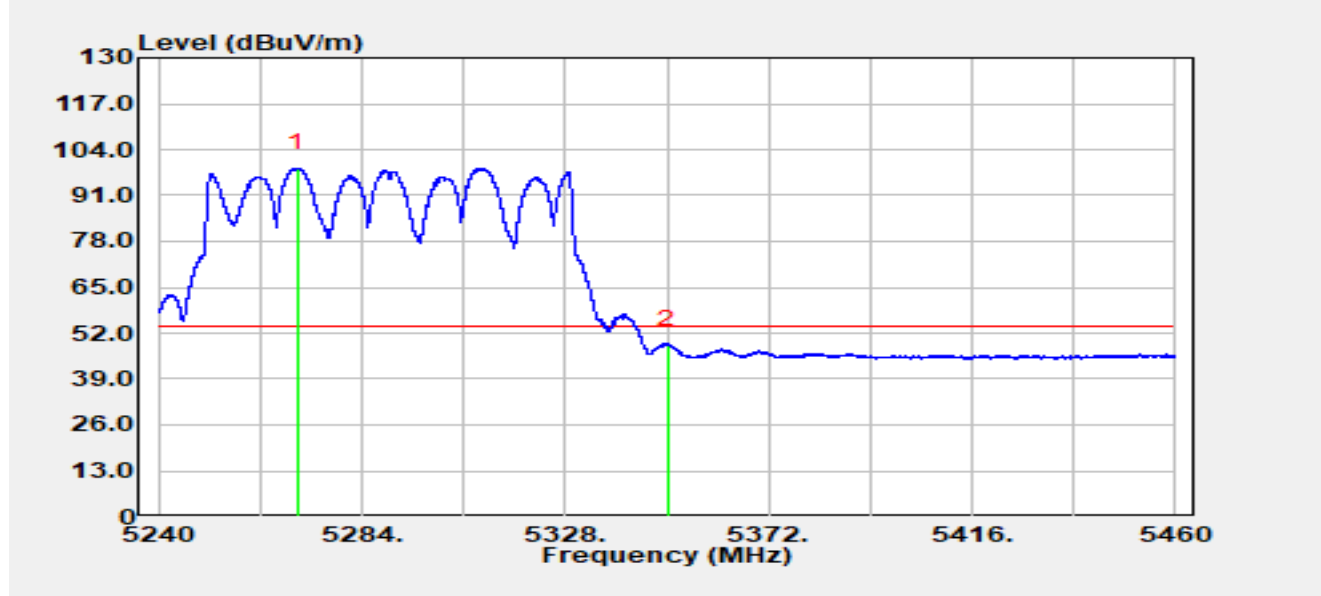


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5270.01	82.99	15.78	98.77	N/A	N/A	Average
2	*	5350.00	32.91	15.69	48.61	-5.39	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5530 MHz		

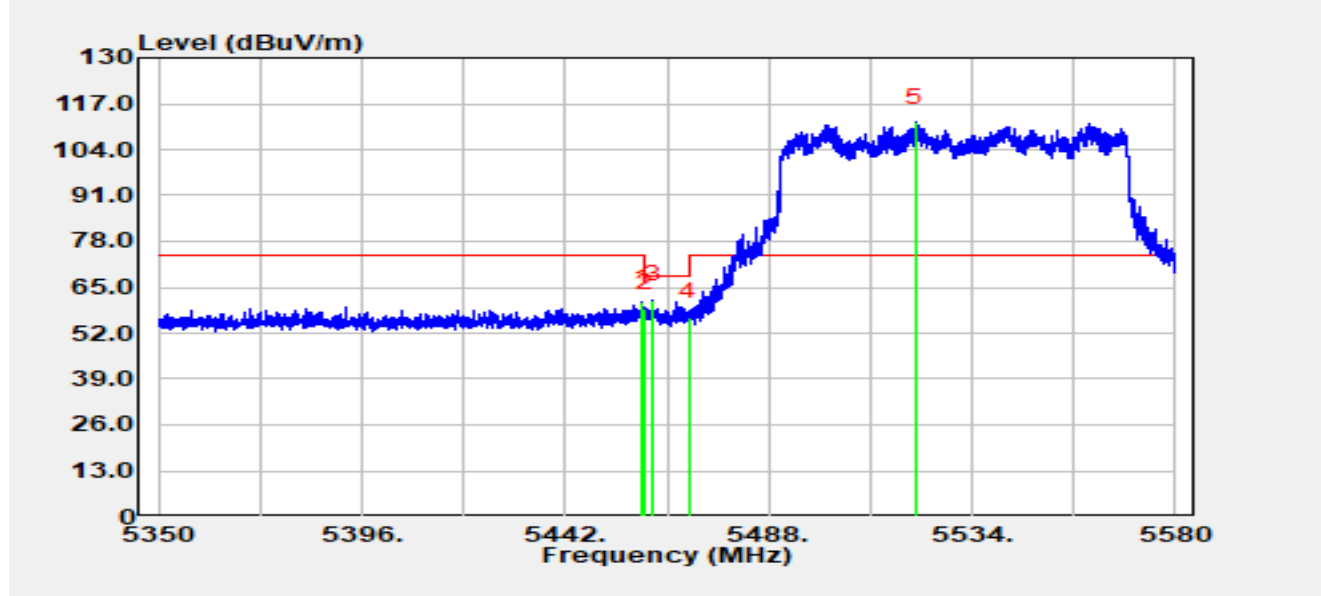


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.53	44.61	15.99	60.60	-13.40	74.00	Peak
2		5460.00	43.10	15.99	59.09	-9.11	68.20	Peak
3	*	5461.87	45.38	15.97	61.36	-6.84	68.20	Peak
4		5470.00	40.51	15.94	56.46	-11.74	68.20	Peak
5		5521.33	95.45	16.26	111.71	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5530 MHz		

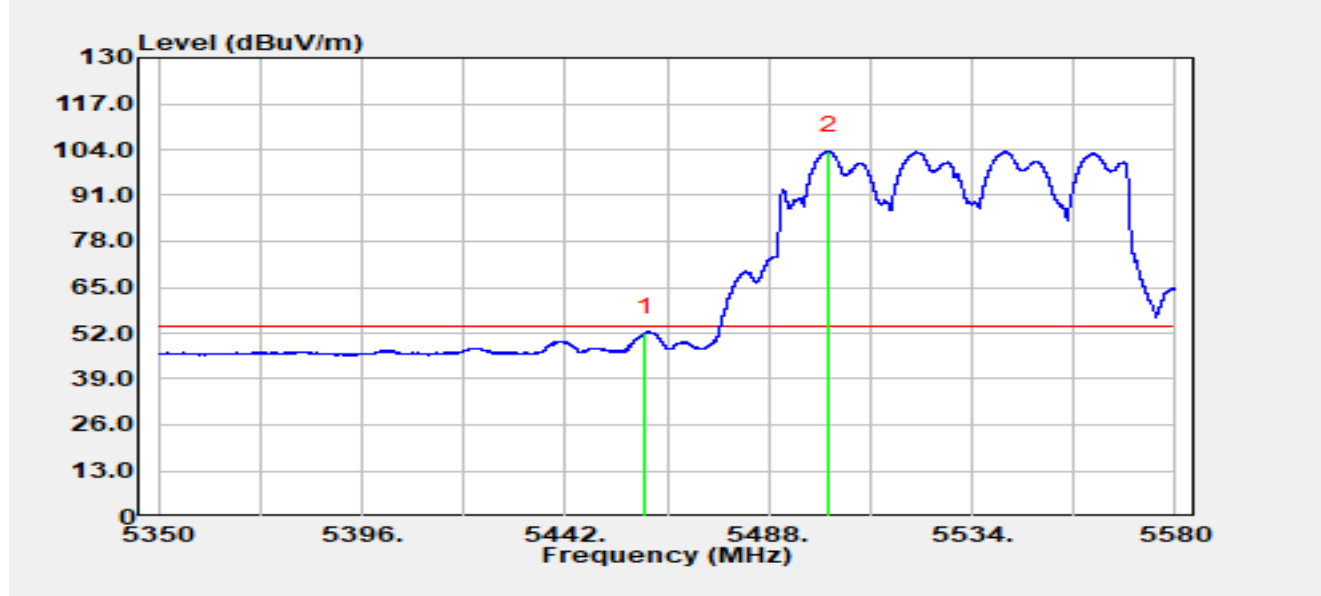


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.00	36.04	15.99	52.03	-1.97	54.00	Average
2		5501.57	87.36	16.25	103.61	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5530 MHz		

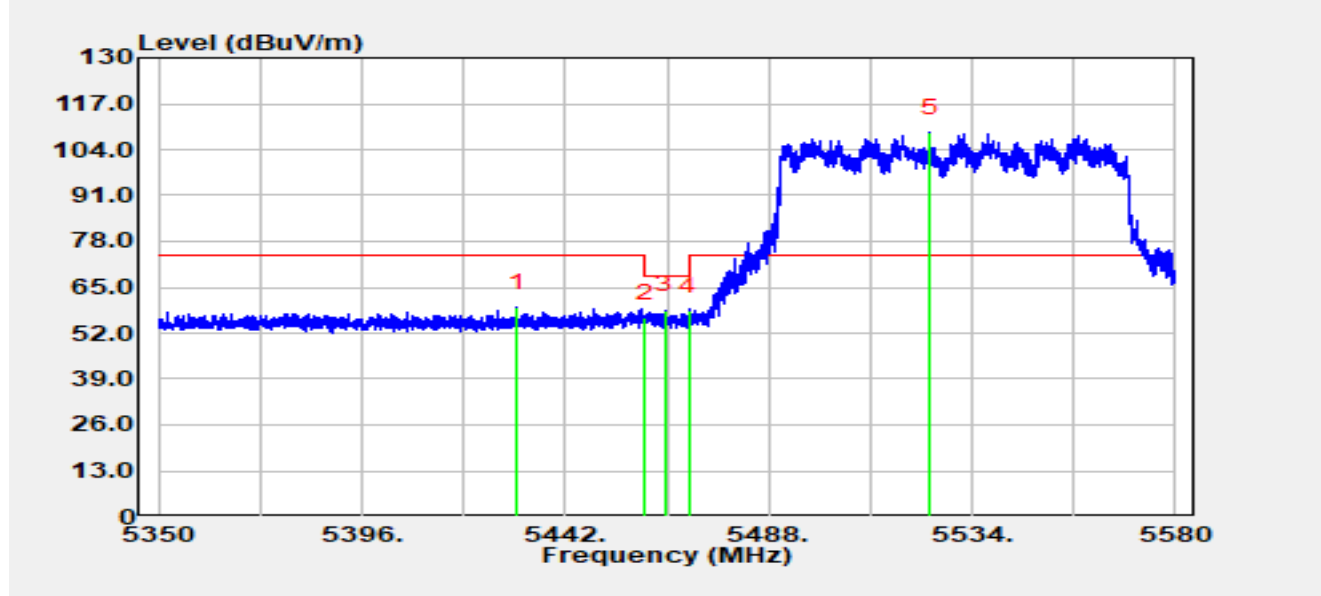


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5431.17	43.59	15.70	59.29	-14.71	74.00	Peak
2		5460.00	40.39	15.99	56.38	-11.82	68.20	Peak
3	*	5464.68	42.65	15.95	58.60	-9.60	68.20	Peak
4		5470.00	42.40	15.94	58.34	-9.86	68.20	Peak
5		5524.39	92.49	16.31	108.81	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5530 MHz		

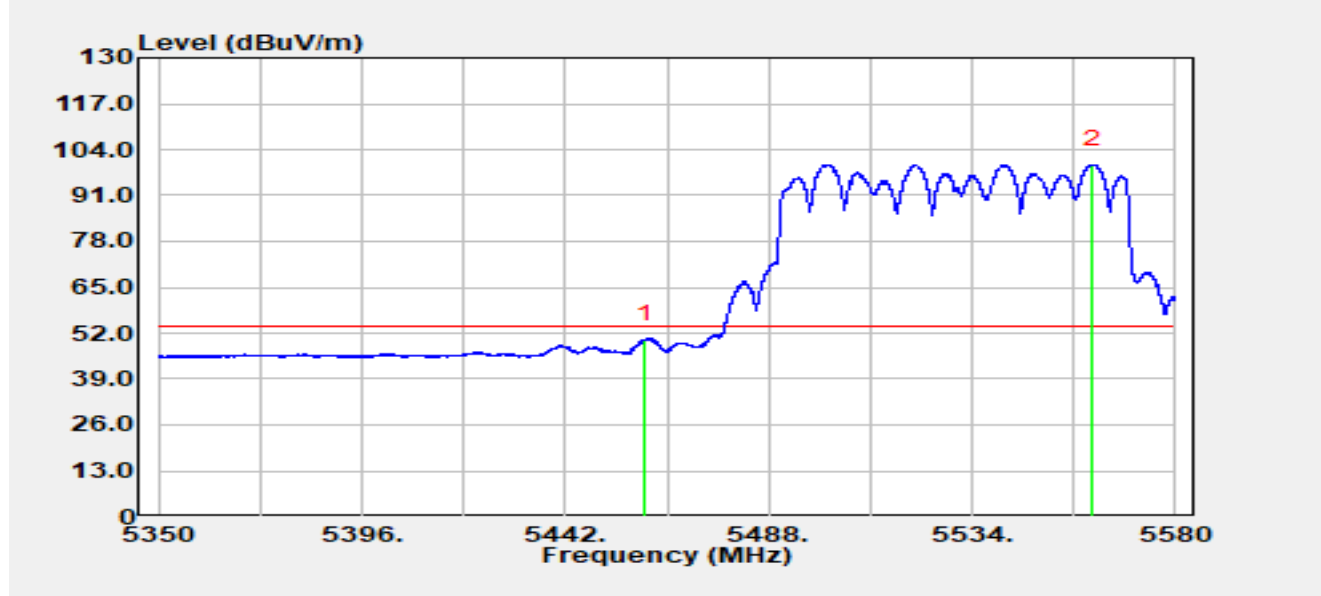


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.00	34.16	15.99	50.14	-3.86	54.00	Average
2		5561.39	83.32	16.47	99.78	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5610 MHz		

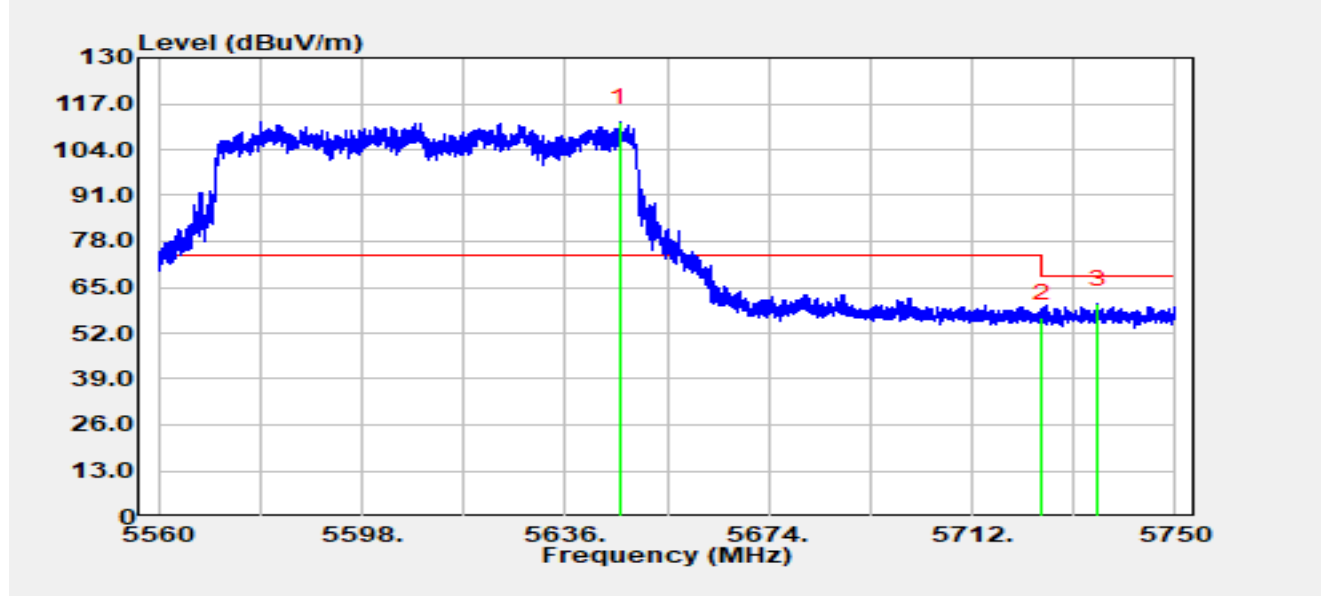


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5646.18	94.96	16.77	111.72	N/A	N/A	Peak
2		5725.00	39.44	16.86	56.31	-11.89	68.20	Peak
3	*	5735.45	43.48	16.83	60.31	-7.89	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5610 MHz		

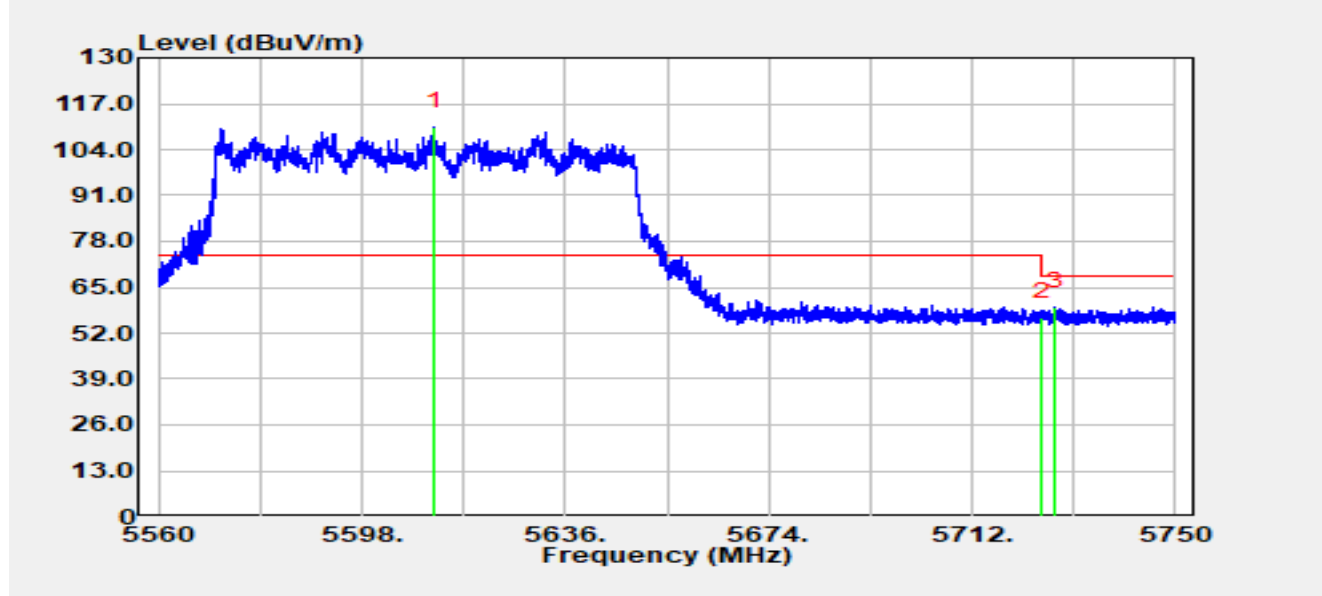


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5611.55	93.86	16.52	110.38	N/A	N/A	Peak
2		5725.00	39.71	16.86	56.57	-11.63	68.20	Peak
3	*	5727.60	42.74	16.86	59.60	-8.60	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5775 MHz		

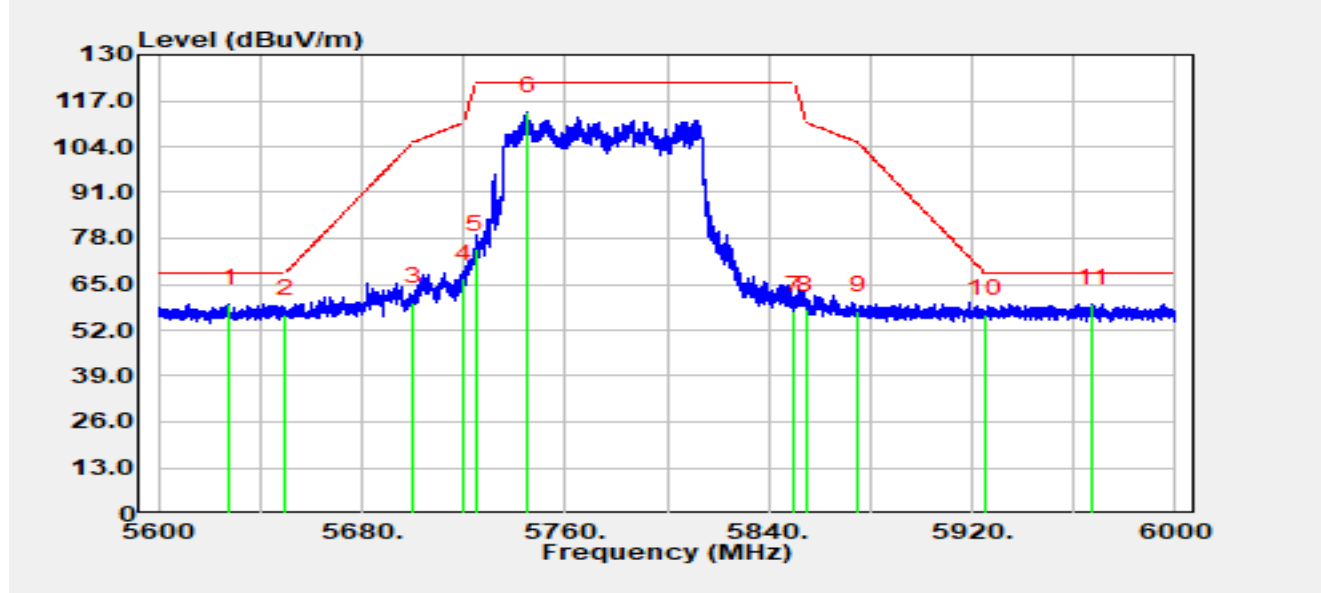


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5627.64	42.85	16.55	59.40	-8.80	68.20	Peak
2		5650.00	39.76	16.78	56.54	-11.66	68.20	Peak
3		5700.00	42.87	16.98	59.85	-45.35	105.20	Peak
4		5720.00	49.67	16.89	66.56	-44.24	110.80	Peak
5		5725.00	58.08	16.86	74.95	-47.25	122.20	Peak
6		5745.36	97.16	16.83	113.99	N/A	N/A	Peak
7		5850.00	40.23	17.36	57.59	-64.61	122.20	Peak
8		5855.00	40.40	17.33	57.72	-53.08	110.80	Peak
9		5875.00	40.05	17.43	57.48	-47.72	105.20	Peak
10		5925.00	39.10	17.40	56.49	-11.71	68.20	Peak
11	*	5967.52	41.78	17.70	59.47	-8.73	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5775 MHz		

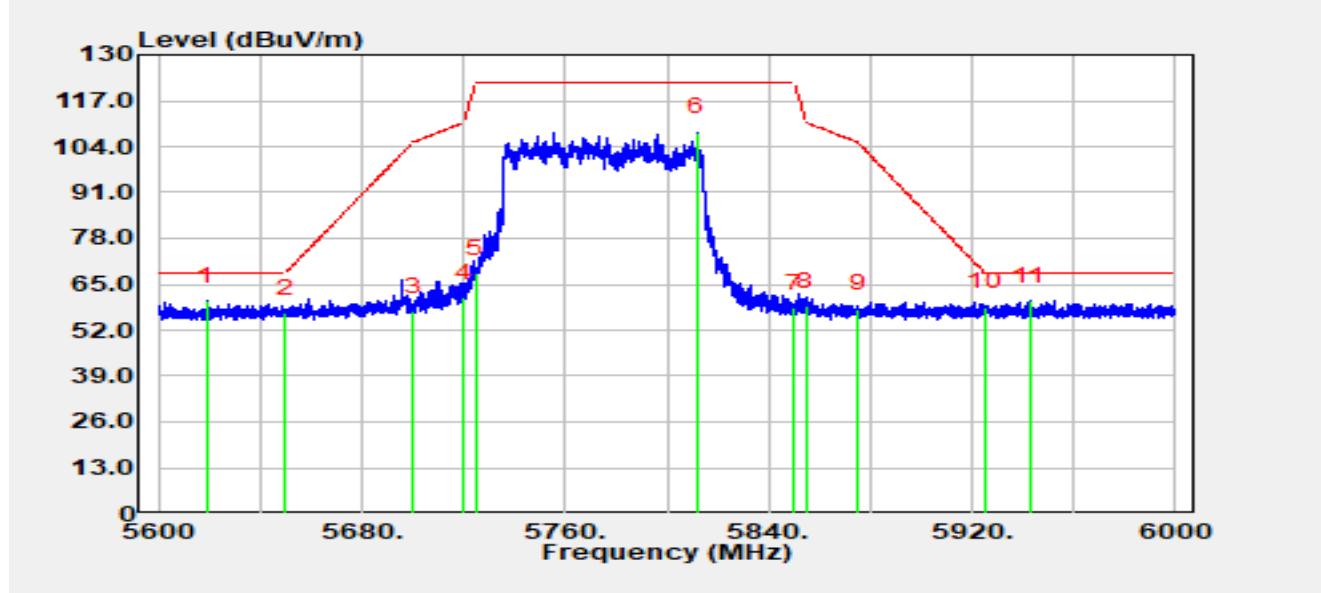


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5619.20	43.72	16.45	60.18	N/A	N/A	Peak
2		5650.00	39.97	16.78	56.75	-11.45	68.20	Peak
3		5700.00	40.29	16.98	57.28	-47.92	105.20	Peak
4		5720.00	44.26	16.89	61.15	-49.65	110.80	Peak
5		5725.00	51.09	16.86	67.95	-54.25	122.20	Peak
6		5811.76	90.99	17.17	108.17	-14.03	122.20	Peak
7		5850.00	40.99	17.36	58.35	-63.85	122.20	Peak
8		5855.00	41.37	17.33	58.69	-52.11	110.80	Peak
9		5875.00	40.60	17.43	58.03	-47.17	105.20	Peak
10		5925.00	41.21	17.40	58.61	-9.59	68.20	Peak
11	*	5942.52	42.56	17.57	60.14	-8.06	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT160 at 5250 MHz		

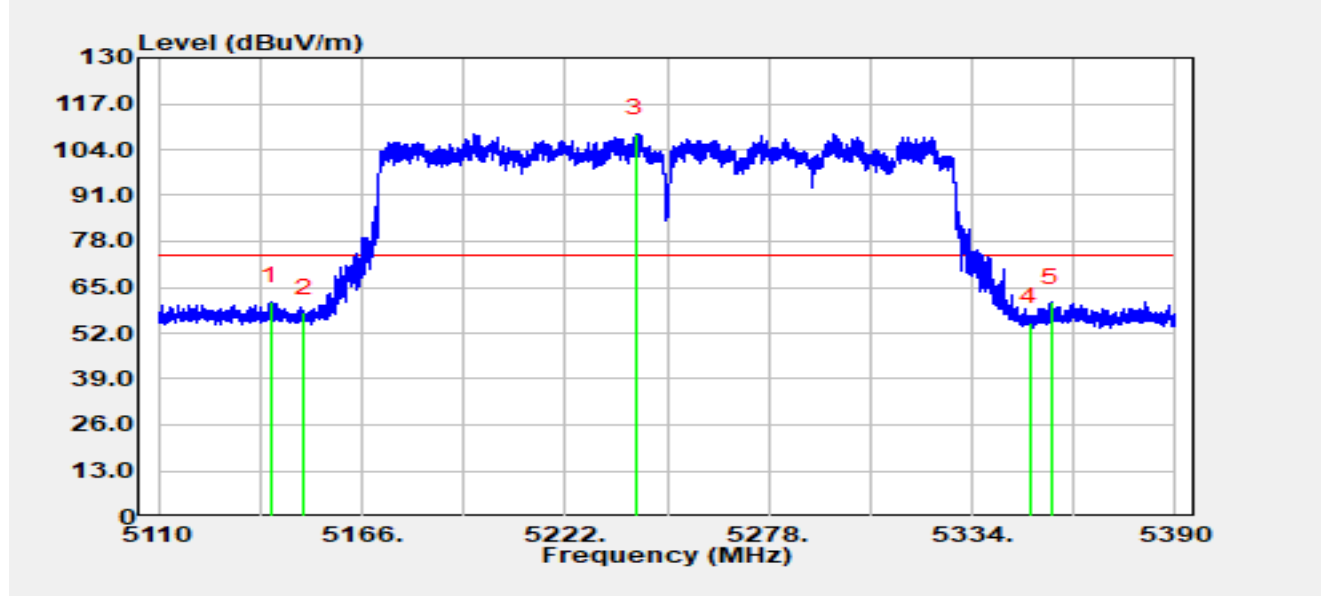


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5140.77	45.12	15.94	61.06	-12.94	74.00	Peak
2		5150.00	41.81	15.96	57.77	-16.23	74.00	Peak
3		5241.26	92.52	15.97	108.49	N/A	N/A	Peak
4		5350.00	39.27	15.69	54.96	-19.04	74.00	Peak
5		5355.67	45.05	15.76	60.81	-13.19	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT160 at 5250 MHz		

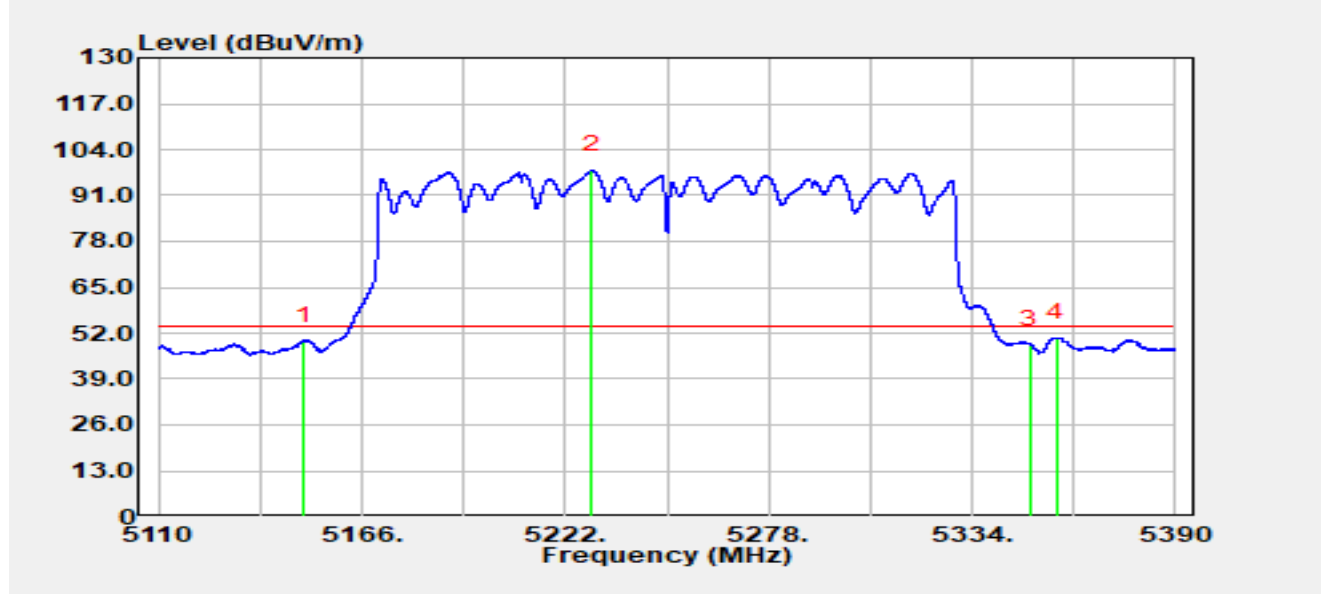


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5150.00	33.60	15.96	49.56	-4.44	54.00	Average
2		5229.28	81.93	16.22	98.14	N/A	N/A	Average
3		5350.00	32.90	15.69	48.59	-5.41	54.00	Average
4	*	5357.35	34.94	15.77	50.72	-3.28	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT160 at 5250 MHz		

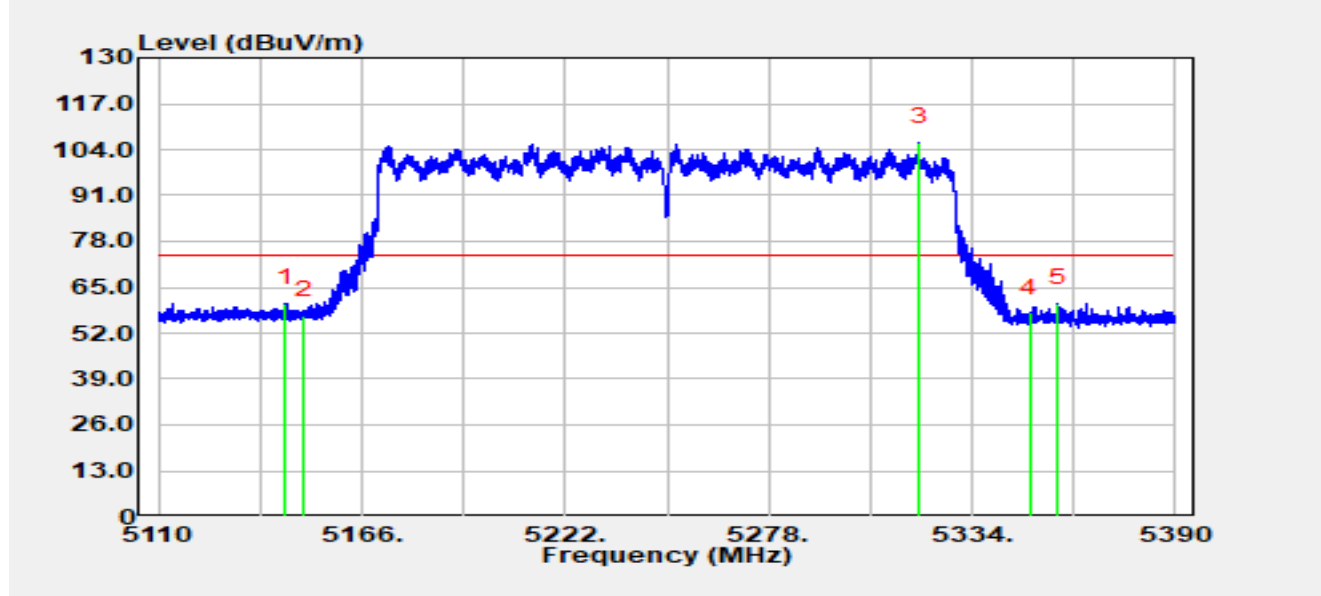


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5145.08	44.43	15.93	60.36	-13.64	74.00	Peak
2		5150.00	41.11	15.96	57.06	-16.94	74.00	Peak
3		5319.33	90.20	15.78	105.98	N/A	N/A	Peak
4		5350.00	41.98	15.69	57.68	-16.32	74.00	Peak
5	*	5357.63	44.63	15.78	60.41	-13.59	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT160 at 5250 MHz		

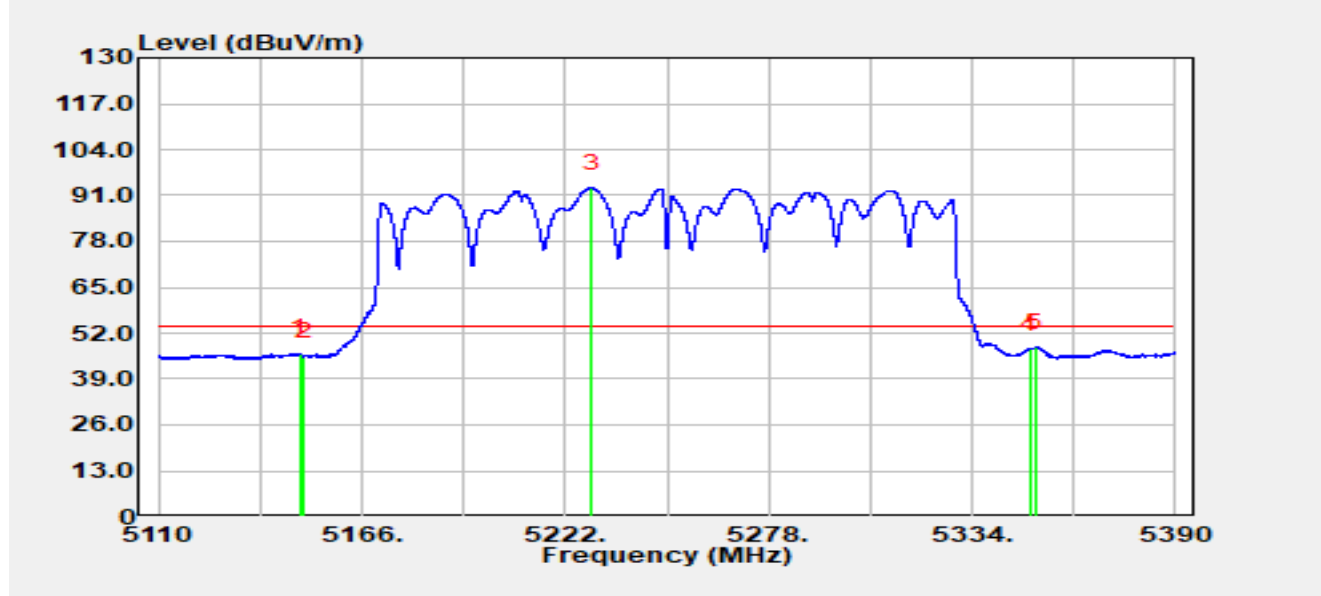


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5148.86	30.21	15.95	46.16	-7.84	54.00	Average
2		5150.00	29.42	15.96	45.38	-8.62	54.00	Average
3		5229.42	76.86	16.22	93.08	N/A	N/A	Average
4		5350.00	31.74	15.69	47.43	-6.57	54.00	Average
5	*	5351.50	32.20	15.71	47.91	-6.09	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT160 at 5570 MHz		

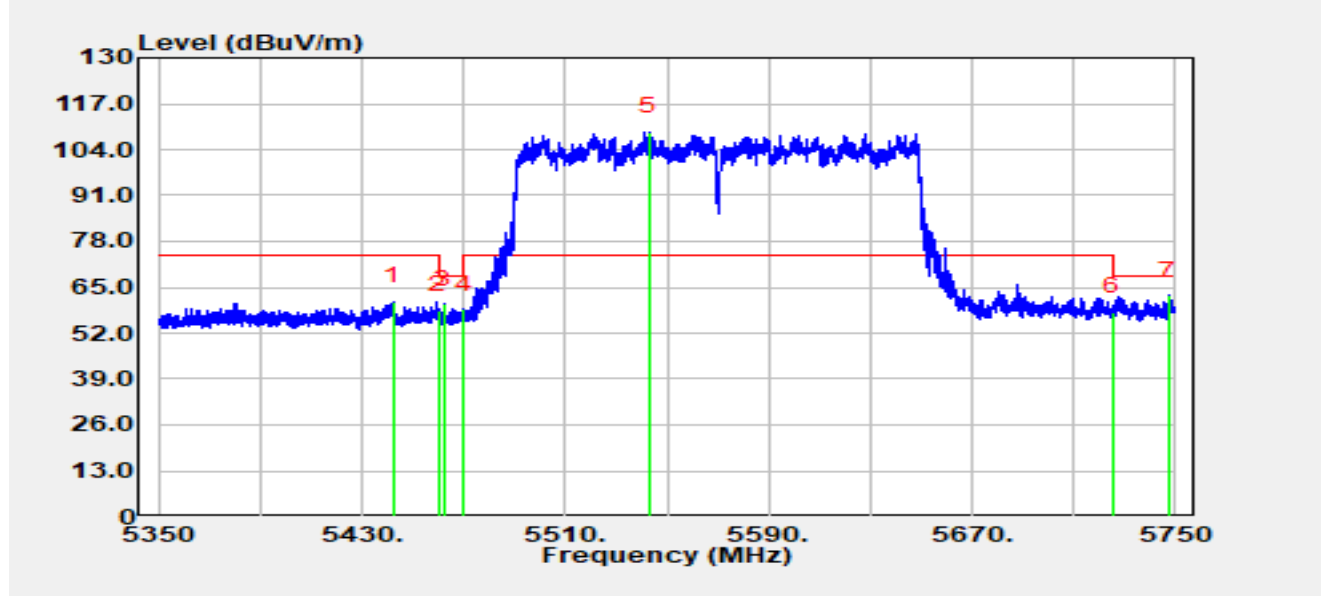


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5442.40	45.00	15.84	60.85	-13.15	74.00	Peak
2		5460.00	42.63	15.99	58.62	-9.58	68.20	Peak
3		5462.36	44.35	15.97	60.32	-7.88	68.20	Peak
4		5470.00	42.72	15.94	58.66	-9.54	68.20	Peak
5		5542.96	92.52	16.51	109.03	N/A	N/A	Peak
6		5725.00	41.25	16.86	58.11	-10.09	68.20	Peak
7	*	5747.28	45.93	16.84	62.77	-5.43	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT160 at 5570 MHz		

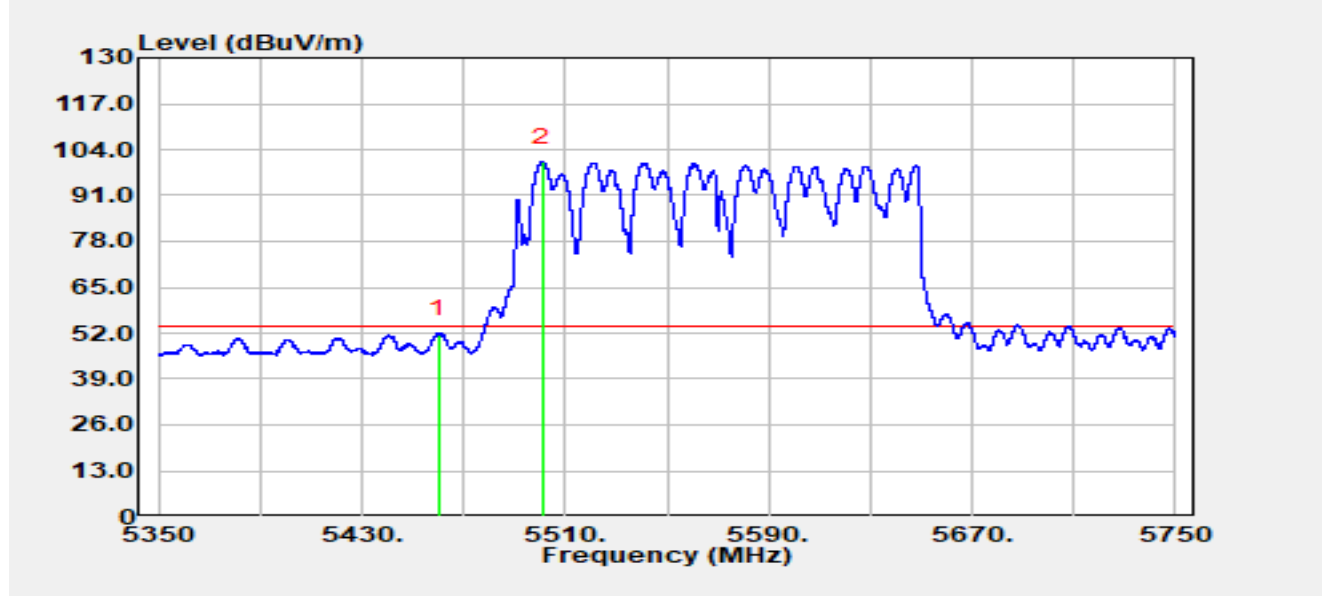


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.00	35.75	15.99	51.74	-2.26	54.00	Average
2		5501.00	84.25	16.24	100.49	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT160 at 5570 MHz		

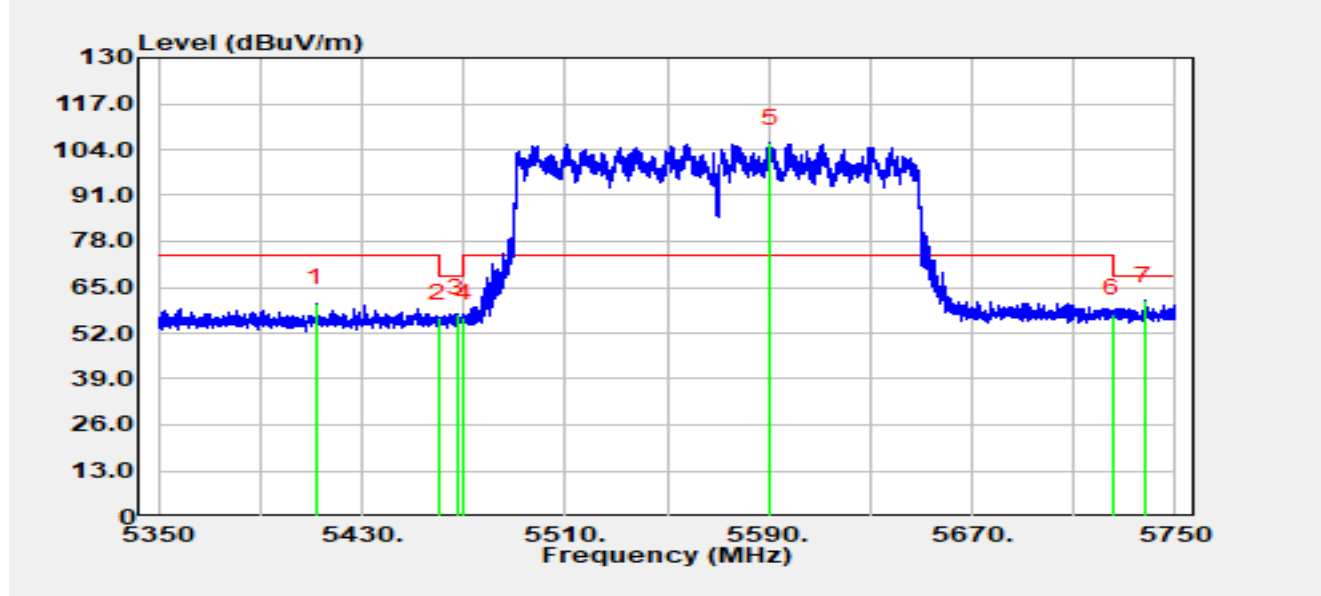


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5412.08	44.58	15.80	60.38	-13.62	74.00	Peak
2		5460.00	40.32	15.99	56.31	-11.89	68.20	Peak
3		5467.60	41.63	15.93	57.56	-10.64	68.20	Peak
4		5470.00	40.42	15.94	56.36	-11.84	68.20	Peak
5		5590.56	89.44	16.45	105.89	N/A	N/A	Peak
6		5725.00	40.67	16.86	57.53	-10.67	68.20	Peak
7	*	5737.72	44.47	16.82	61.29	-6.91	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-07
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT160 at 5570 MHz		

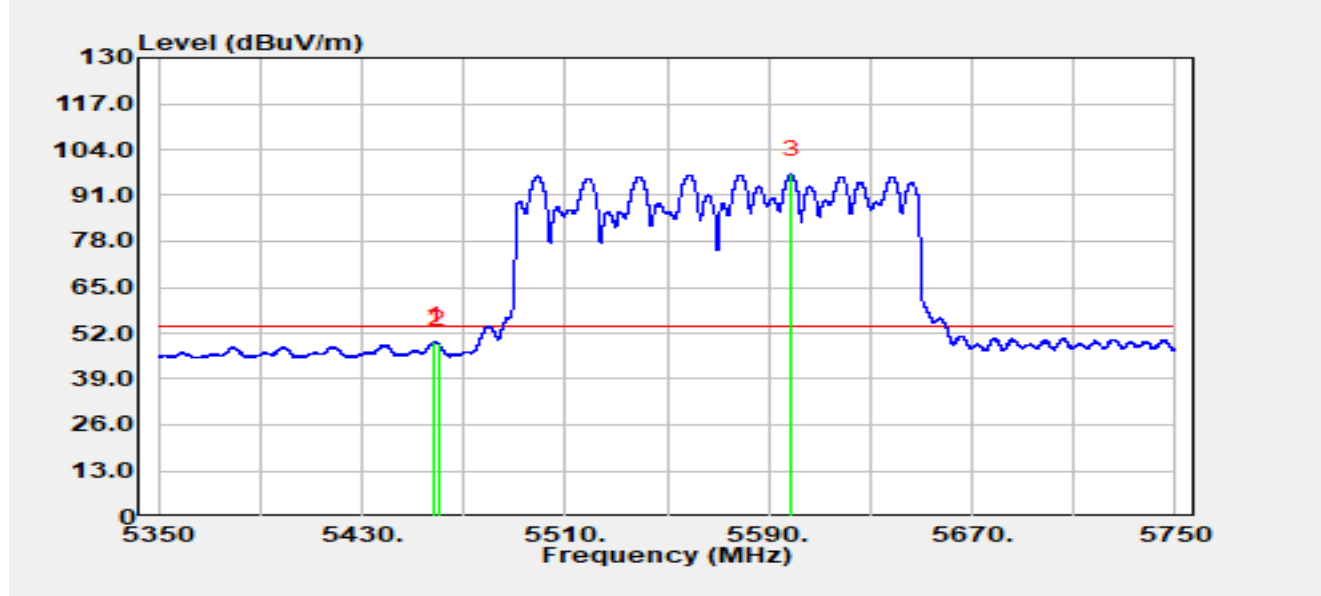


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.48	33.61	16.00	49.61	-4.39	54.00	Average
2		5460.00	33.01	15.99	49.00	-5.00	54.00	Average
3		5598.96	80.41	16.54	96.94	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

AP541 WLAN Config 2 (High Band)

Site	WJ-AC2	Test Date	2026-01-15
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5500 MHz		

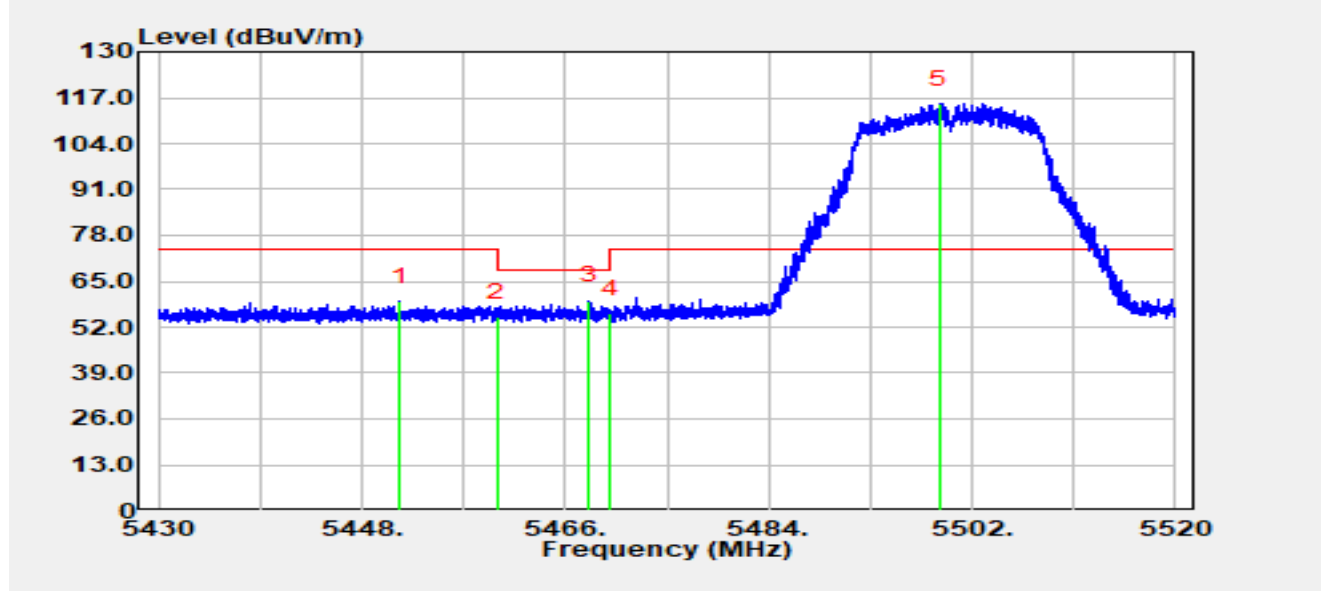


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5451.34	43.15	16.02	59.17	-14.83	74.00	Peak
2		5460.00	38.92	15.99	54.91	-13.29	68.20	Peak
3	*	5468.13	43.56	15.93	59.49	-8.71	68.20	Peak
4		5470.00	39.74	15.94	55.69	-12.51	68.20	Peak
5		5499.14	99.04	16.23	115.27	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-15
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5500 MHz		

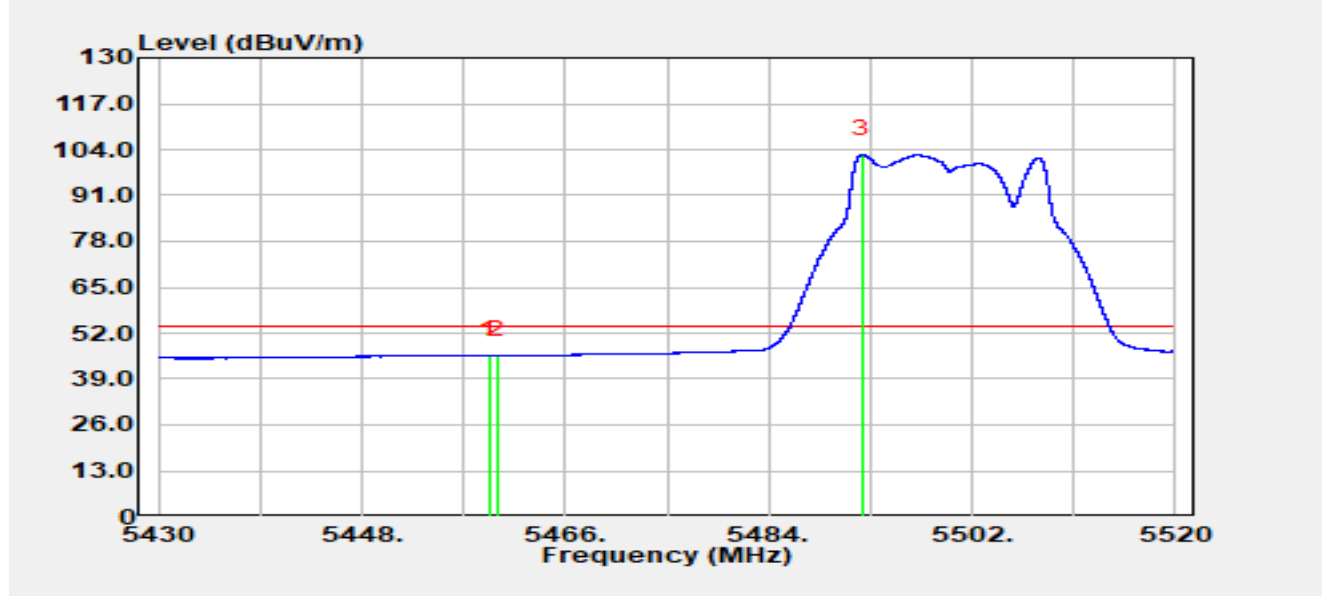


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.28	29.80	15.99	45.79	-8.21	54.00	Average
2		5460.00	29.68	15.99	45.66	-8.34	54.00	Average
3		5492.24	86.54	16.18	102.72	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-15
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5500 MHz		

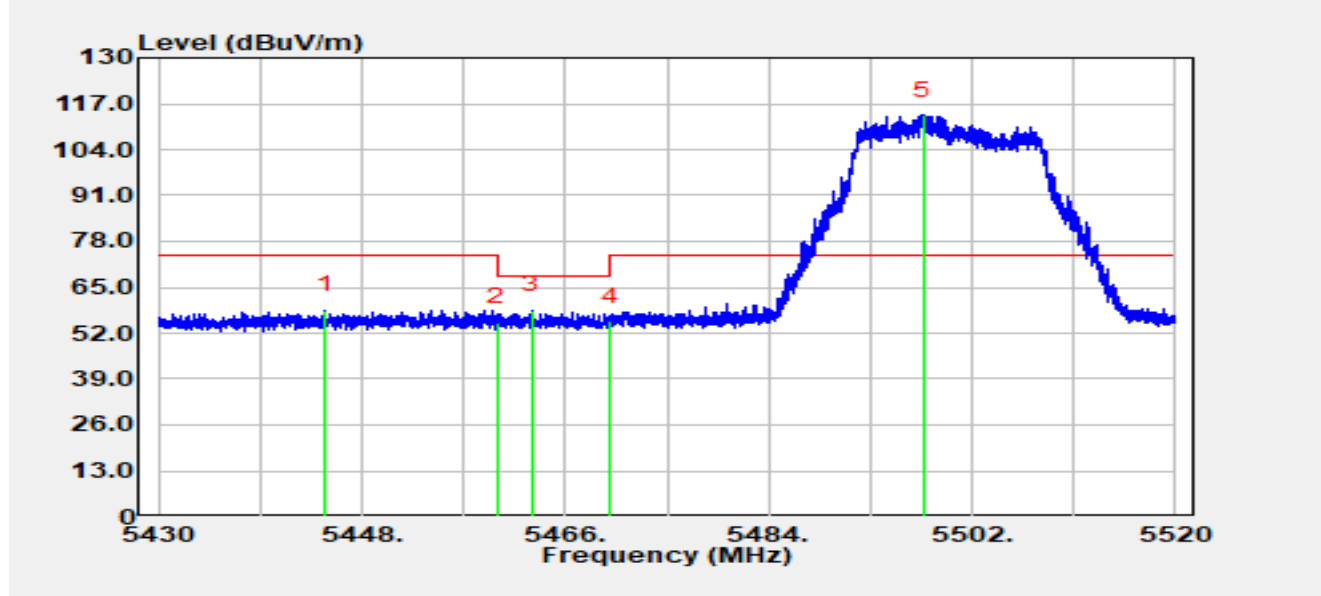


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5444.73	42.57	15.89	58.46	-15.54	74.00	Peak
2		5460.00	39.06	15.99	55.05	-13.15	68.20	Peak
3	*	5463.07	42.45	15.96	58.42	-9.78	68.20	Peak
4		5470.00	39.40	15.94	55.34	-12.86	68.20	Peak
5		5497.64	97.53	16.22	113.75	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-15
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5500 MHz		

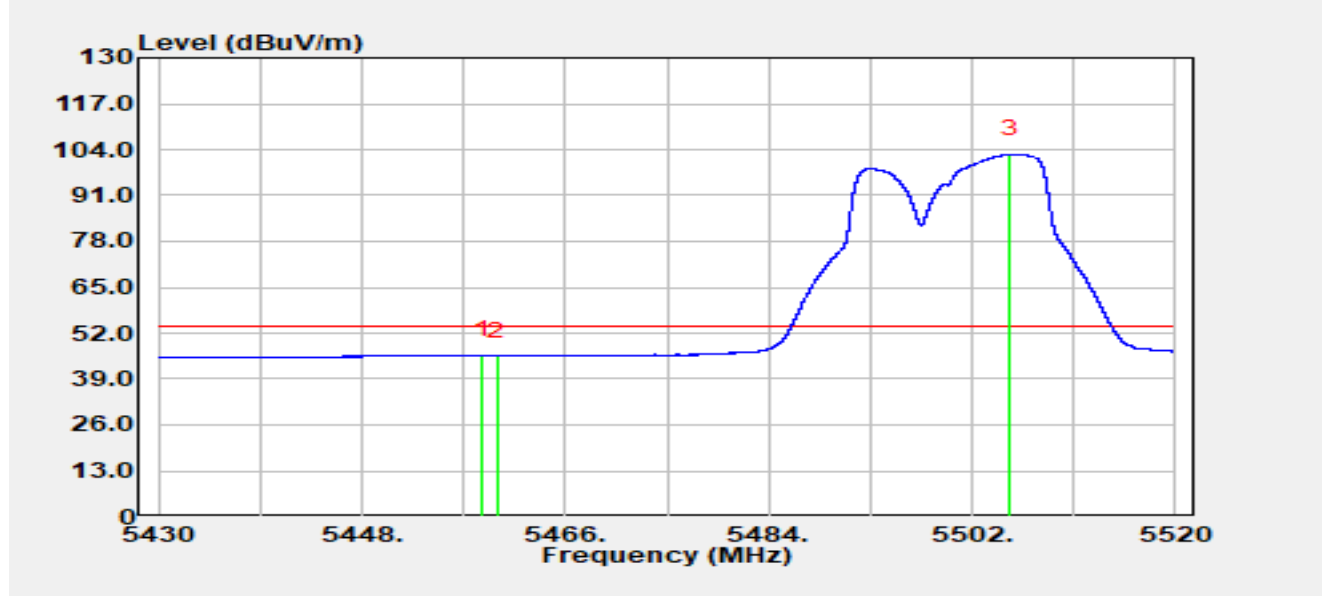


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.67	29.71	16.00	45.71	-8.29	54.00	Average
2		5460.00	29.63	15.99	45.61	-8.39	54.00	Average
3		5505.38	86.42	16.25	102.68	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-15
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5700 MHz		

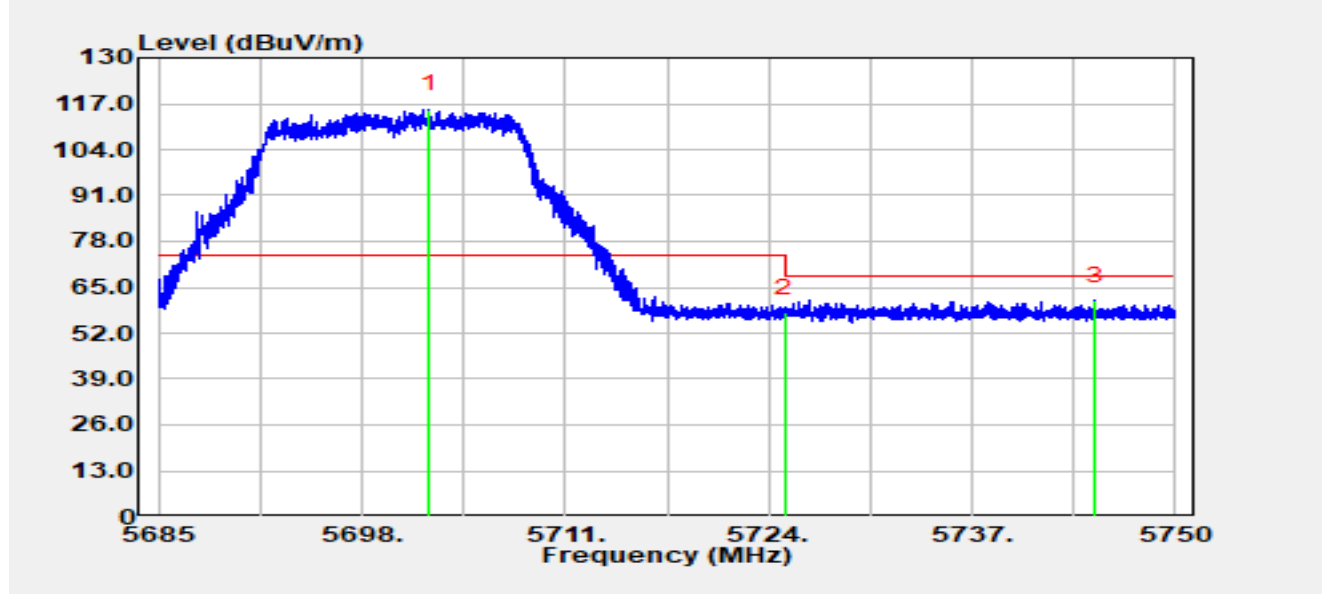


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5702.28	98.33	16.97	115.31	N/A	N/A	Peak
2		5725.00	40.91	16.86	57.78	-10.42	68.20	Peak
3	*	5744.86	44.28	16.82	61.10	-7.10	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-15
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5700 MHz		

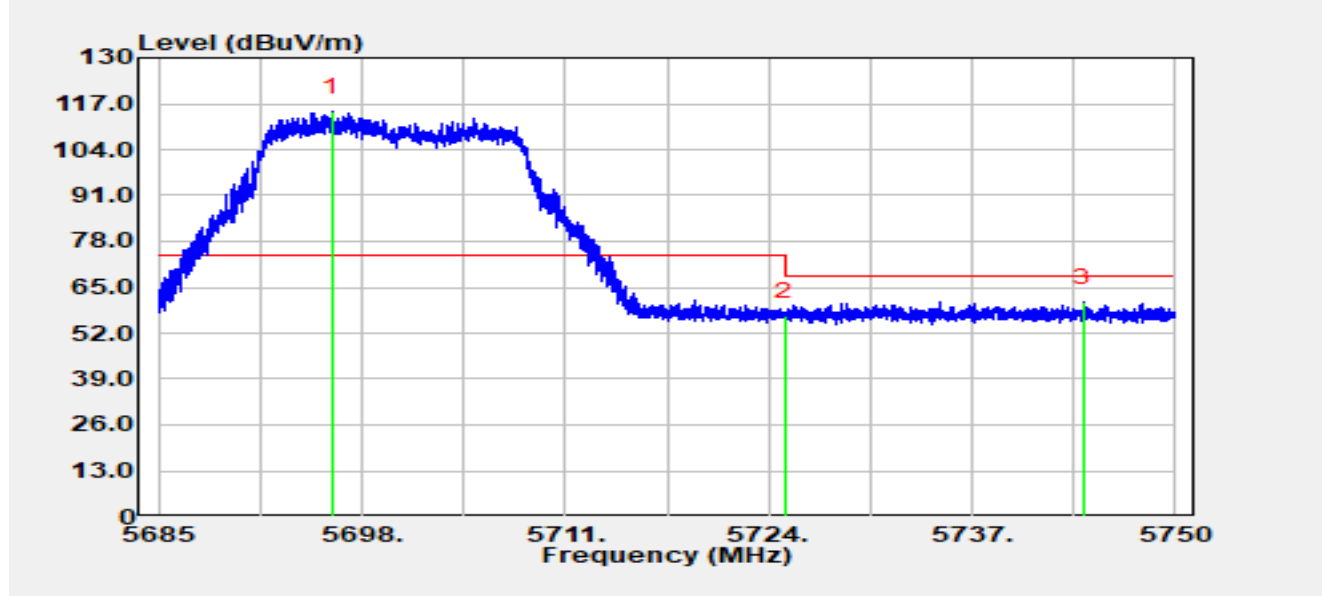


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5696.12	97.66	17.00	114.66	N/A	N/A	Peak
2		5725.00	39.85	16.86	56.71	-11.49	68.20	Peak
3	*	5744.09	44.00	16.82	60.82	-7.38	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-15
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5745 MHz		

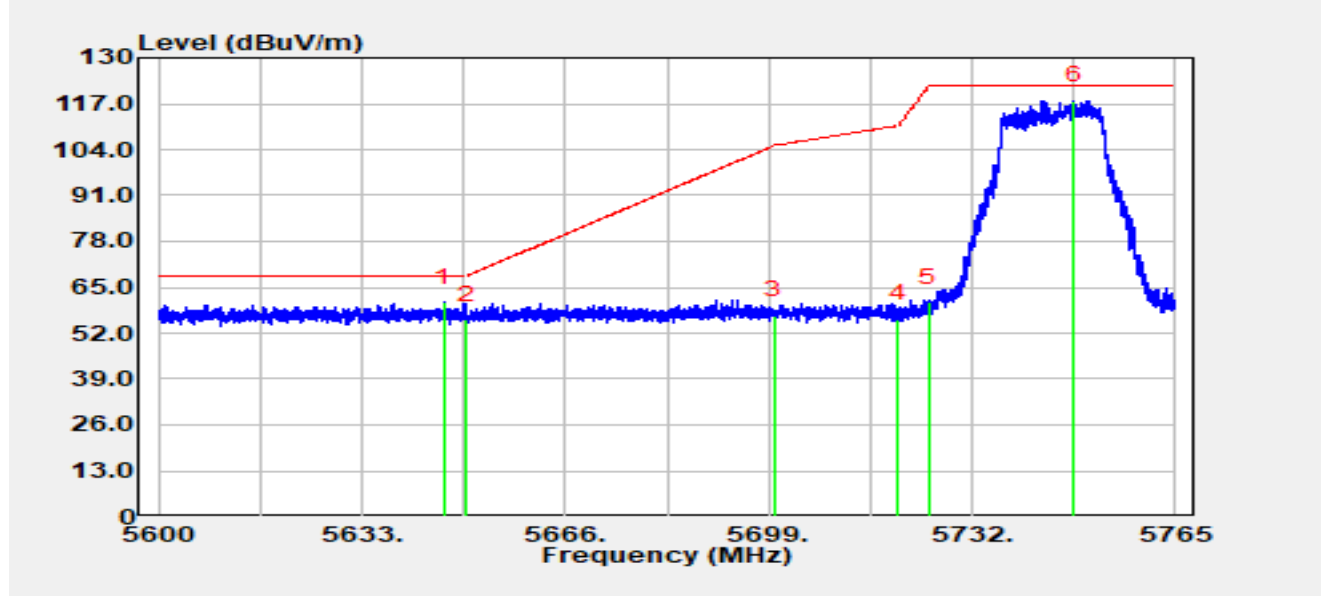


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5646.33	43.87	16.77	60.64	-7.56	68.20	Peak
2		5650.00	38.97	16.78	55.75	-12.45	68.20	Peak
3		5700.00	40.03	16.98	57.01	-48.19	105.20	Peak
4		5720.00	39.10	16.89	55.99	-54.81	110.80	Peak
5		5725.00	43.84	16.86	60.70	-61.50	122.20	Peak
6		5748.60	100.96	16.85	117.81	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-15
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5745 MHz		

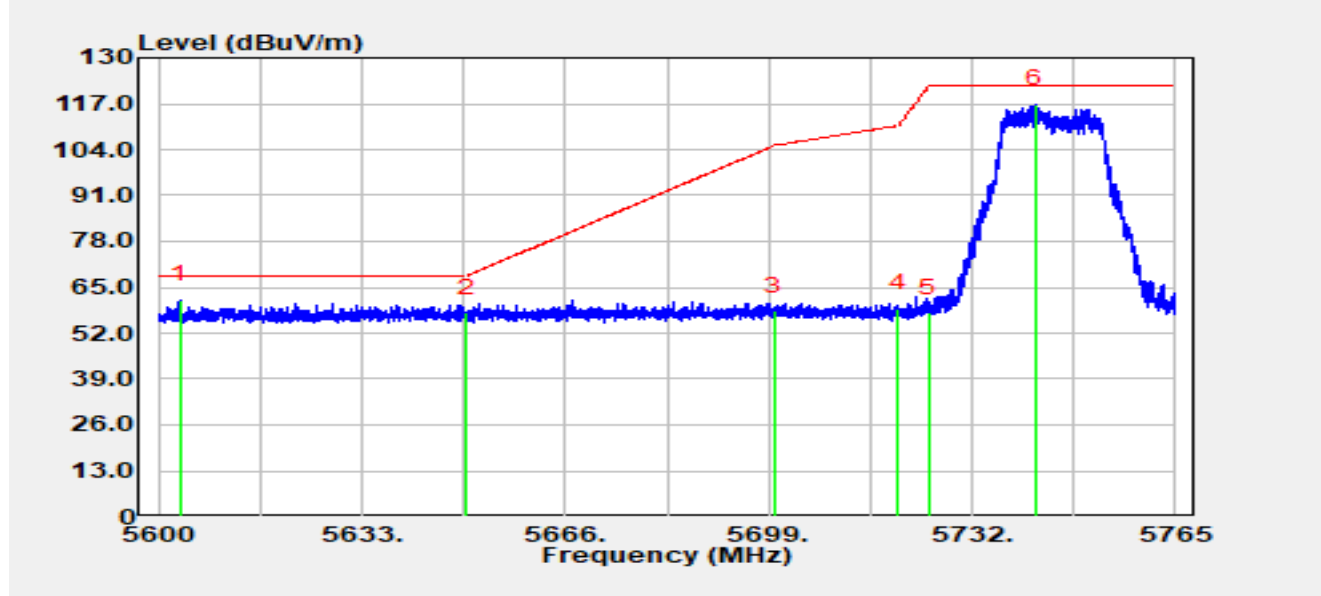


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5603.43	44.79	16.58	61.36	-6.84	68.20	Peak
2		5650.00	40.87	16.78	57.66	-10.54	68.20	Peak
3		5700.00	41.19	16.98	58.17	-47.03	105.20	Peak
4		5720.00	42.06	16.89	58.95	-51.85	110.80	Peak
5		5725.00	40.89	16.86	57.76	-64.44	122.20	Peak
6		5742.18	100.17	16.81	116.99	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-15
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5825 MHz		

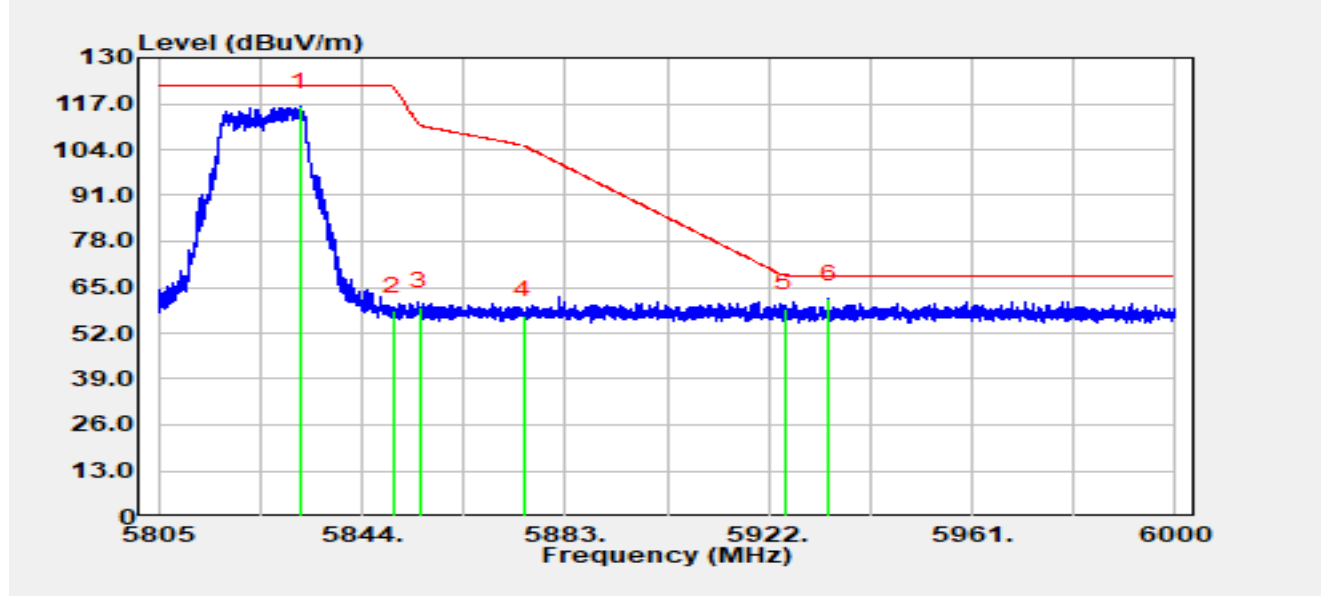


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5832.24	98.80	17.27	116.07	N/A	N/A	Peak
2		5850.00	40.87	17.36	58.23	-63.97	122.20	Peak
3		5855.00	42.12	17.33	59.44	-51.36	110.80	Peak
4		5875.00	39.54	17.43	56.97	-48.23	105.20	Peak
5		5925.00	41.65	17.40	59.05	-9.15	68.20	Peak
6	*	5933.41	44.27	17.46	61.73	-6.47	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-15
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5825 MHz		

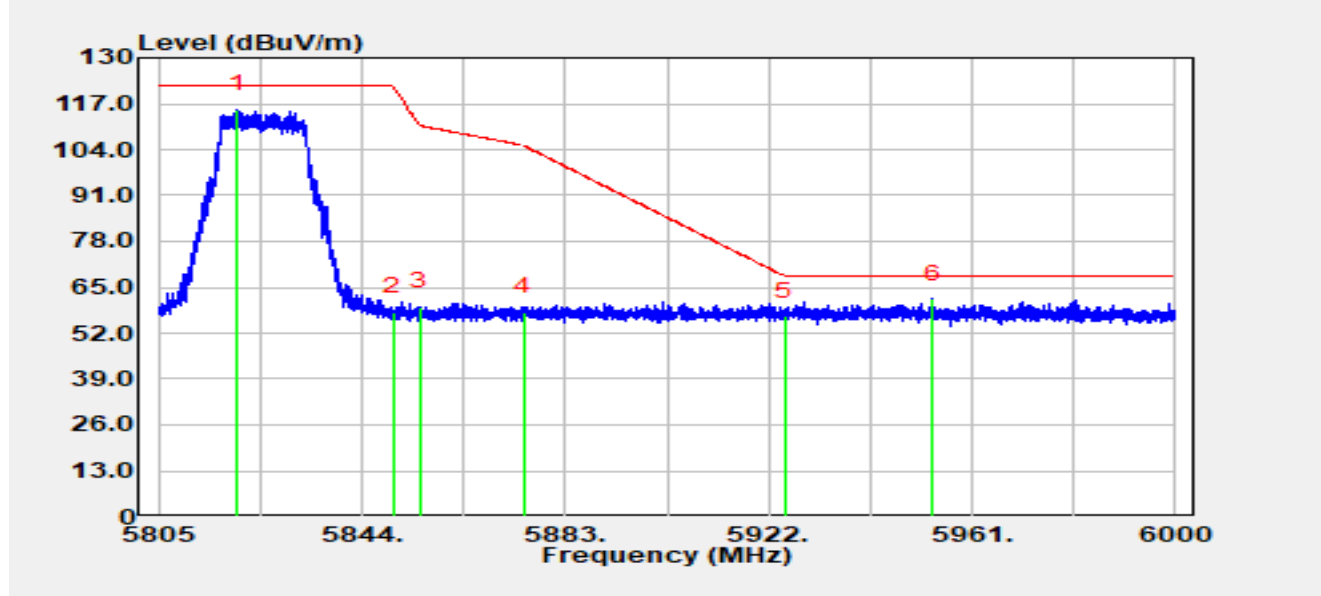


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5820.07	98.33	17.19	115.52	-6.68	122.20	Peak
2		5850.00	40.54	17.36	57.90	-64.30	122.20	Peak
3		5855.00	42.13	17.33	59.45	-51.35	110.80	Peak
4		5875.00	40.62	17.43	58.05	-47.15	105.20	Peak
5		5925.00	39.38	17.40	56.78	-11.42	68.20	Peak
6		5953.38	44.04	17.63	61.67	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-15
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

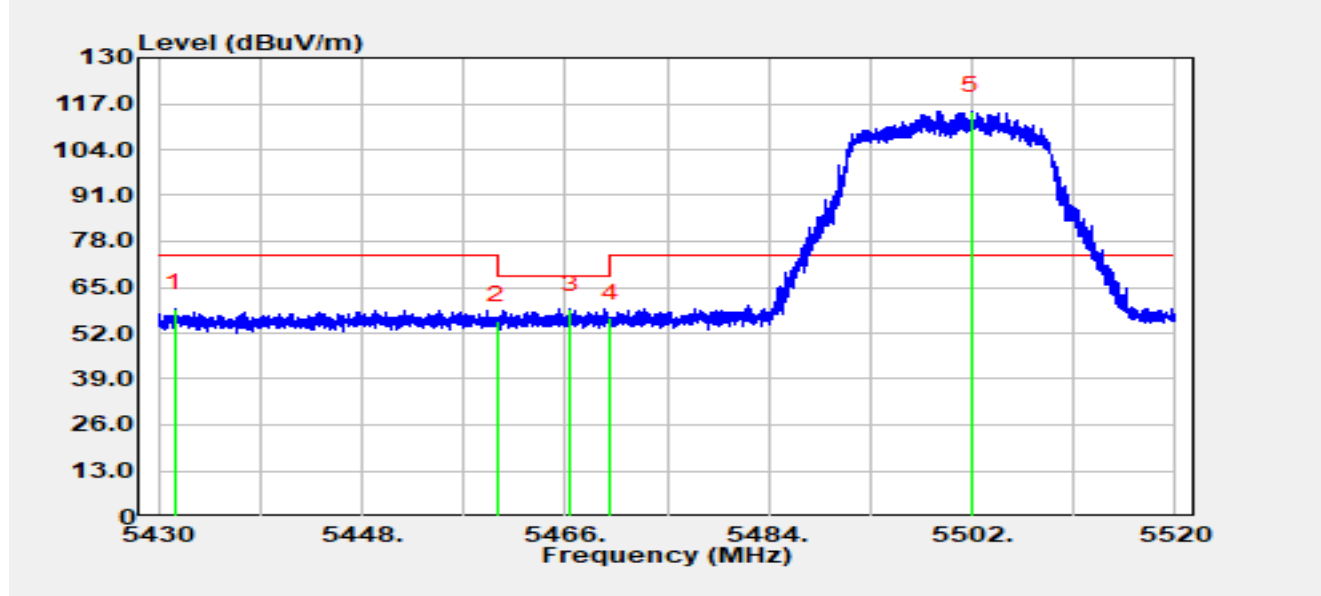


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5431.43	43.21	15.70	58.91	-15.09	74.00	Peak
2		5460.00	39.61	15.99	55.60	-12.60	68.20	Peak
3	*	5466.44	42.92	15.94	58.86	-9.34	68.20	Peak
4		5470.00	40.28	15.94	56.23	-11.97	68.20	Peak
5		5501.93	98.60	16.25	114.84	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-15
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

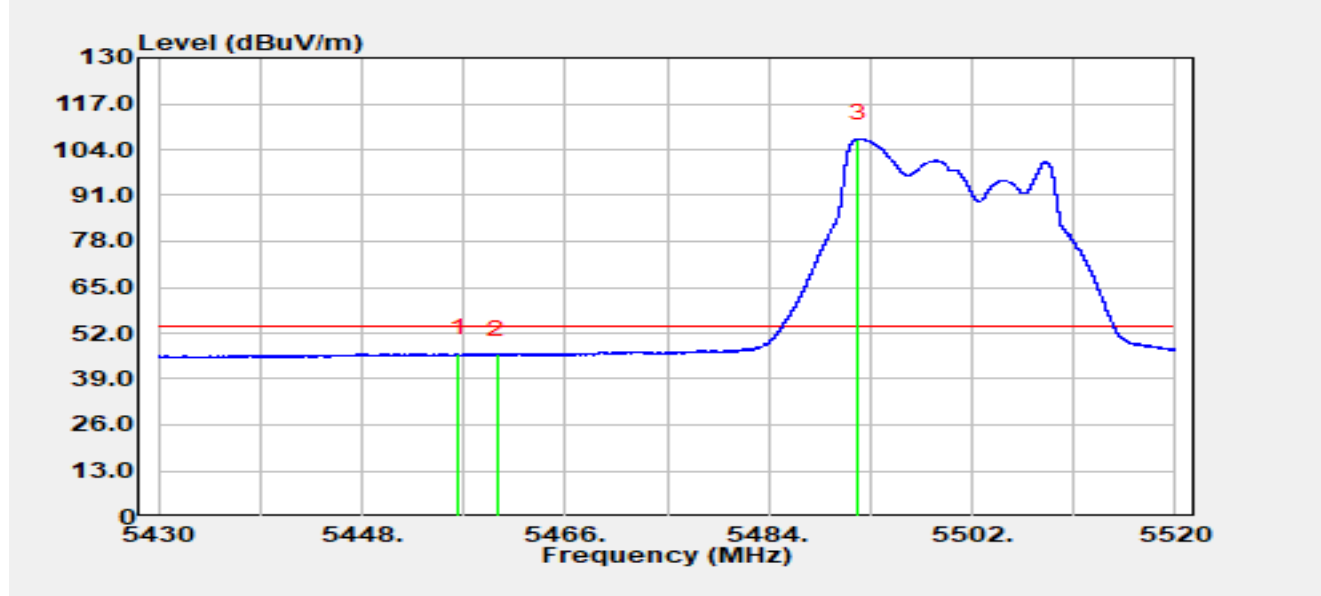


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5456.57	30.31	16.01	46.32	-7.68	54.00	Average
2		5460.00	30.02	15.99	46.01	-7.99	54.00	Average
3		5491.94	90.94	16.18	107.13	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-15
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

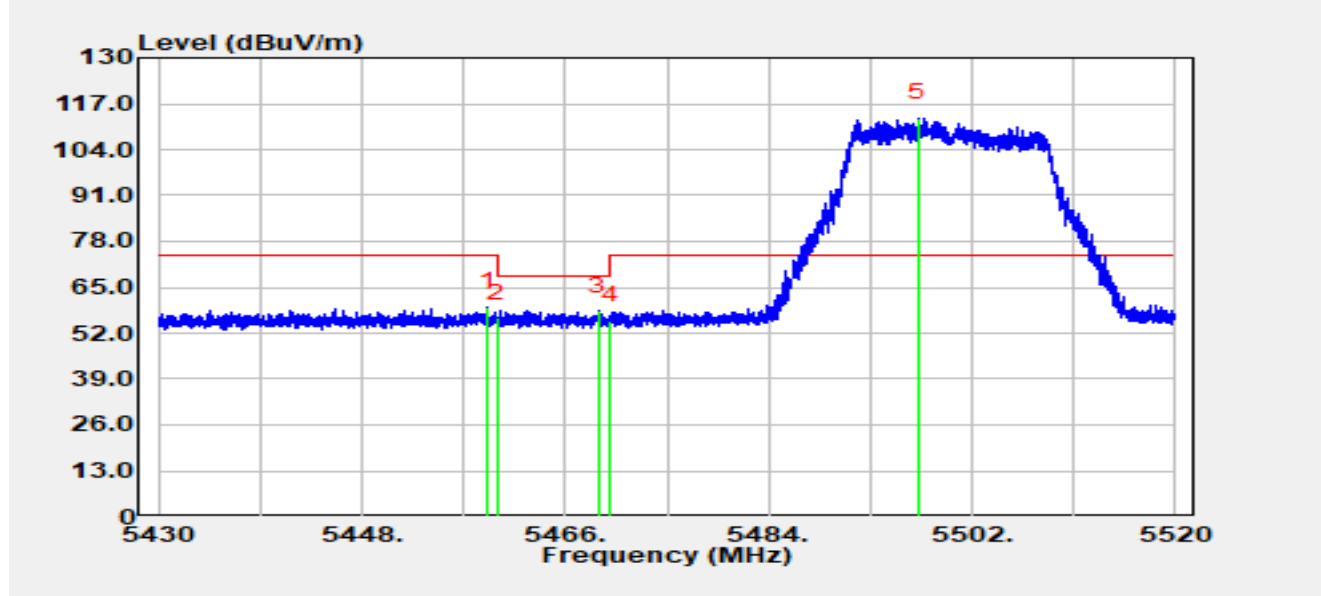


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.14	43.50	15.99	59.50	-14.50	74.00	Peak
2		5460.00	40.42	15.99	56.41	-11.79	68.20	Peak
3	*	5468.93	42.43	15.93	58.37	-9.83	68.20	Peak
4		5470.00	39.50	15.94	55.45	-12.75	68.20	Peak
5		5497.20	96.63	16.22	112.84	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-15
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

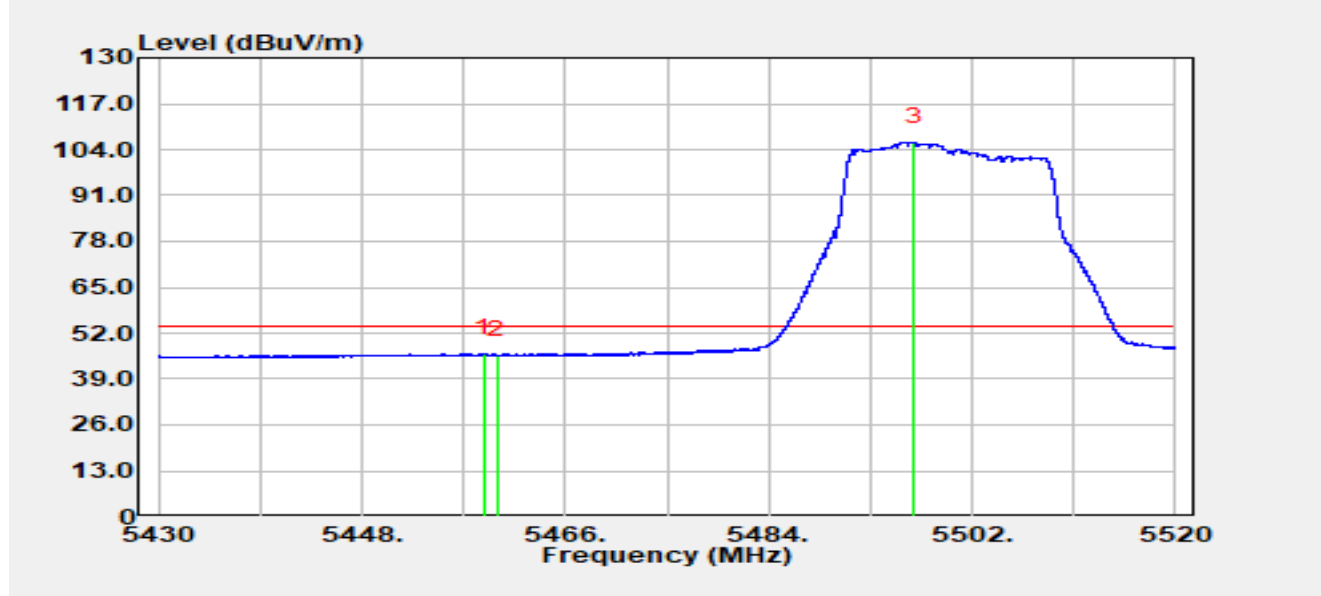


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.75	30.12	16.00	46.12	-7.88	54.00	Average
2		5460.00	29.73	15.99	45.72	-8.28	54.00	Average
3		5496.90	89.91	16.21	106.13	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-15
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5700 MHz		

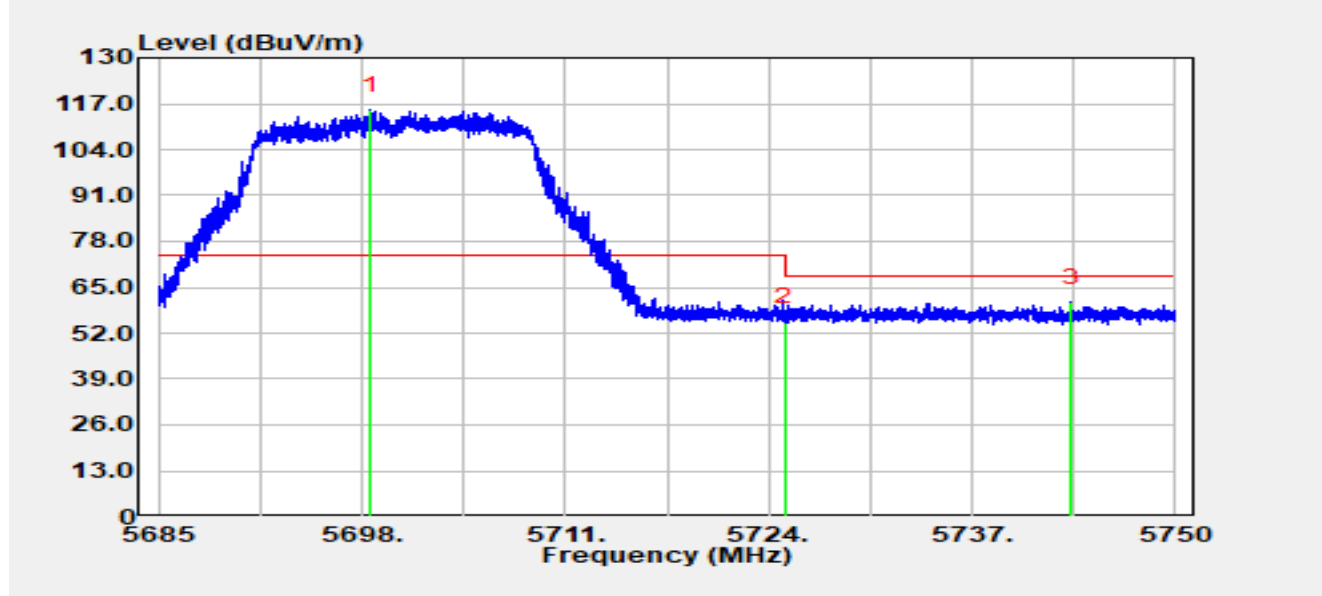


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5698.56	98.07	16.99	115.06	N/A	N/A	Peak
2		5725.00	38.23	16.86	55.10	-13.10	68.20	Peak
3	*	5743.33	43.87	16.82	60.68	-7.52	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-15
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5700 MHz		

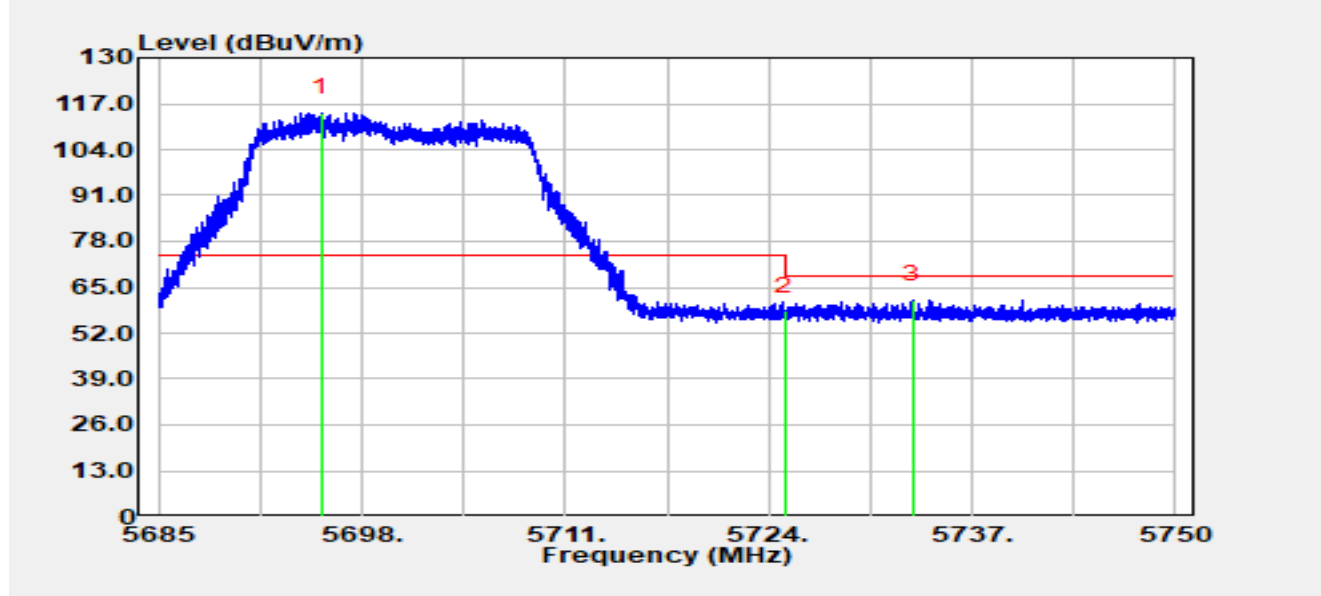


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5695.39	97.43	17.00	114.43	N/A	N/A	Peak
2		5725.00	41.41	16.86	58.27	-9.93	68.20	Peak
3	*	5733.18	44.67	16.84	61.51	-6.69	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-15
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5745 MHz		

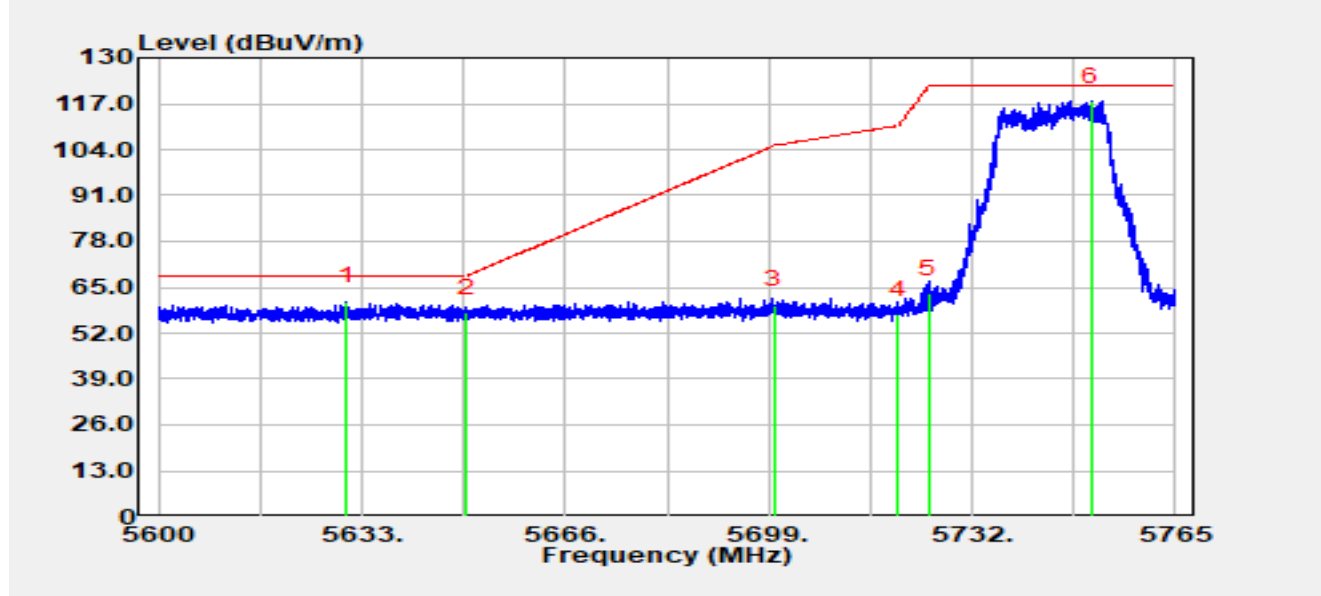


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5630.46	44.43	16.60	61.03	-7.17	68.20	Peak
2		5650.00	40.89	16.78	57.67	-10.53	68.20	Peak
3		5700.00	43.05	16.98	60.03	-45.17	105.20	Peak
4		5720.00	40.38	16.89	57.27	-53.53	110.80	Peak
5		5725.00	46.18	16.86	63.05	-59.15	122.20	Peak
6		5751.42	100.80	16.87	117.67	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-15
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5745 MHz		

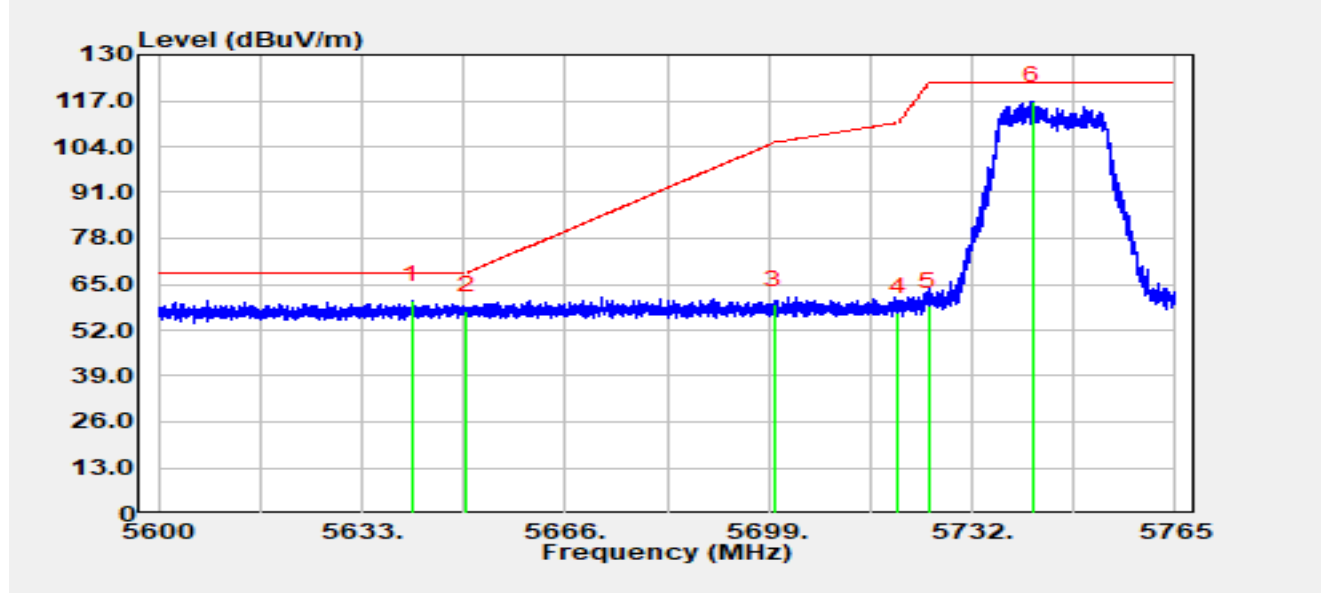


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5641.18	43.75	16.75	60.49	-7.71	68.20	Peak
2		5650.00	40.74	16.78	57.52	-10.68	68.20	Peak
3		5700.00	42.36	16.98	59.34	-45.86	105.20	Peak
4		5720.00	40.10	16.89	56.98	-53.82	110.80	Peak
5		5725.00	41.87	16.86	58.74	-63.46	122.20	Peak
6		5741.80	100.15	16.81	116.96	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-15
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5825 MHz		

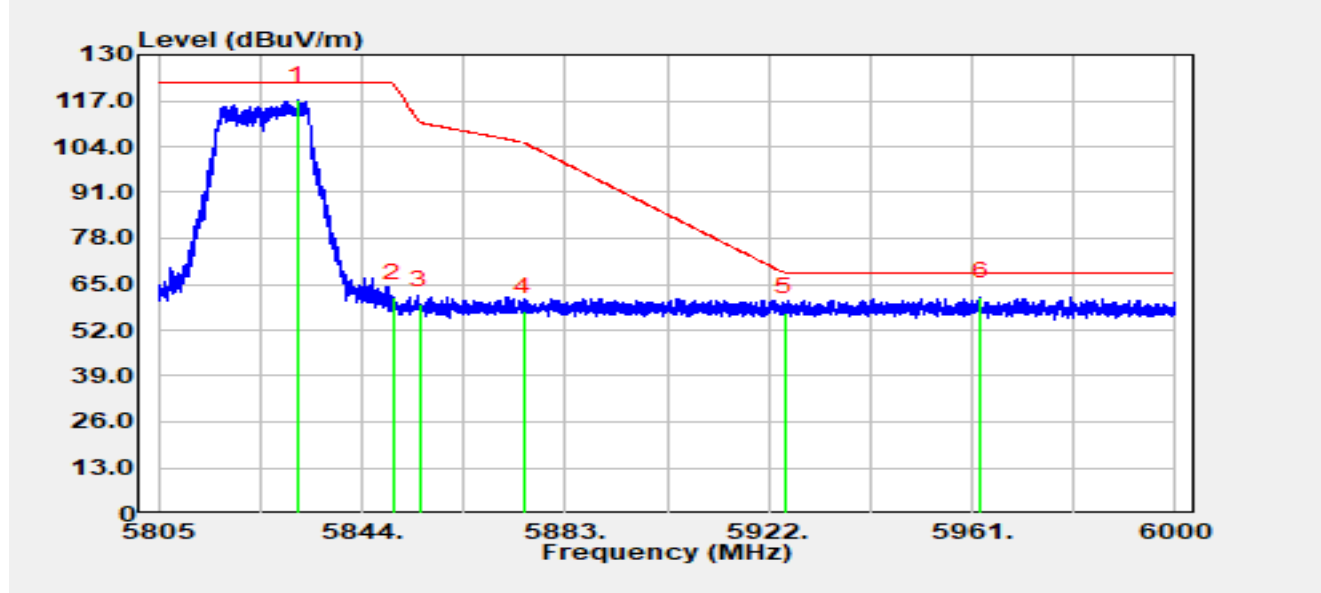


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5831.54	99.80	17.26	117.06	N/A	N/A	Peak
2		5850.00	43.80	17.36	61.15	-61.05	122.20	Peak
3		5855.00	41.82	17.33	59.15	-51.65	110.80	Peak
4		5875.00	39.89	17.43	57.32	-47.88	105.20	Peak
5		5925.00	39.58	17.40	56.98	-11.22	68.20	Peak
6	*	5962.66	43.89	17.66	61.55	-6.65	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-15
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5825 MHz		

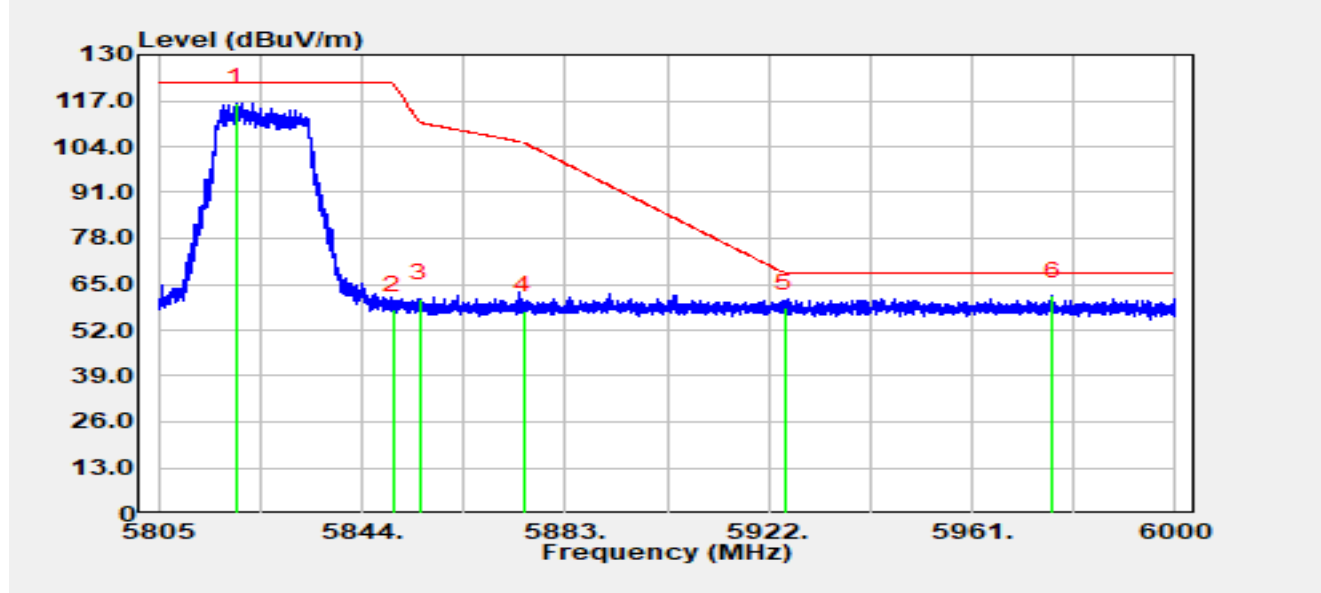


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5819.82	99.27	17.19	116.46	N/A	N/A	Peak
2		5850.00	40.50	17.36	57.86	-64.34	122.20	Peak
3		5855.00	43.66	17.33	60.98	-49.82	110.80	Peak
4		5875.00	39.98	17.43	57.41	-47.79	105.20	Peak
5		5925.00	40.94	17.40	58.34	-9.86	68.20	Peak
6	*	5976.41	43.98	17.77	61.75	-6.45	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-15
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

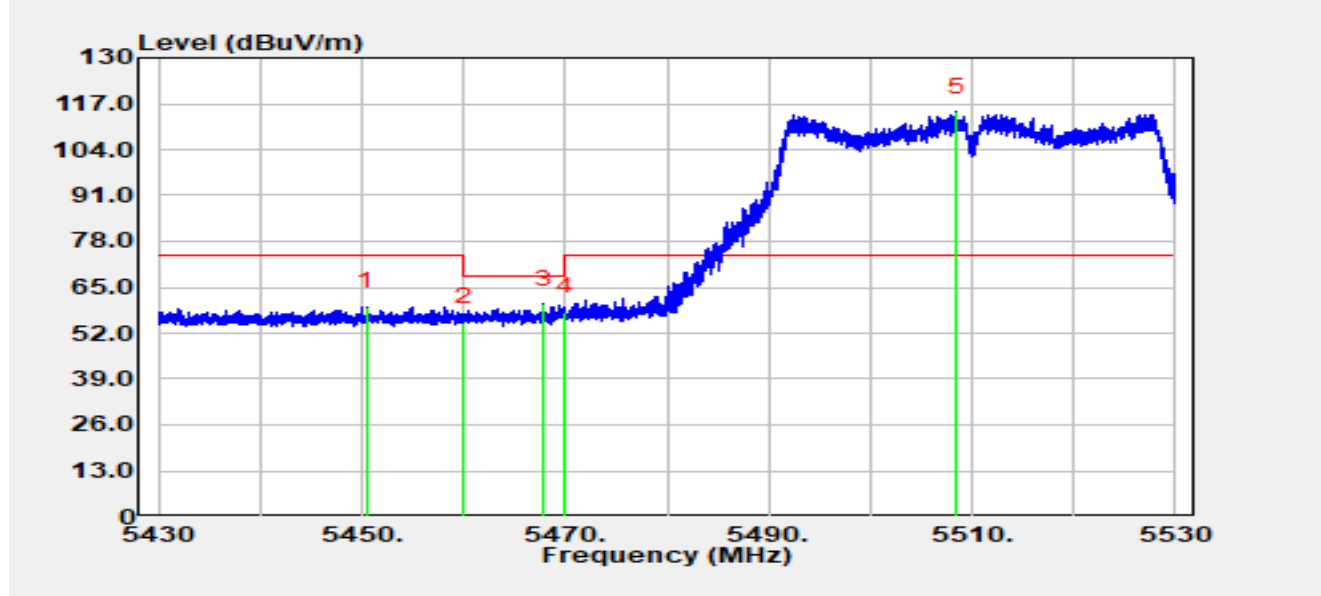


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5450.45	43.52	16.01	59.53	-14.47	74.00	Peak
2		5460.00	39.20	15.99	55.19	-13.01	68.20	Peak
3	*	5467.86	44.24	15.93	60.17	-8.03	68.20	Peak
4		5470.00	42.17	15.94	58.12	-10.08	68.20	Peak
5		5508.46	98.32	16.25	114.57	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-15
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

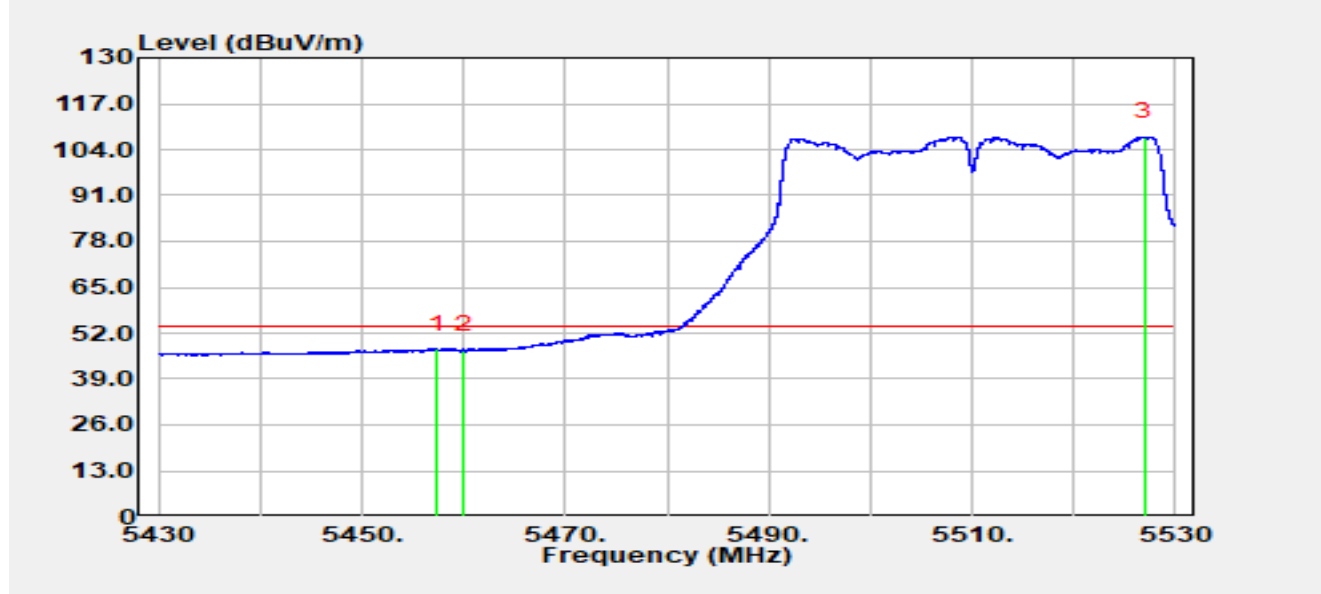


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5457.42	31.51	16.00	47.52	-6.48	54.00	Average
2		5460.00	31.15	15.99	47.14	-6.86	54.00	Average
3		5526.91	91.30	16.35	107.65	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-15
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

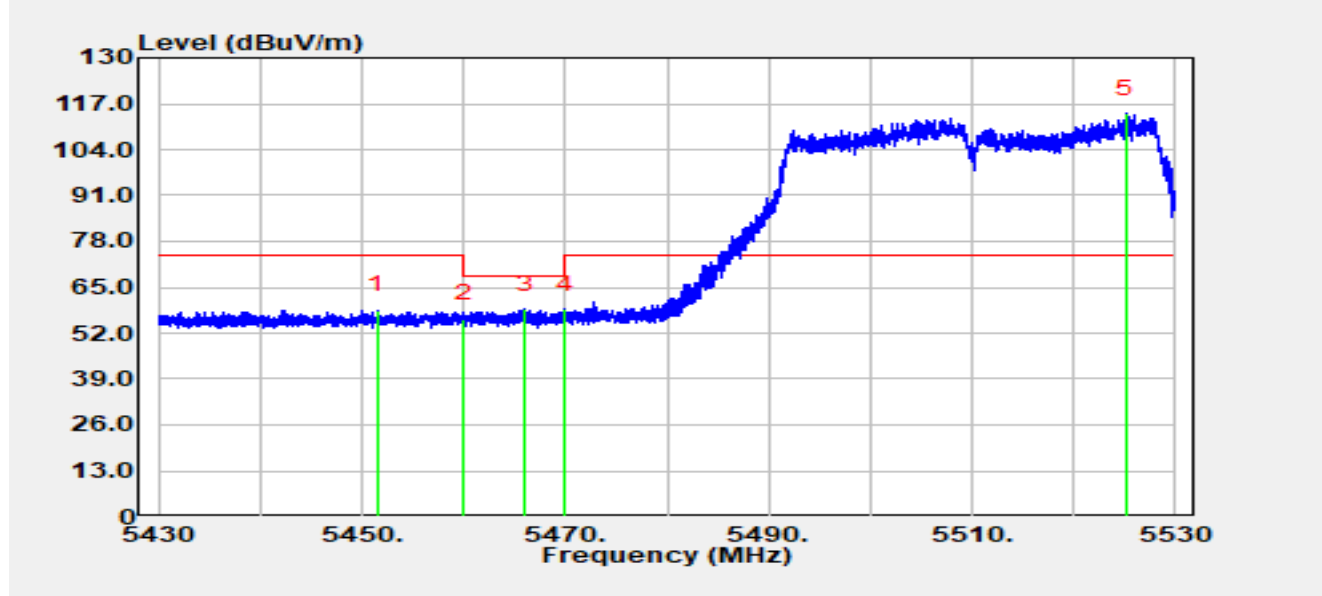


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5451.48	42.42	16.02	58.45	-15.55	74.00	Peak
2		5460.00	40.11	15.99	56.09	-12.11	68.20	Peak
3		5466.03	42.78	15.94	58.72	-9.48	68.20	Peak
4	*	5470.00	42.85	15.94	58.79	-9.41	68.20	Peak
5		5525.14	97.86	16.33	114.19	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-15
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

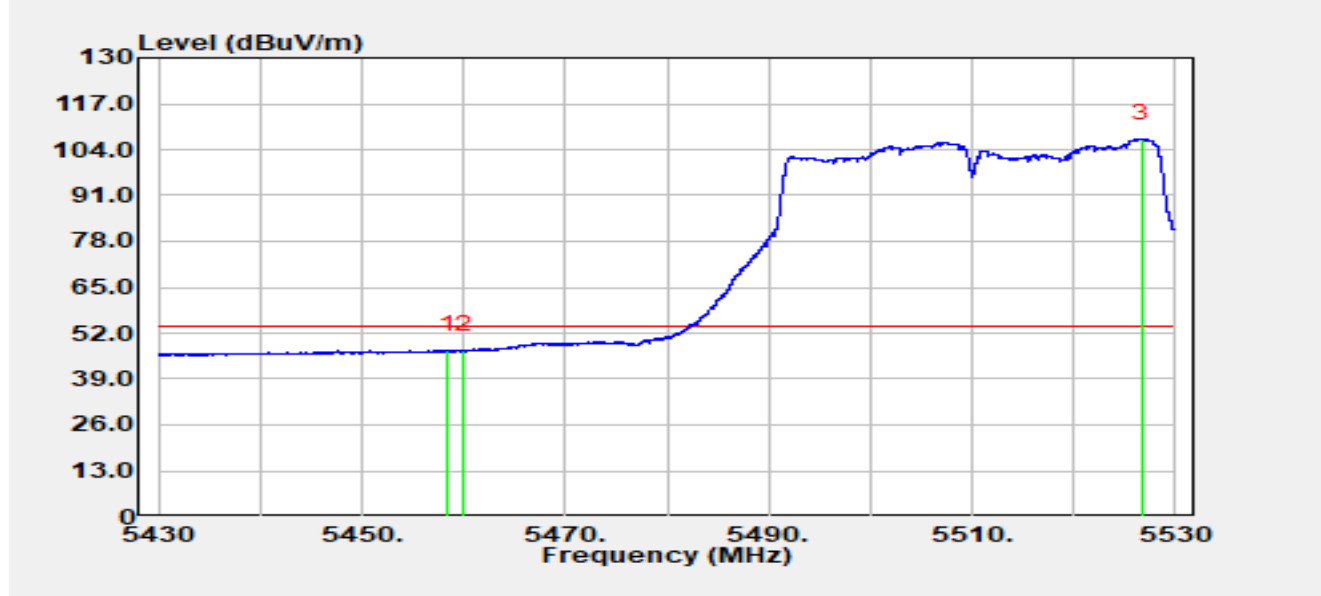


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.49	31.14	16.00	47.13	-6.87	54.00	Average
2		5460.00	31.12	15.99	47.10	-6.90	54.00	Average
3		5526.66	90.77	16.35	107.12	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-15
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5670 MHz		

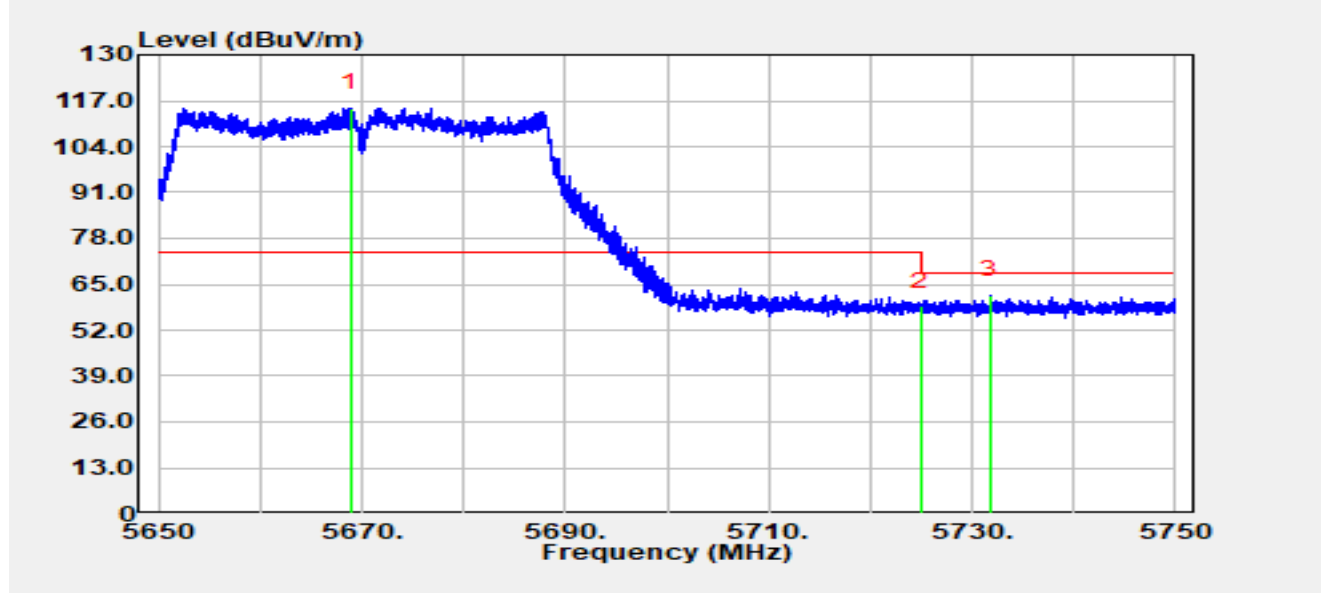


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5668.84	98.01	16.89	114.90	N/A	N/A	Peak
2		5725.00	41.82	16.86	58.68	-9.52	68.20	Peak
3	*	5731.80	45.02	16.84	61.86	-6.34	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-15
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5670 MHz		

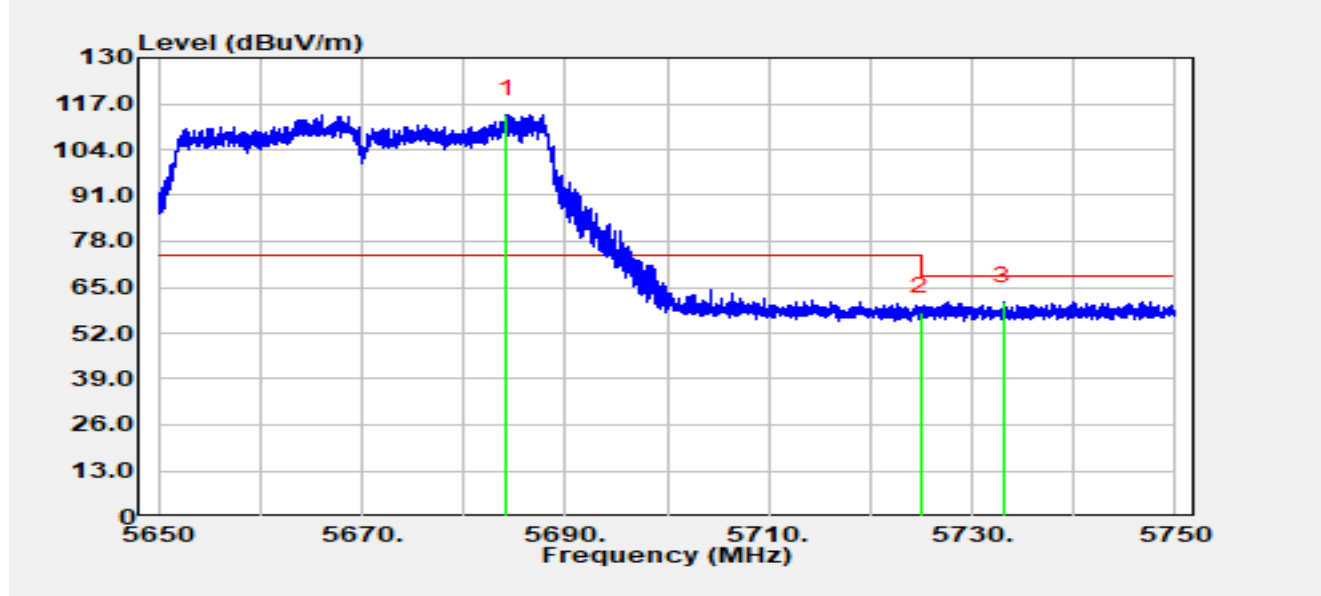


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5684.26	96.94	16.99	113.93	N/A	N/A	Peak
2		5725.00	41.06	16.86	57.92	-10.28	68.20	Peak
3	*	5733.04	44.18	16.84	61.02	-7.18	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-15
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5755 MHz		

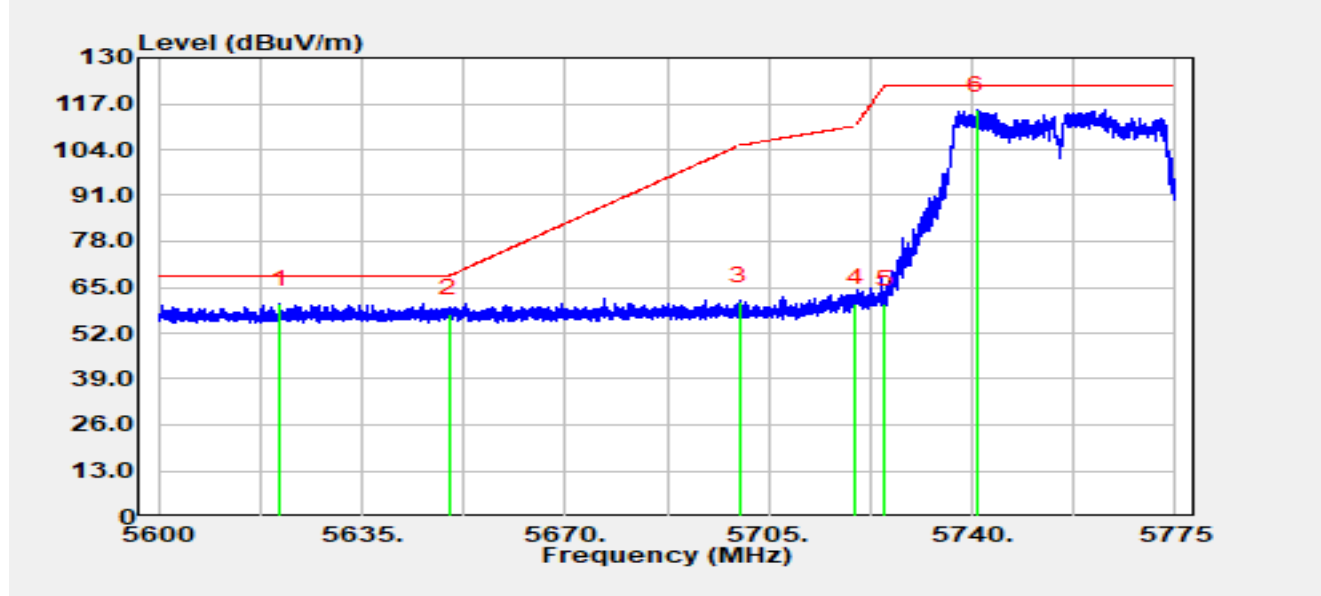


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5620.93	43.88	16.44	60.32	-7.88	68.20	Peak
2		5650.00	40.80	16.78	57.59	-10.61	68.20	Peak
3		5700.00	43.97	16.98	60.96	-44.24	105.20	Peak
4		5720.00	43.63	16.89	60.52	-50.28	110.80	Peak
5		5725.00	43.28	16.86	60.15	-62.05	122.20	Peak
6		5740.72	98.40	16.81	115.21	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-15
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5755 MHz		

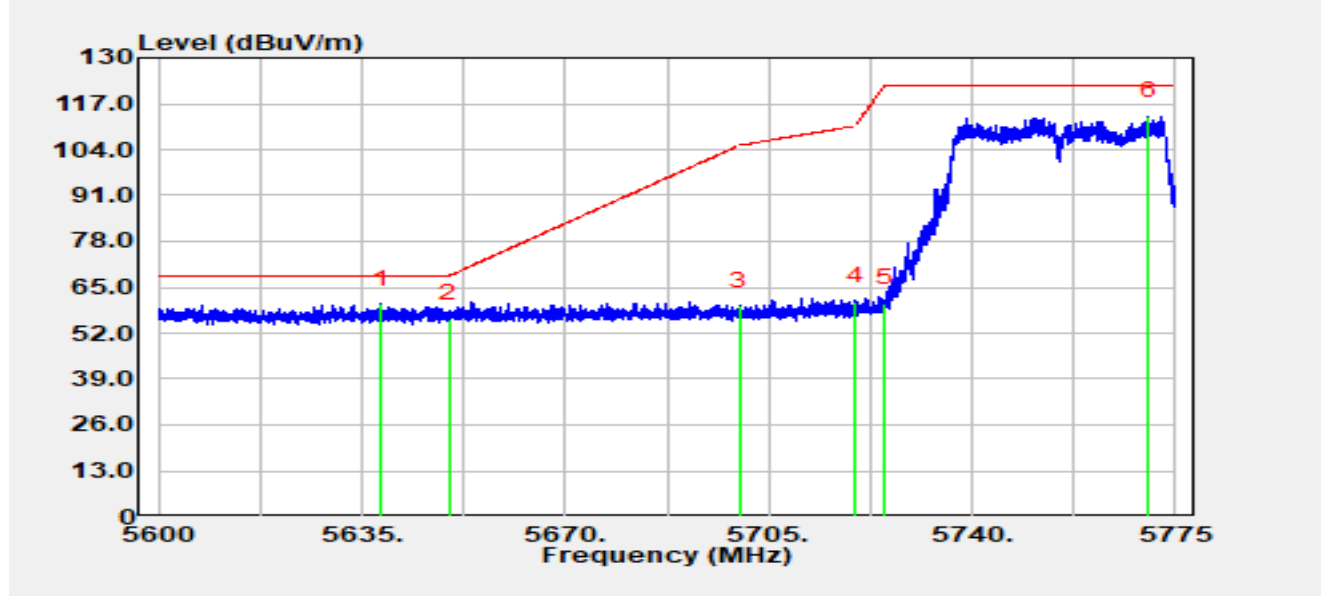


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5638.36	43.42	16.73	60.15	N/A	N/A	Peak
2		5650.00	39.37	16.78	56.16	-12.04	68.20	Peak
3		5700.00	42.68	16.98	59.67	-45.53	105.20	Peak
4		5720.00	43.99	16.89	60.87	-49.93	110.80	Peak
5		5725.00	43.55	16.86	60.42	-61.78	122.20	Peak
6	*	5770.33	96.52	16.98	113.50	-8.70	122.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-15
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5795 MHz		

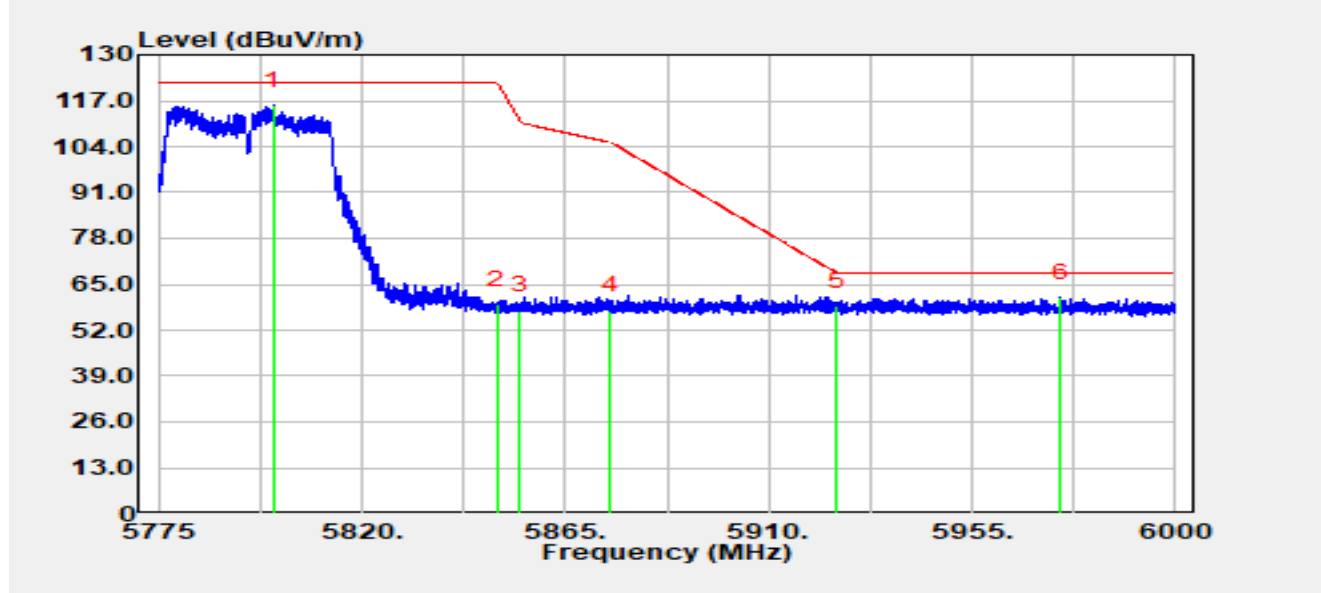


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5800.31	98.53	17.10	115.63	N/A	N/A	Peak
2		5850.00	41.95	17.36	59.31	-62.89	122.20	Peak
3		5855.00	40.17	17.33	57.50	-53.30	110.80	Peak
4		5875.00	39.97	17.43	57.40	-47.80	105.20	Peak
5		5925.00	41.38	17.40	58.78	-9.42	68.20	Peak
6	*	5974.53	43.56	17.76	61.31	-6.89	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-15
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5795 MHz		

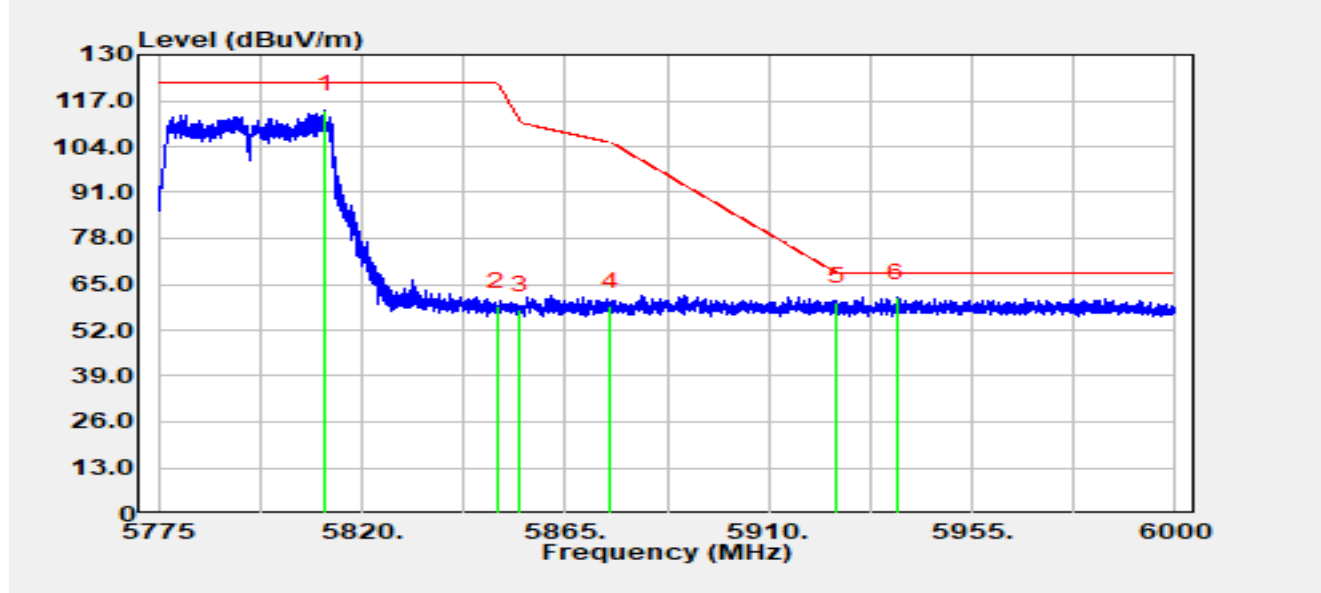

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5811.83	97.31	17.17	114.48	-7.72	122.20	Peak
2		5850.00	41.41	17.36	58.77	-63.43	122.20	Peak
3		5855.00	40.45	17.33	57.77	-53.03	110.80	Peak
4		5875.00	41.44	17.43	58.87	-46.33	105.20	Peak
5		5925.00	42.57	17.40	59.97	-8.23	68.20	Peak
6		5938.49	43.68	17.52	61.20	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).