

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11be-EHT40 - Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8396.70	47.83	-2.81	45.02	-28.98	74.00	Peak	Horizontal
*	10101.80	46.06	-0.99	45.06	-23.14	68.20	Peak	Horizontal
	11021.50	46.71	-0.72	45.99	-28.01	74.00	Peak	Horizontal
*	17457.70	43.43	8.65	52.08	-16.12	68.20	Peak	Horizontal
	8349.10	47.24	-2.87	44.36	-29.64	74.00	Peak	Vertical
*	9778.80	46.93	-1.43	45.50	-22.70	68.20	Peak	Vertical
	11021.50	49.41	-0.72	48.69	-25.31	74.00	Peak	Vertical
*	17551.20	44.08	8.29	52.36	-15.84	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11be-EHT40 - Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8269.20	46.85	-2.96	43.89	-30.11	74.00	Peak	Horizontal
*	10555.70	46.92	-0.44	46.49	-21.71	68.20	Peak	Horizontal
	12429.10	46.94	-0.17	46.76	-27.24	74.00	Peak	Horizontal
*	17212.90	43.83	7.86	51.69	-16.51	68.20	Peak	Horizontal
	8206.30	47.69	-3.16	44.53	-29.47	74.00	Peak	Vertical
*	10307.50	46.50	-0.76	45.74	-22.46	68.20	Peak	Vertical
	11098.00	41.33	-1.12	40.21	-13.79	54.00	Average	Vertical
	11098.00	51.25	-1.12	50.13	-23.87	74.00	Peak	Vertical
*	16708.00	44.59	7.09	51.69	-16.51	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11be-EHT40 - Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8413.70	47.08	-2.83	44.25	-29.75	74.00	Peak	Horizontal
*	10259.90	46.93	-0.67	46.25	-21.95	68.20	Peak	Horizontal
	12395.10	46.17	-0.21	45.96	-28.04	74.00	Peak	Horizontal
*	17561.40	43.78	8.32	52.09	-16.11	68.20	Peak	Horizontal
	8362.70	47.82	-2.85	44.97	-29.03	74.00	Peak	Vertical
*	10244.60	46.32	-0.95	45.36	-22.84	68.20	Peak	Vertical
	11322.40	39.58	-0.92	38.66	-15.34	54.00	Average	Vertical
	11322.40	48.94	-0.92	48.02	-25.98	74.00	Peak	Vertical
*	17286.00	43.67	7.83	51.50	-16.70	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11be-EHT40 - Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8464.70	47.57	-2.92	44.66	-29.34	74.00	Peak	Horizontal
*	10197.00	46.95	-1.08	45.87	-22.33	68.20	Peak	Horizontal
	11009.60	46.53	-0.60	45.93	-28.07	74.00	Peak	Horizontal
*	17386.30	43.54	8.19	51.73	-16.47	68.20	Peak	Horizontal
	8463.00	46.95	-2.92	44.04	-29.96	74.00	Peak	Vertical
*	10042.30	46.24	-0.97	45.28	-22.92	68.20	Peak	Vertical
	11417.60	40.36	-0.98	39.38	-14.62	54.00	Average	Vertical
	11417.60	50.18	-0.98	49.19	-24.81	74.00	Peak	Vertical
*	17518.90	43.35	8.33	51.68	-16.52	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11be-EHT40 - Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8439.20	46.68	-2.76	43.91	-30.09	74.00	Peak	Horizontal
*	9899.50	46.37	-1.18	45.19	-23.01	68.20	Peak	Horizontal
	12301.60	46.19	-0.44	45.75	-28.25	74.00	Peak	Horizontal
*	17593.70	44.40	8.02	52.42	-15.78	68.20	Peak	Horizontal
	8440.90	47.56	-2.74	44.83	-29.17	74.00	Peak	Vertical
*	10149.40	45.54	-0.60	44.94	-23.26	68.20	Peak	Vertical
	11500.90	40.06	-1.17	38.89	-15.11	54.00	Average	Vertical
	11500.90	49.28	-1.17	48.11	-25.89	74.00	Peak	Vertical
*	17483.20	43.37	8.59	51.96	-16.24	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11be-EHT40 - Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8291.30	46.71	-2.75	43.96	-30.04	74.00	Peak	Horizontal
*	10169.80	45.73	-0.67	45.06	-23.14	68.20	Peak	Horizontal
	11721.90	47.04	-0.77	46.27	-27.73	74.00	Peak	Horizontal
*	17221.40	44.91	7.89	52.80	-15.40	68.20	Peak	Horizontal
	8325.30	47.11	-2.84	44.27	-29.73	74.00	Peak	Vertical
*	9775.40	46.35	-1.43	44.91	-23.29	68.20	Peak	Vertical
	11585.90	43.29	-1.08	42.21	-11.79	54.00	Average	Vertical
	11585.90	52.63	-1.08	51.55	-22.45	74.00	Peak	Vertical
*	17394.80	43.63	8.31	51.94	-16.26	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11be-EHT80 - Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8350.80	47.14	-2.87	44.27	-29.73	74.00	Peak	Horizontal
*	9959.00	45.73	-0.79	44.94	-23.26	68.20	Peak	Horizontal
	11713.40	46.68	-0.80	45.88	-28.12	74.00	Peak	Horizontal
*	17654.90	43.61	8.45	52.06	-16.14	68.20	Peak	Horizontal
	8327.00	47.20	-2.86	44.34	-29.66	74.00	Peak	Vertical
*	10253.10	46.24	-0.82	45.42	-22.78	68.20	Peak	Vertical
	11040.20	47.29	-0.90	46.39	-27.61	74.00	Peak	Vertical
*	17422.00	44.19	7.72	51.91	-16.29	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11be-EHT80 - Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8432.40	47.68	-2.87	44.81	-29.19	74.00	Peak	Horizontal
*	9683.60	47.25	-1.22	46.03	-22.17	68.20	Peak	Horizontal
	12175.80	47.05	-0.66	46.39	-27.61	74.00	Peak	Horizontal
*	17401.60	43.54	8.38	51.92	-16.28	68.20	Peak	Horizontal
	8311.70	46.69	-2.67	44.01	-29.99	74.00	Peak	Vertical
*	10028.70	45.80	-0.76	45.04	-23.16	68.20	Peak	Vertical
	11217.00	48.05	-1.08	46.97	-27.03	74.00	Peak	Vertical
*	17479.80	43.94	8.59	52.53	-15.67	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11be-EHT80 - Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8369.50	47.12	-2.93	44.20	-29.80	74.00	Peak	Horizontal
*	9982.80	46.23	-0.77	45.46	-22.74	68.20	Peak	Horizontal
	11577.40	47.19	-1.05	46.15	-27.85	74.00	Peak	Horizontal
*	17488.30	43.57	8.60	52.17	-16.03	68.20	Peak	Horizontal
	8342.30	47.15	-2.88	44.26	-29.74	74.00	Peak	Vertical
*	10101.80	46.30	-0.99	45.31	-22.89	68.20	Peak	Vertical
	11407.40	40.39	-1.01	39.38	-14.62	54.00	Average	Vertical
	11407.40	49.77	-1.01	48.76	-25.24	74.00	Peak	Vertical
*	17252.00	44.05	8.14	52.19	-16.01	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11be-EHT80 - Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8320.20	46.74	-2.78	43.96	-30.04	74.00	Peak	Horizontal
*	9889.30	46.82	-1.13	45.69	-22.51	68.20	Peak	Horizontal
	11132.00	46.83	-0.87	45.96	-28.04	74.00	Peak	Horizontal
*	17471.30	44.35	8.58	52.93	-15.27	68.20	Peak	Horizontal
	8393.30	46.80	-2.83	43.97	-30.03	74.00	Peak	Vertical
*	10151.10	45.90	-0.59	45.31	-22.89	68.20	Peak	Vertical
	11563.80	39.11	-1.11	38.00	-16.00	54.00	Average	Vertical
	11563.80	48.23	-1.11	47.11	-26.89	74.00	Peak	Vertical
*	17491.70	43.12	8.58	51.70	-16.50	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11be-EHT160-Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8332.10	47.16	-2.87	44.29	-29.71	74.00	Peak	Horizontal
*	10021.90	46.08	-0.81	45.27	-22.93	68.20	Peak	Horizontal
	12301.60	46.76	-0.44	46.32	-27.68	74.00	Peak	Horizontal
*	17530.80	43.67	8.28	51.94	-16.26	68.20	Peak	Horizontal
	8406.90	48.01	-2.81	45.20	-28.80	74.00	Peak	Vertical
*	9874.00	46.11	-1.09	45.02	-23.18	68.20	Peak	Vertical
	12014.30	47.06	-0.52	46.54	-27.46	74.00	Peak	Vertical
*	17466.20	43.07	8.61	51.68	-16.52	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.


Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Worst-case Result of Radiated Emission 9 kHz ~ 30 MHz:

AP541e - WLAN Config 1

Site	SIP-AC3	Test Date	2026-02-25
Temperature	16.0°C	Humidity	52.7%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Coaxial
Test Mode	Transmit by 802.11be-EHT20 at 5720 MHz		

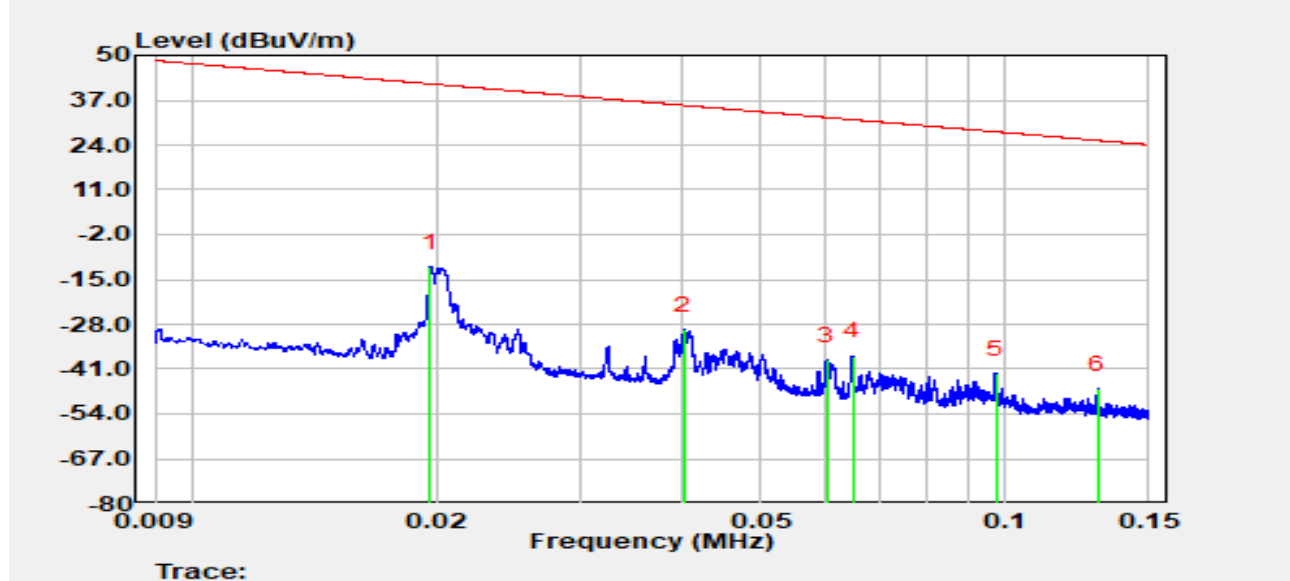


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	0.020	48.81	-60.25	-11.44	-53.17	41.73	Peak
2		0.040	30.88	-60.37	-29.49	-64.99	35.50	Peak
3		0.060	22.19	-60.56	-38.37	-70.36	31.99	Peak
4		0.065	23.42	-60.59	-37.17	-68.51	31.34	Peak
5		0.097	18.37	-60.61	-42.23	-70.05	27.82	Peak
6		0.130	13.93	-60.59	-46.66	-71.99	25.32	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 40log(d1/d2) (dB), d1 = 3 m, d2 = 300 m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-25
Temperature	16.0°C	Humidity	52.7%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Coaxial
Test Mode	Transmit by 802.11be-EHT20 at 5720 MHz		

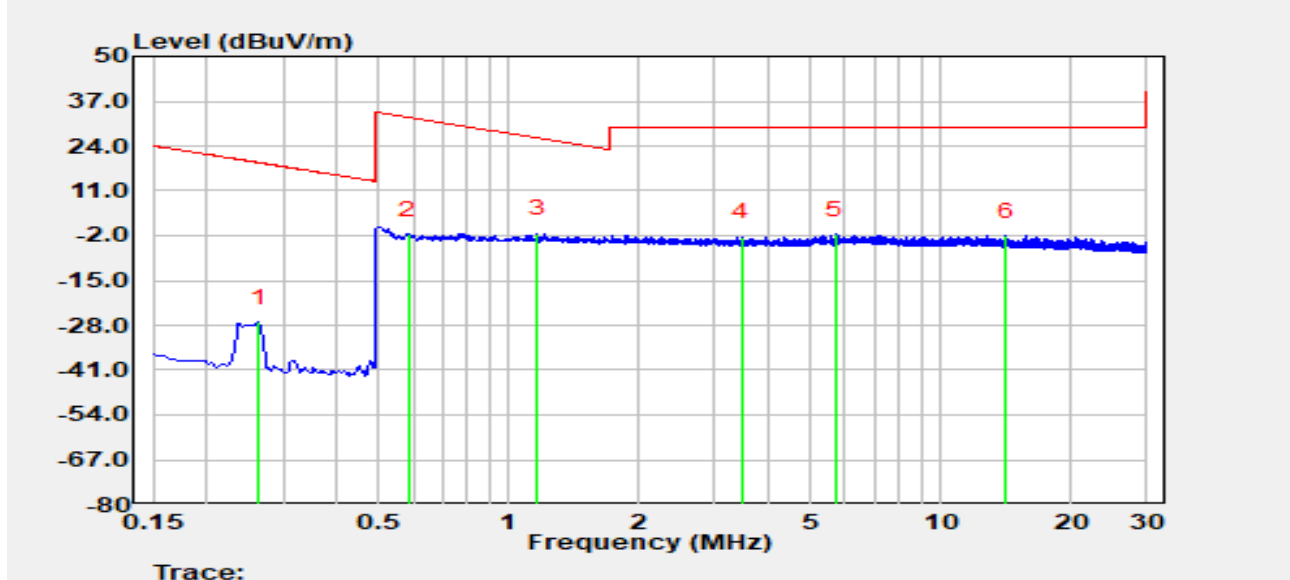


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.263	33.43	-60.66	-27.24	-46.42	19.19	Peak
2		0.586	19.06	-20.70	-1.64	-33.89	32.25	Peak
3	*	1.165	19.32	-20.69	-1.37	-27.66	26.30	Peak
4		3.460	18.14	-20.60	-2.45	-31.95	29.50	Peak
5		5.714	18.75	-20.41	-1.66	-31.16	29.50	Peak
6		14.108	18.08	-20.24	-2.16	-31.66	29.50	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 40log(d1/d2) (dB), d1 = 3 m, d2 = 300 m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-25
Temperature	16.0°C	Humidity	52.7%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Coplanar
Test Mode	Transmit by 802.11be-EHT20 at 5720 MHz		

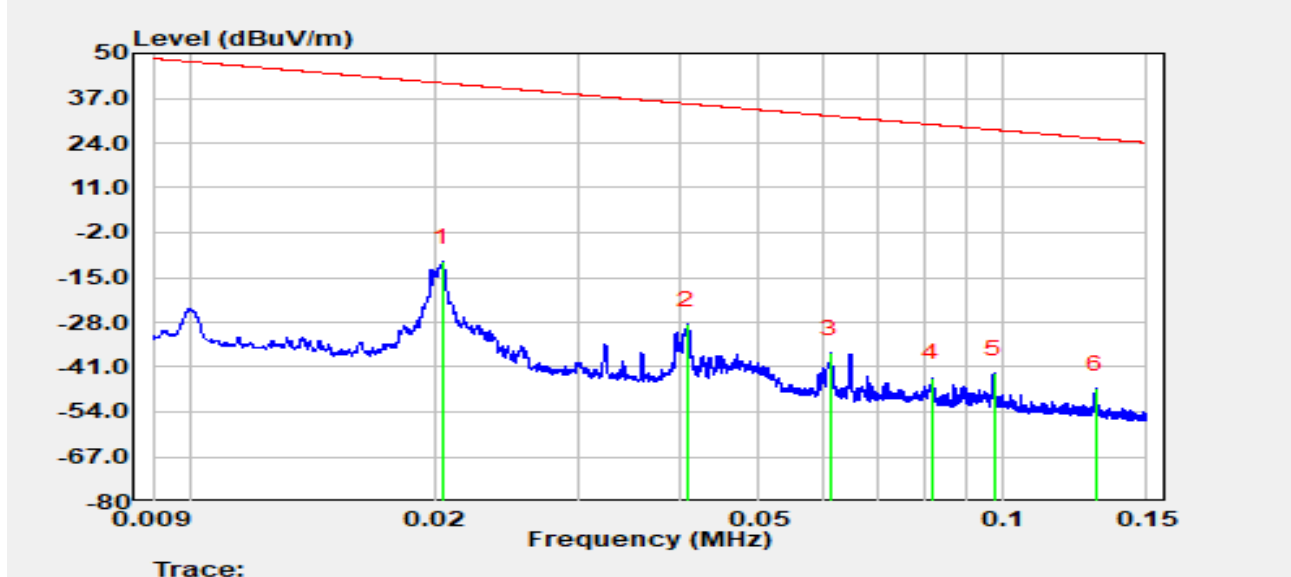


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	0.020	49.82	-60.28	-10.46	-51.85	41.39	Peak
2		0.041	31.71	-60.37	-28.66	-64.04	35.38	Peak
3		0.061	23.66	-60.57	-36.90	-68.76	31.86	Peak
4		0.082	16.54	-60.60	-44.06	-73.42	29.36	Peak
5		0.097	17.73	-60.61	-42.88	-70.72	27.84	Peak
6		0.130	13.38	-60.59	-47.22	-72.55	25.33	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + $40\log(d1/d2)$ (dB), $d1 = 3$ m, $d2 = 300$ m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-25
Temperature	16.0°C	Humidity	52.7%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Coplanar
Test Mode	Transmit by 802.11be-EHT20 at 5720 MHz		

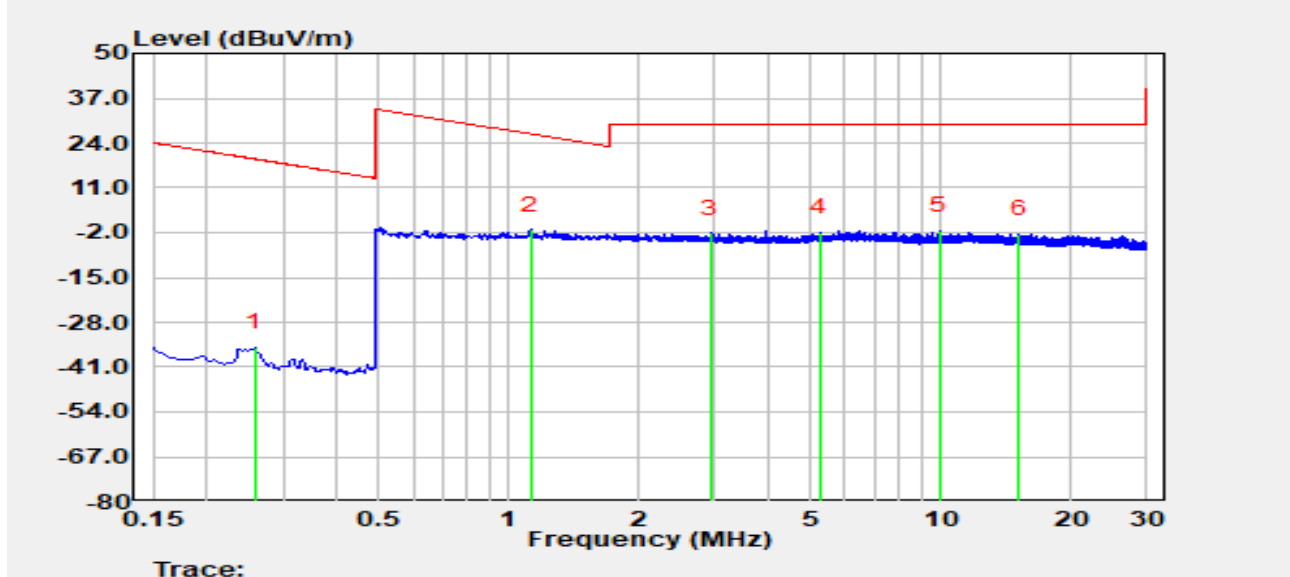


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.257	25.43	-60.66	-35.24	-54.62	19.39	Peak
2	*	1.123	19.59	-20.68	-1.09	-27.70	26.62	Peak
3		2.926	18.52	-20.55	-2.04	-31.54	29.50	Peak
4		5.260	18.58	-20.35	-1.77	-31.27	29.50	Peak
5		9.935	18.75	-20.23	-1.48	-30.98	29.50	Peak
6		15.159	17.72	-20.16	-2.44	-31.94	29.50	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 40log(d1/d2) (dB), d1 = 3 m, d2 = 300 m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

AP541e - WLAN Config 2

Site	SIP-AC3	Test Date	2026-02-25
Temperature	16.0°C	Humidity	52.7%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Coaxial
Test Mode	Transmit by 802.11be-EHT20 at 5720 MHz		

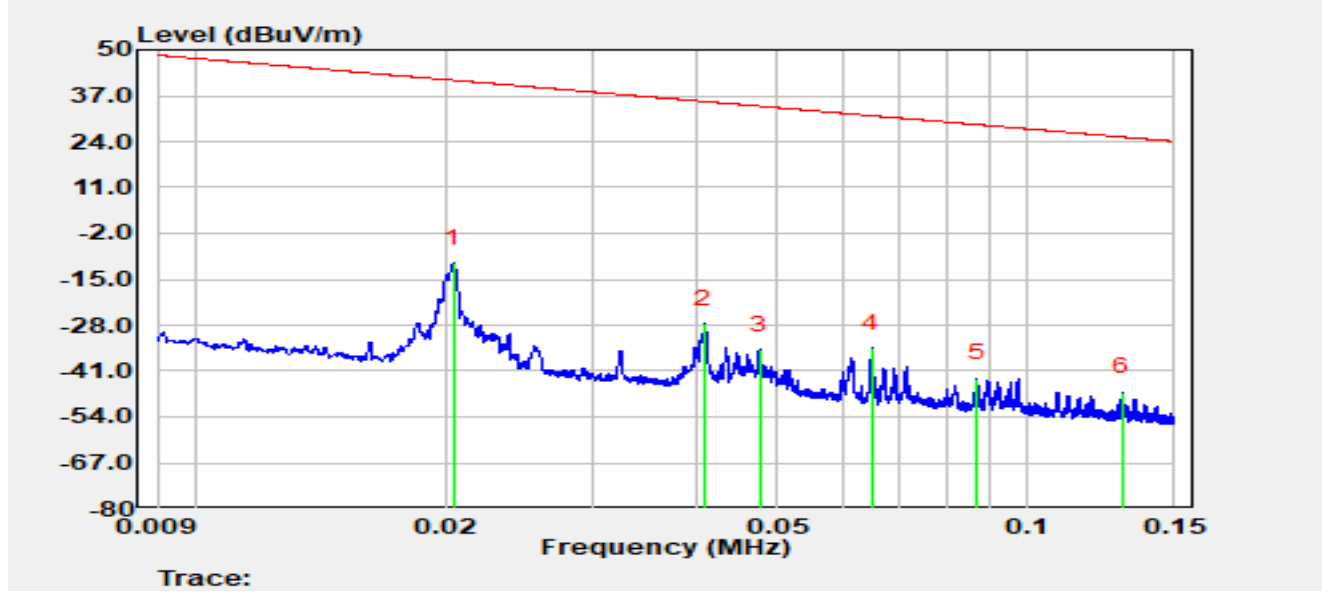


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	0.020	49.85	-60.28	-10.43	-51.82	41.40	Peak
2		0.041	32.73	-60.37	-27.65	-63.03	35.38	Peak
3		0.048	25.53	-60.45	-34.93	-68.96	34.04	Peak
4		0.065	26.03	-60.59	-34.56	-65.90	31.34	Peak
5		0.087	17.64	-60.61	-42.97	-71.78	28.81	Peak
6		0.130	13.60	-60.59	-47.00	-72.31	25.32	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 40log(d1/d2) (dB), d1 = 3 m, d2 = 300 m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-25
Temperature	16.0°C	Humidity	52.7%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Coaxial
Test Mode	Transmit by 802.11be-EHT20 at 5720 MHz		

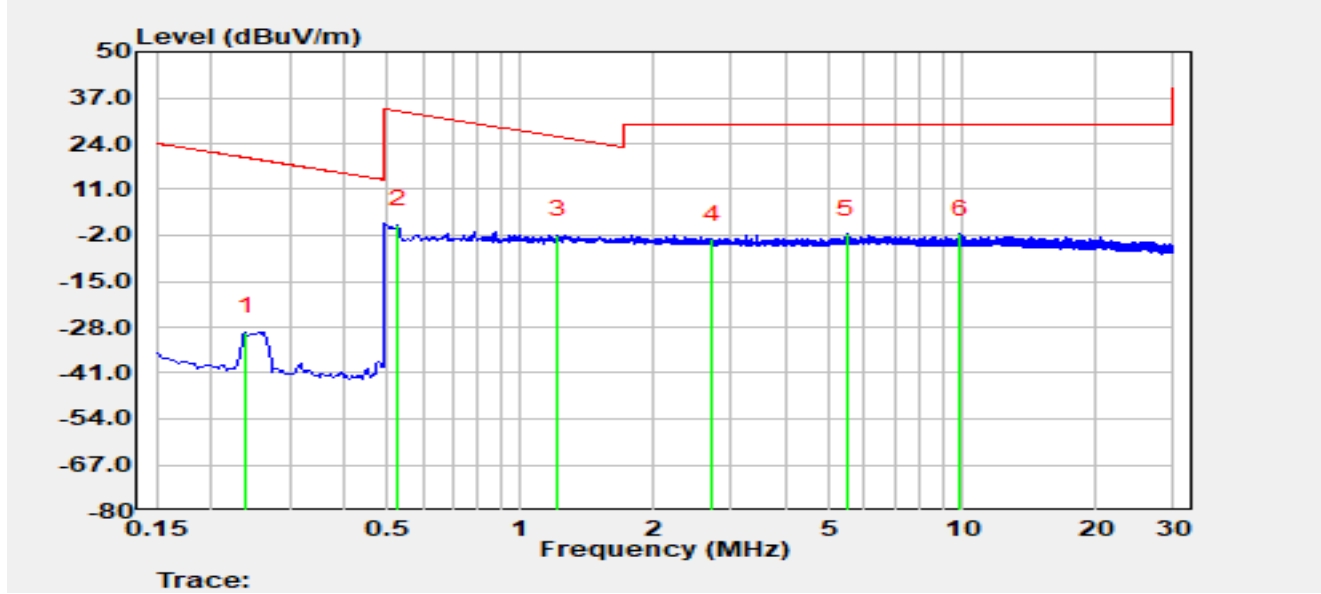


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.240	31.24	-60.66	-29.42	-49.43	20.01	Peak
2		0.526	21.80	-20.69	1.11	-32.08	33.18	Peak
3	*	1.213	18.77	-20.67	-1.90	-27.85	25.95	Peak
4		2.720	17.50	-20.56	-3.07	-32.57	29.50	Peak
5		5.478	18.73	-20.41	-1.68	-31.18	29.50	Peak
6		9.899	18.49	-20.23	-1.74	-31.24	29.50	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 40log(d1/d2) (dB), d1 = 3 m, d2 = 300 m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-25
Temperature	16.0°C	Humidity	52.7%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Coplanar
Test Mode	Transmit by 802.11be-EHT20 at 5720 MHz		

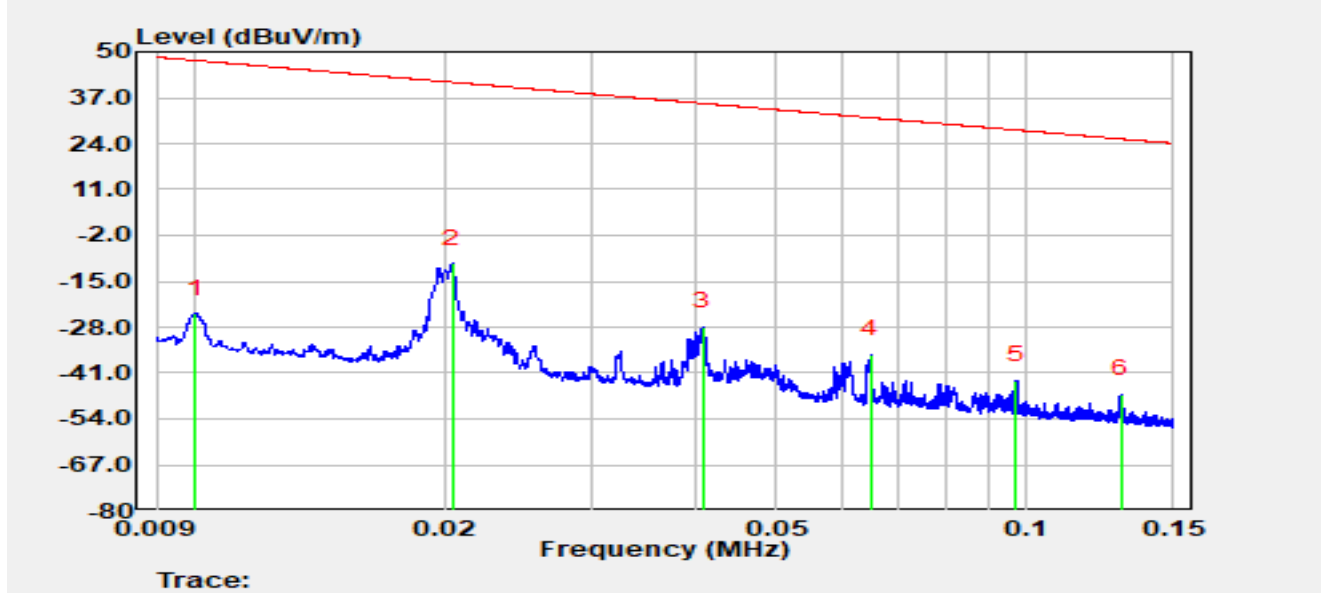


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.010	35.39	-59.57	-24.18	-71.75	47.57	Peak
2	*	0.020	50.26	-60.28	-10.01	-51.42	41.41	Peak
3		0.041	32.56	-60.37	-27.82	-63.20	35.39	Peak
4		0.065	24.81	-60.59	-35.79	-67.13	31.34	Peak
5		0.097	17.61	-60.61	-43.00	-70.87	27.87	Peak
6		0.130	13.71	-60.59	-46.89	-72.20	25.32	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 40log(d1/d2) (dB), d1 = 3 m, d2 = 300 m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-25
Temperature	16.0°C	Humidity	52.7%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Coplanar
Test Mode	Transmit by 802.11be-EHT20 at 5720 MHz		

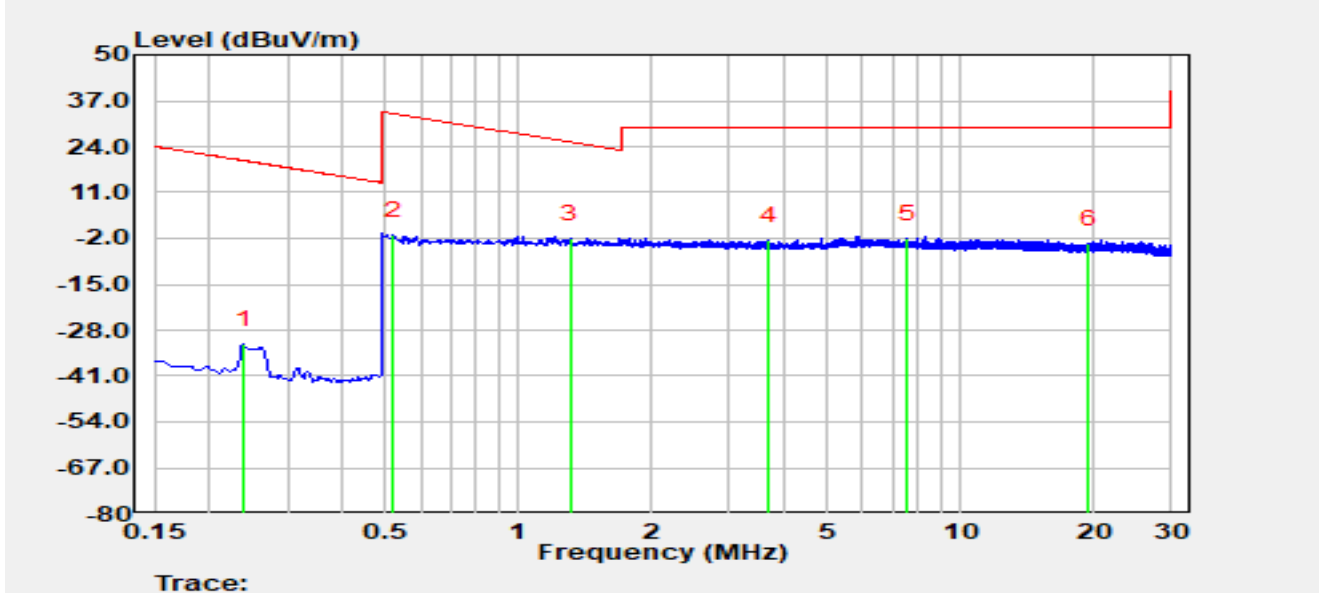

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.240	28.50	-60.66	-32.16	-52.17	20.01	Peak
2		0.520	19.57	-20.69	-1.12	-34.40	33.28	Peak
3	*	1.308	18.48	-20.66	-2.18	-27.47	25.29	Peak
4		3.693	18.02	-20.61	-2.59	-32.09	29.50	Peak
5		7.592	18.34	-20.35	-2.01	-31.51	29.50	Peak
6		19.448	16.54	-20.08	-3.55	-33.05	29.50	Peak


Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + $40\log(d1/d2)$ (dB), $d1 = 3$ m, $d2 = 300$ m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

The Worst-case Result of Radiated Emission 30 MHz ~ 1 GHz:

AP541e - WLAN Config 1

Site	SIP-AC3	Test Date	2026-02-25
Temperature	16.0°C	Humidity	52.7%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5720 MHz		

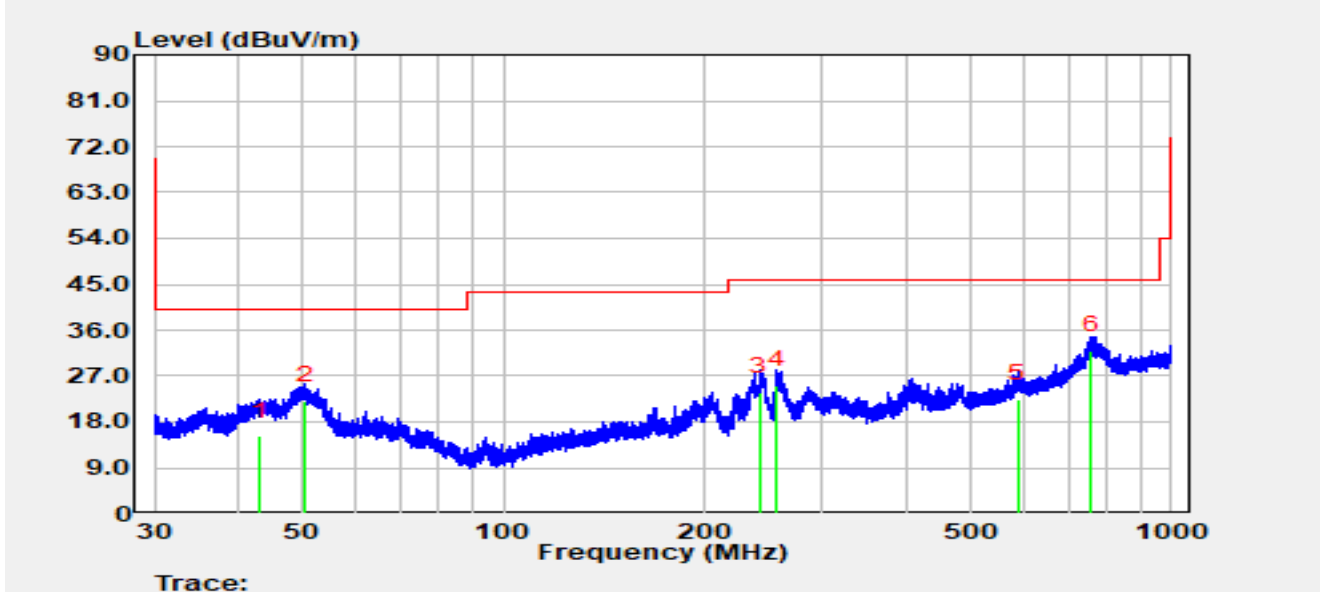


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		43.126	-2.90	18.07	15.17	-24.83	40.00	QP
2		50.515	3.90	18.34	22.24	-17.76	40.00	QP
3		242.100	7.20	16.57	23.77	-22.23	46.00	QP
4		256.611	8.10	17.08	25.18	-20.82	46.00	QP
5		589.732	-3.10	25.67	22.57	-23.43	46.00	QP
6	*	758.041	3.20	28.76	31.96	-14.04	46.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-25
Temperature	16.0°C	Humidity	52.7%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5720 MHz		

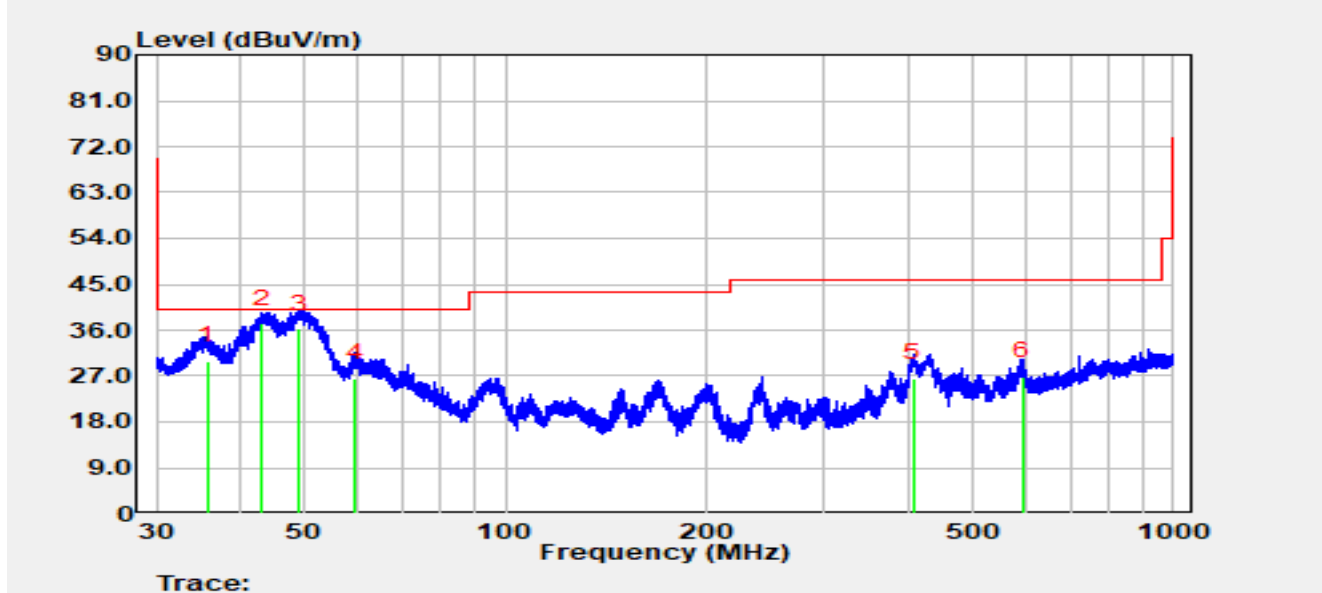


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		35.724	12.80	17.24	30.04	-9.96	40.00	QP
2	*	43.141	19.20	18.07	37.27	-2.73	40.00	QP
3		49.100	17.90	18.33	36.23	-3.77	40.00	QP
4		59.649	9.00	17.62	26.62	-13.38	40.00	QP
5		407.943	5.20	21.32	26.52	-19.48	46.00	QP
6		593.882	1.20	25.77	26.97	-19.03	46.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

AP541e - WLAN Config 2

Site	SIP-AC3	Test Date	2026-02-25
Temperature	16.0°C	Humidity	52.7%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5720 MHz		

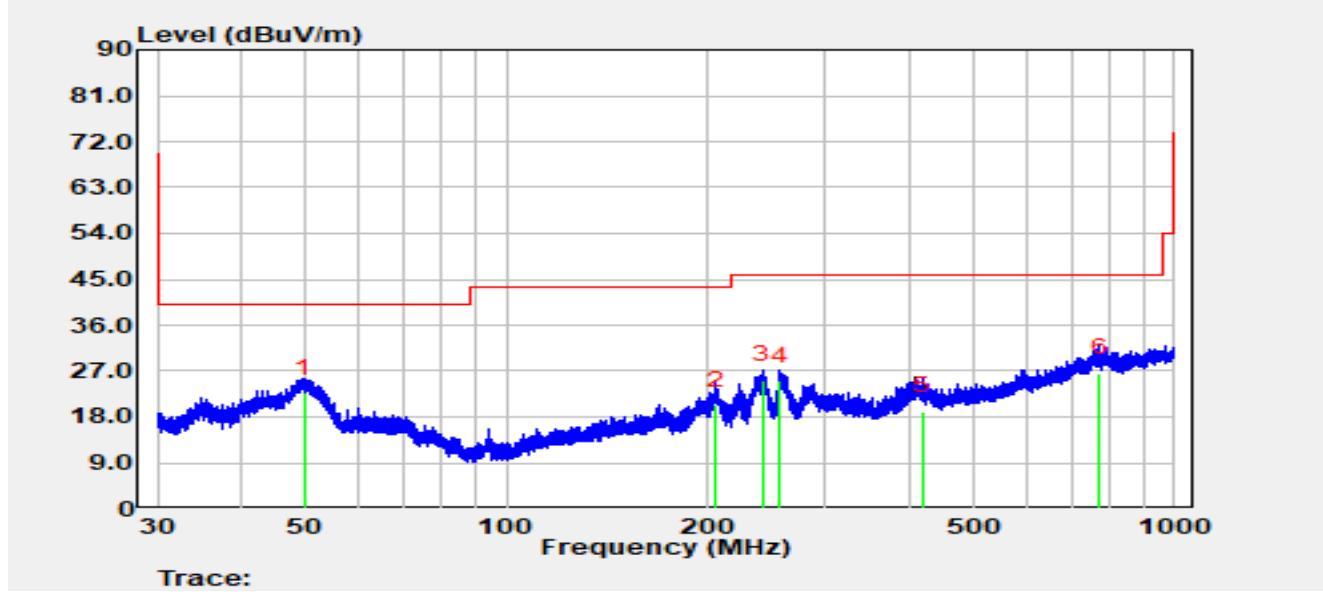


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	49.759	4.30	18.33	22.63	-17.37	40.00	QP
2		206.181	5.10	15.12	20.22	-23.28	43.50	QP
3		242.185	8.60	16.58	25.18	-20.82	46.00	QP
4		256.162	7.90	17.07	24.97	-21.03	46.00	QP
5		418.521	-2.40	21.47	19.07	-26.93	46.00	QP
6		771.719	-2.10	28.73	26.63	-19.37	46.00	QP

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-25
Temperature	16.0°C	Humidity	52.7%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5720 MHz		

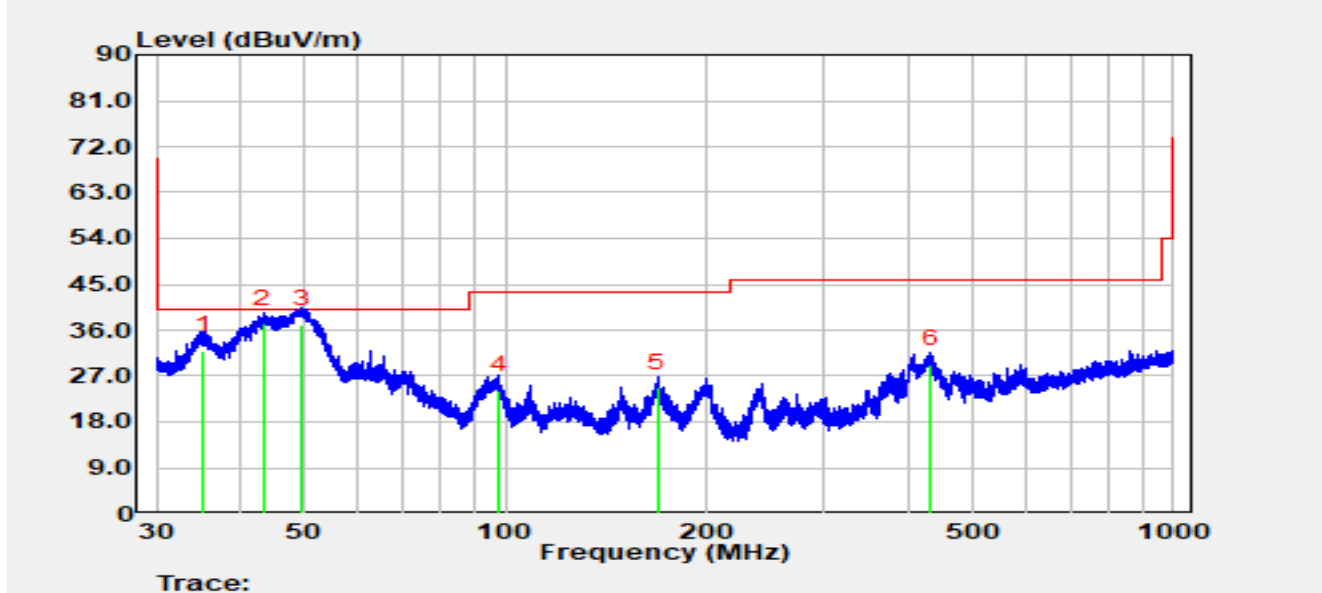

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		35.251	14.80	17.20	32.00	-8.00	40.00	QP
2	*	43.445	19.20	18.10	37.30	-2.70	40.00	QP
3		49.498	18.70	18.33	37.03	-2.97	40.00	QP
4		97.627	11.20	13.00	24.20	-19.30	43.50	QP
5		168.591	6.80	17.87	24.67	-18.83	43.50	QP
6		432.697	7.40	21.93	29.33	-16.67	46.00	QP


Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

The Worst-case Result of Radiated Emission 1 ~ 18 GHz:

AP541e - WLAN Config 1

Site	SIP-AC3	Test Date	2026-02-12
Temperature	15.4 °C	Humidity	38.8%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5220MHz		

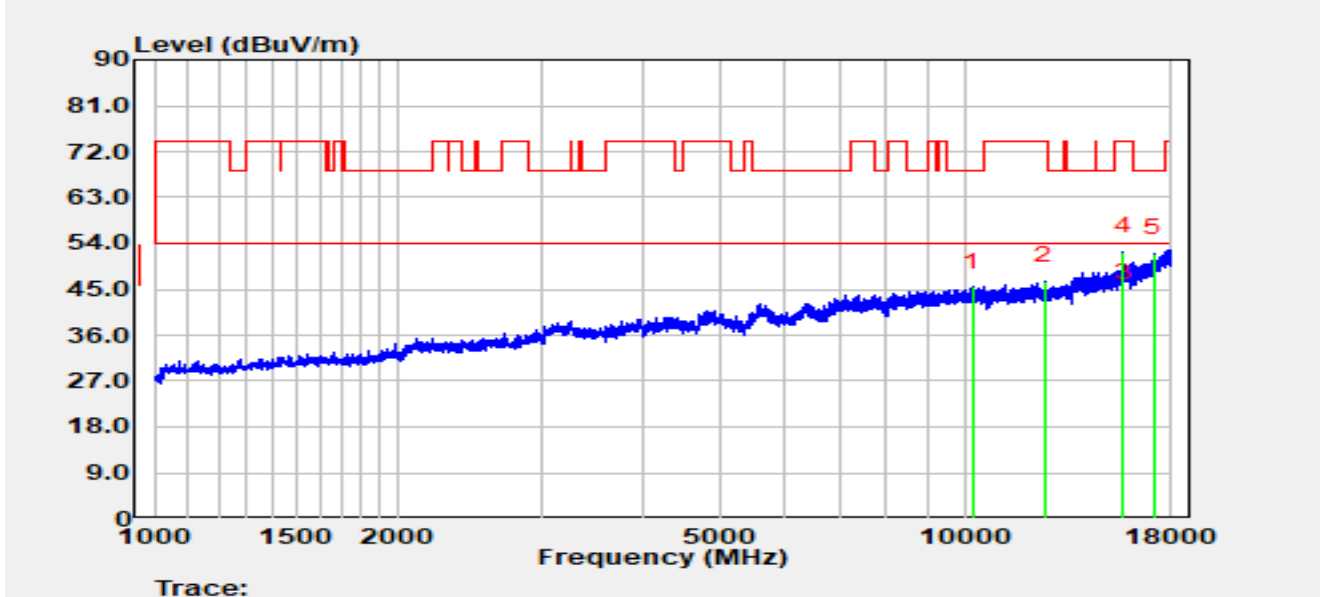


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		10225.900	46.52	-1.07	45.45	-22.75	68.20	Peak
2		12566.800	46.63	-0.02	46.62	-27.38	74.00	Peak
3	*	15664.200	38.05	5.11	43.16	-10.84	54.00	Average
4		15664.200	47.36	5.11	52.46	-21.54	74.00	Peak
5		17105.800	44.24	7.74	51.98	-16.22	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-12
Temperature	15.4 °C	Humidity	38.8%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5220MHz		

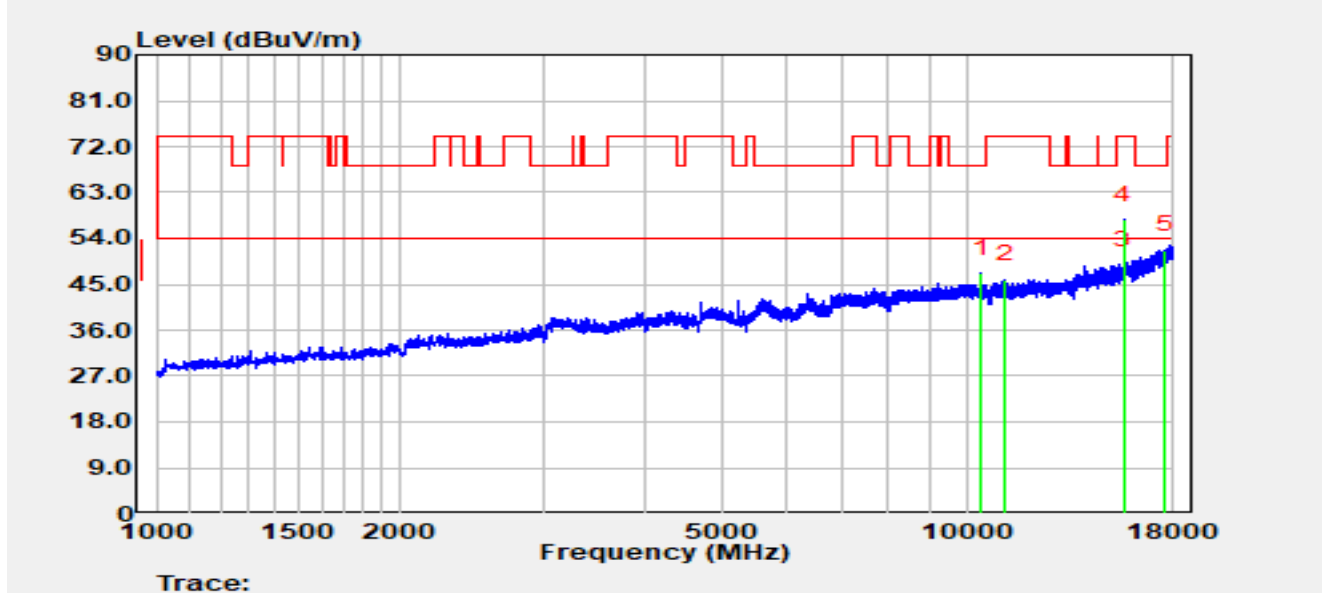


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		10441.800	47.77	-0.68	47.09	-21.11	68.20	Peak
2		11176.200	46.83	-0.88	45.94	-28.06	74.00	Peak
3	*	15647.200	43.60	5.13	48.73	-5.27	54.00	Average
4		15647.200	52.49	5.13	57.63	-16.37	74.00	Peak
5		17610.700	43.50	8.12	51.62	-16.58	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

AP541e - WLAN Config 2

Site	SIP-AC3	Test Date	2026-02-13
Temperature	15.6 °C	Humidity	41.4%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5825MHz		

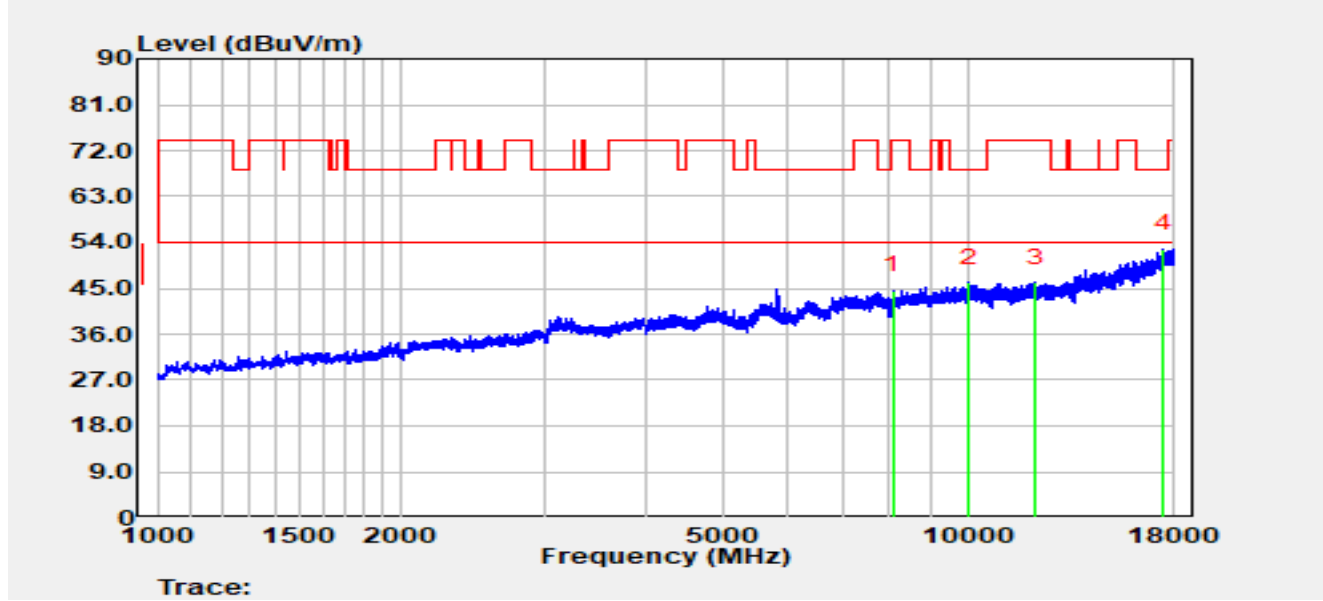


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		8075.400	48.14	-3.56	44.58	-29.42	74.00	Peak
2		10055.900	46.98	-0.92	46.06	-22.14	68.20	Peak
3		12150.300	46.40	-0.33	46.07	-27.93	74.00	Peak
4	*	17471.300	44.12	8.58	52.71	-15.49	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-13
Temperature	15.6 °C	Humidity	41.4%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5825MHz		

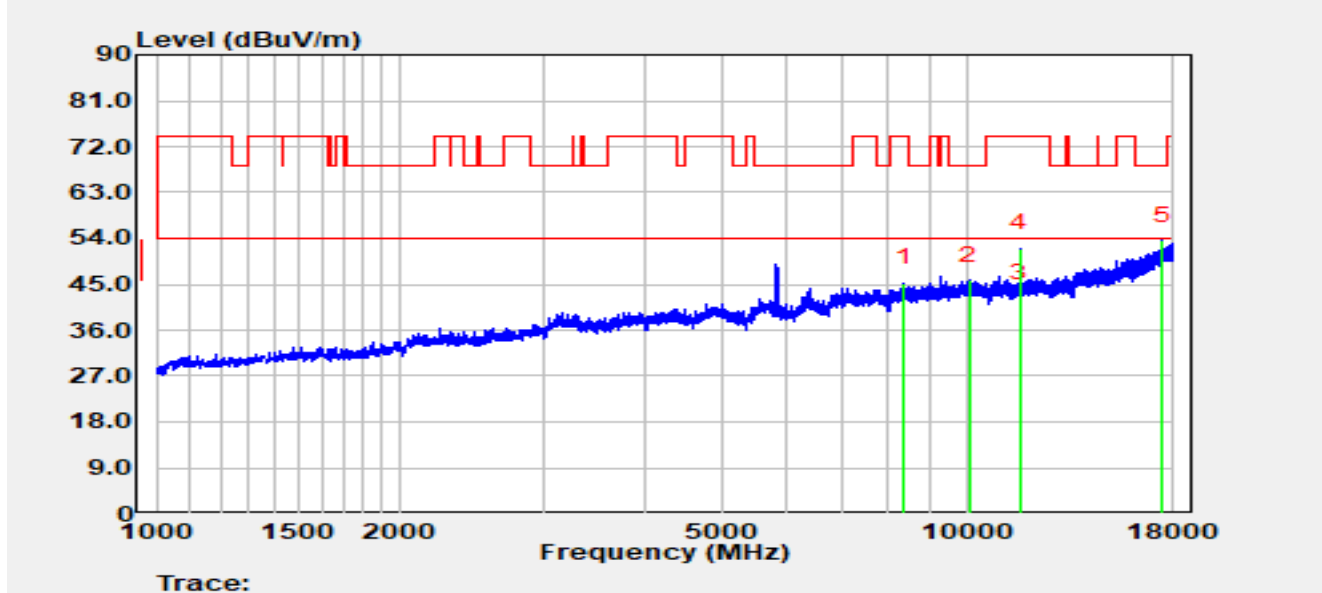

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		8357.600	48.12	-2.84	45.27	-28.73	74.00	Peak
2		10088.200	46.78	-1.02	45.76	-22.44	68.20	Peak
3	*	11653.900	43.65	-1.24	42.41	-11.59	54.00	Average
4		11653.900	53.32	-1.24	52.08	-21.92	74.00	Peak
5		17466.200	45.01	8.61	53.62	-14.58	68.20	Peak


Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

The Worst-case Result of Radiated Emission above 18 GHz:

AP541e - WLAN Config 1

Site	SIP-AC3	Test Date	2026-02-25
Temperature	16.3°C	Humidity	37.8%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5720 MHz		

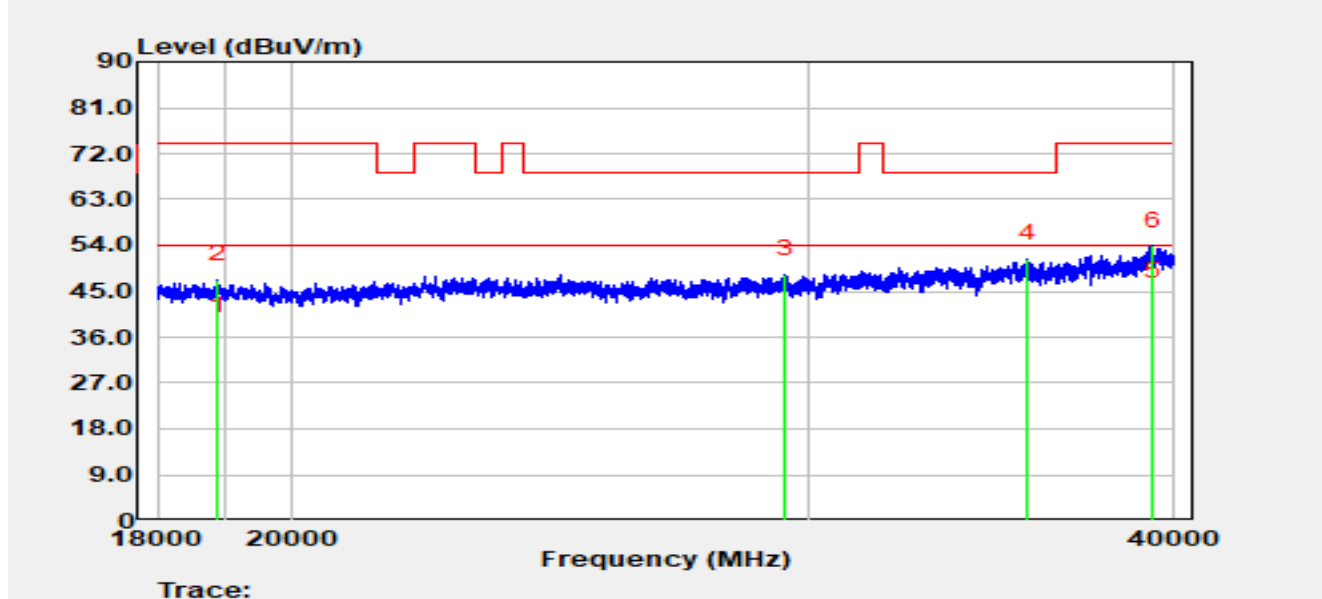


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		18880.000	47.66	-10.51	37.15	-16.85	54.00	Average
2		18880.000	57.74	-10.51	47.23	-26.77	74.00	Peak
3		29459.800	57.16	-8.78	48.38	-19.82	68.20	Peak
4		35659.400	56.86	-5.58	51.29	-16.91	68.20	Peak
5	*	39313.600	42.59	1.47	44.06	-9.94	54.00	Average
6		39313.600	52.38	1.47	53.85	-20.15	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-25
Temperature	16.3°C	Humidity	37.8%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5720 MHz		

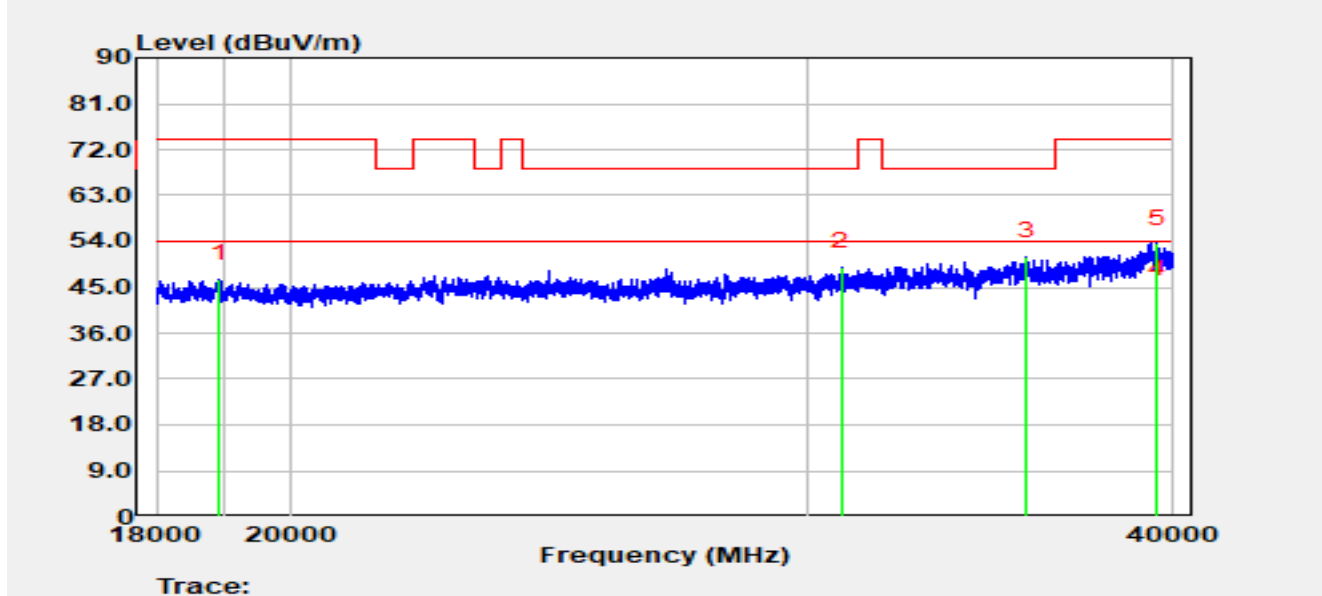


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		18919.600	56.38	-9.85	46.53	-27.47	74.00	Peak
2		30837.000	58.07	-9.12	48.95	-19.25	68.20	Peak
3		35644.000	56.88	-5.82	51.06	-17.14	68.20	Peak
4	*	39483.000	42.79	0.81	43.60	-10.40	54.00	Average
5		39483.000	52.81	0.81	53.63	-20.37	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

AP541e - WLAN Config 2

Site	SIP-AC3	Test Date	2026-02-25
Temperature	16.3°C	Humidity	37.8%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5720 MHz		

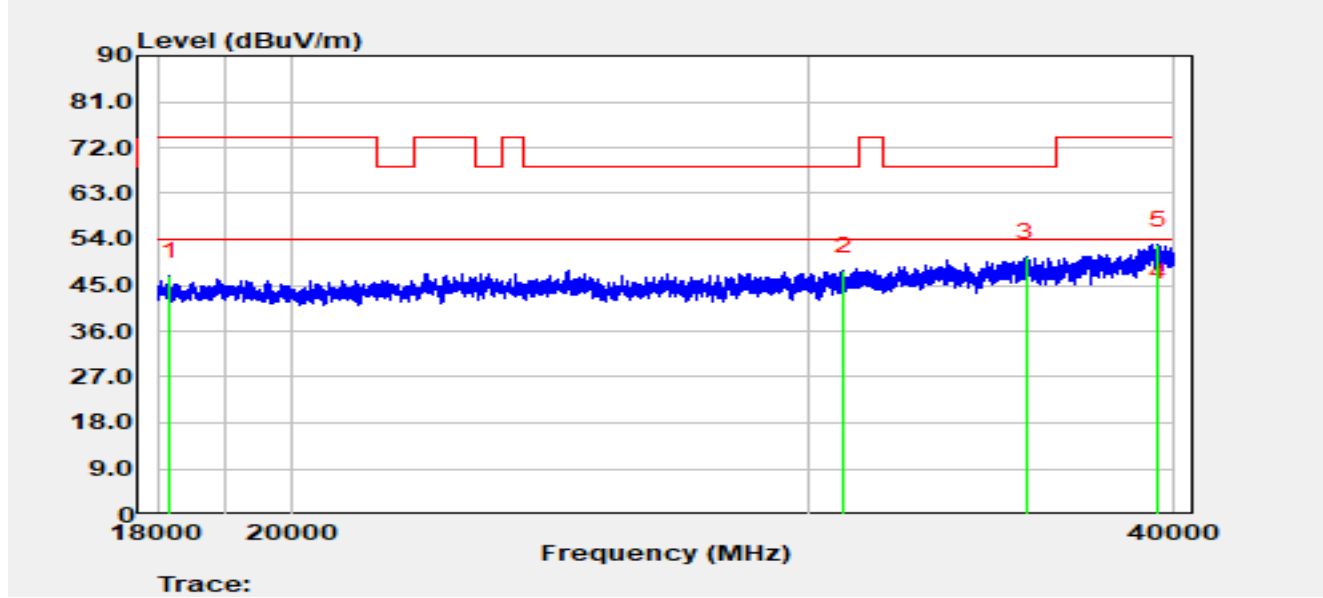


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		18176.000	57.51	-10.79	46.72	-27.28	74.00	Peak
2		30861.200	56.58	-8.83	47.75	-20.45	68.20	Peak
3		35602.200	56.48	-5.94	50.54	-17.66	68.20	Peak
4	*	39498.400	42.36	0.38	42.74	-11.26	54.00	Average
5		39498.400	52.58	0.38	52.95	-21.05	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-25
Temperature	16.3°C	Humidity	37.8%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5720 MHz		

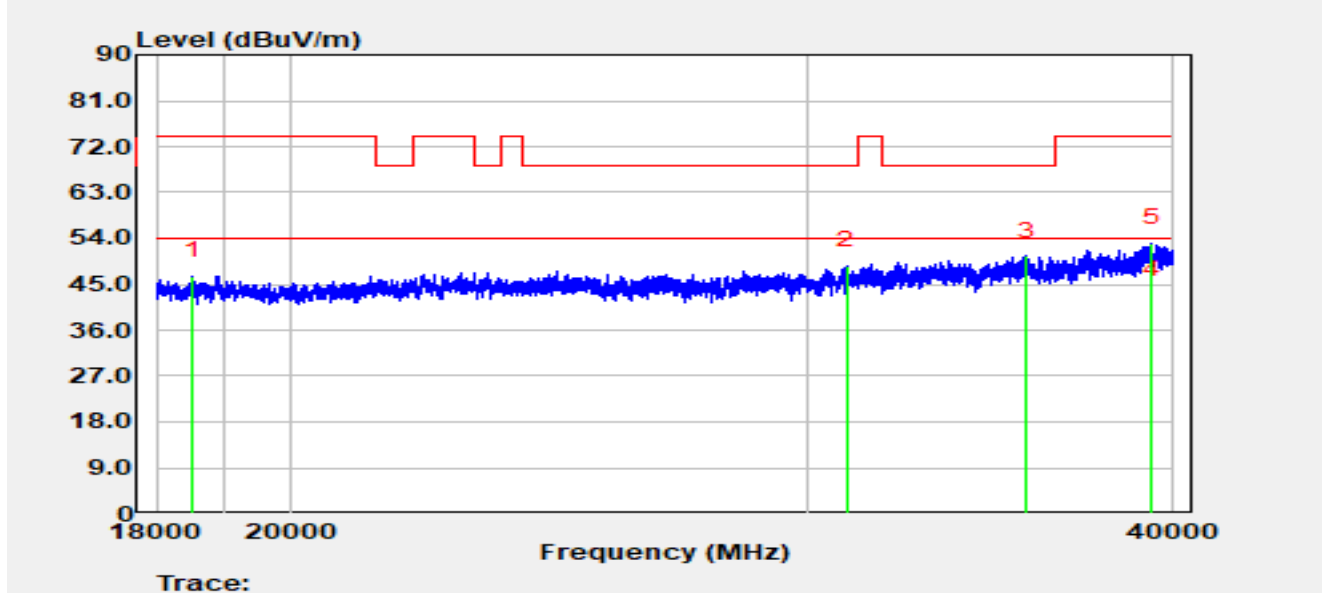

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		18510.400	57.10	-10.46	46.64	-27.36	74.00	Peak
2		30936.000	57.46	-8.79	48.67	-19.53	68.20	Peak
3		35657.200	56.10	-5.61	50.49	-17.71	68.20	Peak
4	*	39307.000	41.53	1.34	42.87	-11.13	54.00	Average
5		39307.000	51.69	1.34	53.03	-20.97	74.00	Peak


Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.8 Radiated Restricted Band Edge Test Result

AP541e - WLAN Config 1

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5180 MHz		

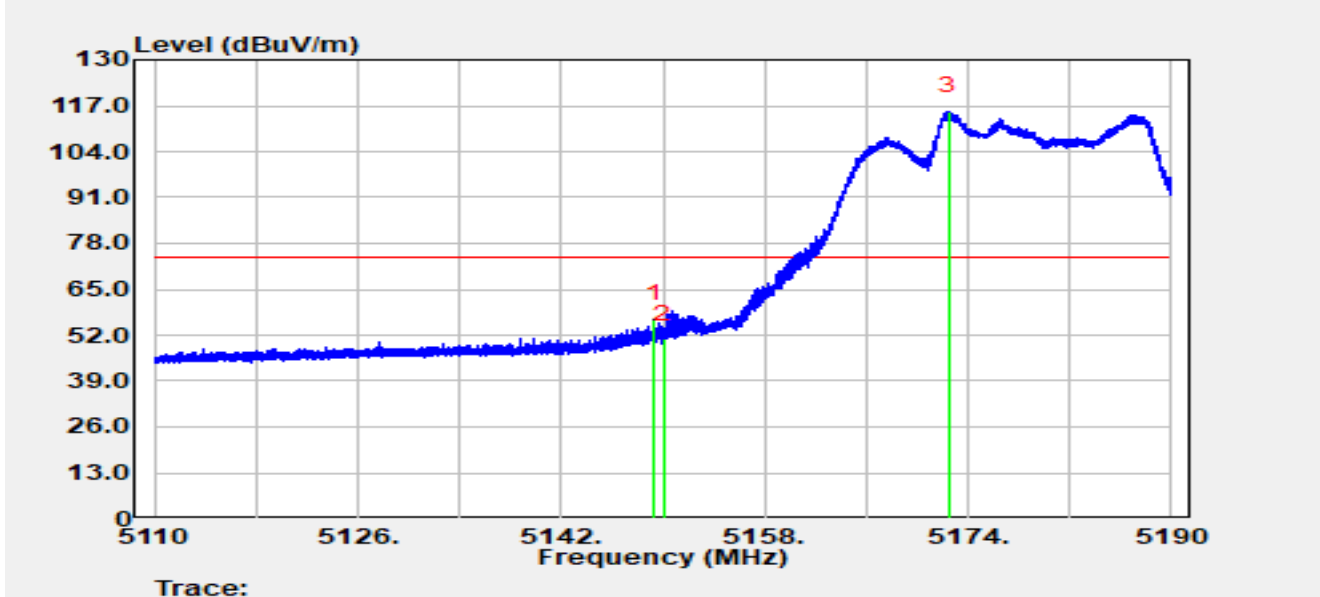


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.360	57.67	-1.17	56.50	-17.50	74.00	Peak
2		5150.000	51.89	-0.99	50.90	-23.10	74.00	Peak
3		5172.448	62.18	53.17	115.36	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5180 MHz		

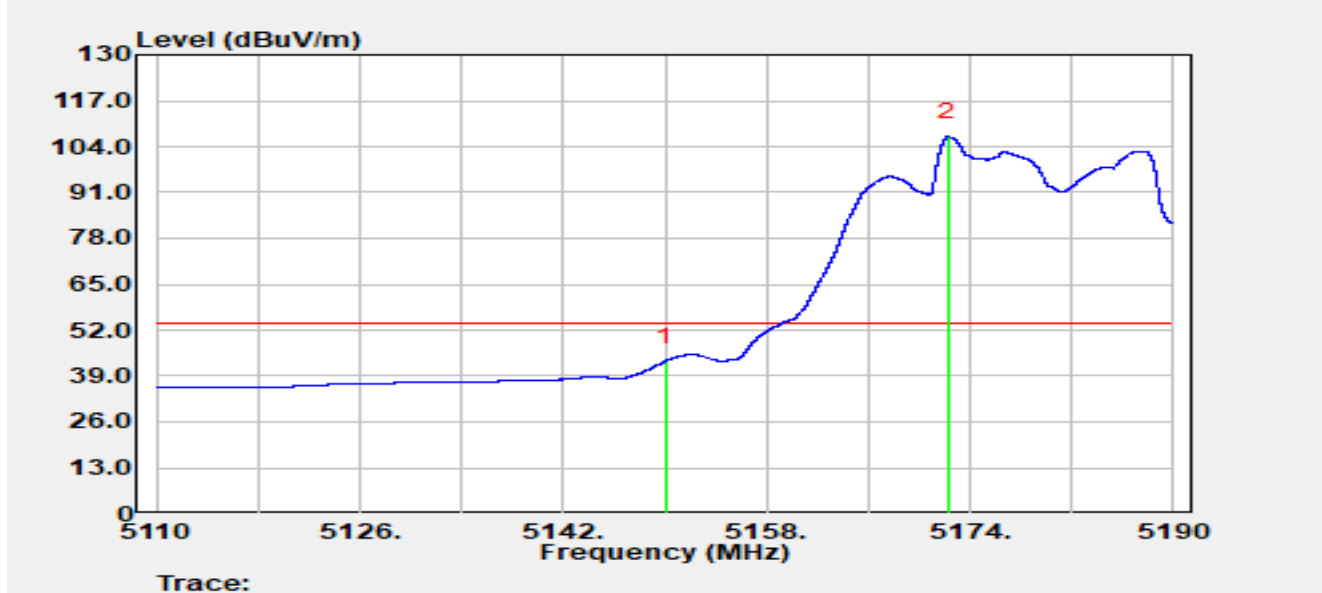


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	44.08	-0.99	43.09	-10.91	54.00	Average
2		5172.296	53.70	53.05	106.75	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5180 MHz		

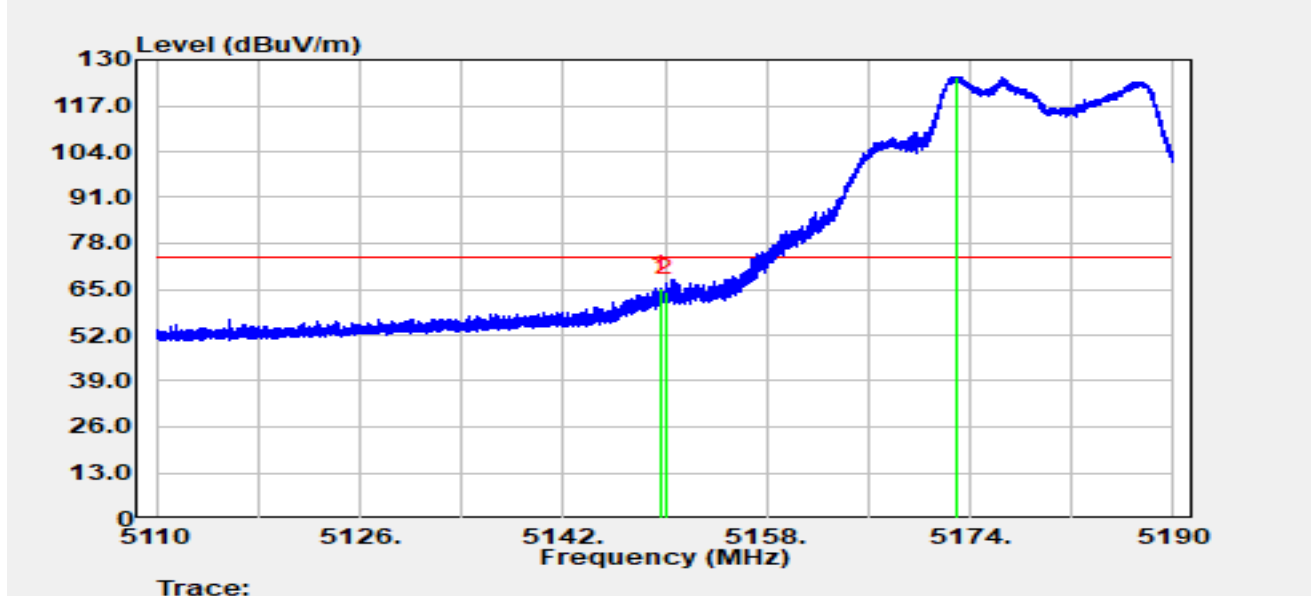


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.600	66.15	-1.10	65.04	-8.96	74.00	Peak
2		5150.000	65.10	-0.99	64.11	-9.89	74.00	Peak
3		5173.000	71.67	53.61	125.28	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5180 MHz		

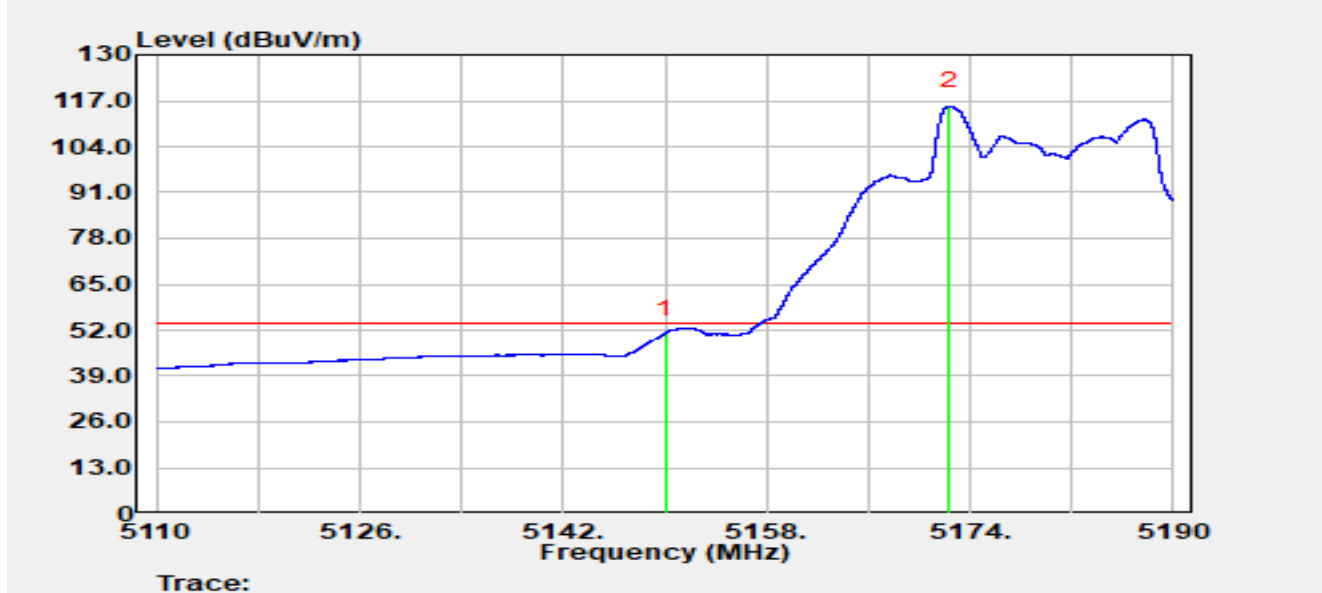


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	51.93	-0.99	50.94	-3.06	54.00	Average
2		5172.400	62.31	53.14	115.45	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5320 MHz		

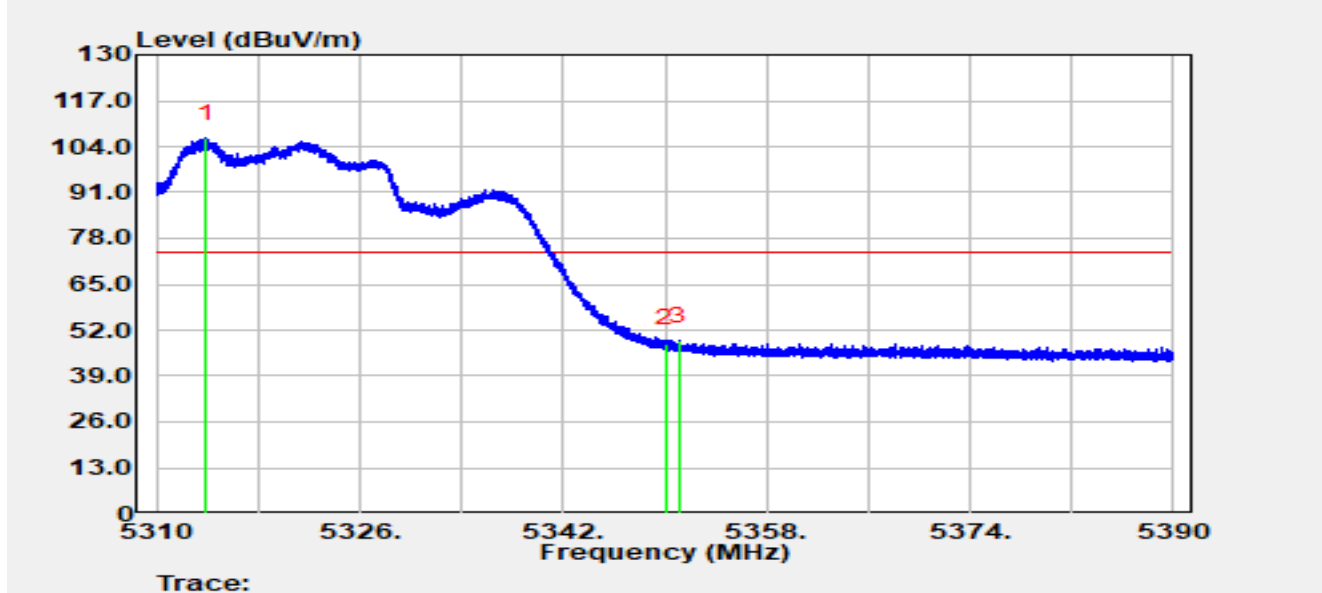


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5313.952	57.37	48.89	106.26	N/A	N/A	Peak
2		5350.000	48.02	0.19	48.20	-25.80	74.00	Peak
3	*	5351.064	49.34	-0.42	48.92	-25.08	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5320 MHz		

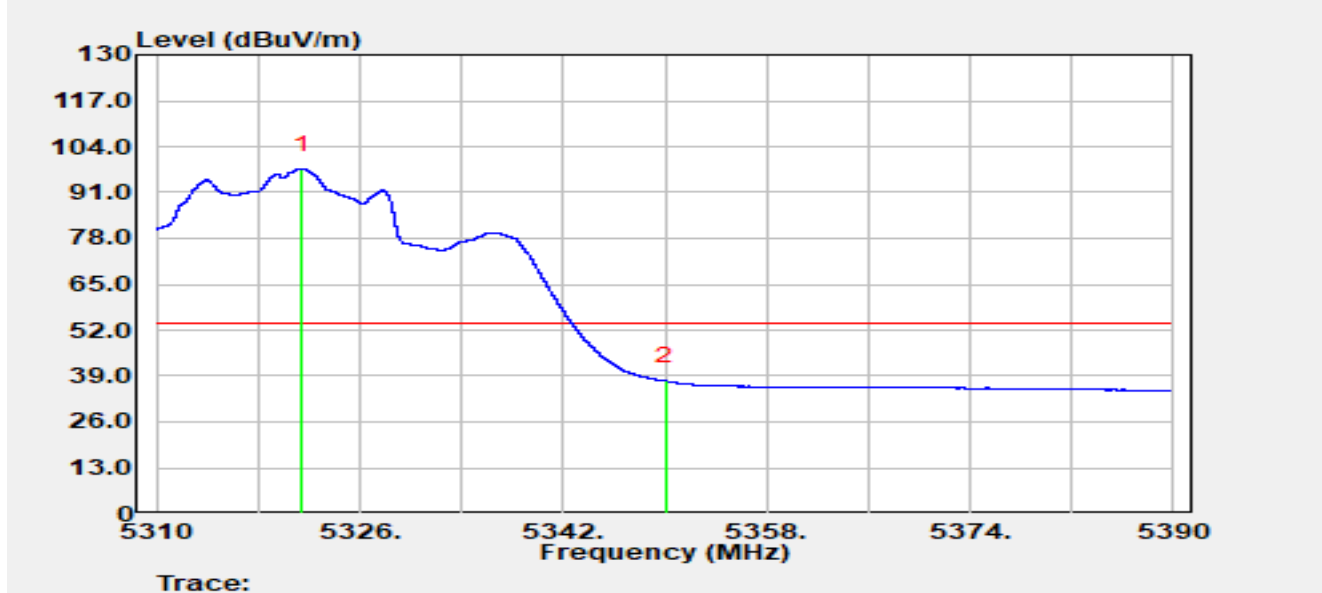


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5321.464	57.53	40.04	97.57	N/A	N/A	Average
2	*	5350.000	37.36	0.19	37.55	-16.45	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5320 MHz		

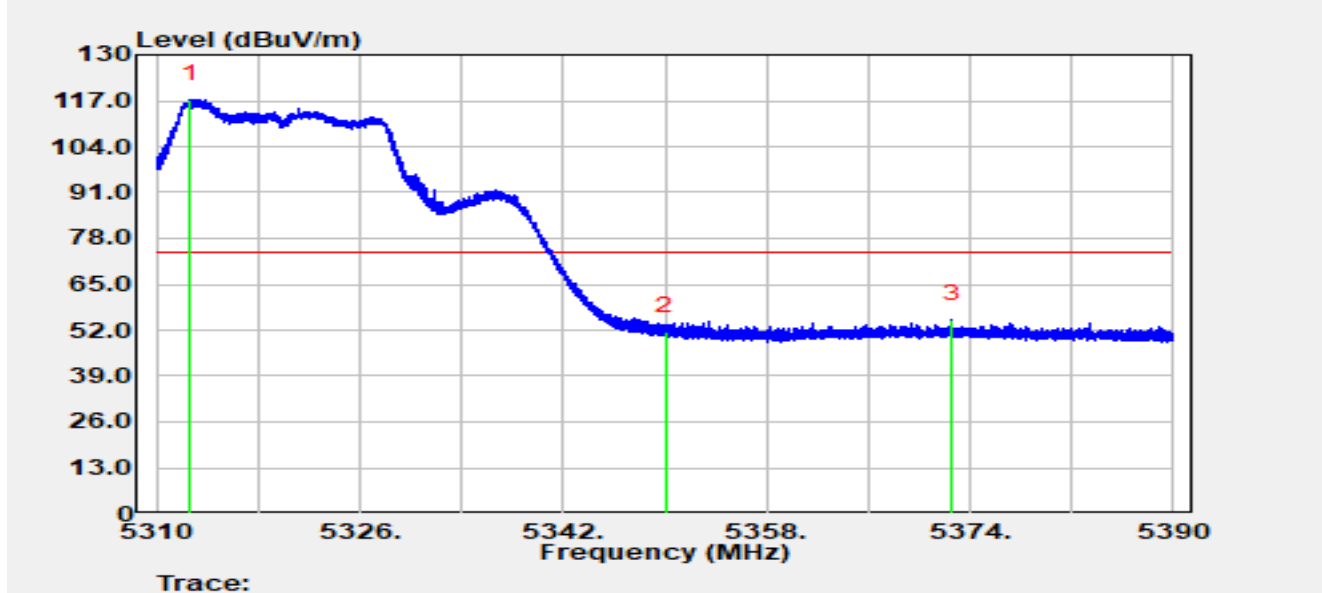


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5312.656	70.19	47.20	117.39	N/A	N/A	Peak
2		5350.000	51.45	0.19	51.64	-22.36	74.00	Peak
3	*	5372.616	58.04	-3.03	55.01	-18.99	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5320 MHz		

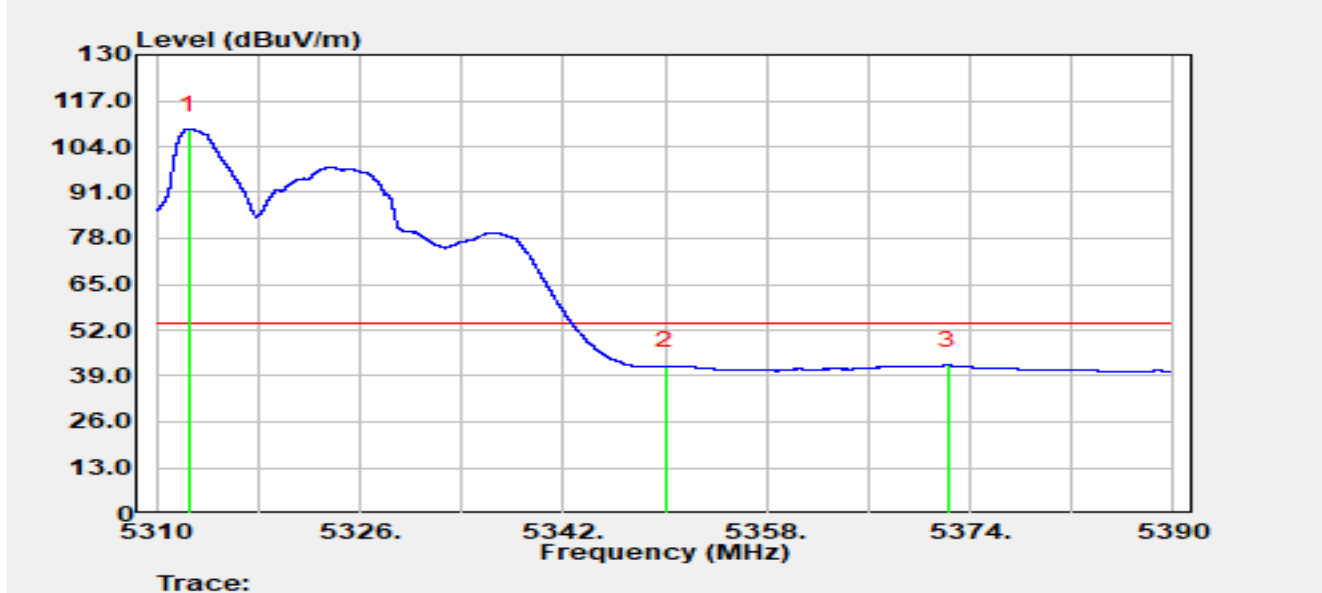


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		5312.512	61.88	46.99	108.87	N/A	N/A	Average
2		5350.000	41.66	0.19	41.84	-12.16	54.00	Average
3	*	5372.248	45.01	-3.02	42.00	-12.00	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5500 MHz		

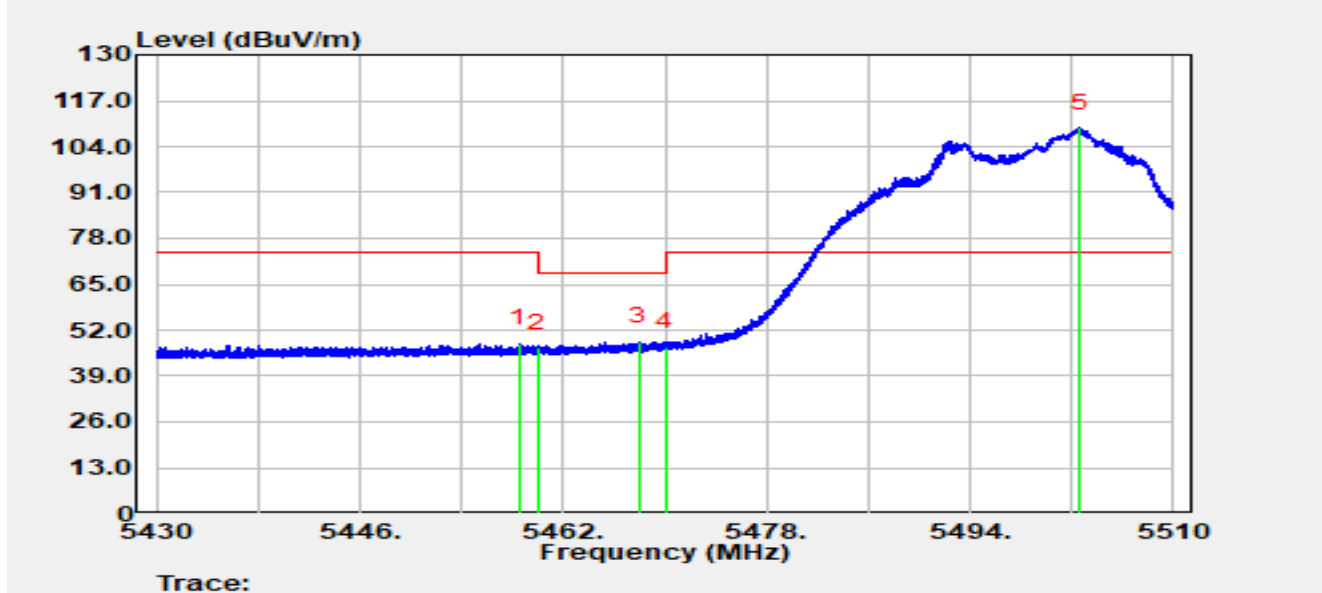


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.576	51.45	-3.36	48.09	-25.91	74.00	Peak
2		5460.000	50.31	-3.25	47.06	-21.14	68.20	Peak
3	*	5467.936	50.97	-2.20	48.76	-19.44	68.20	Peak
4		5470.000	49.02	-1.75	47.26	-20.94	68.20	Peak
5		5502.600	64.51	44.80	109.31	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5500 MHz		

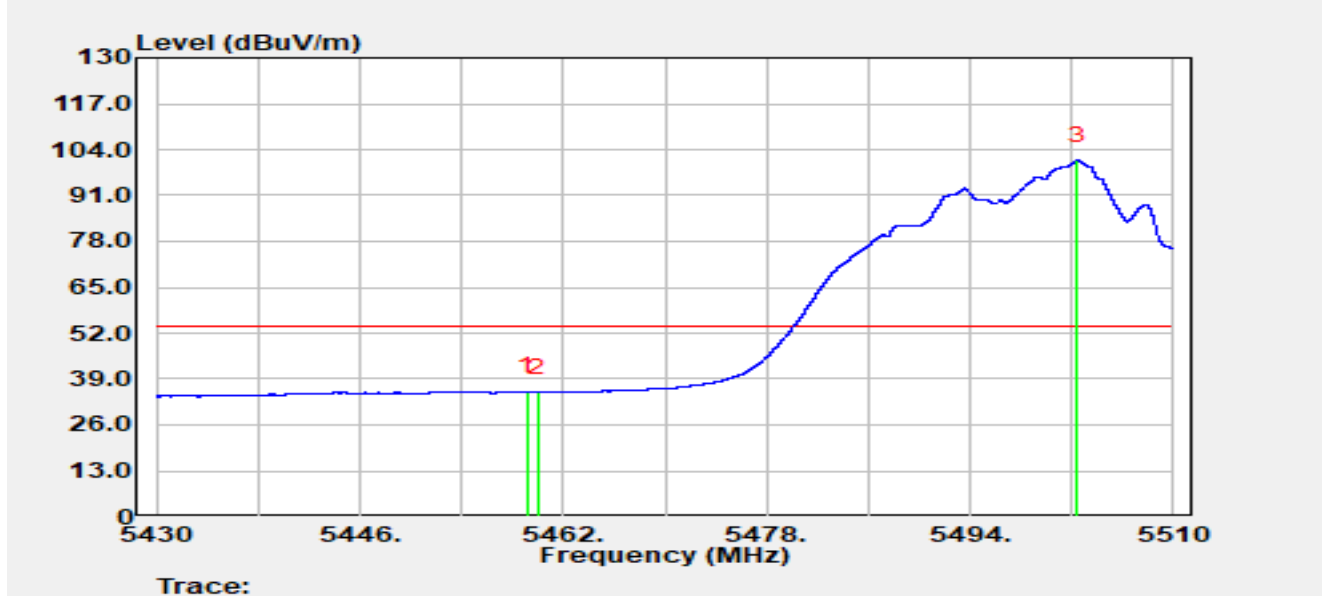


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.184	38.58	-3.17	35.41	-18.59	54.00	Average
2		5460.000	38.48	-3.25	35.24	-18.76	54.00	Average
3		5502.400	56.31	44.65	100.96	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5500 MHz		

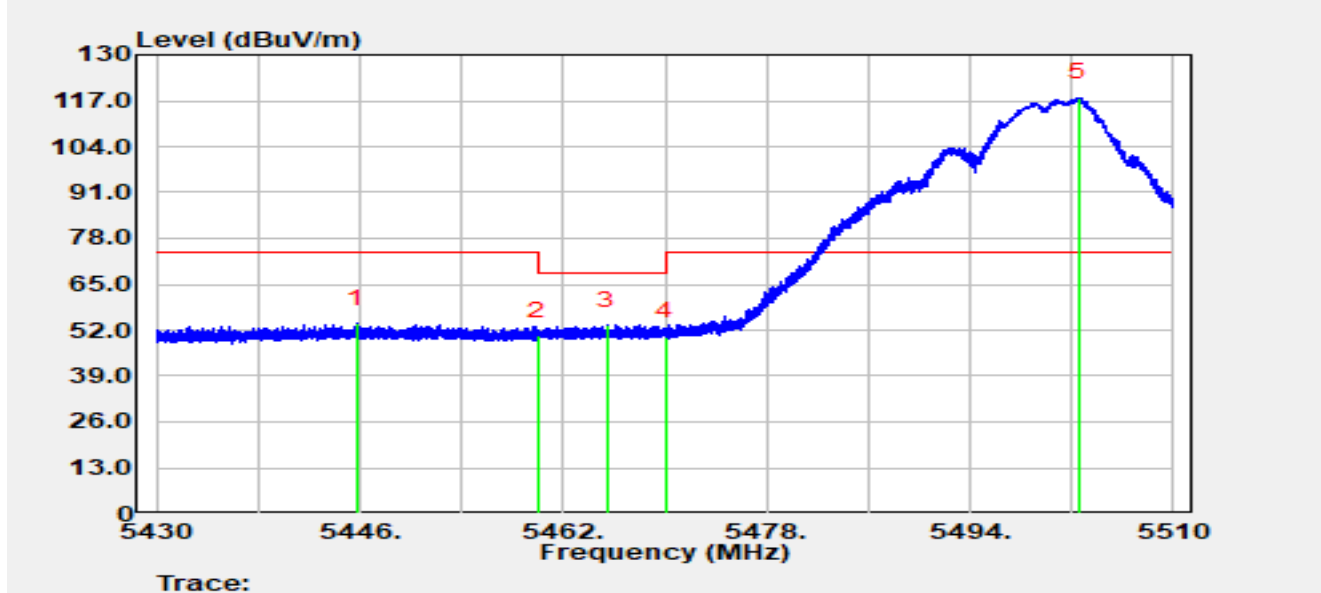


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5445.736	57.79	-4.03	53.76	-20.24	74.00	Peak
2		5460.000	53.66	-3.25	50.41	-17.79	68.20	Peak
3	*	5465.440	55.93	-2.63	53.30	-14.90	68.20	Peak
4		5470.000	51.95	-1.75	50.19	-18.01	68.20	Peak
5		5502.552	73.19	44.77	117.96	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5500 MHz		

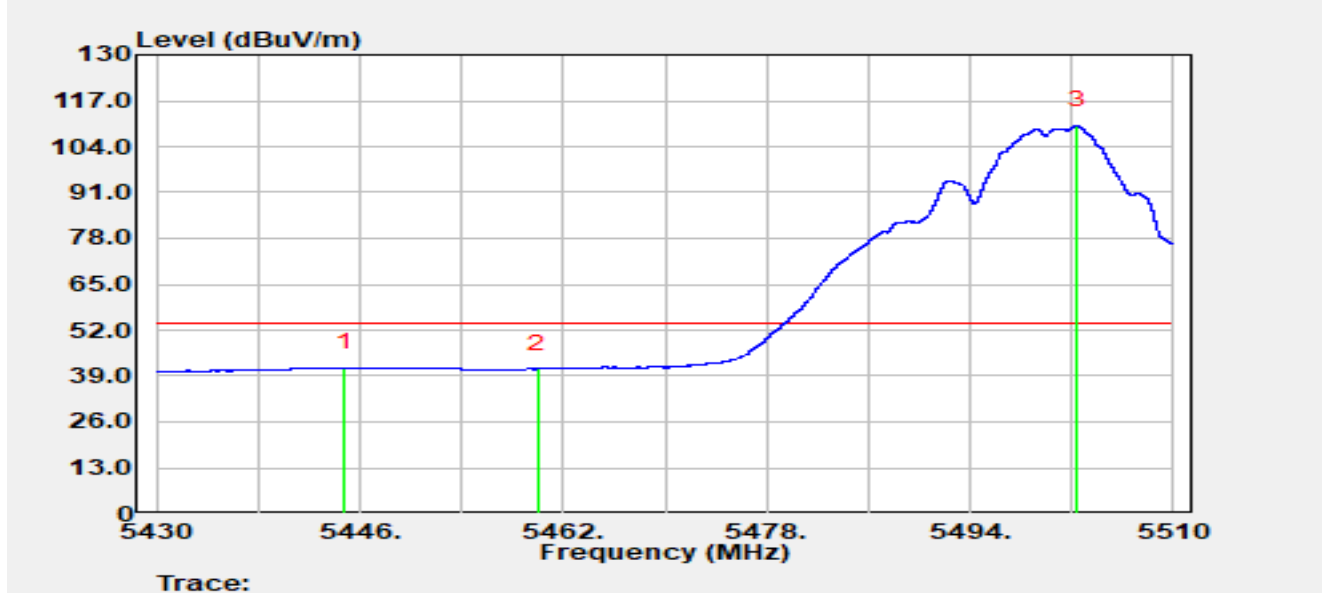


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5444.760	45.22	-3.80	41.43	-12.57	54.00	Average
2		5460.000	44.22	-3.25	40.98	-13.02	54.00	Average
3		5502.400	65.36	44.65	110.01	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5700 MHz		

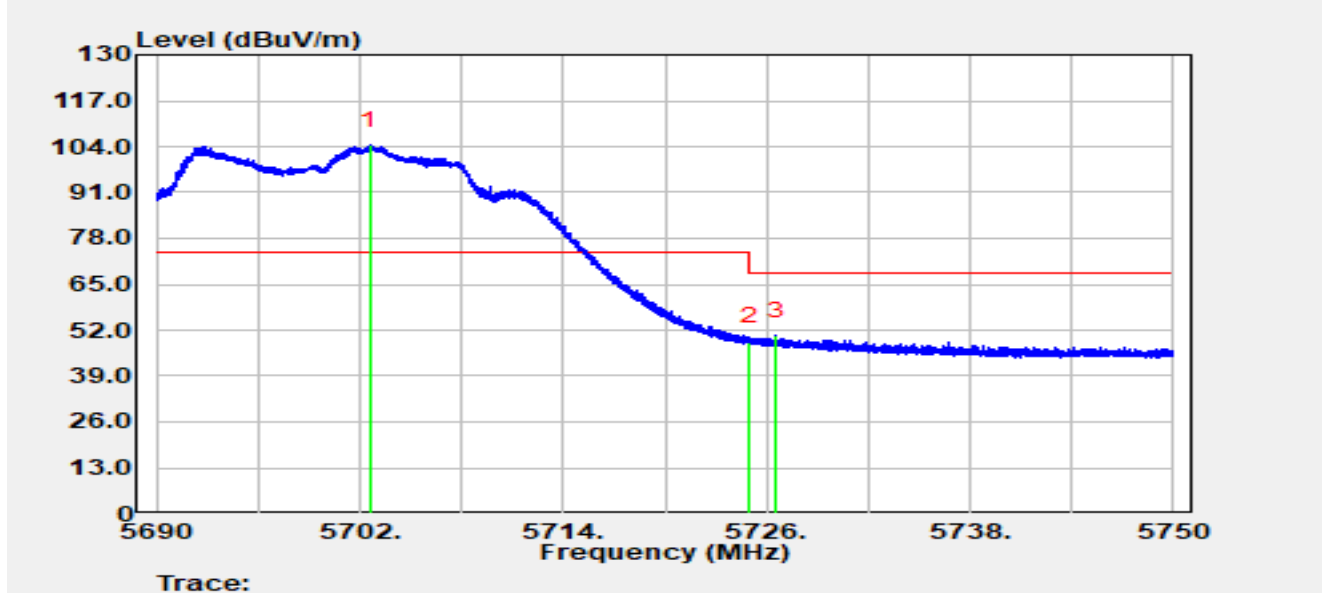


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5702.630	67.06	37.19	104.25	N/A	N/A	Peak
2		5725.000	48.42	0.39	48.81	-19.39	68.20	Peak
3	*	5726.558	50.91	-0.52	50.39	-17.81	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5700 MHz		

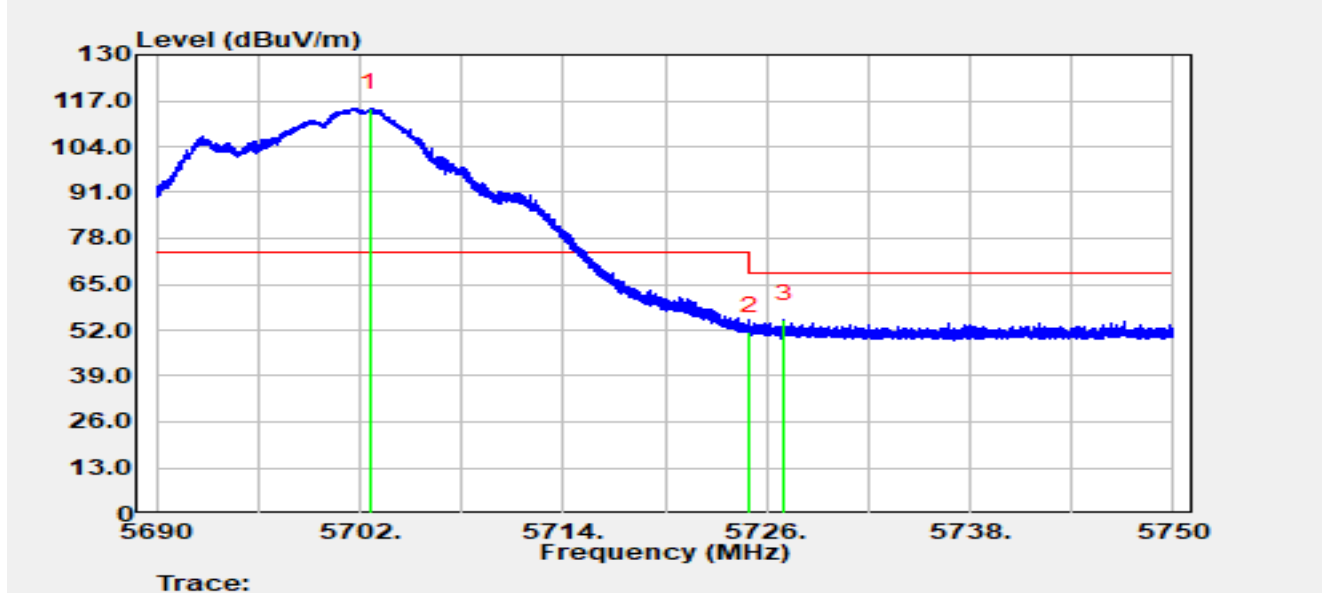


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5702.624	77.81	37.18	114.98	N/A	N/A	Peak
2		5725.000	51.21	0.39	51.60	-16.60	68.20	Peak
3	*	5727.044	55.90	-0.76	55.14	-13.06	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5745 MHz		

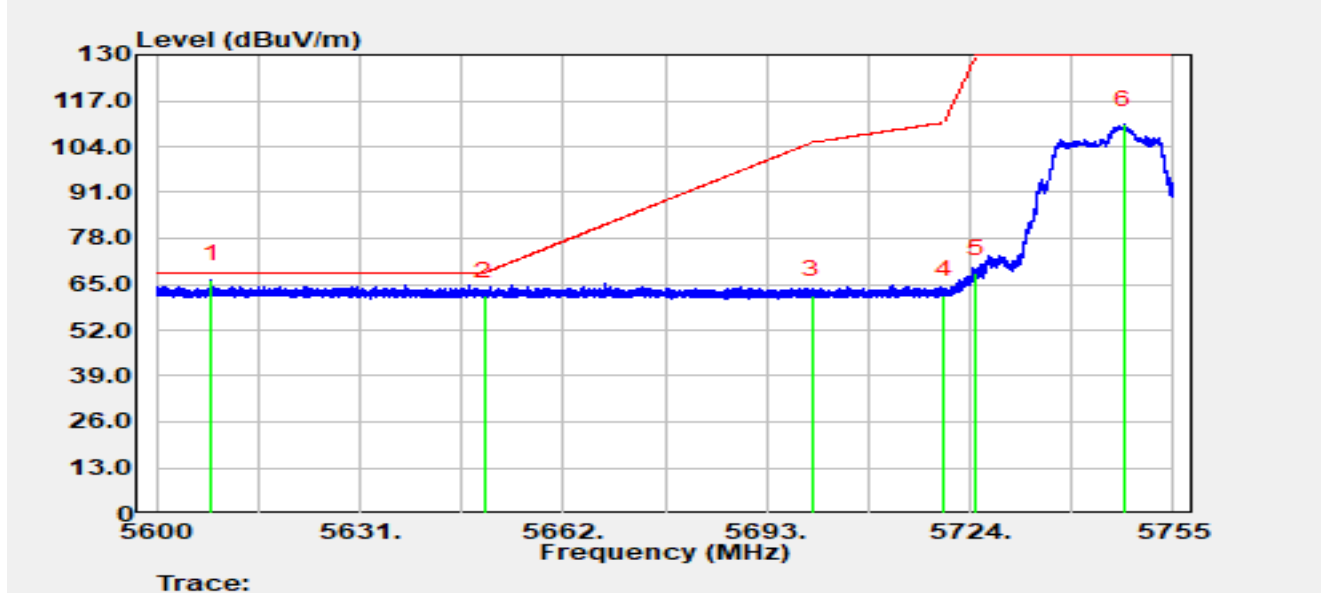


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5608.432	72.45	-6.15	66.30	-1.90	68.20	Peak
2		5650.000	67.91	-6.34	61.57	-6.63	68.20	Peak
3		5700.000	68.28	-6.38	61.89	-43.31	105.20	Peak
4		5720.000	68.16	-6.33	61.83	-48.97	110.80	Peak
5		5725.000	74.37	-6.33	68.04	-61.96	130.00	Peak
6		5747.482	116.50	-6.30	110.19	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5745 MHz		

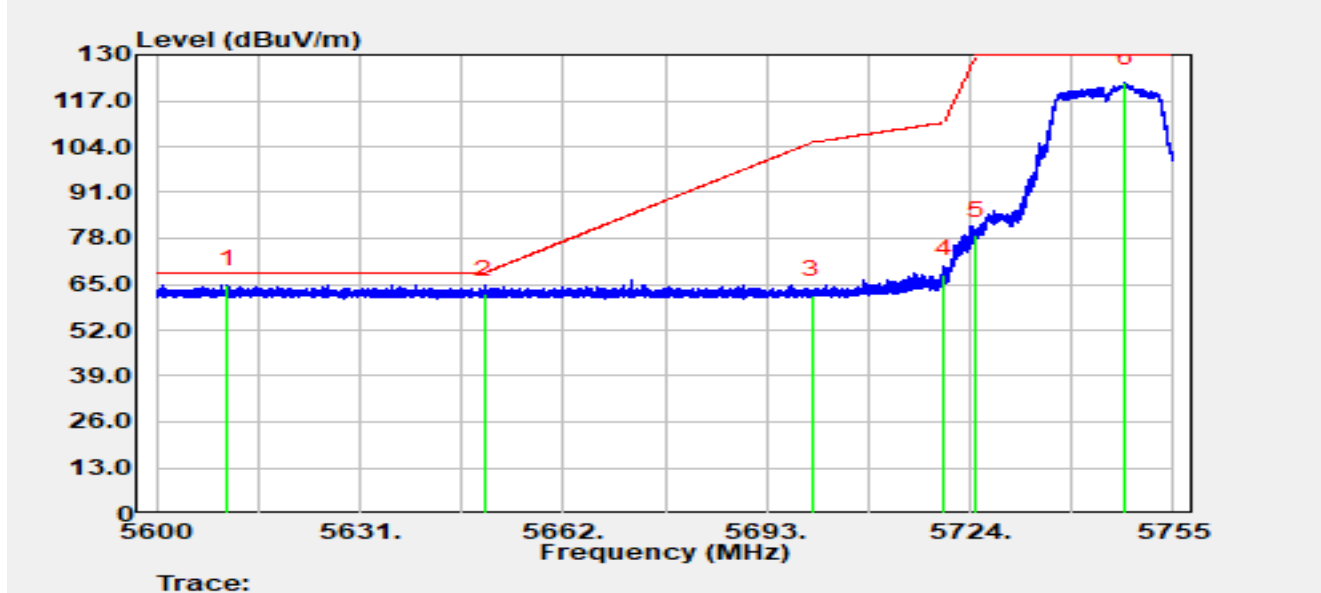


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5610.742	71.00	-6.16	64.84	-3.36	68.20	Peak
2		5650.000	68.44	-6.34	62.11	-6.09	68.20	Peak
3		5700.000	68.33	-6.38	61.94	-43.26	105.20	Peak
4		5720.000	74.24	-6.33	67.91	-42.89	110.80	Peak
5		5725.000	85.21	-6.33	78.88	-51.12	130.00	Peak
6		5747.576	128.32	-6.30	122.01	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5825 MHz		

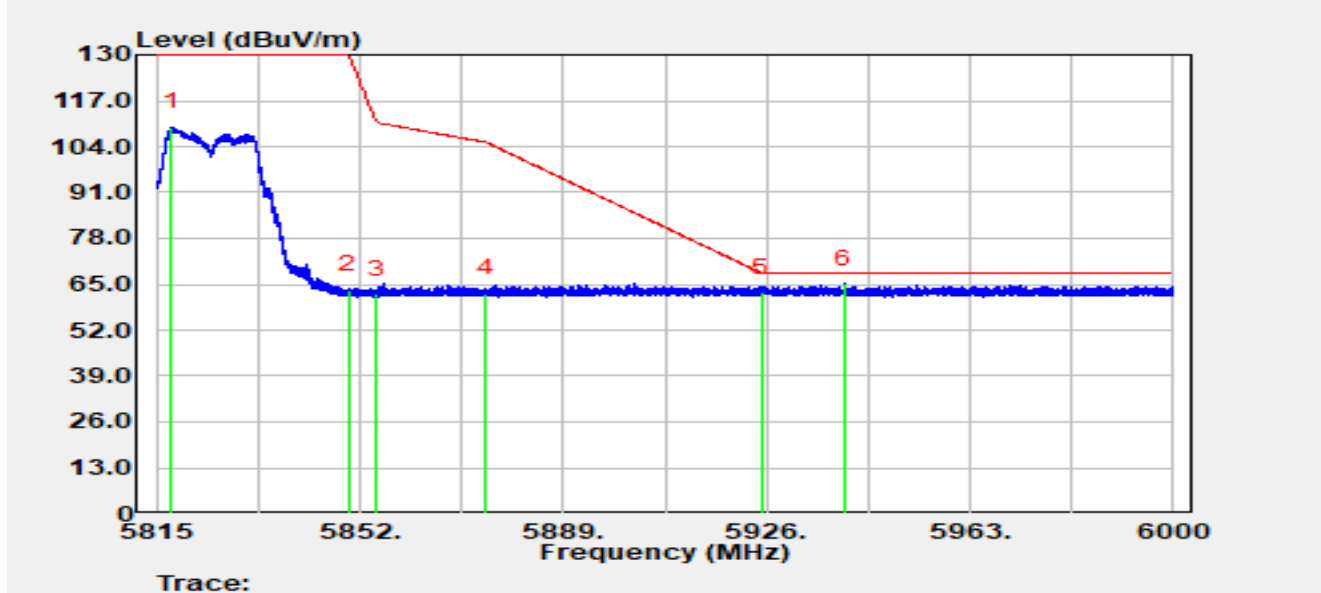


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5817.627	115.95	-6.33	109.61	N/A	N/A	Peak
2		5850.000	69.63	-6.31	63.31	-66.69	130.00	Peak
3		5855.000	68.53	-6.27	62.26	-48.54	110.80	Peak
4		5875.000	68.56	-6.24	62.32	-42.88	105.20	Peak
5		5925.000	68.64	-6.05	62.59	-5.61	68.20	Peak
6	*	5940.171	71.20	-6.15	65.05	-3.15	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5825 MHz		

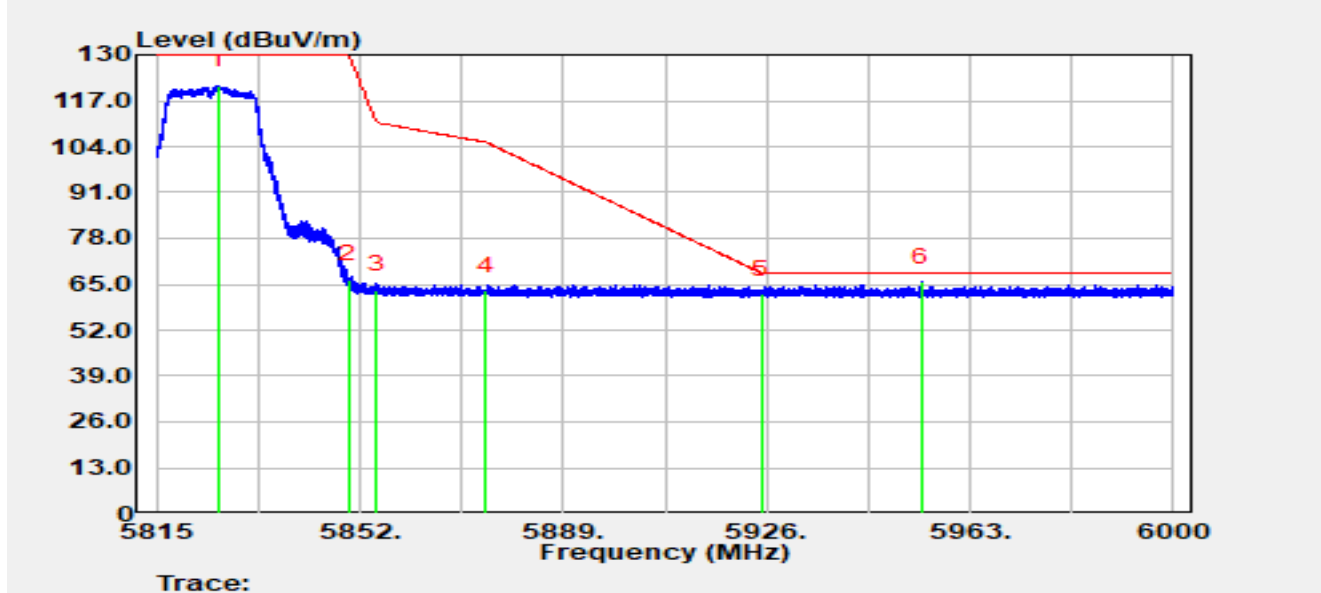


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5826.082	127.48	-6.28	121.21	N/A	N/A	Peak
2		5850.000	72.60	-6.31	66.28	-63.72	130.00	Peak
3		5855.000	69.77	-6.27	63.51	-47.29	110.80	Peak
4		5875.000	69.31	-6.24	63.07	-42.13	105.20	Peak
5		5925.000	68.28	-6.05	62.23	-5.97	68.20	Peak
6	*	5954.083	71.72	-6.16	65.56	-2.64	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5180 MHz		

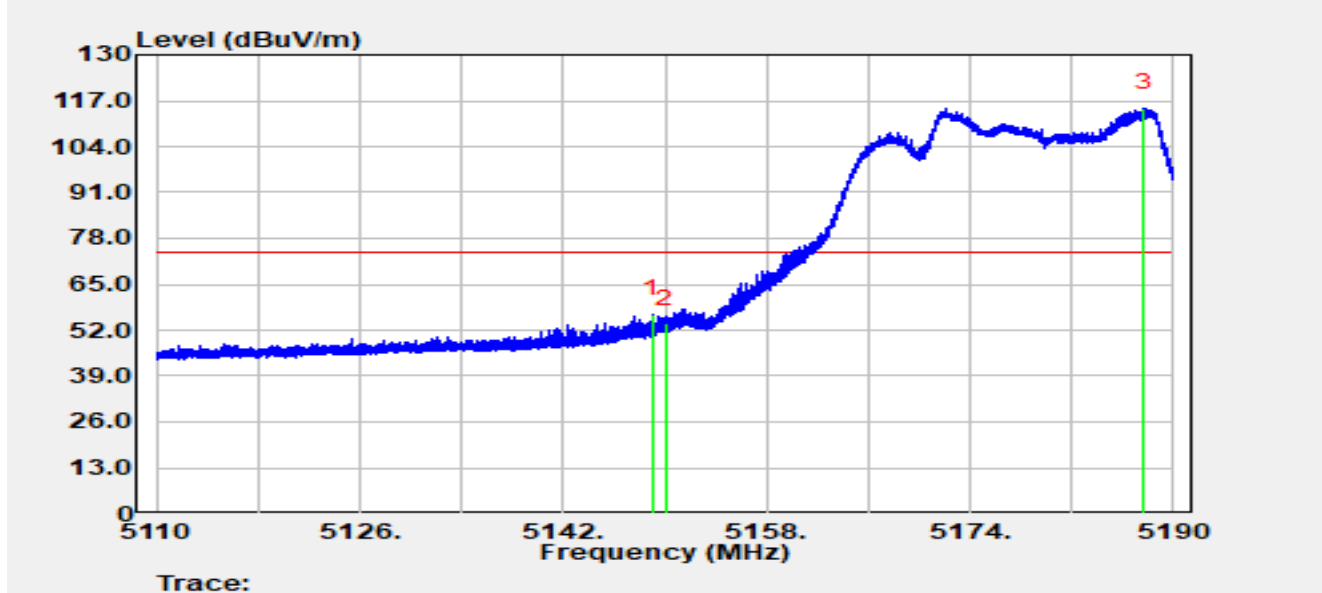


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.960	57.91	-1.28	56.63	-17.37	74.00	Peak
2		5150.000	54.82	-0.99	53.83	-20.17	74.00	Peak
3		5187.656	74.05	40.91	114.96	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5180 MHz		

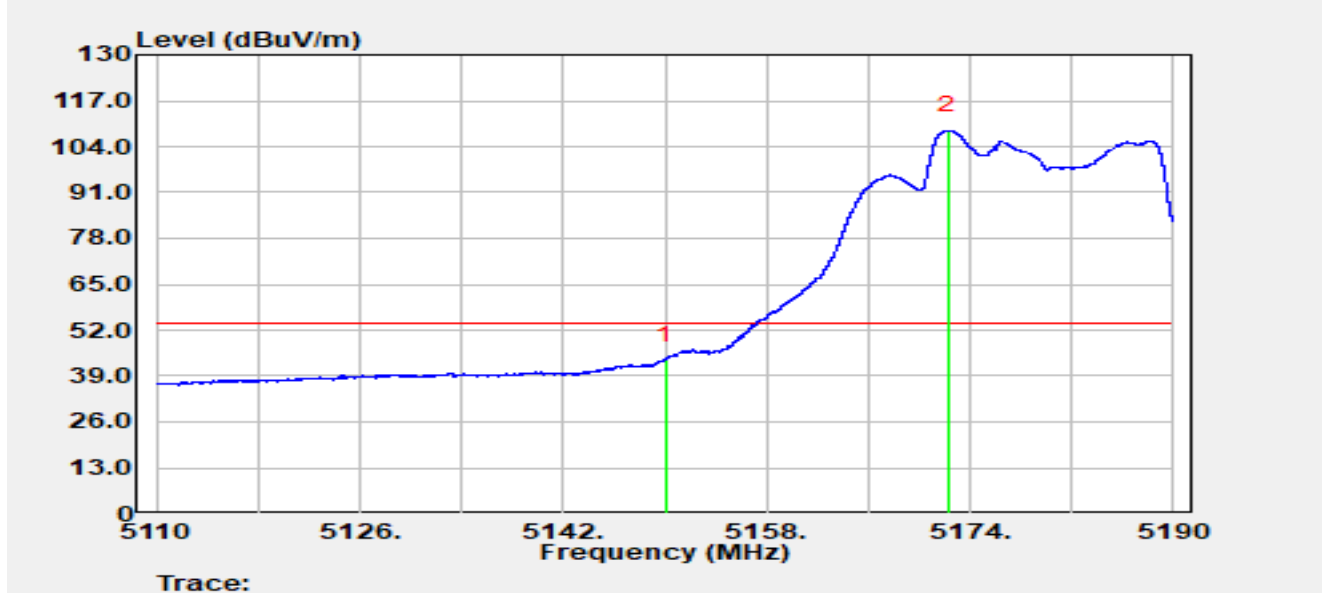


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	44.64	-0.99	43.65	-10.35	54.00	Average
2		5172.240	55.61	53.01	108.62	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5180 MHz		

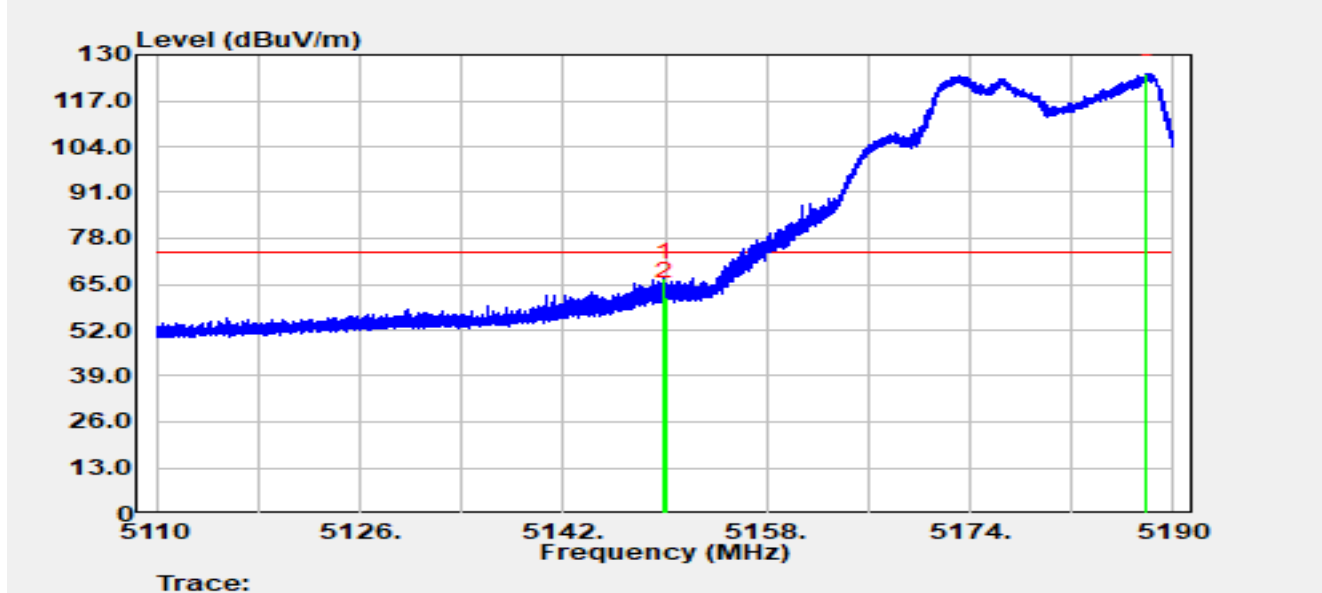


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.896	67.83	-1.02	66.81	-7.19	74.00	Peak
2		5150.000	62.52	-0.99	61.52	-12.48	74.00	Peak
3		5187.880	83.22	41.37	124.58	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5180 MHz		

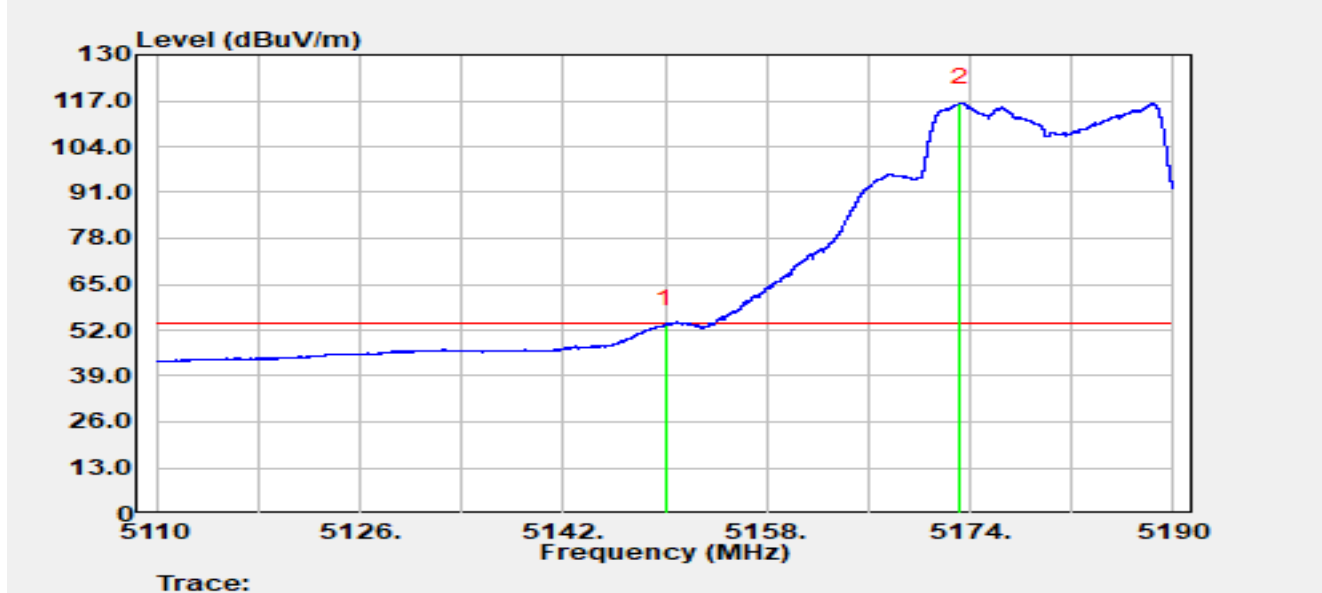


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	54.55	-0.99	53.56	-0.44	54.00	Average
2		5173.240	62.75	53.70	116.45	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5320 MHz		

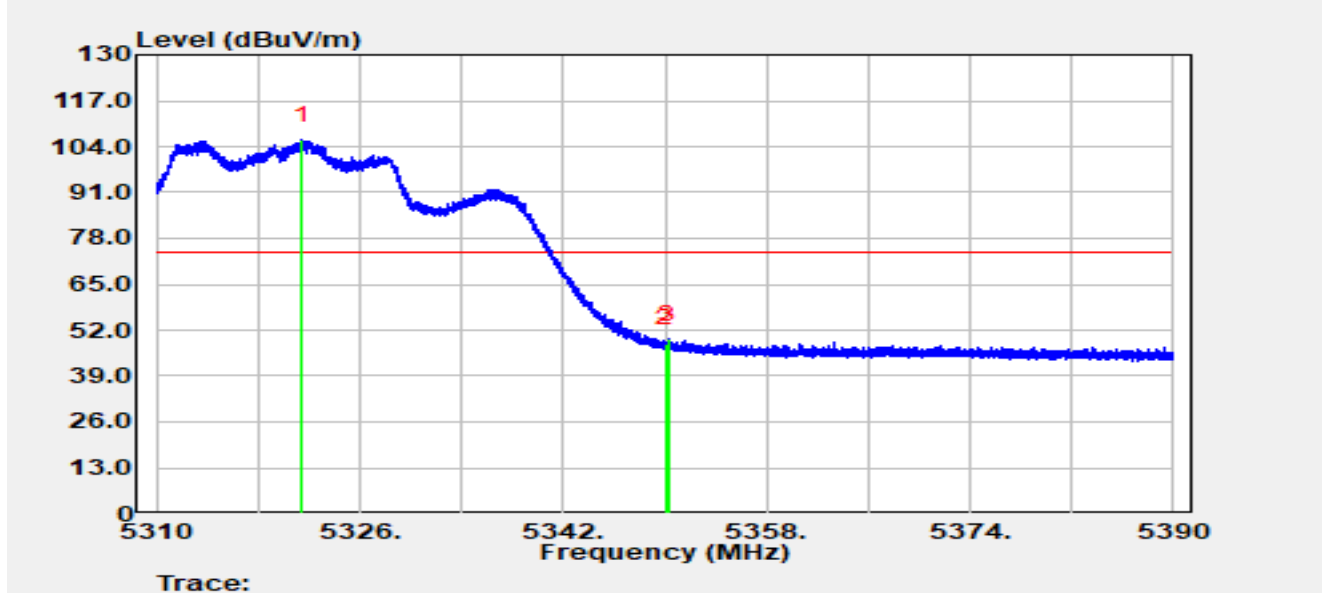


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5321.480	65.78	40.05	105.84	N/A	N/A	Peak
2		5350.000	47.97	0.19	48.16	-25.84	74.00	Peak
3	*	5350.288	49.49	-0.04	49.45	-24.55	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5320 MHz		

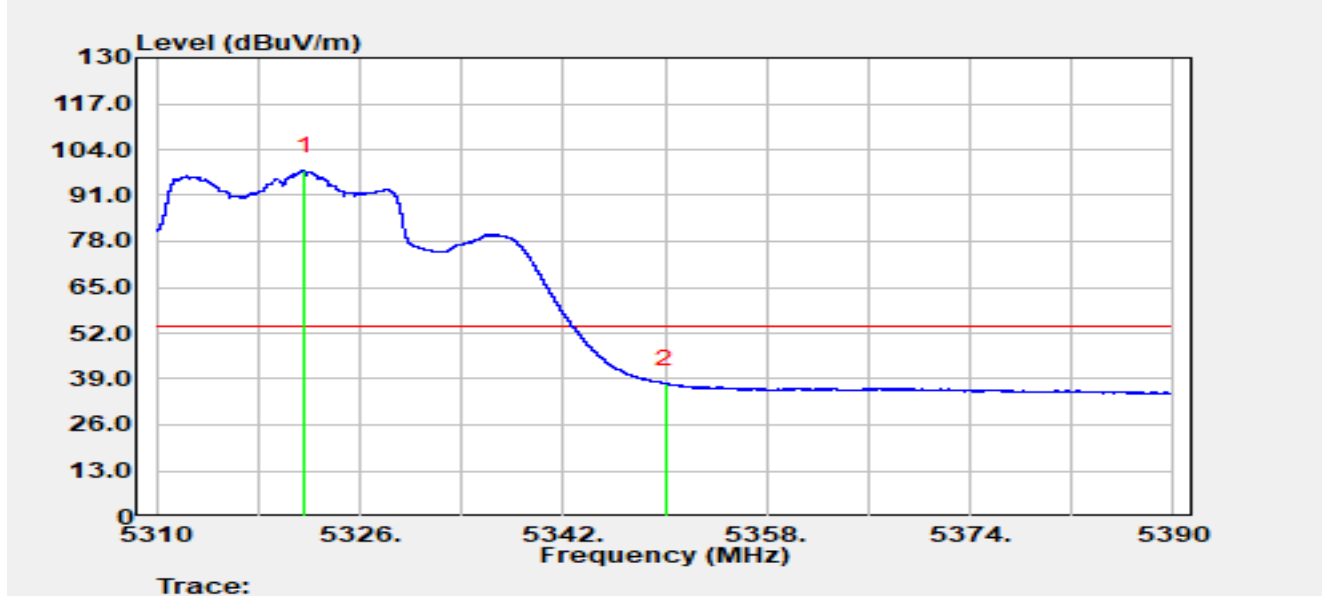


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5321.632	57.84	40.17	98.01	N/A	N/A	Average
2	*	5350.000	37.42	0.19	37.60	-16.40	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5320 MHz		

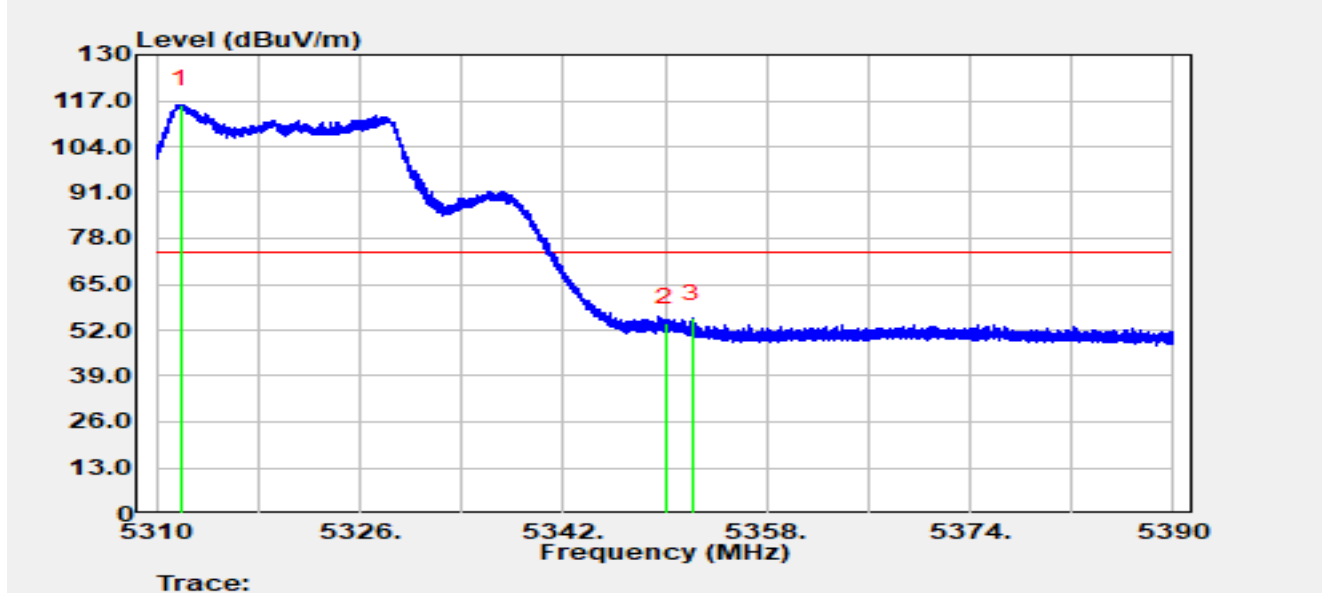


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5311.864	69.93	46.05	115.97	N/A	N/A	Peak
2		5350.000	53.97	0.19	54.16	-19.84	74.00	Peak
3	*	5352.136	56.36	-0.94	55.42	-18.58	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5320 MHz		

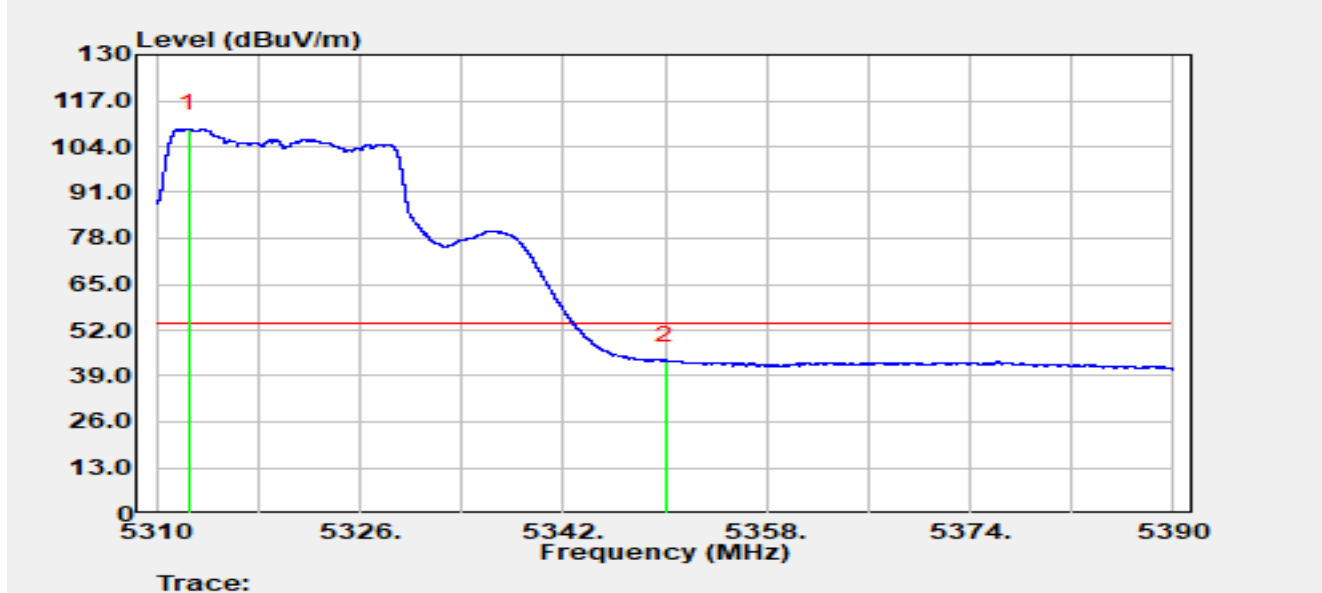


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5312.504	61.97	46.98	108.95	N/A	N/A	Average
2	*	5350.000	43.12	0.19	43.30	-10.70	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

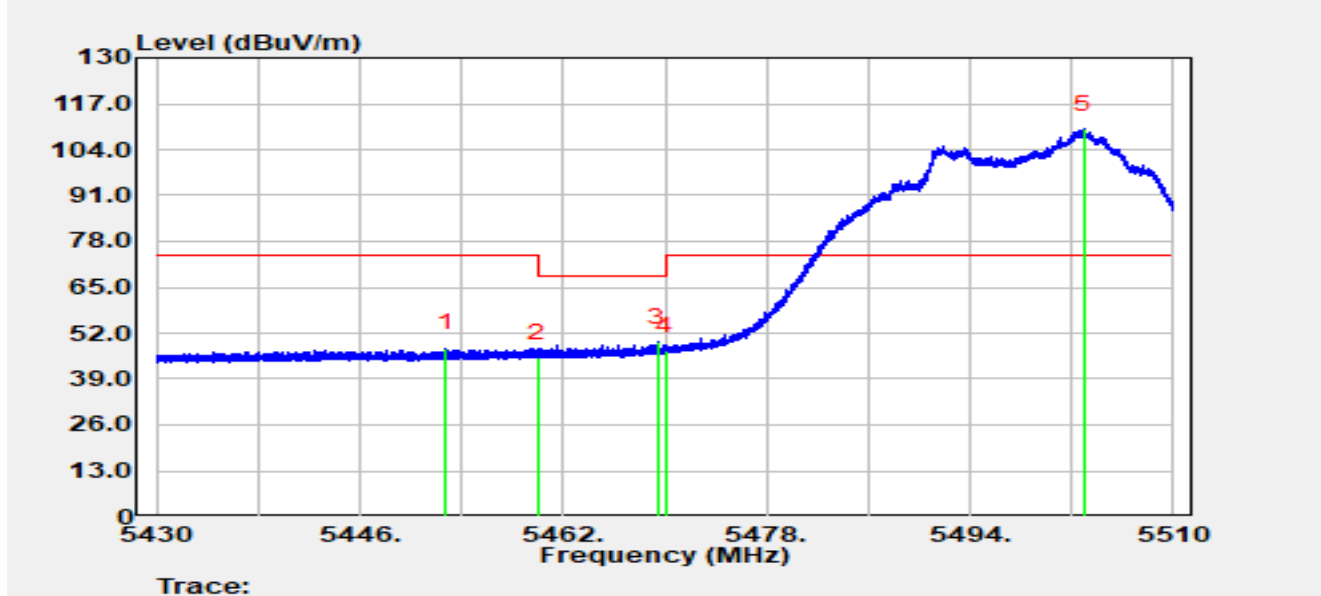


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5452.736	51.36	-3.58	47.77	-26.23	74.00	Peak
2		5460.000	48.22	-3.25	44.98	-23.22	68.20	Peak
3	*	5469.424	51.24	-1.74	49.50	-18.70	68.20	Peak
4		5470.000	48.80	-1.75	47.04	-21.16	68.20	Peak
5		5502.952	64.74	44.93	109.66	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

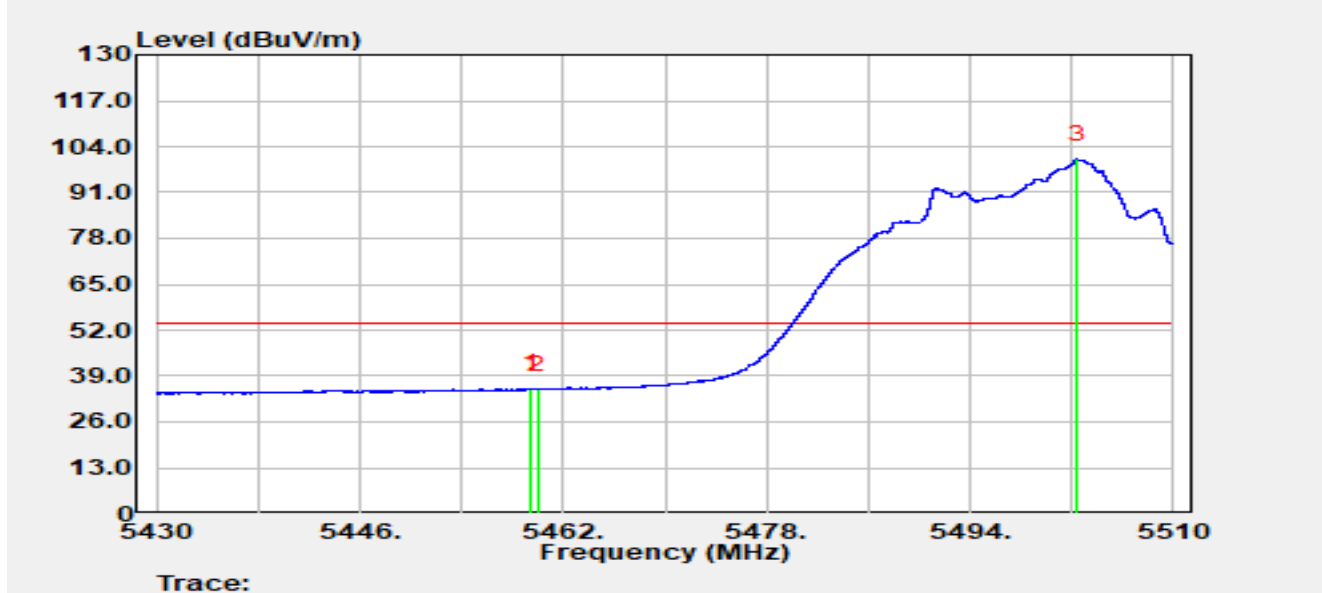


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.488	38.62	-3.21	35.40	-18.60	54.00	Average
2		5460.000	38.46	-3.25	35.22	-18.78	54.00	Average
3		5502.464	55.63	44.70	100.33	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

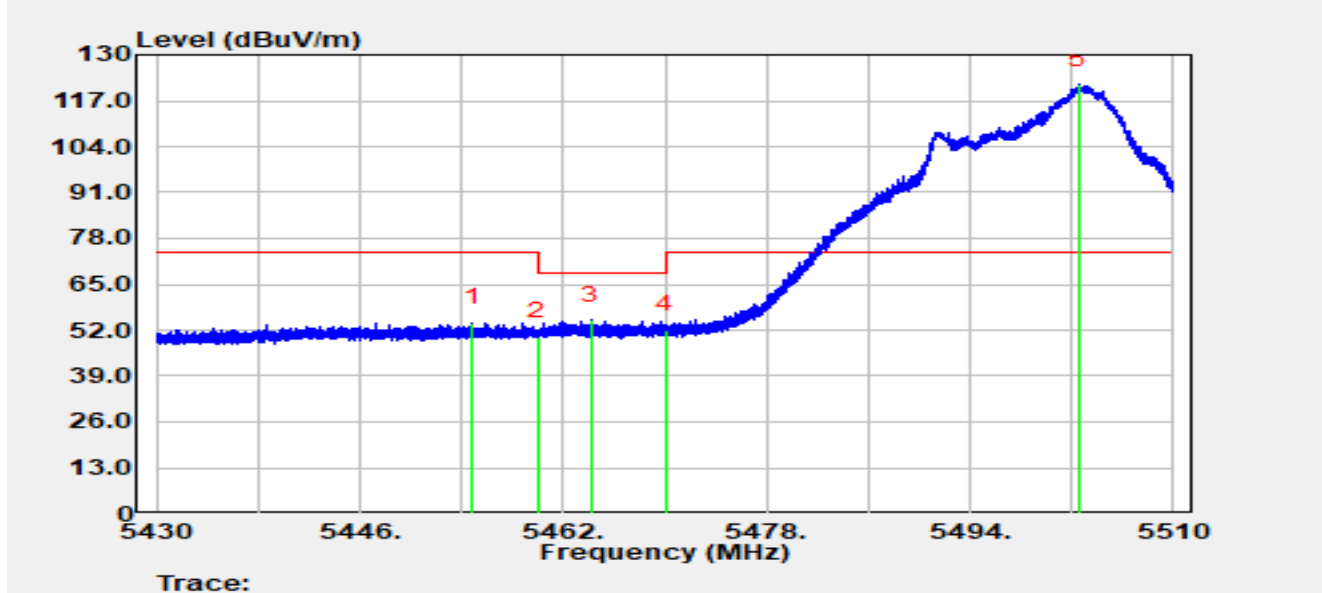


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5454.872	57.73	-3.56	54.17	-19.83	74.00	Peak
2		5460.000	53.39	-3.25	50.14	-18.06	68.20	Peak
3	*	5464.152	57.83	-2.99	54.83	-13.37	68.20	Peak
4		5470.000	53.86	-1.75	52.10	-16.10	68.20	Peak
5		5502.504	76.79	44.73	121.52	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

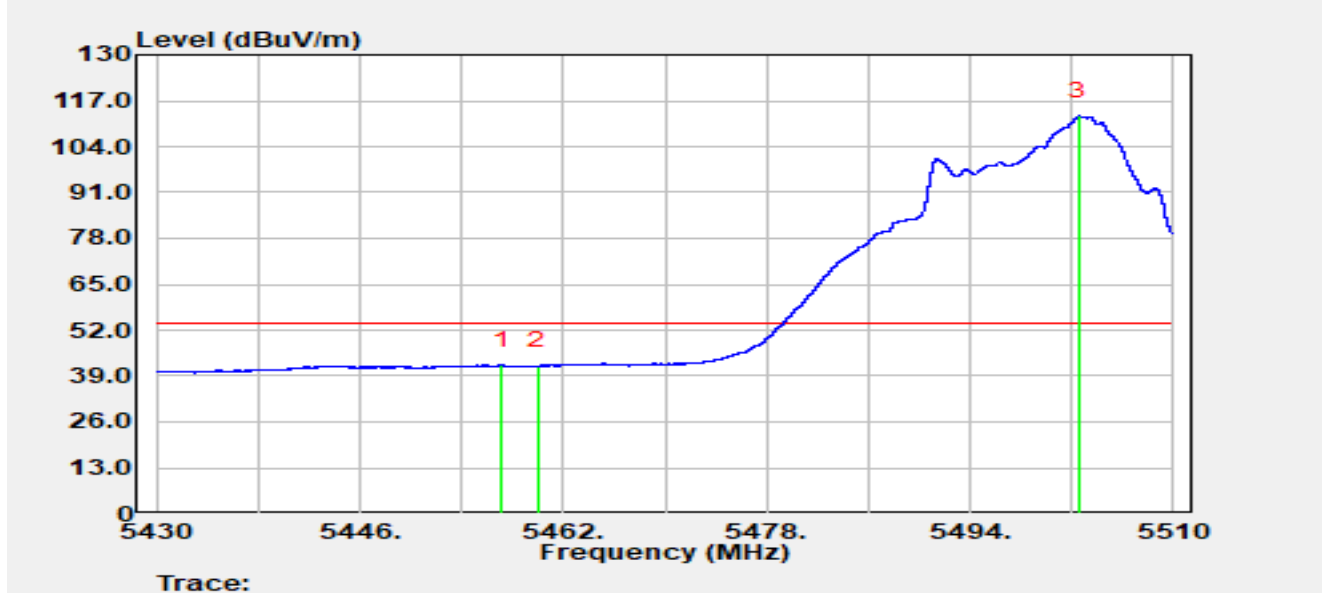


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5457.216	45.49	-3.38	42.11	-11.89	54.00	Average
2		5460.000	44.99	-3.25	41.75	-12.25	54.00	Average
3		5502.520	67.89	44.74	112.64	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5700 MHz		

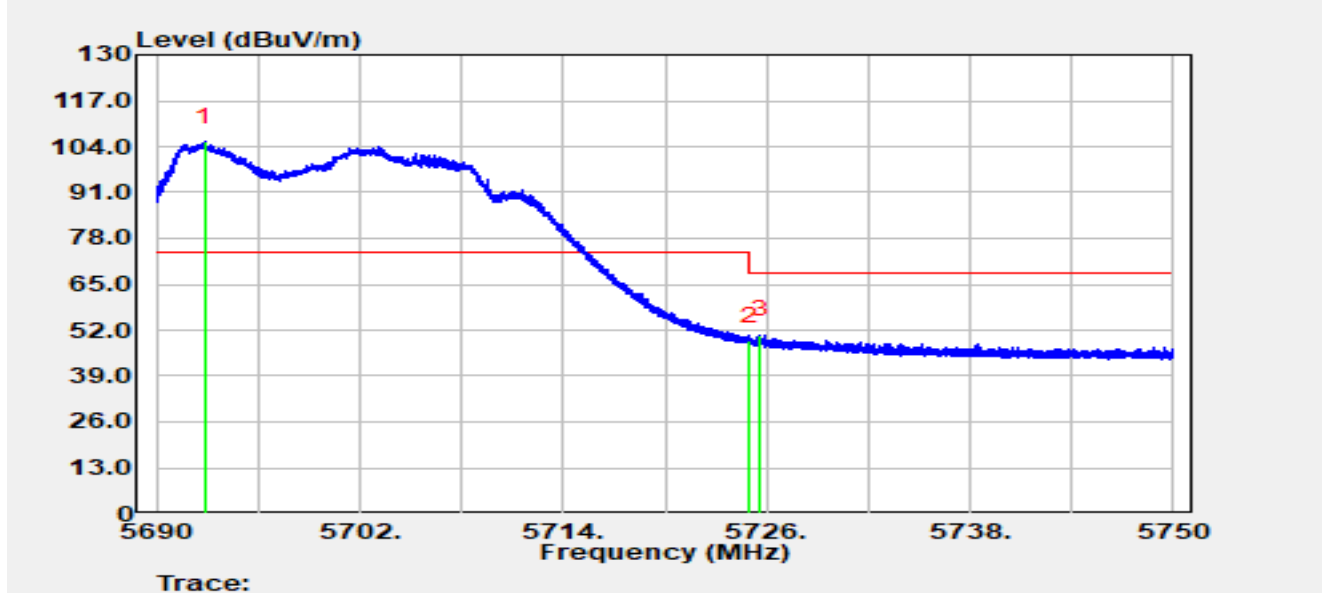


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5692.880	62.71	42.63	105.34	N/A	N/A	Peak
2		5725.000	48.63	0.39	49.02	-19.18	68.20	Peak
3	*	5725.616	50.57	0.13	50.70	-17.50	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5700 MHz		

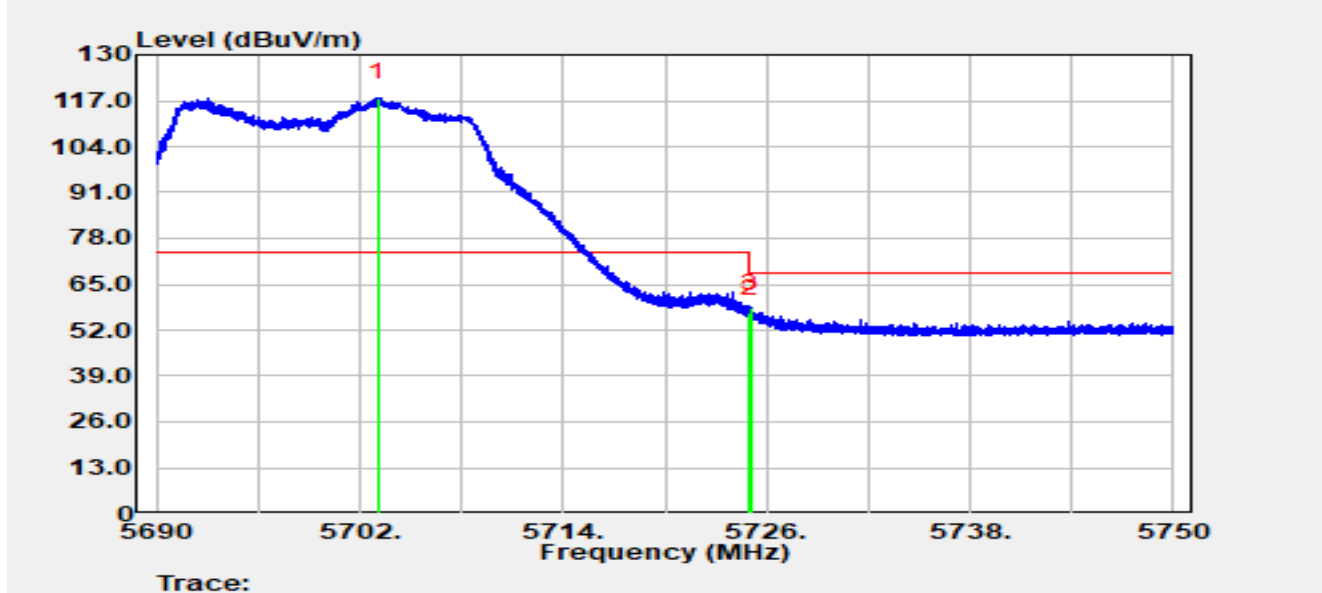


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5703.056	80.00	37.83	117.83	N/A	N/A	Peak
2		5725.000	56.33	0.39	56.72	-11.48	68.20	Peak
3	*	5725.064	57.84	0.31	58.15	-10.05	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5745 MHz		

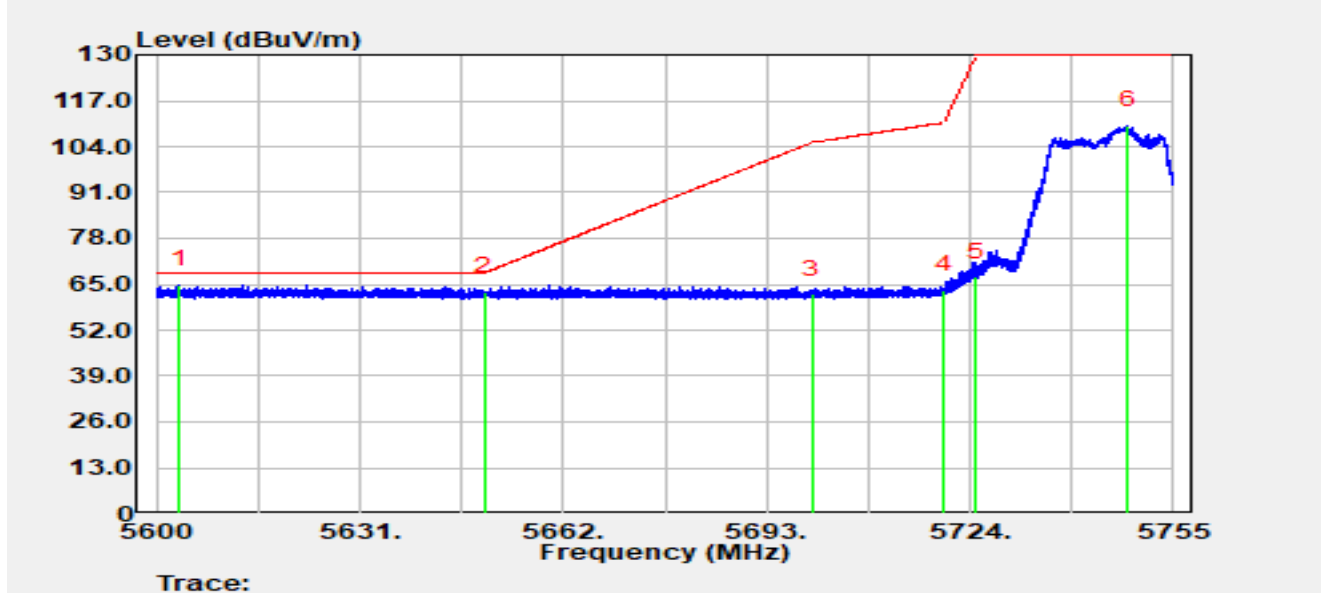


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5603.487	70.91	-6.12	64.78	-3.42	68.20	Peak
2		5650.000	69.34	-6.34	63.00	-5.20	68.20	Peak
3		5700.000	68.61	-6.38	62.23	-42.97	105.20	Peak
4		5720.000	69.71	-6.33	63.37	-47.43	110.80	Peak
5		5725.000	73.40	-6.33	67.08	-62.92	130.00	Peak
6		5748.009	116.25	-6.30	109.95	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5745 MHz		

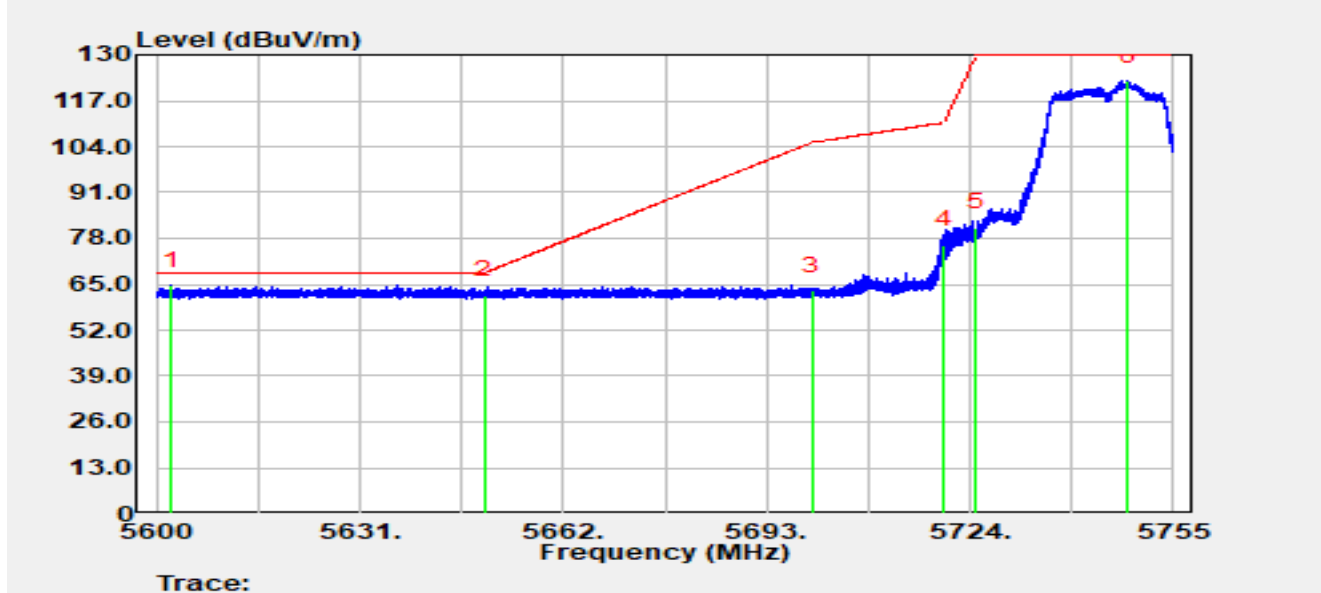


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5602.356	70.69	-6.11	64.58	-3.62	68.20	Peak
2		5650.000	68.17	-6.34	61.84	-6.36	68.20	Peak
3		5700.000	69.56	-6.38	63.17	-42.03	105.20	Peak
4		5720.000	82.43	-6.33	76.10	-34.70	110.80	Peak
5		5725.000	87.40	-6.33	81.07	-48.93	130.00	Peak
6		5747.963	128.90	-6.30	122.60	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5825 MHz		

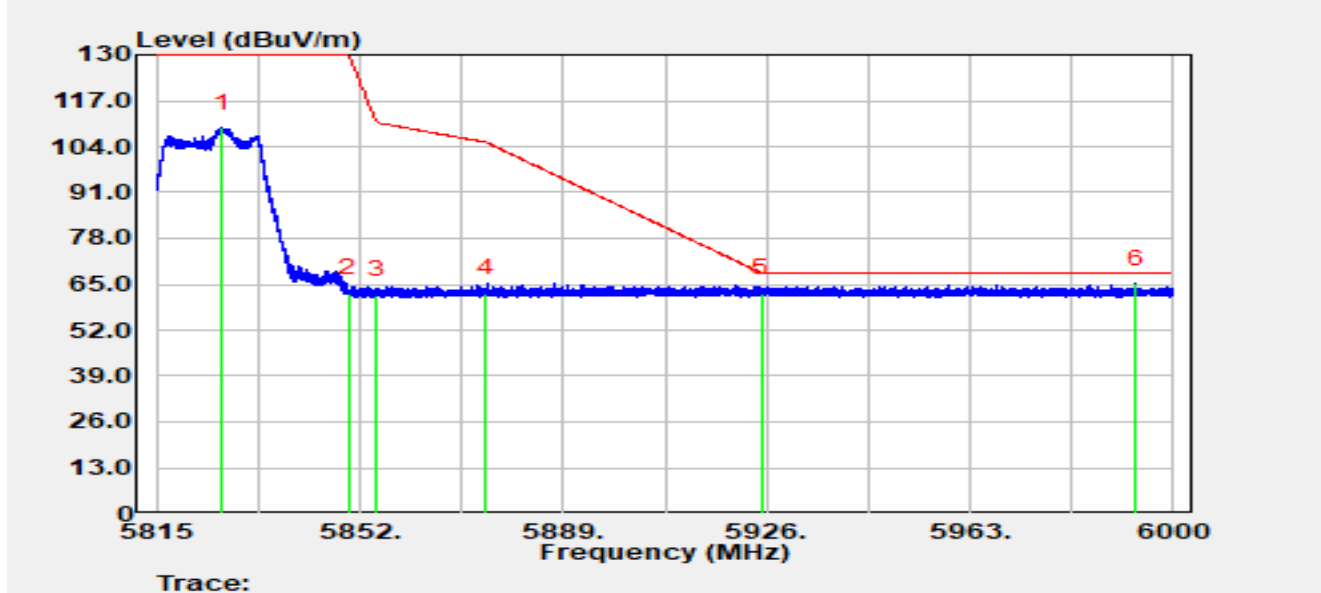


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5826.914	115.61	-6.27	109.34	N/A	N/A	Peak
2		5850.000	68.66	-6.31	62.34	-67.66	130.00	Peak
3		5855.000	68.19	-6.27	61.92	-48.88	110.80	Peak
4		5875.000	68.57	-6.24	62.33	-42.87	105.20	Peak
5		5925.000	68.40	-6.05	62.34	-5.86	68.20	Peak
6	*	5993.266	71.13	-5.97	65.16	-3.04	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5825 MHz		

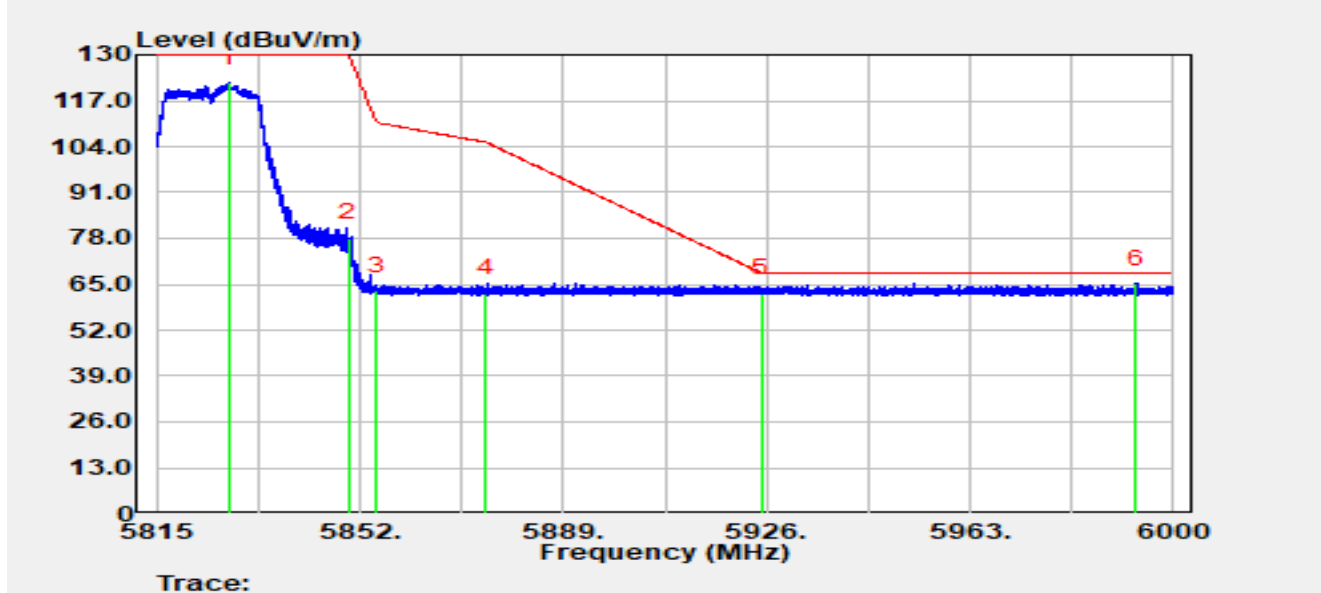


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5828.190	128.27	-6.26	122.00	N/A	N/A	Peak
2		5850.000	84.35	-6.31	78.04	-51.96	130.00	Peak
3		5855.000	69.33	-6.27	63.06	-47.74	110.80	Peak
4		5875.000	68.57	-6.24	62.33	-42.87	105.20	Peak
5		5925.000	68.58	-6.05	62.53	-5.67	68.20	Peak
6	*	5993.266	71.13	-5.97	65.16	-3.04	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5190 MHz		

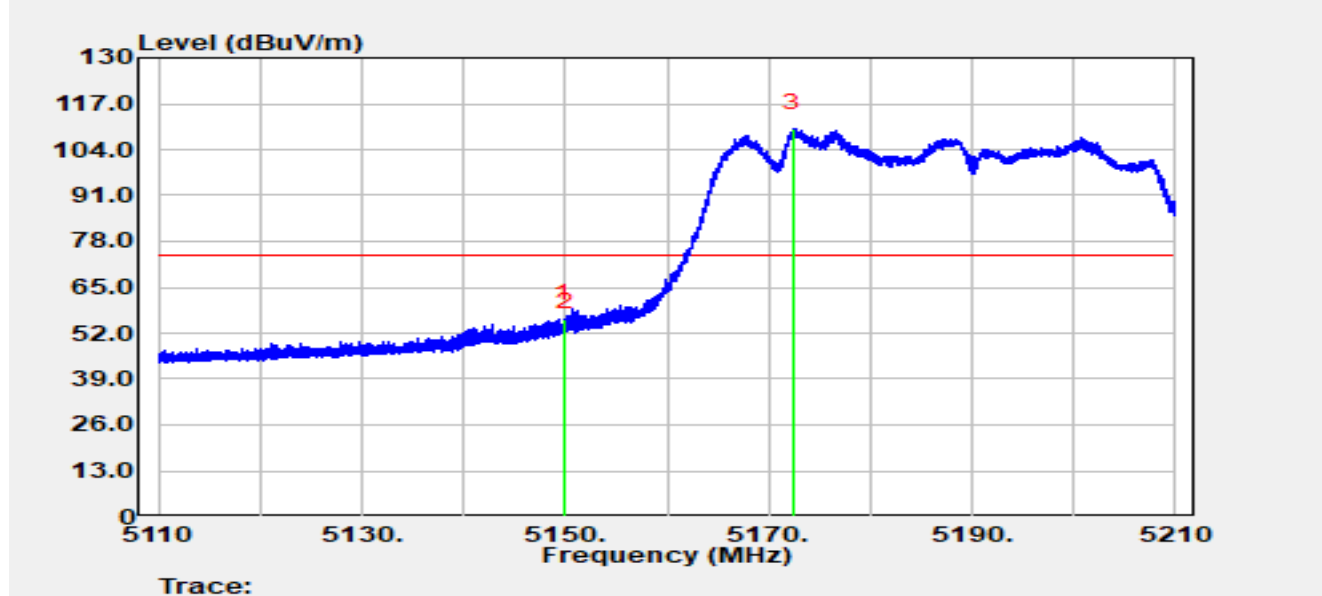


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.850	57.04	-1.03	56.01	-17.99	74.00	Peak
2		5150.000	54.62	-0.99	53.63	-20.37	74.00	Peak
3		5172.400	56.81	53.14	109.95	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5190 MHz		

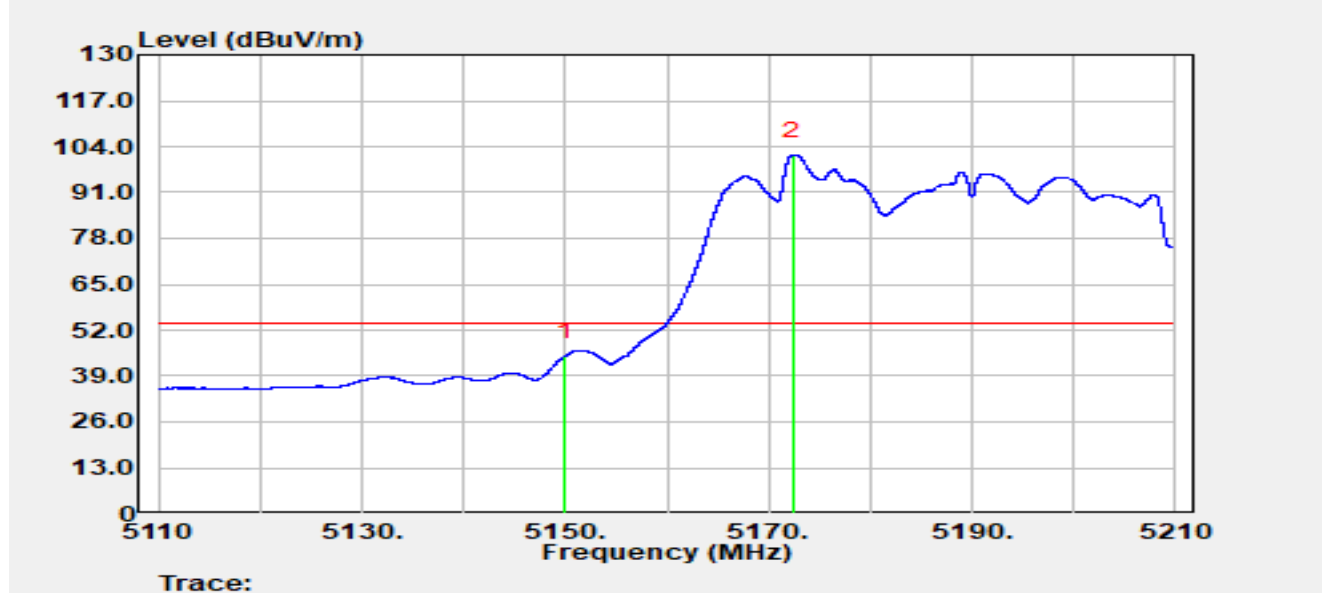


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	45.61	-0.99	44.62	-9.38	54.00	Average
2		5172.400	48.39	53.14	101.53	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5190 MHz		

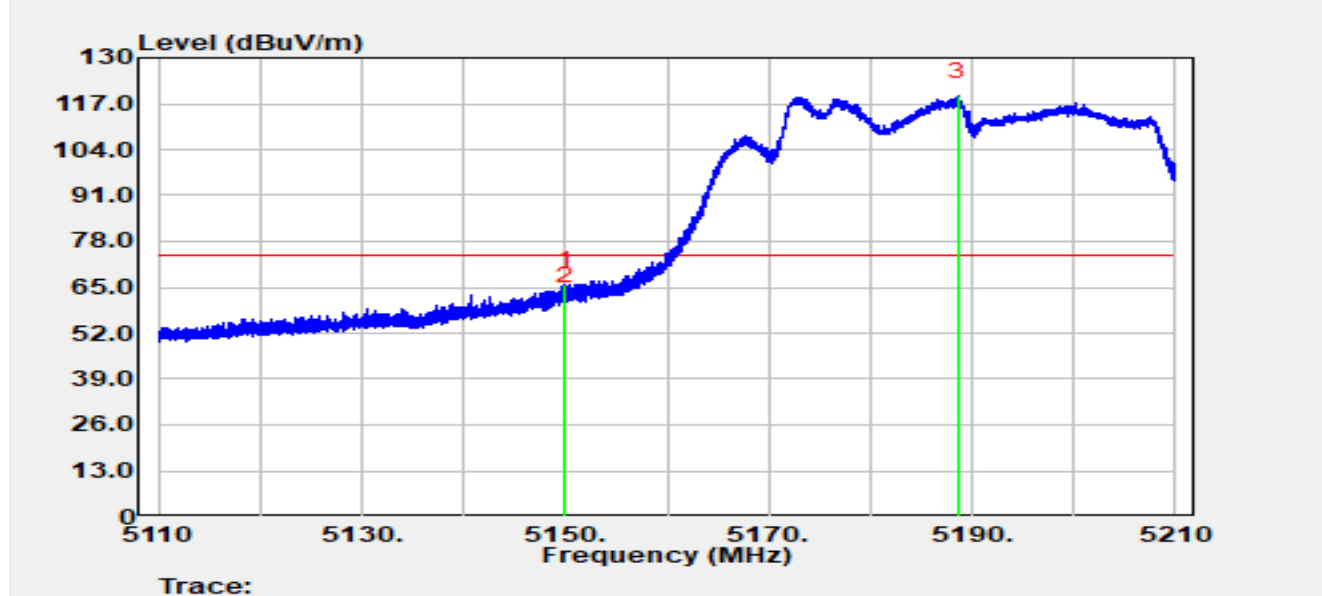


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.920	66.65	-1.01	65.64	-8.36	74.00	Peak
2		5150.000	62.23	-0.99	61.24	-12.76	74.00	Peak
3		5188.590	76.26	42.80	119.06	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5190 MHz		

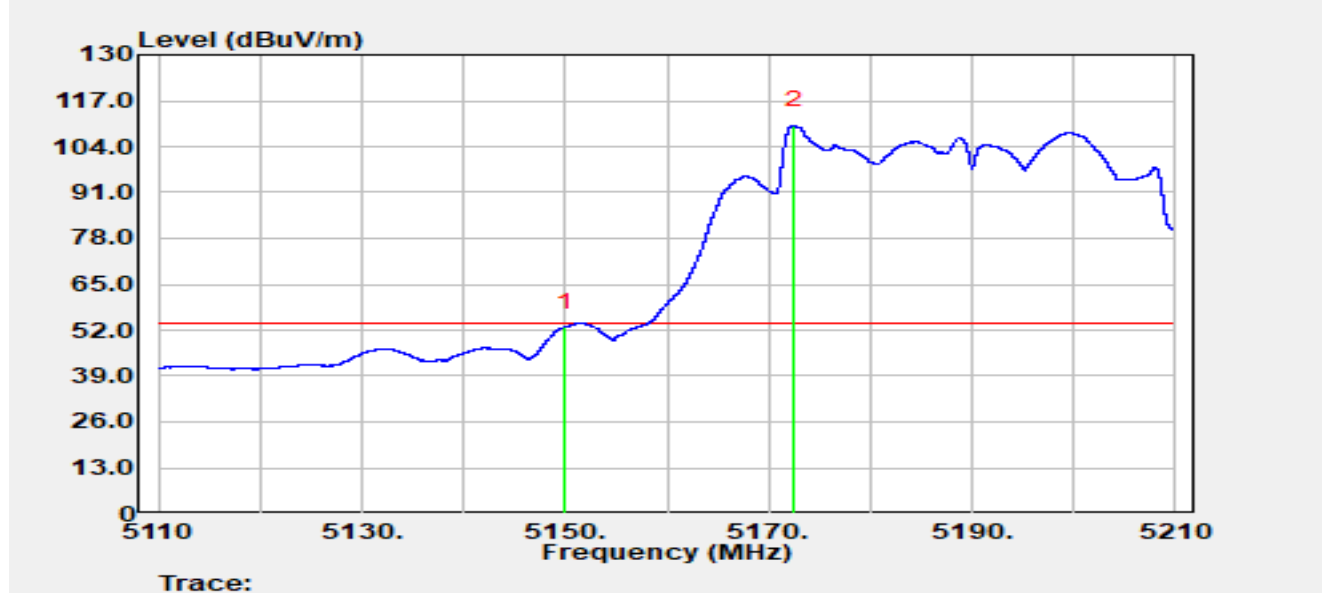


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	53.92	-0.99	52.93	-1.07	54.00	Average
2		5172.470	56.74	53.19	109.93	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5310 MHz		

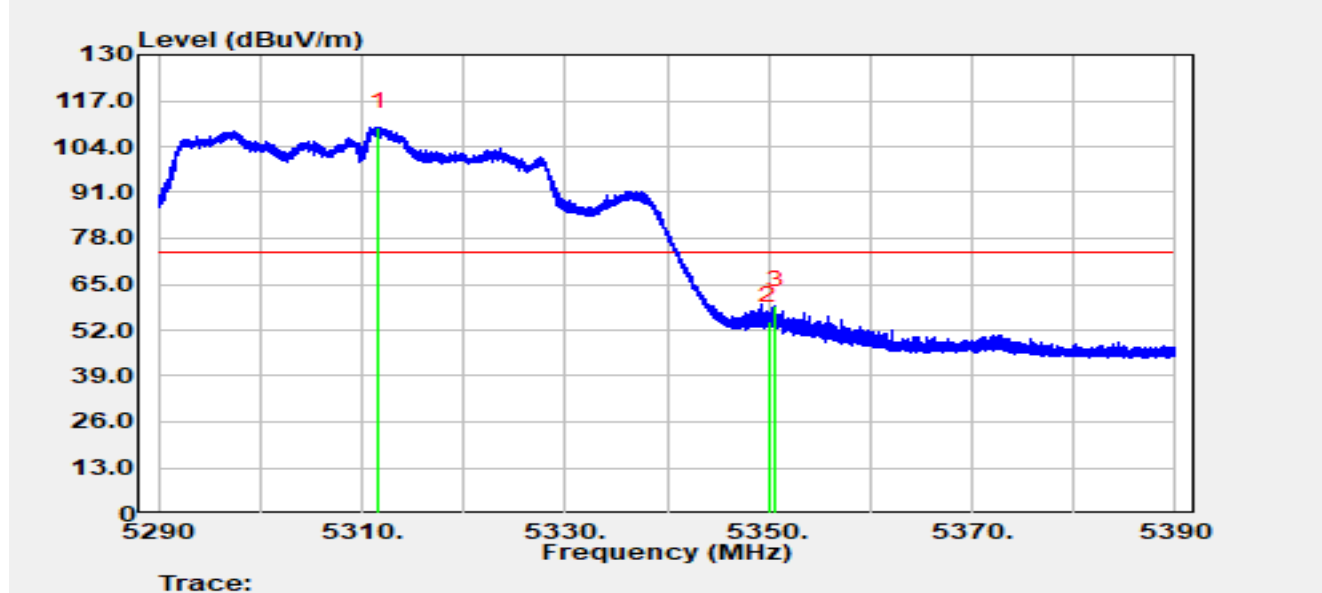


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5311.700	63.66	45.83	109.49	N/A	N/A	Peak
2		5350.000	54.45	0.19	54.63	-19.37	74.00	Peak
3	*	5350.740	59.34	-0.26	59.08	-14.92	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5310 MHz		

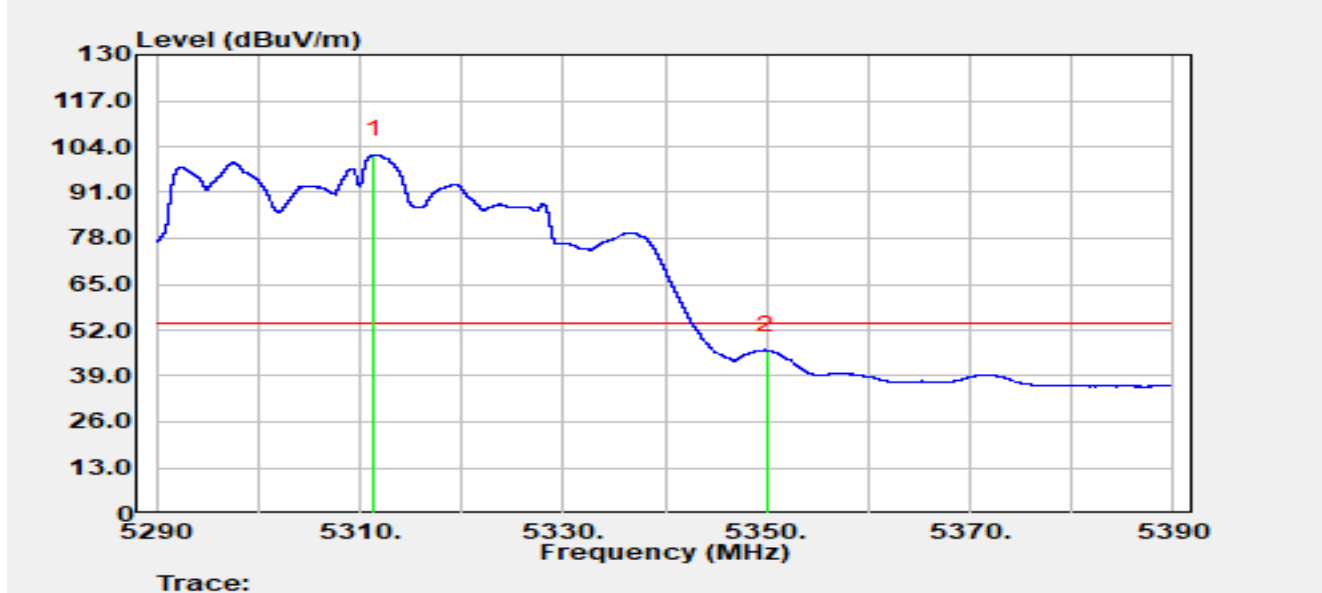


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5311.440	56.15	45.50	101.66	N/A	N/A	Average
2	*	5350.000	46.09	0.19	46.27	-7.73	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5310 MHz		

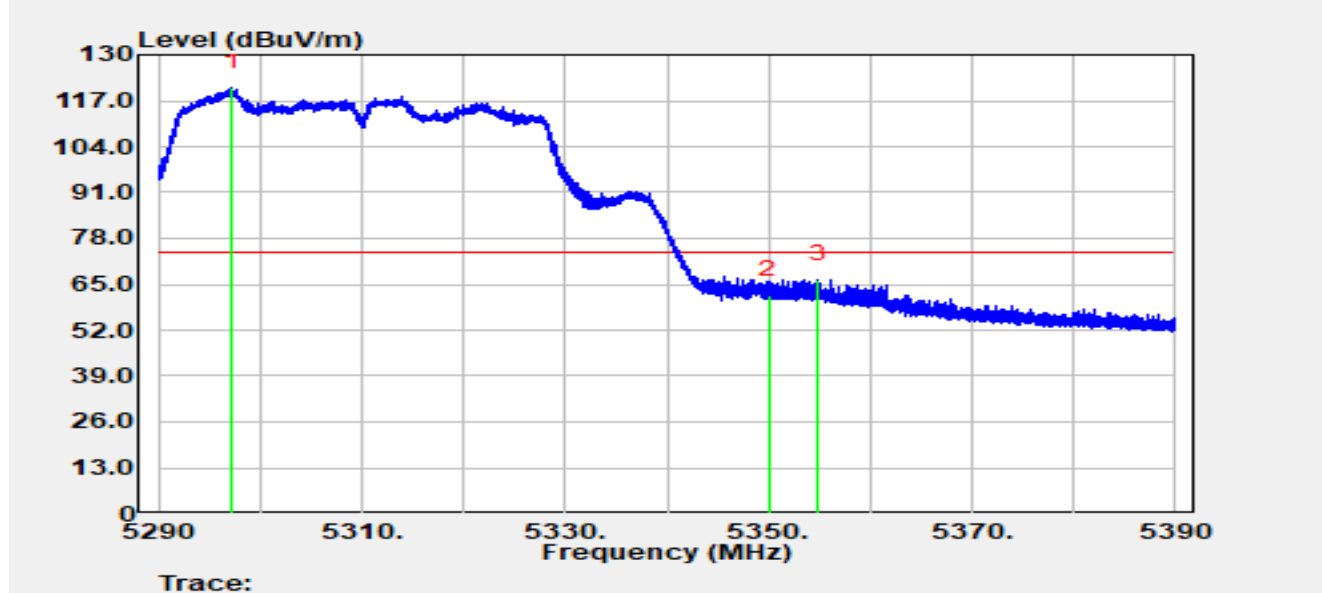


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5297.260	74.15	46.63	120.78	N/A	N/A	Peak
2		5350.000	61.83	0.19	62.02	-11.98	74.00	Peak
3	*	5354.880	67.95	-1.63	66.32	-7.68	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5310 MHz		

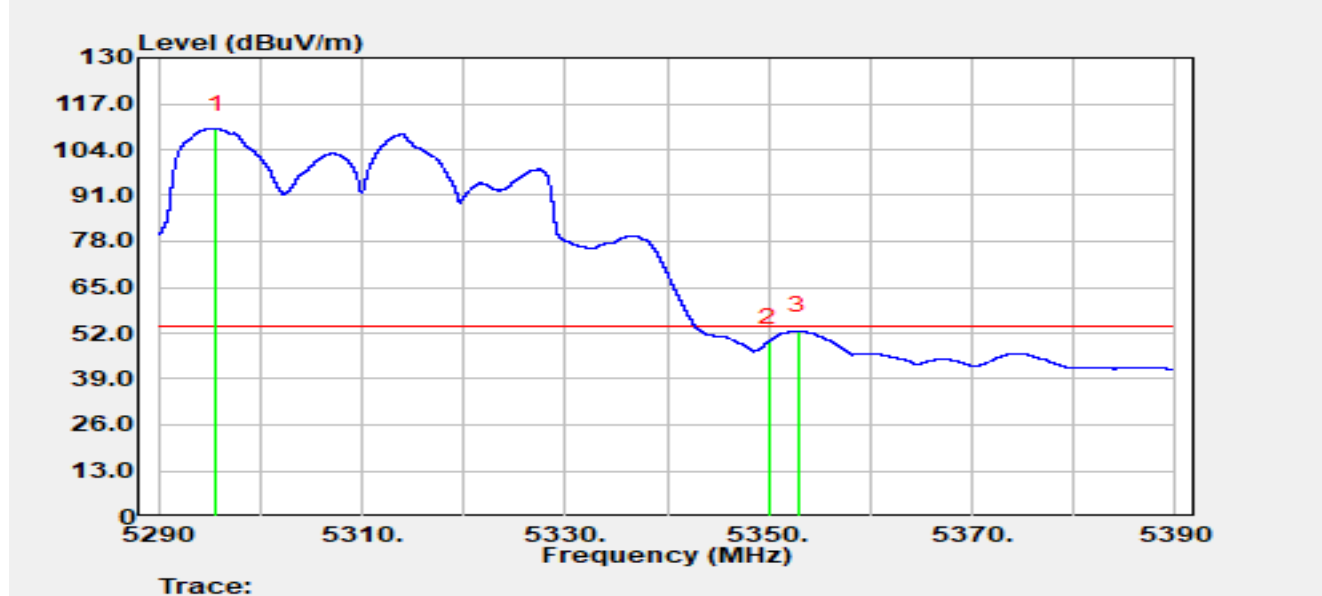


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5295.620	66.39	43.47	109.87	N/A	N/A	Average
2		5350.000	49.24	0.19	49.43	-4.57	54.00	Average
3	*	5352.850	53.93	-1.19	52.74	-1.26	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

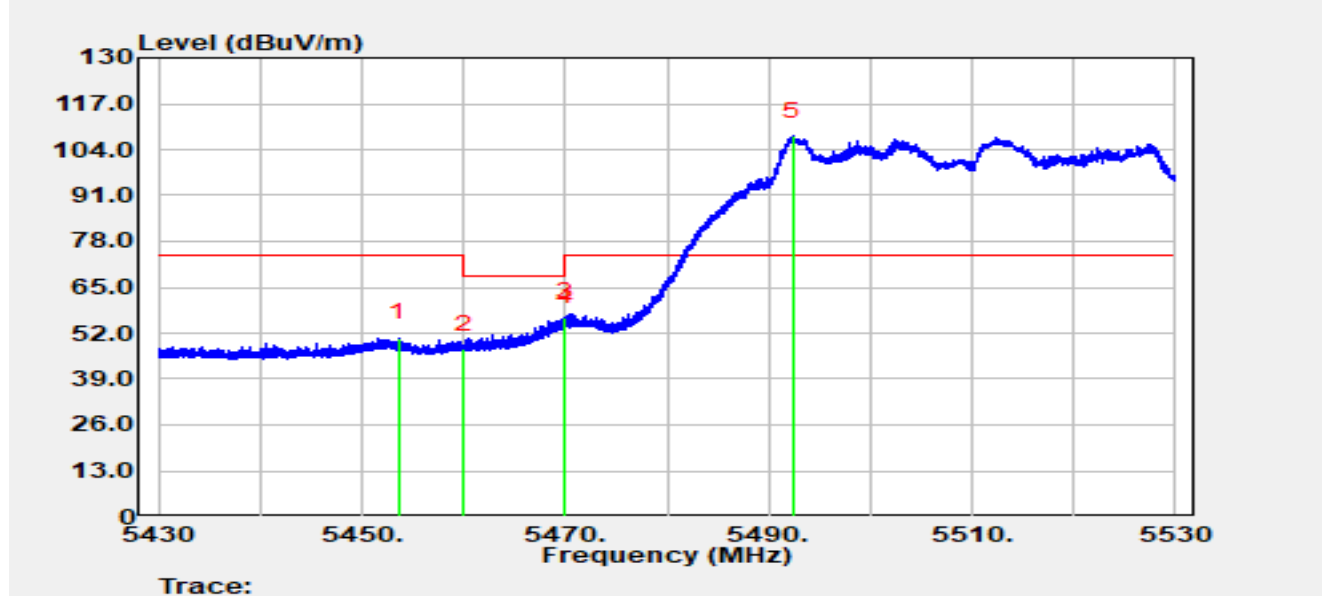


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5453.640	54.16	-3.54	50.63	-23.37	74.00	Peak
2		5460.000	50.63	-3.25	47.39	-20.81	68.20	Peak
3	*	5469.930	58.21	-1.75	56.46	-11.74	68.20	Peak
4		5470.000	57.14	-1.75	55.39	-12.81	68.20	Peak
5		5492.420	60.20	47.69	107.89	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

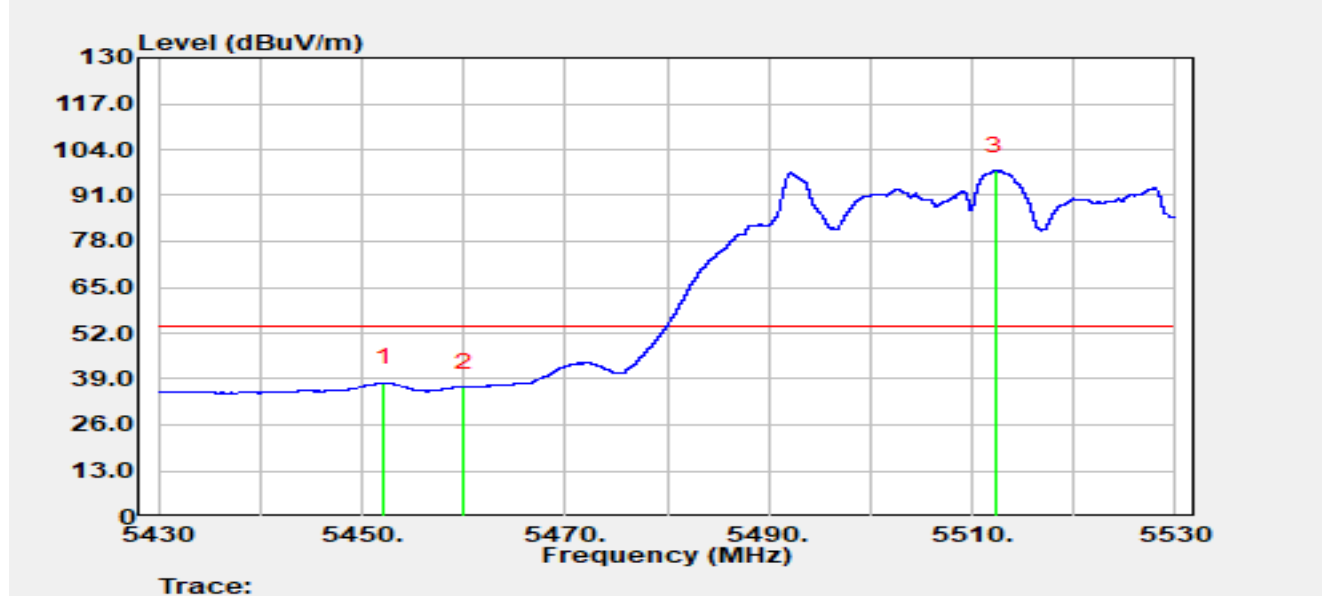


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5452.140	41.43	-3.59	37.84	-16.16	54.00	Average
2		5460.000	39.96	-3.25	36.71	-17.29	54.00	Average
3		5512.270	58.18	39.76	97.94	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

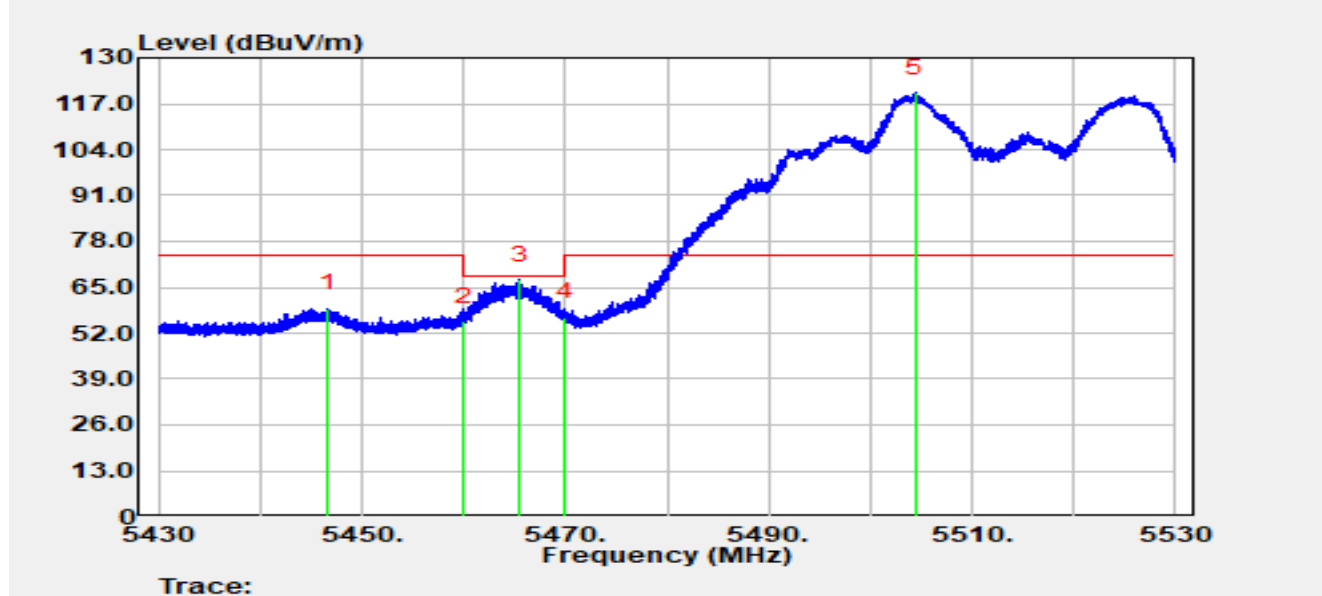


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5446.700	63.04	-3.93	59.11	-14.89	74.00	Peak
2		5460.000	58.64	-3.25	55.40	-12.80	68.20	Peak
3	*	5465.570	69.77	-2.67	67.11	-1.09	68.20	Peak
4		5470.000	58.25	-1.75	56.49	-11.71	68.20	Peak
5		5504.440	73.72	46.31	120.03	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

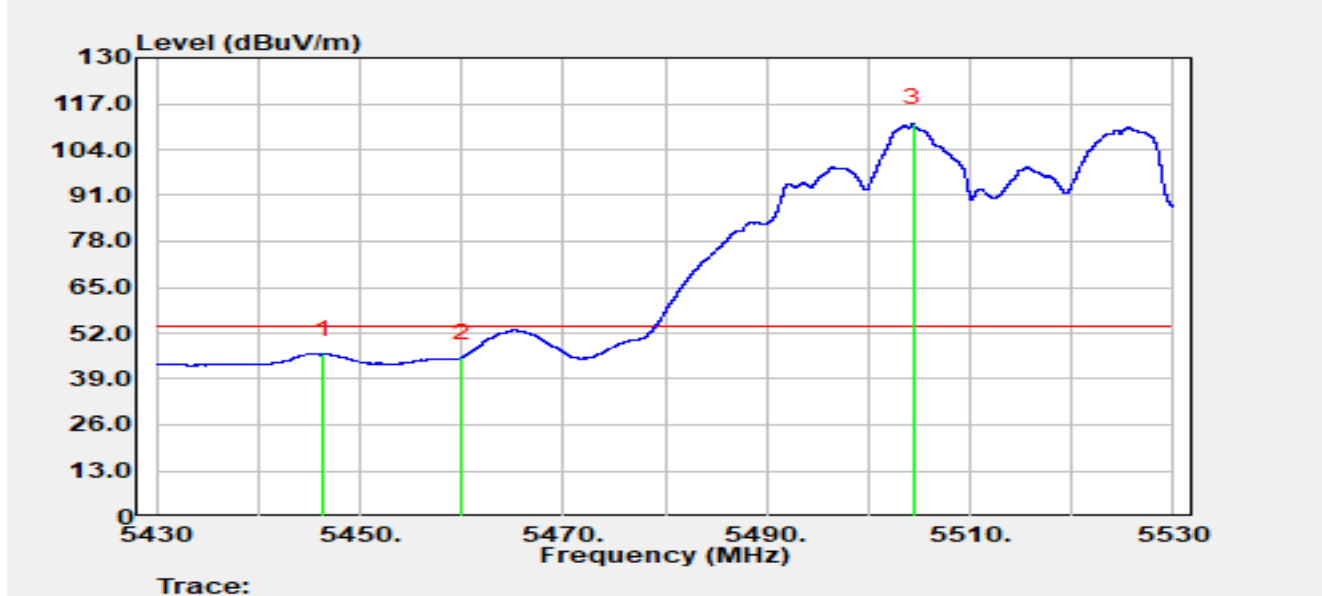


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5446.420	49.98	-3.90	46.08	-7.92	54.00	Average
2		5460.000	48.23	-3.25	44.98	-9.02	54.00	Average
3		5504.400	65.00	46.42	111.42	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5670 MHz		

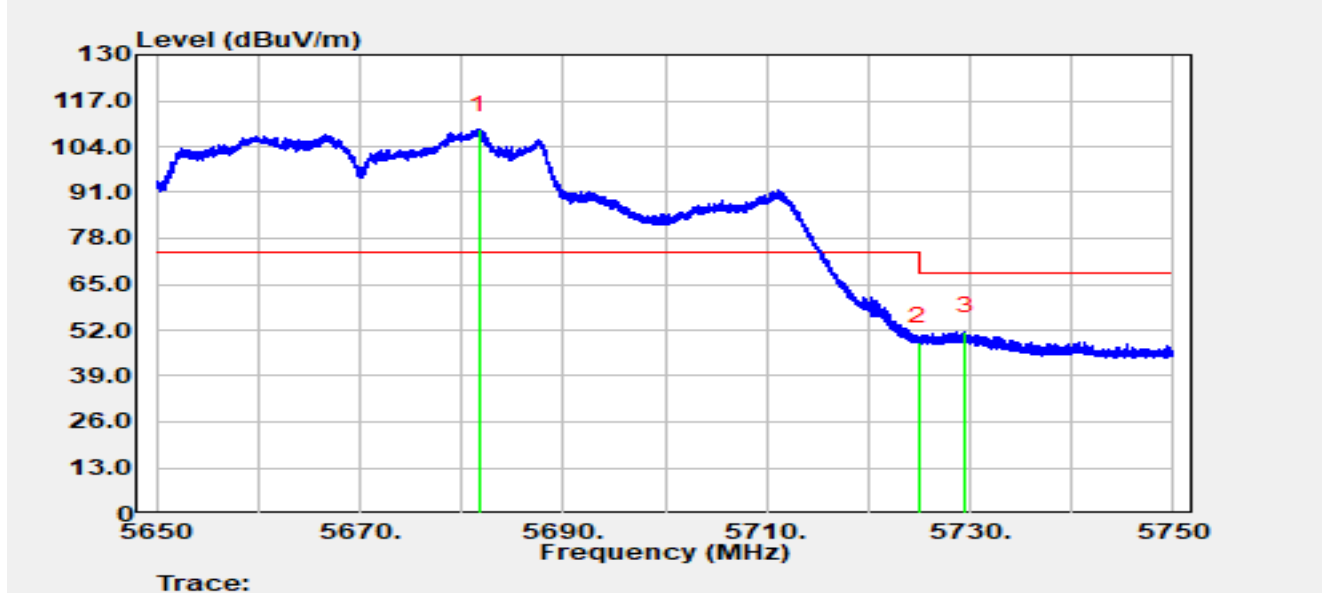


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5681.690	61.27	47.56	108.83	N/A	N/A	Peak
2		5725.000	48.34	0.39	48.73	-19.47	68.20	Peak
3	*	5729.490	52.98	-1.42	51.56	-16.64	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5670 MHz		

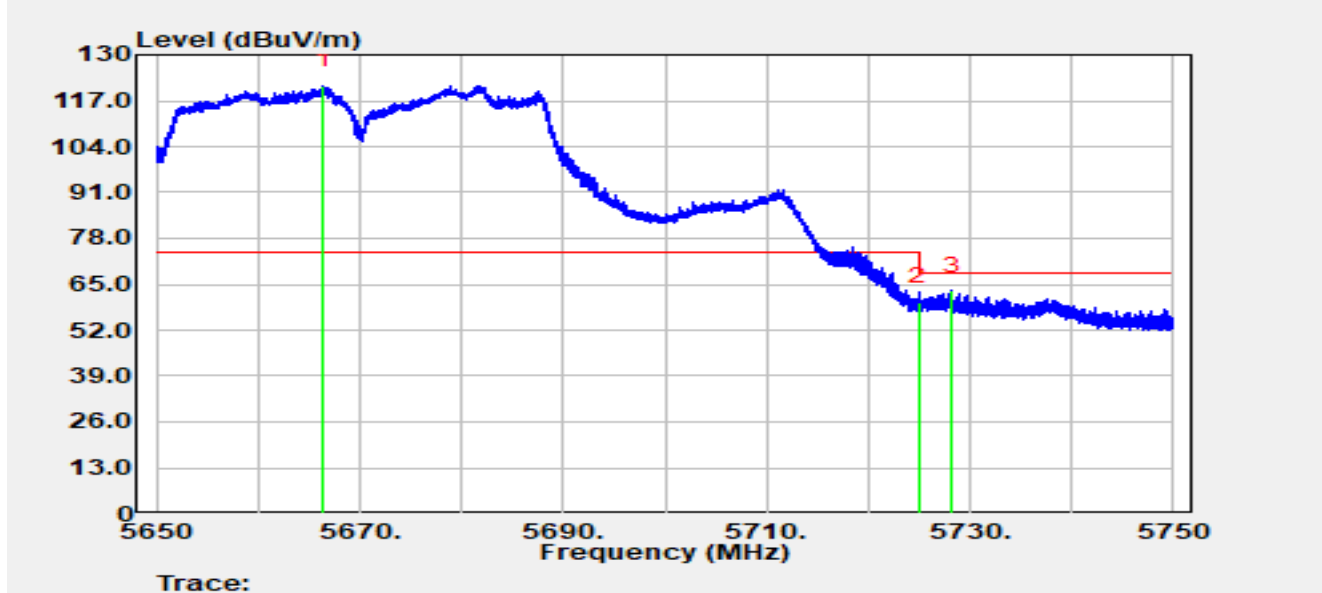


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5666.350	75.26	46.06	121.31	N/A	N/A	Peak
2		5725.000	59.46	0.39	59.85	-8.35	68.20	Peak
3	*	5728.200	64.18	-1.02	63.16	-5.04	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5755 MHz		

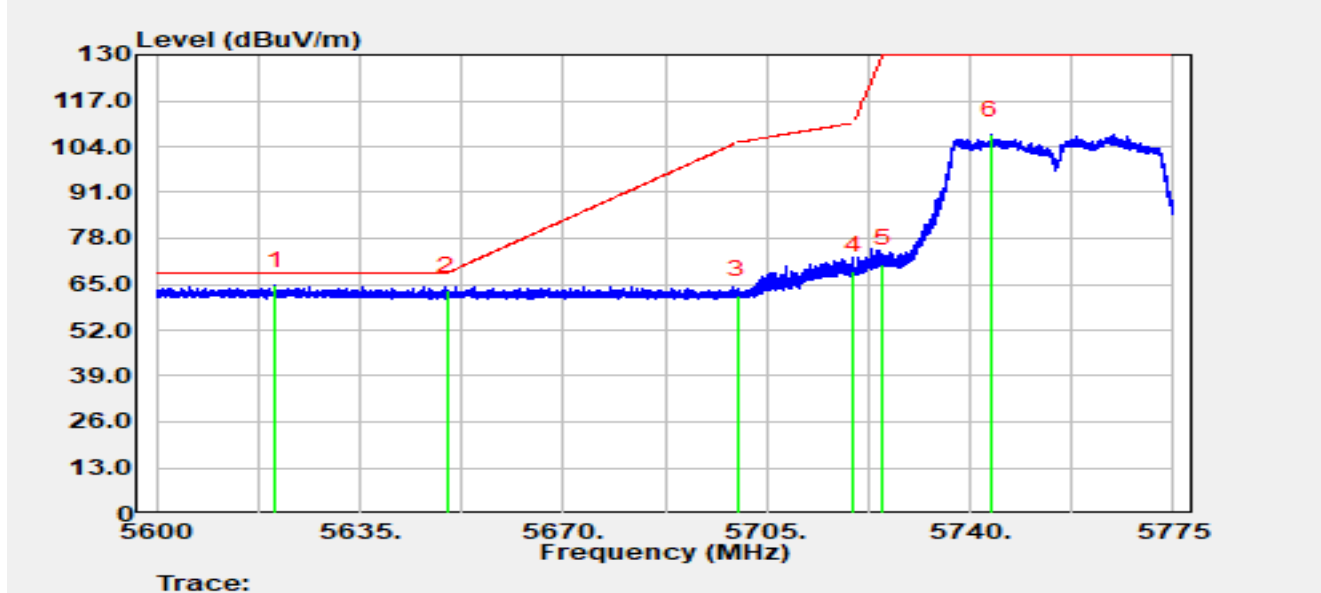


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5620.370	70.79	-6.18	64.62	-3.58	68.20	Peak
2		5650.000	69.43	-6.34	63.09	-5.11	68.20	Peak
3		5700.000	68.37	-6.38	61.99	-43.21	105.20	Peak
4		5720.000	75.24	-6.33	68.90	-41.90	110.80	Peak
5		5725.000	77.21	-6.33	70.88	-59.12	130.00	Peak
6		5743.658	113.55	-6.33	107.22	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5755 MHz		

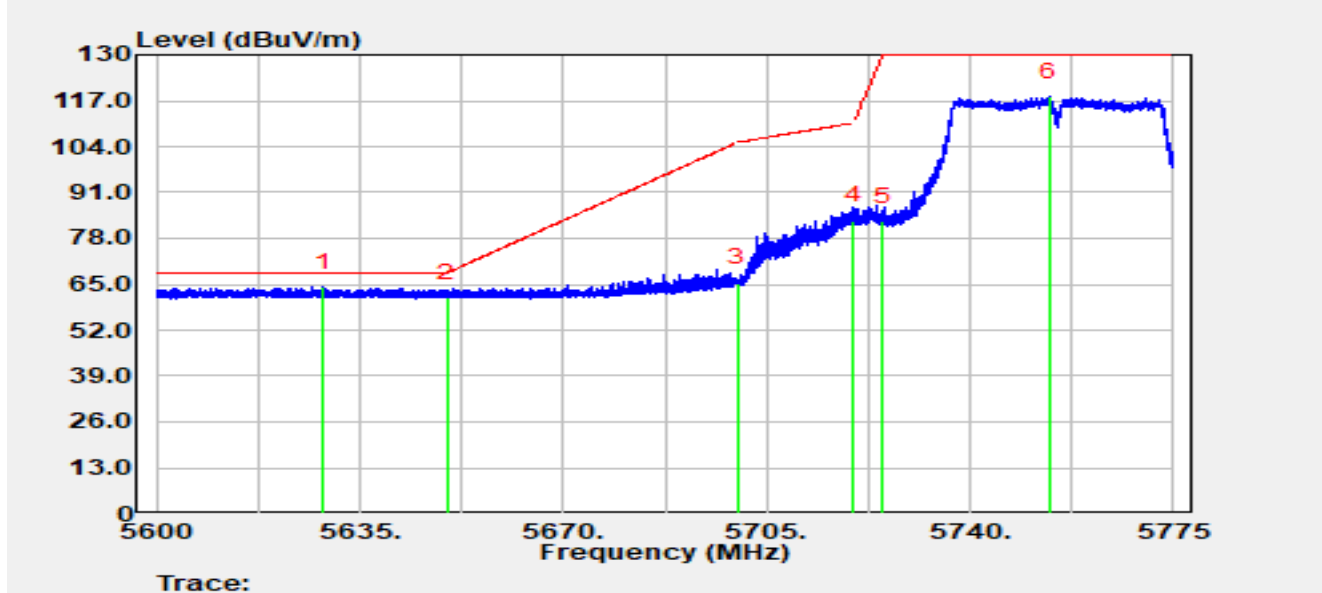


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5628.717	70.42	-6.22	64.20	-4.00	68.20	Peak
2		5650.000	67.54	-6.34	61.21	-6.99	68.20	Peak
3		5700.000	71.74	-6.38	65.35	-39.85	105.20	Peak
4		5720.000	89.35	-6.33	83.01	-27.79	110.80	Peak
5		5725.000	89.10	-6.33	82.77	-47.23	130.00	Peak
6		5753.685	124.26	-6.25	118.00	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5795 MHz		

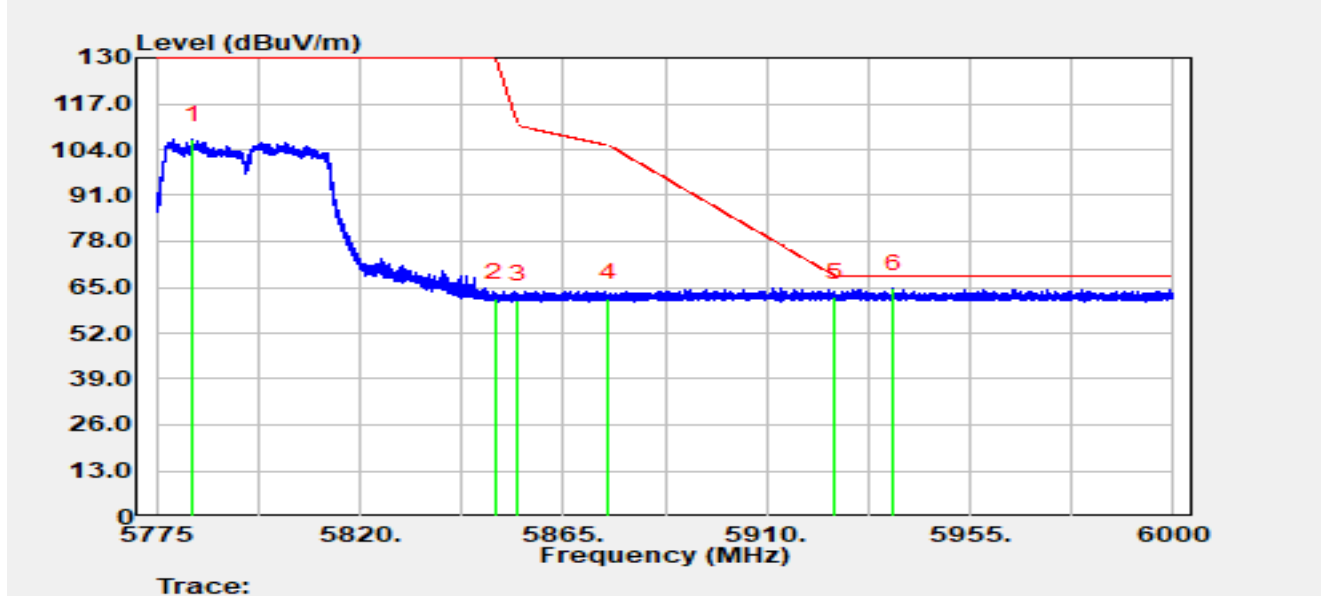


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5782.942	113.16	-6.38	106.78	N/A	N/A	Peak
2		5850.000	68.14	-6.31	61.83	-68.17	130.00	Peak
3		5855.000	67.82	-6.27	61.55	-49.25	110.80	Peak
4		5875.000	68.05	-6.24	61.81	-43.39	105.20	Peak
5		5925.000	68.14	-6.05	62.09	-6.11	68.20	Peak
6	*	5938.058	70.76	-6.12	64.63	-3.57	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5795 MHz		

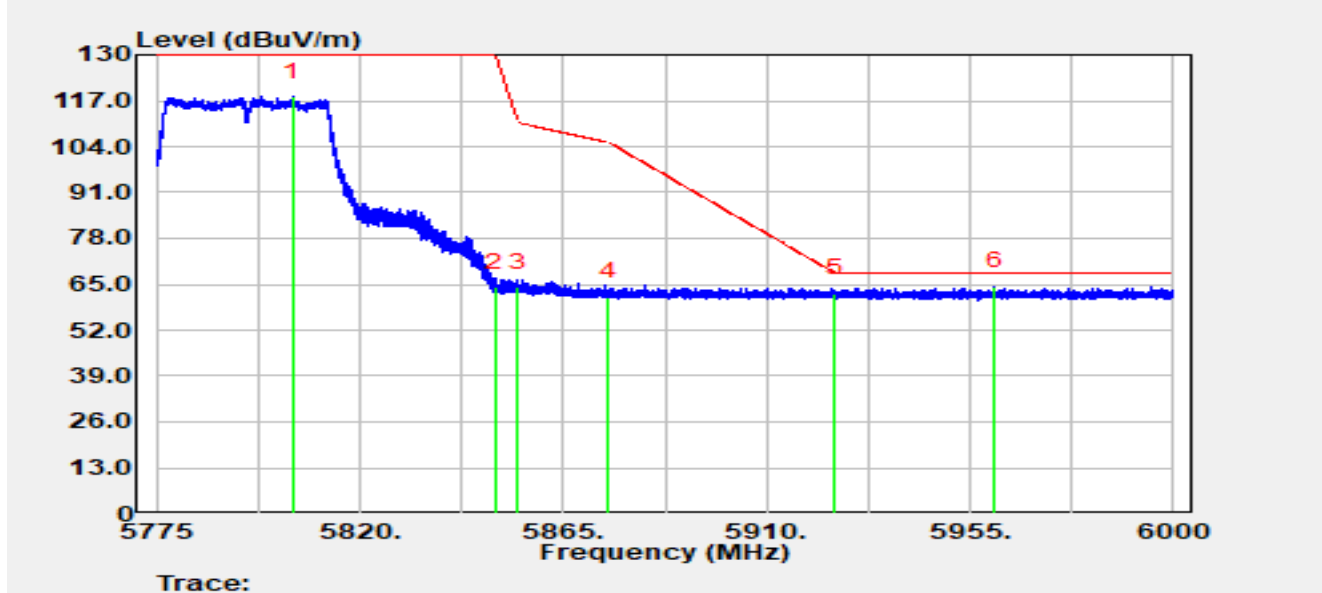


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5805.263	124.46	-6.34	118.12	N/A	N/A	Peak
2		5850.000	70.52	-6.31	64.21	-65.79	130.00	Peak
3		5855.000	70.32	-6.27	64.06	-46.74	110.80	Peak
4		5875.000	67.80	-6.24	61.56	-43.64	105.20	Peak
5		5925.000	68.55	-6.05	62.50	-5.70	68.20	Peak
6	*	5960.535	70.56	-6.10	64.46	-3.74	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5210 MHz		

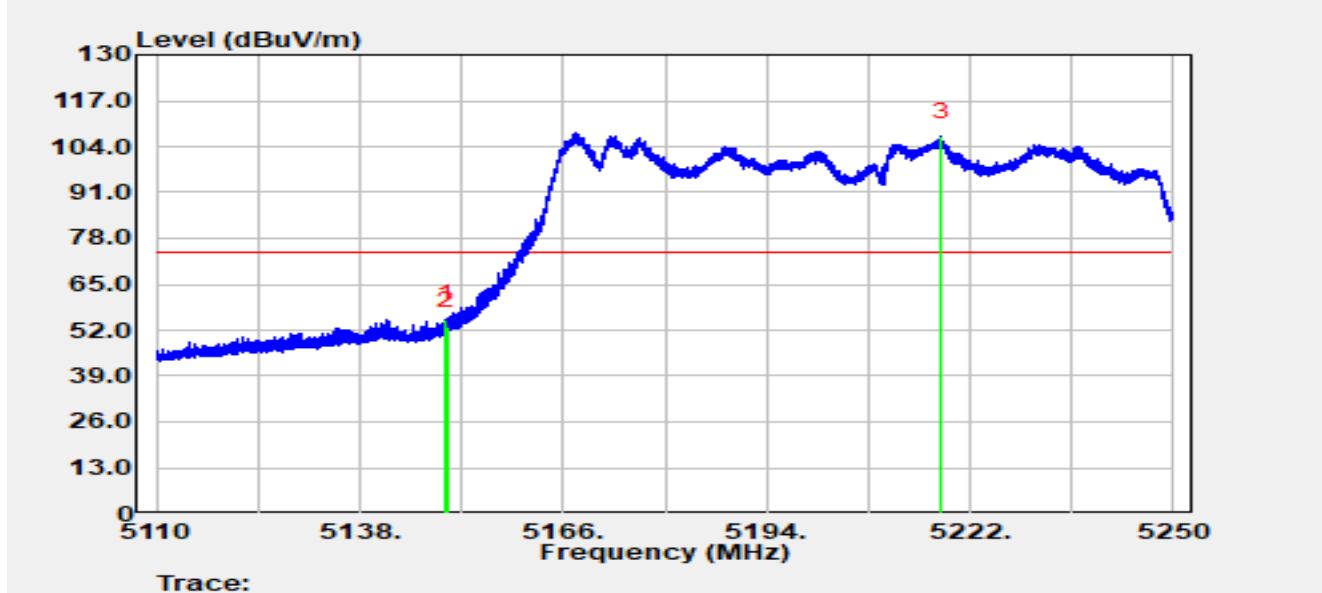


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.746	56.24	-1.06	55.18	-18.82	74.00	Peak
2		5150.000	53.99	-0.99	53.00	-21.00	74.00	Peak
3		5217.968	58.42	48.37	106.79	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5210 MHz		

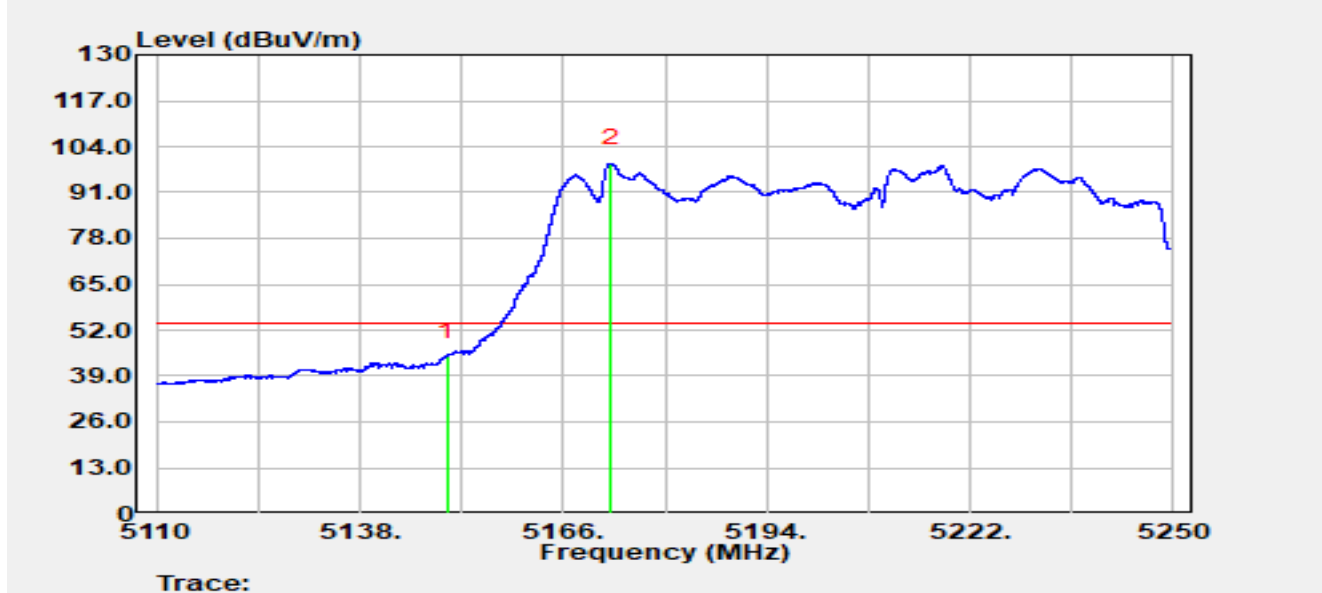


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	45.59	-0.99	44.60	-9.40	54.00	Average
2		5172.566	46.01	53.27	99.28	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5210 MHz		

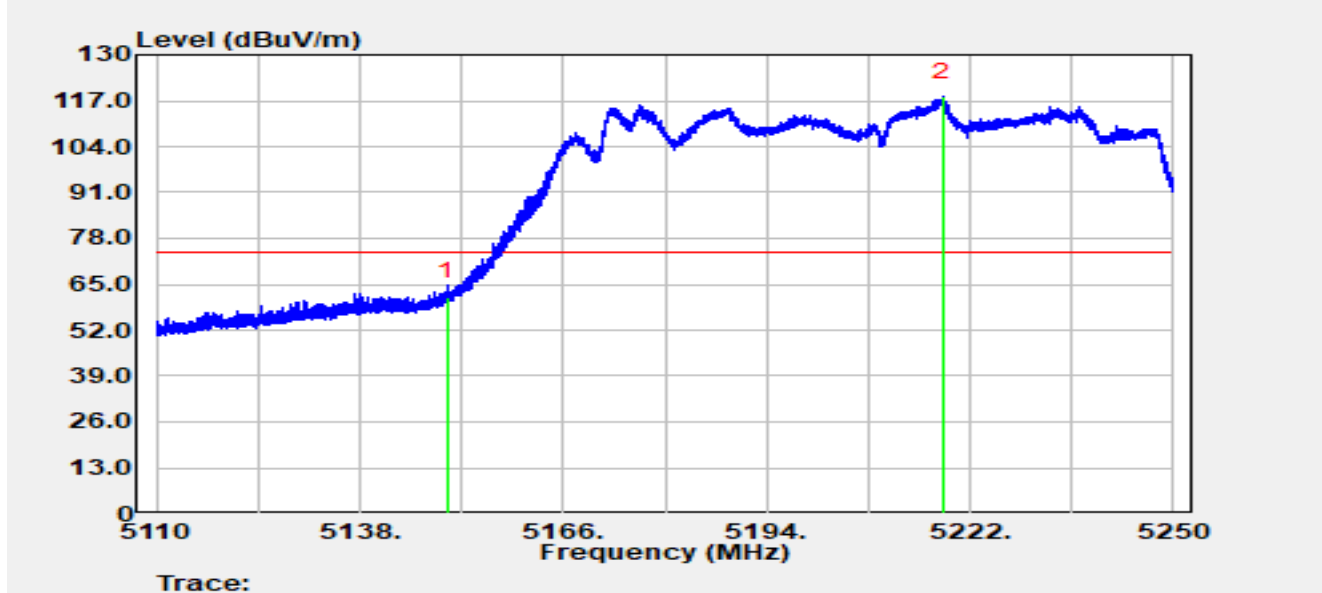


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5150.000	62.52	-0.99	61.53	-12.47	74.00	Peak
2		5218.290	68.86	49.25	118.11	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5210 MHz		

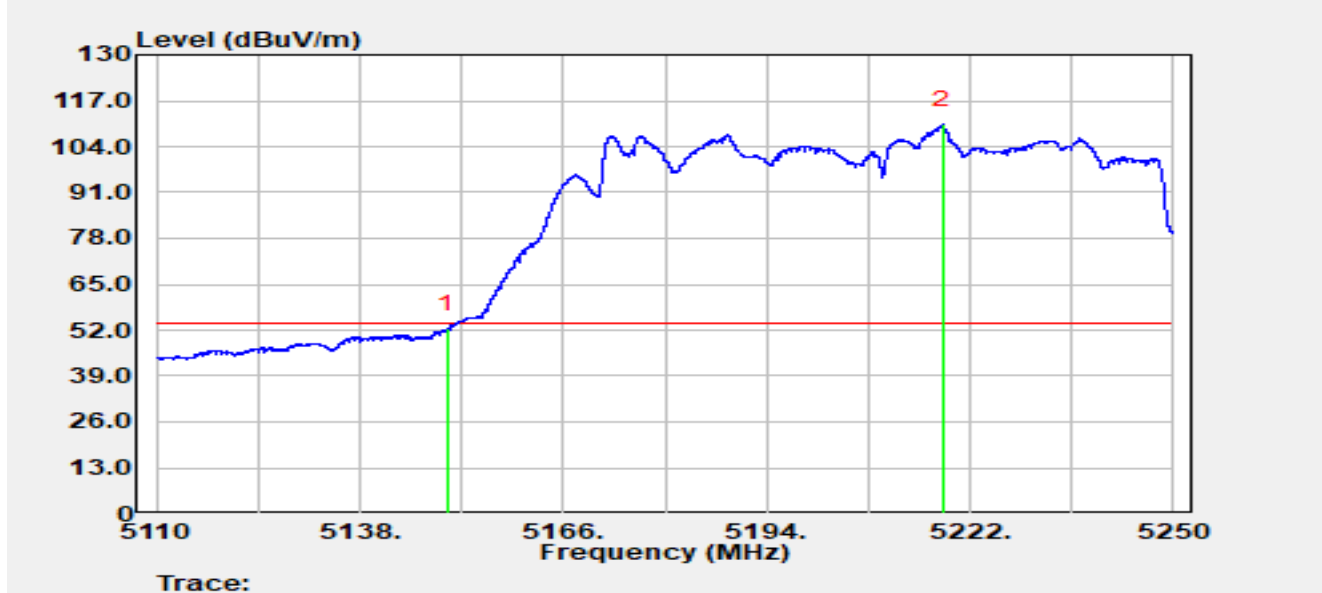


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	53.38	-0.99	52.39	-1.61	54.00	Average
2		5218.276	60.93	49.22	110.15	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5290 MHz		

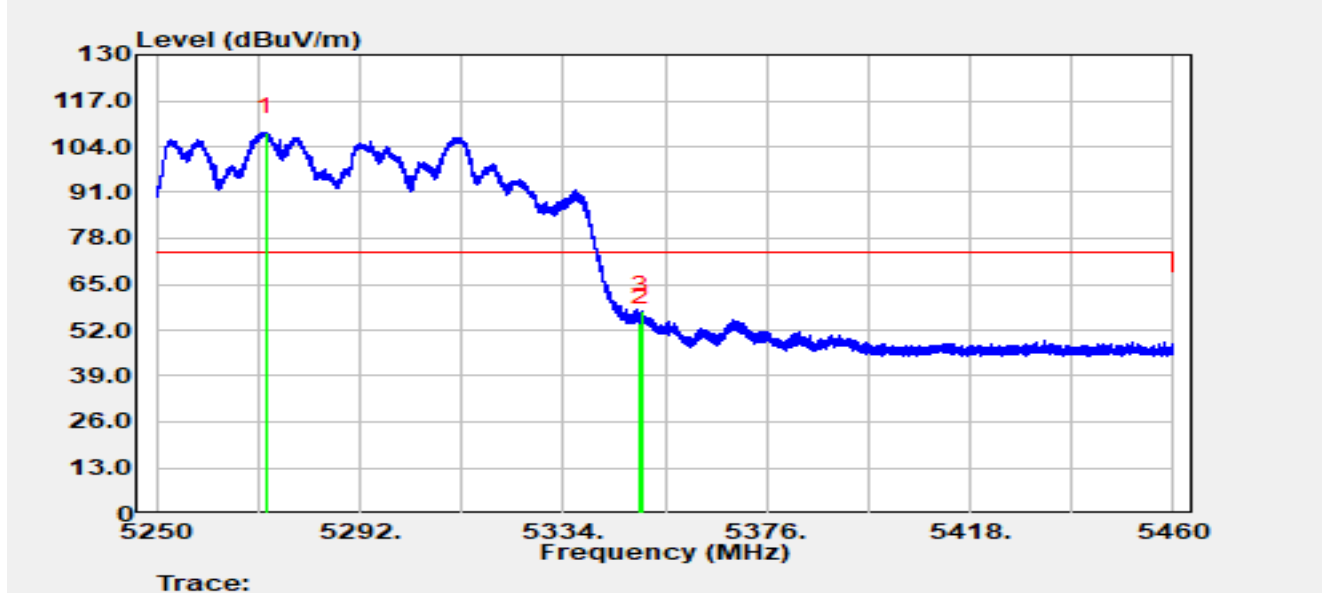


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5272.533	67.45	40.62	108.07	N/A	N/A	Peak
2		5350.000	54.01	0.19	54.19	-19.81	74.00	Peak
3	*	5350.128	57.36	0.09	57.45	-16.55	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5290 MHz		

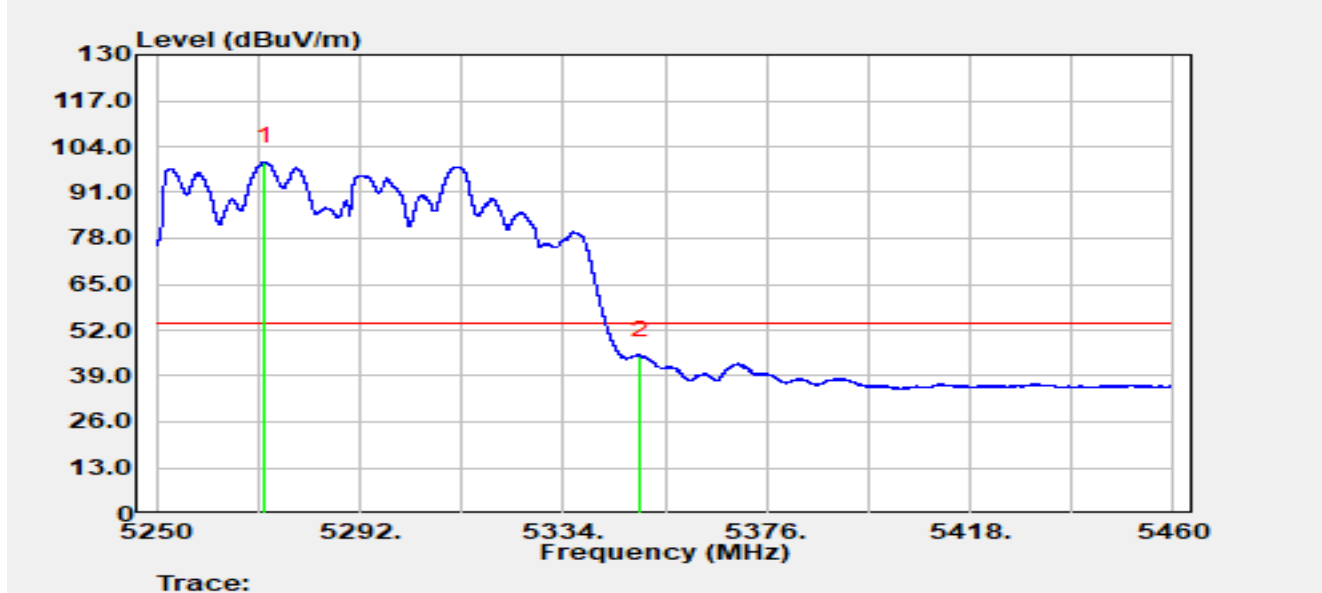


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		5272.407	59.02	40.61	99.64	N/A	N/A	Average
2	*	5350.000	44.69	0.19	44.88	-9.12	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5290 MHz		

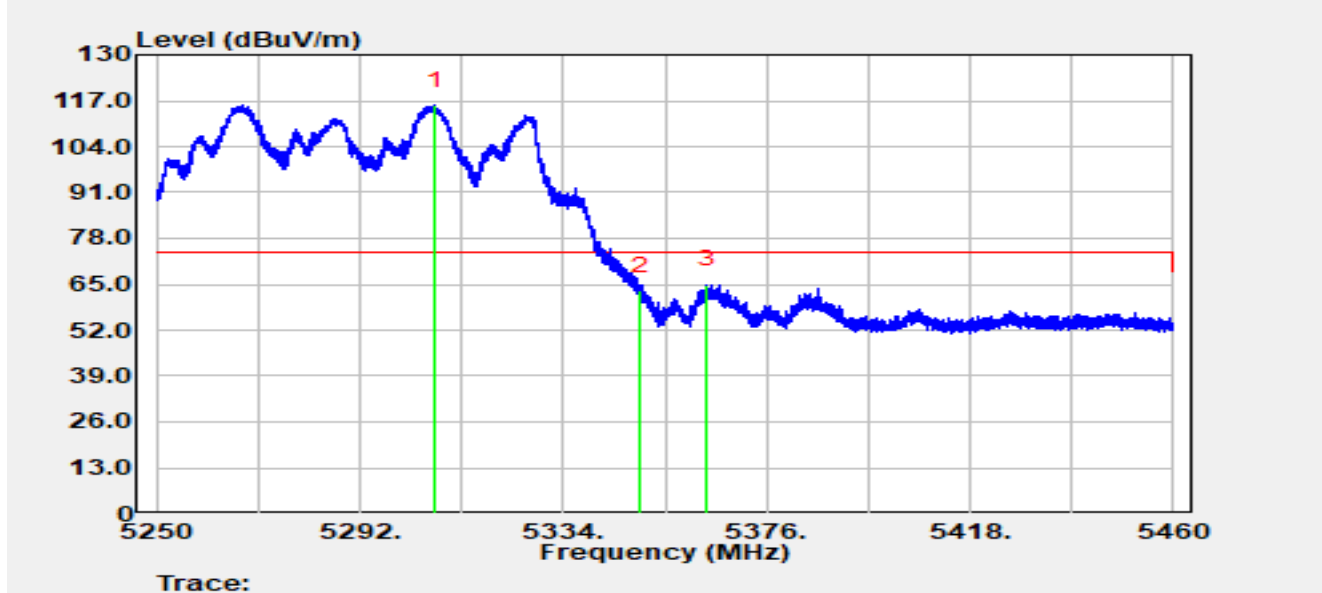


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5307.540	74.00	41.66	115.66	N/A	N/A	Peak
2		5350.000	63.04	0.19	63.22	-10.78	74.00	Peak
3	*	5363.673	67.70	-2.71	64.99	-9.01	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5290 MHz		

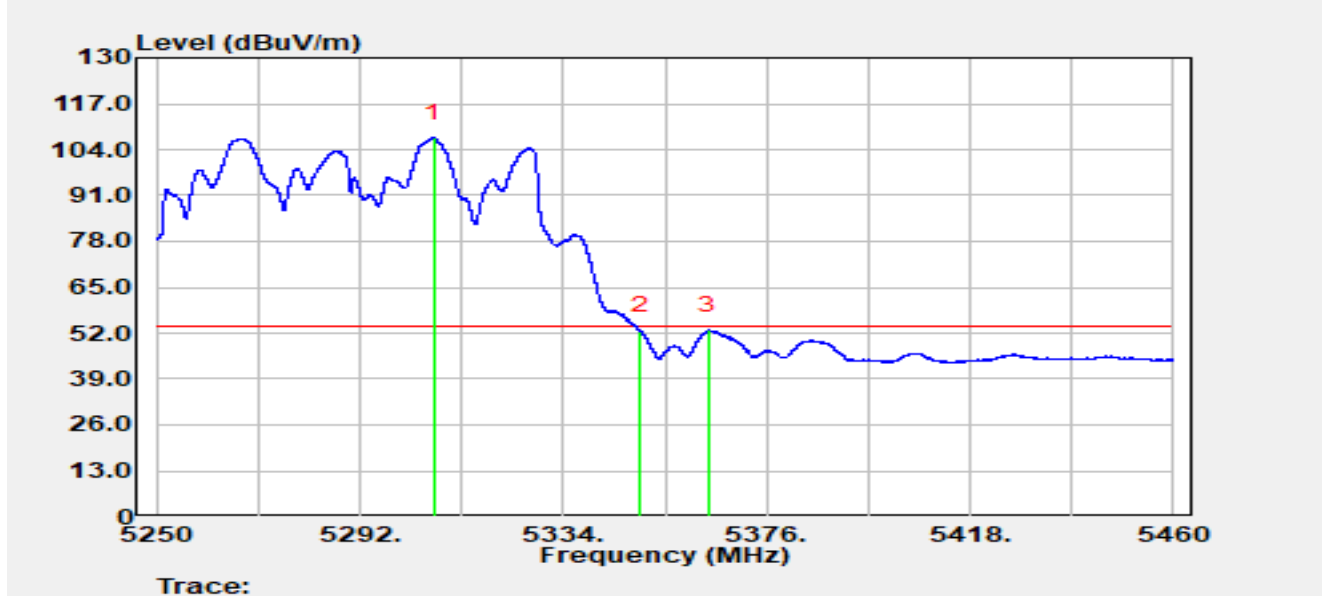


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		5307.288	65.72	41.52	107.24	N/A	N/A	Average
2		5350.000	52.31	0.19	52.49	-1.51	54.00	Average
3	*	5363.841	55.49	-2.74	52.74	-1.26	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

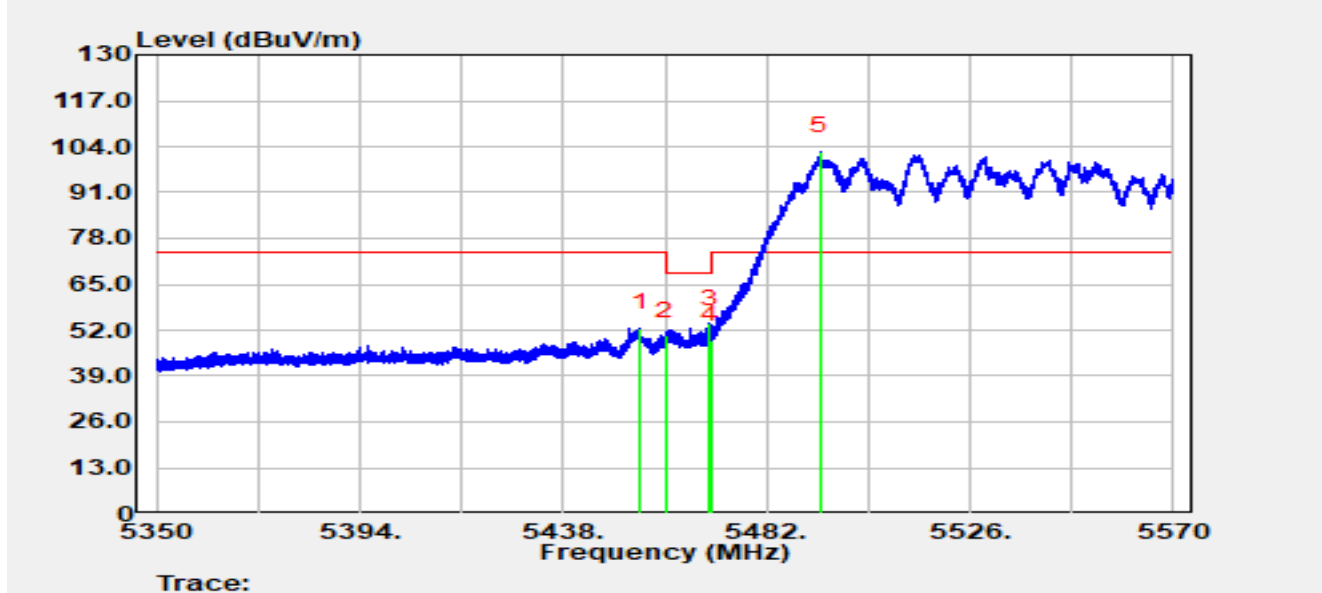


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5454.698	56.18	-3.57	52.61	-21.39	74.00	Peak
2		5460.000	53.62	-3.25	50.38	-17.82	68.20	Peak
3	*	5469.548	55.63	-1.73	53.90	-14.30	68.20	Peak
4		5470.000	50.97	-1.75	49.22	-18.98	68.20	Peak
5		5493.594	53.88	48.66	102.53	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

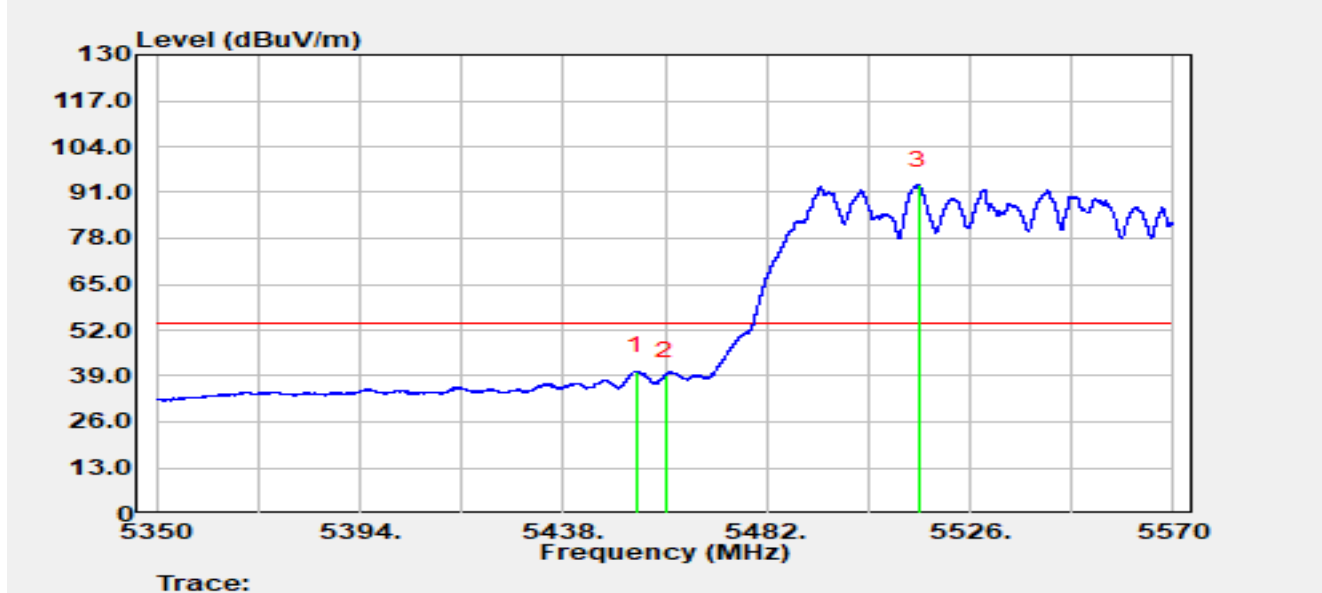


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5453.884	43.96	-3.57	40.39	-13.61	54.00	Average
2		5460.000	42.35	-3.25	39.10	-14.90	54.00	Average
3		5514.780	50.01	43.04	93.05	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

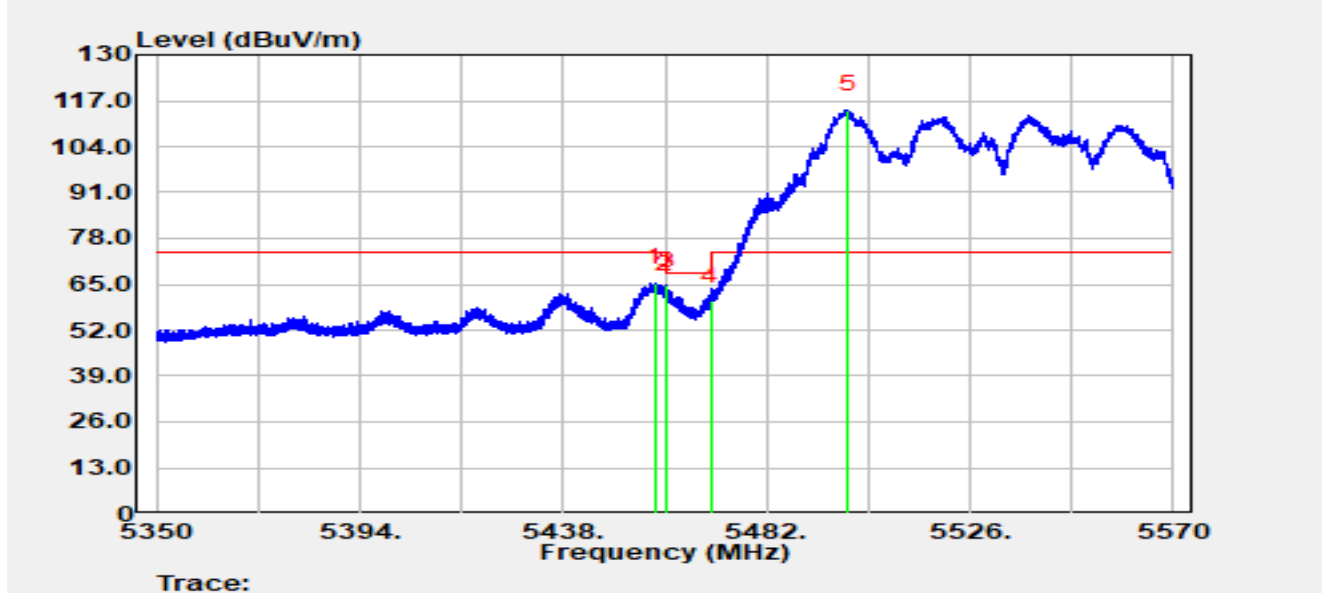


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.866	68.79	-3.35	65.44	-8.56	74.00	Peak
2		5460.000	66.91	-3.25	63.66	-4.54	68.20	Peak
3	*	5460.418	67.70	-3.12	64.58	-3.62	68.20	Peak
4		5470.000	62.03	-1.75	60.27	-7.93	68.20	Peak
5		5499.490	73.37	41.16	114.53	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

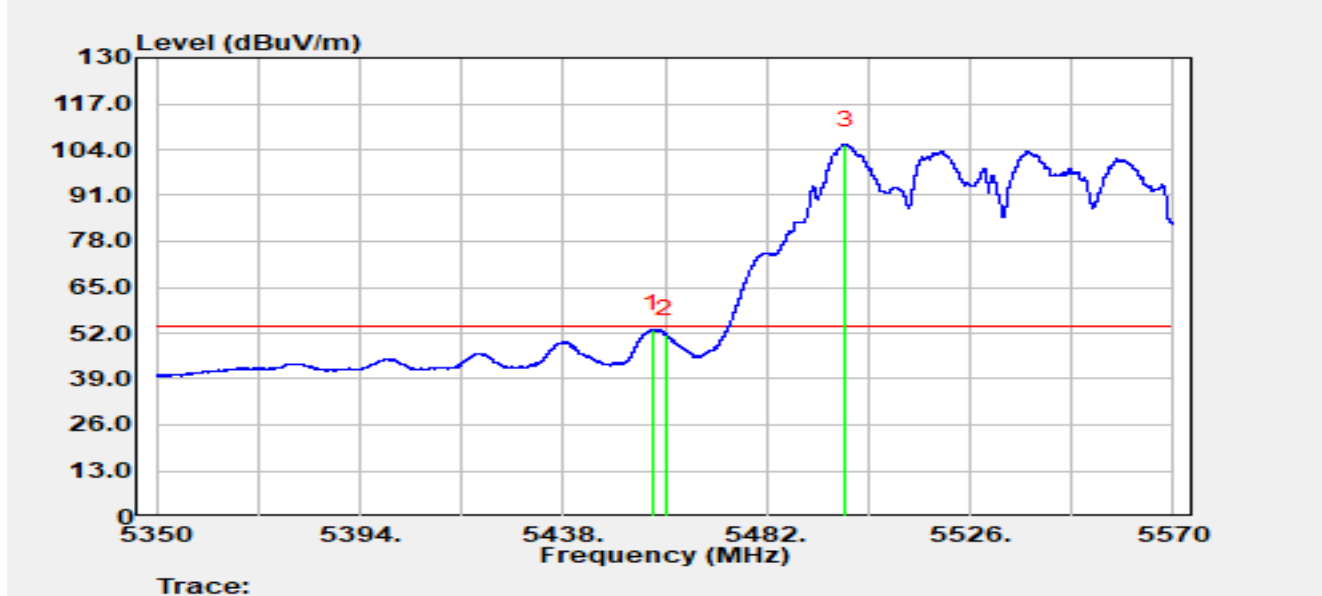


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5457.316	56.53	-3.37	53.16	-0.84	54.00	Average
2		5460.000	54.89	-3.25	51.65	-2.35	54.00	Average
3		5499.116	64.08	41.36	105.44	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5610 MHz		

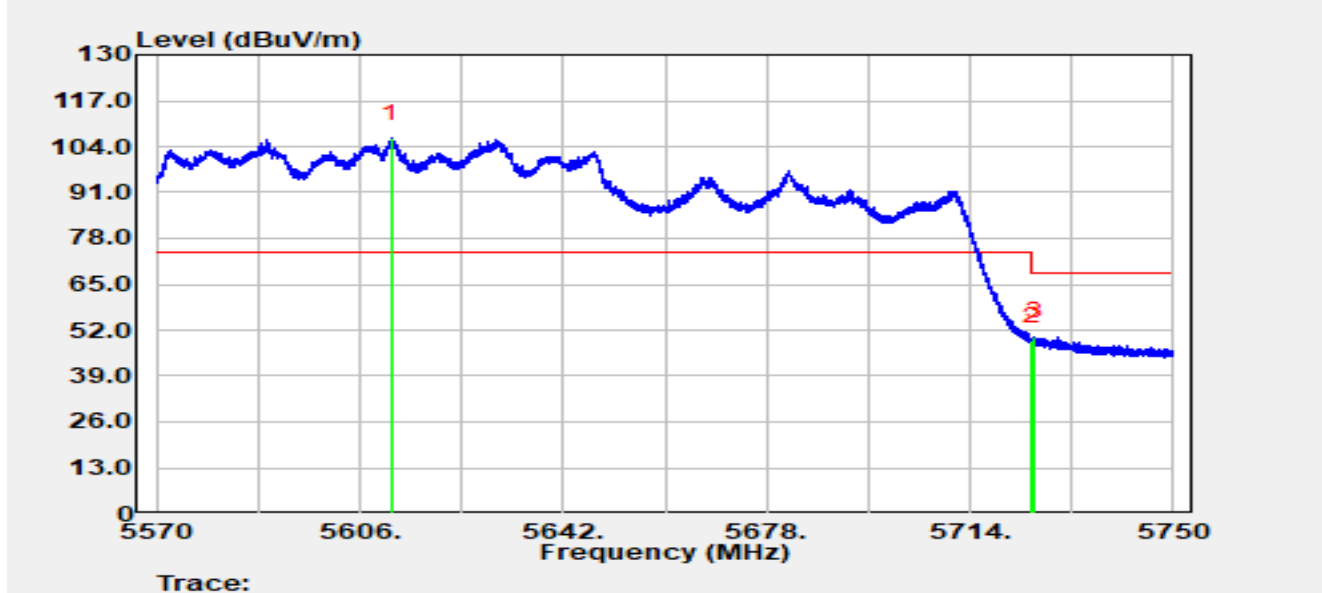


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5611.526	56.77	49.63	106.40	N/A	N/A	Peak
2		5725.000	48.47	0.39	48.86	-19.34	68.20	Peak
3	*	5725.412	49.98	0.14	50.12	-18.08	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5610 MHz		

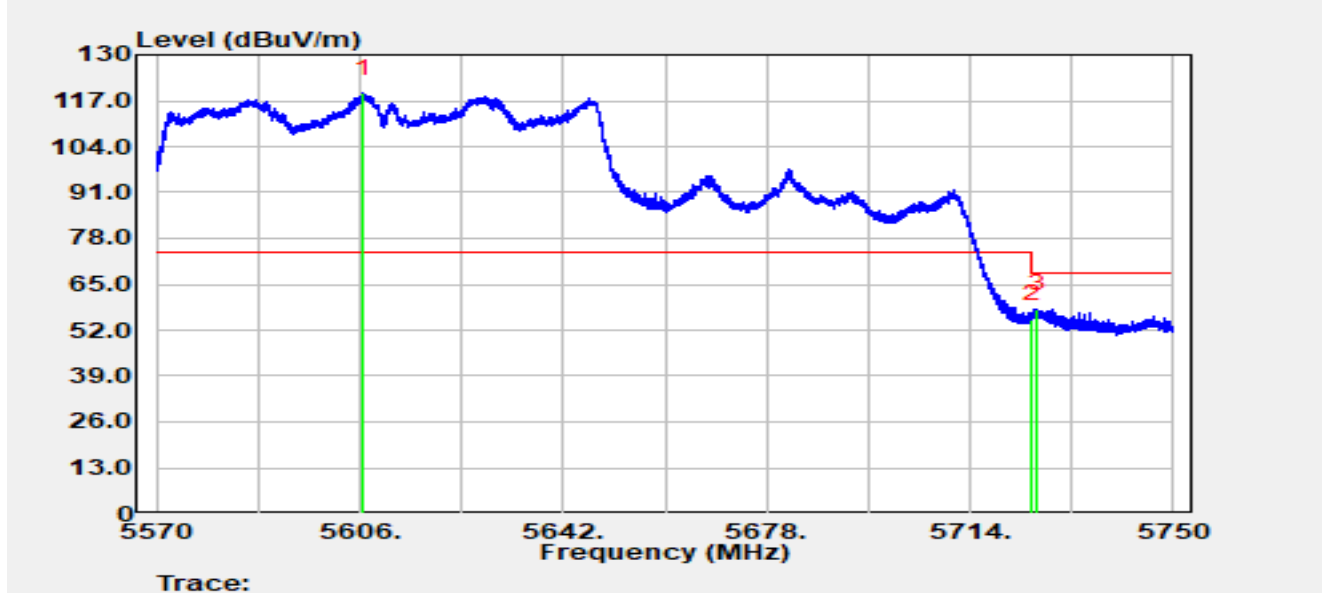


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5606.540	76.83	42.33	119.15	N/A	N/A	Peak
2		5725.000	54.56	0.39	54.95	-13.25	68.20	Peak
3	*	5725.826	58.17	-0.05	58.11	-10.09	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5775 MHz		

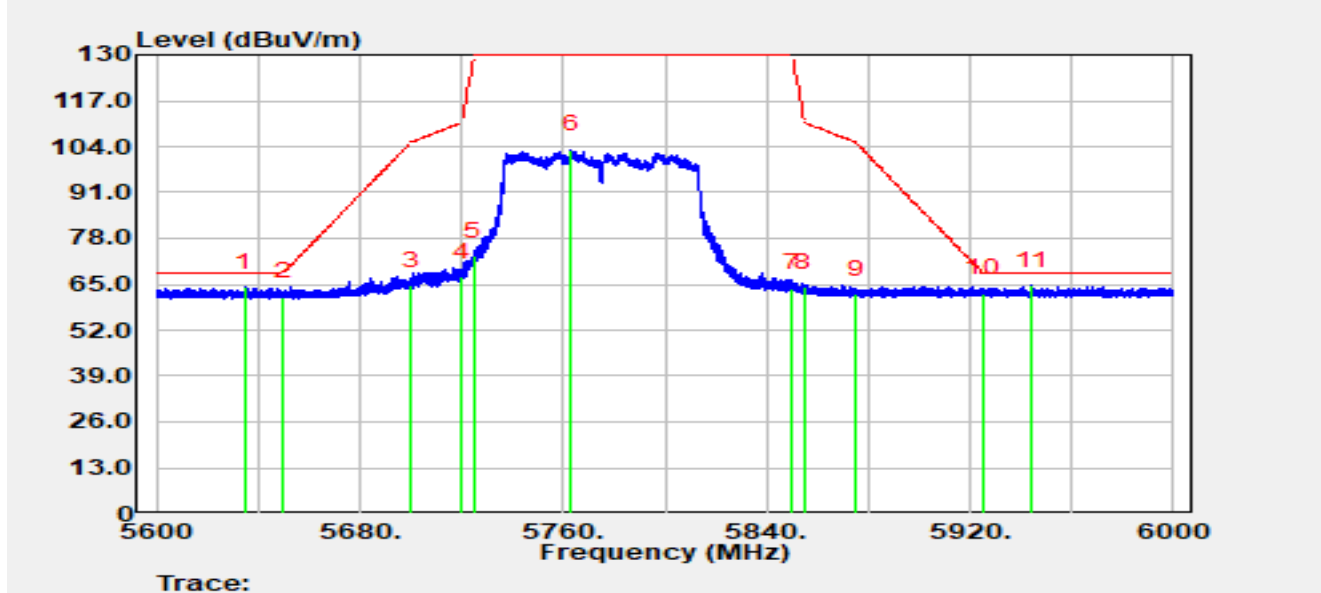


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5634.600	70.29	-6.27	64.03	-4.17	68.20	Peak
2		5650.000	67.75	-6.34	61.41	-6.79	68.20	Peak
3		5700.000	71.12	-6.38	64.74	-40.46	105.20	Peak
4		5720.000	73.38	-6.33	67.05	-43.75	110.80	Peak
5		5725.000	79.24	-6.33	72.91	-57.09	130.00	Peak
6		5763.080	109.43	-6.24	103.19	N/A	N/A	Peak
7		5850.000	70.28	-6.31	63.97	-66.03	130.00	Peak
8		5855.000	70.41	-6.27	64.14	-46.66	110.80	Peak
9		5875.000	68.44	-6.24	62.21	-42.99	105.20	Peak
10		5925.000	68.47	-6.05	62.42	-5.78	68.20	Peak
11	*	5944.280	70.81	-6.20	64.60	-3.60	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5775 MHz		

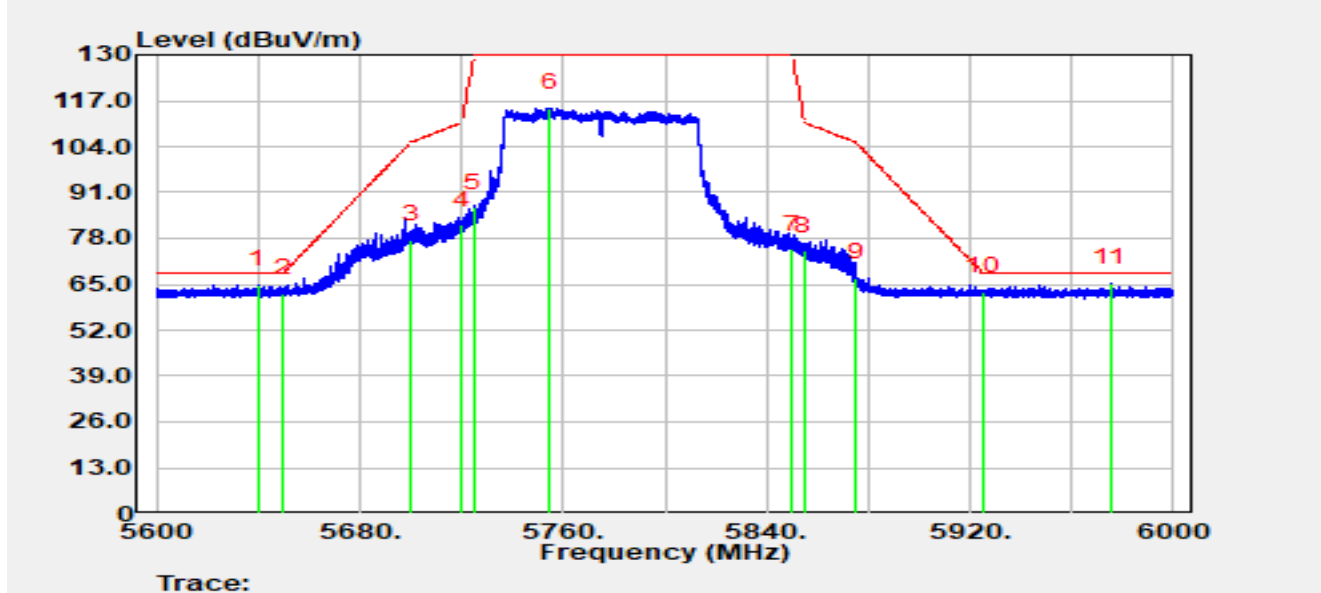


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5640.000	71.20	-6.31	64.89	-3.31	68.20	Peak
2		5650.000	68.70	-6.34	62.36	-5.84	68.20	Peak
3		5700.000	84.10	-6.38	77.72	-27.48	105.20	Peak
4		5720.000	88.04	-6.33	81.70	-29.10	110.80	Peak
5		5725.000	93.07	-6.33	86.74	-43.26	130.00	Peak
6		5754.800	121.18	-6.24	114.93	N/A	N/A	Peak
7		5850.000	81.33	-6.31	75.02	-54.98	130.00	Peak
8		5855.000	80.72	-6.27	74.45	-36.35	110.80	Peak
9		5875.000	73.03	-6.24	66.79	-38.41	105.20	Peak
10		5925.000	68.91	-6.05	62.86	-5.34	68.20	Peak
11	*	5975.120	71.37	-6.05	65.32	-2.88	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT160 at 5250 MHz		

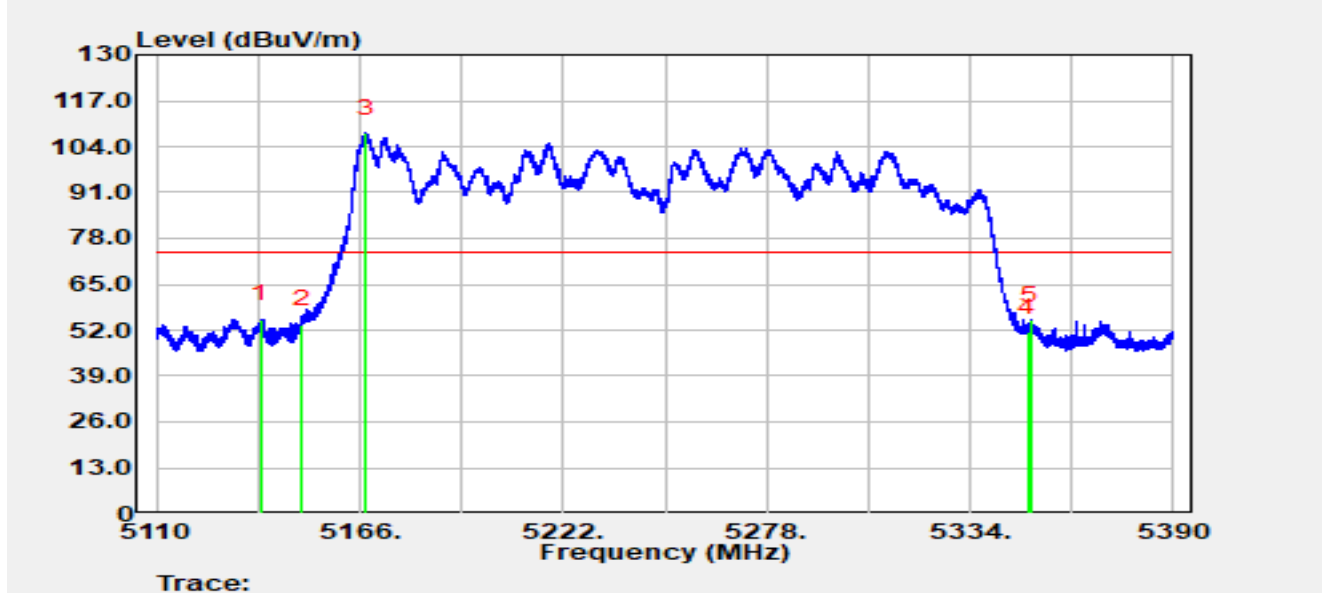


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5138.840	57.15	-2.02	55.14	-18.86	74.00	Peak
2		5150.000	54.63	-0.99	53.64	-20.36	74.00	Peak
3		5167.652	48.76	58.95	107.71	N/A	N/A	Peak
4		5350.000	51.27	0.19	51.45	-22.55	74.00	Peak
5		5350.828	55.15	-0.30	54.84	-19.16	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT160 at 5250 MHz		

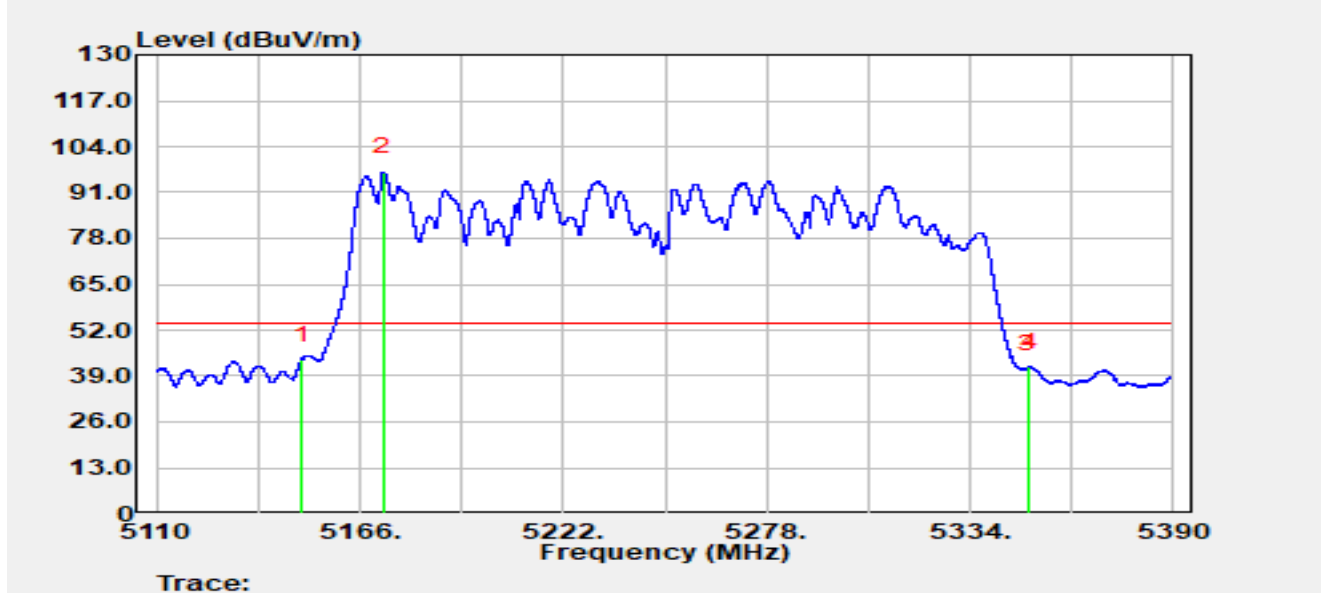


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	44.55	-0.99	43.56	-10.44	54.00	Average
2		5172.468	43.58	53.19	96.77	N/A	N/A	Average
3		5350.000	41.00	0.19	41.19	-12.81	54.00	Average
4		5350.324	41.70	-0.06	41.64	-12.36	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT160 at 5250 MHz		

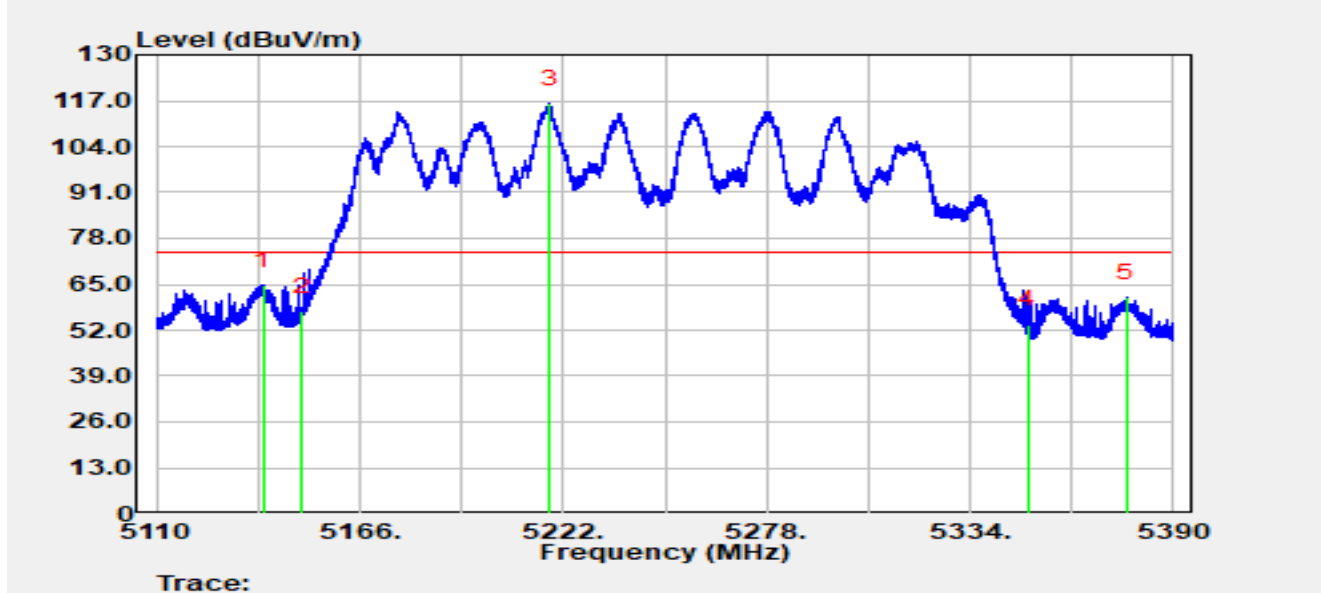


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5139.372	66.56	-1.98	64.58	-9.42	74.00	Peak
2		5150.000	58.20	-0.99	57.21	-16.79	74.00	Peak
3		5218.220	67.14	49.06	116.20	N/A	N/A	Peak
4		5350.000	53.33	0.19	53.52	-20.48	74.00	Peak
5		5377.148	64.59	-3.30	61.29	-12.71	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT160 at 5250 MHz		

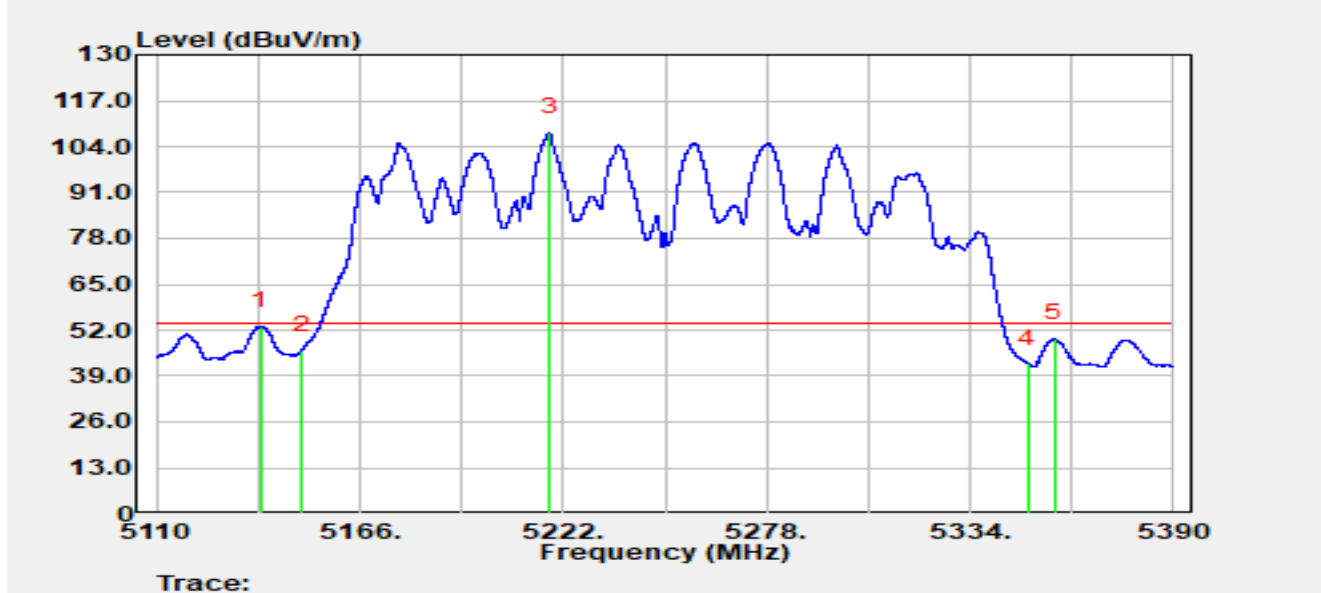


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5138.700	55.26	-2.04	53.22	-0.78	54.00	Average
2		5150.000	47.19	-0.99	46.20	-7.80	54.00	Average
3		5218.304	58.76	49.27	108.03	N/A	N/A	Average
4		5350.000	42.26	0.19	42.44	-11.56	54.00	Average
5		5357.380	51.78	-2.11	49.67	-4.33	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

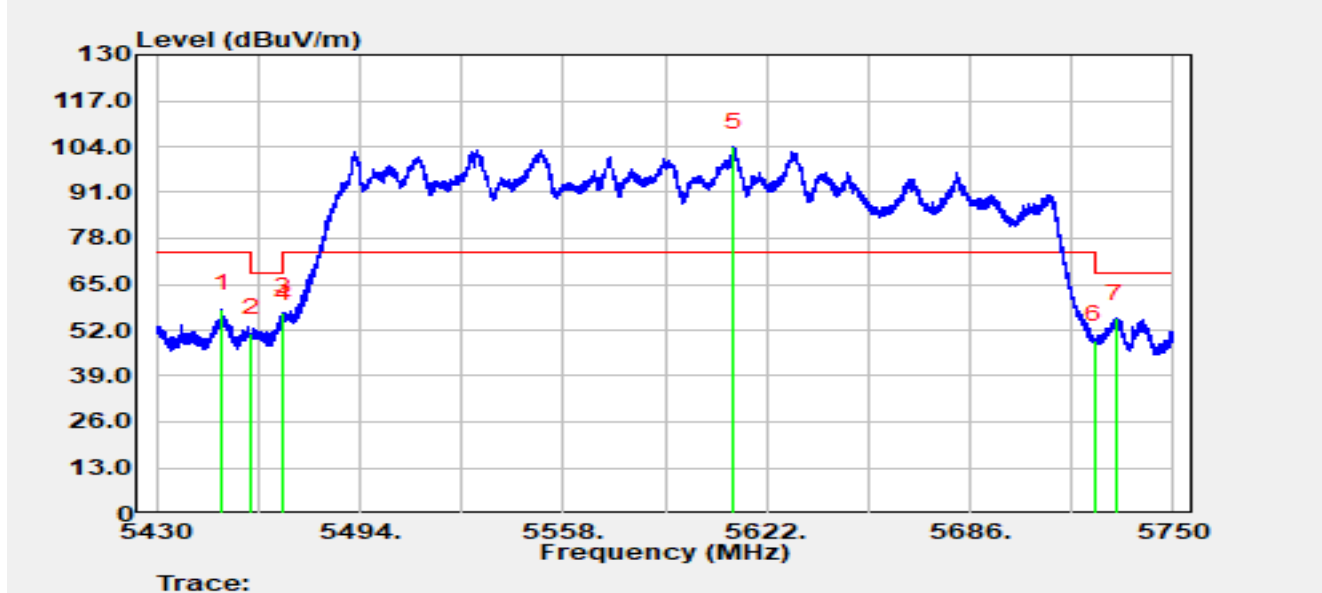


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5450.544	61.80	-3.89	57.91	-16.09	74.00	Peak
2		5460.000	54.44	-3.25	51.19	-17.01	68.20	Peak
3	*	5469.744	58.87	-1.73	57.14	-11.06	68.20	Peak
4		5470.000	56.94	-1.75	55.19	-13.01	68.20	Peak
5		5611.632	54.01	49.91	103.92	N/A	N/A	Peak
6		5725.000	48.87	0.39	49.26	-18.94	68.20	Peak
7		5731.728	57.23	-1.91	55.31	-12.89	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

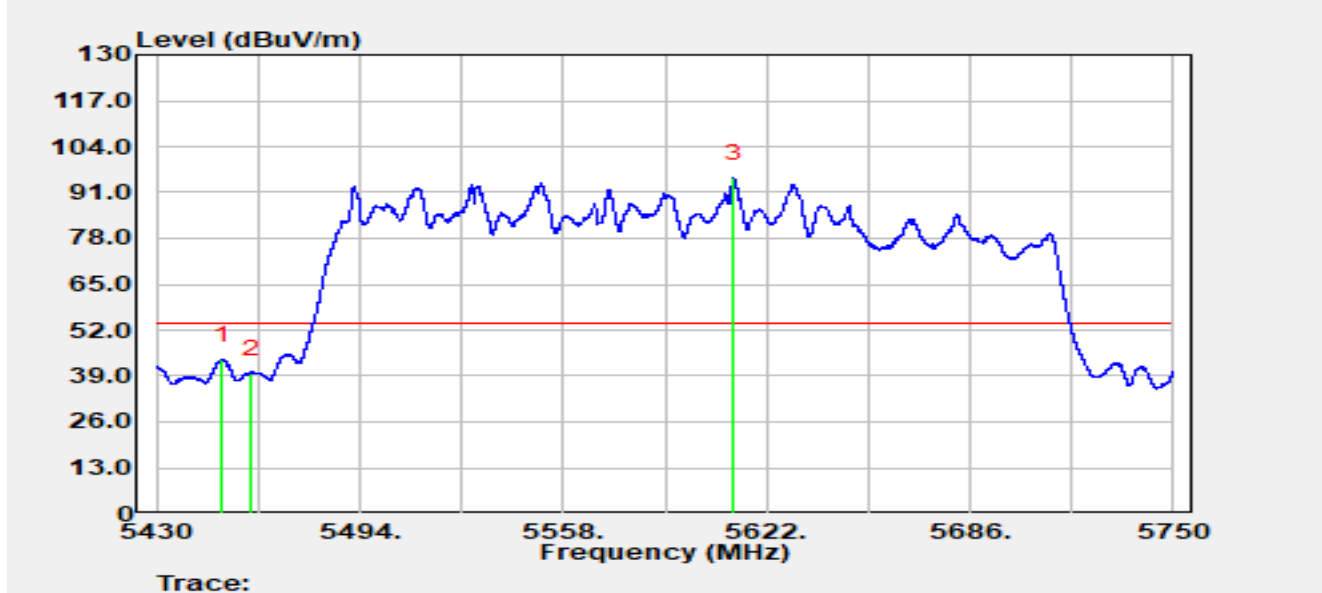


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5450.768	47.51	-3.91	43.60	-10.40	54.00	Average
2		5460.000	42.86	-3.25	39.61	-14.39	54.00	Average
3		5611.600	45.18	49.94	95.12	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

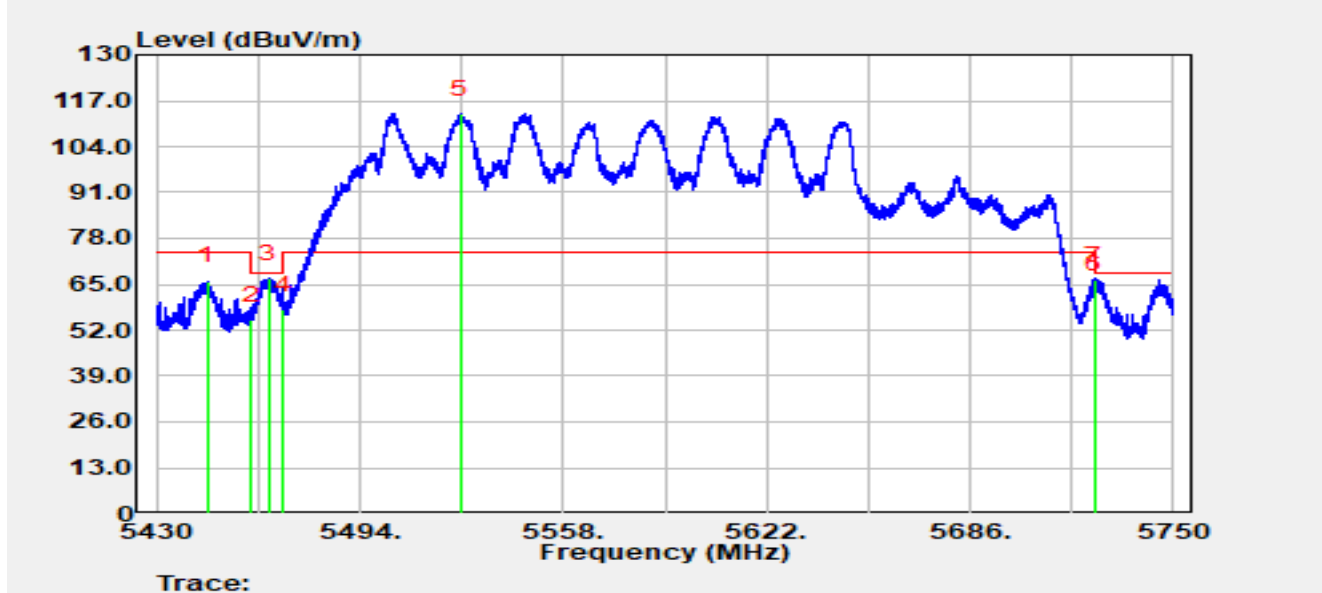


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5445.872	69.87	-4.06	65.80	-8.20	74.00	Peak
2		5460.000	58.14	-3.25	54.89	-13.31	68.20	Peak
3	*	5465.136	69.18	-2.59	66.59	-1.61	68.20	Peak
4		5470.000	59.49	-1.75	57.74	-10.46	68.20	Peak
5		5525.552	71.34	41.94	113.28	N/A	N/A	Peak
6		5725.000	62.90	0.39	63.29	-4.91	68.20	Peak
7		5725.360	66.06	0.14	66.20	-2.00	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

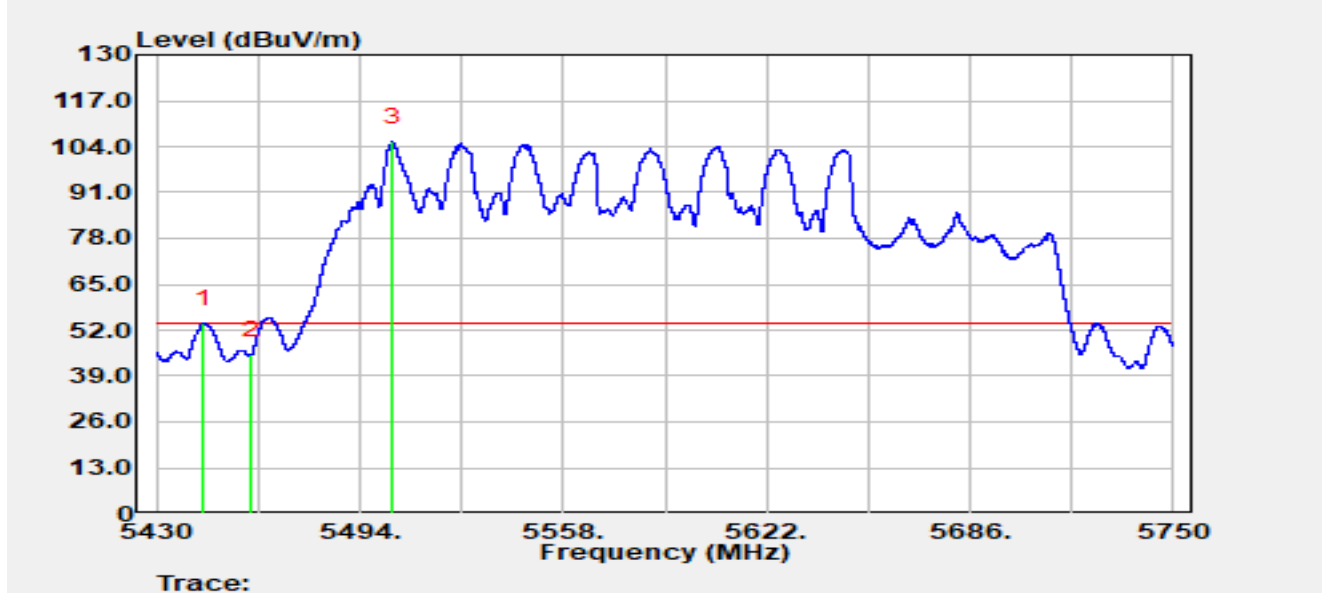


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5444.624	57.61	-3.84	53.78	-0.22	54.00	Average
2		5460.000	48.24	-3.25	45.00	-9.00	54.00	Average
3		5504.400	58.83	46.42	105.25	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5180 MHz		

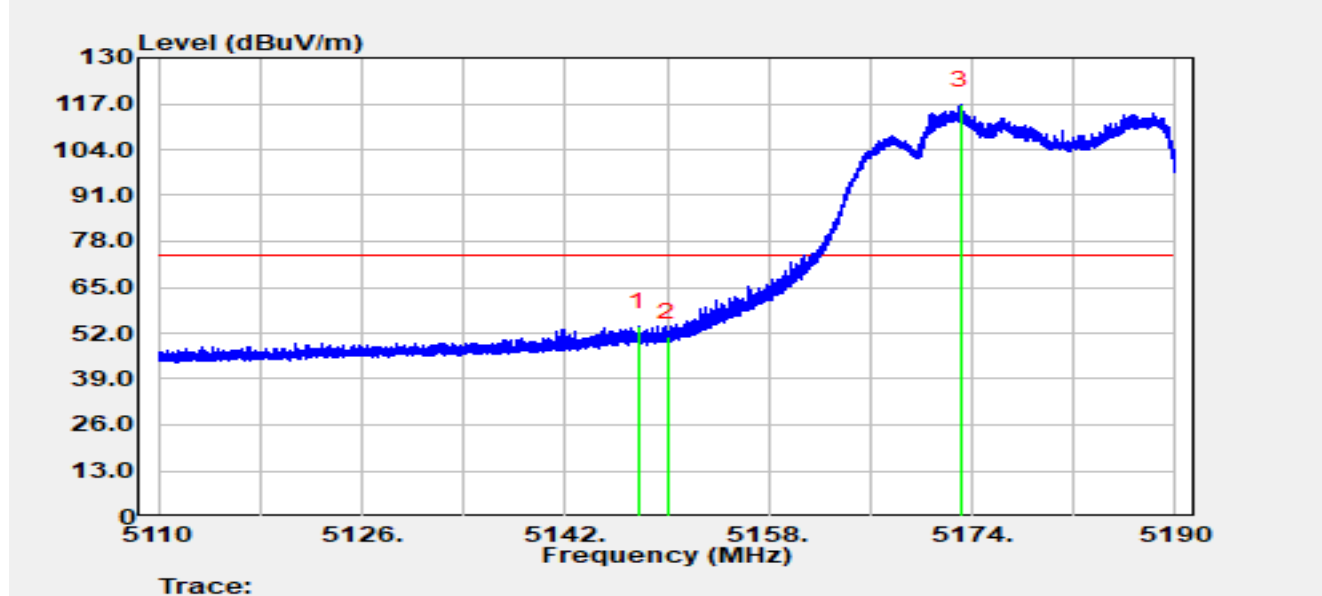


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.768	55.47	-1.54	53.93	-20.07	74.00	Peak
2		5150.000	51.84	-0.99	50.85	-23.15	74.00	Peak
3		5173.104	62.98	53.69	116.68	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5180 MHz		

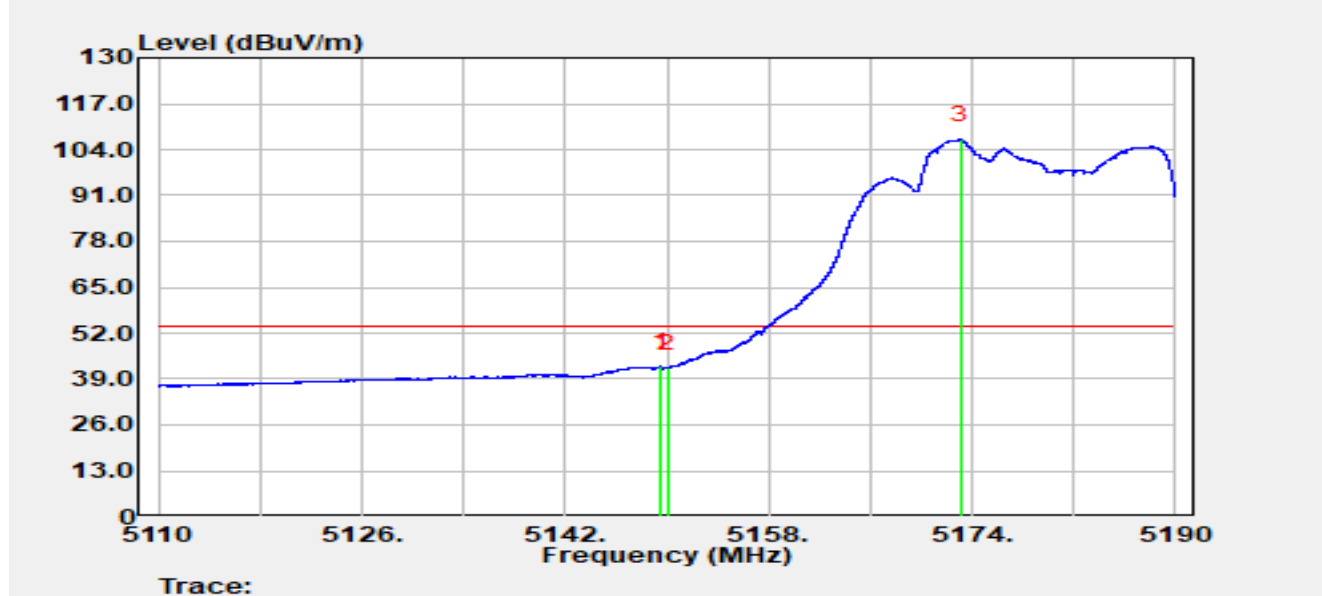


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.520	43.61	-1.12	42.49	-11.51	54.00	Average
2		5150.000	43.13	-0.99	42.13	-11.87	54.00	Average
3		5173.104	53.06	53.69	106.75	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5180 MHz		

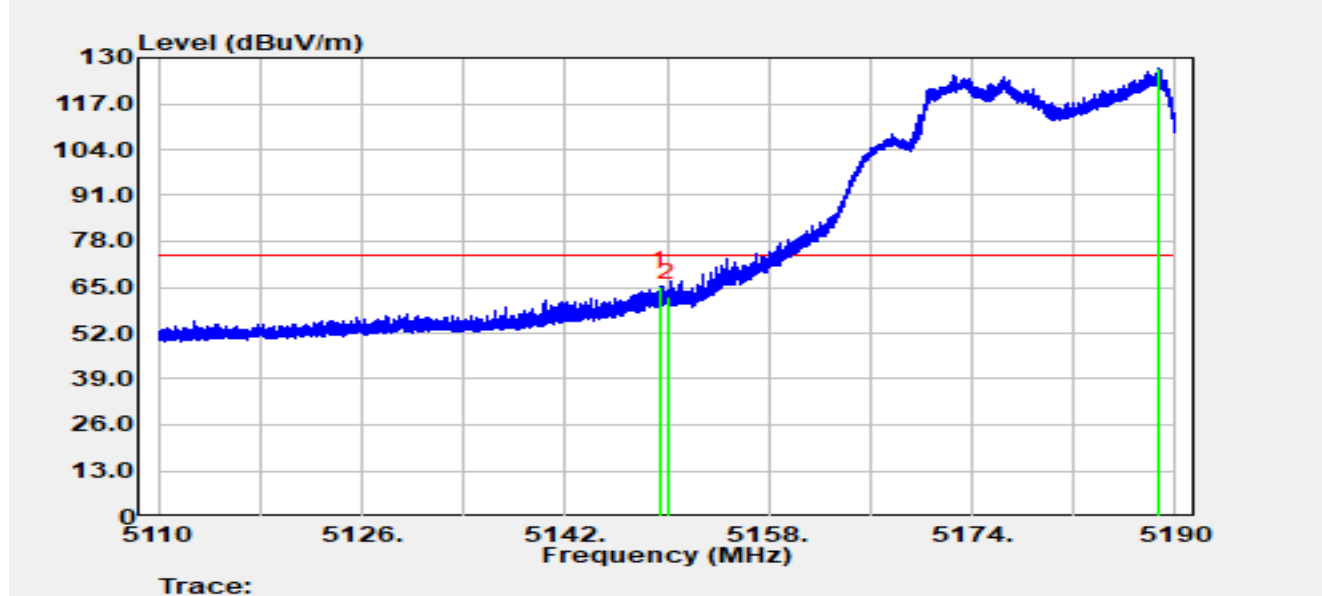


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.424	66.46	-1.15	65.31	-8.69	74.00	Peak
2		5150.000	63.05	-0.99	62.06	-11.94	74.00	Peak
3		5188.736	84.60	42.64	127.24	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5180 MHz		

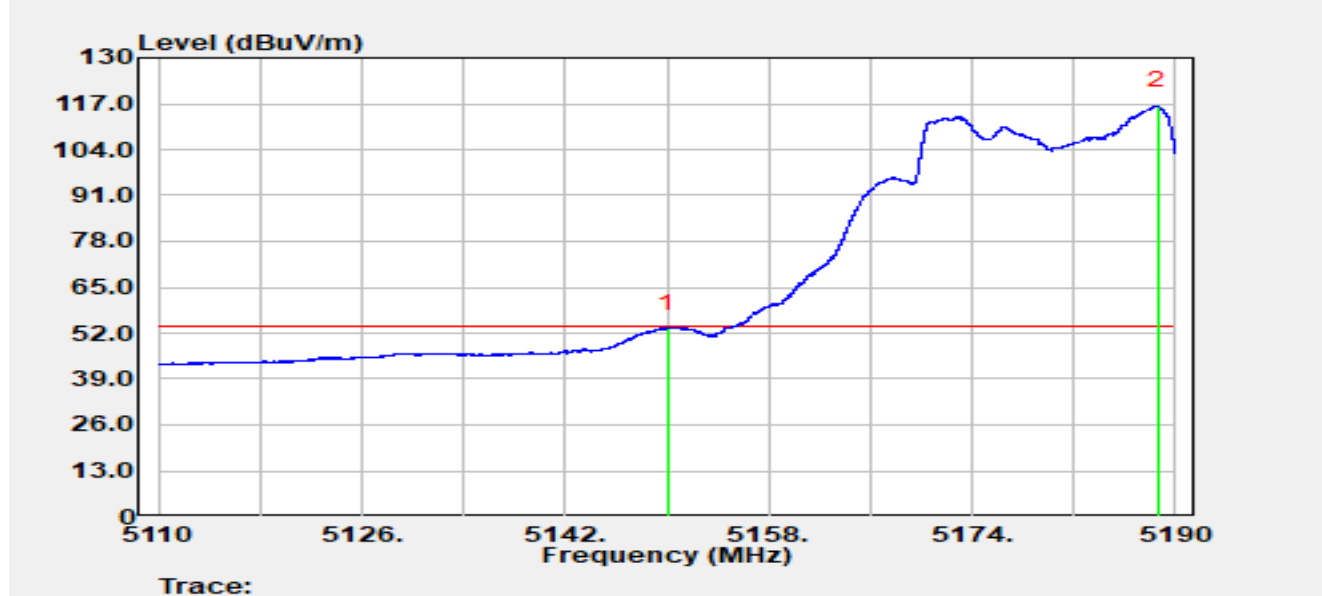


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	54.35	-0.99	53.36	-0.64	54.00	Average
2		5188.600	73.51	42.82	116.33	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5320 MHz		

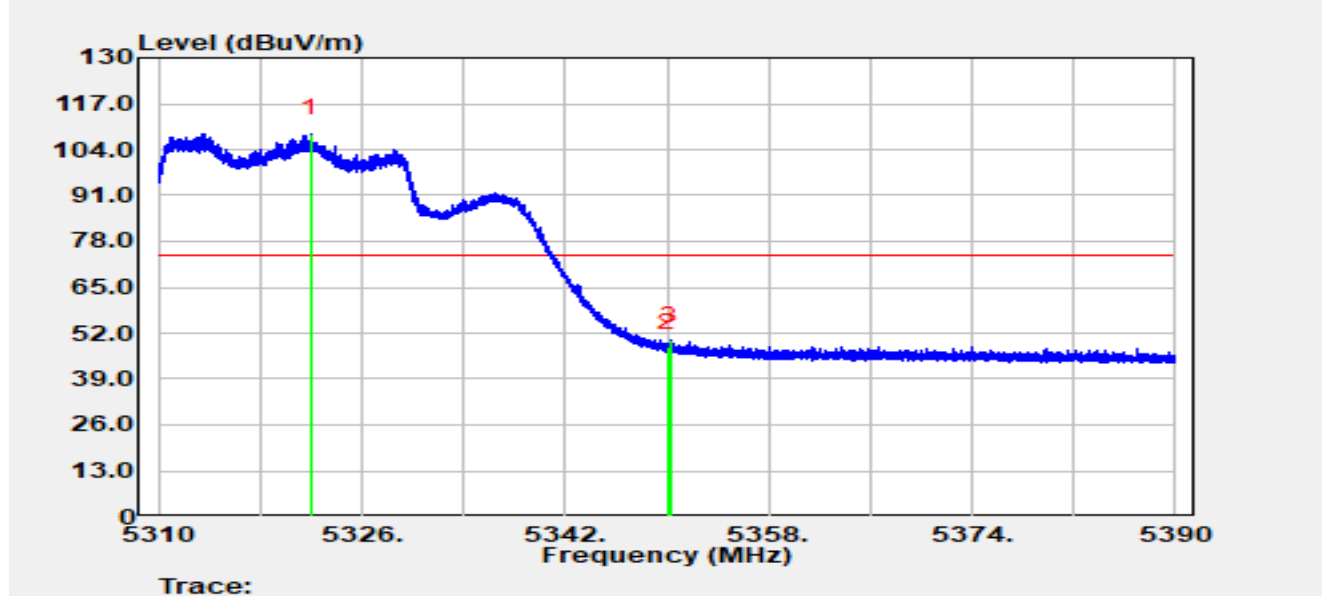


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5321.936	68.37	40.16	108.53	N/A	N/A	Peak
2		5350.000	47.79	0.19	47.97	-26.03	74.00	Peak
3	*	5350.248	49.92	-0.01	49.91	-24.09	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5320 MHz		

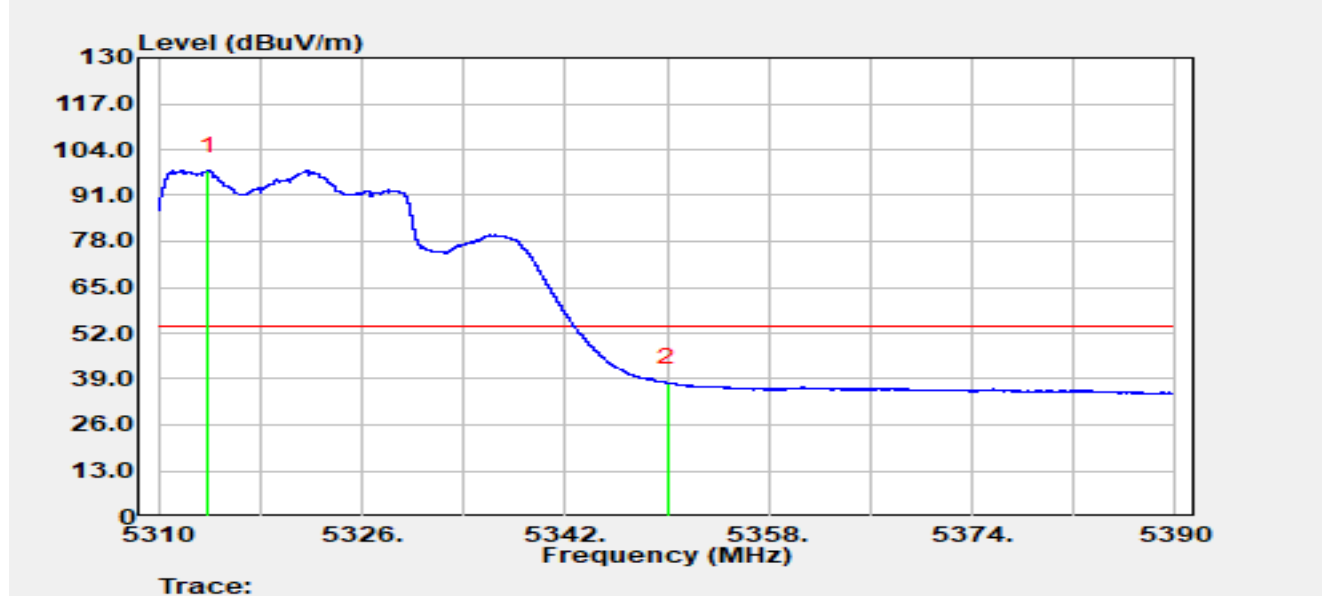


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5313.920	49.19	48.85	98.04	N/A	N/A	Average
2	*	5350.000	37.73	0.19	37.92	-16.08	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5320 MHz		

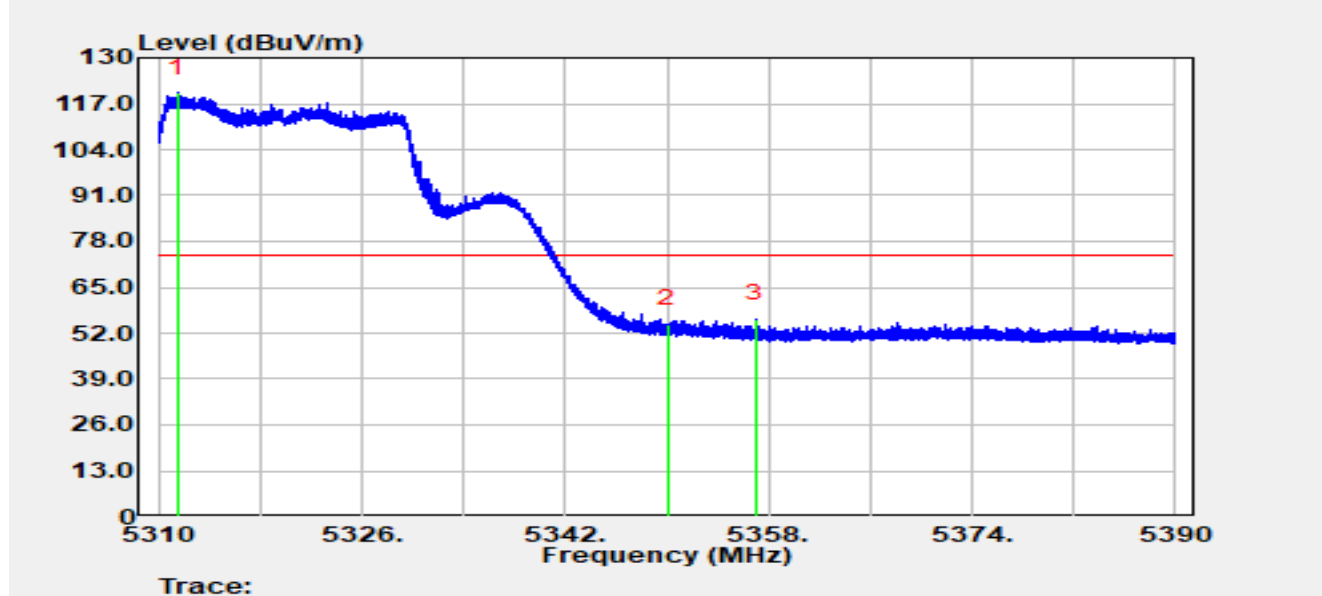


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5311.472	74.51	45.54	120.05	N/A	N/A	Peak
2		5350.000	54.38	0.19	54.56	-19.44	74.00	Peak
3	*	5356.944	58.14	-1.98	56.16	-17.84	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5320 MHz		

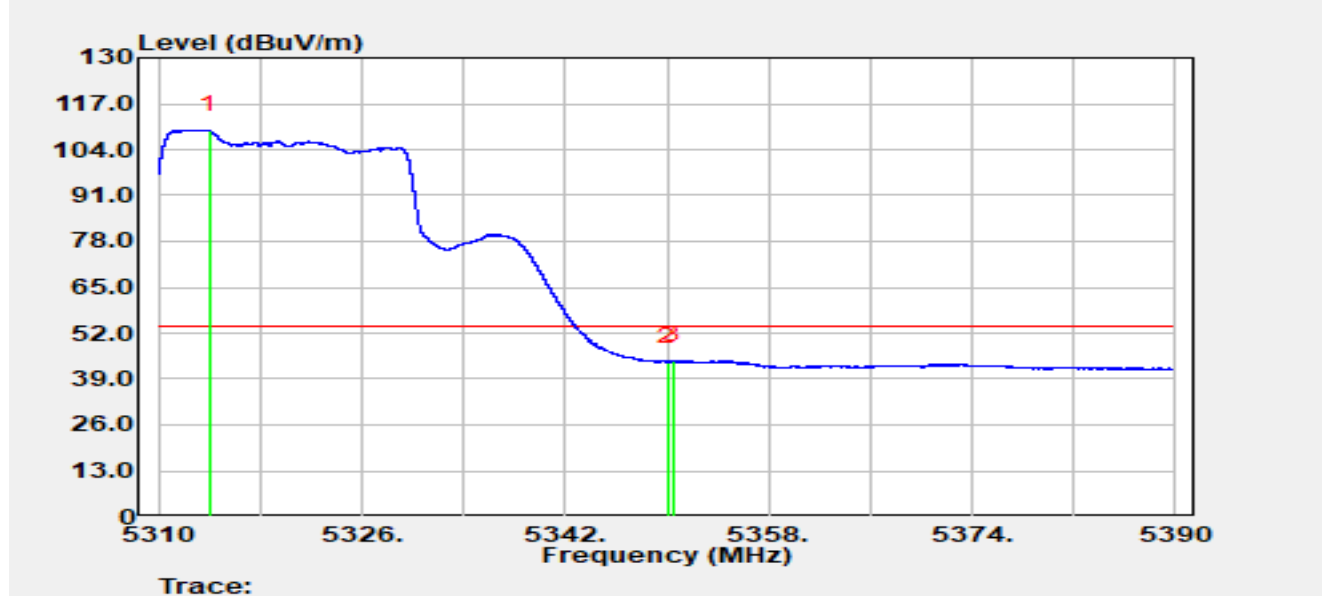


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5313.968	60.65	48.91	109.56	N/A	N/A	Average
2		5350.000	43.68	0.19	43.86	-10.14	54.00	Average
3	*	5350.472	44.47	-0.13	44.34	-9.66	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

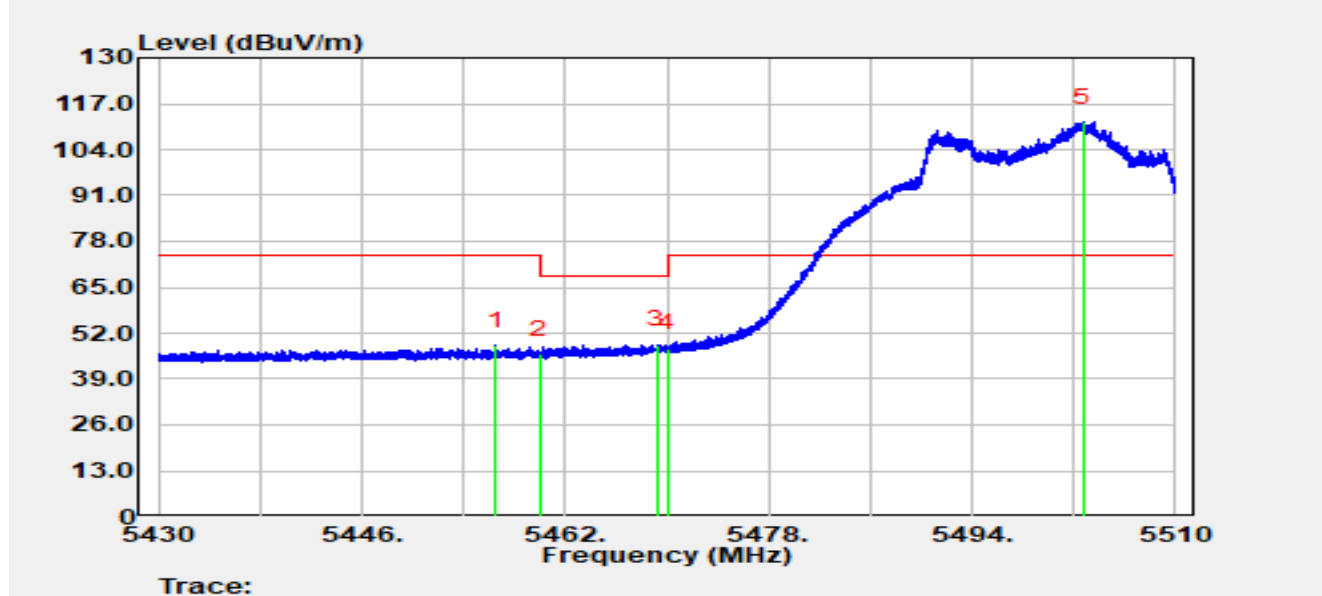


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5456.552	52.01	-3.49	48.51	-25.49	74.00	Peak
2		5460.000	49.24	-3.25	46.00	-22.20	68.20	Peak
3	*	5469.240	50.47	-1.76	48.71	-19.49	68.20	Peak
4		5470.000	49.48	-1.75	47.72	-20.48	68.20	Peak
5		5502.744	66.92	44.91	111.83	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

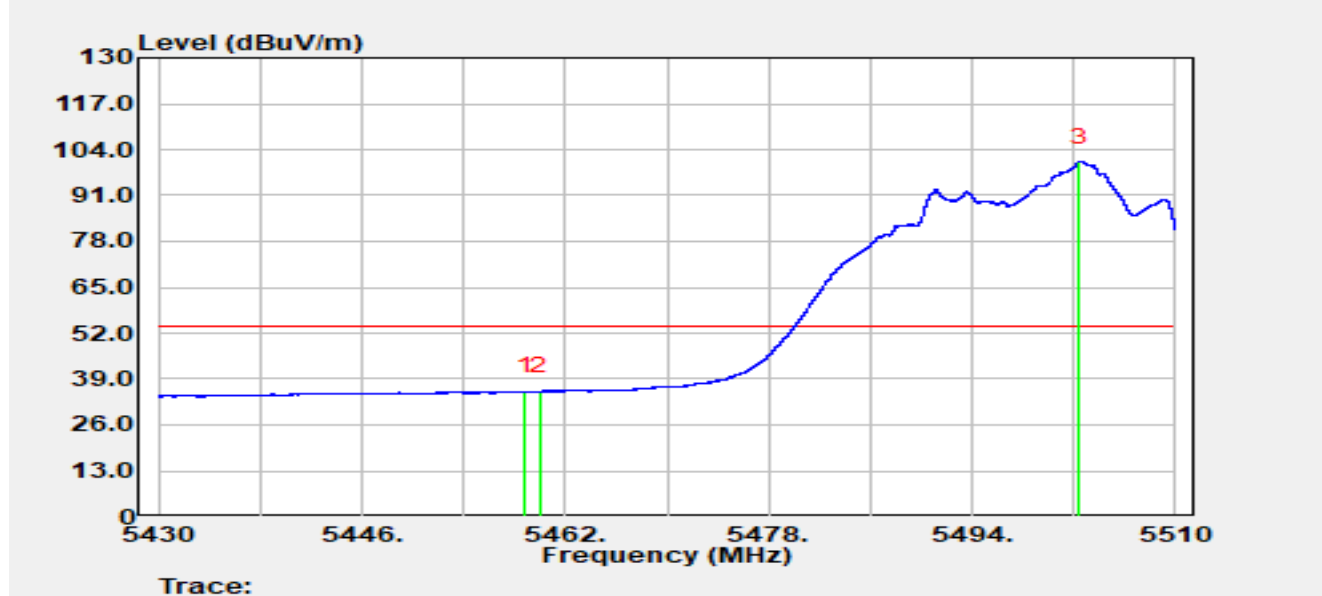


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.840	38.79	-3.32	35.47	-18.53	54.00	Average
2		5460.000	38.62	-3.25	35.37	-18.63	54.00	Average
3		5502.400	55.81	44.65	100.46	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

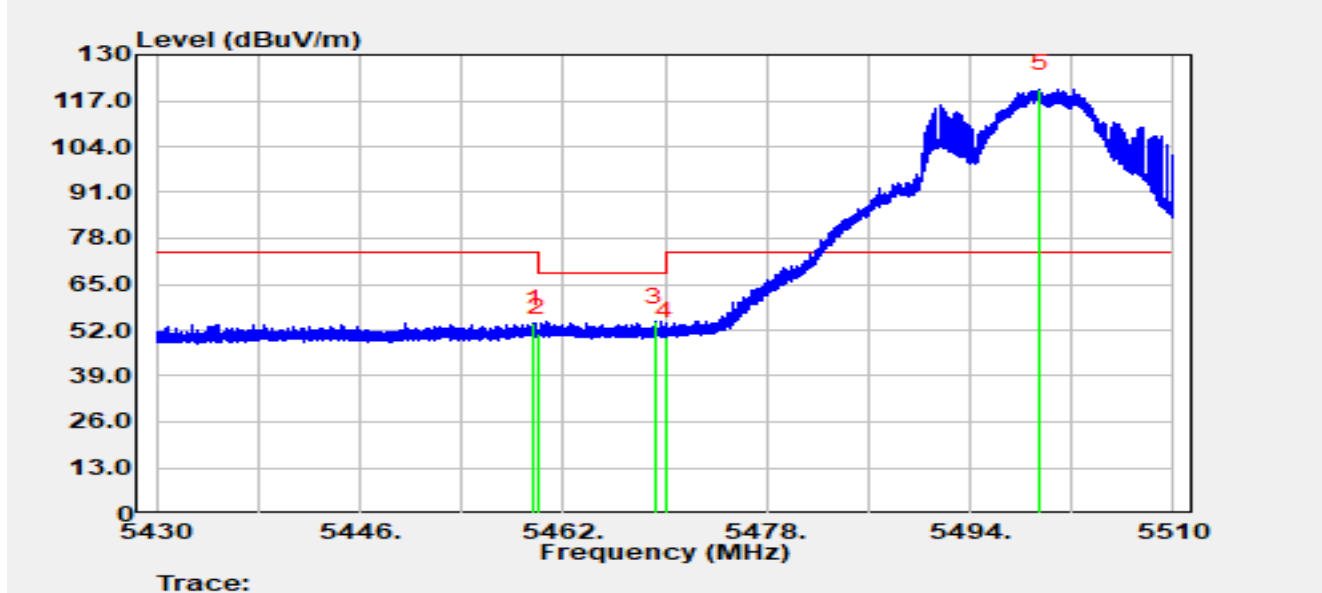


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.696	57.15	-3.23	53.91	-20.09	74.00	Peak
2		5460.000	54.30	-3.25	51.06	-17.14	68.20	Peak
3	*	5469.200	56.12	-1.77	54.35	-13.85	68.20	Peak
4		5470.000	51.96	-1.75	50.20	-18.00	68.20	Peak
5	*	5499.488	79.22	41.16	120.37	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

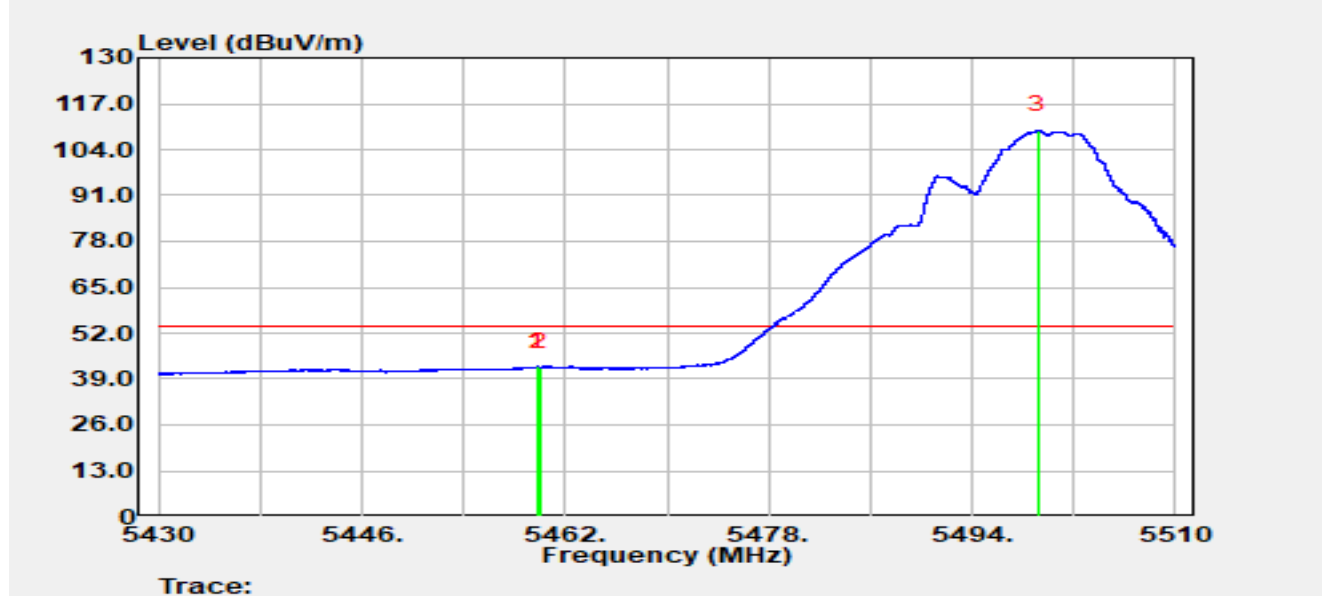


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.776	45.72	-3.24	42.48	-11.52	54.00	Average
2		5460.000	45.52	-3.25	42.28	-11.72	54.00	Average
3		5499.200	68.07	41.40	109.47	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5700 MHz		

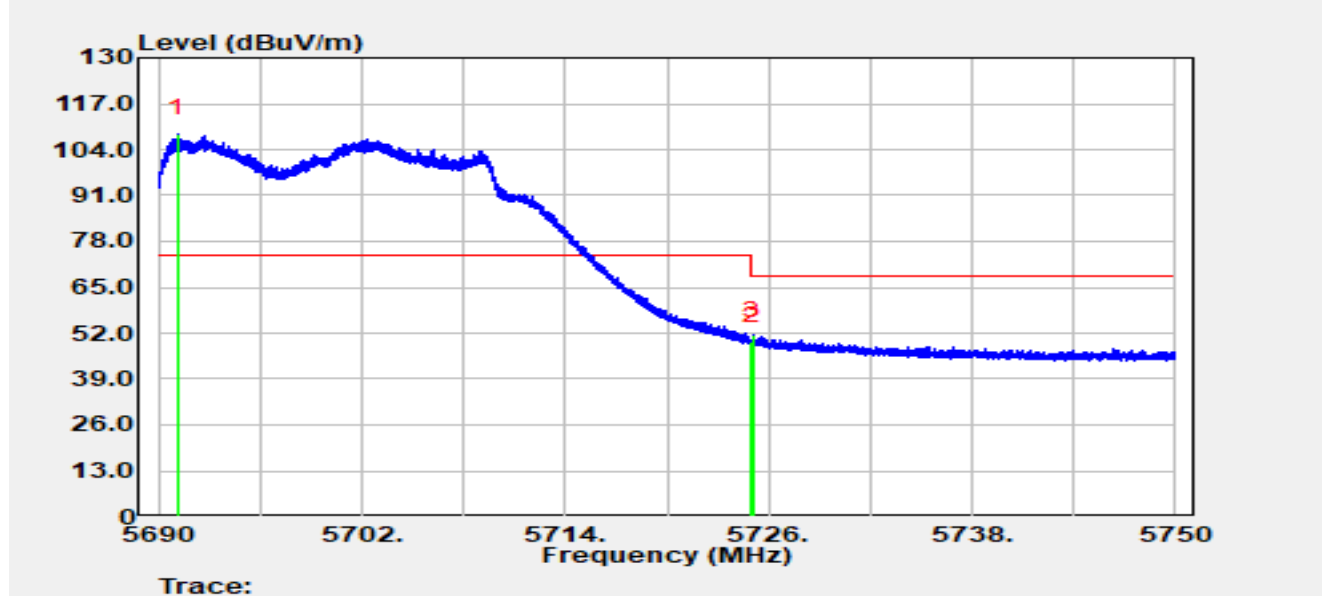


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5691.098	66.94	41.50	108.44	N/A	N/A	Peak
2		5725.000	49.26	0.39	49.65	-18.55	68.20	Peak
3	*	5725.070	51.17	0.30	51.48	-16.72	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5700 MHz		

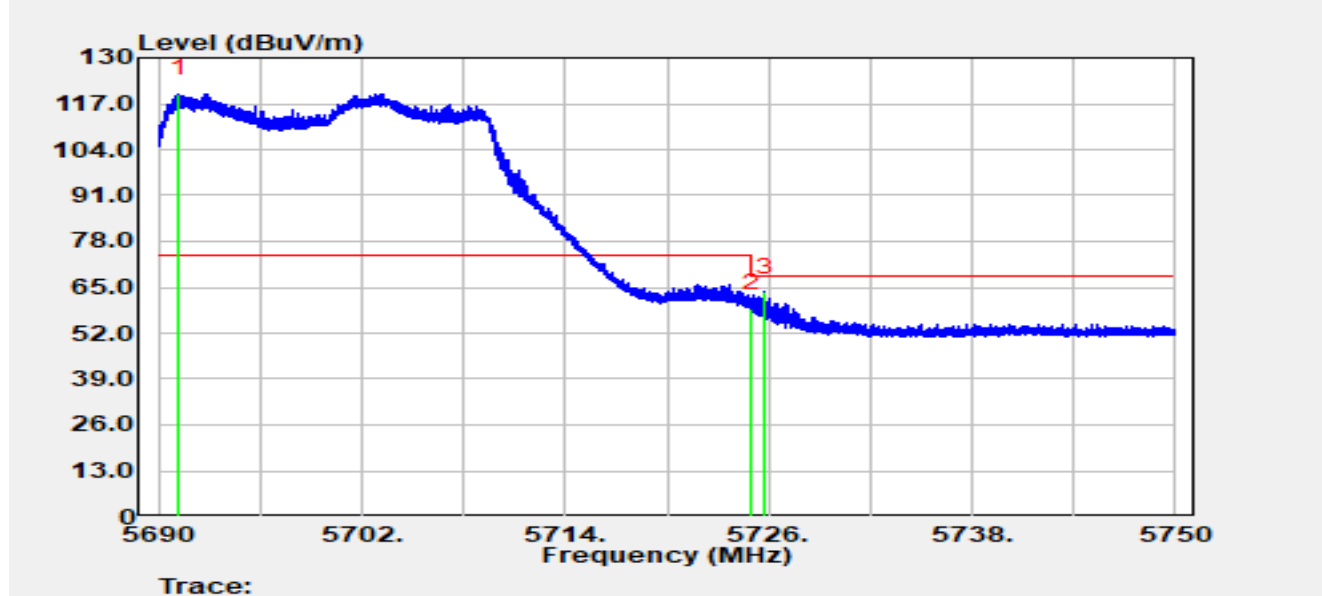


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5691.230	78.09	41.76	119.85	N/A	N/A	Peak
2		5725.000	58.65	0.39	59.04	-9.16	68.20	Peak
3	*	5725.814	63.66	-0.04	63.62	-4.58	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5745 MHz		

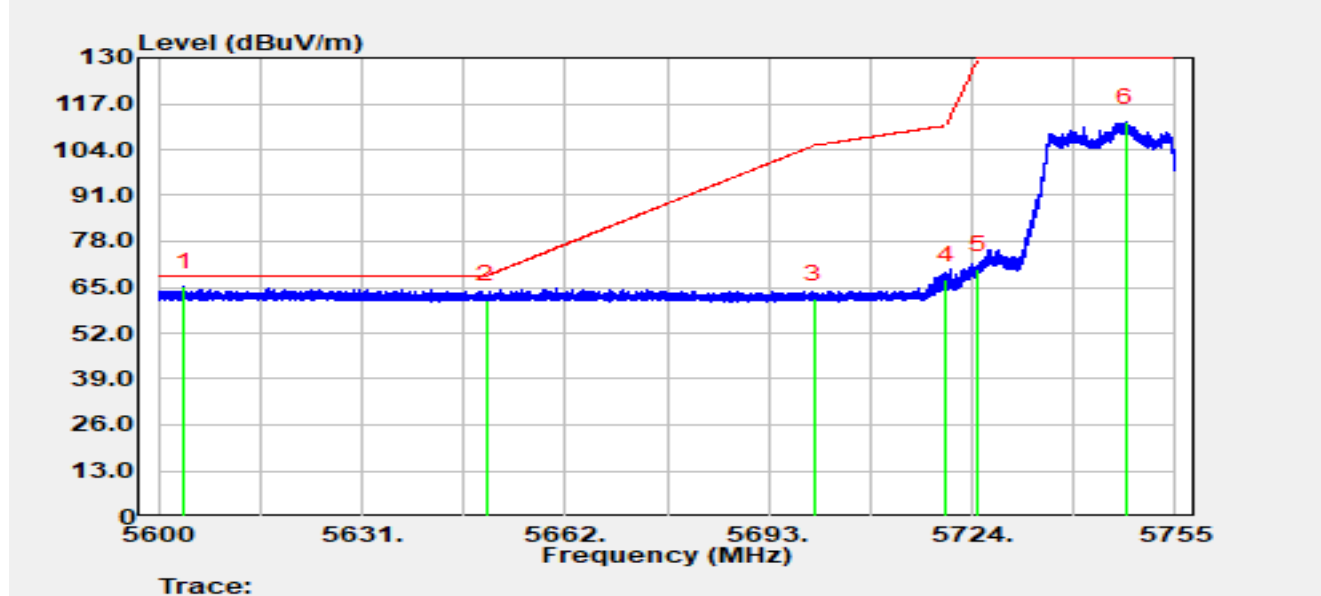


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5603.875	71.15	-6.12	65.03	-3.17	68.20	Peak
2		5650.000	67.83	-6.34	61.50	-6.70	68.20	Peak
3		5700.000	68.06	-6.38	61.68	-43.52	105.20	Peak
4		5720.000	73.46	-6.33	67.12	-43.68	110.80	Peak
5		5725.000	76.34	-6.33	70.01	-59.99	130.00	Peak
6		5747.405	117.96	-6.31	111.66	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5745 MHz		

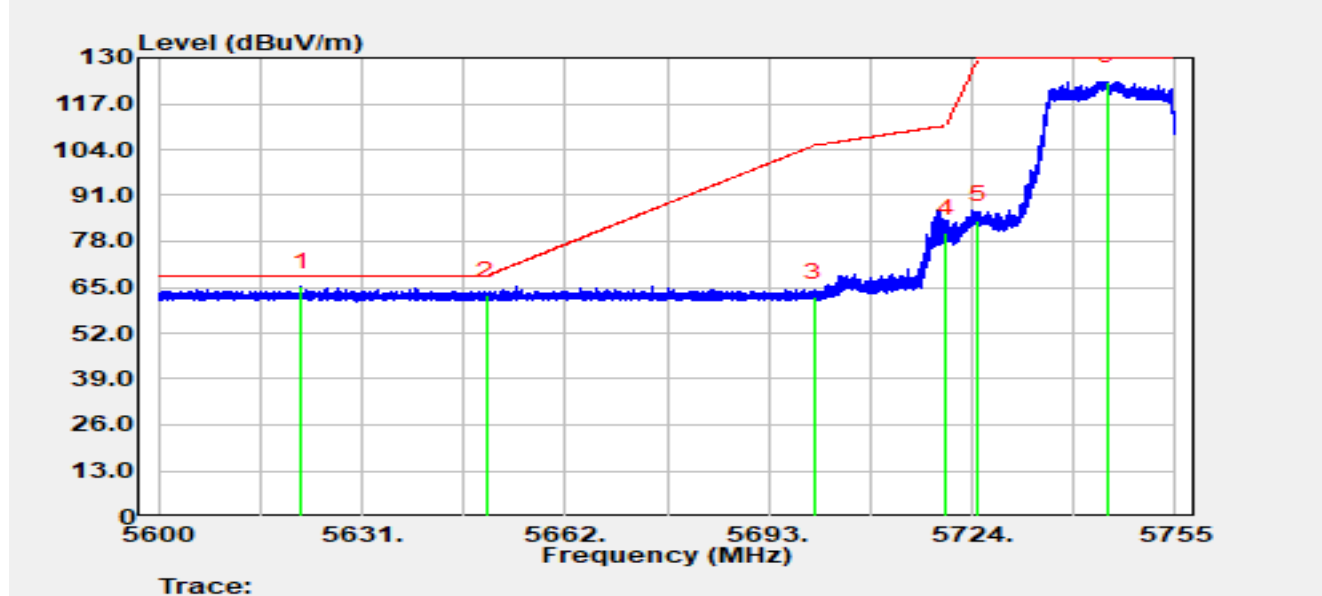


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5621.824	71.25	-6.18	65.07	-3.13	68.20	Peak
2		5650.000	69.10	-6.34	62.77	-5.43	68.20	Peak
3		5700.000	68.66	-6.38	62.28	-42.92	105.20	Peak
4		5720.000	86.73	-6.33	80.39	-30.41	110.80	Peak
5		5725.000	90.29	-6.33	83.96	-46.04	130.00	Peak
6		5744.600	129.68	-6.32	123.36	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5825 MHz		

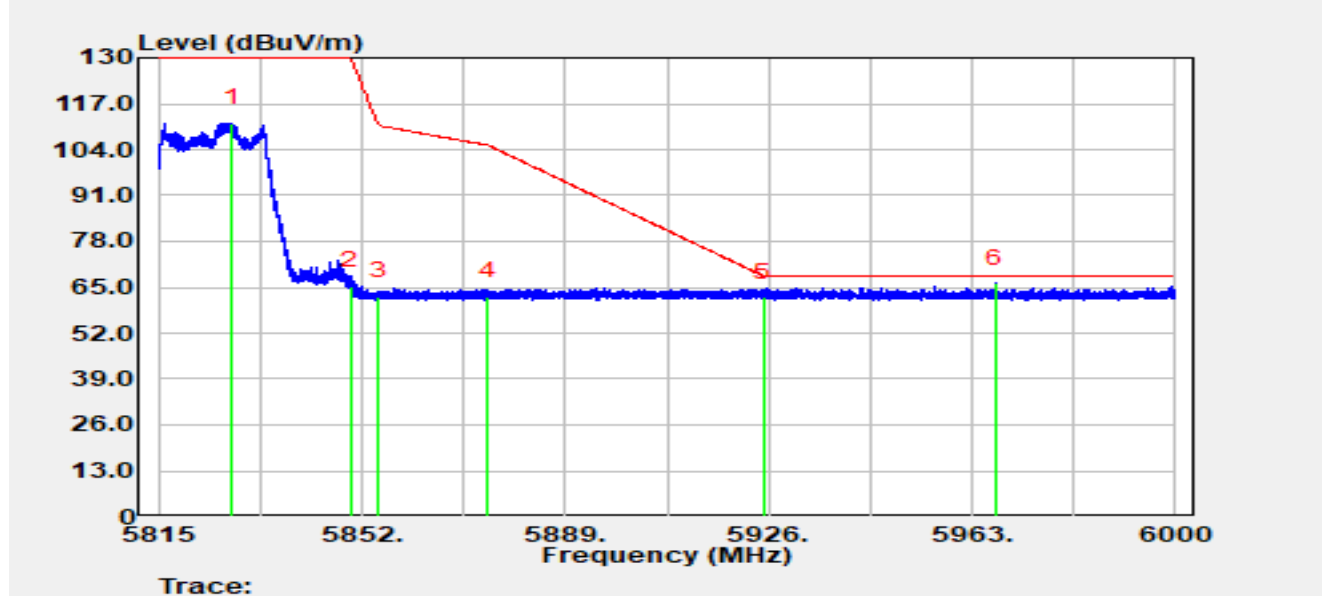


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5828.301	117.82	-6.26	111.55	N/A	N/A	Peak
2		5850.000	71.69	-6.31	65.37	-64.63	130.00	Peak
3		5855.000	68.57	-6.27	62.31	-48.49	110.80	Peak
4		5875.000	68.57	-6.24	62.33	-42.87	105.20	Peak
5		5925.000	68.16	-6.05	62.11	-6.09	68.20	Peak
6	*	5967.255	72.07	-6.06	66.01	-2.19	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5825 MHz		

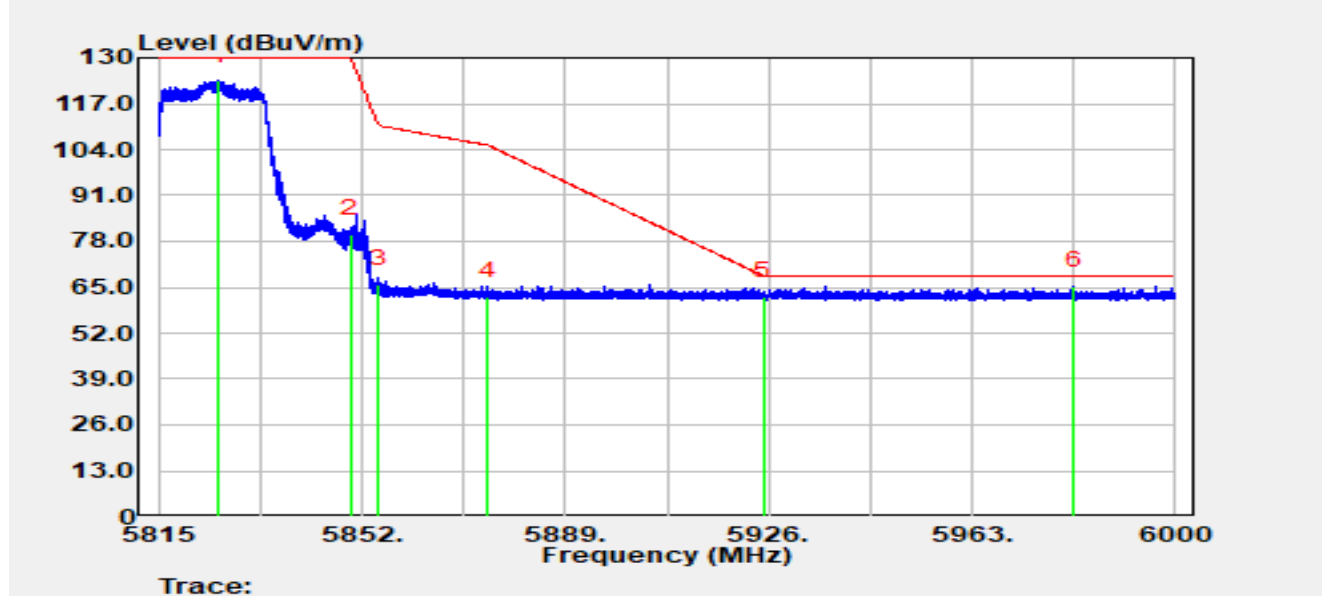

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5825.971	129.72	-6.28	123.44	N/A	N/A	Peak
2		5850.000	86.31	-6.31	80.00	-50.00	130.00	Peak
3		5855.000	72.20	-6.27	65.94	-44.86	110.80	Peak
4		5875.000	68.55	-6.24	62.31	-42.89	105.20	Peak
5		5925.000	68.42	-6.05	62.36	-5.84	68.20	Peak
6	*	5981.556	71.43	-6.04	65.39	-2.81	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).