


Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.9 °C	Humidity	62.8%
Limit	FCC_Part15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11n-HT20 at 2462 MHz		

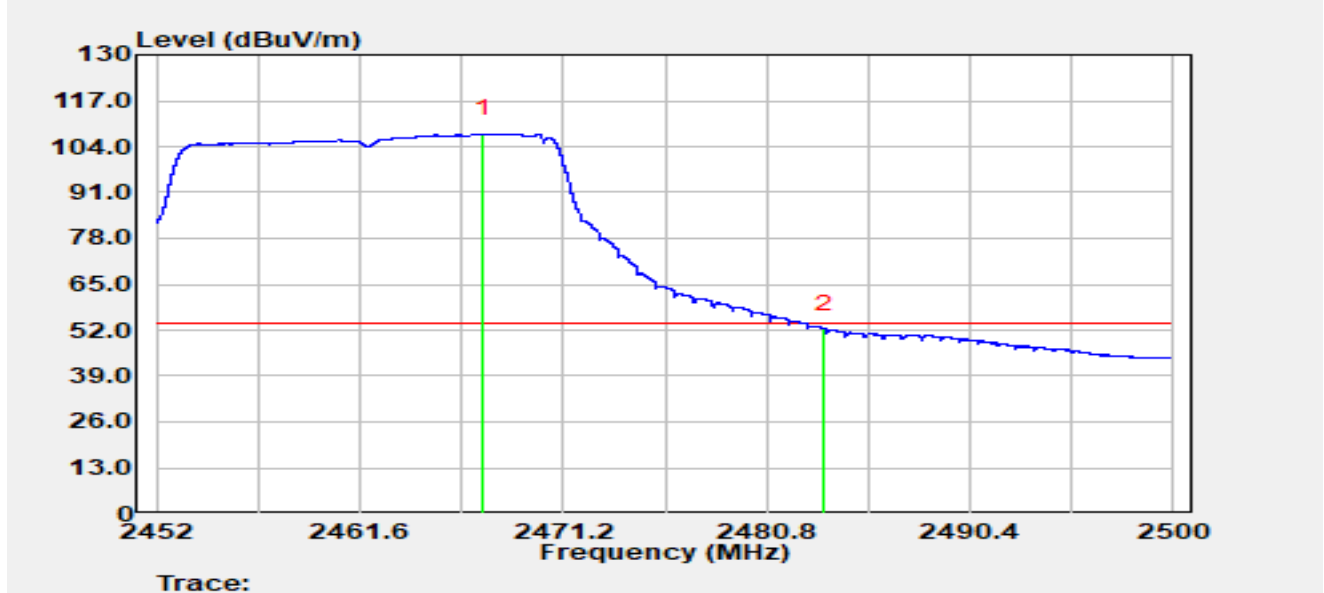


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2467.417	74.47	33.18	107.65	N/A	N/A	Average
2	*	2483.500	19.11	33.31	52.42	-1.58	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.9 °C	Humidity	62.8%
Limit	FCC_Part15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11n-HT20 at 2462 MHz		

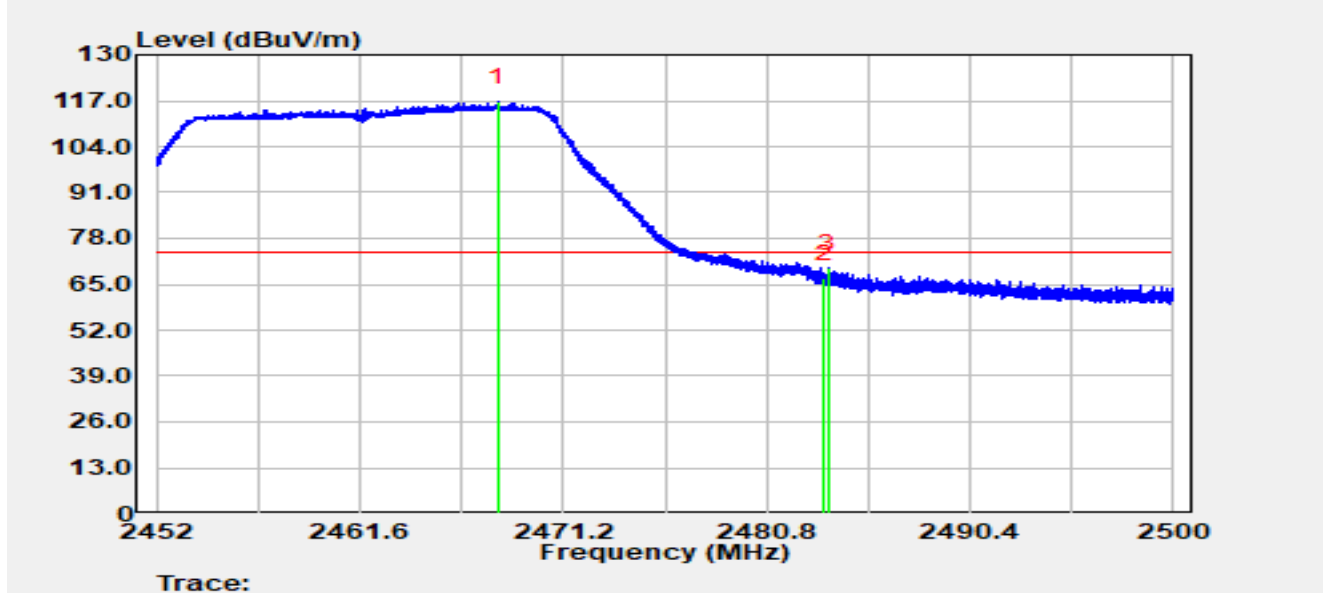


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2468.080	83.41	33.19	116.60	N/A	N/A	Peak
2		2483.500	33.20	33.31	66.51	-7.49	74.00	Peak
3	*	2483.733	36.32	33.31	69.63	-4.37	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.9 °C	Humidity	62.8%
Limit	FCC_Part15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11n-HT20 at 2462 MHz		

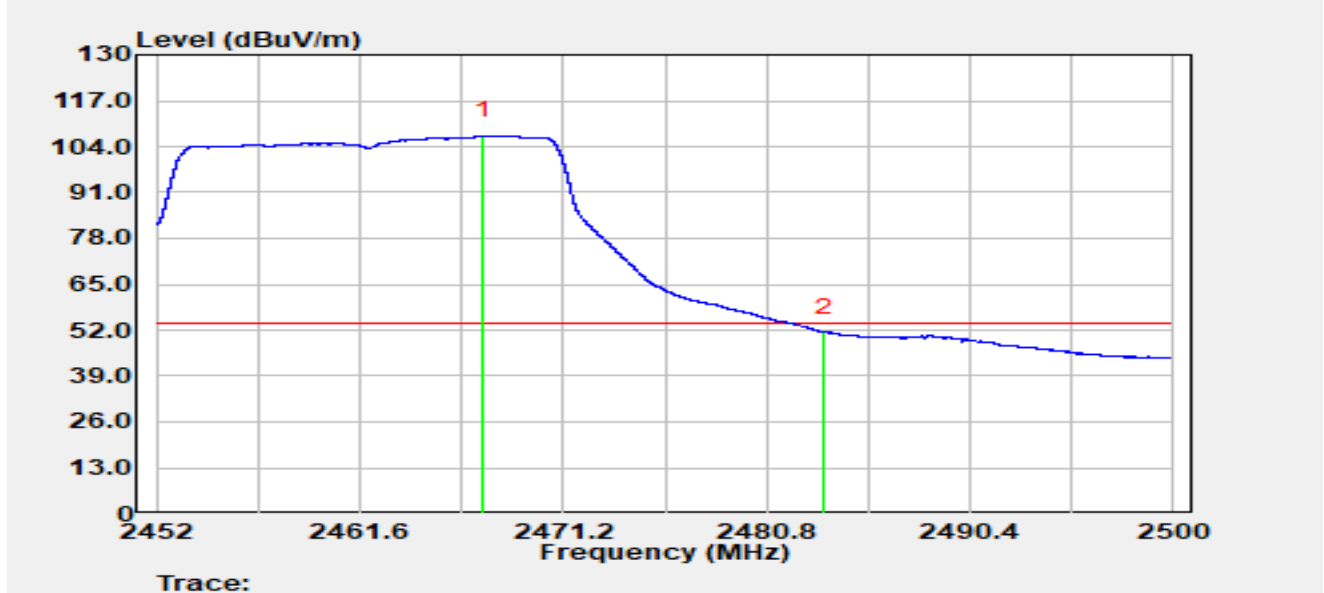


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2467.408	73.77	33.18	106.95	N/A	N/A	Average
2	*	2483.500	18.20	33.31	51.51	-2.49	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.9 °C	Humidity	62.8%
Limit	FCC_Part15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11n-HT40 at 2422 MHz		

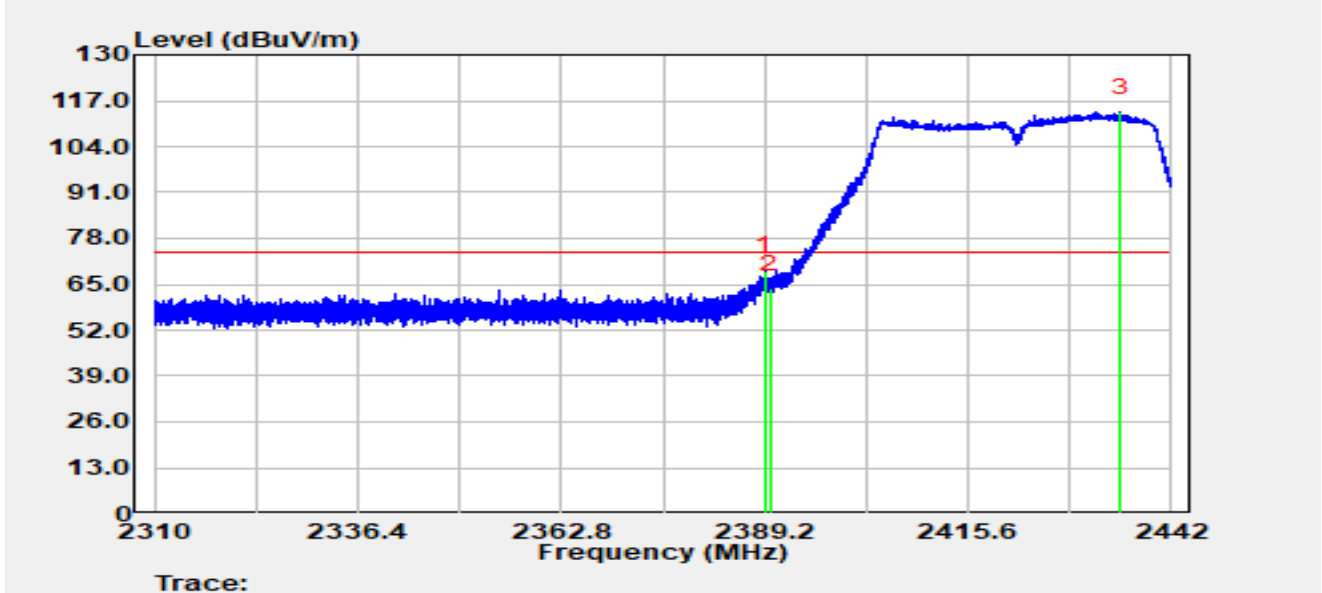


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.279	36.00	32.84	68.84	-5.16	74.00	Peak
2		2390.000	30.87	32.85	63.72	-10.28	74.00	Peak
3		2435.466	80.68	33.07	113.74	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.9 °C	Humidity	62.8%
Limit	FCC_Part15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11n-HT40 at 2422 MHz		

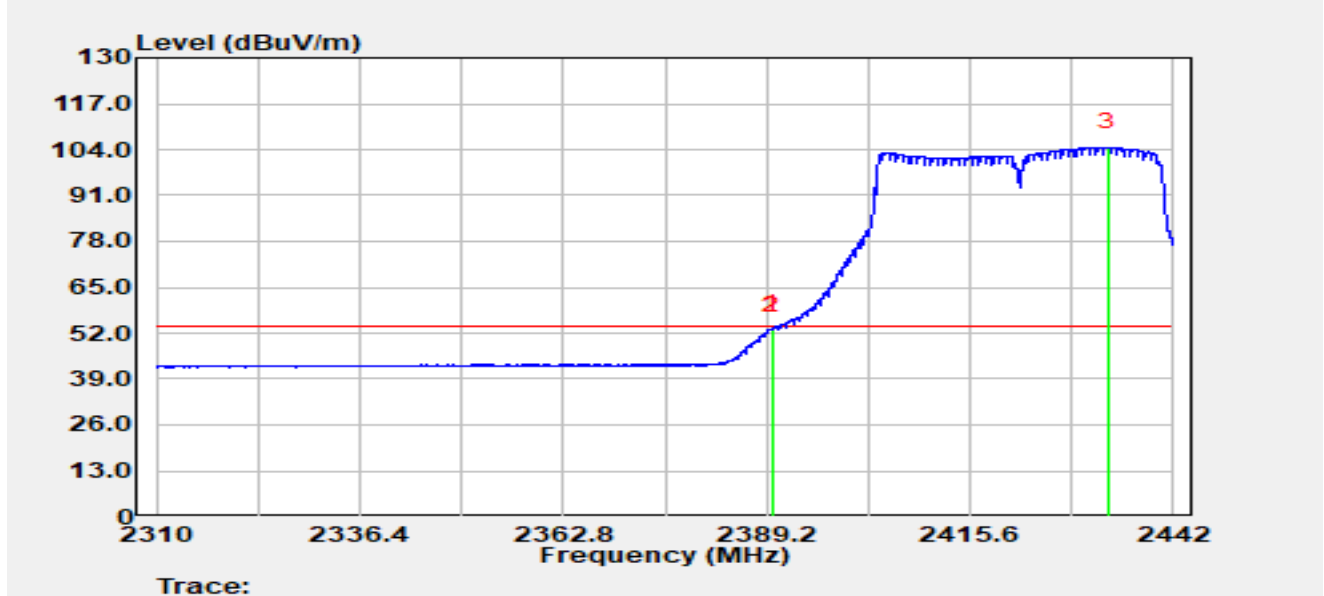


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.913	20.26	32.85	53.11	-0.89	54.00	Average
2		2390.000	19.89	32.85	52.74	-1.26	54.00	Average
3		2433.407	71.56	33.06	104.61	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.9 °C	Humidity	62.8%
Limit	FCC_Part15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11n-HT40 at 2422 MHz		

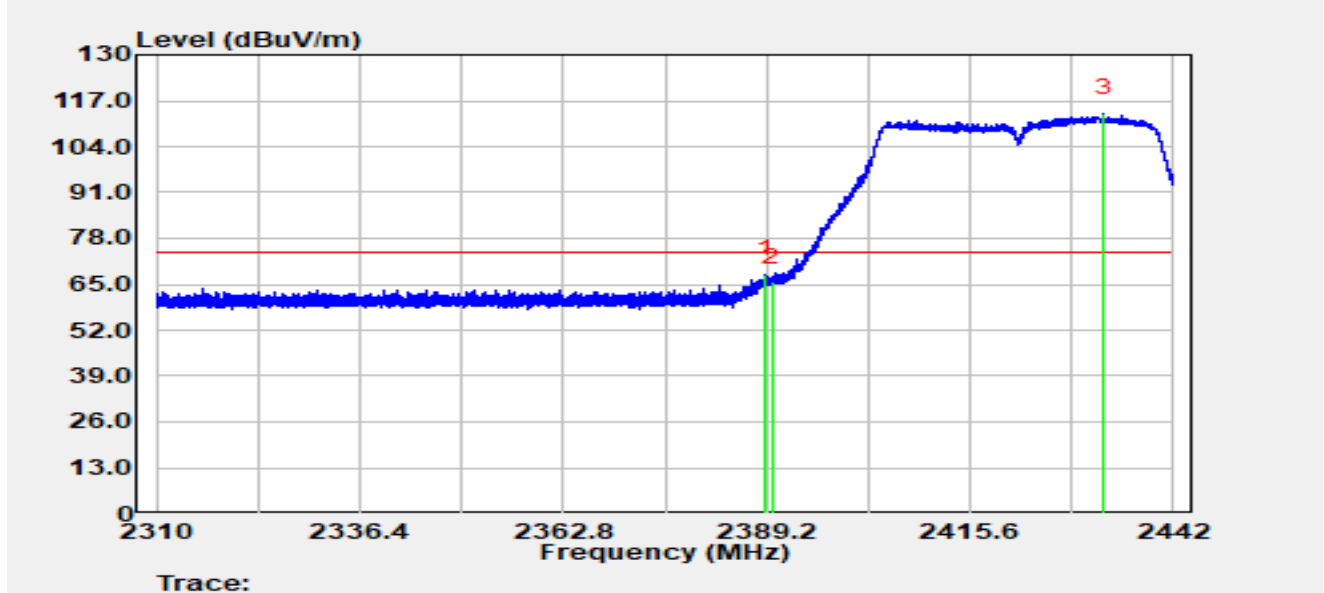


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.055	34.97	32.84	67.81	-6.19	74.00	Peak
2		2390.000	32.76	32.85	65.60	-8.40	74.00	Peak
3		2432.958	80.34	33.06	113.39	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.9 °C	Humidity	62.8%
Limit	FCC_Part15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11n-HT40 at 2422 MHz		

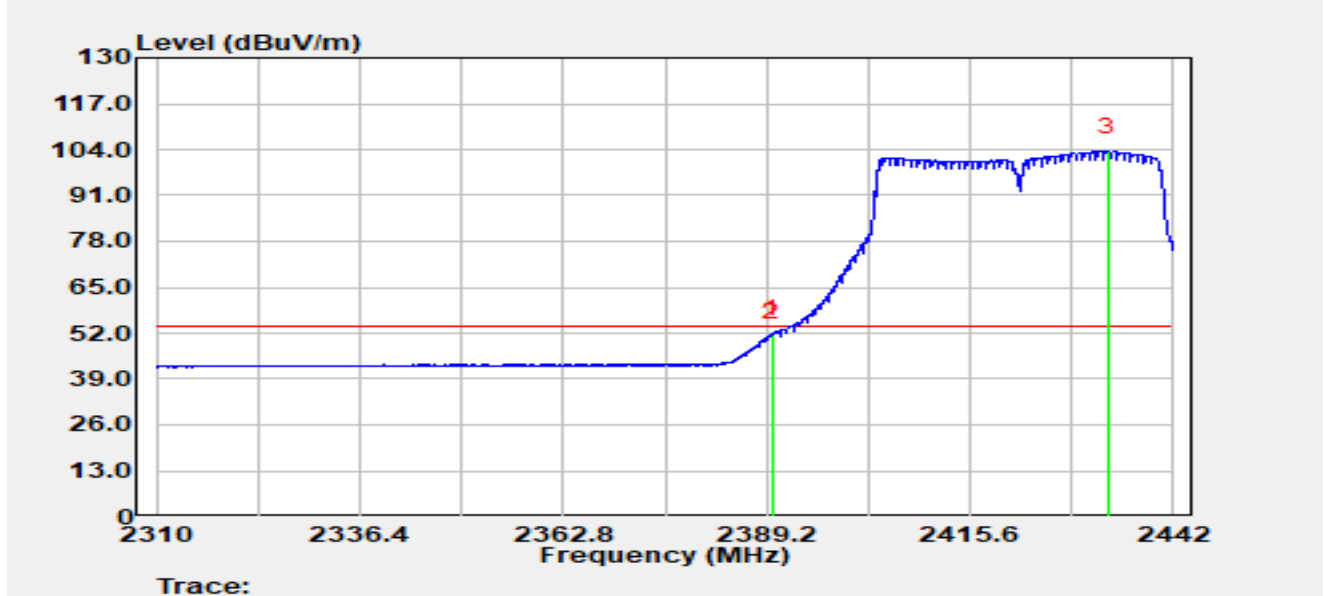


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.952	18.77	32.85	51.62	-2.38	54.00	Average
2		2390.000	17.76	32.85	50.61	-3.39	54.00	Average
3		2433.499	70.37	33.06	103.43	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.9 °C	Humidity	62.8%
Limit	FCC_Part15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11n-HT40 at 2452 MHz		

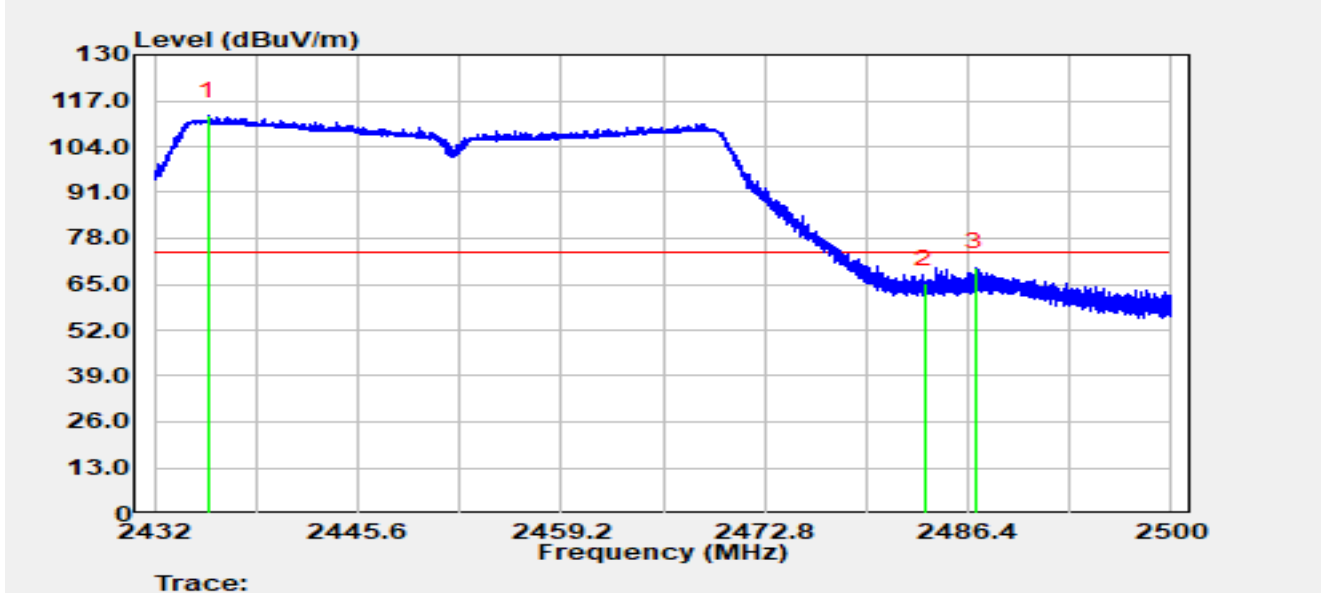


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2435.618	79.56	33.07	112.62	N/A	N/A	Peak
2		2483.500	31.76	33.31	65.07	-8.93	74.00	Peak
3	*	2486.856	36.41	33.33	69.74	-4.26	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.9 °C	Humidity	62.8%
Limit	FCC_Part15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11n-HT40 at 2452 MHz		

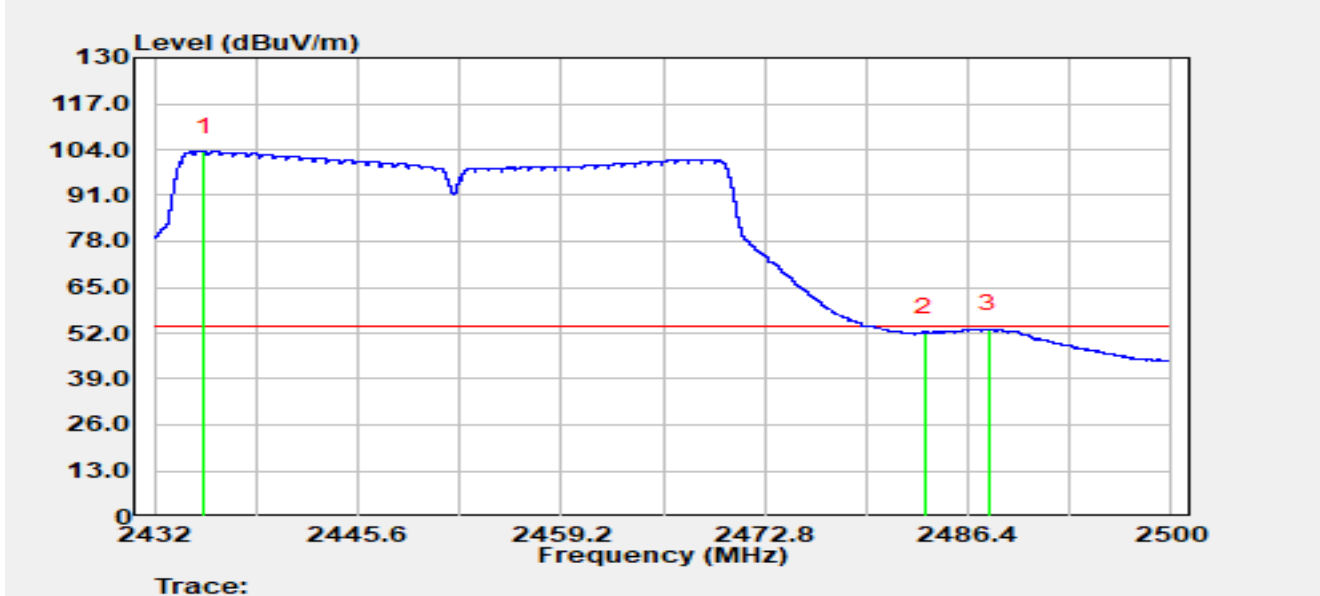


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2435.312	70.39	33.06	103.46	N/A	N/A	Average
2		2483.500	18.93	33.31	52.24	-1.76	54.00	Average
3	*	2487.740	19.88	33.34	53.22	-0.78	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.9 °C	Humidity	62.8%
Limit	FCC_Part15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11n-HT40 at 2452 MHz		

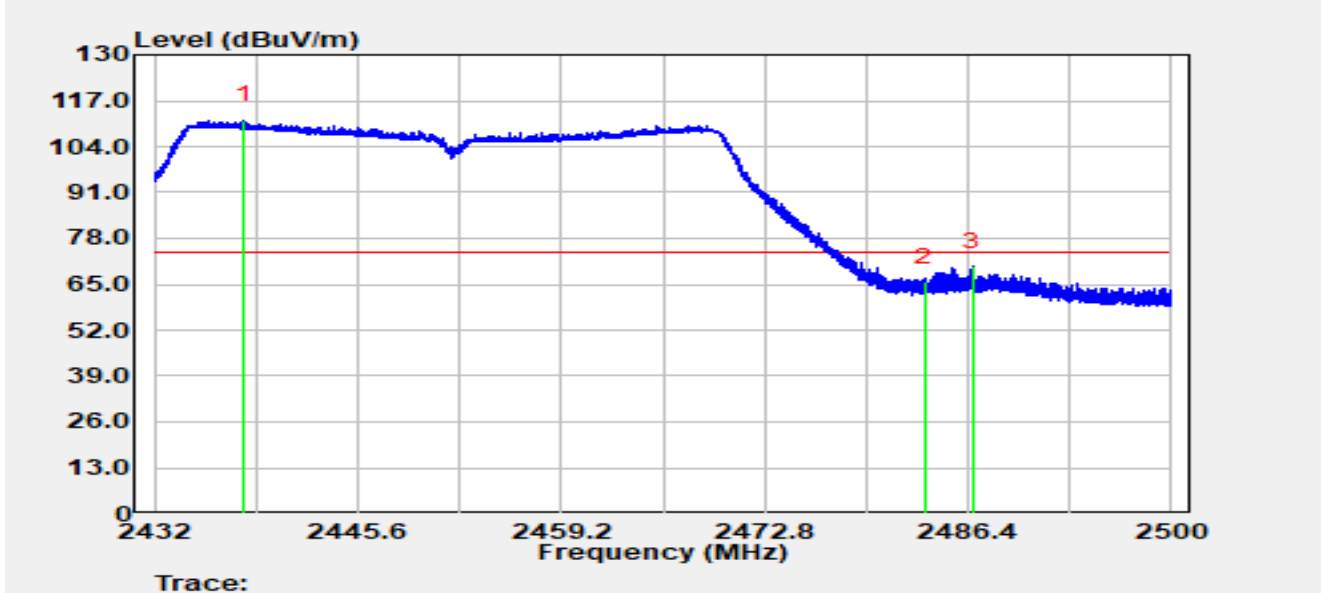


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2437.964	78.37	33.07	111.45	N/A	N/A	Peak
2		2483.500	32.22	33.31	65.53	-8.47	74.00	Peak
3	*	2486.699	36.60	33.33	69.92	-4.08	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.9 °C	Humidity	62.8%
Limit	FCC_Part15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11n-HT40 at 2452 MHz		

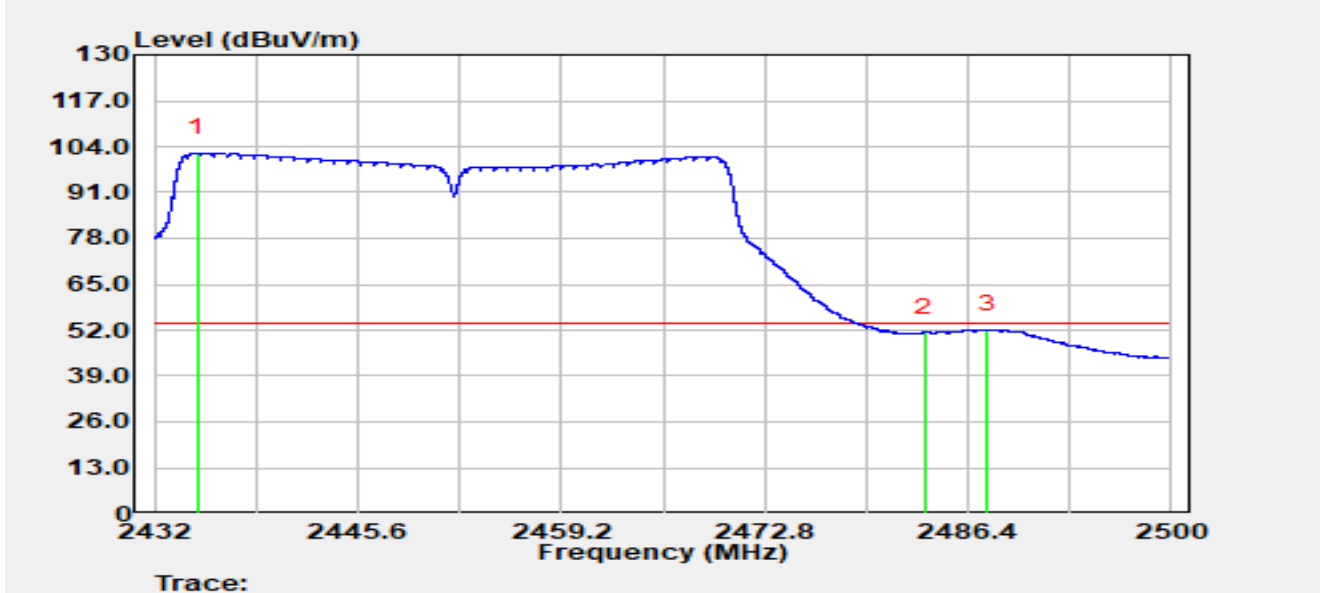


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2434.842	69.04	33.06	102.10	N/A	N/A	Average
2		2483.500	17.96	33.31	51.27	-2.73	54.00	Average
3	*	2487.665	18.88	33.34	52.21	-1.79	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.9 °C	Humidity	62.8%
Limit	FCC_Part15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 2412 MHz		

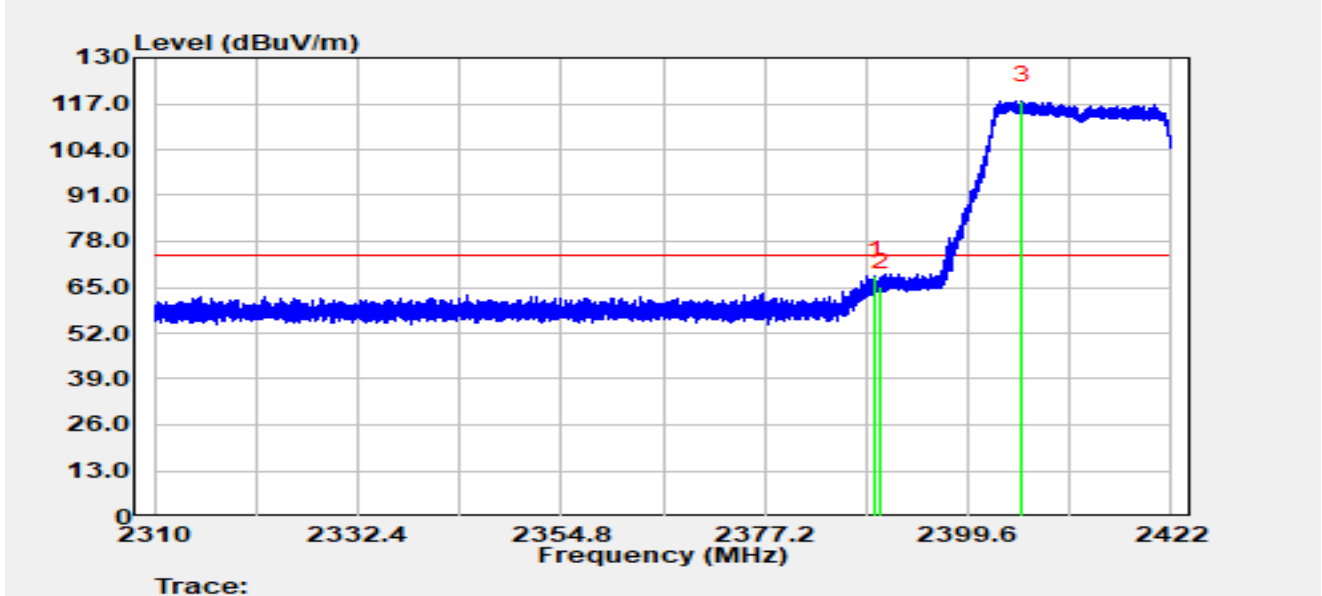


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.453	35.41	32.85	68.25	-5.75	74.00	Peak
2		2390.000	32.18	32.85	65.03	-8.97	74.00	Peak
3		2405.525	84.80	32.94	117.74	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.9 °C	Humidity	62.8%
Limit	FCC_Part15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 2412 MHz		

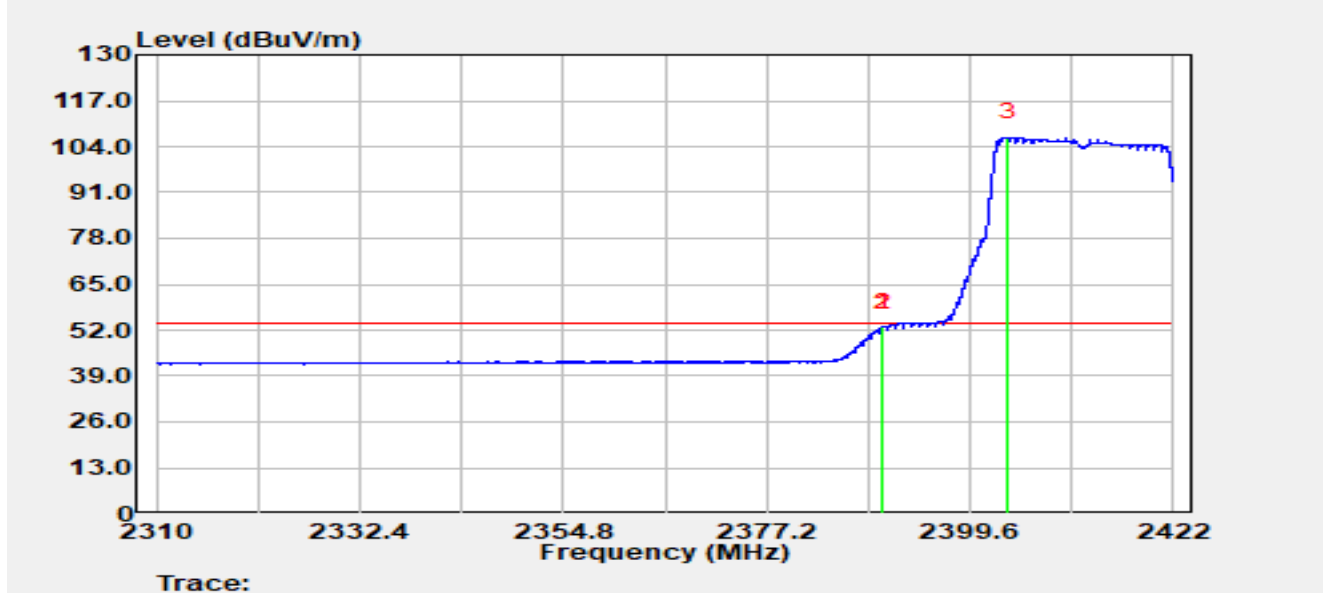


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.990	19.93	32.85	52.78	-1.22	54.00	Average
2		2390.000	19.92	32.85	52.77	-1.23	54.00	Average
3		2403.722	73.65	32.93	106.58	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.9 °C	Humidity	62.8%
Limit	FCC_Part15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 2412 MHz		

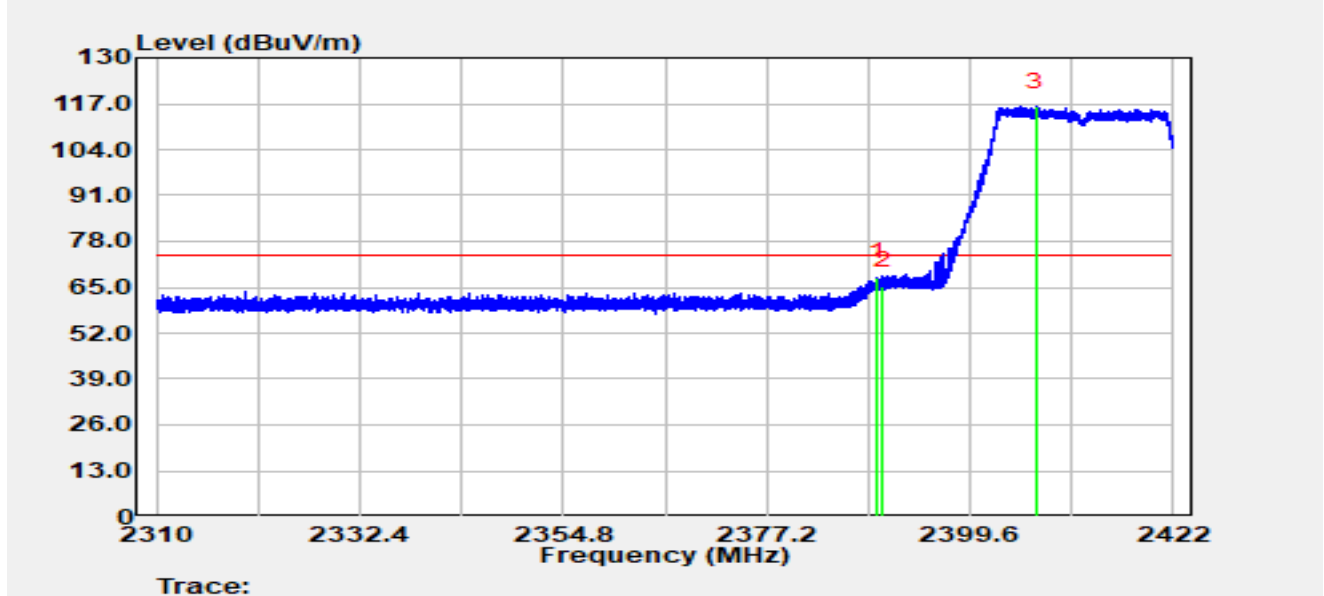


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.453	35.08	32.85	67.93	-6.07	74.00	Peak
2		2390.000	32.49	32.85	65.34	-8.66	74.00	Peak
3		2406.790	83.26	32.95	116.20	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.9 °C	Humidity	62.8%
Limit	FCC_Part15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 2412 MHz		

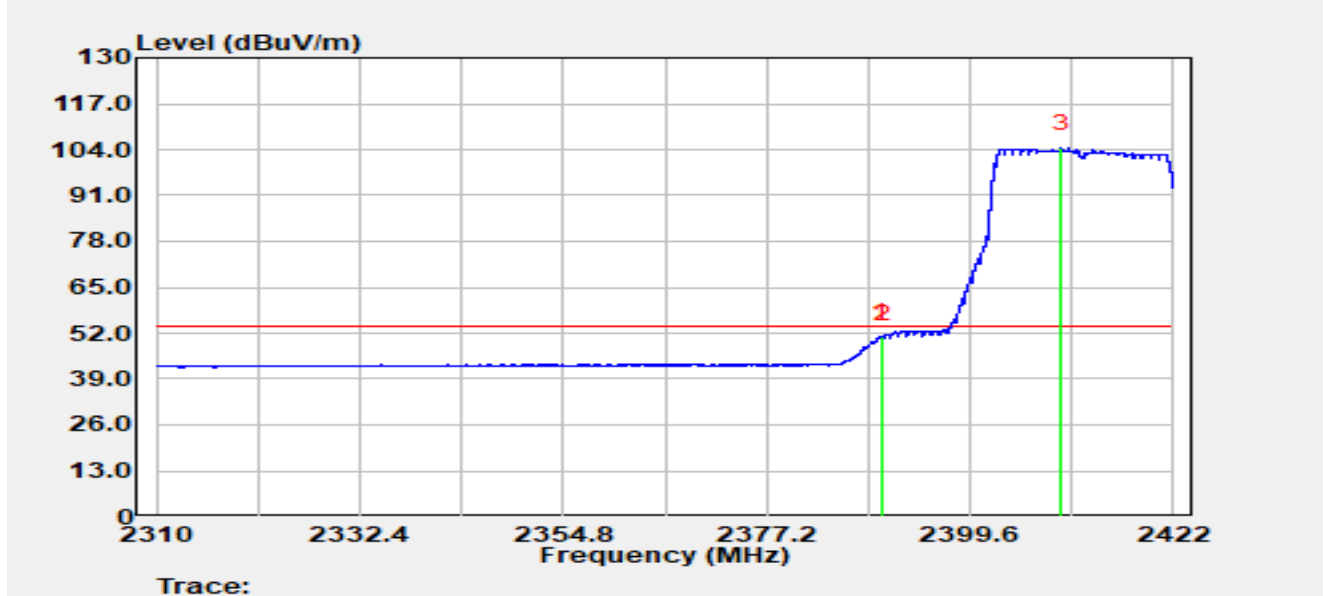


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.912	18.13	32.85	50.98	-3.02	54.00	Average
2		2390.000	17.42	32.85	50.27	-3.73	54.00	Average
3		2409.590	71.40	32.96	104.37	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.9 °C	Humidity	62.8%
Limit	FCC_Part15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 2462 MHz		

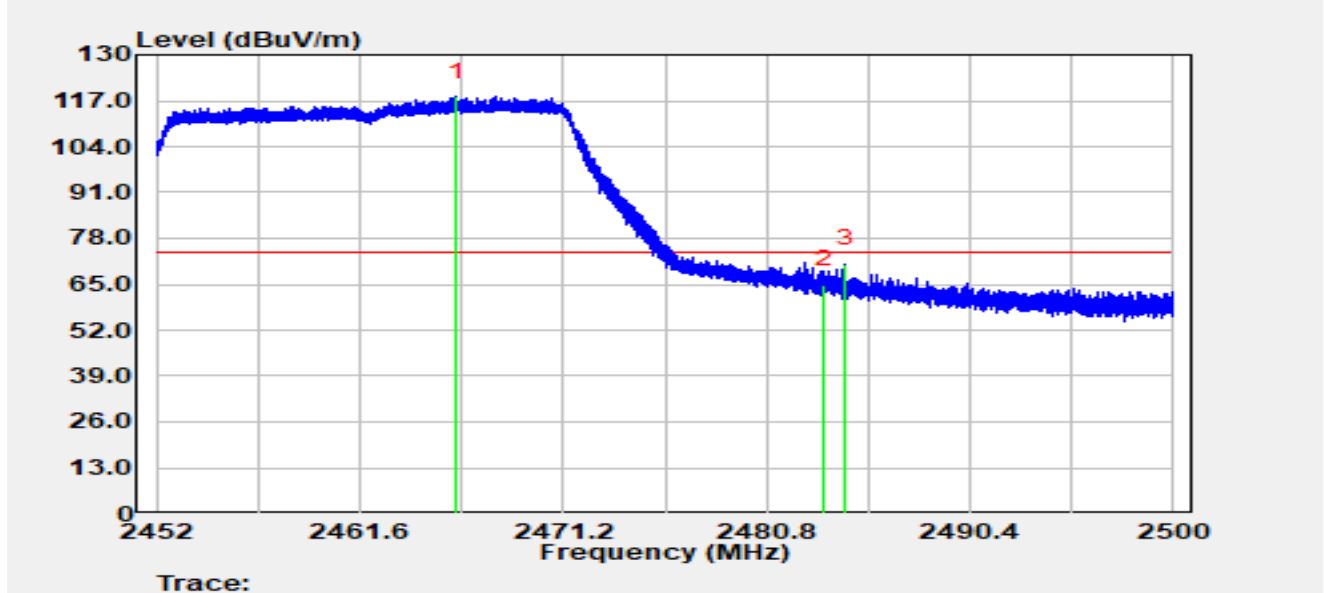


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2466.131	84.86	33.17	118.04	N/A	N/A	Peak
2		2483.500	31.61	33.31	64.92	-9.08	74.00	Peak
3	*	2484.506	37.39	33.31	70.71	-3.29	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.9 °C	Humidity	62.8%
Limit	FCC_Part15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 2462 MHz		

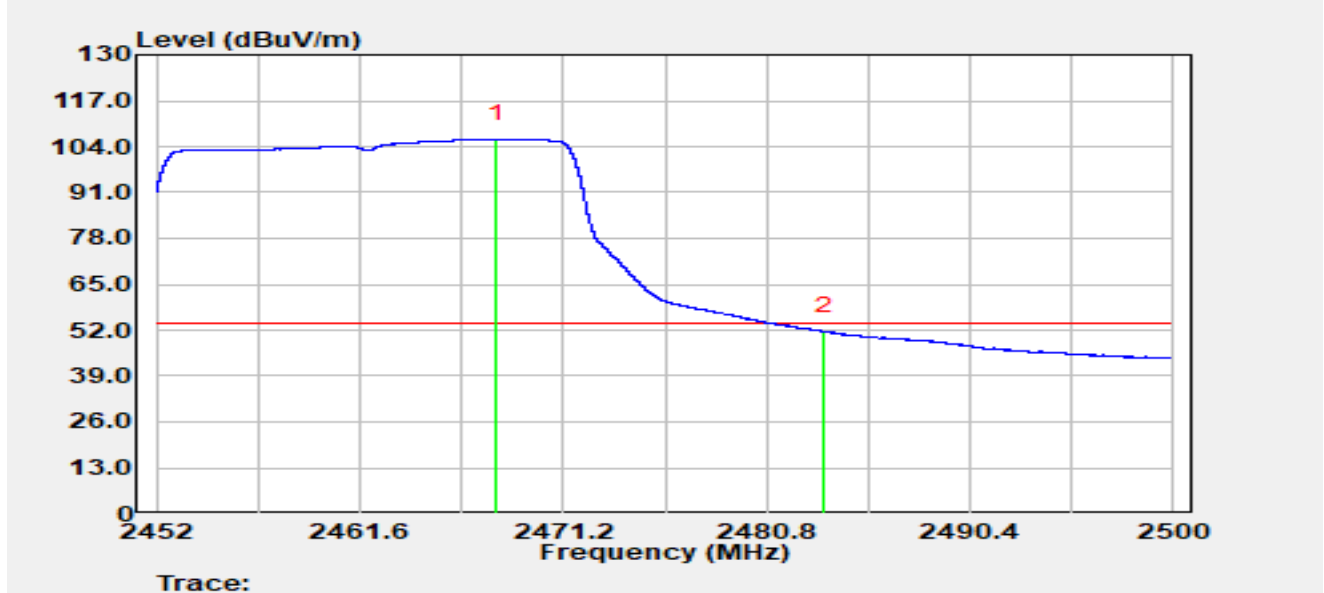


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2468.066	72.94	33.19	106.13	N/A	N/A	Average
2	*	2483.500	18.22	33.31	51.53	-2.47	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.9 °C	Humidity	62.8%
Limit	FCC_Part15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 2462 MHz		

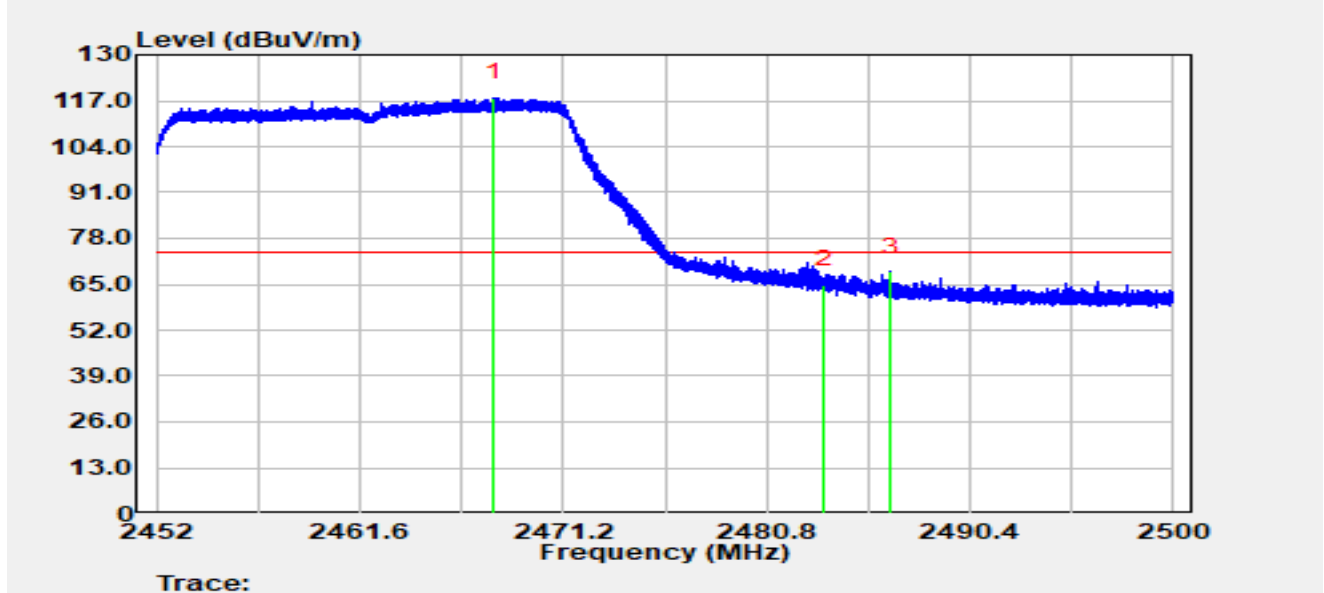


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2467.936	84.78	33.19	117.97	N/A	N/A	Peak
2		2483.500	31.45	33.31	64.76	-9.24	74.00	Peak
3	*	2486.680	35.17	33.33	68.50	-5.50	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.9 °C	Humidity	62.8%
Limit	FCC_Part15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 2462 MHz		

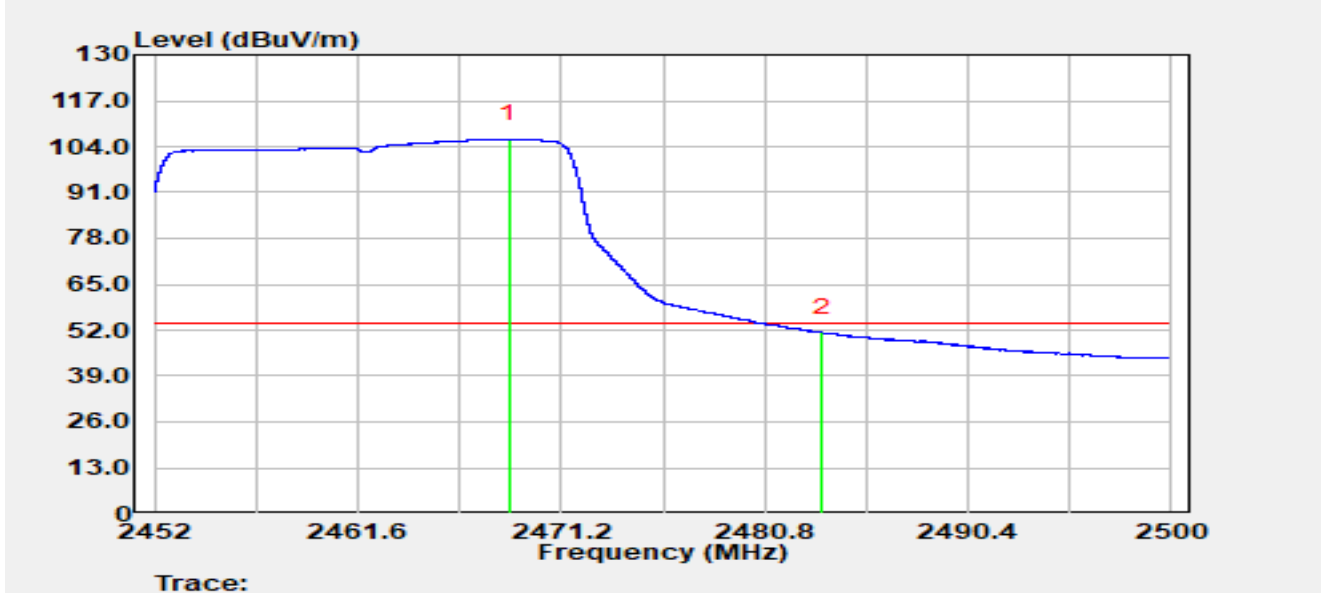


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2468.719	72.86	33.19	106.06	N/A	N/A	Average
2	*	2483.500	17.99	33.31	51.29	-2.71	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.9 °C	Humidity	62.8%
Limit	FCC_Part15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 2422 MHz		

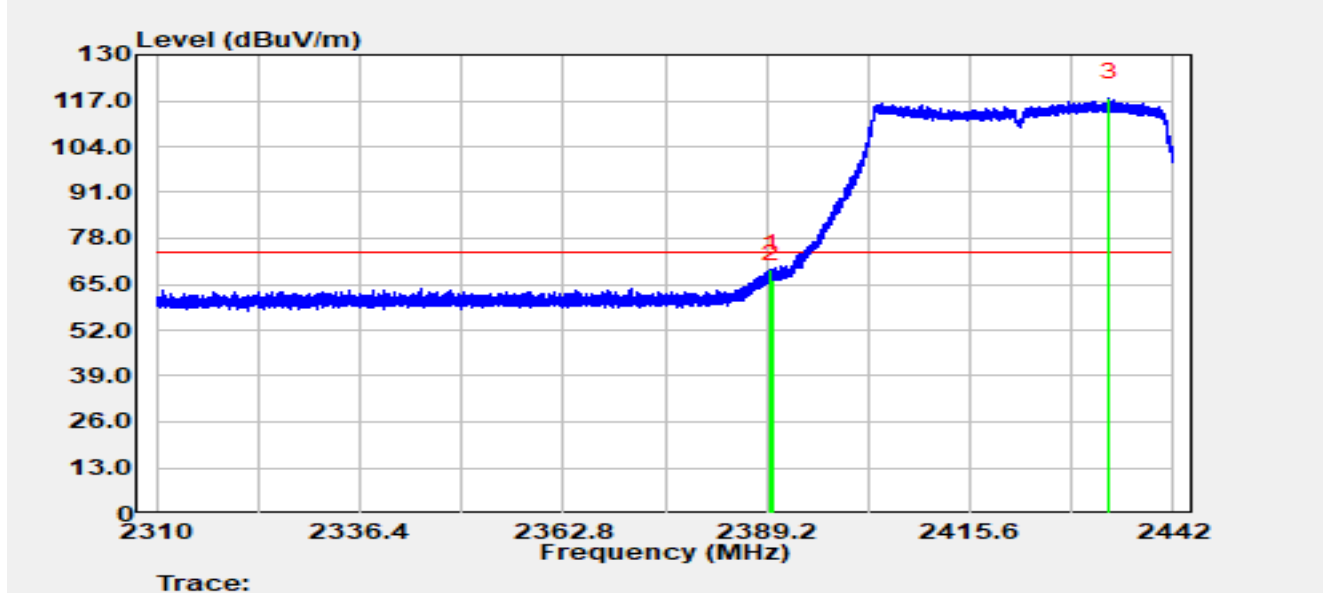


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.768	36.52	32.85	69.37	-4.63	74.00	Peak
2		2390.000	33.53	32.85	66.38	-7.62	74.00	Peak
3		2433.737	84.90	33.06	117.96	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.9 °C	Humidity	62.8%
Limit	FCC_Part15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 2422 MHz		

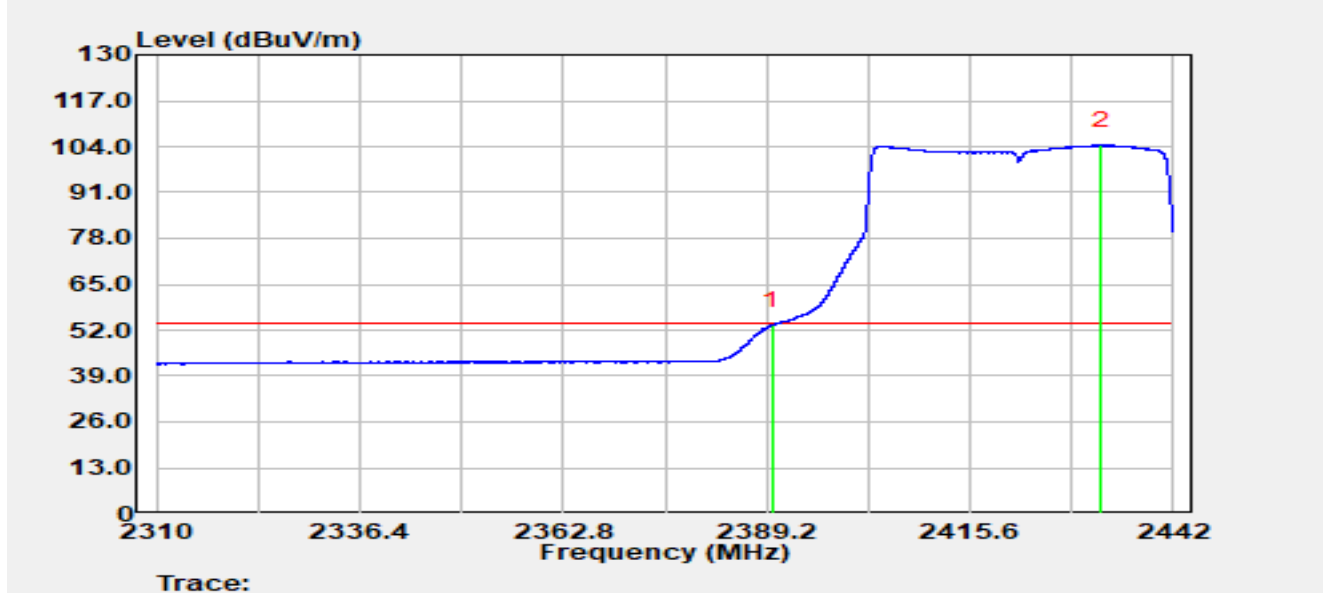


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	20.55	32.85	53.40	-0.60	54.00	Average
2		2432.628	71.27	33.05	104.32	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.9 °C	Humidity	62.8%
Limit	FCC_Part15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 2422 MHz		

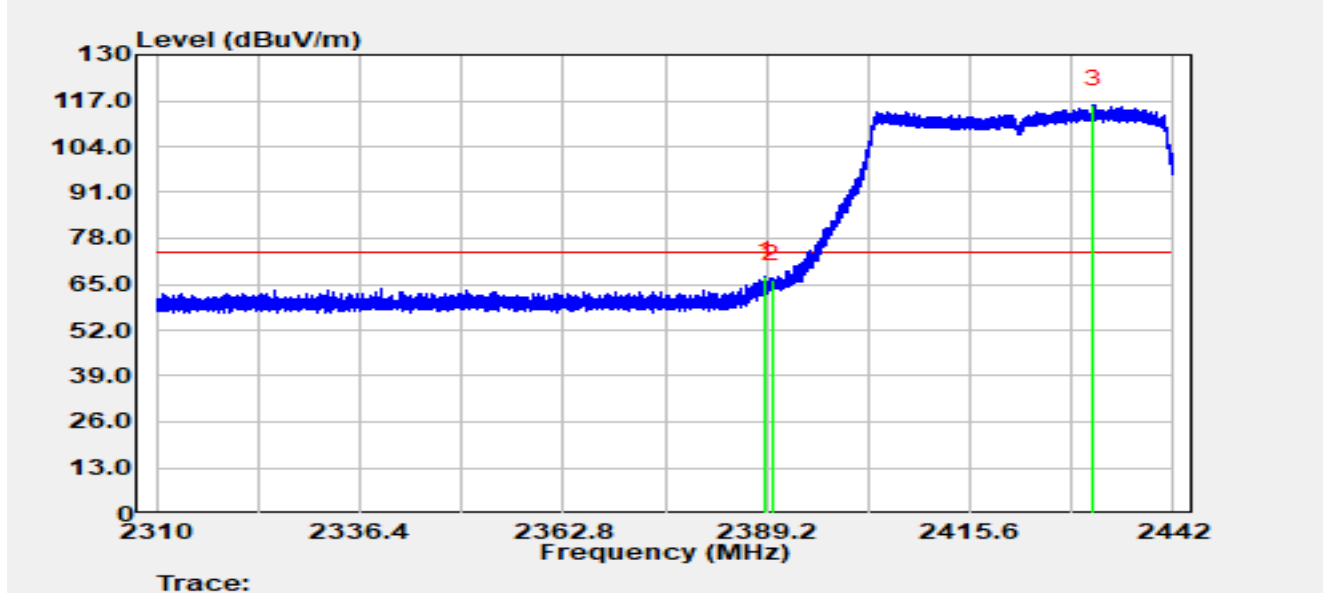


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.108	34.39	32.84	67.23	-6.77	74.00	Peak
2		2390.000	33.57	32.85	66.42	-7.58	74.00	Peak
3		2431.625	82.79	33.05	115.85	N/A	N/A	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.9 °C	Humidity	62.8%
Limit	FCC_Part15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 2422 MHz		

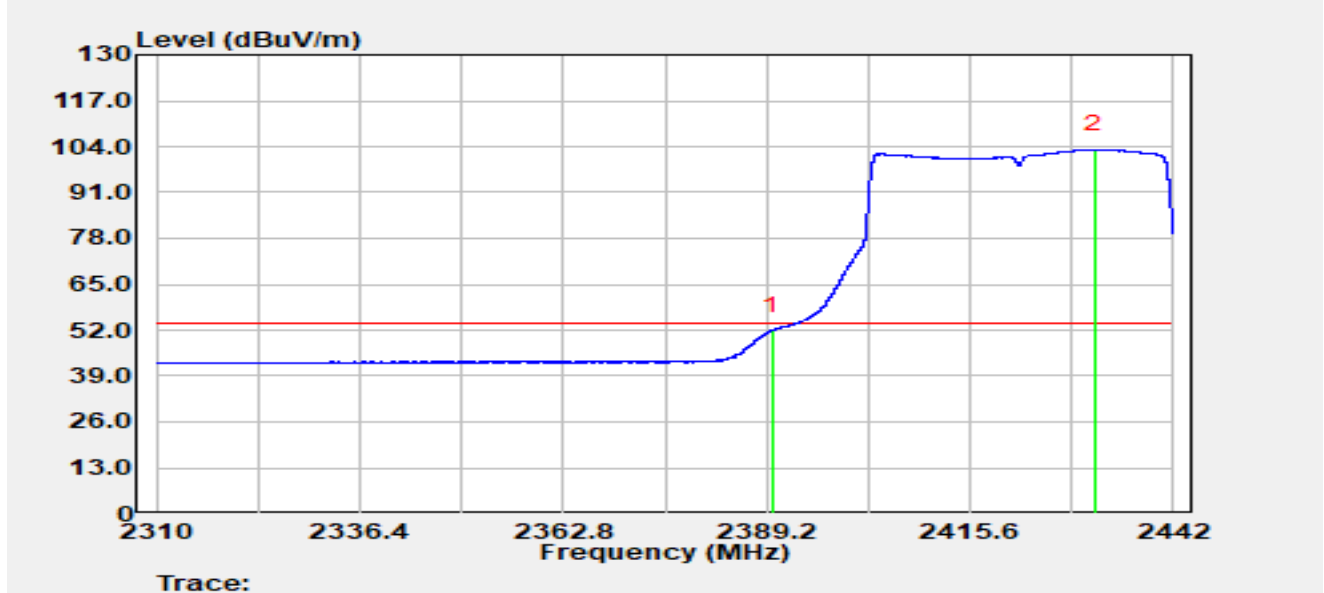


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	19.03	32.85	51.88	-2.12	54.00	Average
2		2431.704	70.07	33.05	103.12	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.9 °C	Humidity	62.8%
Limit	FCC_Part15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 2452 MHz		

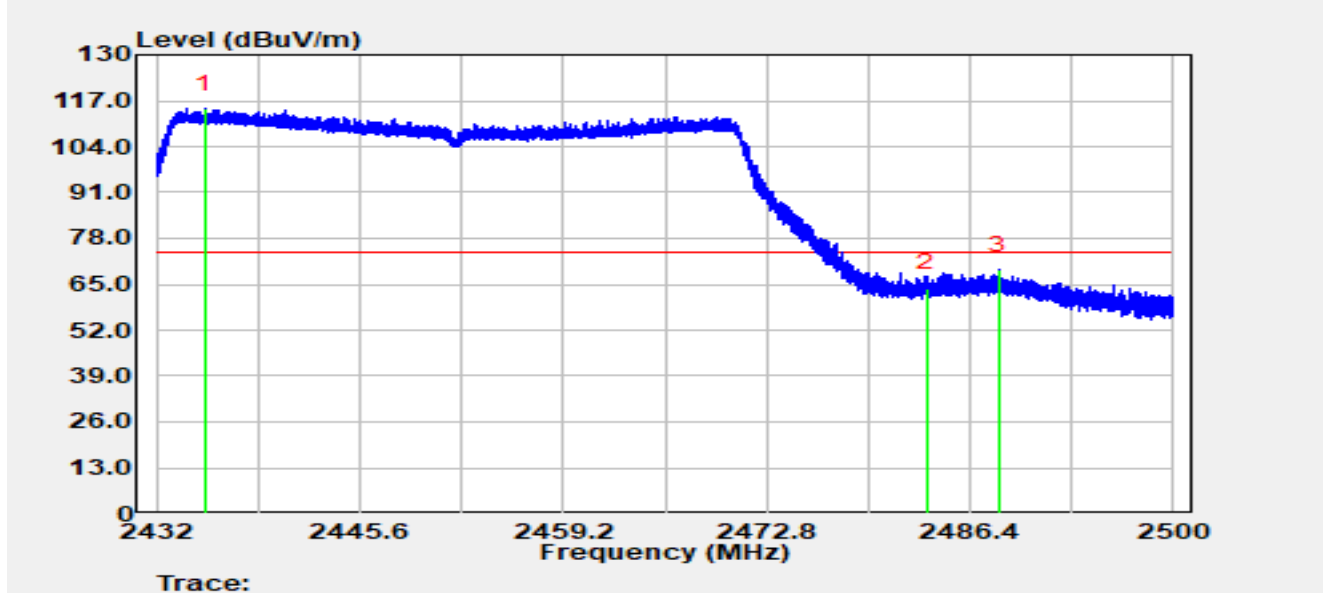


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2435.237	81.66	33.06	114.73	N/A	N/A	Peak
2		2483.500	30.56	33.31	63.87	-10.13	74.00	Peak
3	*	2488.318	35.82	33.34	69.16	-4.84	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.9 °C	Humidity	62.8%
Limit	FCC_Part15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 2452 MHz		

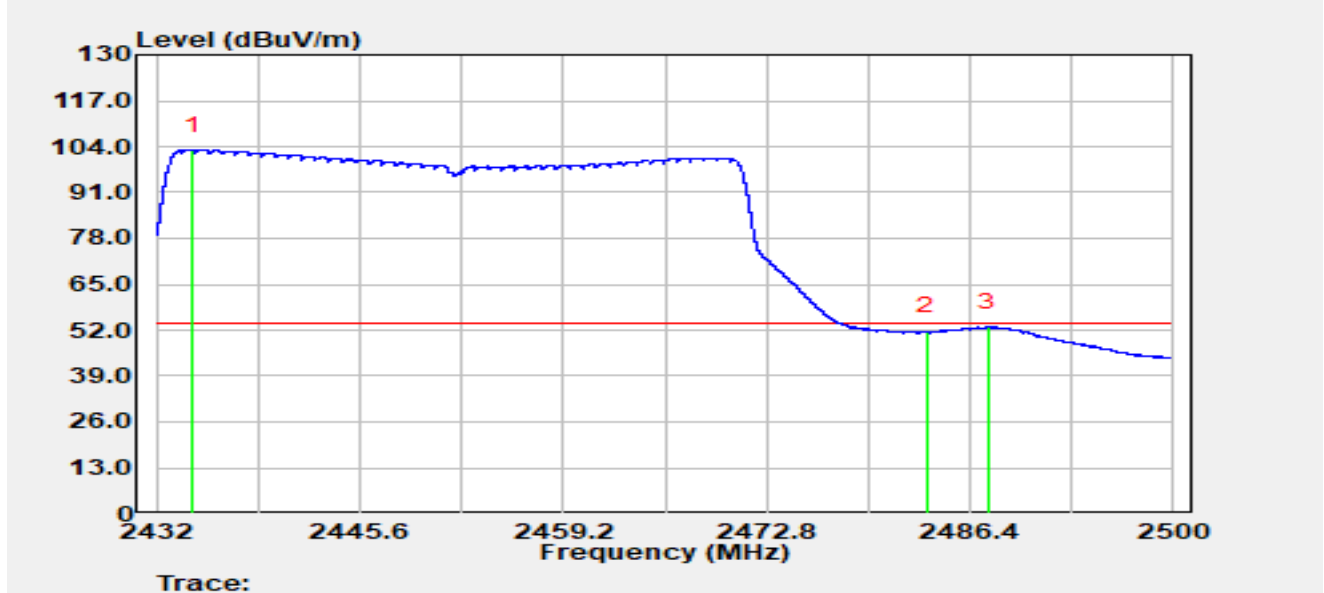


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2434.441	69.93	33.06	102.99	N/A	N/A	Average
2		2483.500	18.21	33.31	51.51	-2.49	54.00	Average
3	*	2487.624	19.48	33.34	52.81	-1.19	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.9 °C	Humidity	62.8%
Limit	FCC_Part15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 2452 MHz		

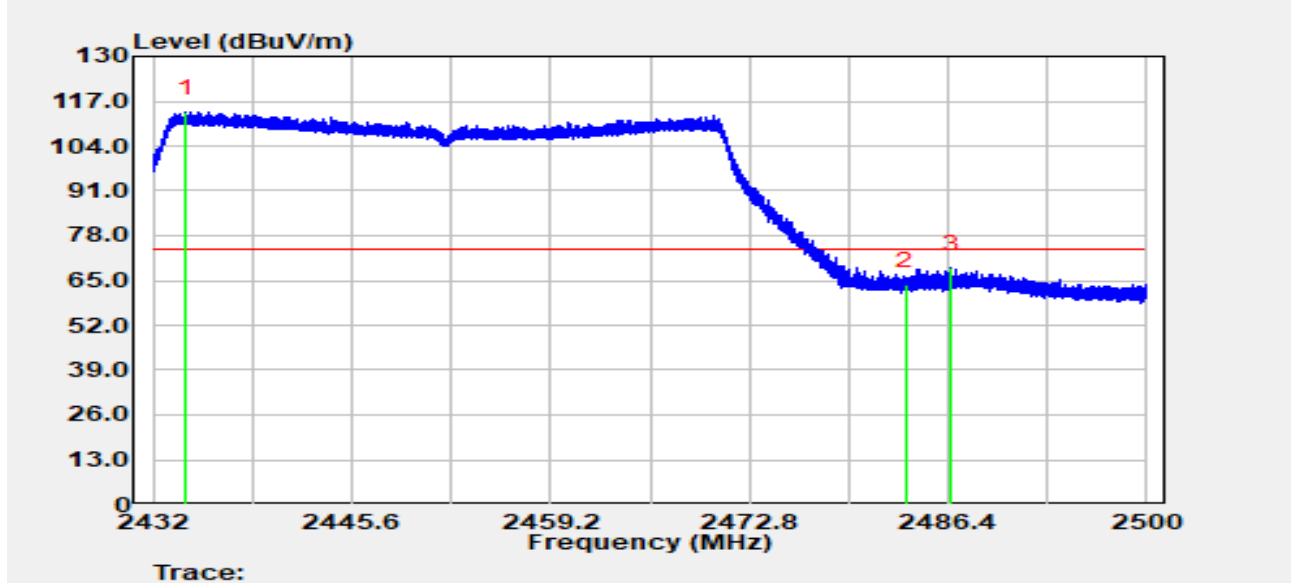


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2434.224	80.68	33.06	113.74	N/A	N/A	Peak
2		2483.500	30.39	33.31	63.70	-10.30	74.00	Peak
3	*	2486.625	35.23	33.33	68.56	-5.44	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.9 °C	Humidity	62.8%
Limit	FCC_Part15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 2452 MHz		

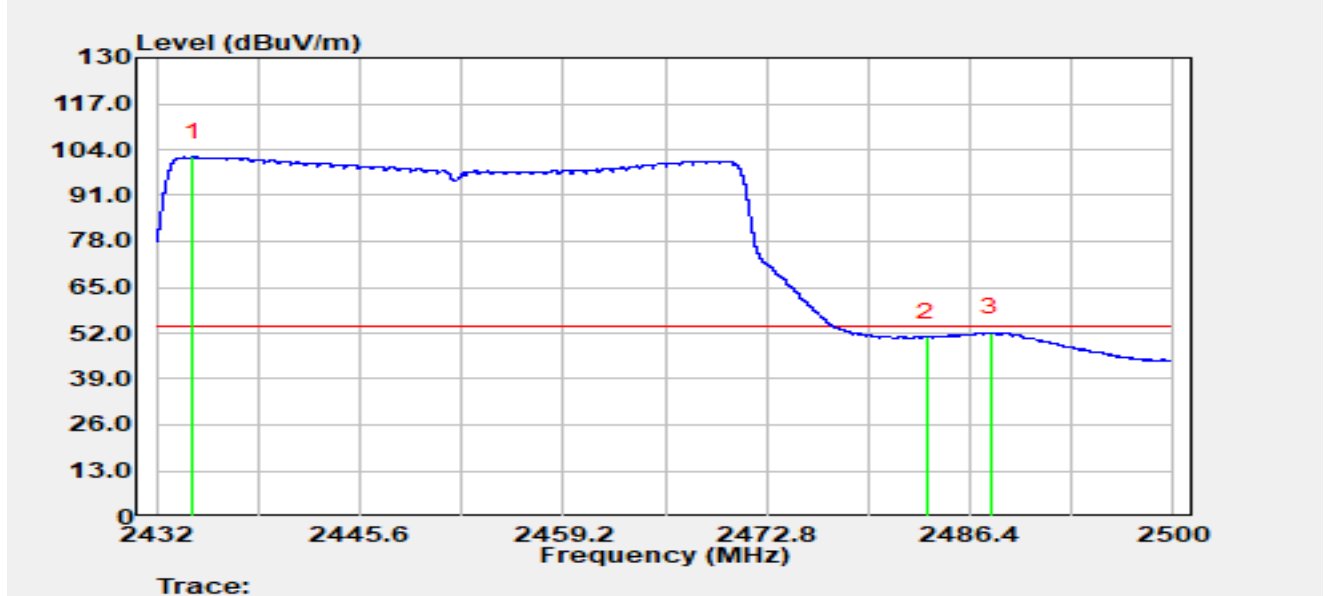


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2434.421	68.77	33.06	101.83	N/A	N/A	Average
2		2483.500	17.55	33.31	50.86	-3.14	54.00	Average
3	*	2487.760	18.79	33.34	52.13	-1.87	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.8 AC Conducted Emissions Test Result

Site	SIP-SR2	Test Date	2025-10-28
Temperature	23.5 °C	Humidity	48.9%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Poli Cai
Test Voltage	AC 120 V/60 Hz	Polarity	Line
Test Mode	Transmit by 802.11n-HT20 at 2412 MHz		

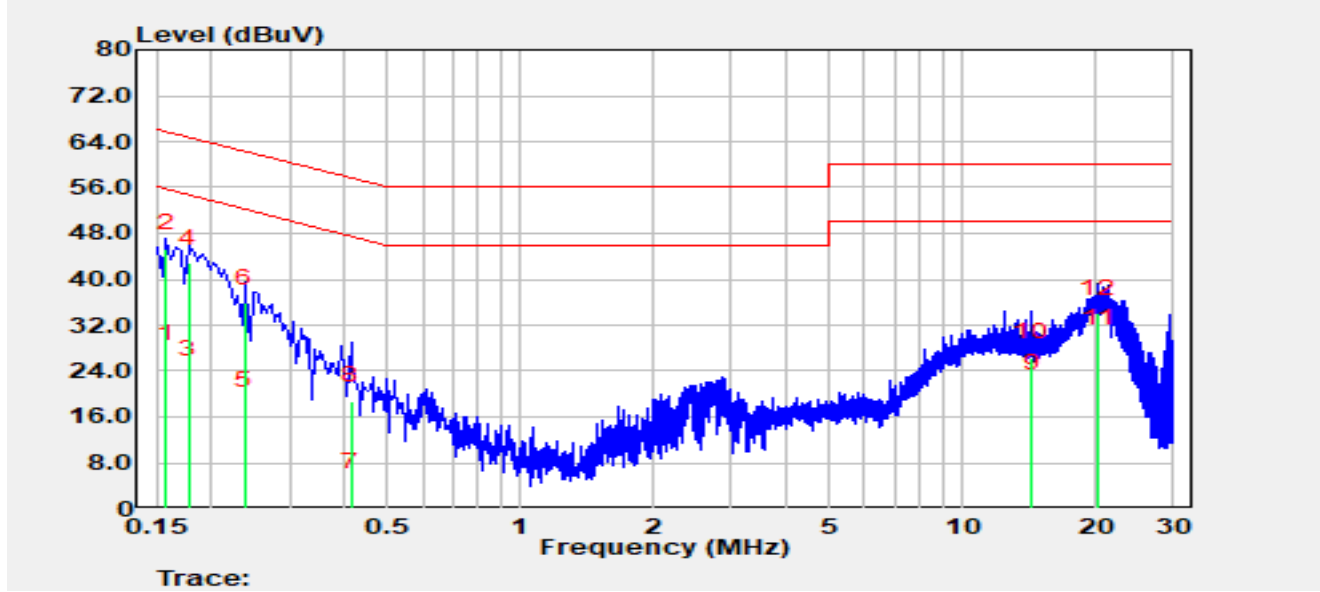


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.158	16.61	9.63	26.25	-29.32	55.57	Average
2	*	0.158	35.80	9.63	45.43	-20.14	65.57	QP
3		0.178	13.79	9.64	23.43	-31.15	54.58	Average
4		0.178	33.08	9.64	42.72	-21.86	64.58	QP
5		0.238	8.16	9.70	17.86	-34.31	52.17	Average
6		0.238	26.12	9.70	35.82	-26.35	62.17	QP
7		0.414	-5.98	9.74	3.76	-43.81	47.57	Average
8		0.414	9.05	9.74	18.79	-38.78	57.57	QP
9		14.330	10.56	10.43	20.99	-29.01	50.00	Average
10		14.330	15.90	10.43	26.33	-33.67	60.00	QP
11		20.260	18.22	10.48	28.71	-21.29	50.00	Average
12		20.260	23.57	10.48	34.06	-25.94	60.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
- Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Site	SIP-SR2	Test Date	2025-10-28
Temperature	23.5 °C	Humidity	48.9%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Poli Cai
Test Voltage	AC 120 V/60 Hz	Polarity	Neutral
Test Mode	Transmit by 802.11n-HT20 at 2412 MHz		

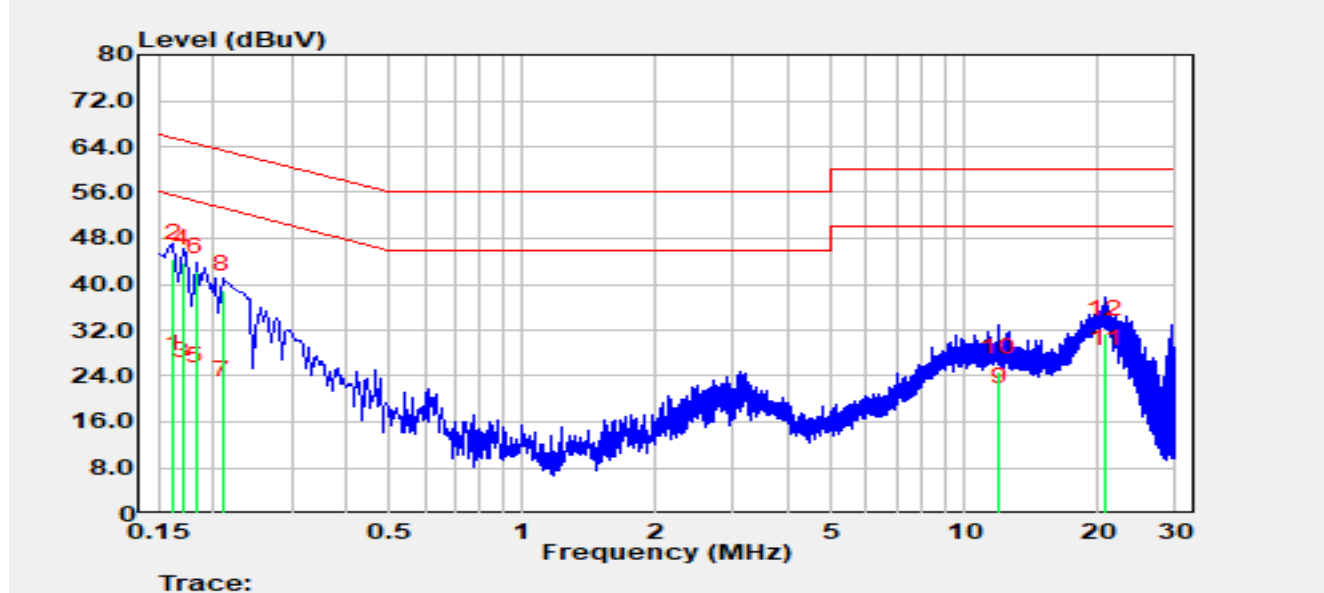

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.162	15.52	9.61	25.13	-30.23	55.36	Average
2	*	0.162	34.85	9.61	44.46	-20.90	65.36	QP
3		0.170	14.53	9.61	24.14	-30.82	54.96	Average
4		0.170	34.06	9.61	43.67	-21.29	64.96	QP
5		0.182	13.36	9.62	22.97	-31.42	54.39	Average
6		0.182	32.51	9.62	42.12	-22.27	64.39	QP
7		0.210	11.02	9.66	20.68	-32.52	53.21	Average
8		0.210	29.42	9.66	39.08	-24.13	63.21	QP
9		11.990	9.04	10.31	19.35	-30.65	50.00	Average
10		11.990	14.34	10.31	24.64	-35.36	60.00	QP
11		20.890	15.59	10.48	26.07	-23.93	50.00	Average
12		20.890	20.77	10.48	31.25	-28.75	60.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
- Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Appendix B - Test Setup Photograph

Refer to "R25S1115122-UT" file.

Appendix C - EUT Photograph

Refer to "R25S1115122-UE" file.

_____ The End _____