


Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

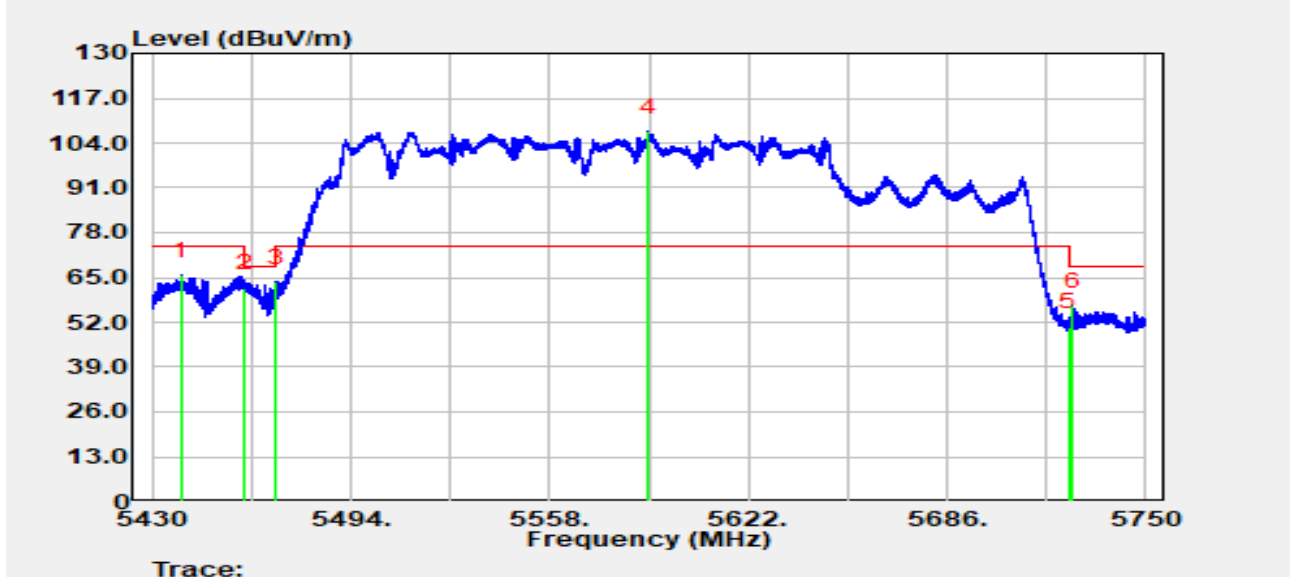


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5439.280	67.46	-1.79	65.67	-8.33	74.00	Peak
2		5460.000	62.61	-0.69	61.92	-6.28	68.20	Peak
3	*	5470.000	62.70	1.00	63.70	-4.50	68.20	Peak
4		5589.936	59.62	47.64	107.26	N/A	N/A	Peak
5		5725.000	49.66	1.01	50.66	-17.54	68.20	Peak
6		5726.320	56.45	0.34	56.79	-11.41	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

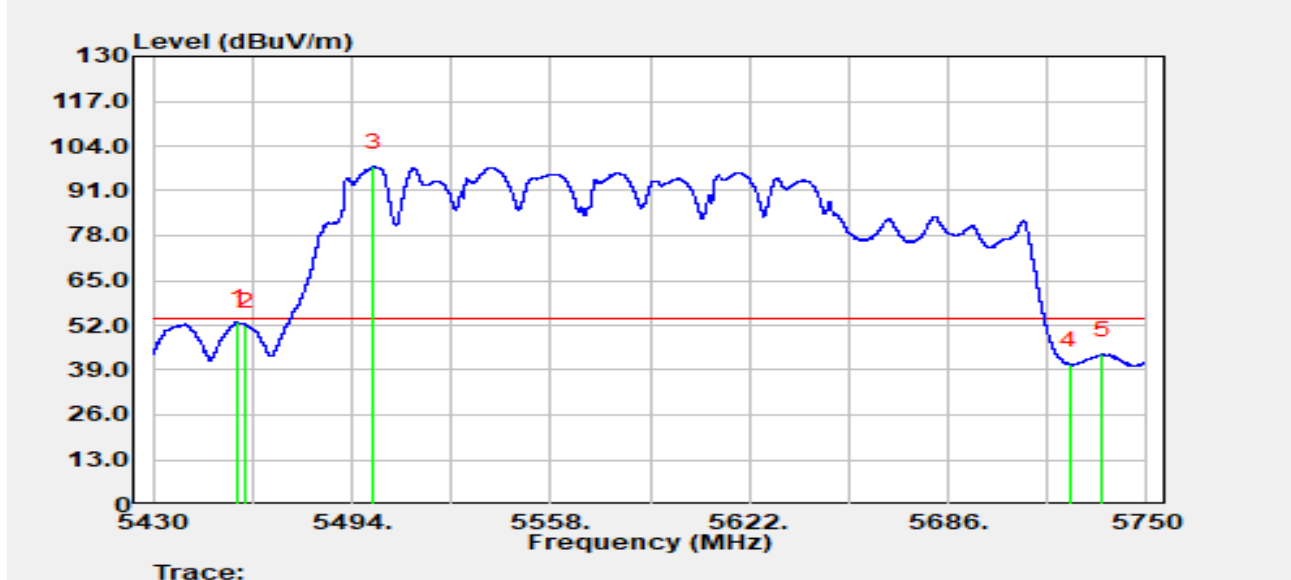


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5457.168	53.80	-0.90	52.89	-1.11	54.00	Average
2		5460.000	52.64	-0.69	51.95	-2.05	54.00	Average
3		5501.104	56.19	41.76	97.95	N/A	N/A	Average
4		5725.000	39.62	1.01	40.63	-13.37	54.00	Average
5		5735.696	44.87	-1.41	43.47	-10.53	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5180 MHz		

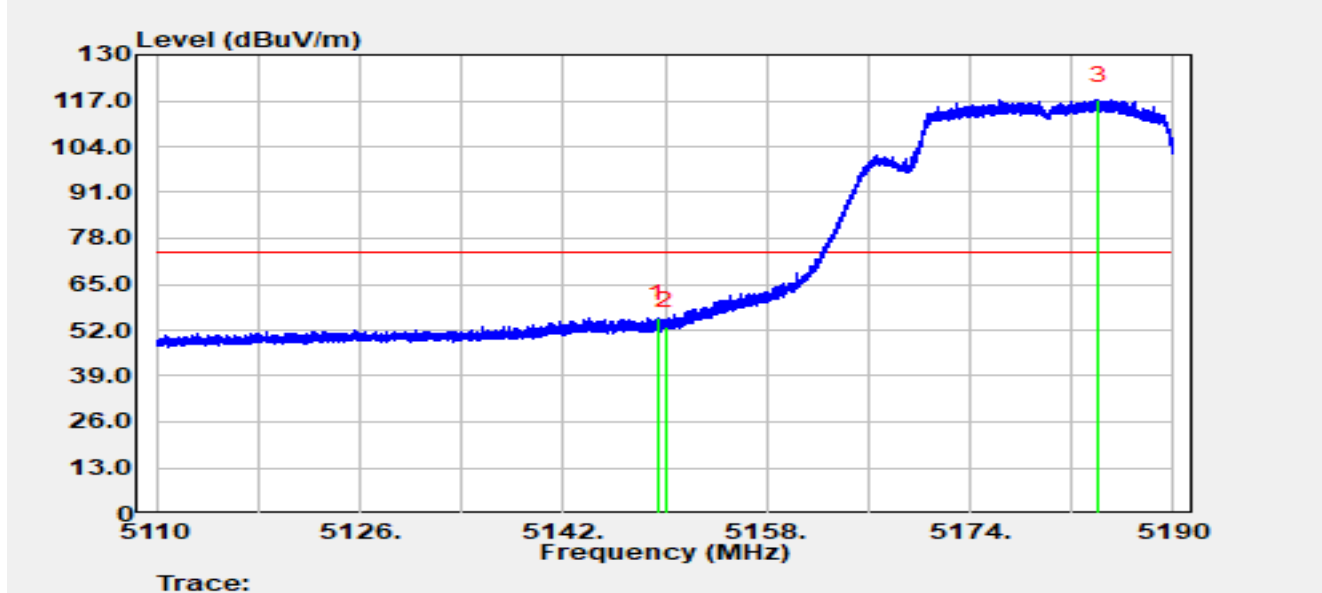


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.464	56.10	-0.85	55.25	-18.75	74.00	Peak
2		5150.000	53.63	-0.54	53.09	-20.91	74.00	Peak
3		5184.088	77.80	39.39	117.19	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5180 MHz		

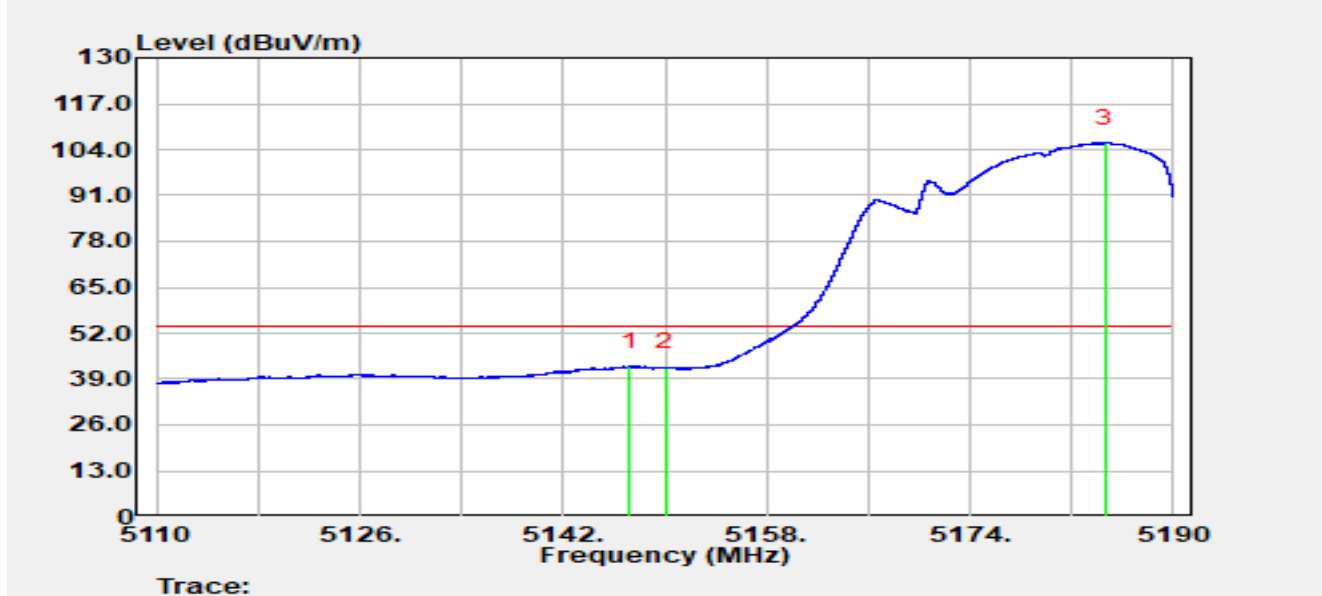


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.224	43.68	-1.11	42.57	-11.43	54.00	Average
2		5150.000	42.78	-0.54	42.24	-11.76	54.00	Average
3		5184.680	67.13	38.68	105.81	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5180 MHz		

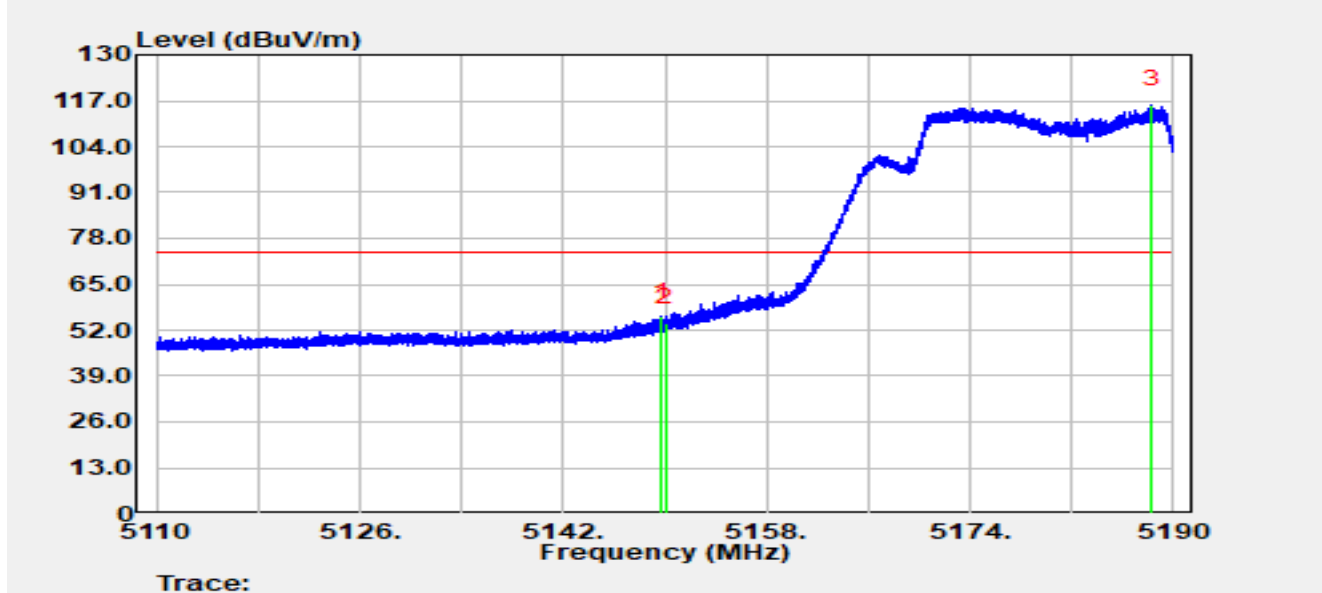


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.720	56.38	-0.70	55.68	-18.32	74.00	Peak
2		5150.000	54.59	-0.54	54.05	-19.95	74.00	Peak
3		5188.328	76.57	39.30	115.87	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5180 MHz		

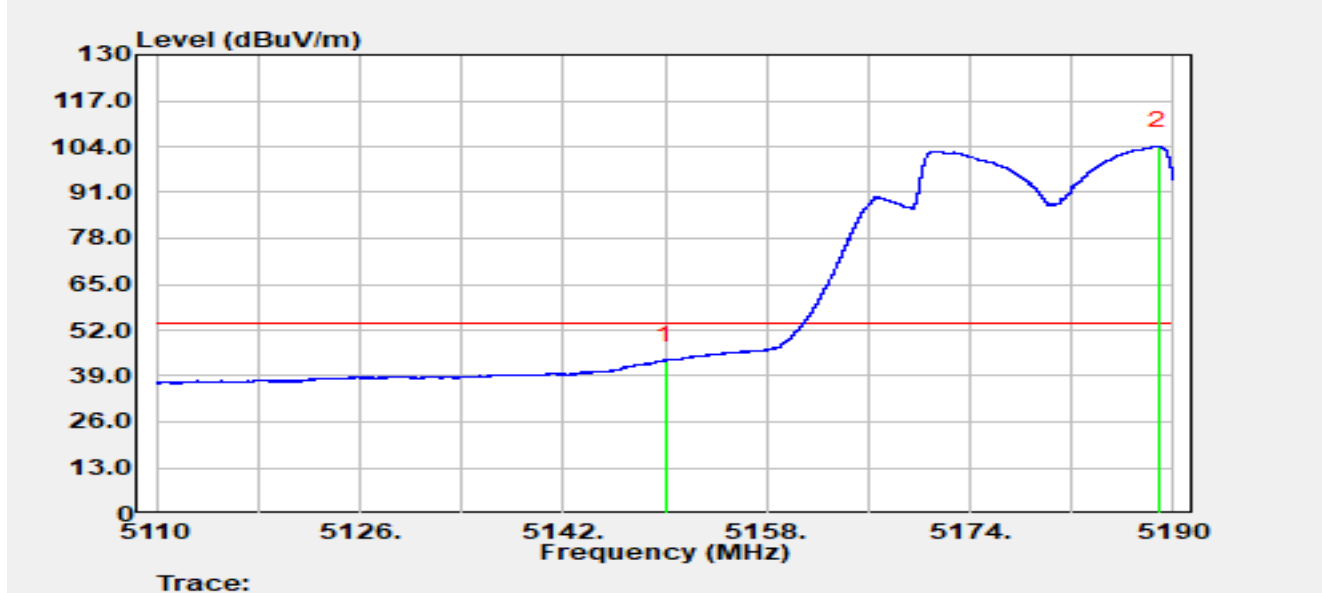


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	43.94	-0.54	43.40	-10.60	54.00	Average
2		5188.864	64.04	40.04	104.07	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5320 MHz		

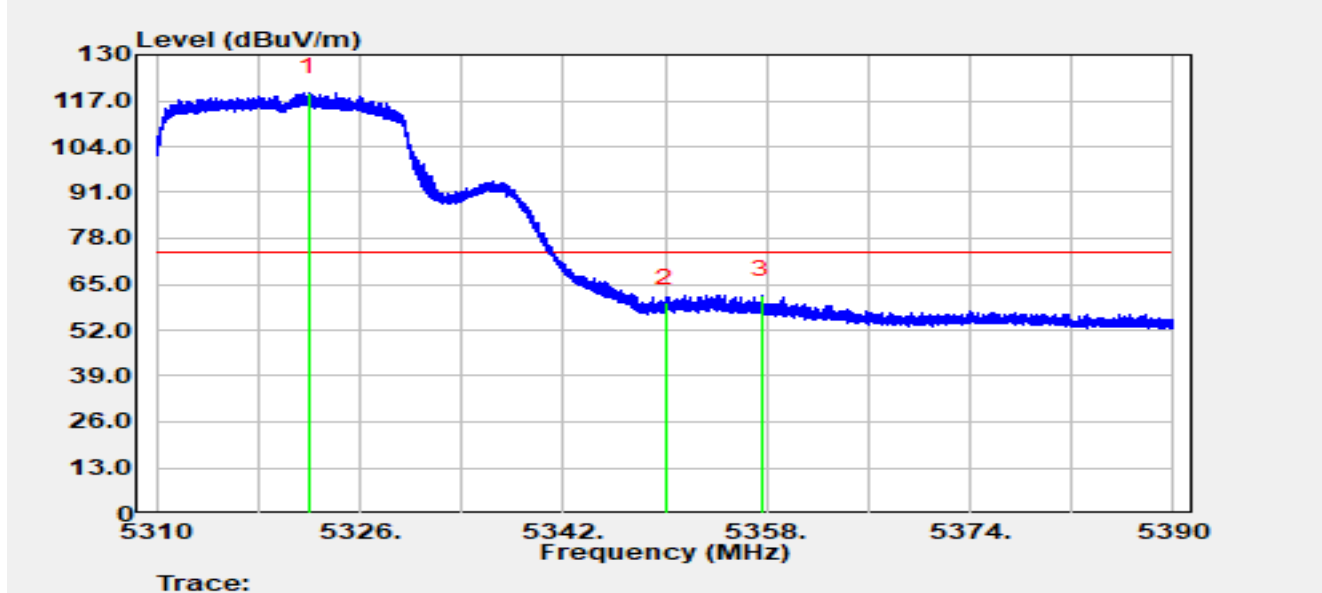


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5321.928	75.68	43.62	119.29	N/A	N/A	Peak
2		5350.000	57.40	2.28	59.68	-14.32	74.00	Peak
3	*	5357.640	62.51	-0.50	62.01	-11.99	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5320 MHz		

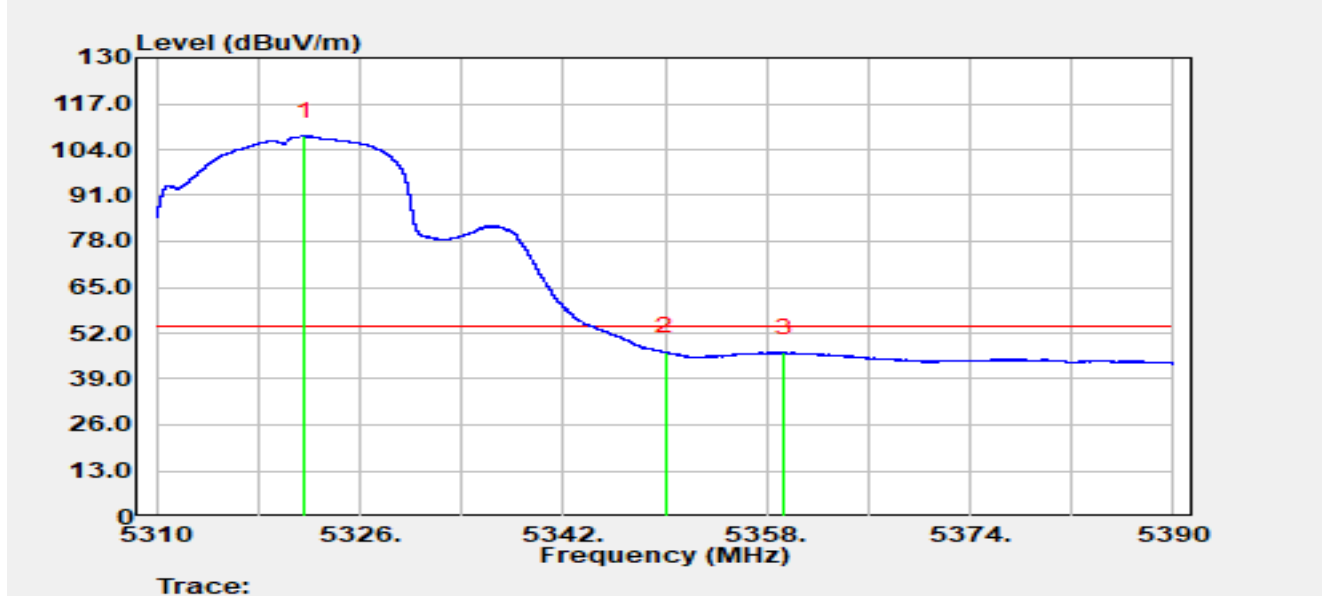


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5321.656	64.21	43.65	107.86	N/A	N/A	Average
2		5350.000	44.35	2.28	46.63	-7.37	54.00	Average
3	*	5359.352	47.31	-0.77	46.53	-7.47	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5320 MHz		

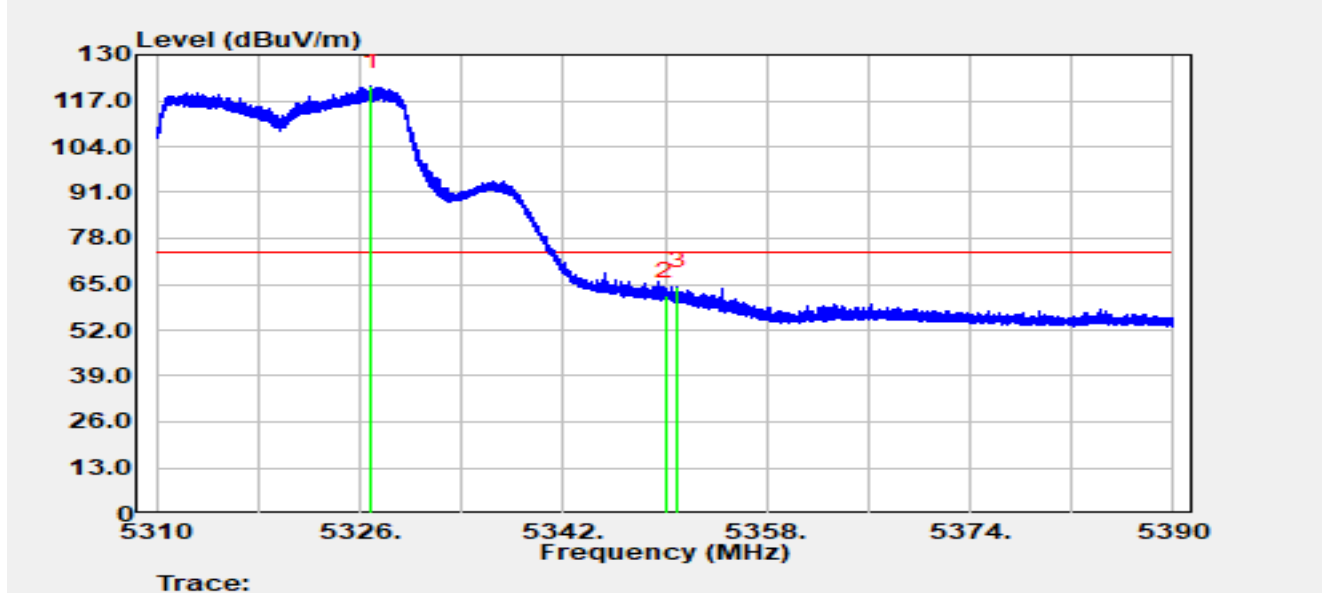


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5326.856	79.72	41.43	121.14	N/A	N/A	Peak
2		5350.000	59.35	2.28	61.63	-12.37	74.00	Peak
3	*	5351.040	62.80	1.61	64.41	-9.59	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5320 MHz		

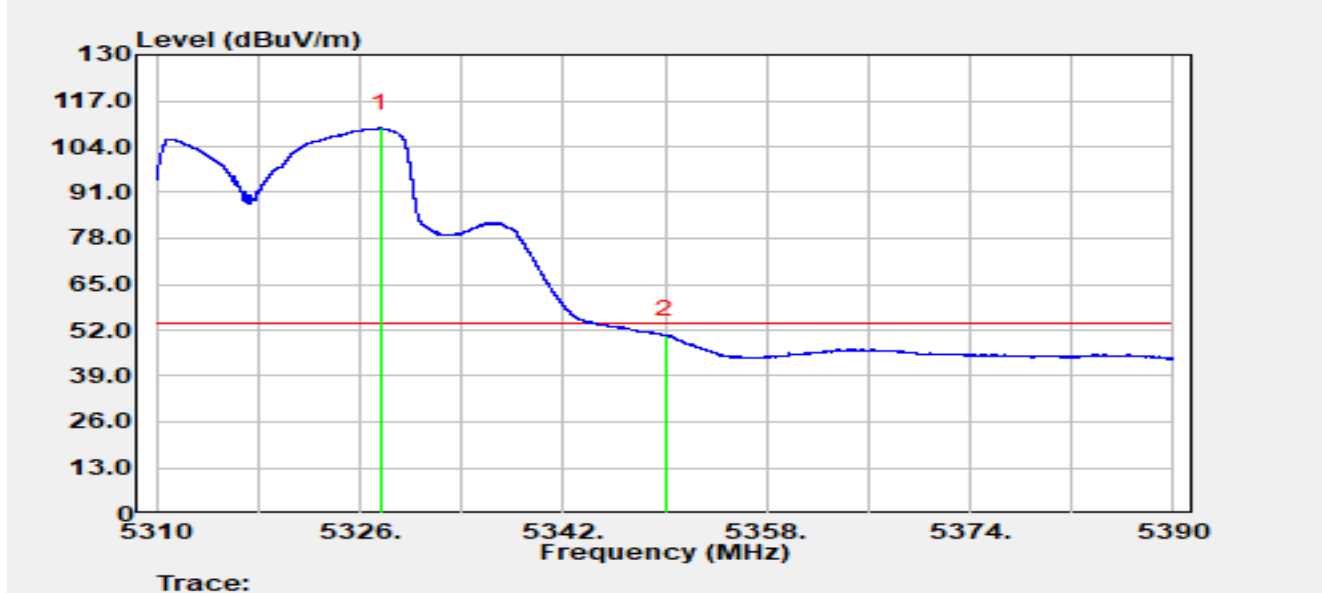


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5327.632	67.32	41.90	109.22	N/A	N/A	Average
2	*	5350.000	48.26	2.28	50.54	-3.46	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

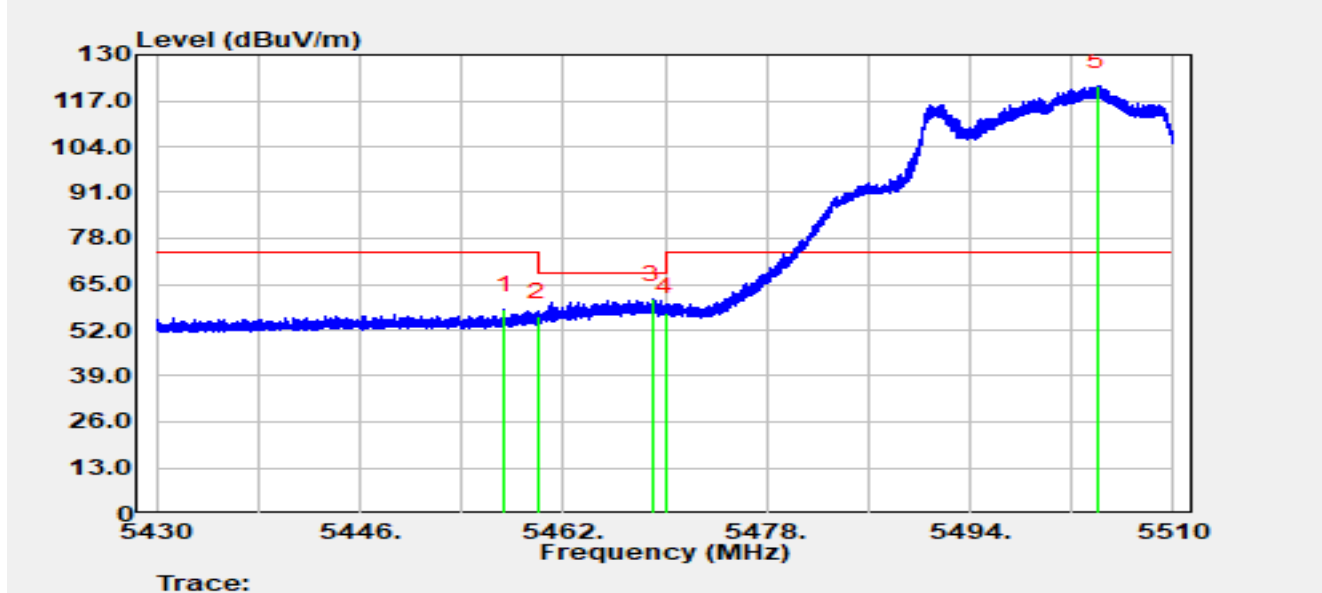


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.416	58.70	-0.91	57.79	-16.21	74.00	Peak
2		5460.000	56.48	-0.69	55.78	-12.42	68.20	Peak
3	*	5468.976	60.11	0.67	60.77	-7.43	68.20	Peak
4		5470.000	56.00	1.00	57.00	-11.20	68.20	Peak
5		5503.984	74.97	46.17	121.14	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

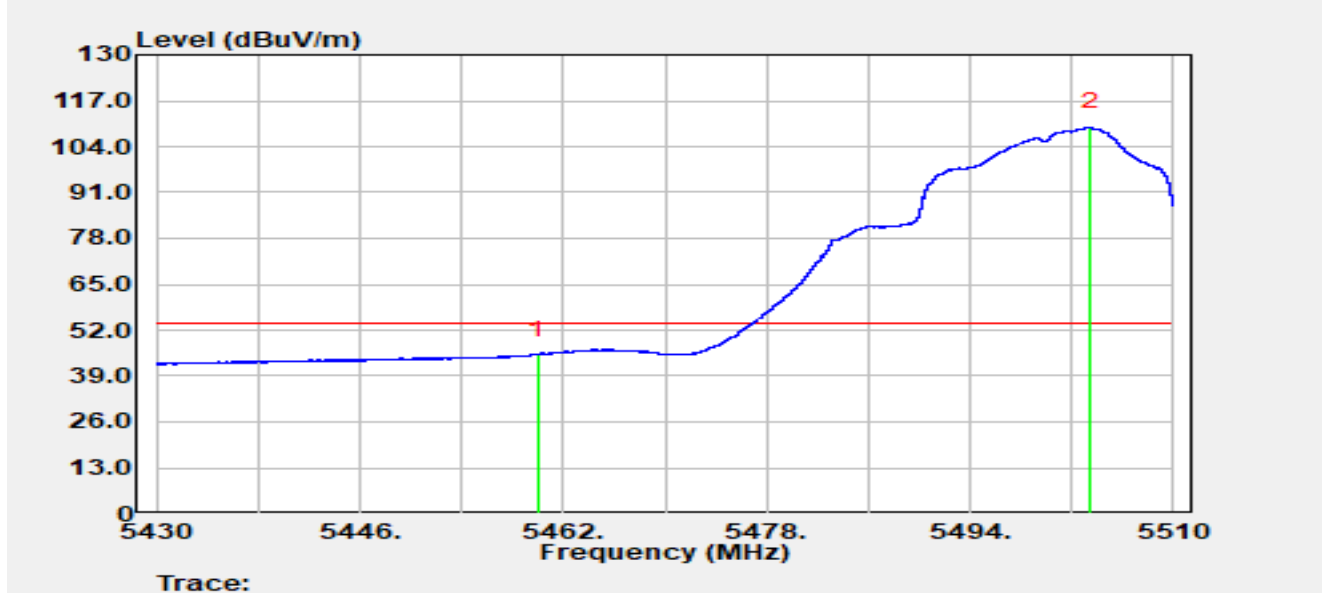


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	45.80	-0.69	45.11	-8.89	54.00	Average
2		5503.456	63.93	45.49	109.42	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

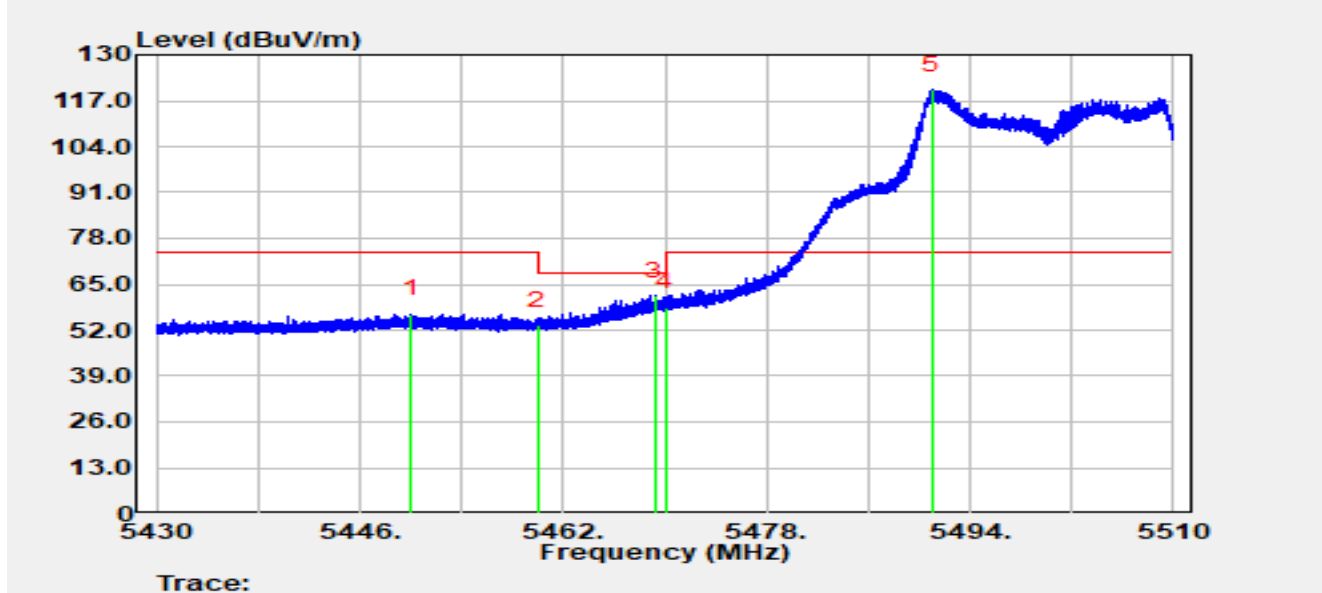


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5450.024	57.90	-1.27	56.63	-17.37	74.00	Peak
2		5460.000	53.97	-0.69	53.27	-14.93	68.20	Peak
3	*	5469.240	60.95	0.79	61.74	-6.46	68.20	Peak
4		5470.000	57.51	1.00	58.51	-9.69	68.20	Peak
5		5491.024	72.76	47.27	120.03	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

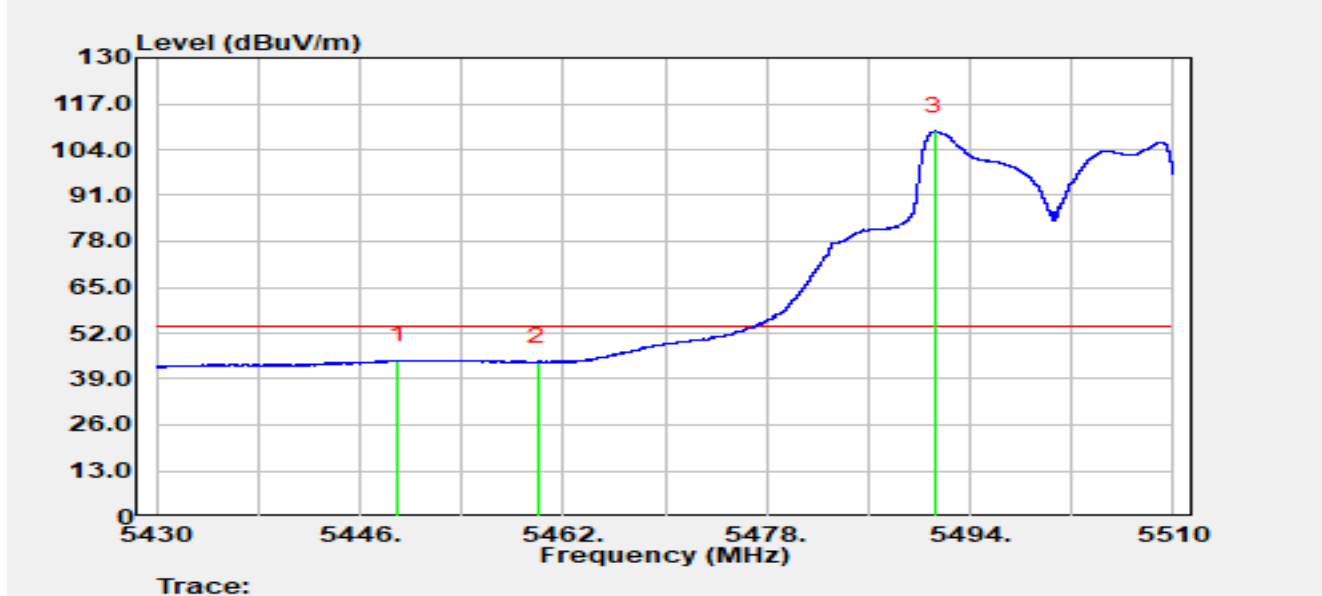


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5449.008	45.74	-1.36	44.37	-9.63	54.00	Average
2		5460.000	44.58	-0.69	43.88	-10.12	54.00	Average
3		5491.192	61.67	47.49	109.15	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5700 MHz		

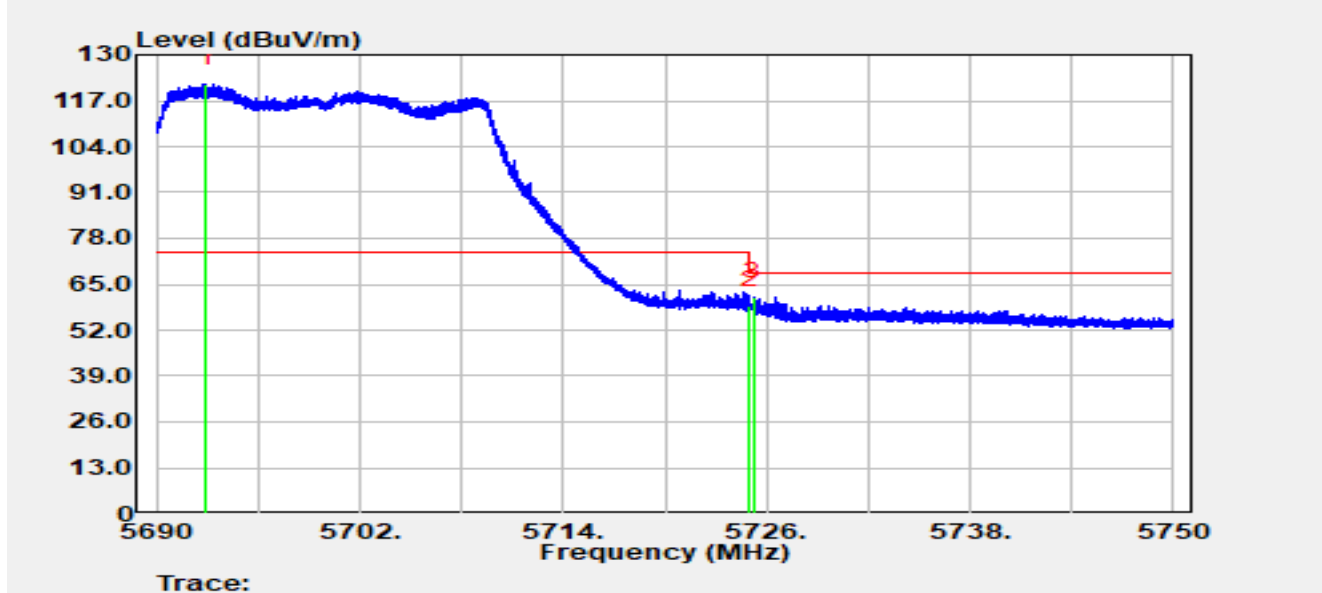


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5692.892	78.04	43.84	121.89	N/A	N/A	Peak
2		5725.000	57.92	1.01	58.92	-9.28	68.20	Peak
3	*	5725.262	60.63	0.86	61.48	-6.72	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5700 MHz		

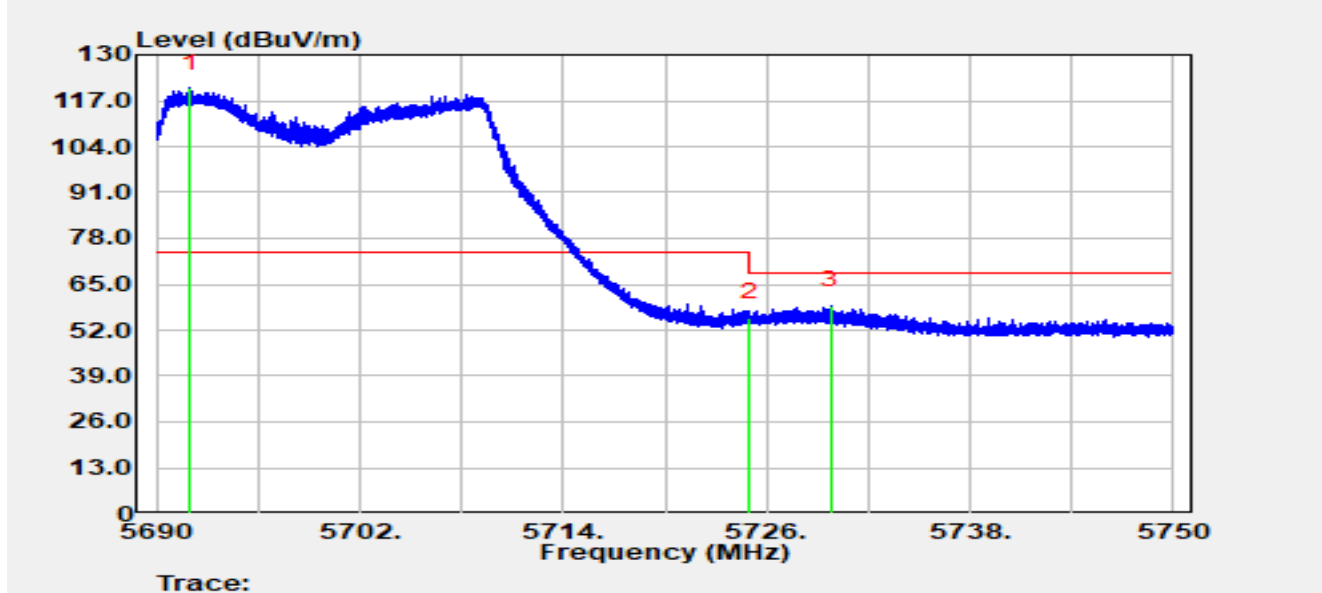


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5691.974	77.31	43.23	120.54	N/A	N/A	Peak
2		5725.000	54.62	1.01	55.62	-12.58	68.20	Peak
3	*	5729.780	59.78	-0.73	59.05	-9.15	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5745 MHz		

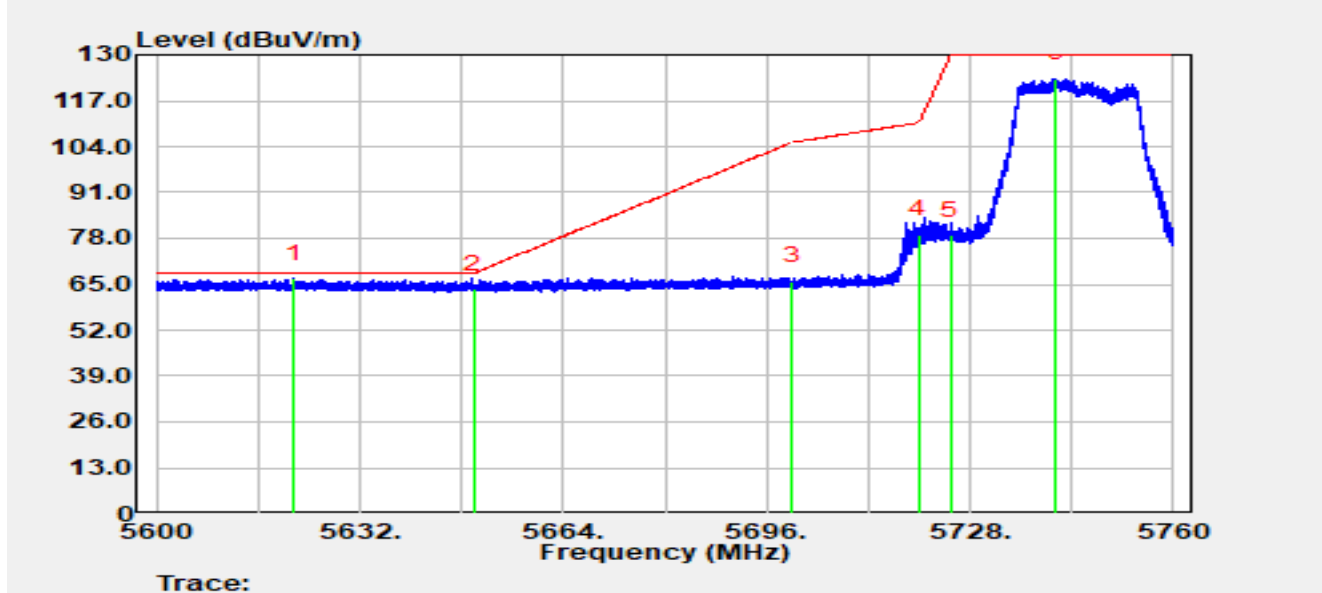


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5621.552	69.92	-3.37	66.55	-1.65	68.20	Peak
2		5650.000	67.19	-3.65	63.54	-4.66	68.20	Peak
3		5700.000	69.33	-3.47	65.86	-39.34	105.20	Peak
4		5720.000	82.46	-3.45	79.00	-31.80	110.80	Peak
5		5725.000	82.39	-3.47	78.92	-51.08	130.00	Peak
6		5741.552	126.96	-3.62	123.34	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5745 MHz		

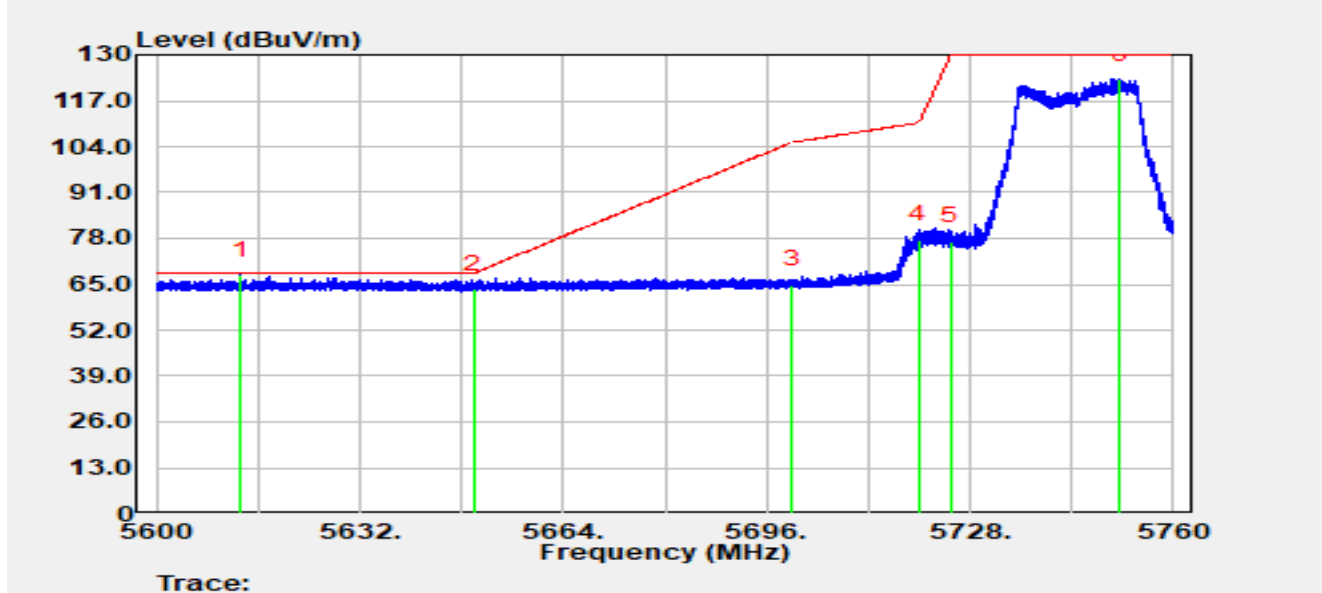


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5613.216	70.95	-3.46	67.49	-0.71	68.20	Peak
2		5650.000	67.29	-3.65	63.64	-4.56	68.20	Peak
3		5700.000	68.47	-3.47	65.00	-40.20	105.20	Peak
4		5720.000	81.16	-3.45	77.71	-33.09	110.80	Peak
5		5725.000	80.52	-3.47	77.05	-52.95	130.00	Peak
6		5751.600	126.77	-3.65	123.12	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5825 MHz		

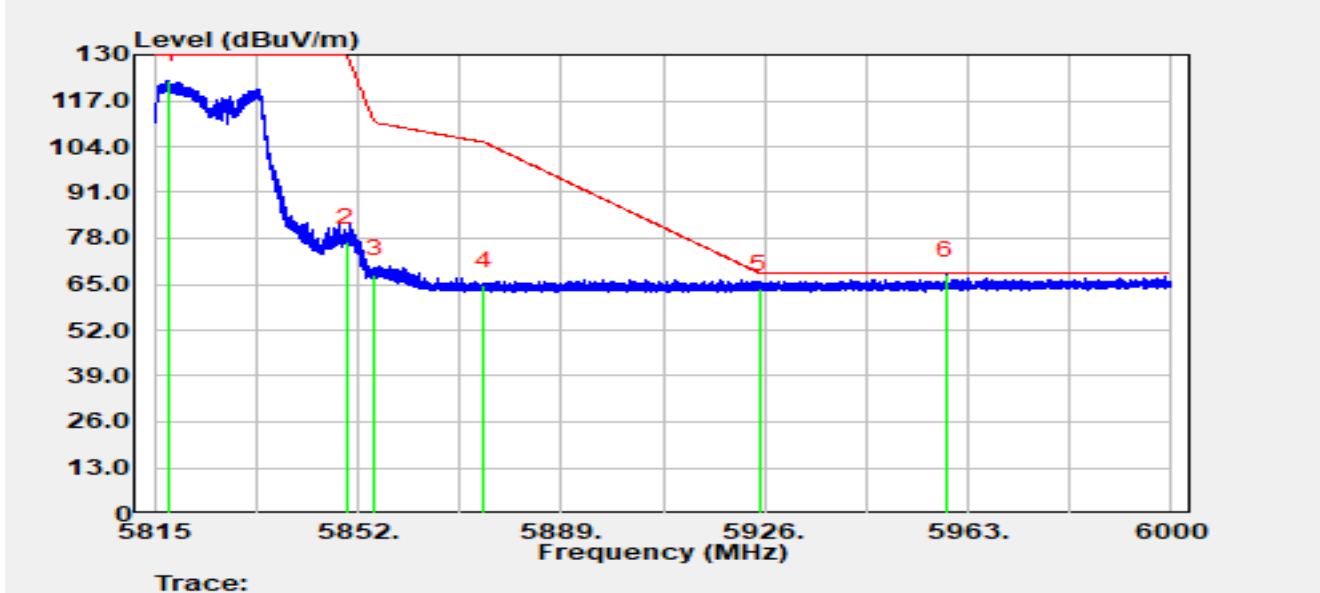


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5817.683	126.62	-3.80	122.82	N/A	N/A	Peak
2		5850.000	80.68	-3.75	76.93	-53.07	130.00	Peak
3		5855.000	71.55	-3.75	67.80	-43.00	110.80	Peak
4		5875.000	68.50	-3.82	64.67	-40.53	105.20	Peak
5		5925.000	67.42	-3.71	63.71	-4.49	68.20	Peak
6	*	5958.967	71.15	-3.65	67.50	-0.70	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5825 MHz		

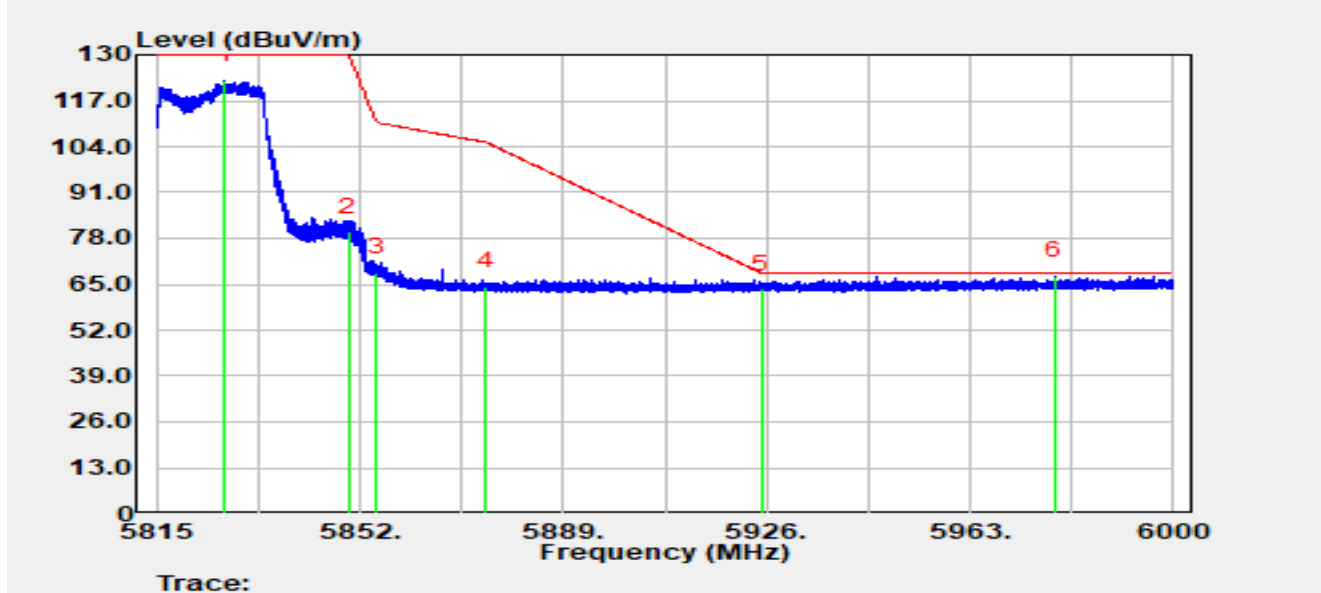


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5827.303	126.43	-3.74	122.69	N/A	N/A	Peak
2		5850.000	83.59	-3.75	79.84	-50.16	130.00	Peak
3		5855.000	72.14	-3.75	68.39	-42.41	110.80	Peak
4		5875.000	68.23	-3.82	64.41	-40.79	105.20	Peak
5		5925.000	67.31	-3.71	63.60	-4.60	68.20	Peak
6	*	5978.263	71.00	-3.66	67.34	-0.86	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5190 MHz		

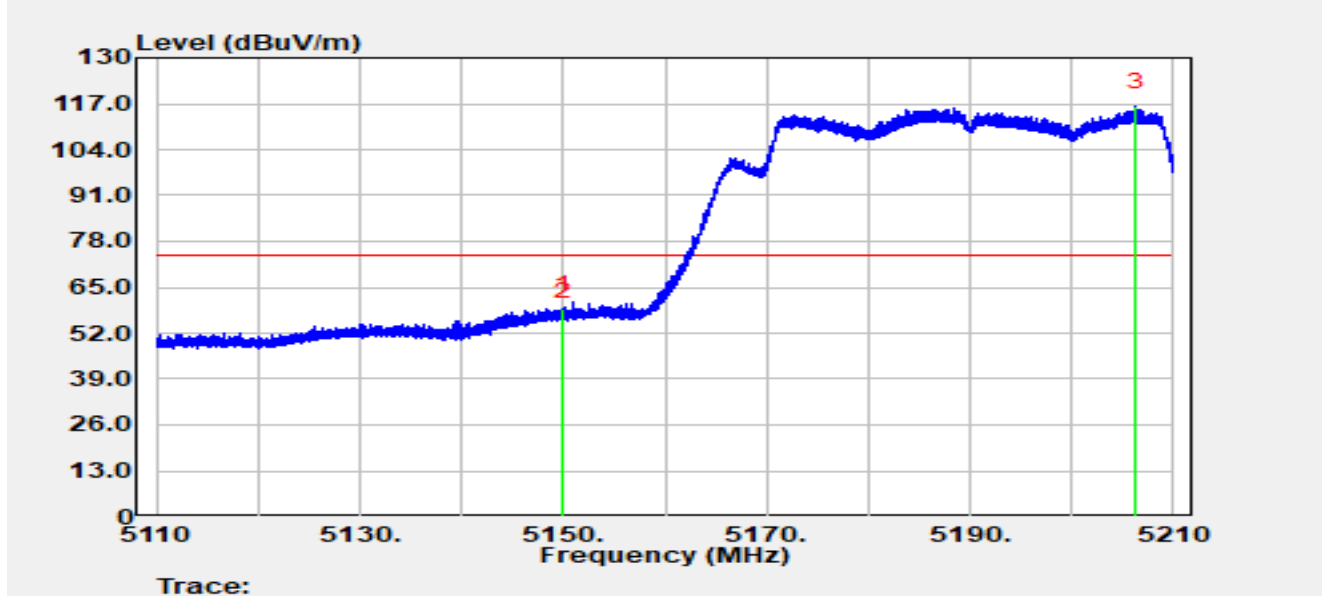


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.920	59.38	-0.59	58.79	-15.21	74.00	Peak
2		5150.000	57.32	-0.54	56.78	-17.22	74.00	Peak
3		5206.310	73.58	42.57	116.16	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5190 MHz		

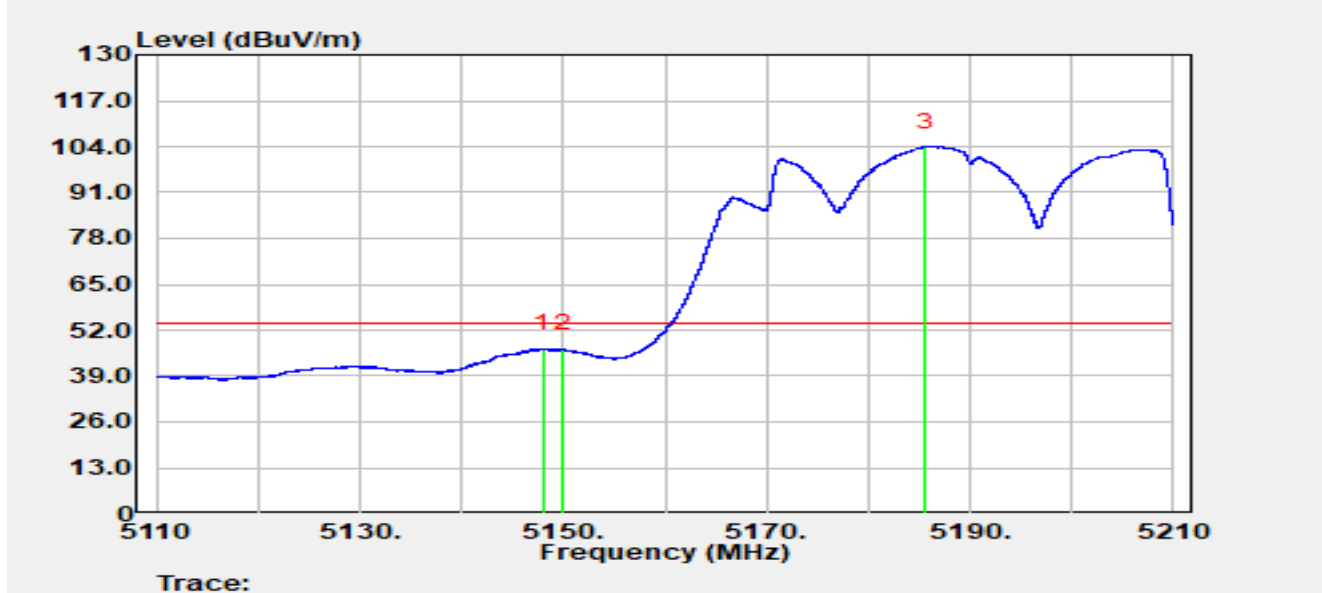


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.070	47.73	-0.98	46.75	-7.25	54.00	Average
2		5150.000	47.24	-0.54	46.70	-7.30	54.00	Average
3		5185.600	66.05	37.91	103.97	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5190 MHz		

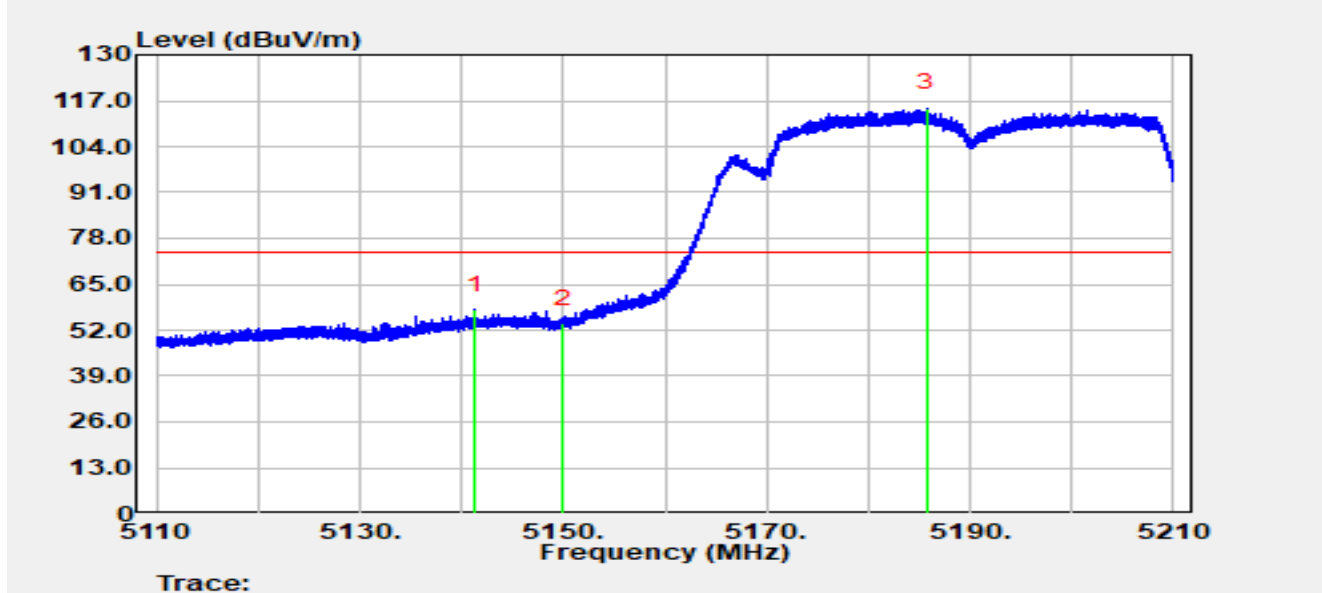


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5141.290	59.45	-1.74	57.71	-16.29	74.00	Peak
2		5150.000	54.32	-0.54	53.78	-20.22	74.00	Peak
3		5185.710	76.98	37.87	114.84	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5190 MHz		

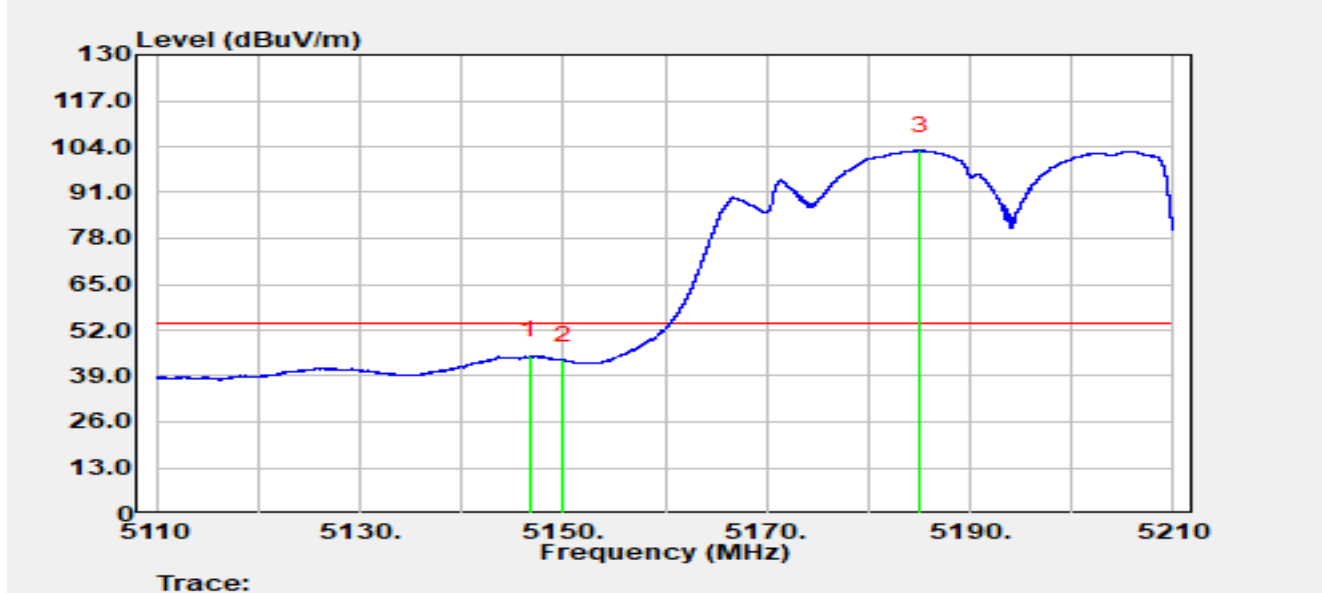


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5146.770	45.94	-1.22	44.72	-9.28	54.00	Average
2		5150.000	44.03	-0.54	43.49	-10.51	54.00	Average
3		5185.060	64.62	38.28	102.90	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5310 MHz		

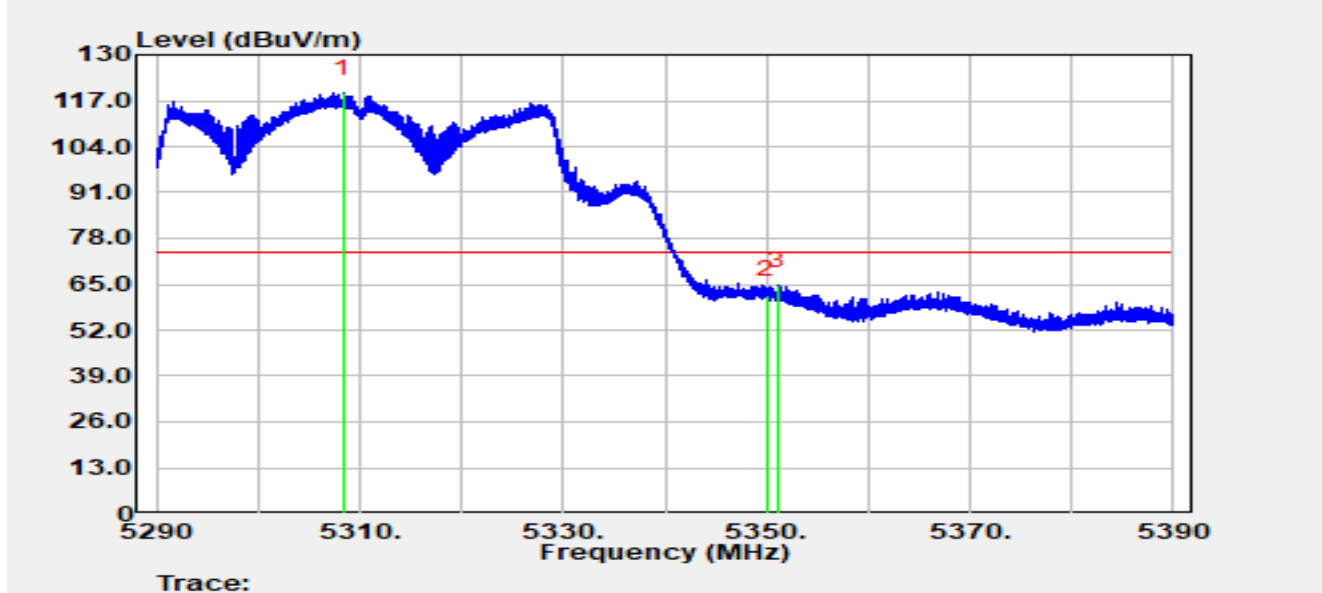


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5308.390	76.90	42.28	119.18	N/A	N/A	Peak
2		5350.000	59.68	2.28	61.96	-12.04	74.00	Peak
3	*	5351.130	63.14	1.55	64.69	-9.31	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5310 MHz		

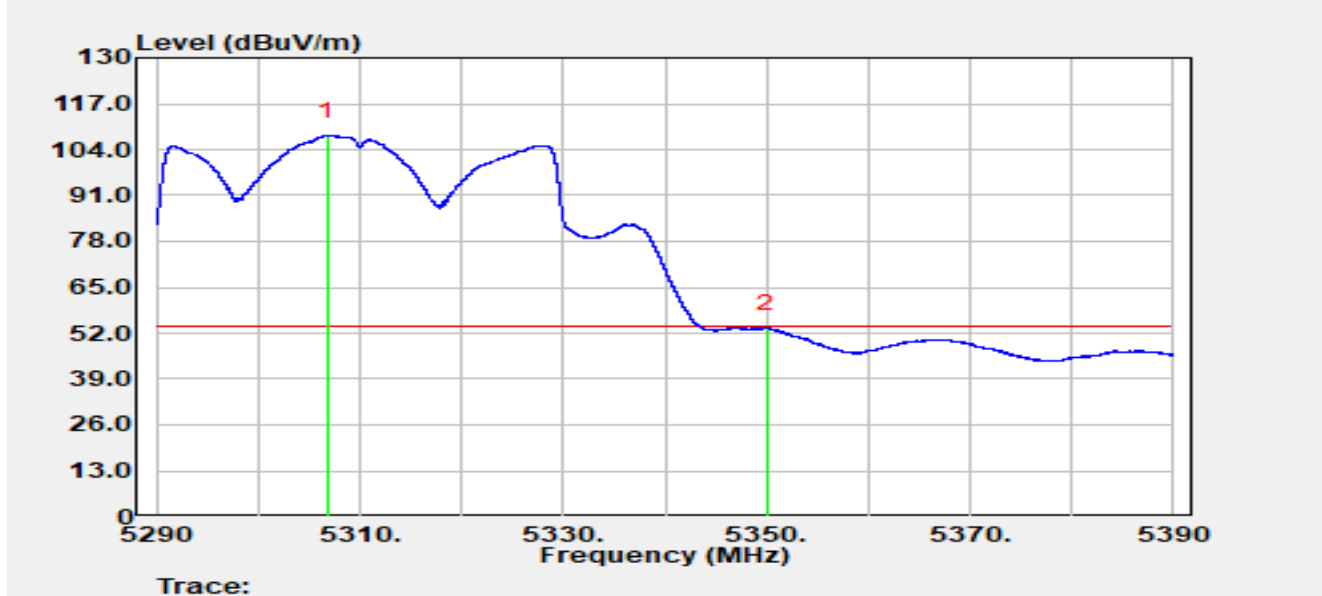


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5306.850	65.75	42.11	107.86	N/A	N/A	Average
2	*	5350.000	51.07	2.28	53.36	-0.64	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5310 MHz		

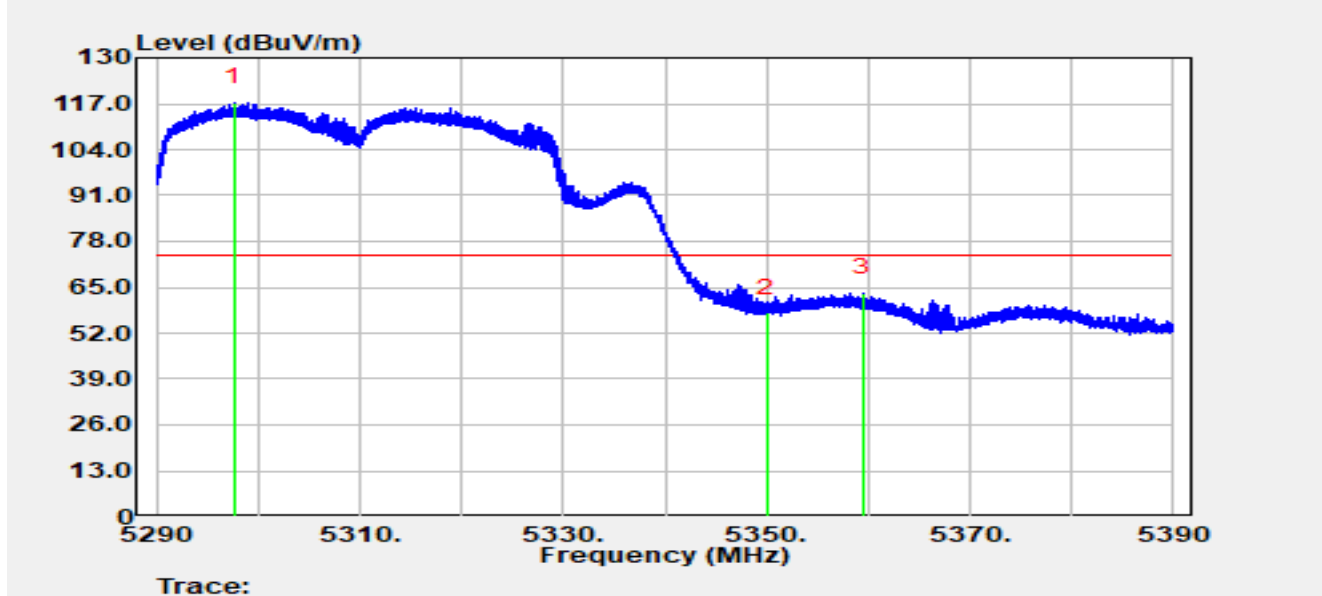


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5297.680	72.27	45.15	117.42	N/A	N/A	Peak
2		5350.000	55.59	2.28	57.87	-16.13	74.00	Peak
3	*	5359.430	64.13	-0.78	63.35	-10.65	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5310 MHz		

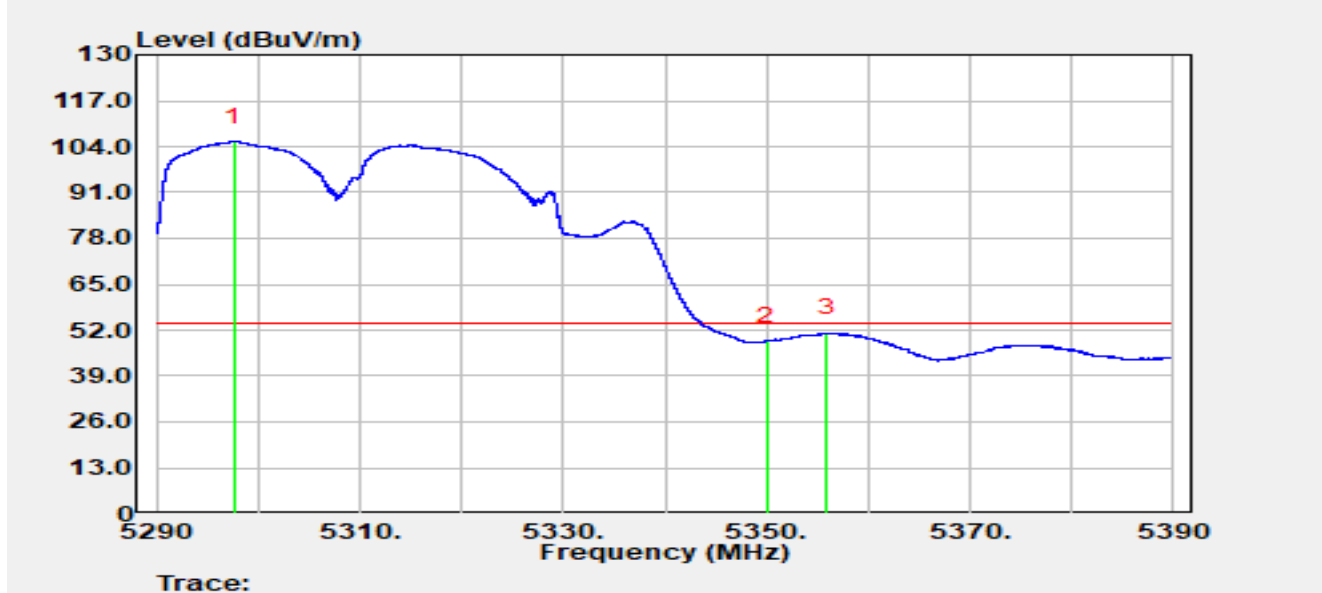


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5297.670	60.30	45.14	105.44	N/A	N/A	Average
2		5350.000	46.67	2.28	48.95	-5.05	54.00	Average
3	*	5355.870	51.41	-0.21	51.21	-2.79	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5510 MHz		

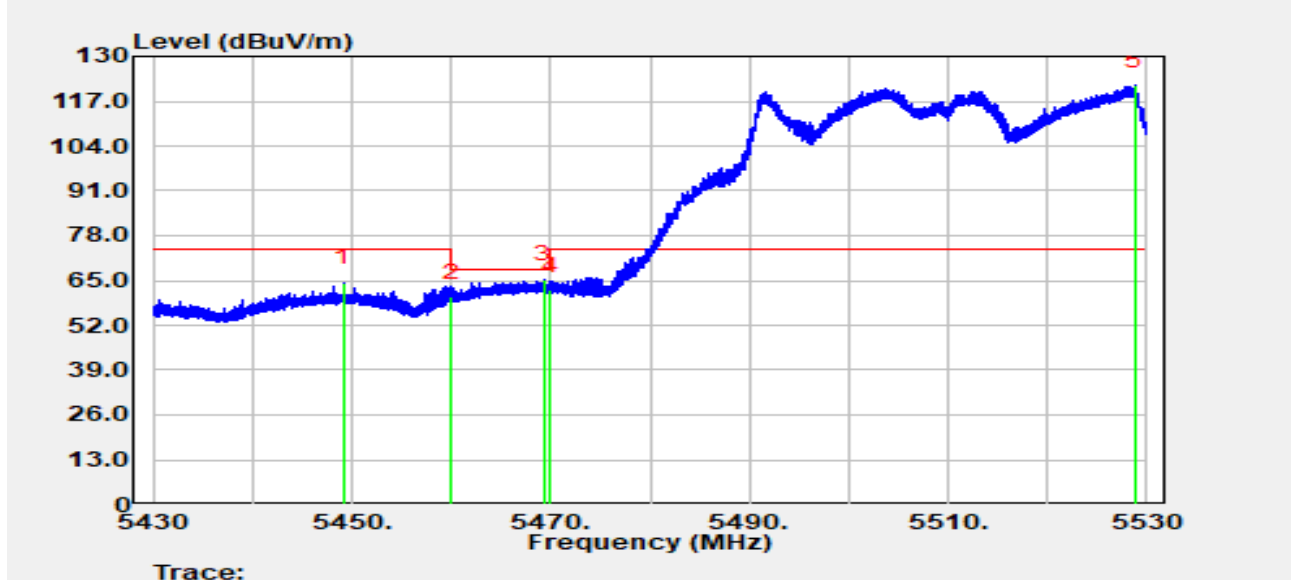


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5449.150	65.65	-1.38	64.27	-9.73	74.00	Peak
2		5460.000	60.86	-0.69	60.16	-8.04	68.20	Peak
3	*	5469.340	64.44	0.81	65.25	-2.95	68.20	Peak
4		5470.000	61.27	1.00	62.27	-5.93	68.20	Peak
5		5528.760	72.93	48.61	121.54	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5510 MHz		

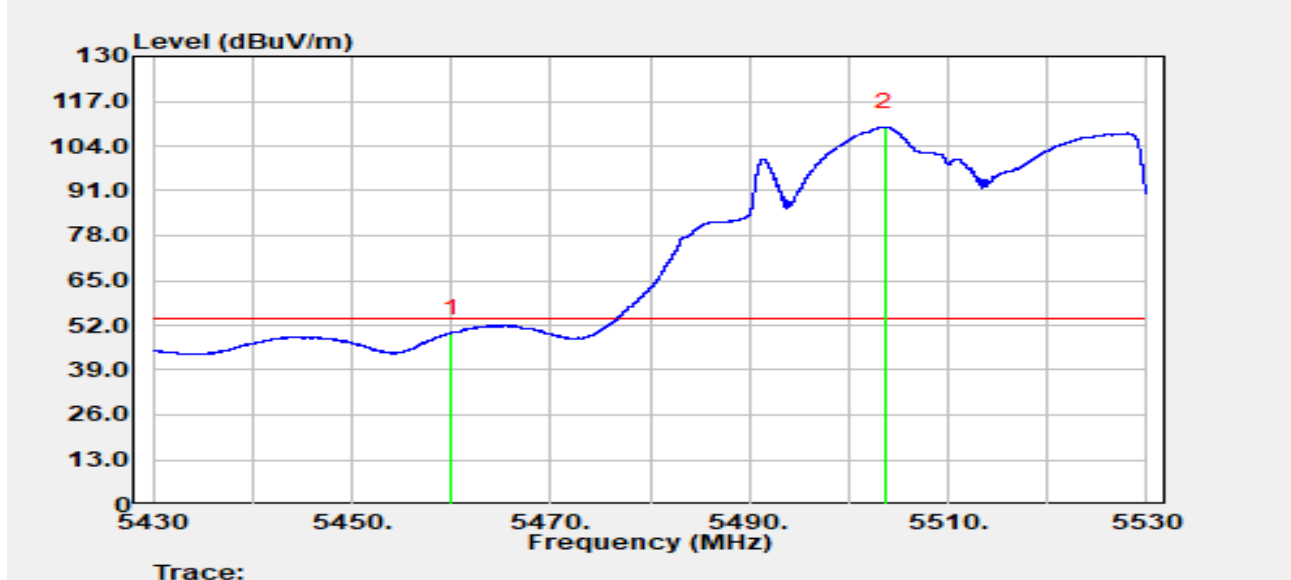


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5460.000	50.48	-0.69	49.79	-4.21	54.00	Average
2		5503.580	63.83	45.69	109.53	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5510 MHz		

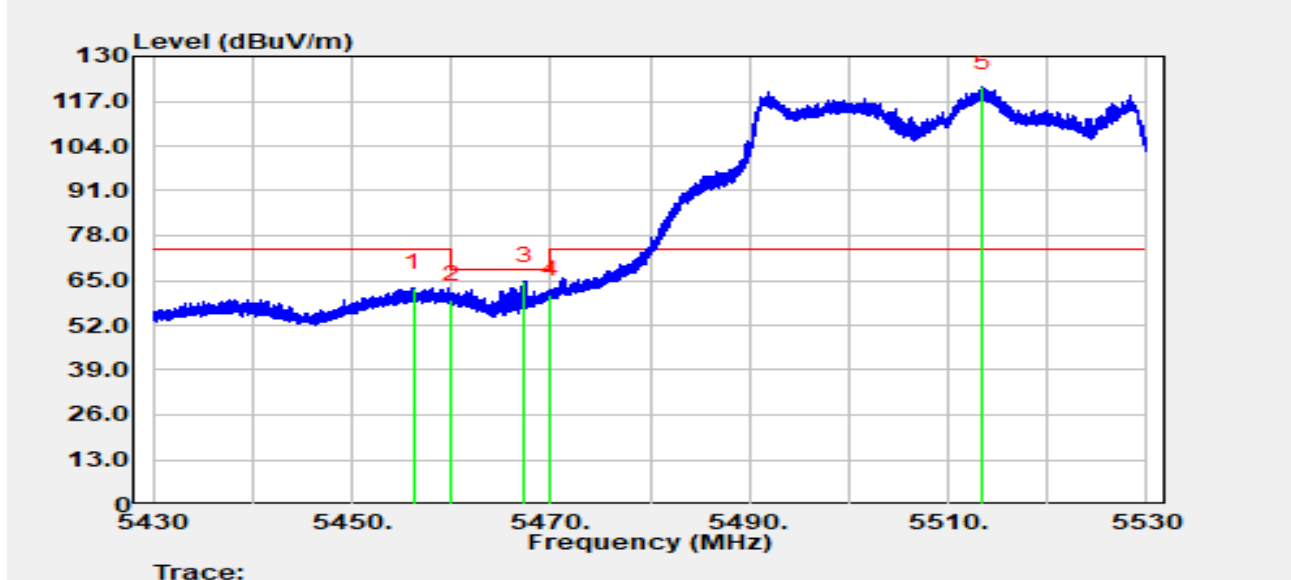


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5456.220	63.91	-0.99	62.92	-11.08	74.00	Peak
2		5460.000	60.16	-0.69	59.47	-8.73	68.20	Peak
3	*	5467.380	64.79	0.20	64.99	-3.21	68.20	Peak
4		5470.000	59.88	1.00	60.88	-7.32	68.20	Peak
5		5513.450	76.43	44.59	121.02	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5510 MHz		

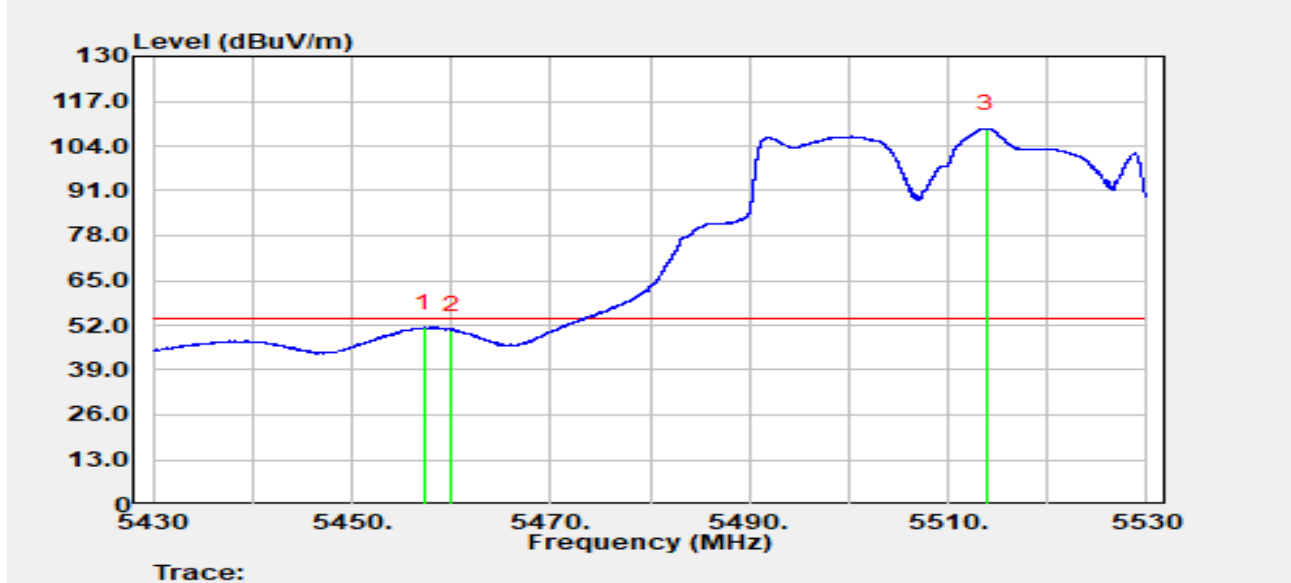


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5457.300	52.33	-0.91	51.42	-2.58	54.00	Average
2		5460.000	51.34	-0.69	50.65	-3.35	54.00	Average
3		5513.850	64.28	44.85	109.12	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5670 MHz		

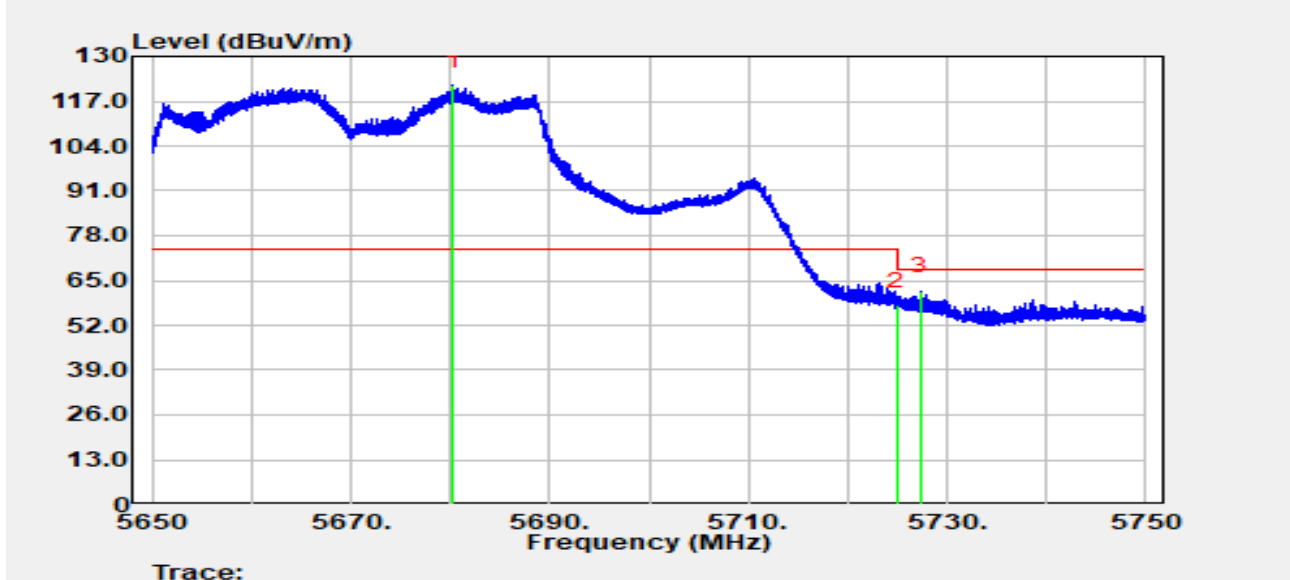


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5680.350	75.00	46.53	121.54	N/A	N/A	Peak
2		5725.000	56.73	1.01	57.74	-10.46	68.20	Peak
3	*	5727.360	61.97	-0.08	61.90	-6.30	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5670 MHz		

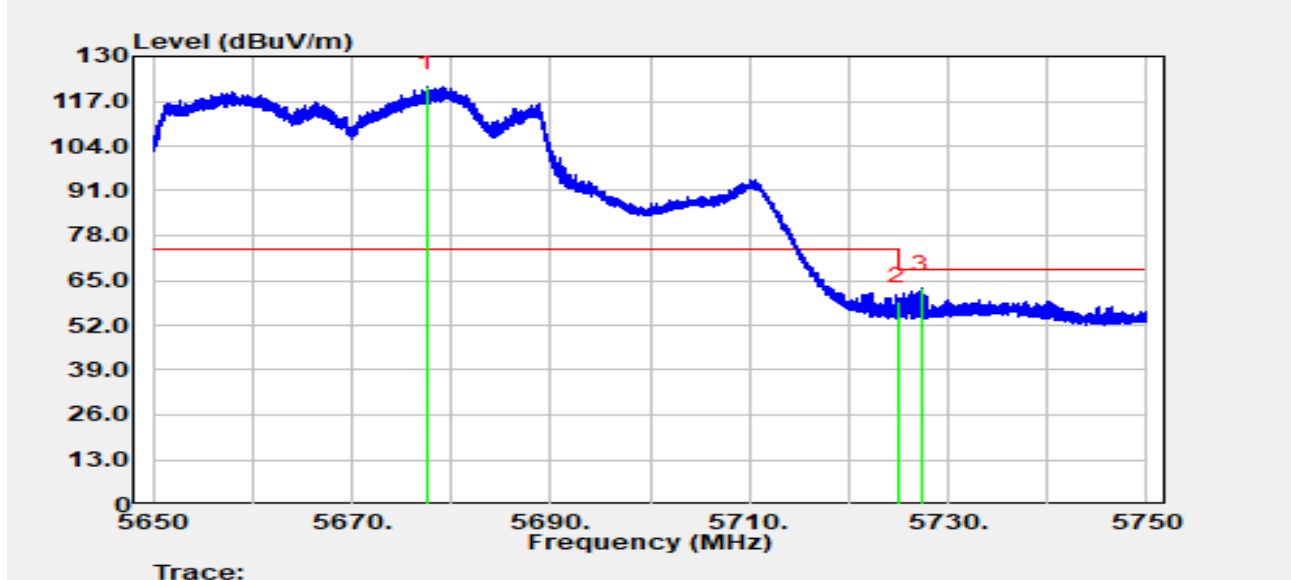


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5677.580	78.65	42.48	121.13	N/A	N/A	Peak
2		5725.000	57.92	1.01	58.93	-9.27	68.20	Peak
3	*	5727.260	62.68	-0.06	62.62	-5.58	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5755 MHz		

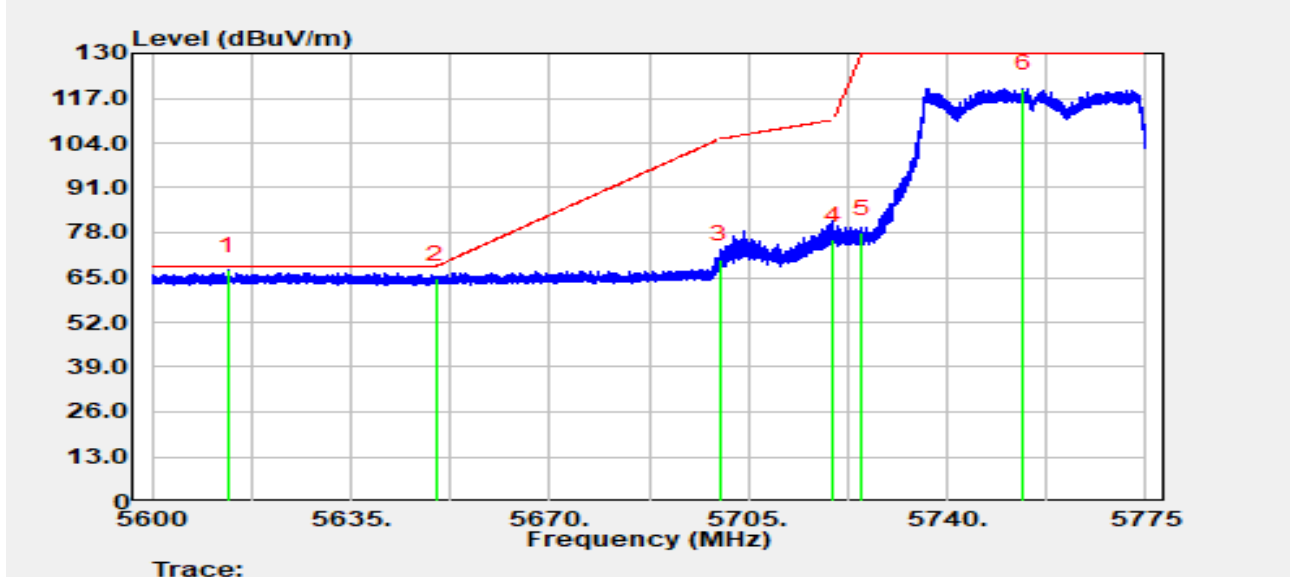


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5613.353	70.60	-3.46	67.14	-1.06	68.20	Peak
2		5650.000	68.23	-3.65	64.58	-3.62	68.20	Peak
3		5700.000	73.81	-3.47	70.33	-34.87	105.20	Peak
4		5720.000	79.29	-3.45	75.83	-34.97	110.80	Peak
5		5725.000	81.47	-3.47	78.00	-52.00	130.00	Peak
6		5753.300	123.55	-3.65	119.90	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5755 MHz		

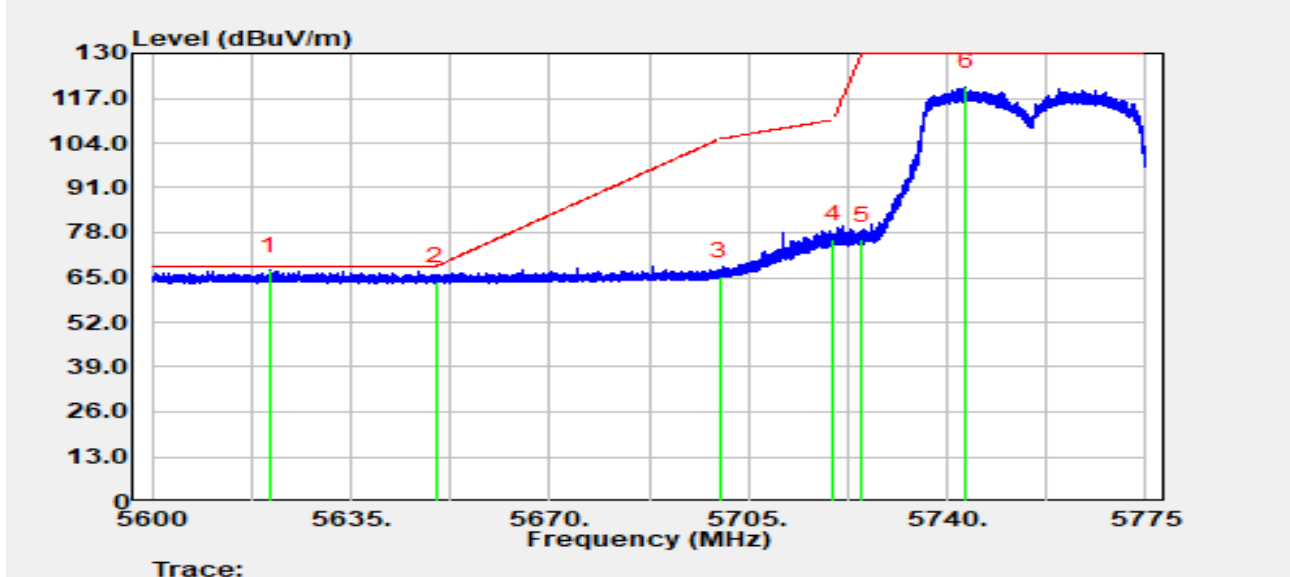


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5620.580	70.36	-3.38	66.98	-1.22	68.20	Peak
2		5650.000	67.51	-3.65	63.87	-4.33	68.20	Peak
3		5700.000	68.77	-3.47	65.30	-39.90	105.20	Peak
4		5720.000	79.71	-3.45	76.26	-34.54	110.80	Peak
5		5725.000	79.42	-3.47	75.95	-54.05	130.00	Peak
6		5743.395	123.88	-3.64	120.24	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5795 MHz		

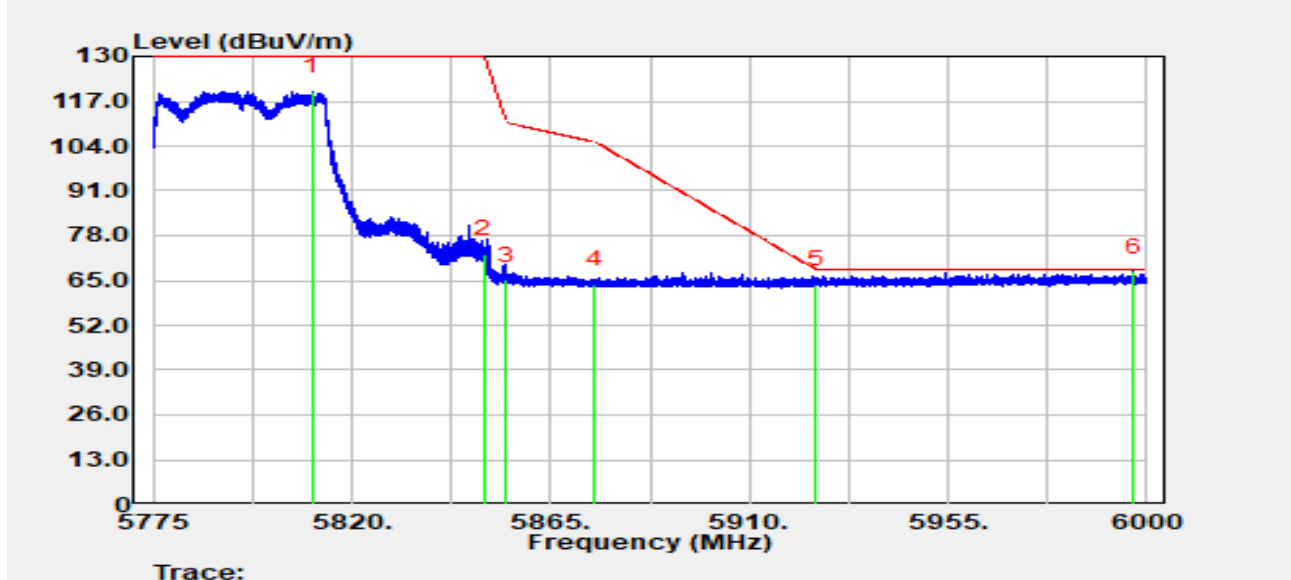


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5811.158	123.61	-3.84	119.77	N/A	N/A	Peak
2		5850.000	76.38	-3.75	72.62	-57.38	130.00	Peak
3		5855.000	68.90	-3.75	65.15	-45.65	110.80	Peak
4		5875.000	67.60	-3.82	63.78	-41.42	105.20	Peak
5		5925.000	67.59	-3.71	63.88	-4.32	68.20	Peak
6	*	5996.940	71.21	-3.72	67.49	-0.71	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5795 MHz		

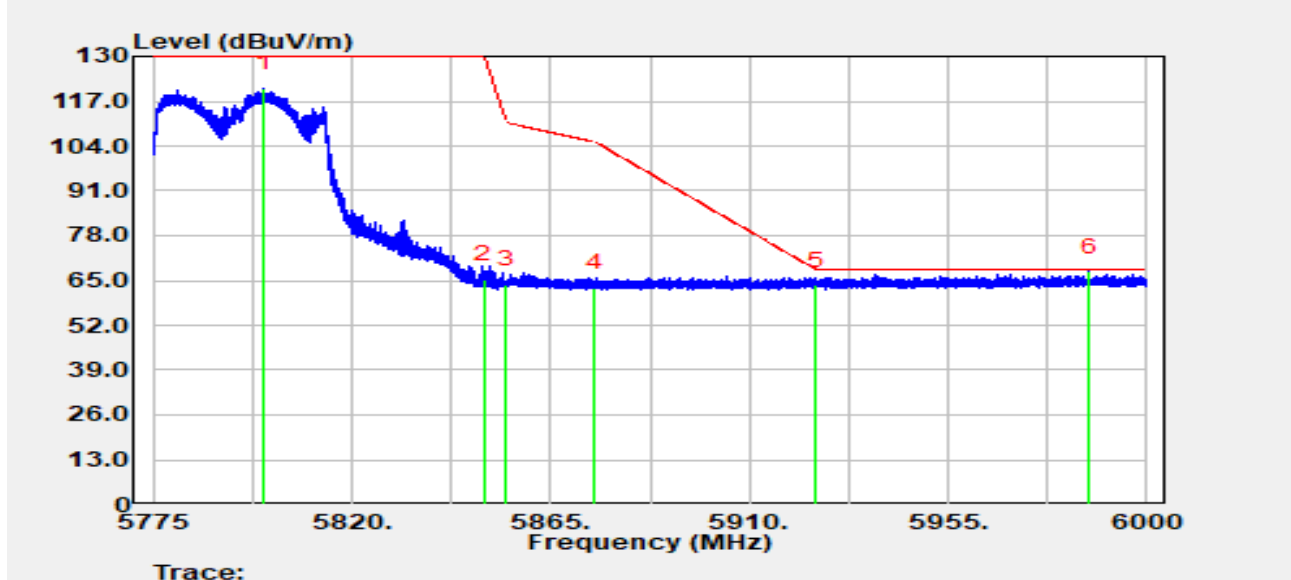


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5799.975	124.46	-3.74	120.71	N/A	N/A	Peak
2		5850.000	69.20	-3.75	65.45	-64.55	130.00	Peak
3		5855.000	67.64	-3.75	63.89	-46.91	110.80	Peak
4		5875.000	66.82	-3.82	63.00	-42.20	105.20	Peak
5		5925.000	67.36	-3.71	63.66	-4.54	68.20	Peak
6	*	5987.063	71.24	-3.68	67.56	-0.64	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5210 MHz		

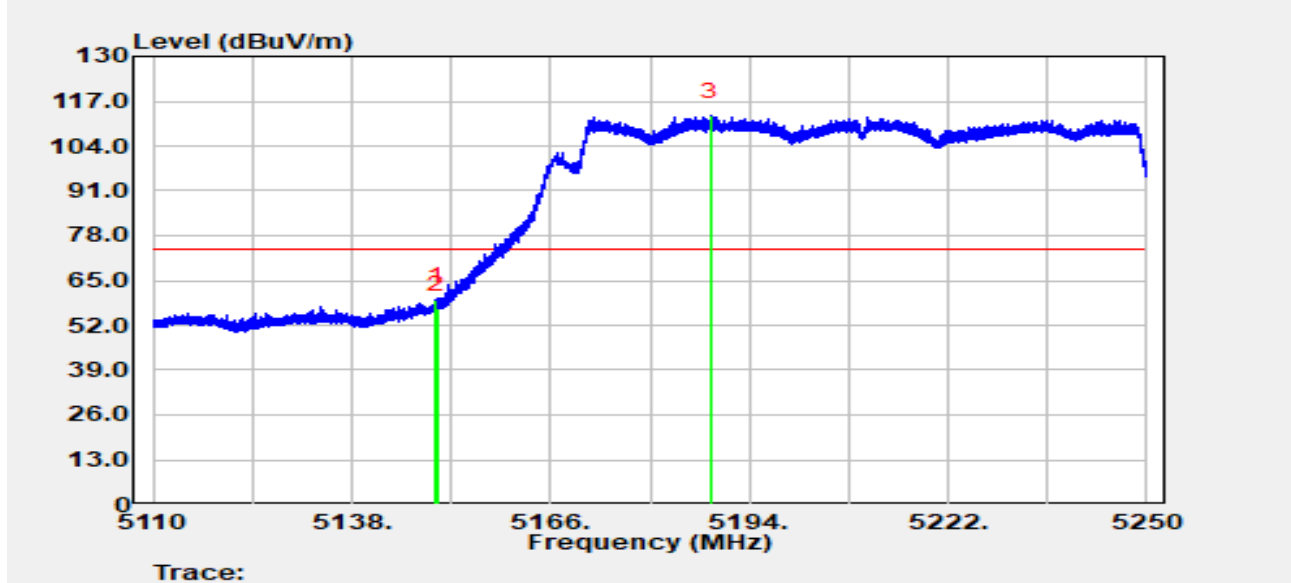


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.816	59.95	-0.65	59.30	-14.70	74.00	Peak
2		5150.000	57.37	-0.54	56.83	-17.17	74.00	Peak
3		5188.540	73.05	39.61	112.65	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5210 MHz		

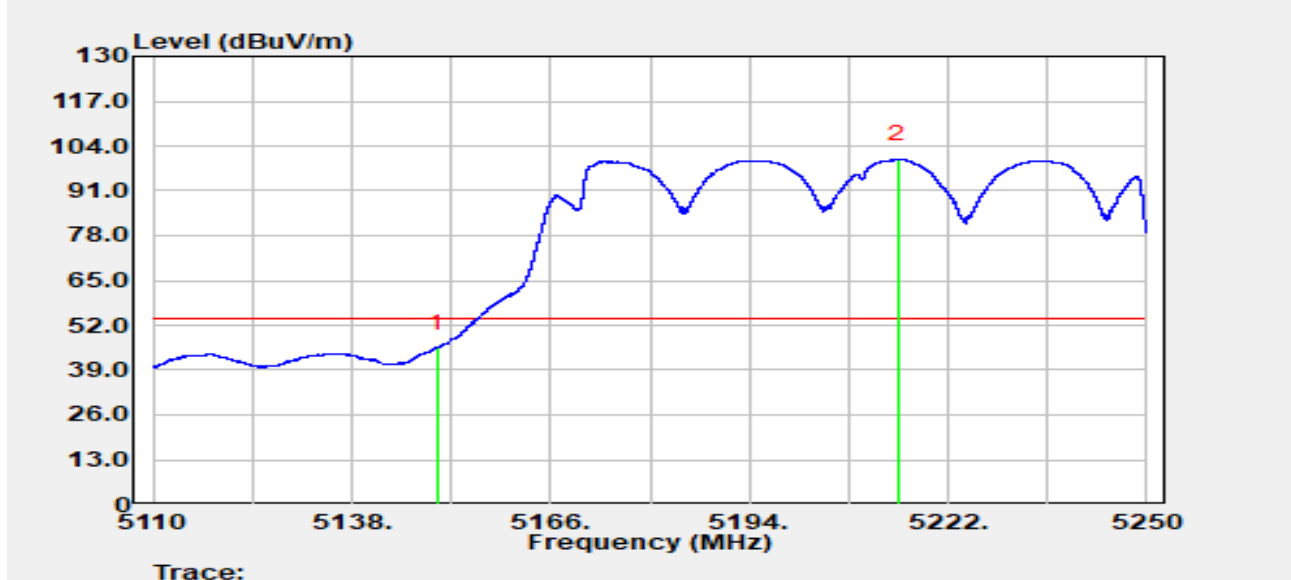


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	46.05	-0.54	45.50	-8.50	54.00	Average
2		5215.000	60.76	39.38	100.15	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5210 MHz		

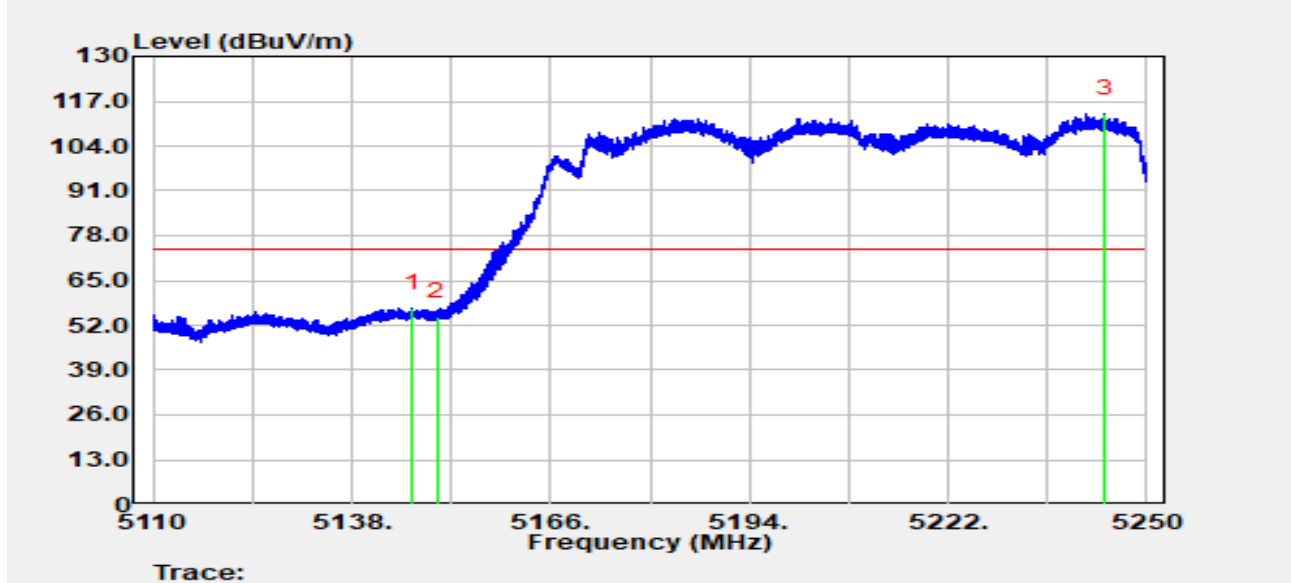


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5146.456	58.31	-1.39	56.93	-17.07	74.00	Peak
2		5150.000	55.09	-0.54	54.55	-19.45	74.00	Peak
3		5244.092	70.38	43.18	113.56	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5210 MHz		

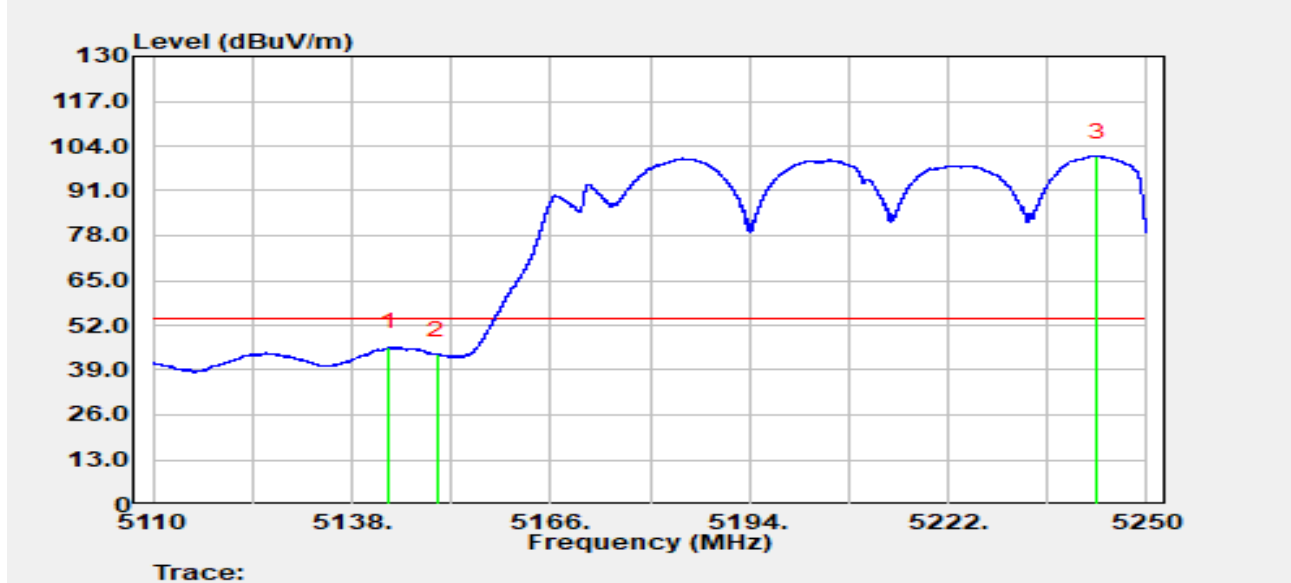


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5143.292	47.27	-1.63	45.64	-8.36	54.00	Average
2		5150.000	44.09	-0.54	43.55	-10.45	54.00	Average
3		5242.958	56.04	44.99	101.03	N/A	N/A	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5290 MHz		

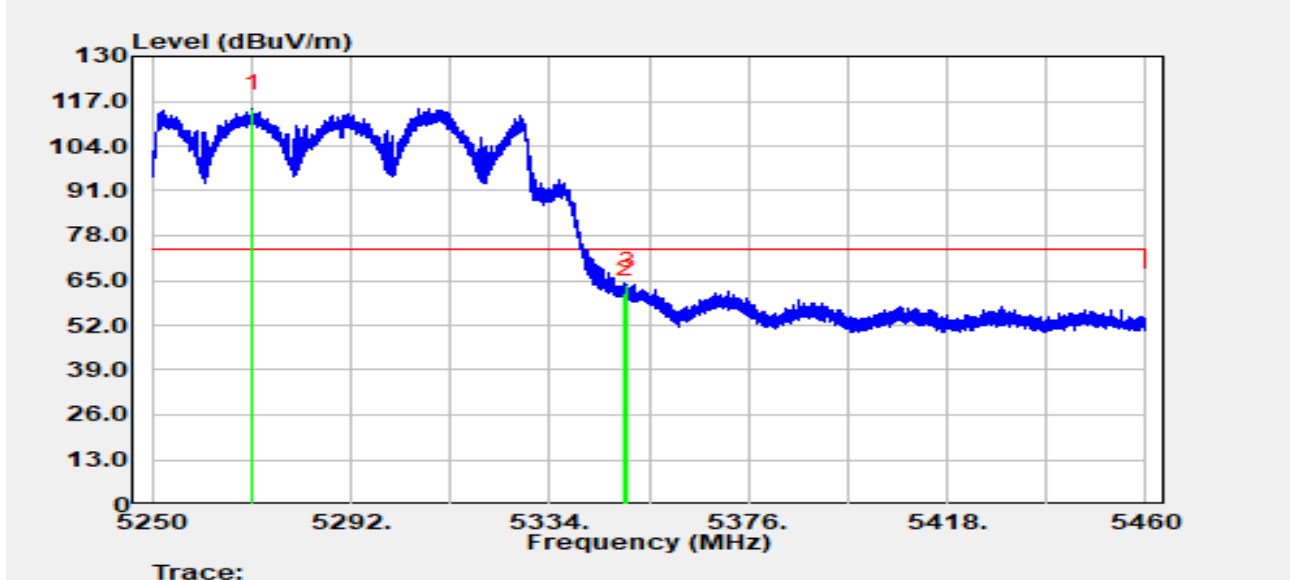


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5271.294	74.37	40.43	114.80	N/A	N/A	Peak
2		5350.000	58.96	2.28	61.24	-12.76	74.00	Peak
3	*	5350.401	61.54	2.06	63.60	-10.40	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5290 MHz		

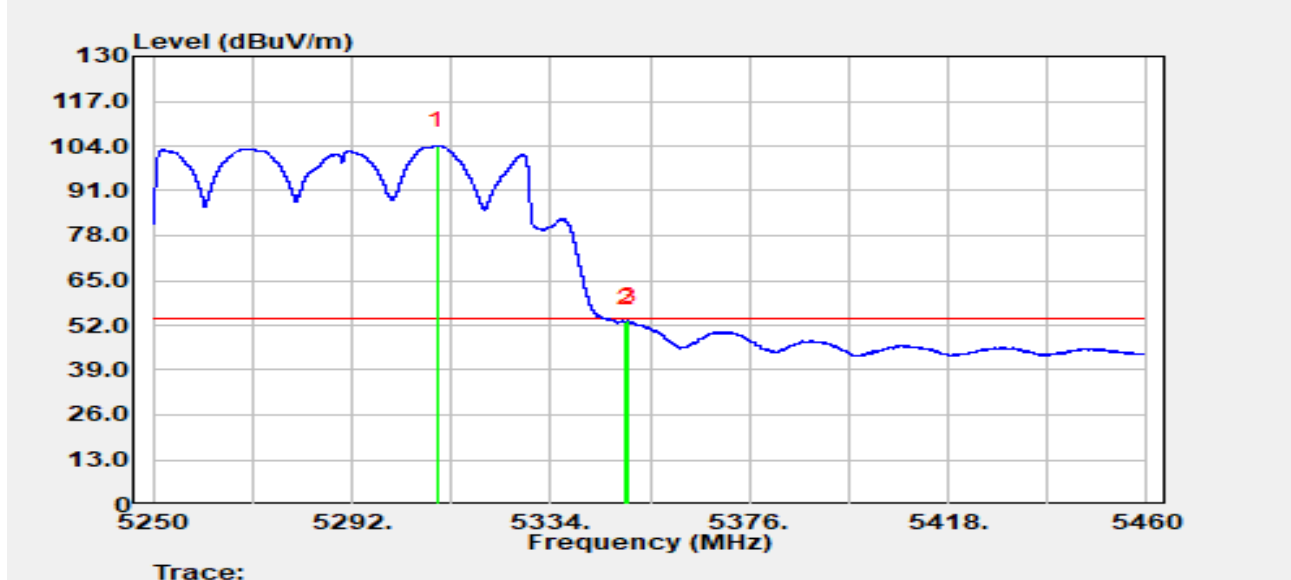


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5310.102	60.07	44.10	104.17	N/A	N/A	Average
2		5350.000	50.60	2.28	52.88	-1.12	54.00	Average
3	*	5350.338	51.19	2.10	53.29	-0.71	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5290 MHz		

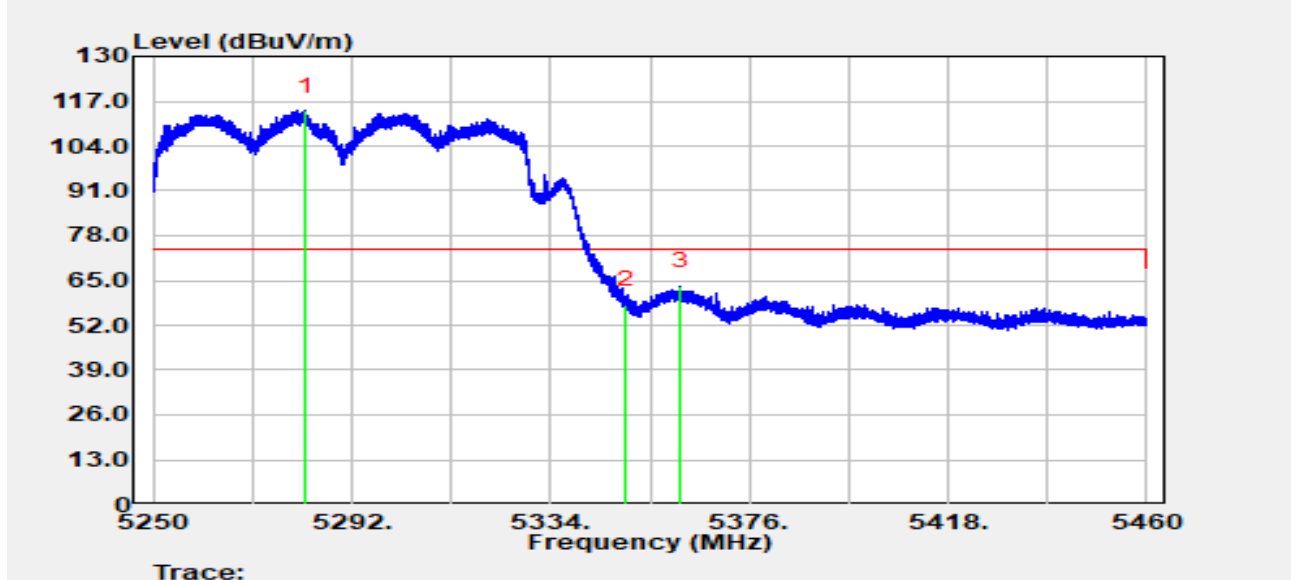


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5282.382	63.32	50.84	114.17	N/A	N/A	Peak
2		5350.000	55.63	2.28	57.91	-16.09	74.00	Peak
3	*	5361.342	64.49	-1.03	63.46	-10.54	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5290 MHz		

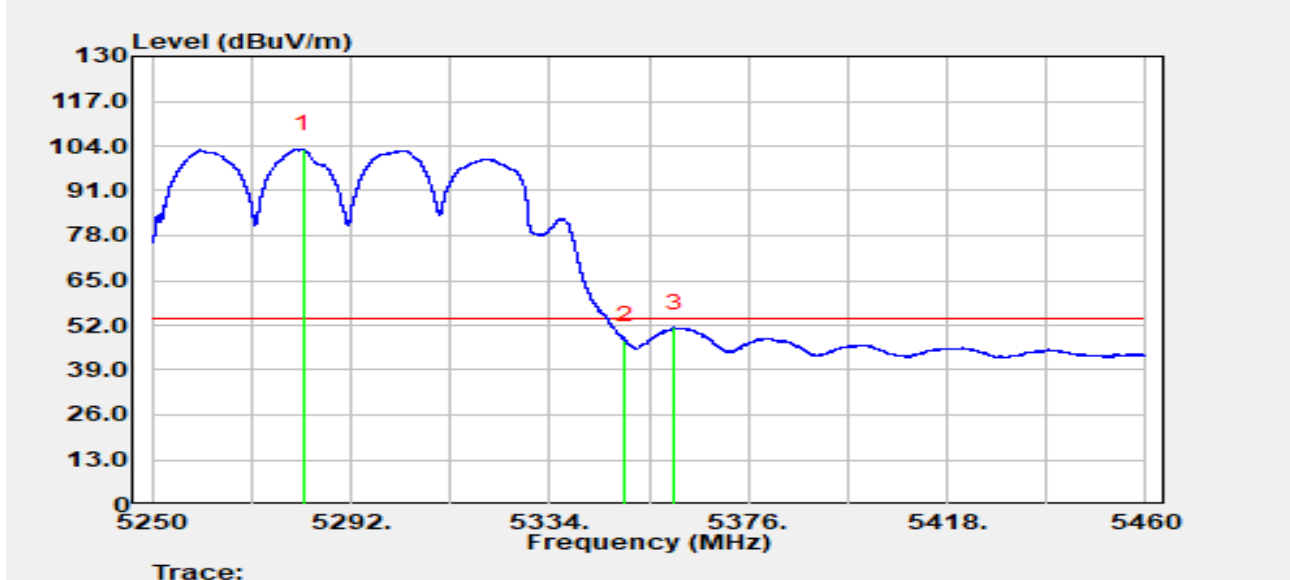


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5282.067	52.21	50.88	103.09	N/A	N/A	Average
2		5350.000	45.40	2.28	47.68	-6.32	54.00	Average
3	*	5360.397	52.21	-0.87	51.34	-2.66	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5530 MHz		

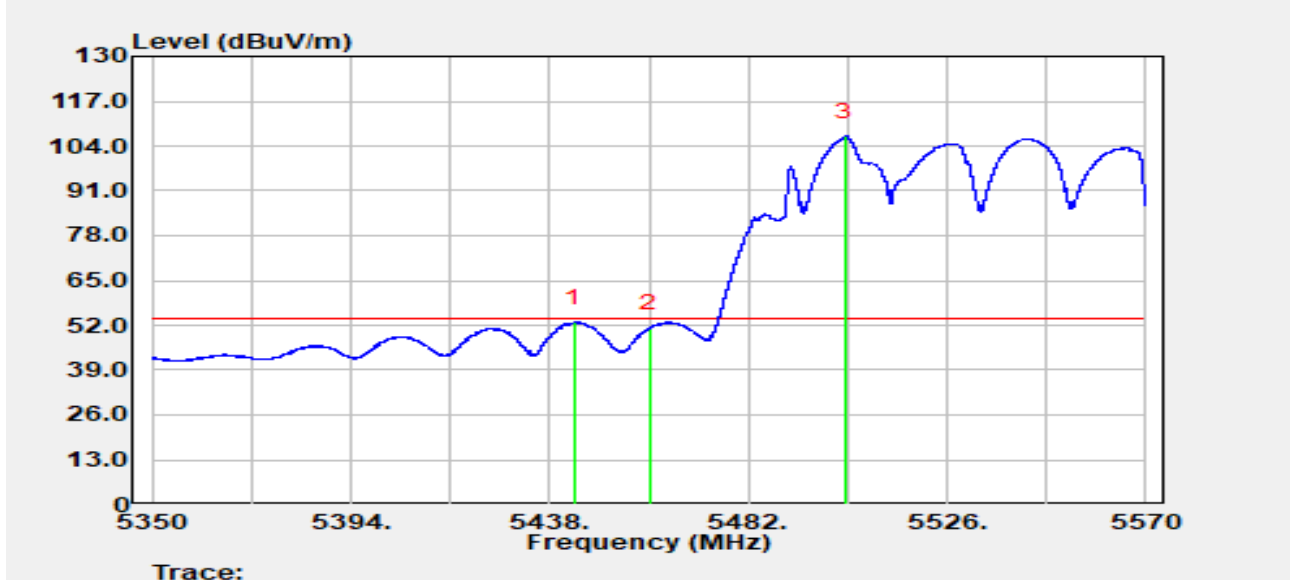


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5443.478	54.44	-1.62	52.82	-1.18	54.00	Average
2		5460.000	51.89	-0.69	51.20	-2.80	54.00	Average
3		5503.450	61.33	45.48	106.81	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5530 MHz		

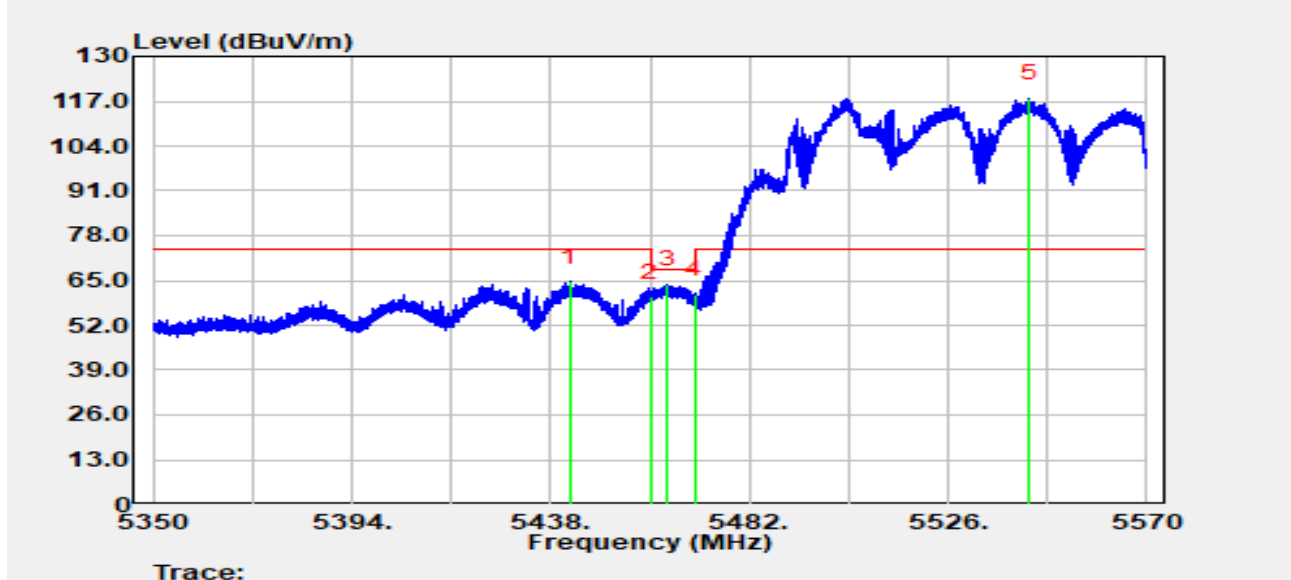


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5442.356	66.35	-1.67	64.67	-9.33	74.00	Peak
2		5460.000	60.92	-0.69	60.23	-7.97	68.20	Peak
3	*	5463.894	64.39	-0.40	63.99	-4.21	68.20	Peak
4		5470.000	60.01	1.00	61.01	-7.19	68.20	Peak
5		5544.106	75.93	41.97	117.90	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5530 MHz		

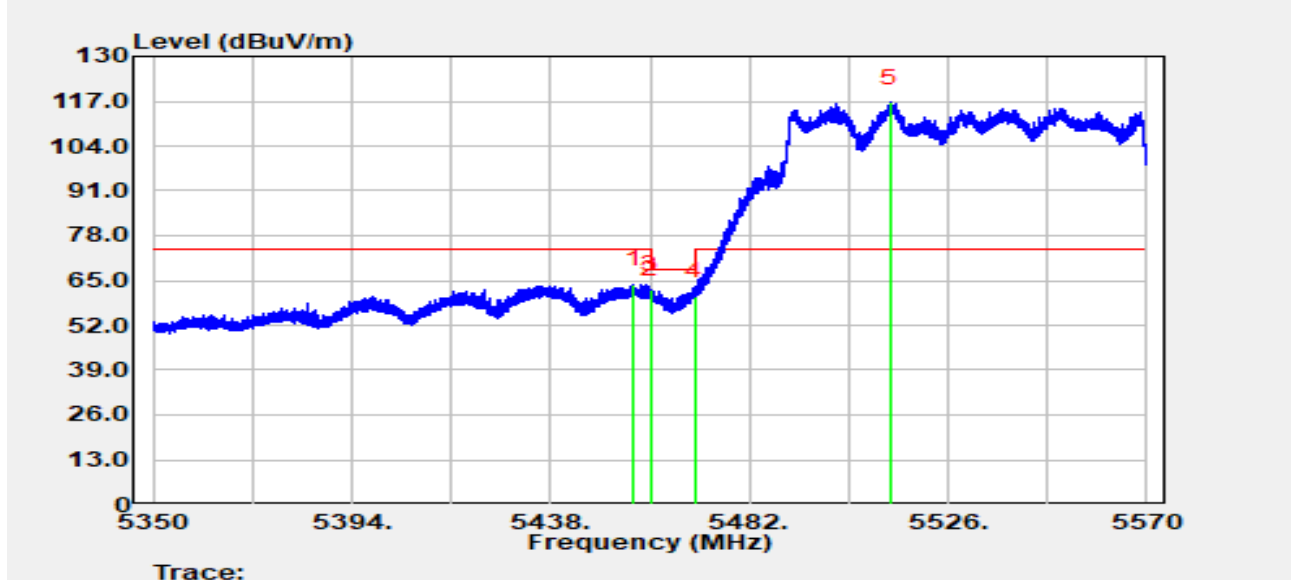


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5456.524	64.98	-0.98	64.00	-10.00	74.00	Peak
2		5460.000	61.66	-0.69	60.96	-7.24	68.20	Peak
3	*	5460.286	63.10	-0.72	62.38	-5.82	68.20	Peak
4		5470.000	59.45	1.00	60.45	-7.75	68.20	Peak
5		5513.086	72.41	44.16	116.57	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5530 MHz		

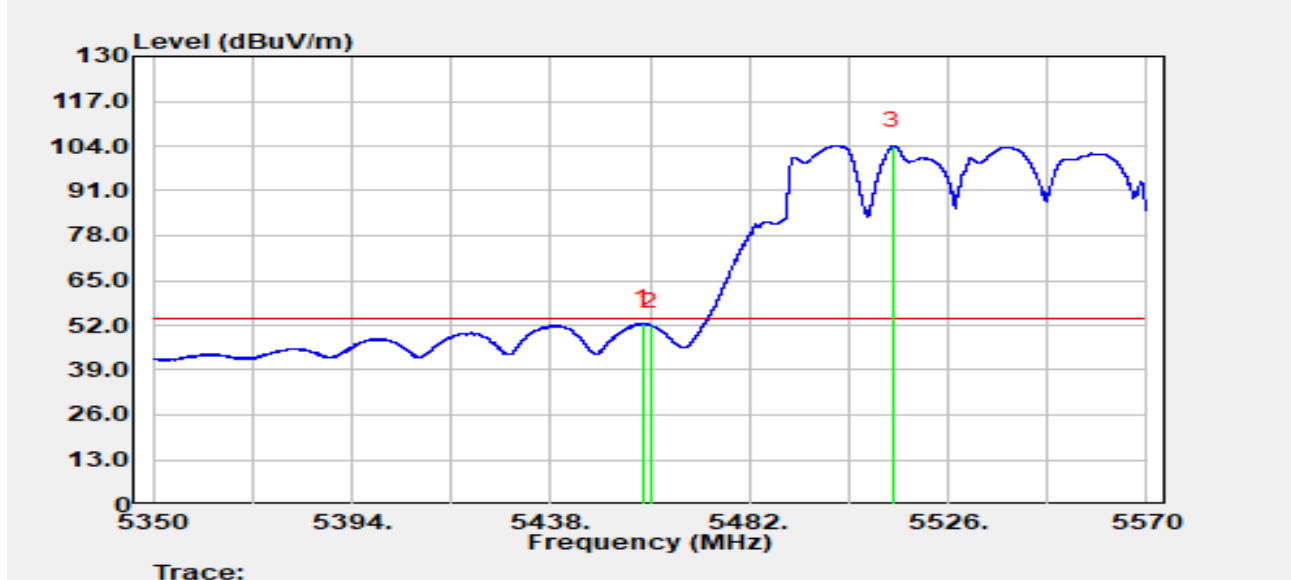


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.372	53.38	-0.79	52.59	-1.41	54.00	Average
2		5460.000	52.62	-0.69	51.92	-2.08	54.00	Average
3		5513.878	59.37	44.86	104.23	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5610 MHz		

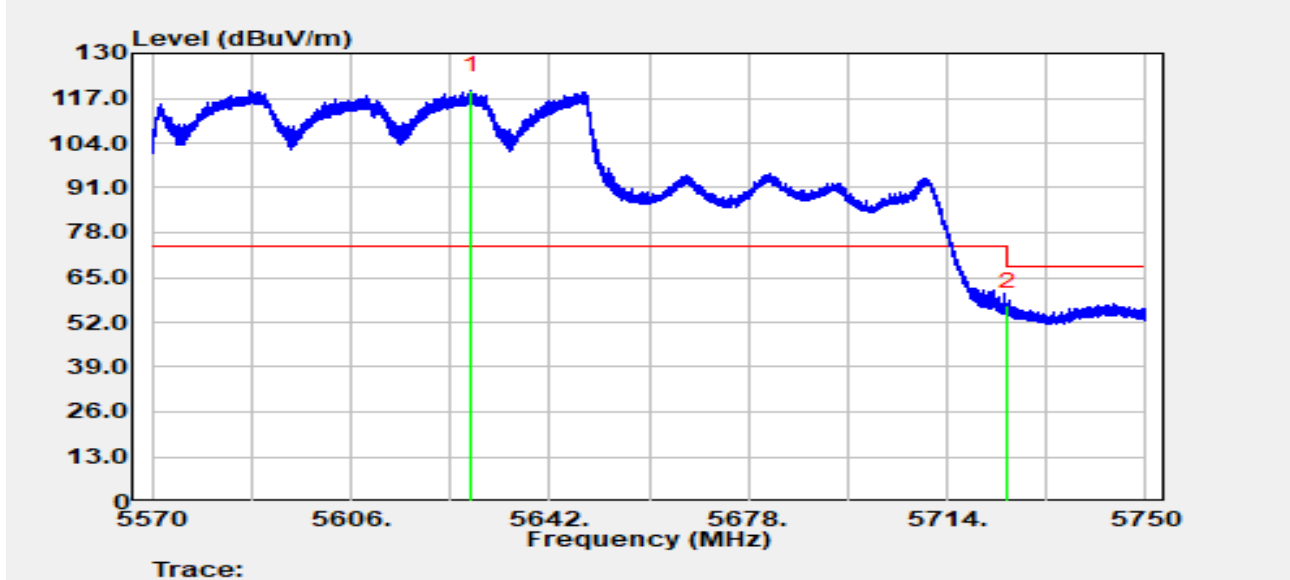


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		5627.906	75.36	43.95	119.31	N/A	N/A	Peak
2	*	5725.000	55.77	1.01	56.78	-11.42	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5610 MHz		

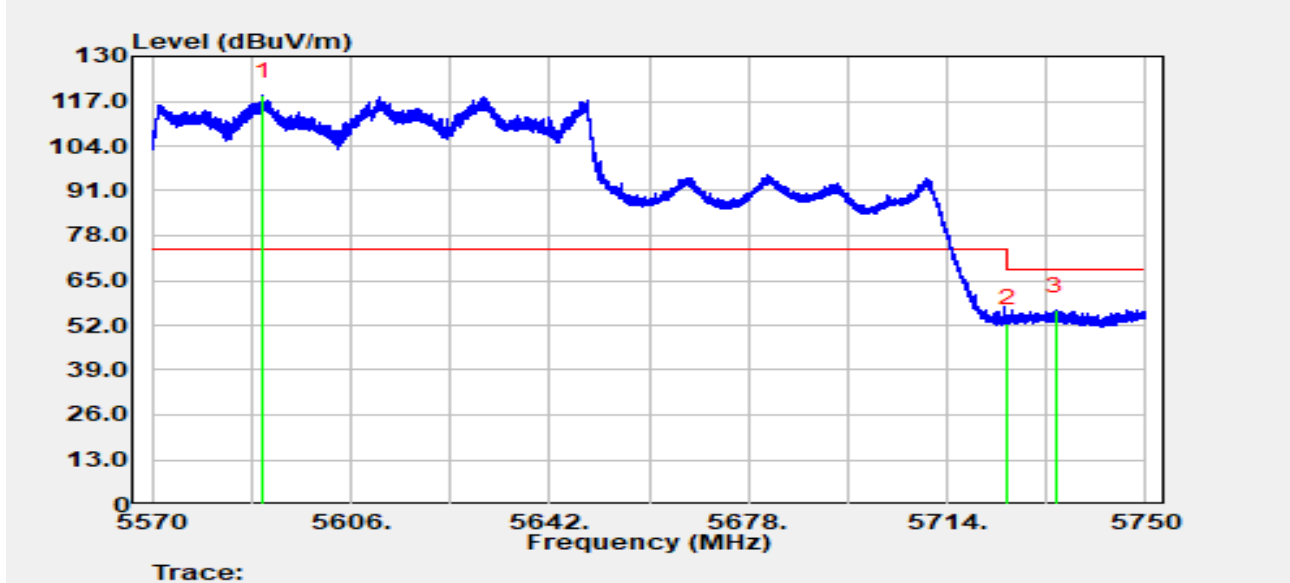


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5590.034	70.80	47.78	118.58	N/A	N/A	Peak
2		5725.000	51.67	1.01	52.68	-15.52	68.20	Peak
3	*	5733.656	57.43	-1.26	56.17	-12.03	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5775 MHz		

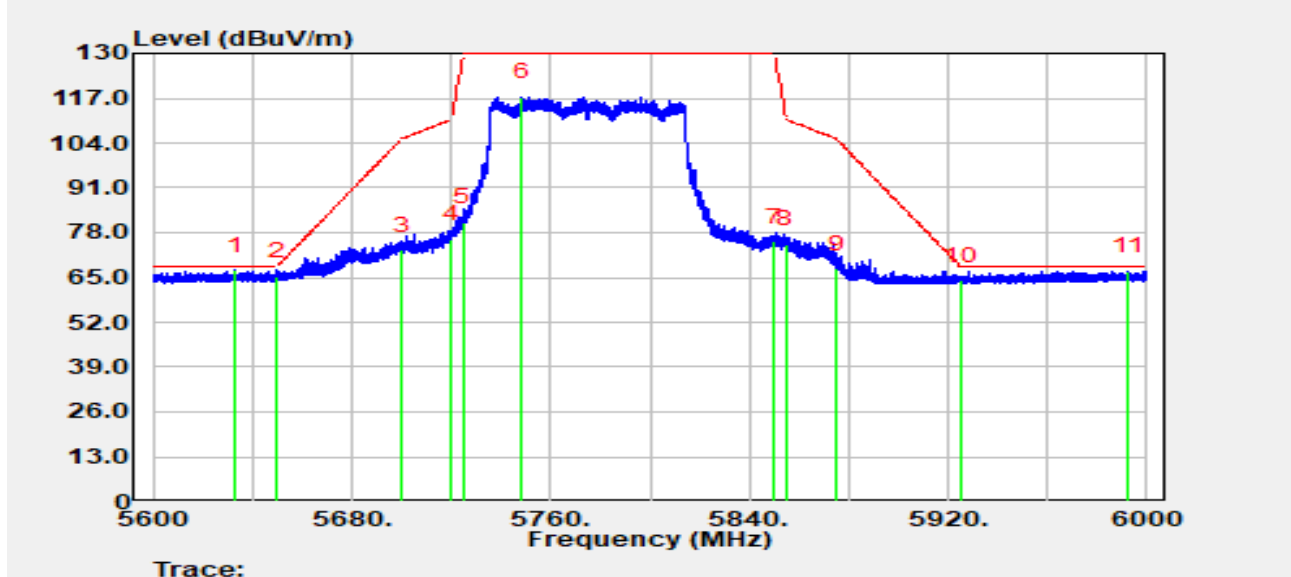


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5633.040	70.65	-3.50	67.15	-1.05	68.20	Peak
2		5650.000	69.06	-3.65	65.42	-2.78	68.20	Peak
3		5700.000	76.51	-3.47	73.04	-32.16	105.20	Peak
4		5720.000	79.51	-3.45	76.06	-34.74	110.80	Peak
5		5725.000	84.45	-3.47	80.98	-49.02	130.00	Peak
6		5748.560	120.95	-3.65	117.30	N/A	N/A	Peak
7		5850.000	79.10	-3.75	75.34	-54.66	130.00	Peak
8		5855.000	78.56	-3.75	74.81	-35.99	110.80	Peak
9		5875.000	71.46	-3.82	67.63	-37.57	105.20	Peak
10		5925.000	67.86	-3.71	64.15	-4.05	68.20	Peak
11		5992.800	70.62	-3.71	66.92	-1.28	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5775 MHz		

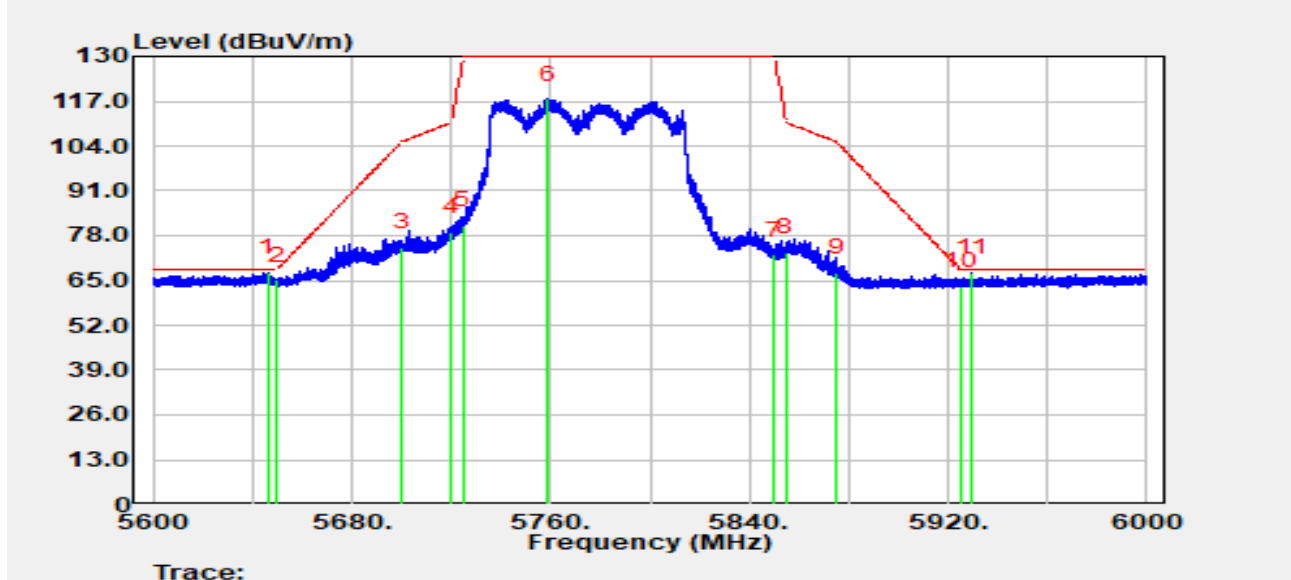


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5646.320	71.07	-3.65	67.42	-0.78	68.20	Peak
2		5650.000	68.68	-3.65	65.03	-3.17	68.20	Peak
3		5700.000	78.07	-3.47	74.60	-30.60	105.20	Peak
4		5720.000	82.48	-3.45	79.02	-31.78	110.80	Peak
5		5725.000	84.66	-3.47	81.19	-48.81	130.00	Peak
6		5758.880	121.23	-3.65	117.58	N/A	N/A	Peak
7		5850.000	76.18	-3.75	72.42	-57.58	130.00	Peak
8		5855.000	76.99	-3.75	73.24	-37.56	110.80	Peak
9		5875.000	71.23	-3.82	67.41	-37.79	105.20	Peak
10		5925.000	67.14	-3.71	63.44	-4.76	68.20	Peak
11		5929.520	71.04	-3.66	67.37	-0.83	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT160 at 5250 MHz		

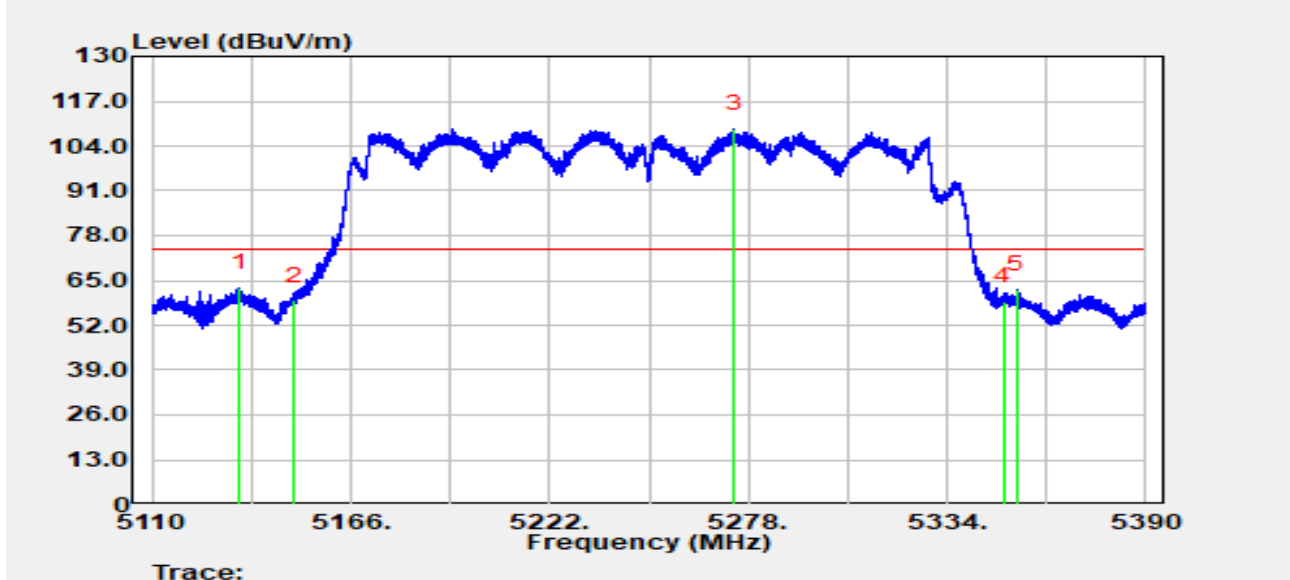


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5134.612	65.51	-2.51	63.00	-11.00	74.00	Peak
2		5150.000	59.75	-0.54	59.21	-14.79	74.00	Peak
3		5274.136	67.64	41.41	109.05	N/A	N/A	Peak
4		5350.000	56.59	2.28	58.88	-15.12	74.00	Peak
5		5353.628	61.98	0.40	62.39	-11.61	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT160 at 5250 MHz		

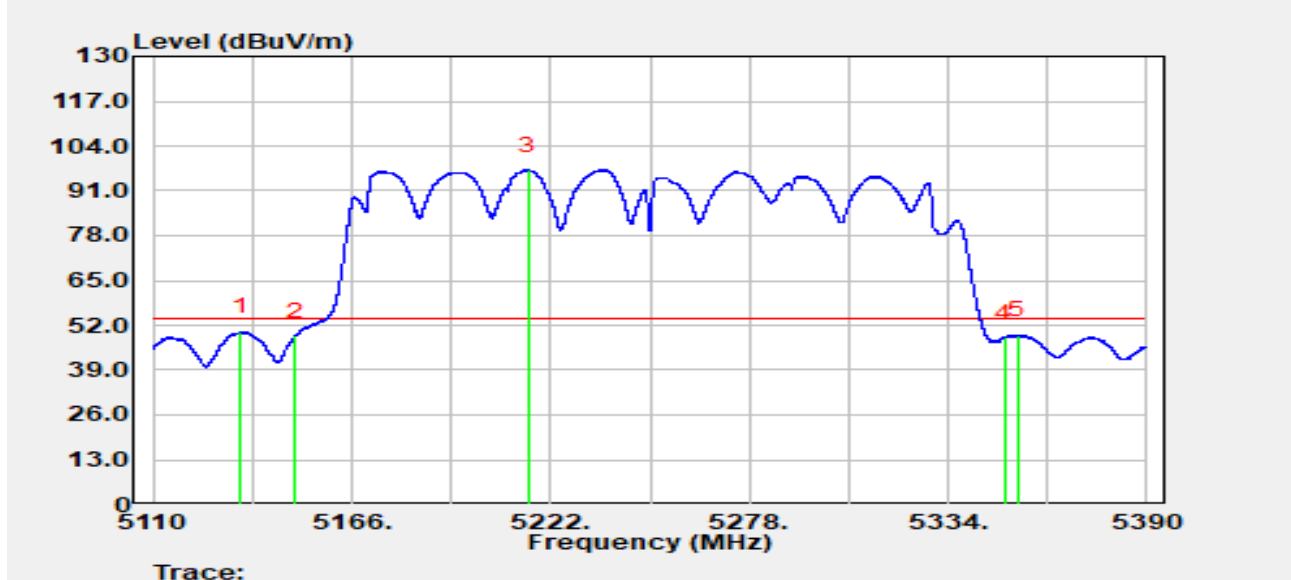


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5134.528	52.69	-2.53	50.16	-3.84	54.00	Average
2		5150.000	49.40	-0.54	48.86	-5.14	54.00	Average
3		5215.532	57.14	39.97	97.11	N/A	N/A	Average
4		5350.000	46.21	2.28	48.49	-5.51	54.00	Average
5		5353.544	48.76	0.42	49.18	-4.82	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT160 at 5250 MHz		

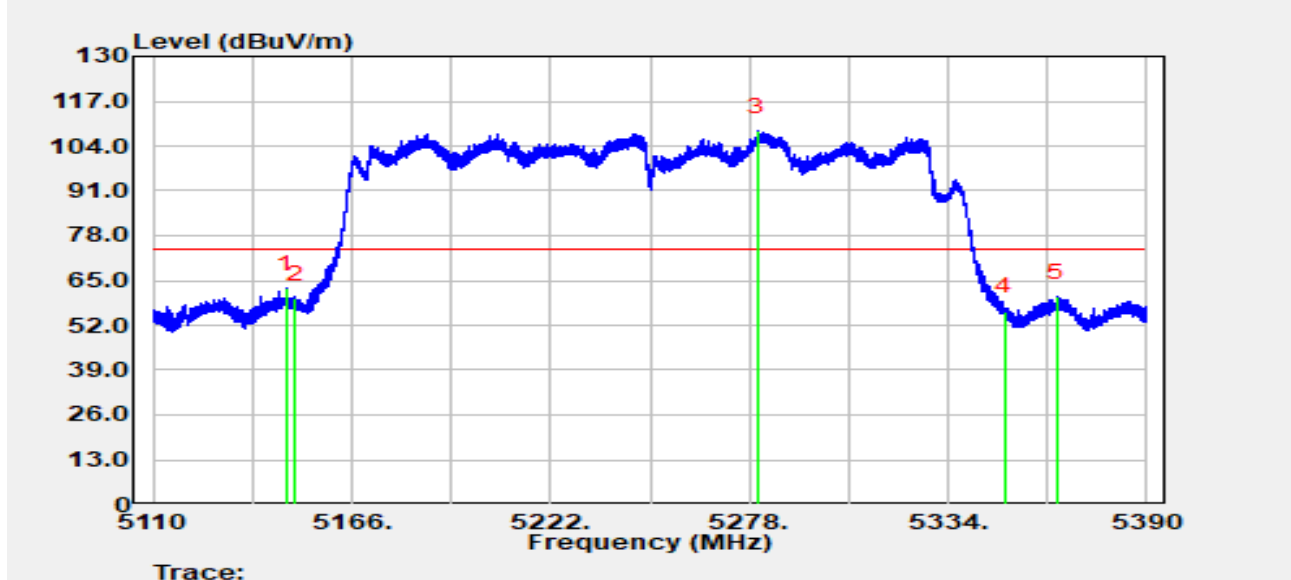


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.520	63.69	-1.05	62.64	-11.36	74.00	Peak
2		5150.000	60.35	-0.54	59.81	-14.19	74.00	Peak
3		5280.184	60.40	47.94	108.33	N/A	N/A	Peak
4		5350.000	53.87	2.28	56.15	-17.85	74.00	Peak
5		5364.632	61.44	-1.33	60.11	-13.89	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT160 at 5250 MHz		

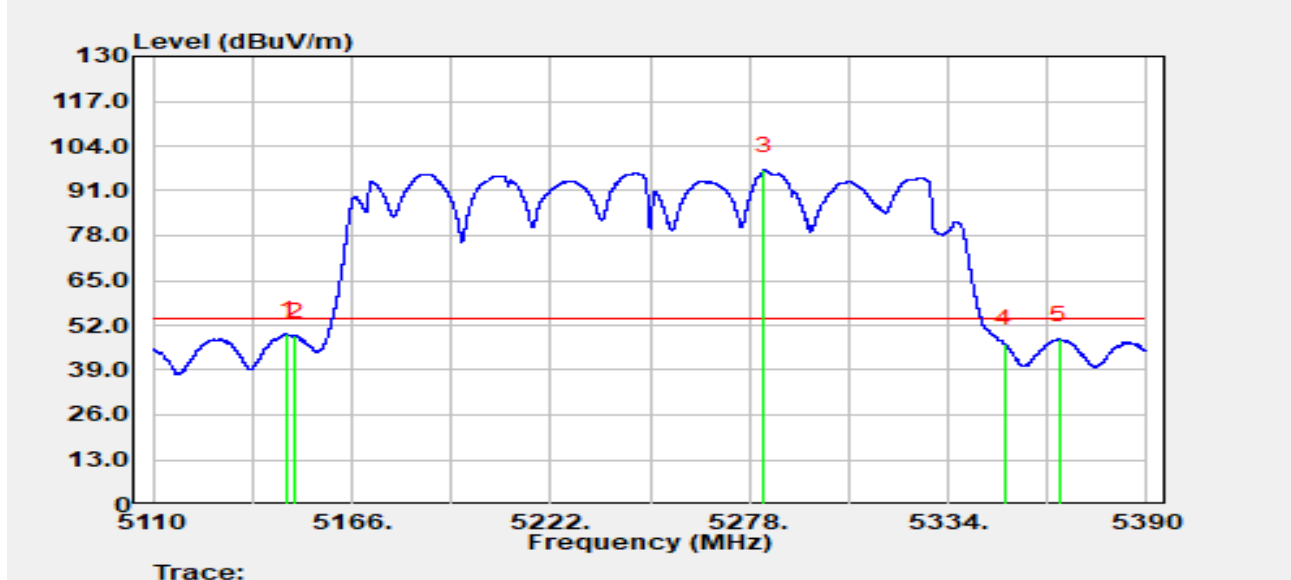


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.968	50.43	-0.97	49.46	-4.54	54.00	Average
2		5150.000	49.46	-0.54	48.92	-5.08	54.00	Average
3		5282.116	46.10	50.94	97.03	N/A	N/A	Average
4		5350.000	44.41	2.28	46.69	-7.31	54.00	Average
5		5365.276	49.31	-1.39	47.92	-6.08	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT160 at 5570 MHz		

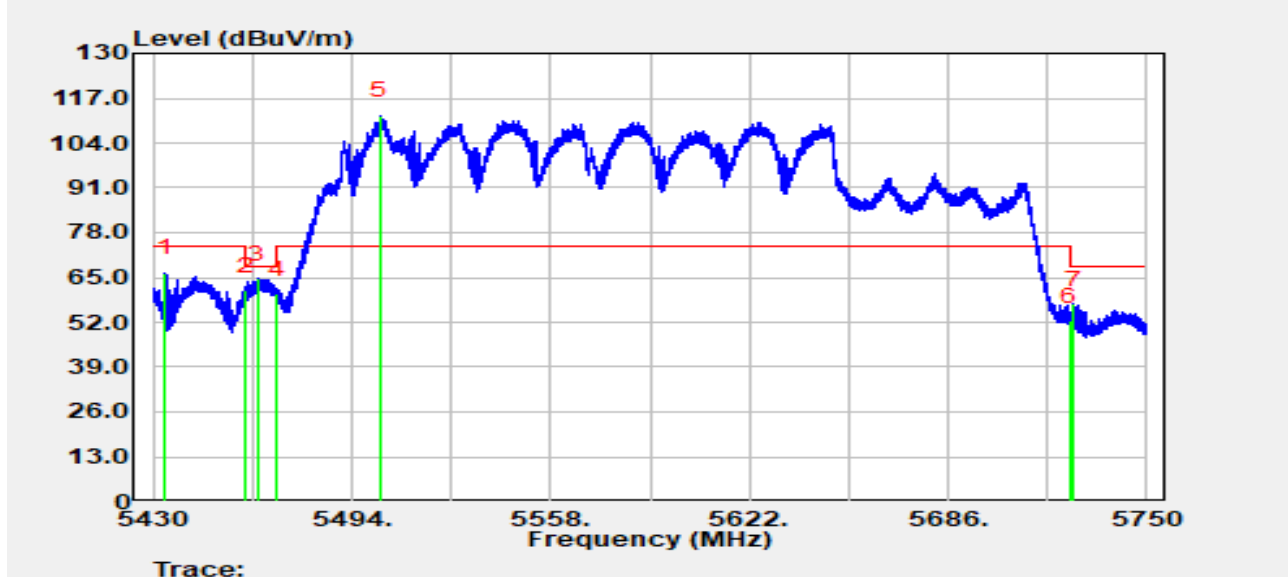


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5434.064	68.30	-1.85	66.44	-7.56	74.00	Peak
2		5460.000	61.84	-0.69	61.14	-7.06	68.20	Peak
3	*	5463.792	65.04	-0.41	64.63	-3.57	68.20	Peak
4		5470.000	59.20	1.00	60.20	-8.00	68.20	Peak
5		5503.024	67.31	44.69	112.00	N/A	N/A	Peak
6		5725.000	51.42	1.01	52.43	-15.77	68.20	Peak
7		5726.512	57.04	0.26	57.30	-10.90	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT160 at 5570 MHz		

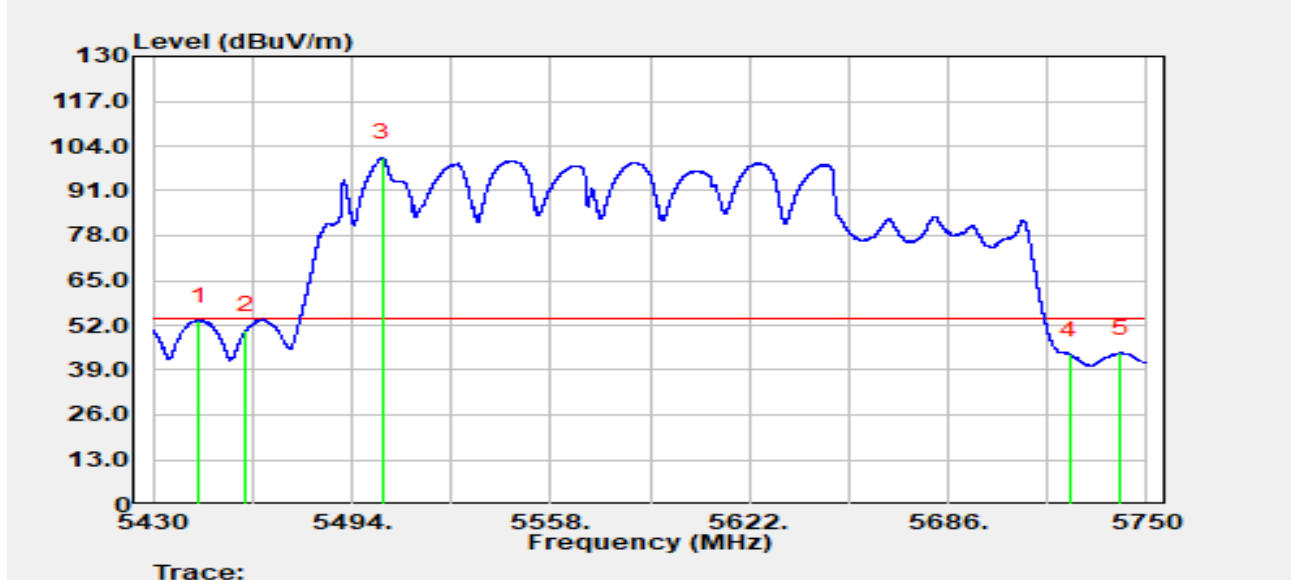


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5444.720	54.98	-1.57	53.41	-0.59	54.00	Average
2		5460.000	51.35	-0.69	50.66	-3.34	54.00	Average
3		5503.760	54.78	45.91	100.69	N/A	N/A	Average
4		5725.000	42.49	1.01	43.50	-10.50	54.00	Average
5		5741.392	45.81	-1.76	44.05	-9.95	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT160 at 5570 MHz		

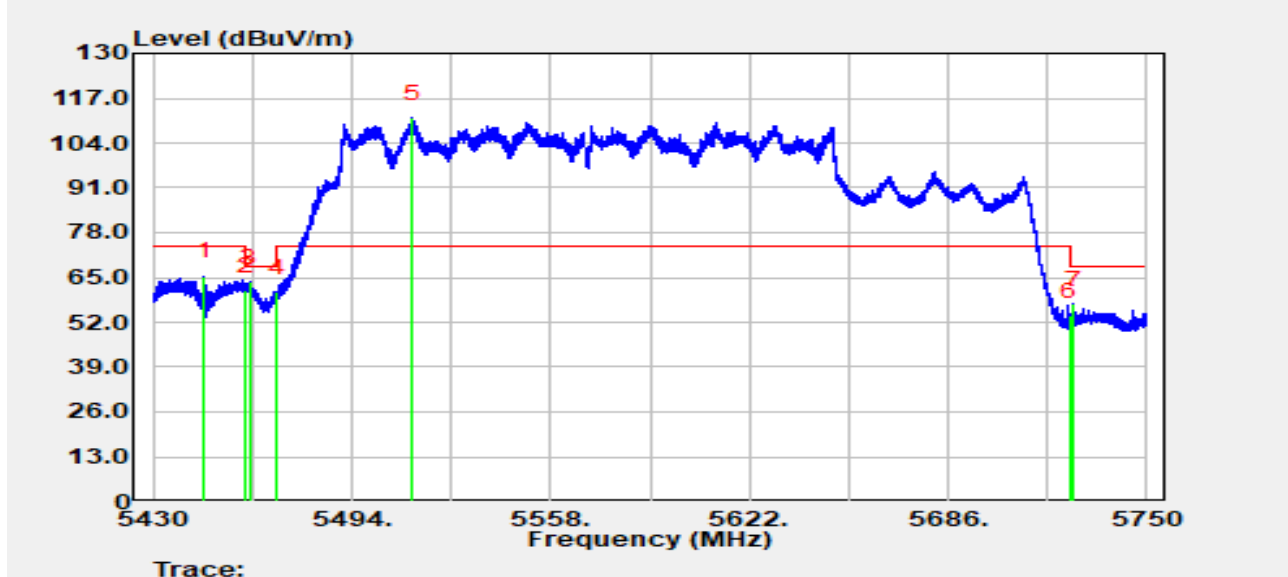


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5446.544	66.92	-1.50	65.42	-8.58	74.00	Peak
2		5460.000	61.99	-0.69	61.30	-6.90	68.20	Peak
3	*	5461.168	64.19	-0.65	63.55	-4.65	68.20	Peak
4		5470.000	59.64	1.00	60.64	-7.56	68.20	Peak
5		5513.392	66.62	44.53	111.15	N/A	N/A	Peak
6		5725.000	52.84	1.01	53.85	-14.35	68.20	Peak
7		5726.352	57.06	0.33	57.39	-10.81	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT160 at 5570 MHz		

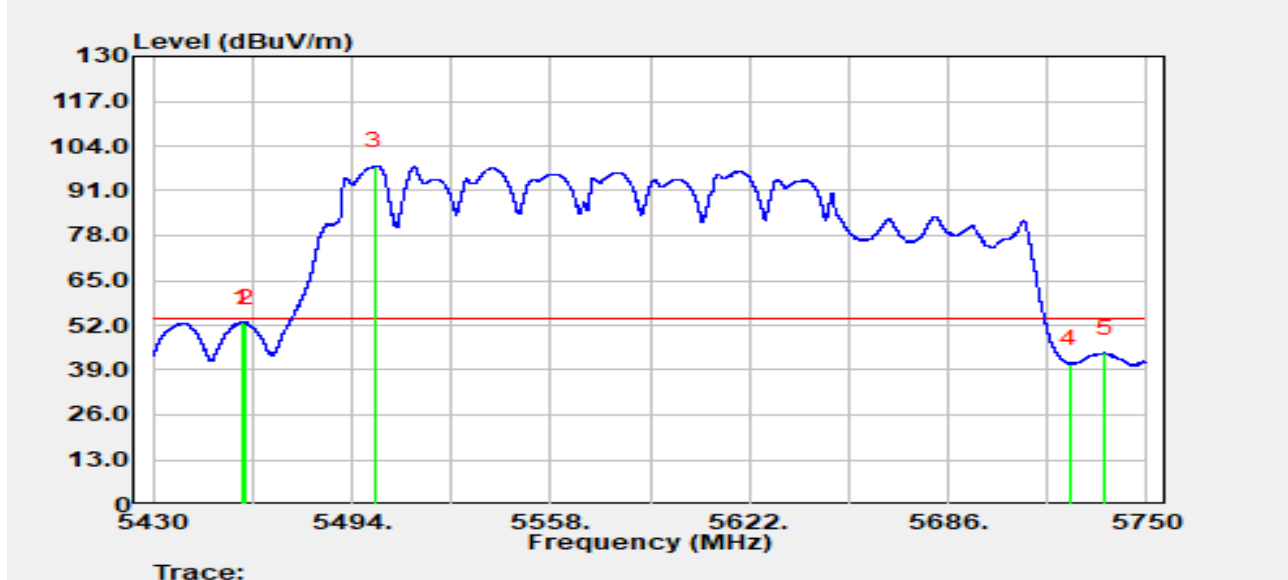


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.480	53.71	-0.79	52.92	-1.08	54.00	Average
2		5460.000	53.33	-0.69	52.64	-1.36	54.00	Average
3		5501.200	56.26	41.87	98.13	N/A	N/A	Average
4		5725.000	39.81	1.01	40.82	-13.18	54.00	Average
5		5736.528	45.42	-1.48	43.94	-10.06	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

WLAN Config 2:

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5500 MHz		

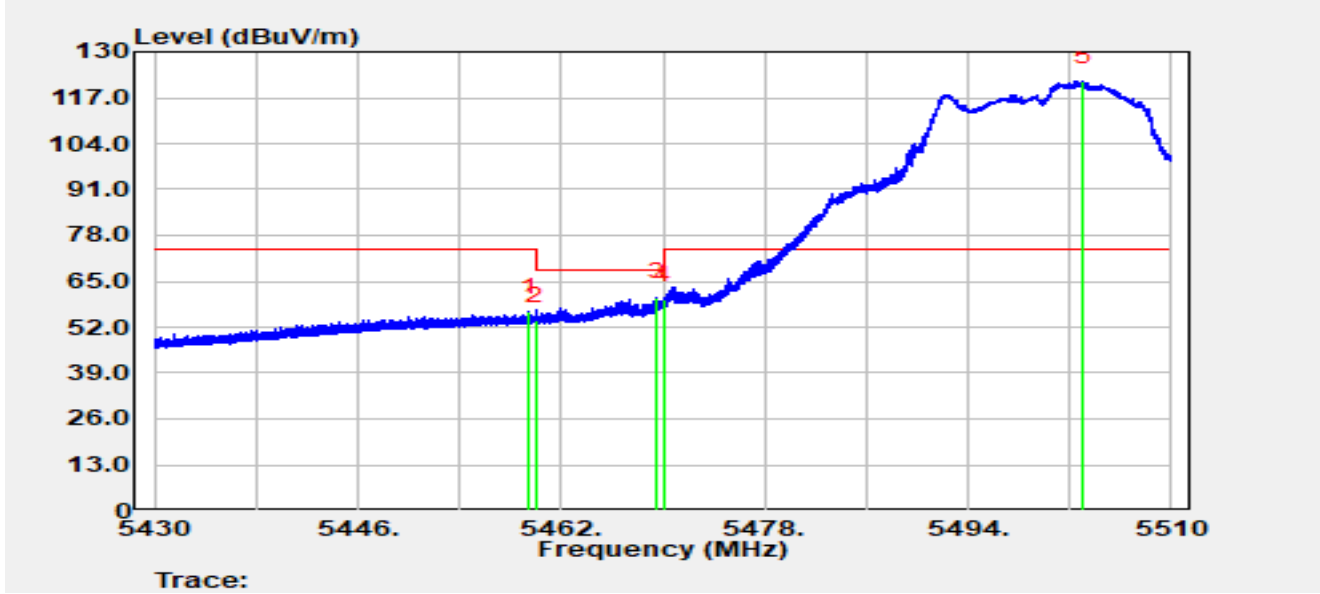


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		5459.432	56.97	-0.76	56.21	-17.79	74.00	Peak
2		5460.000	54.43	-0.69	53.73	-14.47	68.20	Peak
3	*	5469.512	59.50	0.85	60.35	-7.85	68.20	Peak
4		5470.000	58.75	1.00	59.75	-8.45	68.20	Peak
5		5503.104	76.75	44.86	121.61	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5500 MHz		

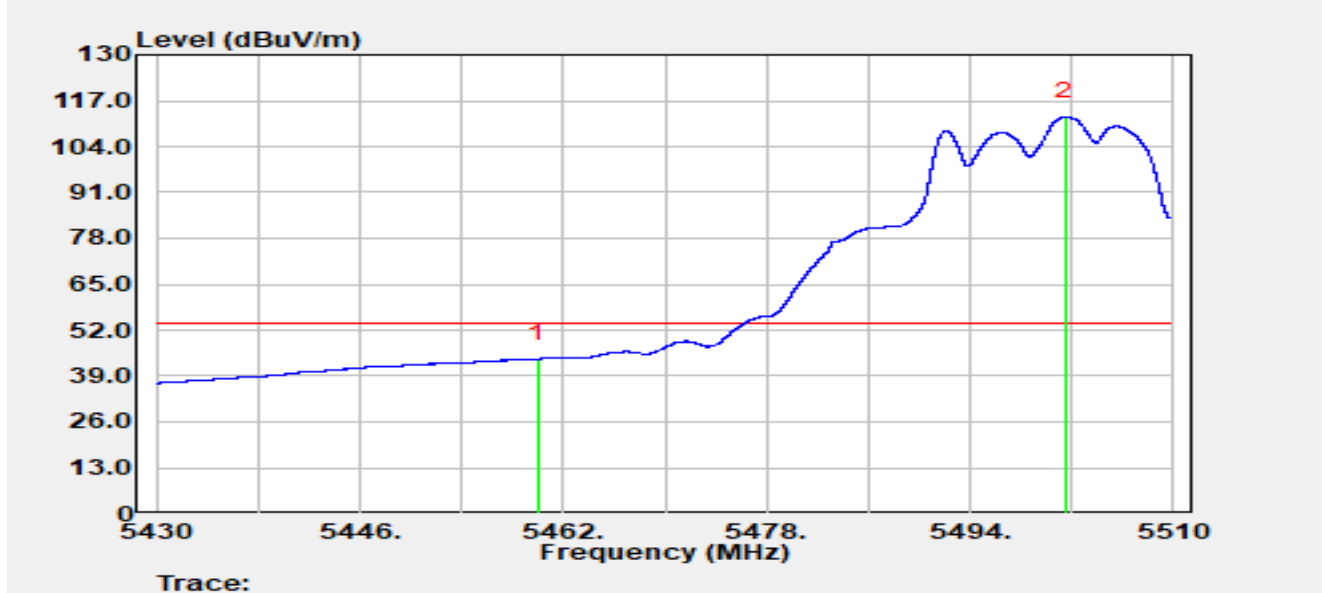


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	44.56	-0.69	43.87	-10.13	54.00	Average
2		5501.496	70.28	42.13	112.41	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5500 MHz		

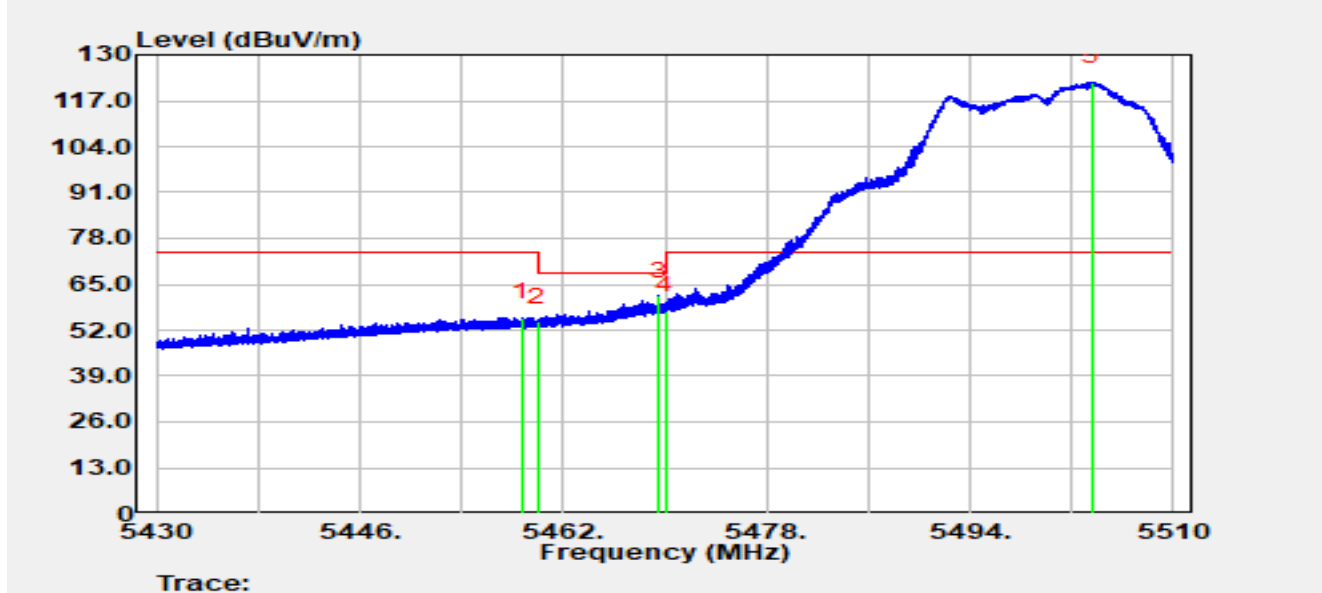


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.736	56.44	-0.82	55.63	-18.37	74.00	Peak
2		5460.000	55.14	-0.69	54.45	-13.75	68.20	Peak
3	*	5469.488	60.80	0.84	61.65	-6.55	68.20	Peak
4		5470.000	56.53	1.00	57.53	-10.67	68.20	Peak
5		5503.624	76.55	45.75	122.31	N/A	N/A	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5500 MHz		

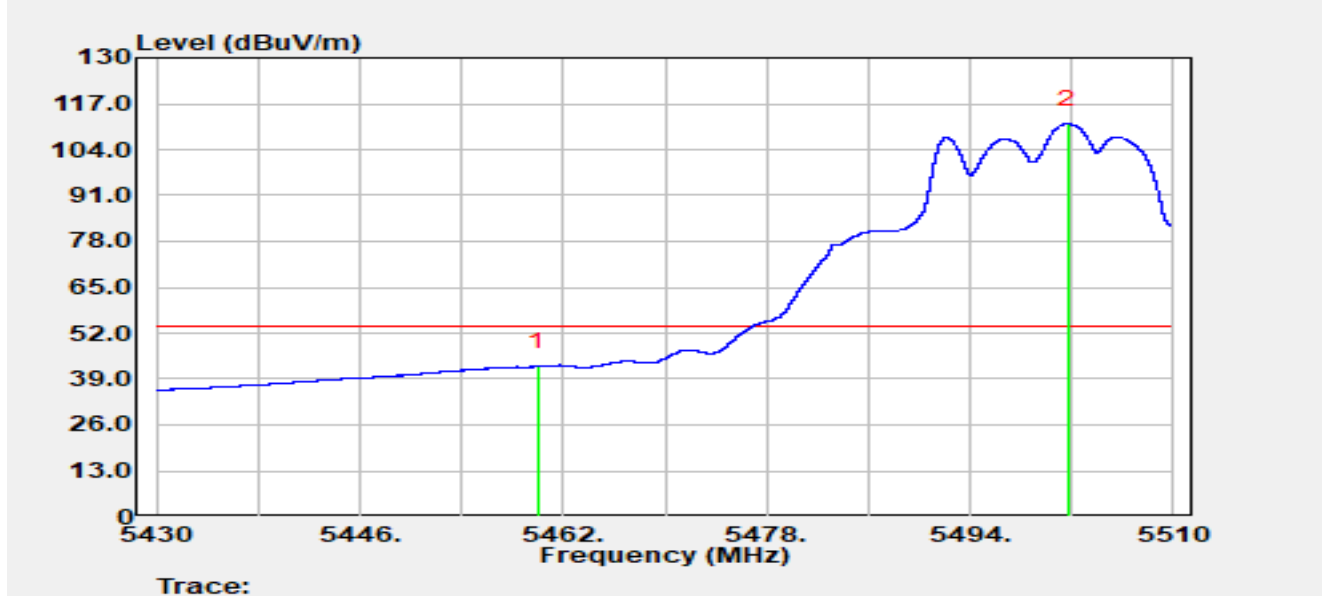


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	43.20	-0.69	42.51	-11.49	54.00	Average
2		5501.648	69.05	42.27	111.32	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5700 MHz		

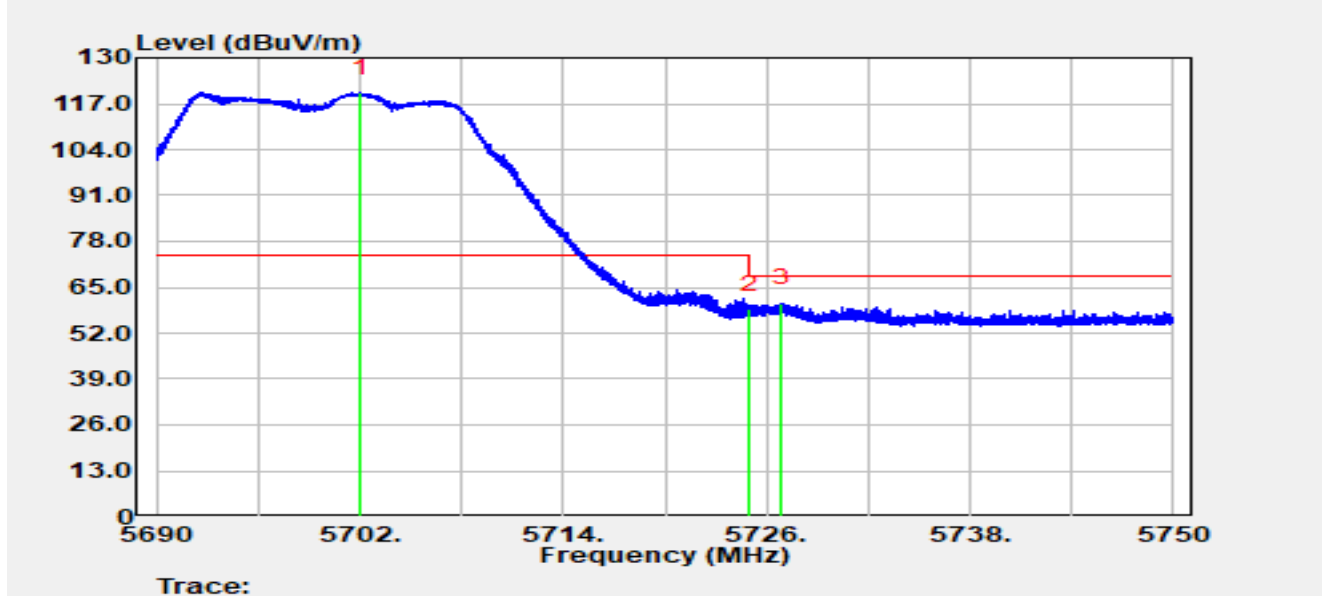


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5702.048	80.34	39.81	120.15	N/A	N/A	Peak
2		5725.000	57.71	1.01	58.72	-9.48	68.20	Peak
3	*	5726.876	60.29	0.10	60.38	-7.82	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5700 MHz		

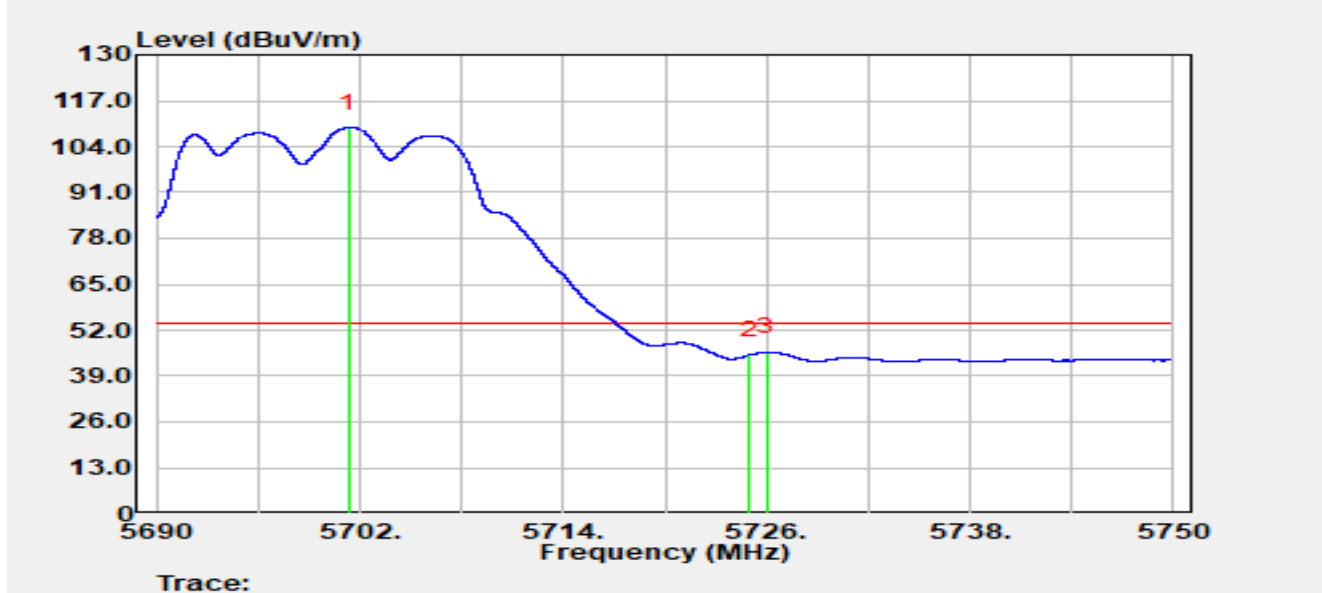


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5701.358	70.33	39.04	109.37	N/A	N/A	Average
2		5725.000	43.93	1.01	44.94	-9.06	54.00	Average
3	*	5726.042	45.33	0.43	45.76	-8.24	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5700 MHz		

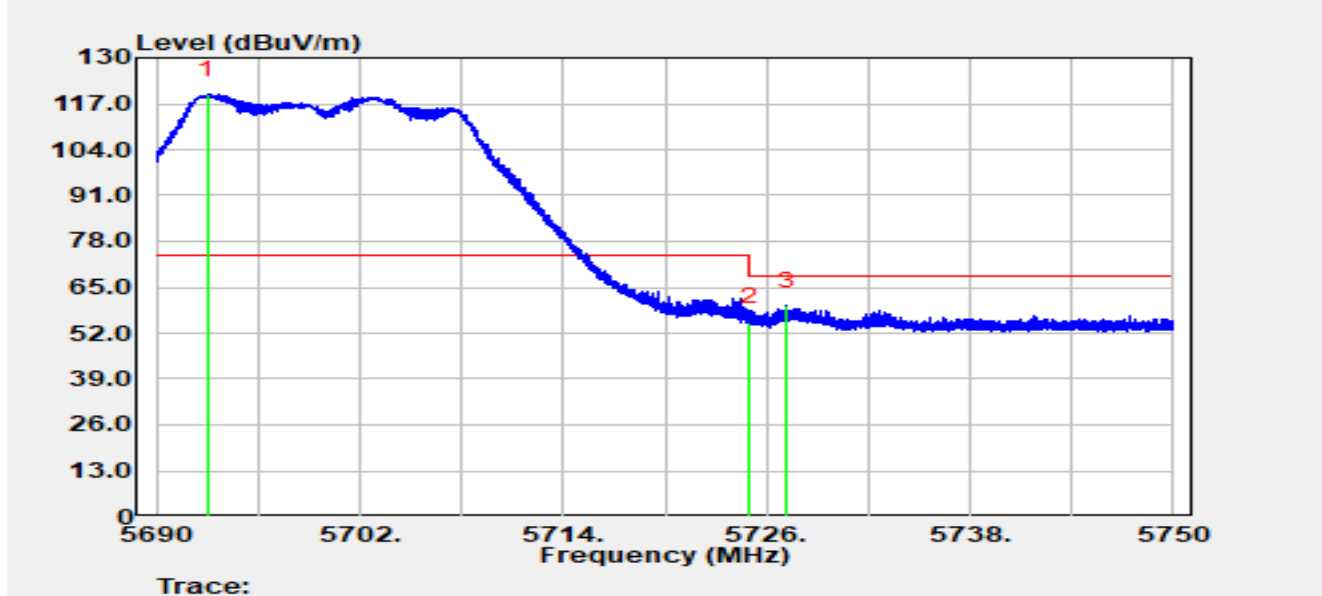


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5692.988	75.73	43.89	119.62	N/A	N/A	Peak
2		5725.000	54.14	1.01	55.15	-13.05	68.20	Peak
3	*	5727.206	59.75	-0.05	59.71	-8.49	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5700 MHz		

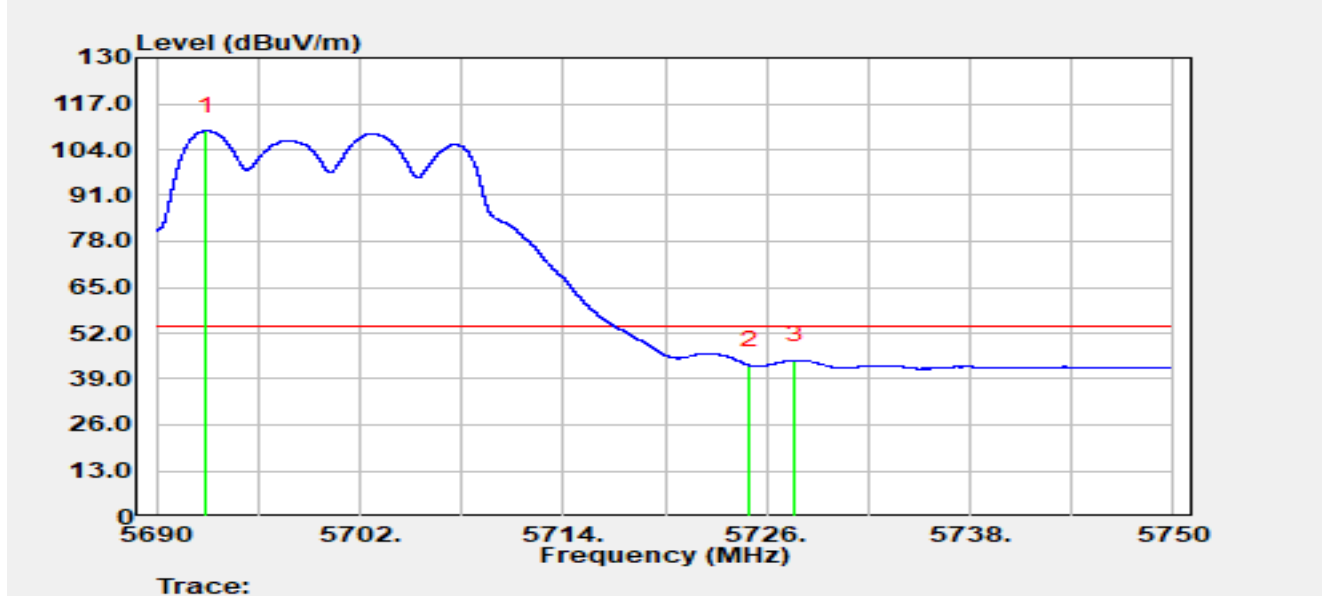


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5692.928	65.41	43.86	109.27	N/A	N/A	Average
2		5725.000	41.89	1.01	42.89	-11.11	54.00	Average
3	*	5727.638	44.53	-0.14	44.39	-9.61	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5745 MHz		

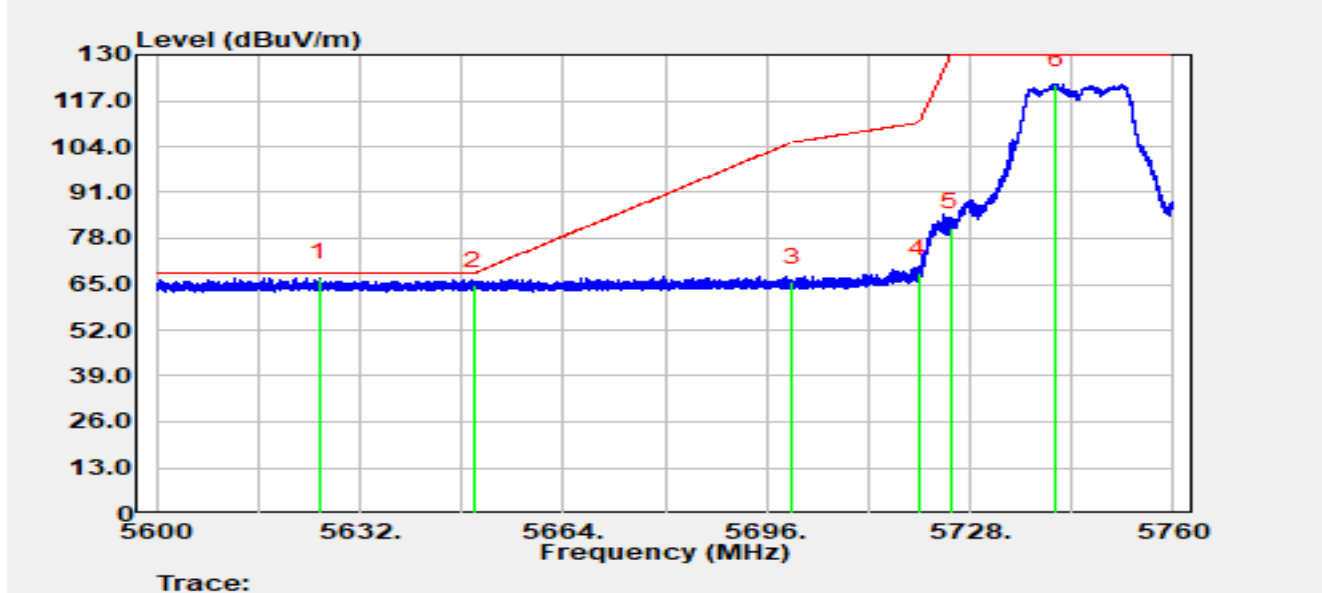


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5625.600	70.22	-3.37	66.85	-1.35	68.20	Peak
2		5650.000	68.19	-3.65	64.54	-3.66	68.20	Peak
3		5700.000	69.05	-3.47	65.57	-39.63	105.20	Peak
4		5720.000	71.59	-3.45	68.14	-42.66	110.80	Peak
5		5725.000	84.62	-3.47	81.15	-48.85	130.00	Peak
6		5741.408	125.24	-3.62	121.62	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5745 MHz		

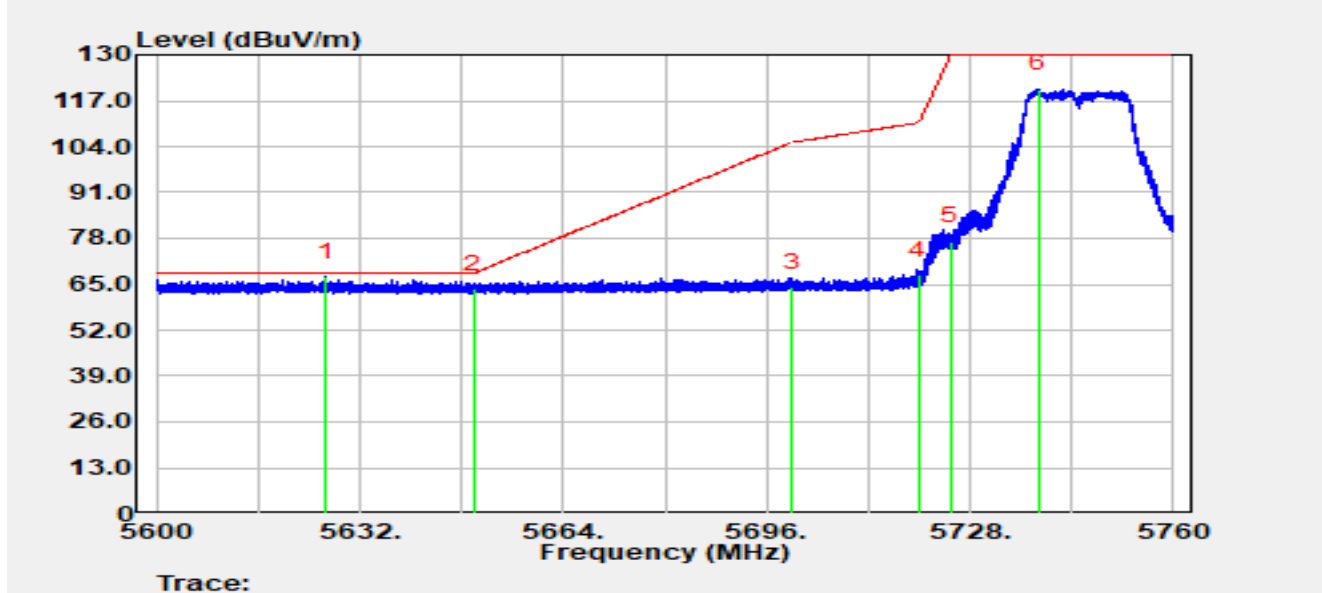


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5626.752	70.43	-3.39	67.03	-1.17	68.20	Peak
2		5650.000	67.26	-3.65	63.62	-4.58	68.20	Peak
3		5700.000	67.55	-3.47	64.08	-41.12	105.20	Peak
4		5720.000	71.09	-3.45	67.63	-43.17	110.80	Peak
5		5725.000	80.61	-3.47	77.14	-52.86	130.00	Peak
6		5738.688	123.93	-3.59	120.33	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5825 MHz		

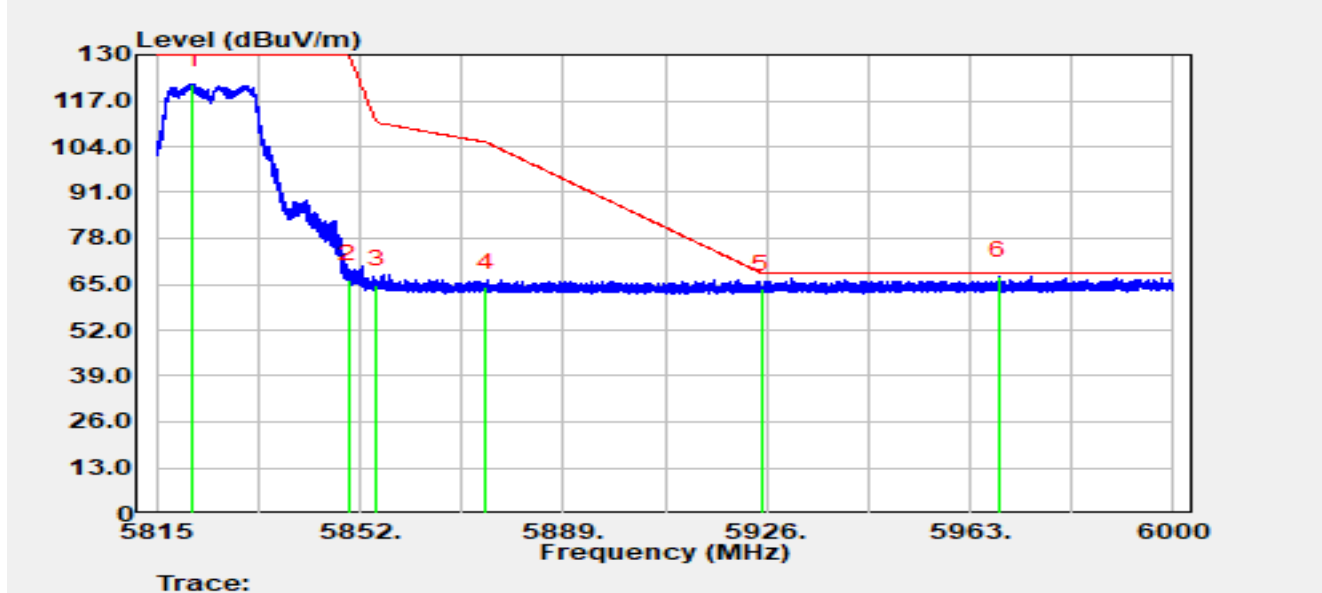


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5821.604	125.37	-3.77	121.60	N/A	N/A	Peak
2		5850.000	70.15	-3.75	66.40	-63.60	130.00	Peak
3		5855.000	68.61	-3.75	64.86	-45.94	110.80	Peak
4		5875.000	67.89	-3.82	64.06	-41.14	105.20	Peak
5		5925.000	67.24	-3.71	63.54	-4.66	68.20	Peak
6	*	5968.291	70.91	-3.64	67.27	-0.93	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5825 MHz		

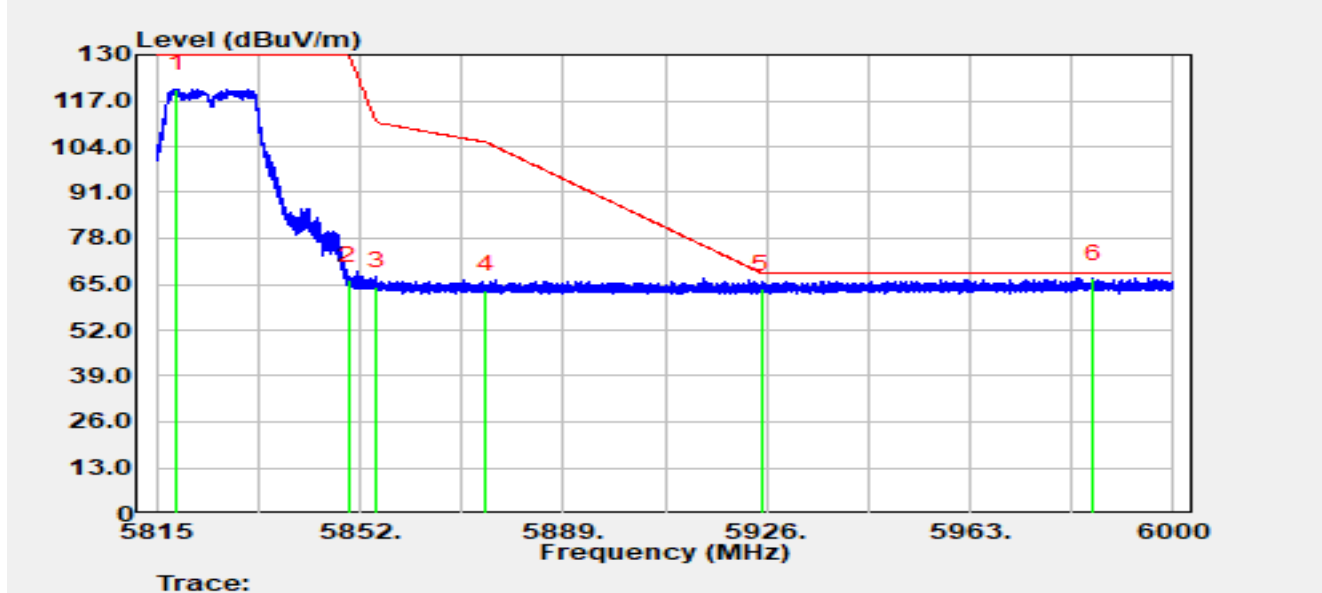


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5818.737	124.22	-3.79	120.43	N/A	N/A	Peak
2		5850.000	69.91	-3.75	66.15	-63.85	130.00	Peak
3		5855.000	68.21	-3.75	64.46	-46.34	110.80	Peak
4		5875.000	67.28	-3.82	63.46	-41.74	105.20	Peak
5		5925.000	67.28	-3.71	63.57	-4.63	68.20	Peak
6	*	5985.311	70.29	-3.68	66.62	-1.58	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

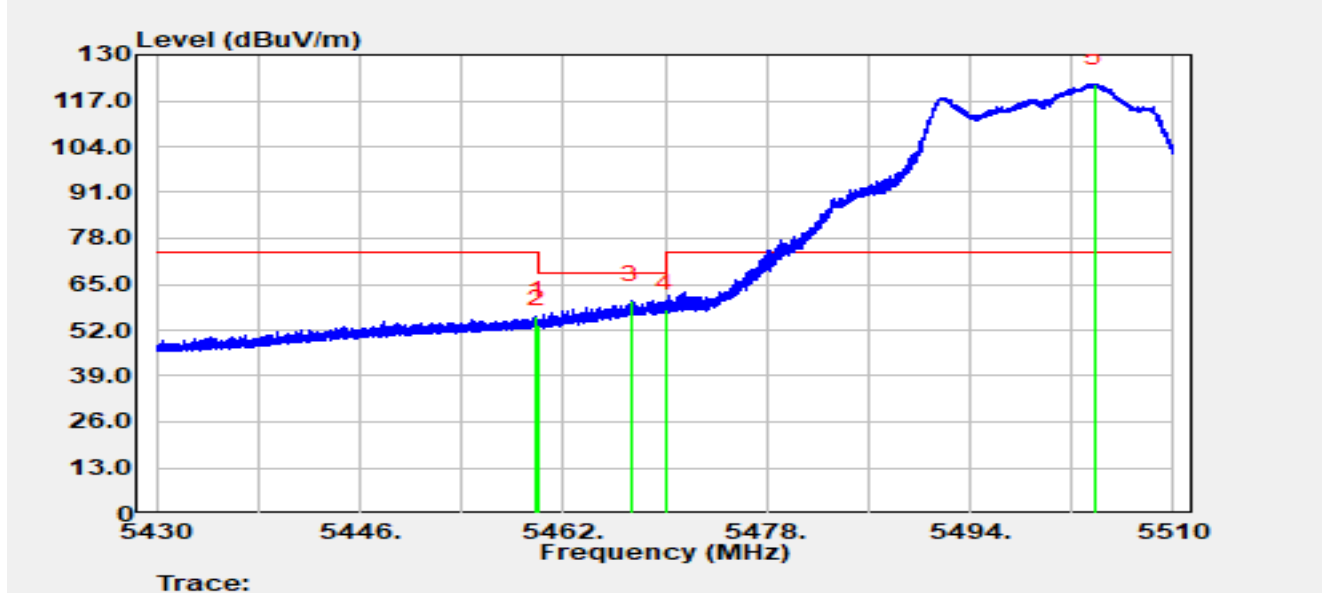


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.904	56.64	-0.71	55.94	-18.06	74.00	Peak
2		5460.000	54.29	-0.69	53.59	-14.61	68.20	Peak
3	*	5467.328	60.18	0.19	60.37	-7.83	68.20	Peak
4		5470.000	57.08	1.00	58.08	-10.12	68.20	Peak
5		5503.768	75.79	45.92	121.71	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

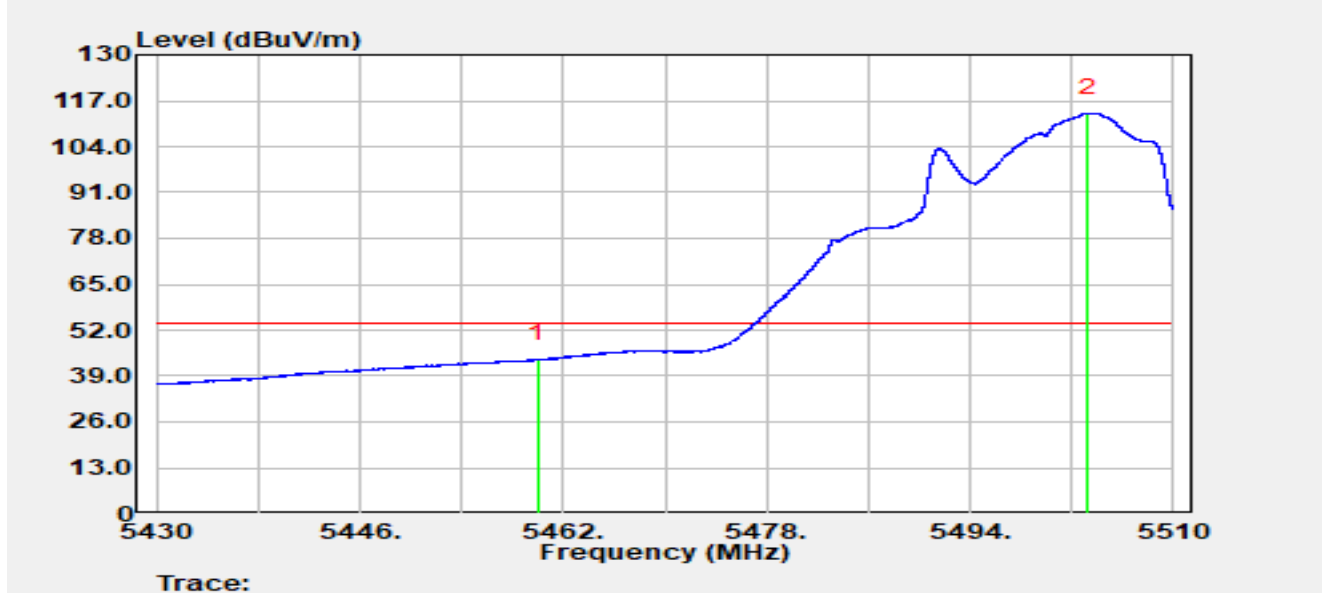


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	44.39	-0.69	43.69	-10.31	54.00	Average
2		5503.304	68.21	45.24	113.45	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

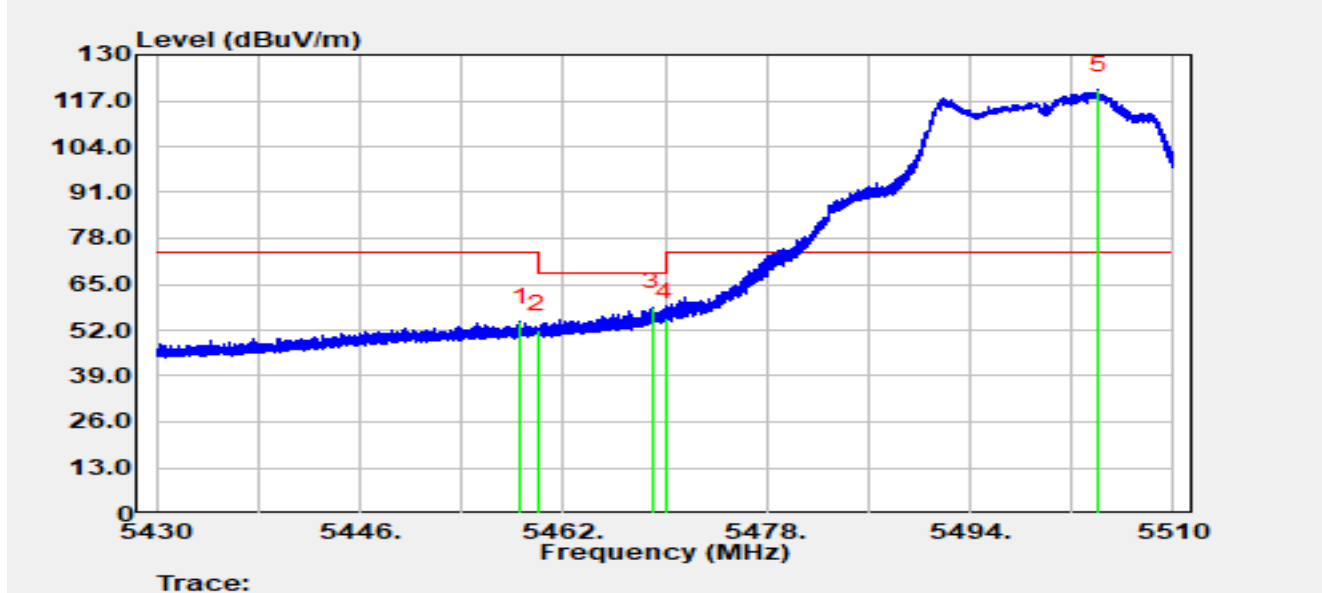


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.592	55.05	-0.80	54.25	-19.75	74.00	Peak
2		5460.000	52.76	-0.69	52.06	-16.14	68.20	Peak
3	*	5468.984	57.72	0.67	58.39	-9.81	68.20	Peak
4		5470.000	54.60	1.00	55.60	-12.60	68.20	Peak
5		5504.120	73.78	46.29	120.07	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

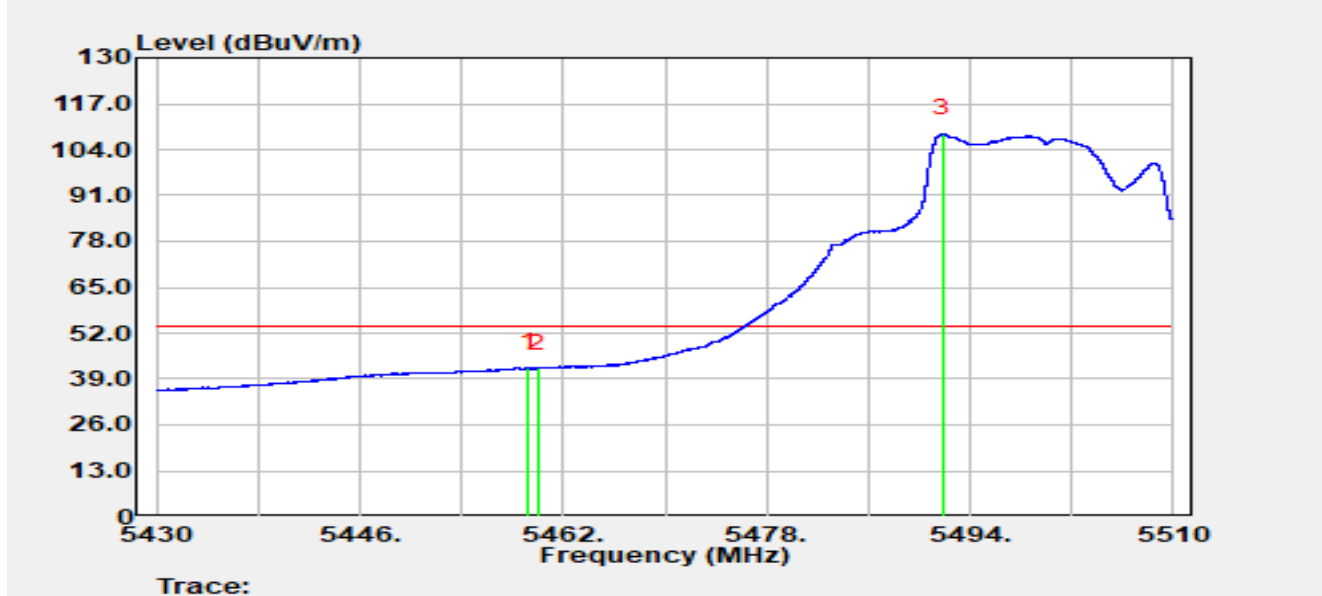


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.224	42.98	-0.79	42.20	-11.80	54.00	Average
2		5460.000	42.83	-0.69	42.14	-11.86	54.00	Average
3		5491.872	60.73	47.73	108.46	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5700 MHz		

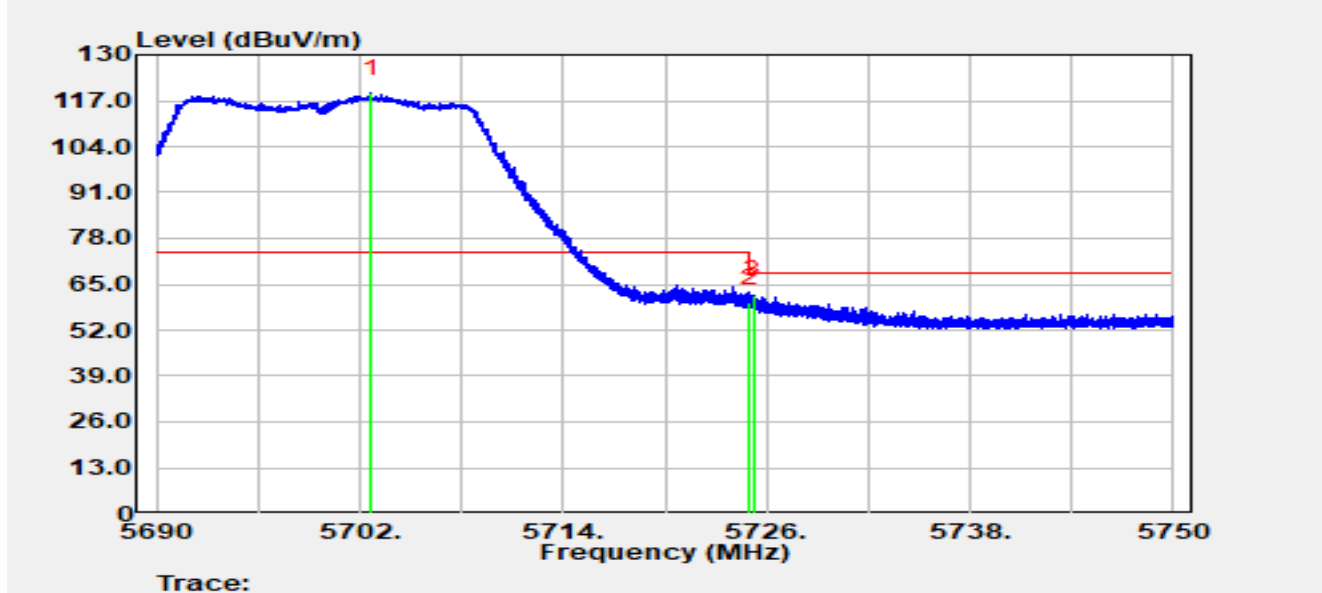


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5702.696	78.73	40.34	119.07	N/A	N/A	Peak
2		5725.000	58.61	1.01	59.61	-8.59	68.20	Peak
3	*	5725.196	61.14	0.89	62.03	-6.17	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5700 MHz		

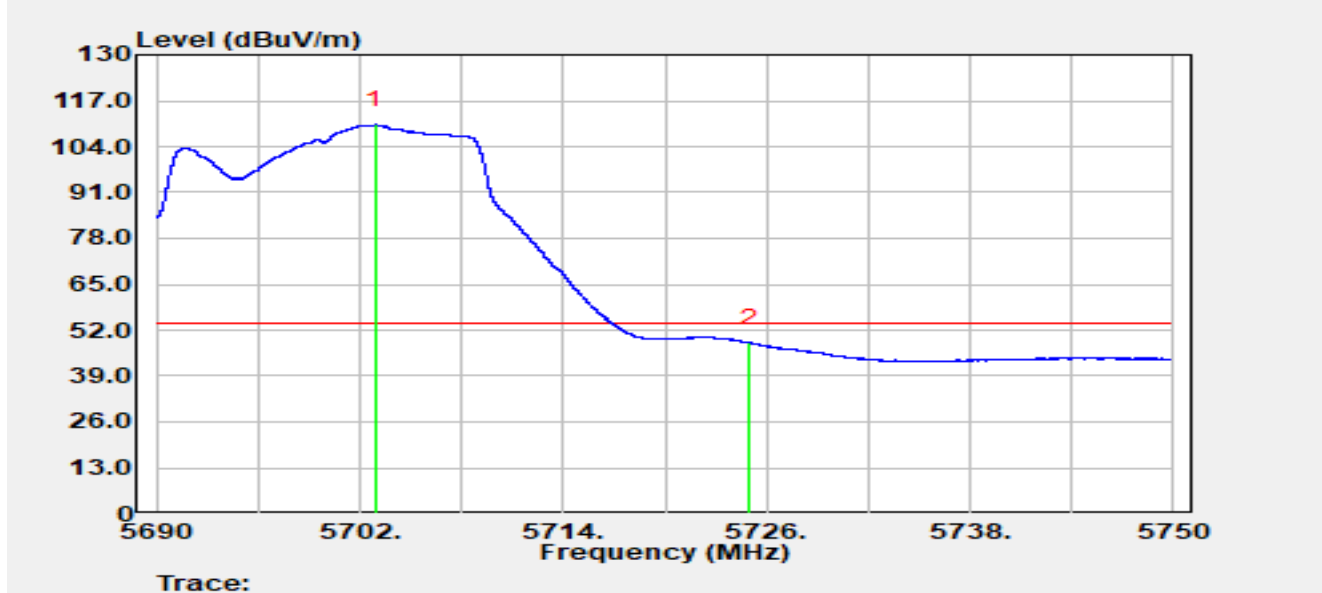


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		5702.882	69.66	40.47	110.13	N/A	N/A	Average
2	*	5725.000	47.46	1.01	48.47	-5.53	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5700 MHz		

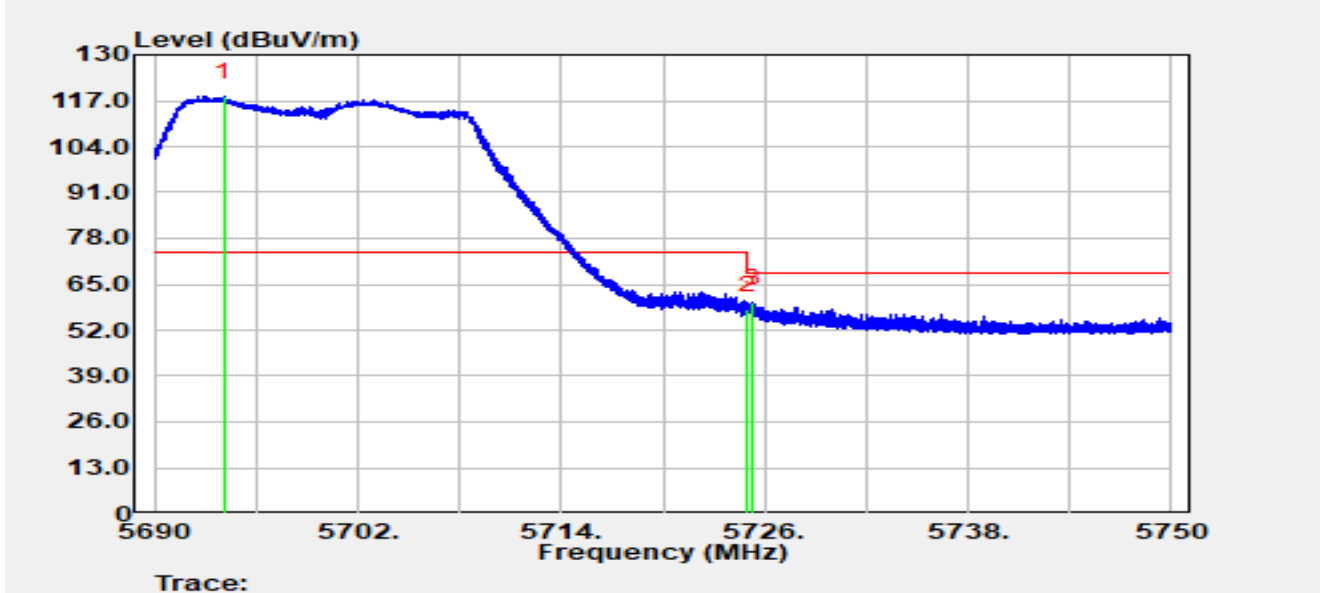


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5694.134	74.24	43.94	118.18	N/A	N/A	Peak
2		5725.000	56.65	1.01	57.66	-10.54	68.20	Peak
3	*	5725.316	58.95	0.83	59.78	-8.42	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5700 MHz		

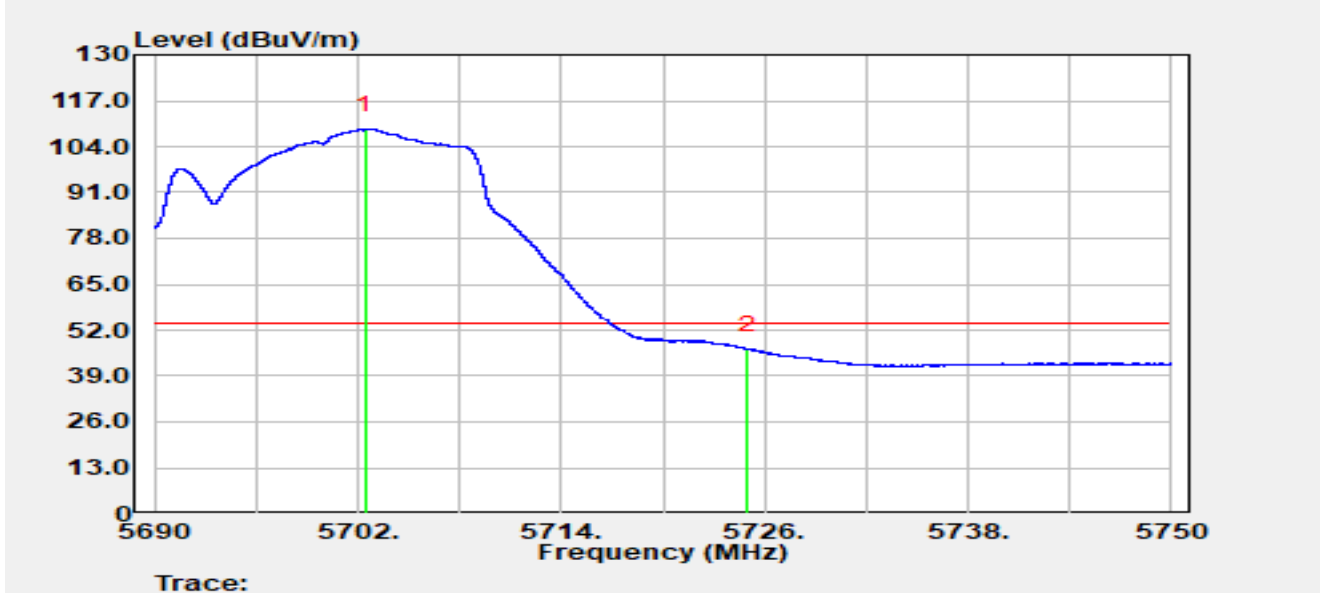


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5702.420	68.67	40.13	108.80	N/A	N/A	Average
2	*	5725.000	45.59	1.01	46.60	-7.40	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5745 MHz		

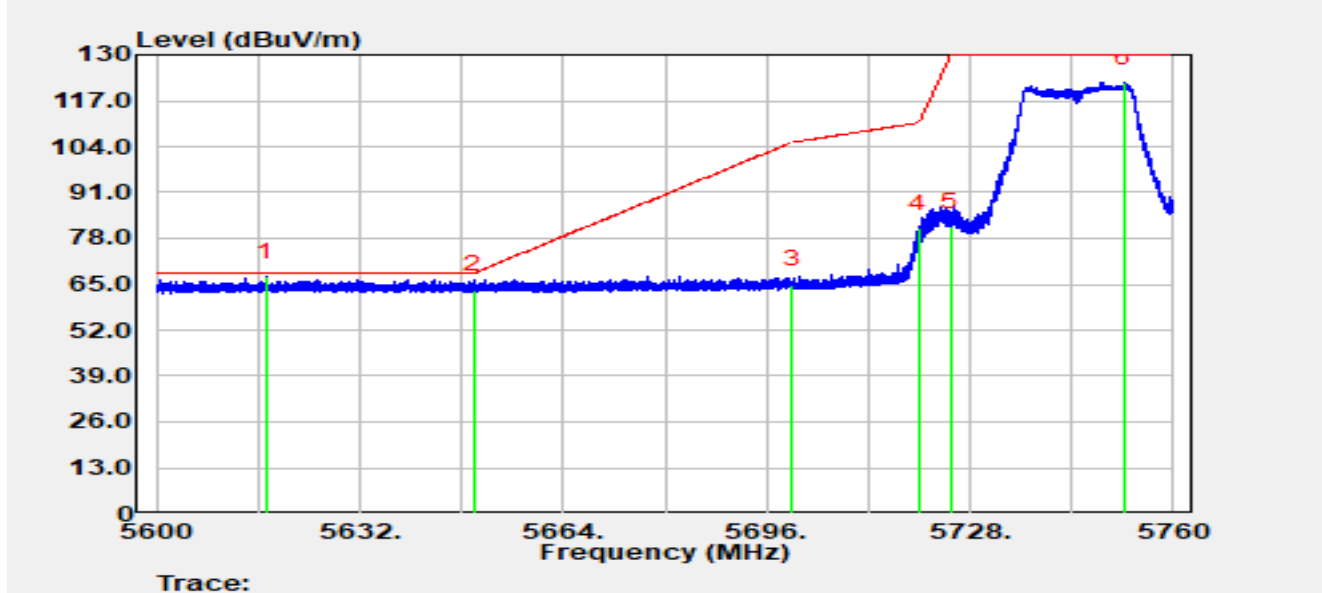


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5617.152	70.55	-3.42	67.14	-1.06	68.20	Peak
2		5650.000	67.00	-3.65	63.35	-4.85	68.20	Peak
3		5700.000	68.27	-3.47	64.79	-40.41	105.20	Peak
4		5720.000	84.34	-3.45	80.88	-29.92	110.80	Peak
5		5725.000	84.75	-3.47	81.28	-48.72	130.00	Peak
6		5752.224	125.75	-3.65	122.09	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5745 MHz		

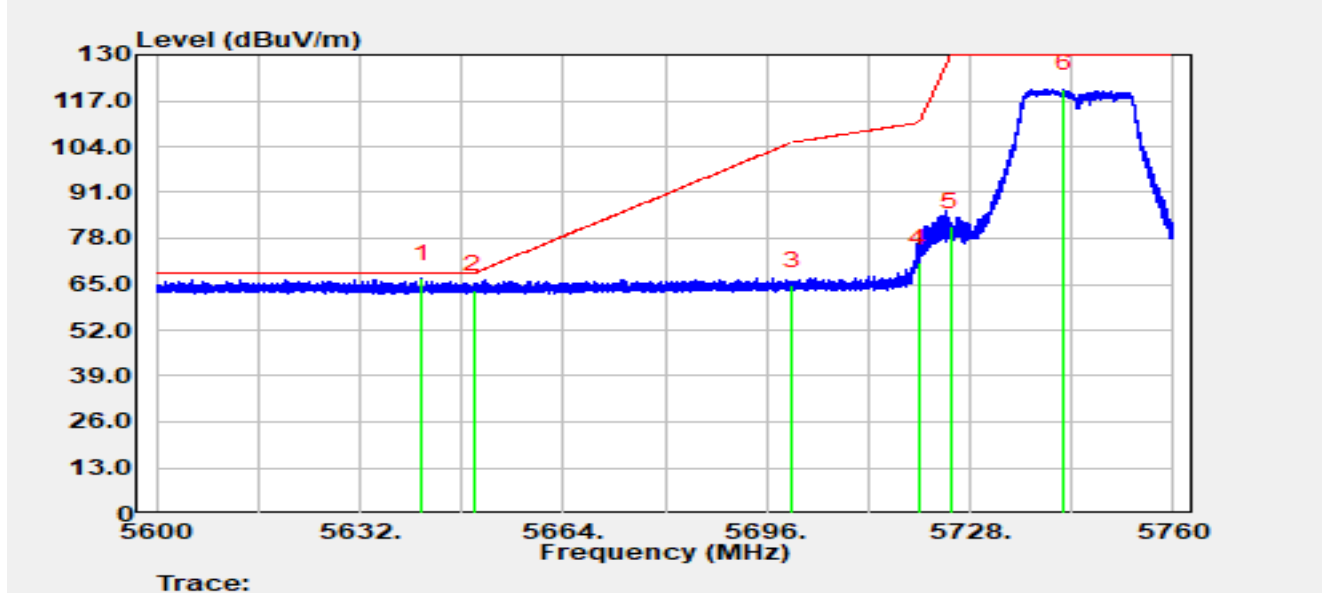


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5641.808	70.19	-3.65	66.54	-1.66	68.20	Peak
2		5650.000	67.13	-3.65	63.49	-4.71	68.20	Peak
3		5700.000	68.02	-3.47	64.55	-40.65	105.20	Peak
4		5720.000	74.42	-3.45	70.96	-39.84	110.80	Peak
5		5725.000	84.84	-3.47	81.38	-48.62	130.00	Peak
6		5742.672	123.87	-3.63	120.24	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5825 MHz		

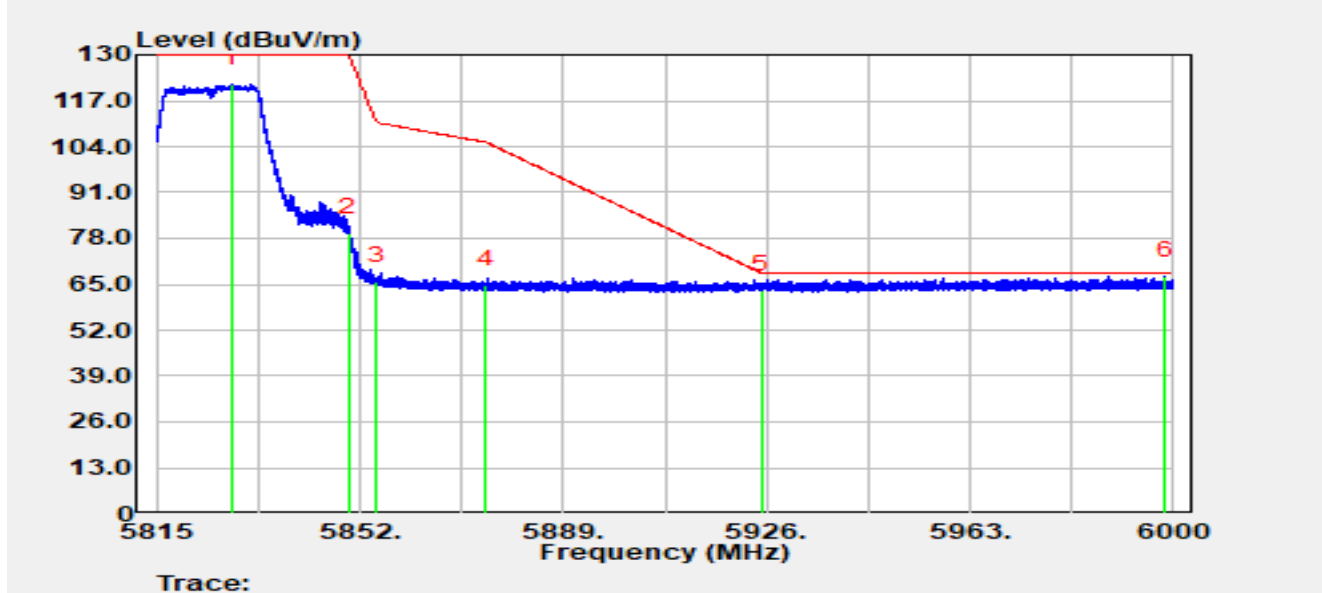


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5828.727	125.57	-3.74	121.83	N/A	N/A	Peak
2		5850.000	83.37	-3.75	79.61	-50.39	130.00	Peak
3		5855.000	69.69	-3.75	65.94	-44.86	110.80	Peak
4		5875.000	68.70	-3.82	64.88	-40.32	105.20	Peak
5		5925.000	67.13	-3.71	63.43	-4.77	68.20	Peak
6	*	5998.409	70.97	-3.72	67.25	-0.95	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5825 MHz		

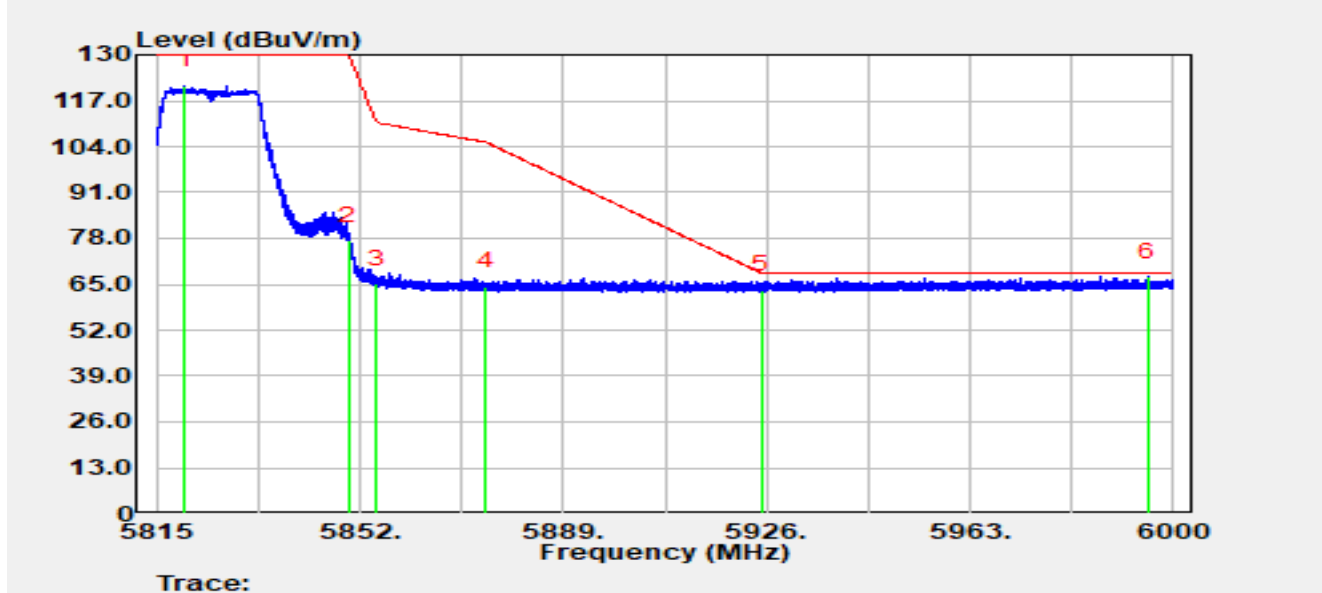


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5820.199	125.13	-3.78	121.34	N/A	N/A	Peak
2		5850.000	81.22	-3.75	77.47	-52.53	130.00	Peak
3		5855.000	68.99	-3.75	65.24	-45.56	110.80	Peak
4		5875.000	68.17	-3.82	64.34	-40.86	105.20	Peak
5		5925.000	67.07	-3.71	63.37	-4.83	68.20	Peak
6	*	5995.283	70.90	-3.72	67.19	-1.01	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

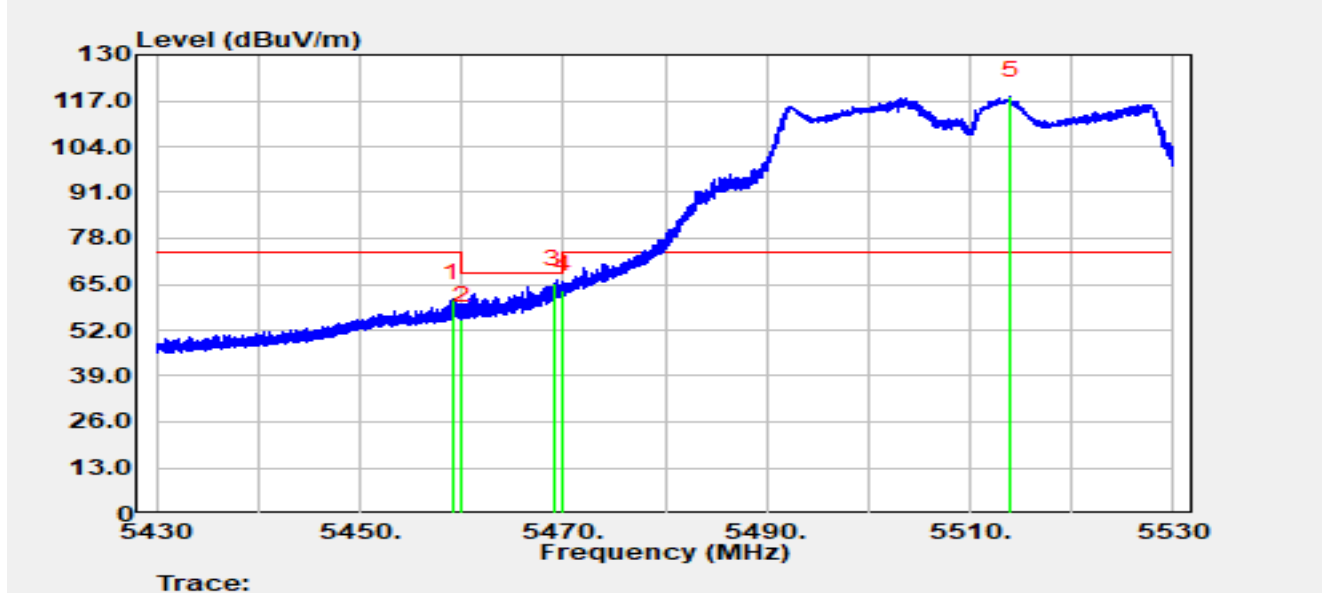


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.150	61.68	-0.79	60.89	-13.11	74.00	Peak
2		5460.000	55.51	-0.69	54.82	-13.38	68.20	Peak
3	*	5469.100	64.49	0.73	65.23	-2.97	68.20	Peak
4		5470.000	62.31	1.00	63.31	-4.89	68.20	Peak
5		5513.960	73.57	44.89	118.45	N/A	N/A	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

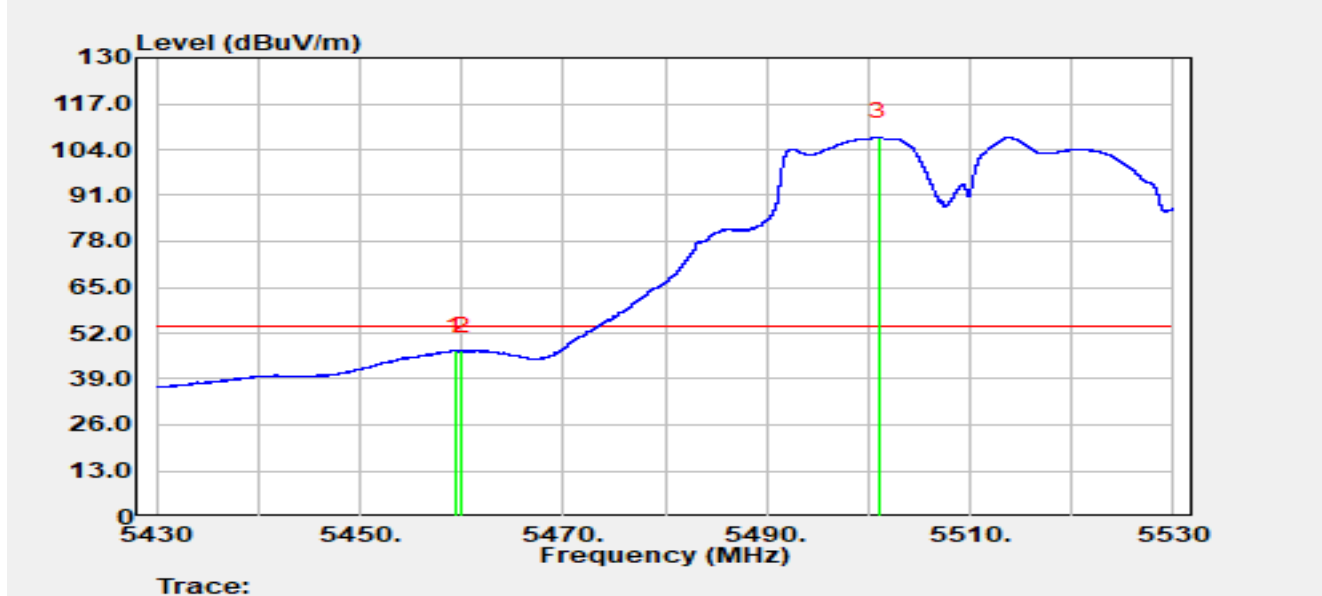


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.370	47.86	-0.77	47.09	-6.91	54.00	Average
2		5460.000	47.67	-0.69	46.98	-7.02	54.00	Average
3		5500.990	65.83	41.63	107.46	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

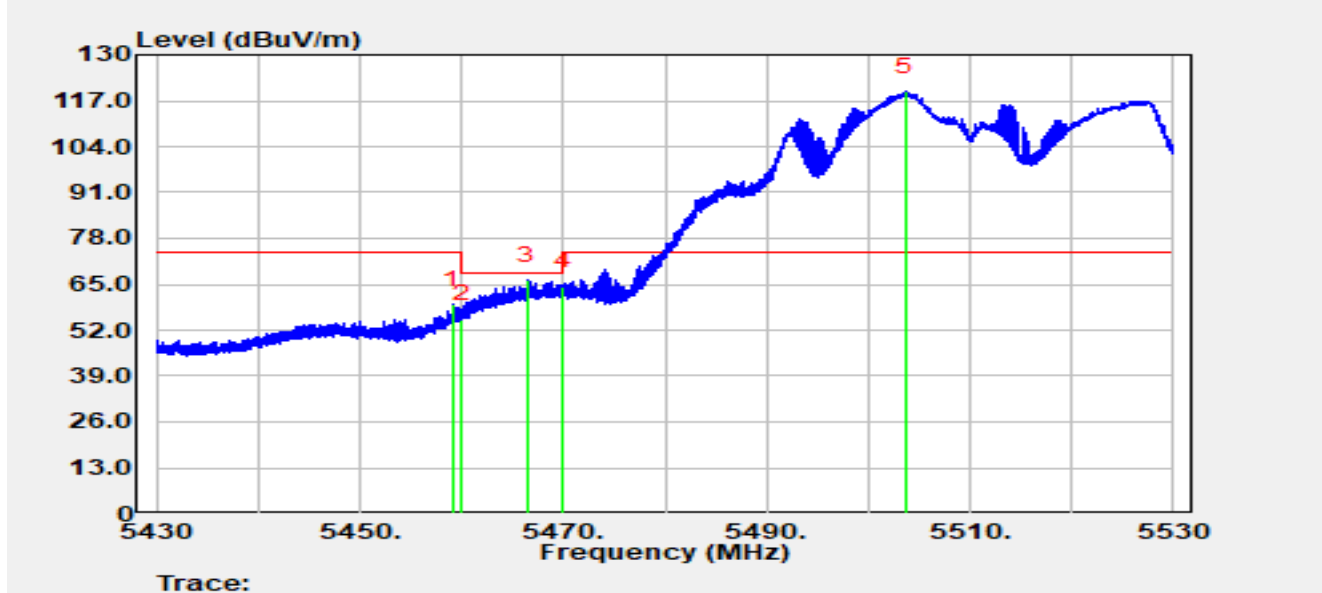


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.110	59.99	-0.80	59.19	-14.81	74.00	Peak
2		5460.000	55.75	-0.69	55.05	-13.15	68.20	Peak
3	*	5466.440	66.15	-0.01	66.15	-2.05	68.20	Peak
4		5470.000	63.28	1.00	64.29	-3.91	68.20	Peak
5		5503.660	73.82	45.80	119.62	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

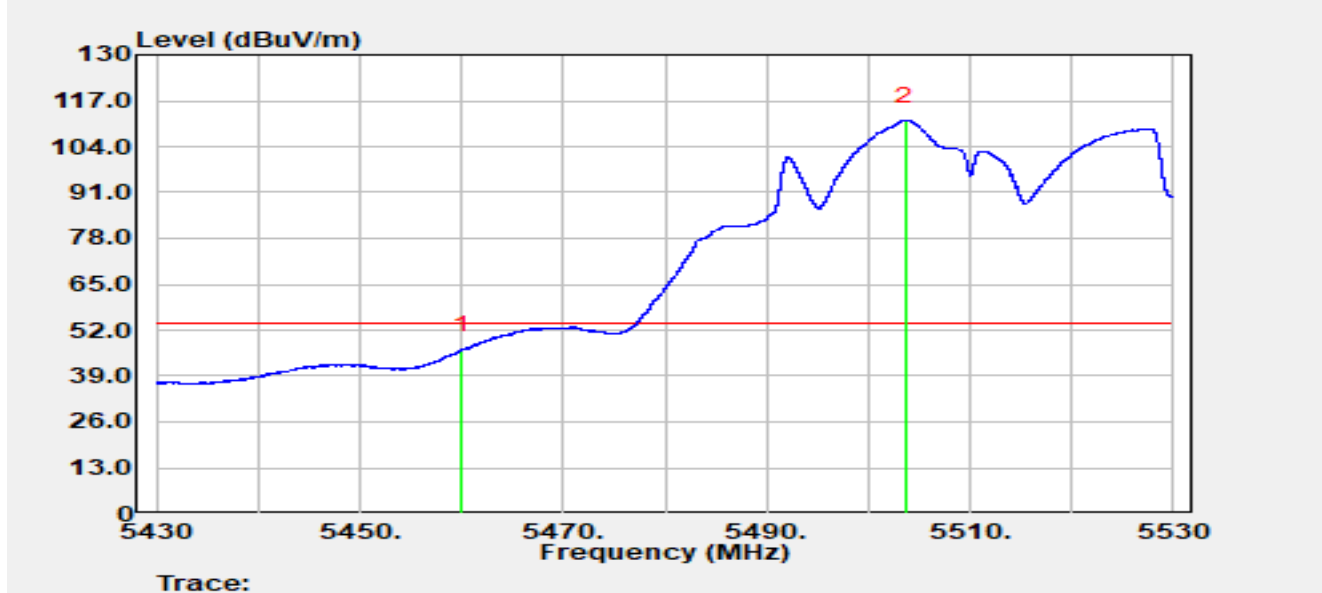


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	46.94	-0.69	46.25	-7.75	54.00	Average
2		5503.660	65.54	45.80	111.33	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5670 MHz		

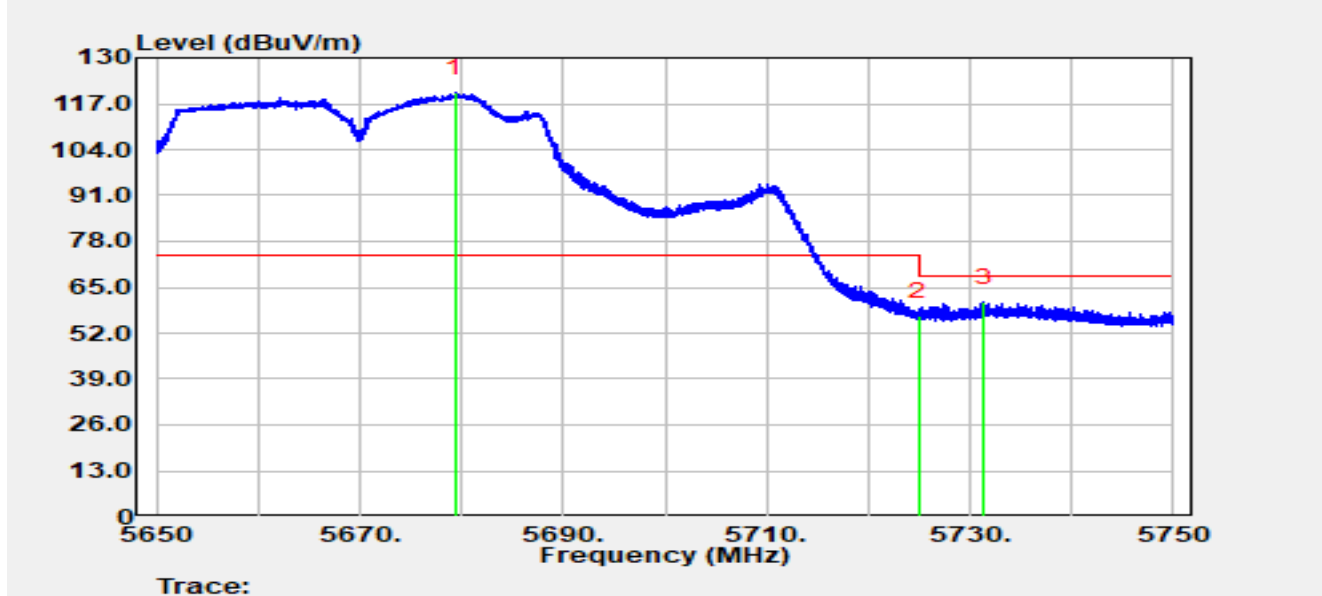


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5679.340	74.95	45.07	120.02	N/A	N/A	Peak
2		5725.000	55.89	1.01	56.89	-11.31	68.20	Peak
3	*	5731.340	61.65	-1.00	60.65	-7.55	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5670 MHz		

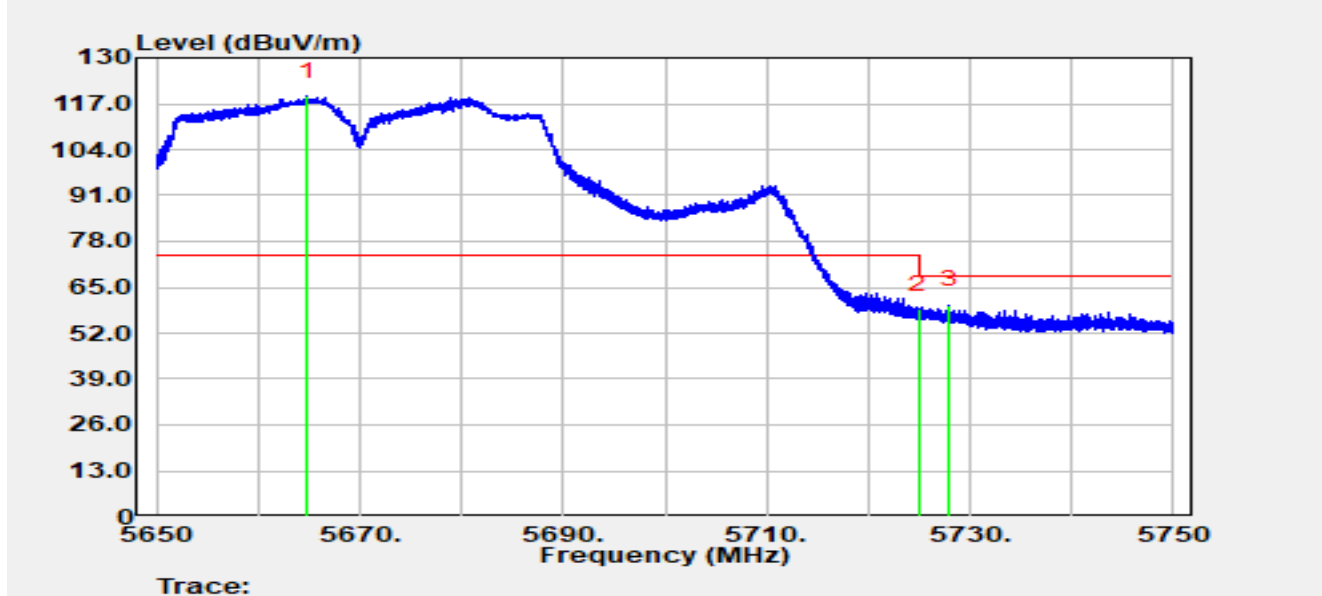


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5664.790	74.86	44.23	119.09	N/A	N/A	Peak
2		5725.000	57.76	1.01	58.76	-9.44	68.20	Peak
3	*	5727.960	60.22	-0.27	59.95	-8.25	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5755 MHz		

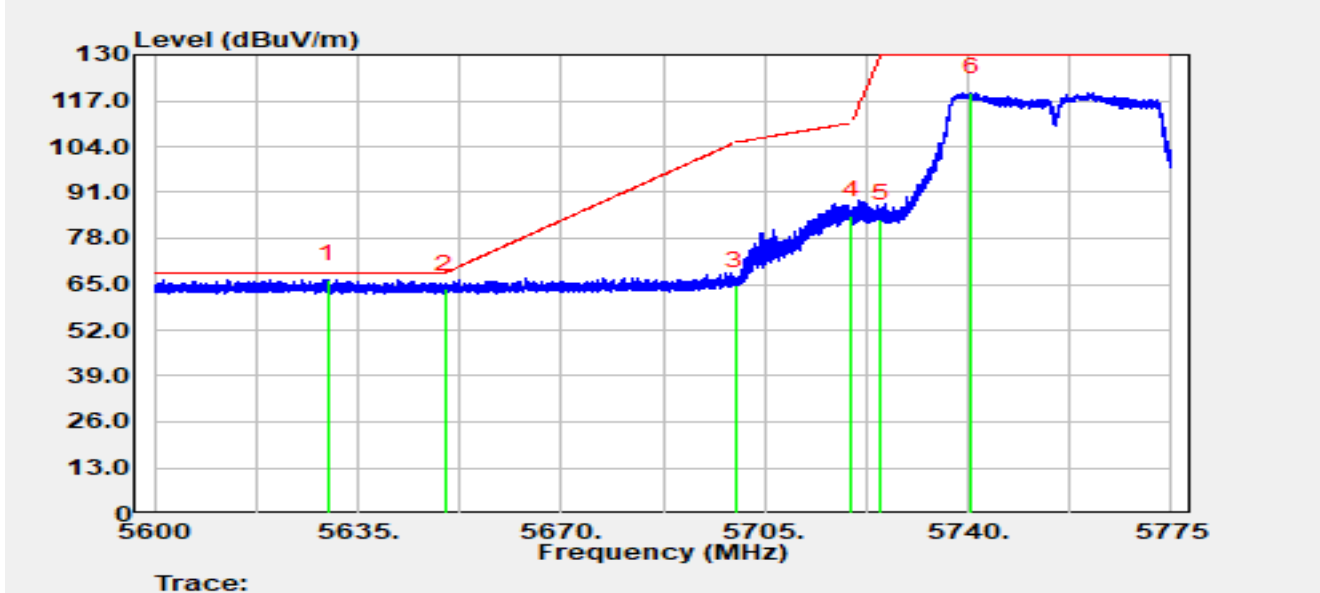


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5629.820	69.77	-3.45	66.33	-1.87	68.20	Peak
2		5650.000	67.29	-3.65	63.65	-4.55	68.20	Peak
3		5700.000	68.02	-3.47	64.55	-40.65	105.20	Peak
4		5720.000	88.01	-3.45	84.56	-26.24	110.80	Peak
5		5725.000	87.02	-3.47	83.55	-46.45	130.00	Peak
6		5740.630	123.03	-3.61	119.41	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5755 MHz		

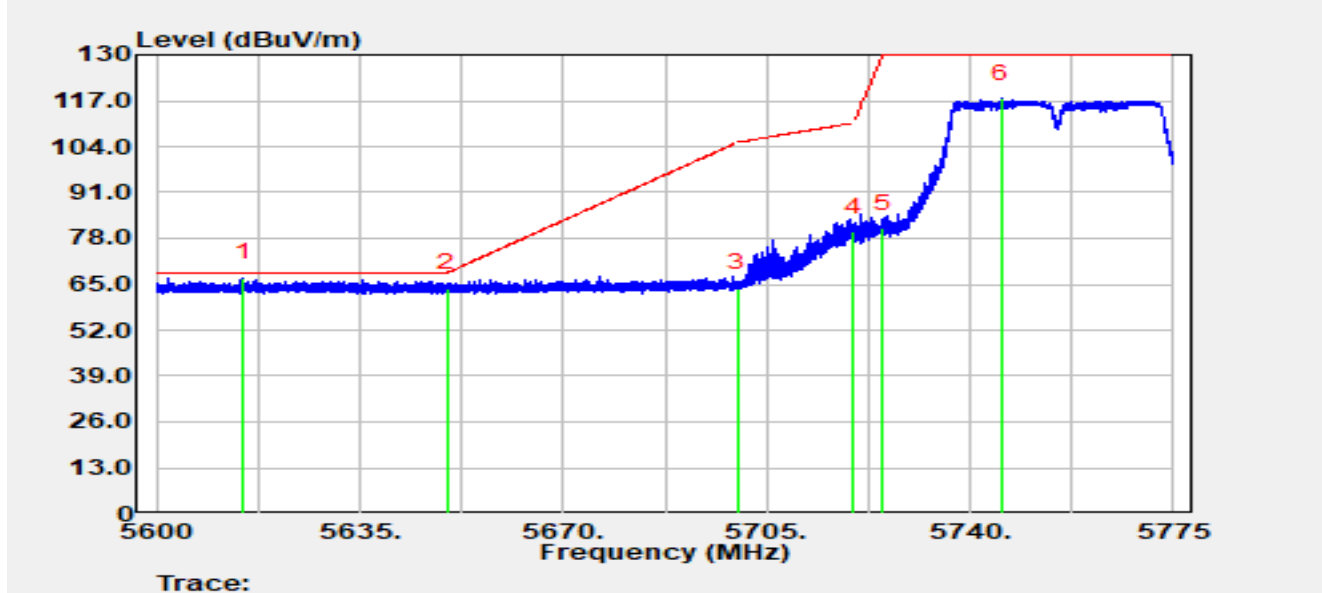


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5615.050	70.22	-3.44	66.78	-1.42	68.20	Peak
2		5650.000	67.44	-3.65	63.79	-4.41	68.20	Peak
3		5700.000	67.33	-3.47	63.86	-41.34	105.20	Peak
4		5720.000	83.18	-3.45	79.72	-31.08	110.80	Peak
5		5725.000	84.18	-3.47	80.71	-49.29	130.00	Peak
6		5745.285	121.25	-3.64	117.61	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5795 MHz		

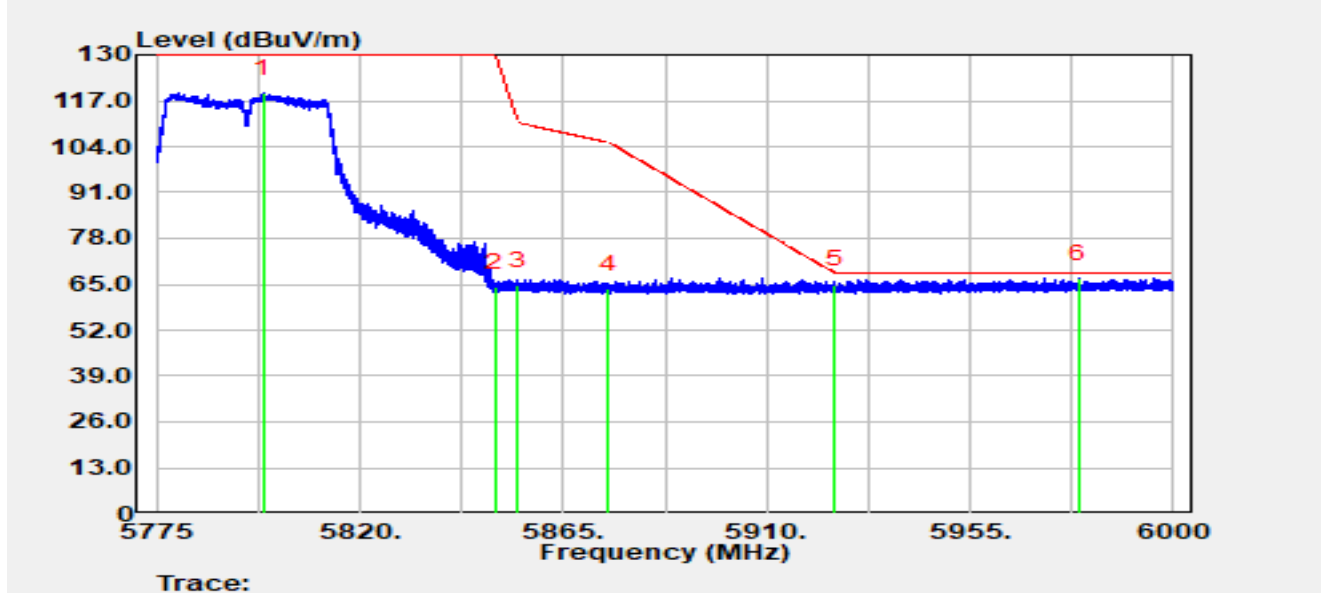


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5798.737	122.76	-3.73	119.03	N/A	N/A	Peak
2		5850.000	67.79	-3.75	64.03	-65.97	130.00	Peak
3		5855.010	68.32	-3.75	64.57	-46.23	110.80	Peak
4		5875.000	67.36	-3.82	63.53	-41.67	105.20	Peak
5		5925.000	68.52	-3.71	64.82	-3.38	68.20	Peak
6	*	5979.075	70.27	-3.66	66.61	-1.59	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5795 MHz		

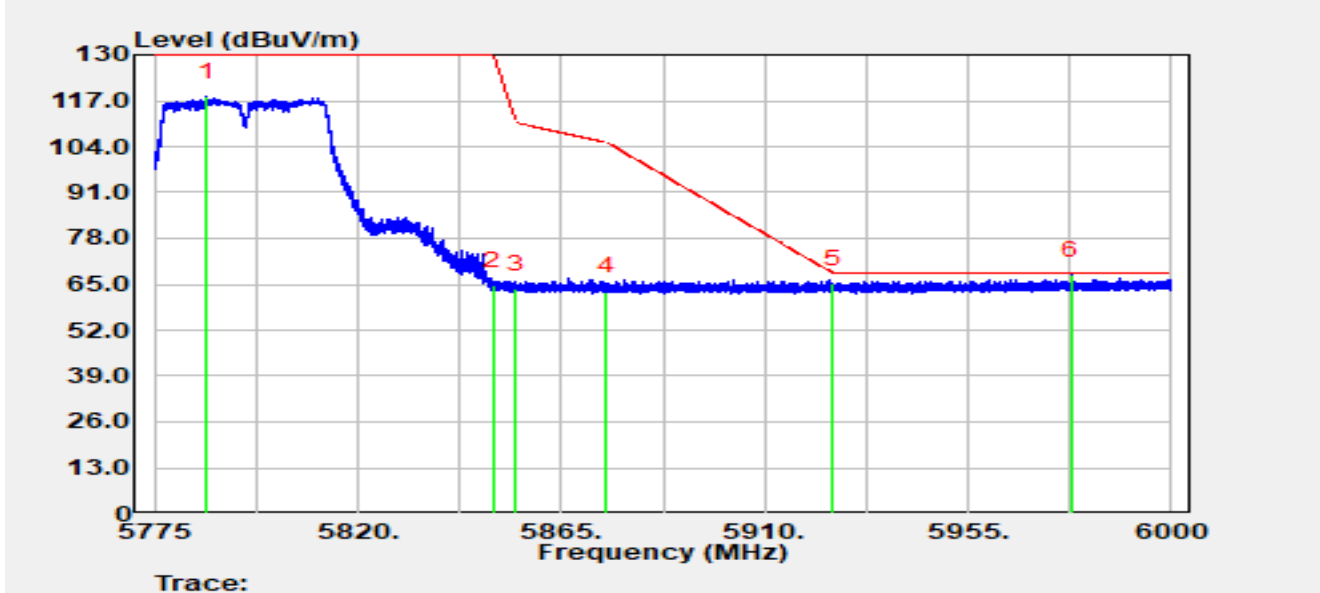


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5786.453	121.83	-3.69	118.14	N/A	N/A	Peak
2		5850.000	68.40	-3.75	64.65	-65.35	130.00	Peak
3		5855.000	67.32	-3.75	63.57	-47.23	110.80	Peak
4		5875.000	66.77	-3.82	62.95	-42.25	105.20	Peak
5		5925.000	68.92	-3.71	65.21	-2.99	68.20	Peak
6	*	5977.770	71.21	-3.65	67.55	-0.65	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

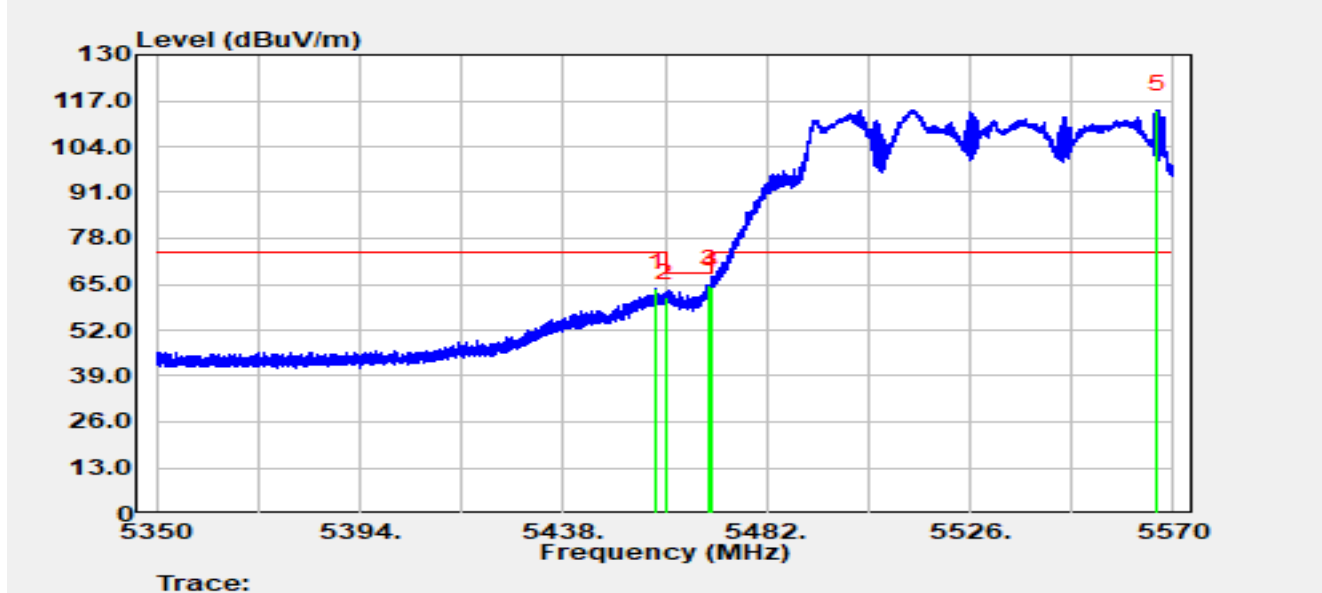


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.064	64.64	-0.83	63.81	-10.19	74.00	Peak
2		5460.000	61.81	-0.69	61.12	-7.08	68.20	Peak
3	*	5469.614	63.99	0.87	64.86	-3.34	68.20	Peak
4		5470.000	63.46	1.00	64.46	-3.74	68.20	Peak
5		5566.524	70.78	43.74	114.53	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

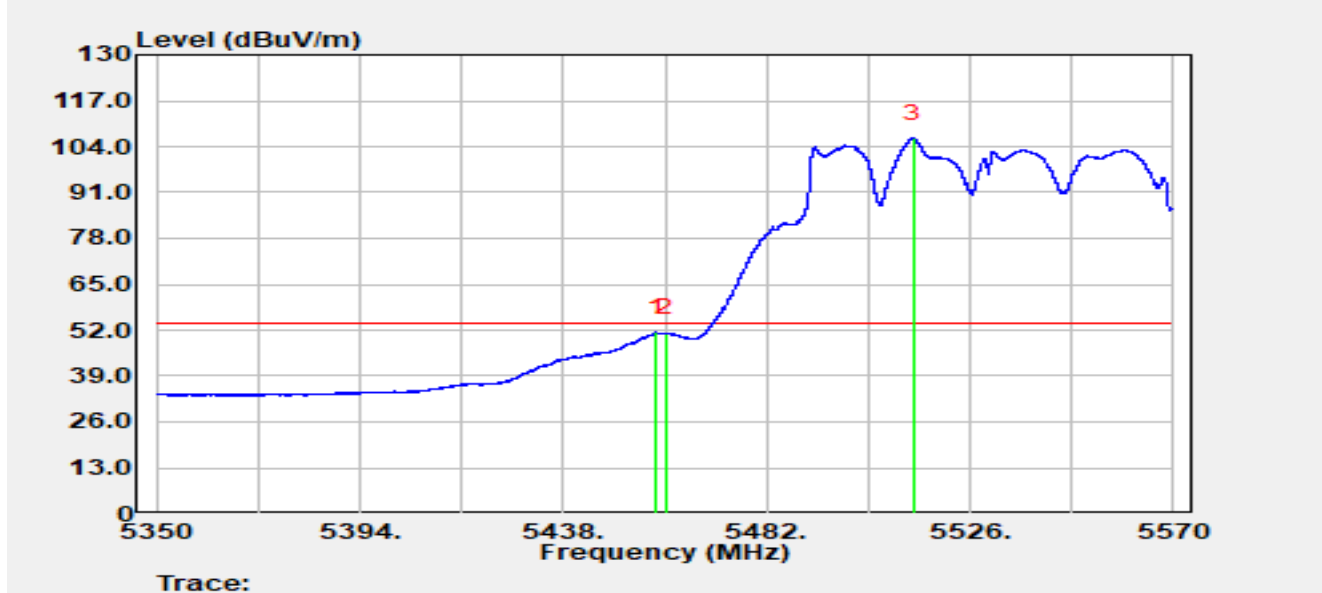


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.262	52.09	-0.80	51.28	-2.72	54.00	Average
2		5460.000	51.75	-0.69	51.06	-2.94	54.00	Average
3		5513.614	61.63	44.76	106.40	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

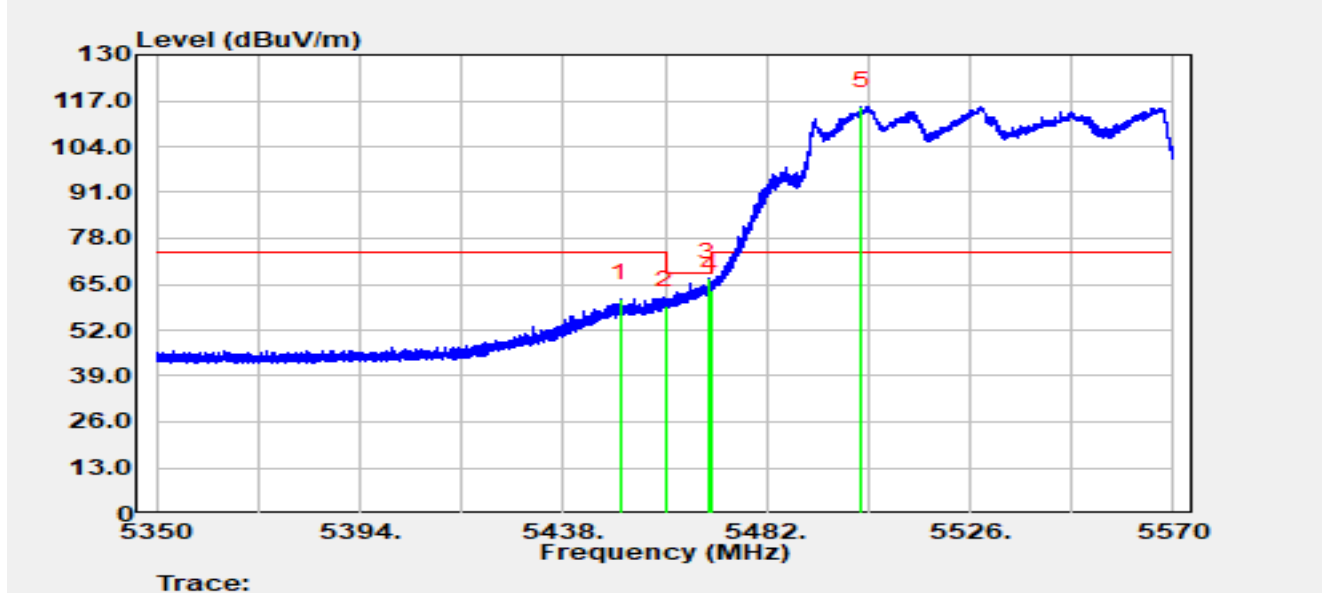


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5450.276	62.32	-1.26	61.06	-12.94	74.00	Peak
2		5460.000	59.61	-0.69	58.92	-9.28	68.20	Peak
3	*	5469.416	65.96	0.83	66.78	-1.42	68.20	Peak
4		5470.000	62.52	1.00	63.53	-4.67	68.20	Peak
5		5502.460	71.84	43.50	115.34	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

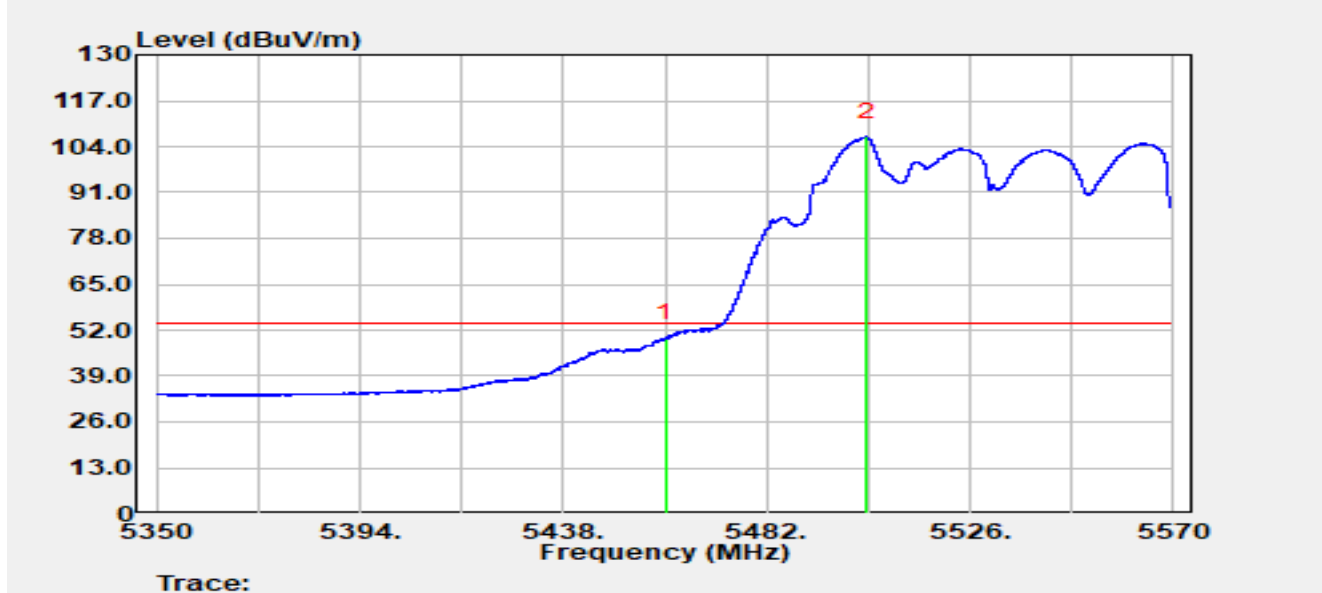


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	50.35	-0.69	49.66	-4.34	54.00	Average
2		5503.626	60.98	45.76	106.74	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5610 MHz		

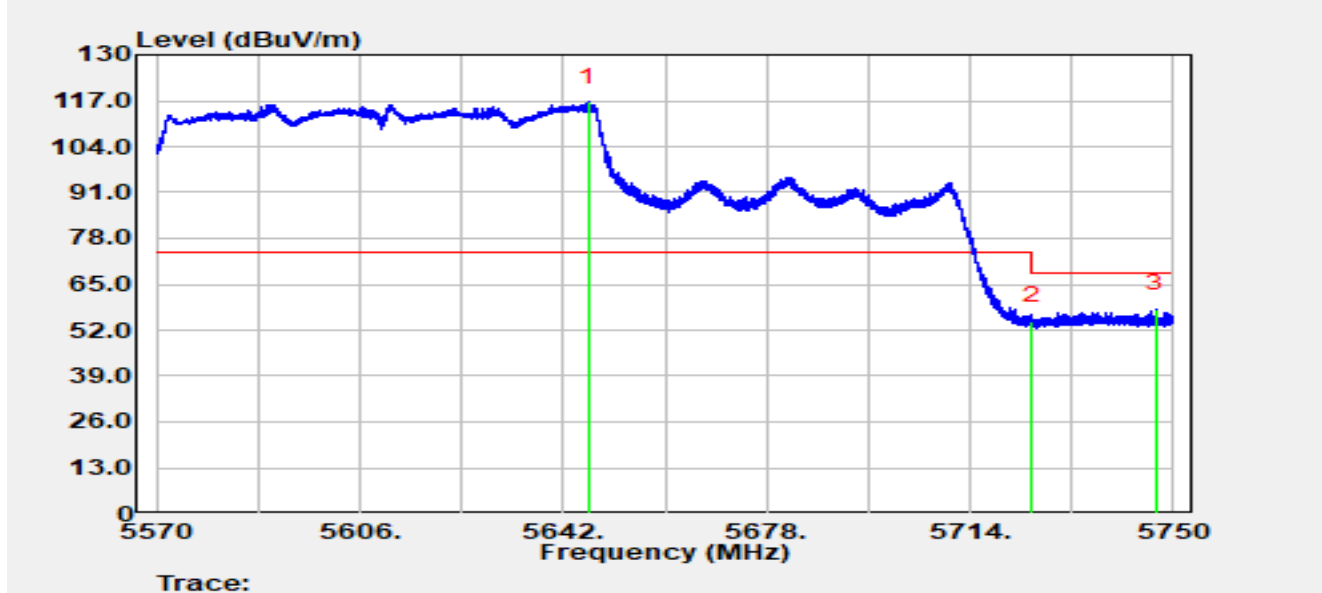


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5646.536	72.56	44.10	116.66	N/A	N/A	Peak
2		5725.000	53.47	1.01	54.48	-13.72	68.20	Peak
3	*	5746.832	60.23	-2.10	58.13	-10.07	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5610 MHz		

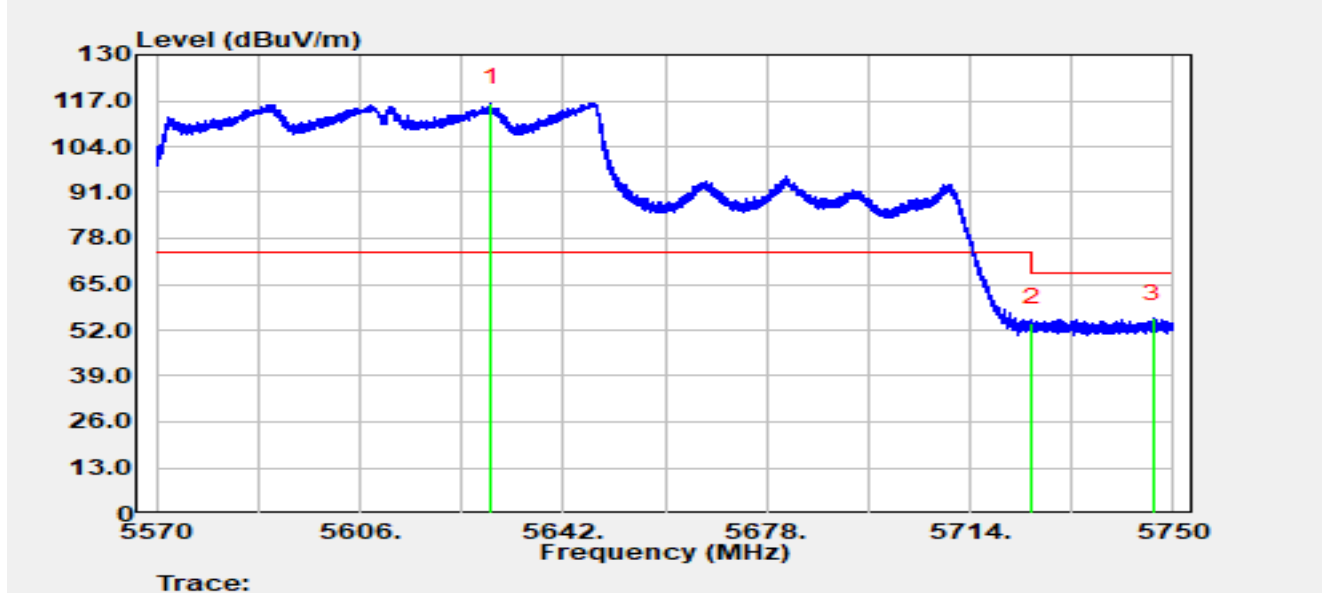


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5629.220	70.66	45.75	116.42	N/A	N/A	Peak
2		5725.000	52.96	1.01	53.97	-14.23	68.20	Peak
3	*	5746.364	57.27	-2.04	55.23	-12.97	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5775 MHz		

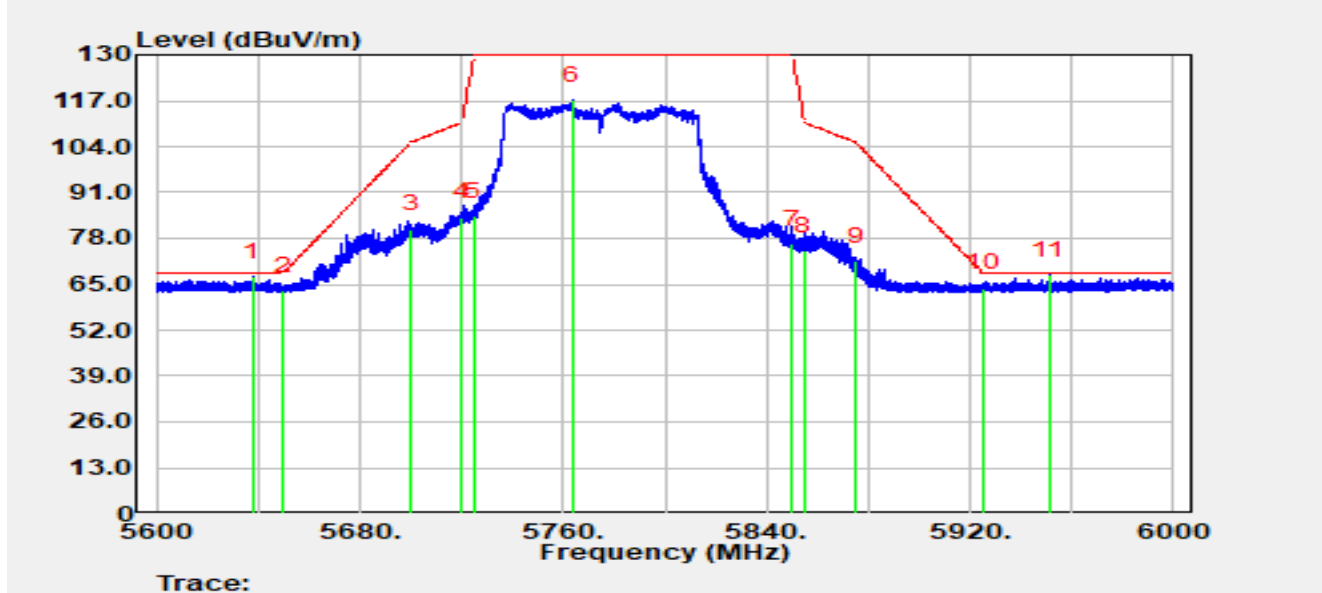


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5637.680	70.64	-3.59	67.05	-1.15	68.20	Peak
2		5650.000	66.72	-3.65	63.07	-5.13	68.20	Peak
3		5700.000	84.16	-3.47	80.68	-24.52	105.20	Peak
4		5720.000	87.58	-3.45	84.12	-26.68	110.80	Peak
5		5725.000	87.77	-3.47	84.30	-45.70	130.00	Peak
6		5763.600	120.83	-3.66	117.17	N/A	N/A	Peak
7		5850.000	80.04	-3.75	76.29	-53.71	130.00	Peak
8		5855.000	78.13	-3.75	74.38	-36.42	110.80	Peak
9		5875.000	75.22	-3.82	71.39	-33.81	105.20	Peak
10		5925.000	67.63	-3.71	63.92	-4.28	68.20	Peak
11	*	5951.360	71.26	-3.68	67.58	-0.62	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5775 MHz		

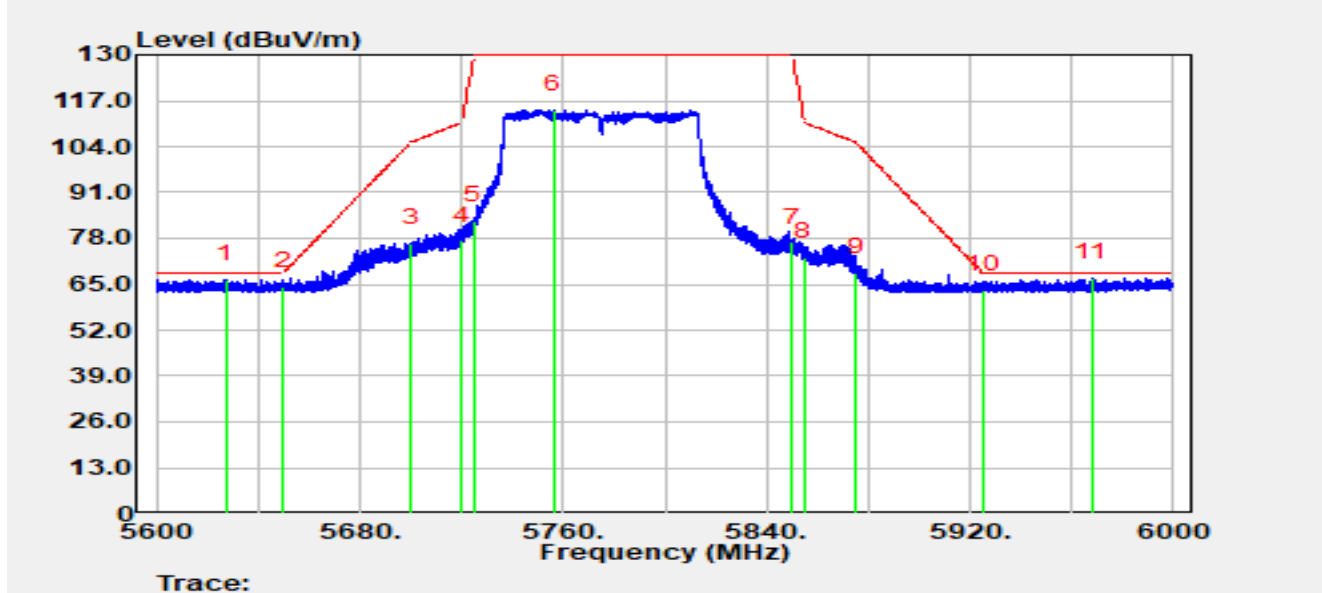


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5627.560	69.88	-3.41	66.47	-1.73	68.20	Peak
2		5650.000	67.93	-3.65	64.28	-3.92	68.20	Peak
3		5700.000	80.16	-3.47	76.69	-28.51	105.20	Peak
4		5720.000	80.88	-3.45	77.43	-33.37	110.80	Peak
5		5725.000	86.44	-3.47	82.97	-47.03	130.00	Peak
6		5756.000	118.13	-3.65	114.48	N/A	N/A	Peak
7		5850.000	80.77	-3.75	77.02	-52.98	130.00	Peak
8		5855.000	76.55	-3.75	72.80	-38.00	110.80	Peak
9		5875.000	72.18	-3.82	68.35	-36.85	105.20	Peak
10		5925.000	66.99	-3.71	63.29	-4.91	68.20	Peak
11	*	5967.840	70.44	-3.64	66.80	-1.40	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

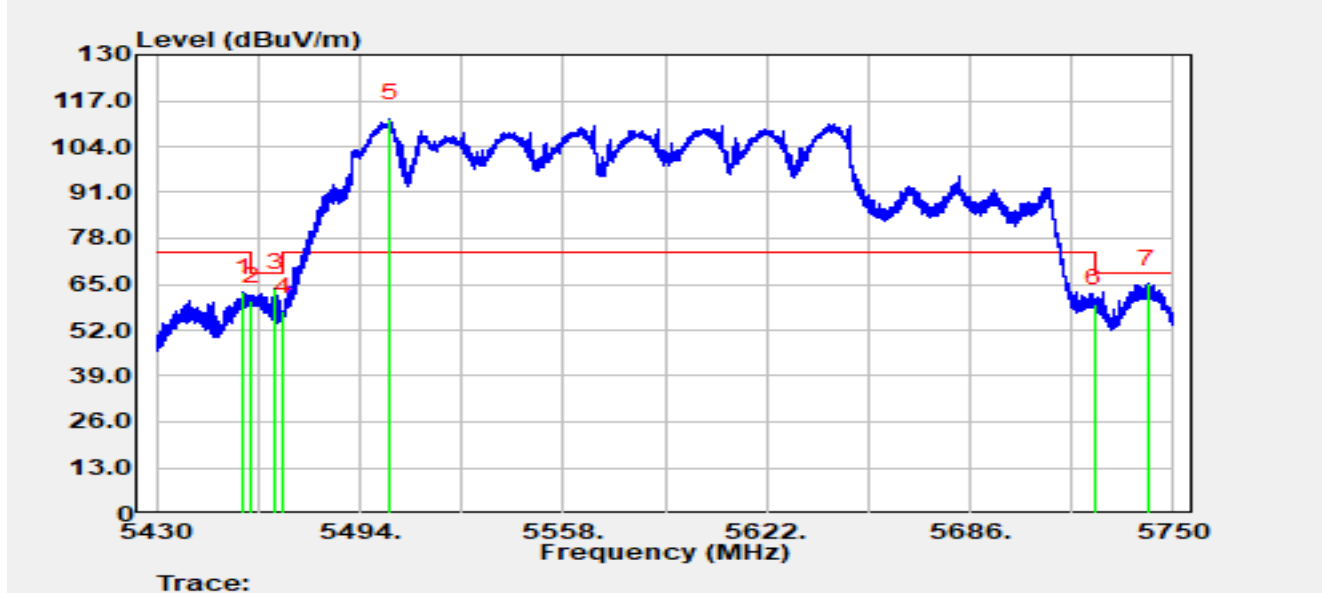


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.136	63.46	-0.91	62.56	-11.44	74.00	Peak
2		5460.000	60.93	-0.69	60.23	-7.97	68.20	Peak
3		5467.280	63.72	0.18	63.90	-4.30	68.20	Peak
4		5470.000	56.18	1.00	57.18	-11.02	68.20	Peak
5		5503.280	66.84	45.20	112.04	N/A	N/A	Peak
6		5725.000	58.52	1.01	59.53	-8.67	68.20	Peak
7	*	5741.776	66.81	-1.78	65.03	-3.17	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

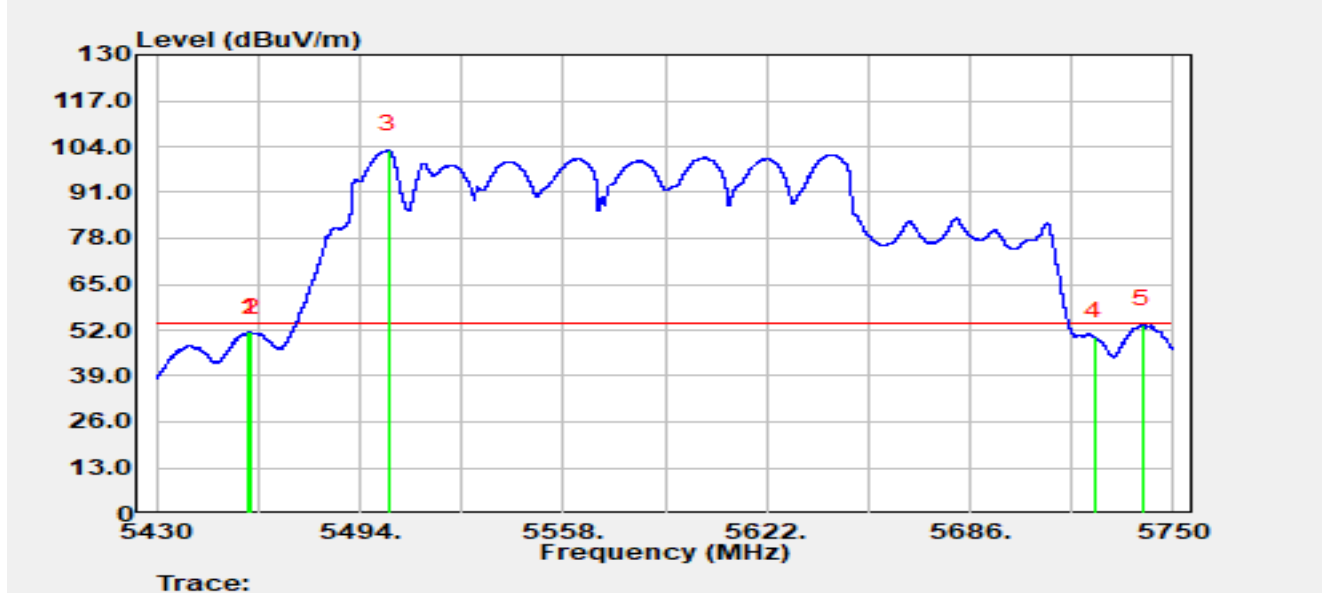


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.184	52.11	-0.79	51.32	-2.68	54.00	Average
2		5460.000	51.97	-0.69	51.27	-2.73	54.00	Average
3		5503.120	58.17	44.90	103.07	N/A	N/A	Average
4		5725.000	49.09	1.01	50.10	-3.90	54.00	Average
5	*	5740.336	55.35	-1.70	53.66	-0.34	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

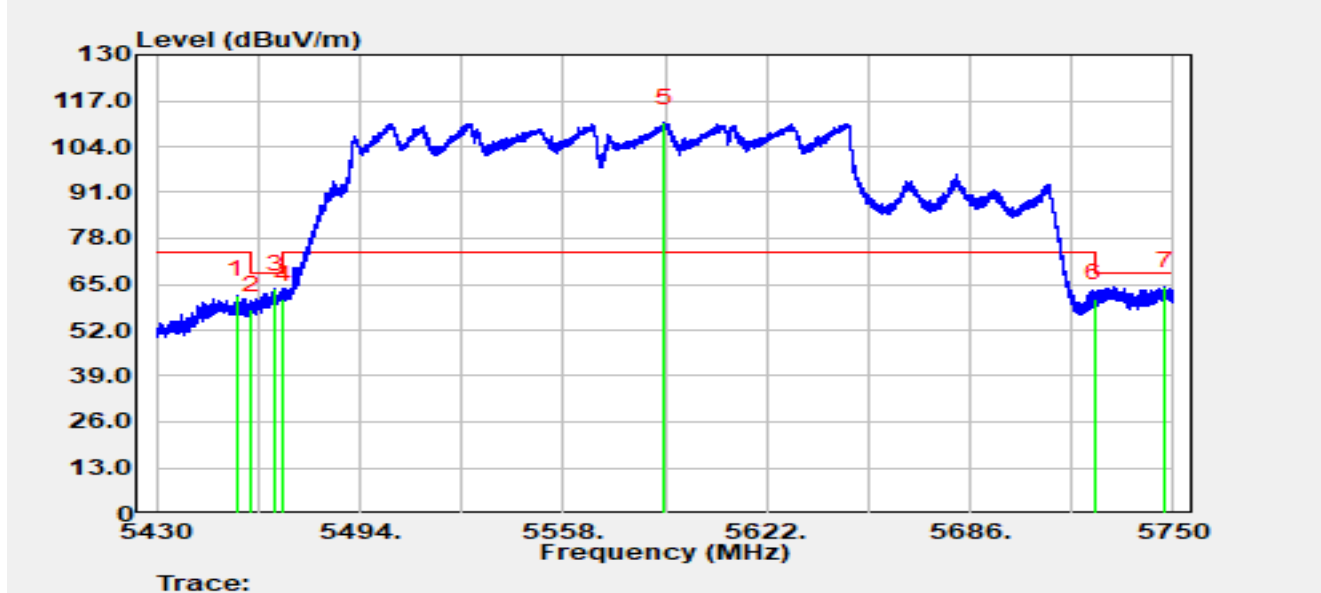


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5455.408	62.98	-1.01	61.97	-12.03	74.00	Peak
2		5460.000	58.42	-0.69	57.73	-10.47	68.20	Peak
3		5467.344	63.53	0.19	63.72	-4.48	68.20	Peak
4		5470.000	59.71	1.00	60.71	-7.49	68.20	Peak
5		5589.680	63.49	47.22	110.71	N/A	N/A	Peak
6		5725.000	60.00	1.01	61.01	-7.19	68.20	Peak
7	*	5747.248	66.57	-2.10	64.47	-3.73	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

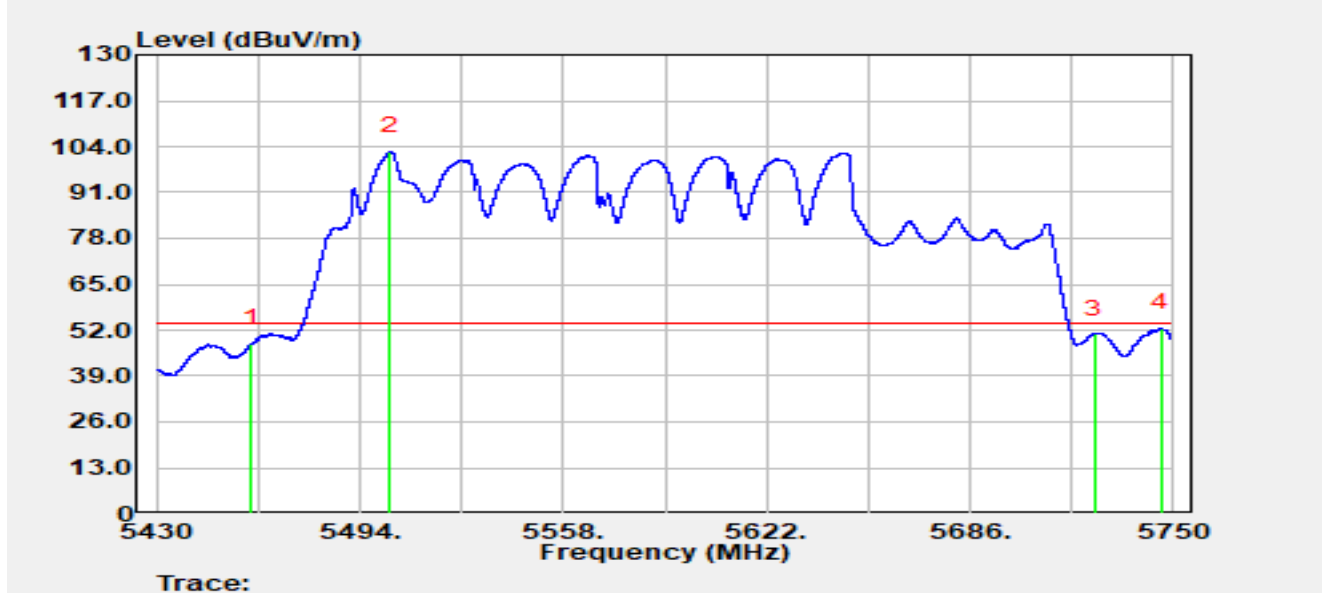


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		5460.000	48.94	-0.69	48.24	-5.76	54.00	Average
2		5503.472	57.22	45.52	102.73	N/A	N/A	Average
3		5725.000	49.87	1.01	50.88	-3.12	54.00	Average
4	*	5745.936	54.53	-2.01	52.52	-1.48	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

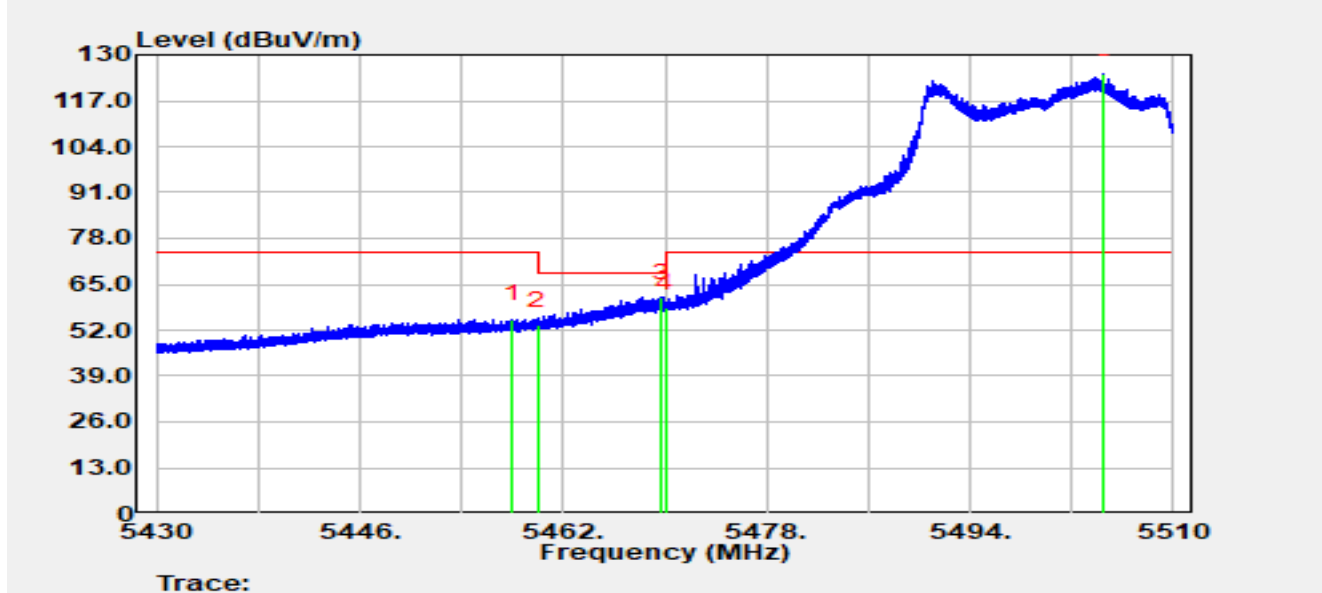


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.992	55.96	-0.85	55.11	-18.89	74.00	Peak
2		5460.000	53.97	-0.69	53.28	-14.92	68.20	Peak
3	*	5469.760	60.29	0.92	61.21	-6.99	68.20	Peak
4		5470.000	57.16	1.00	58.16	-10.04	68.20	Peak
5		5504.480	77.88	46.55	124.43	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

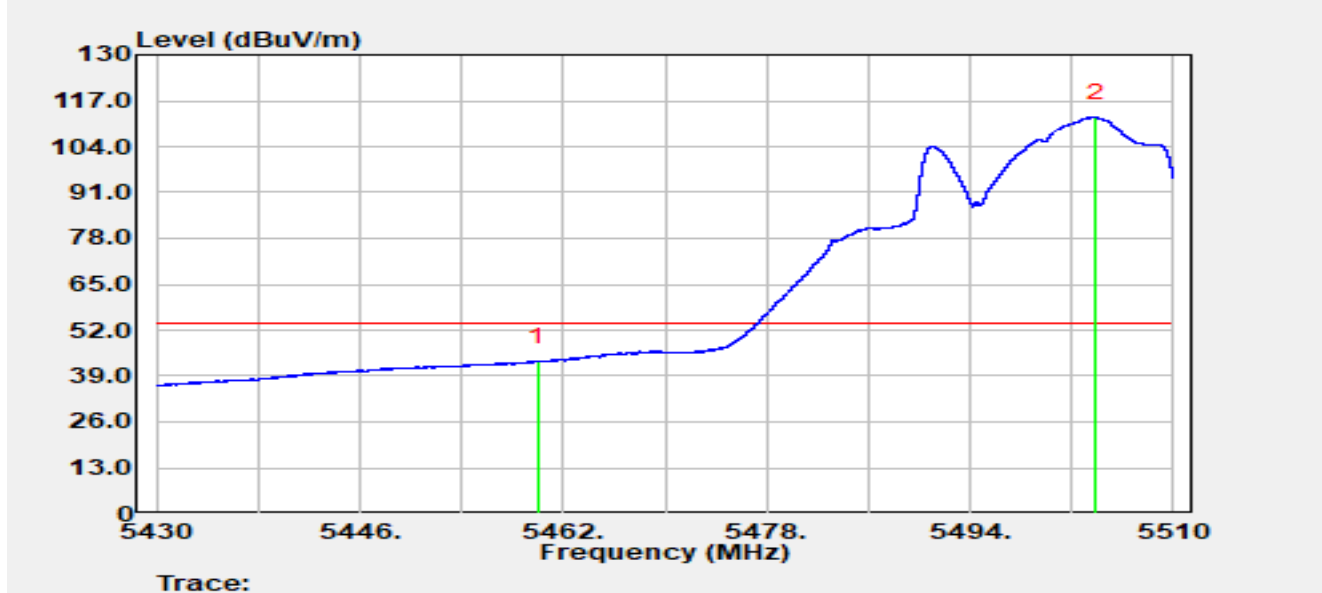


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	43.78	-0.69	43.09	-10.91	54.00	Average
2		5503.904	66.17	46.08	112.24	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

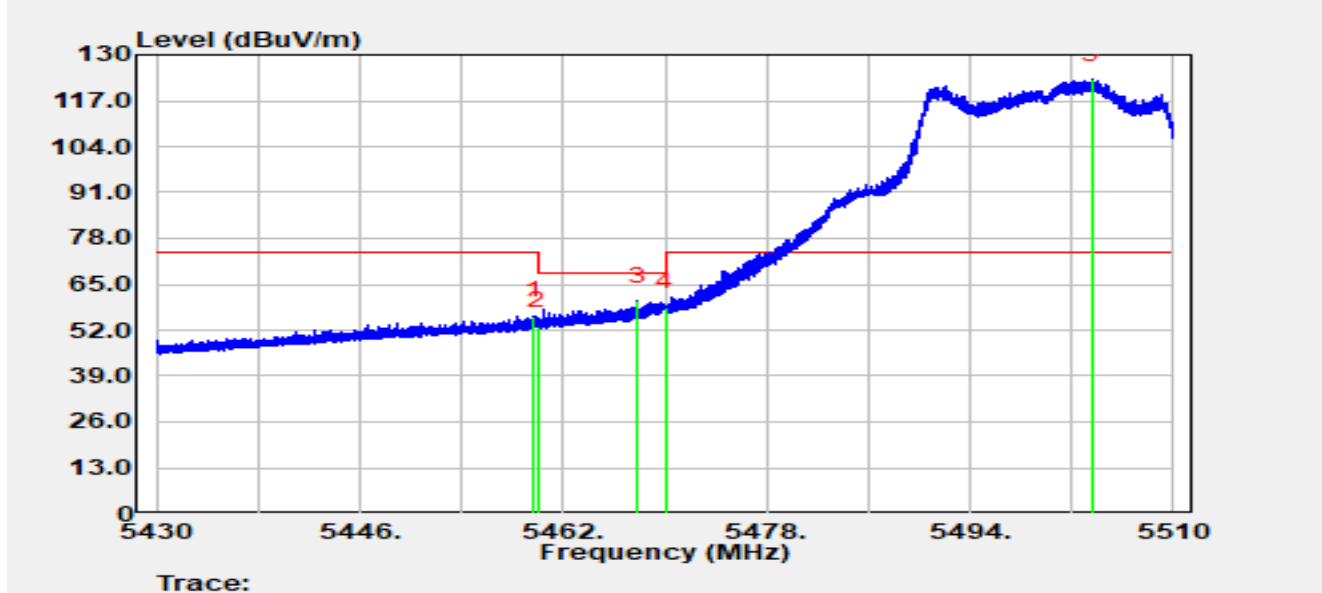


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.640	56.69	-0.74	55.95	-18.05	74.00	Peak
2		5460.000	53.82	-0.69	53.13	-15.07	68.20	Peak
3	*	5467.840	60.00	0.31	60.30	-7.90	68.20	Peak
4		5470.000	57.61	1.00	58.62	-9.58	68.20	Peak
5		5503.600	77.20	45.73	122.92	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

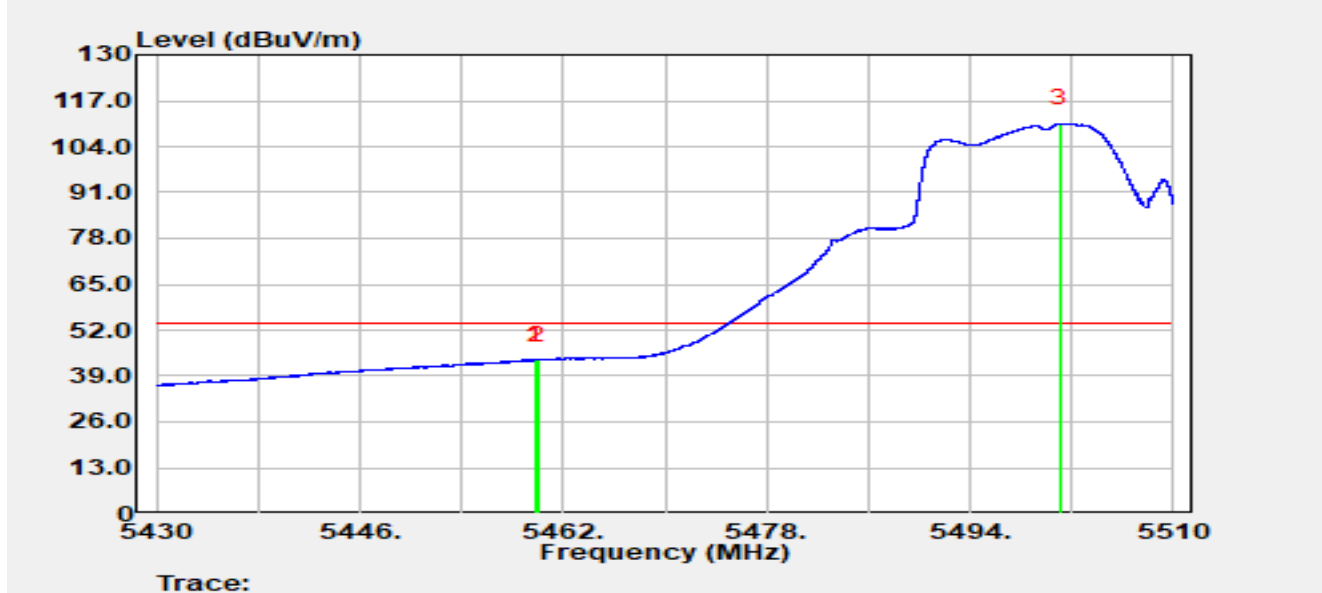


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.744	44.34	-0.73	43.61	-10.39	54.00	Average
2		5460.000	44.21	-0.69	43.52	-10.48	54.00	Average
3		5501.032	68.85	41.68	110.53	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5700 MHz		

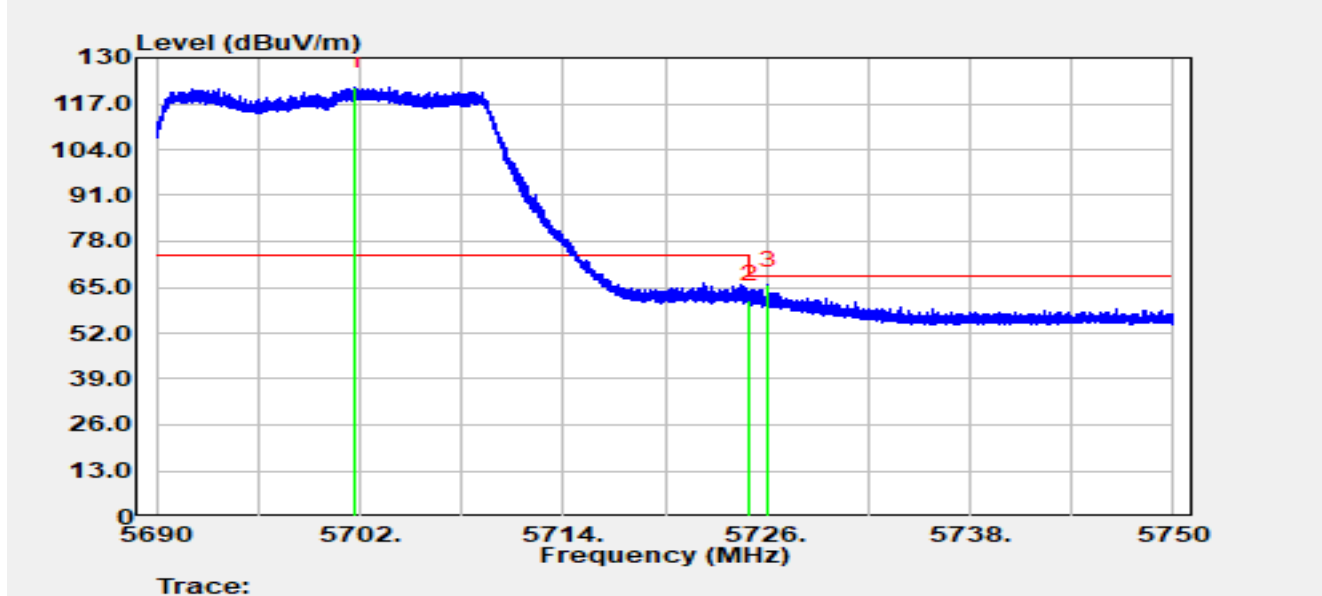


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5701.760	82.33	39.48	121.81	N/A	N/A	Peak
2		5725.000	60.42	1.01	61.42	-6.78	68.20	Peak
3	*	5726.102	65.13	0.41	65.54	-2.66	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5700 MHz		

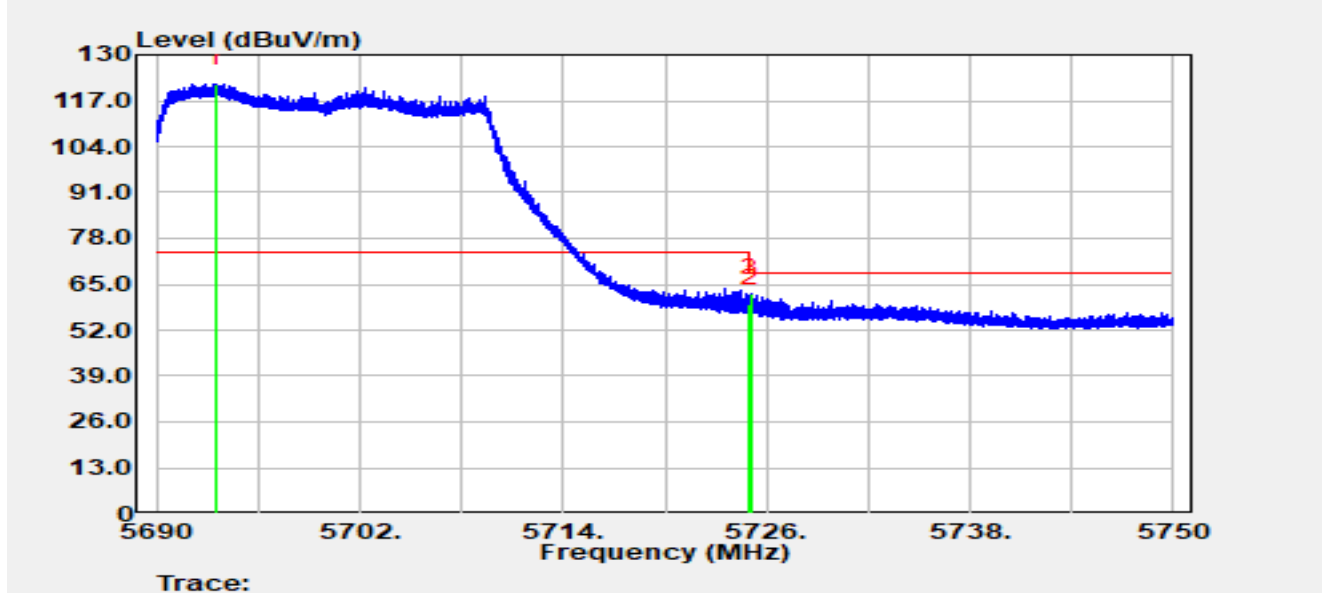


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5693.462	77.73	44.07	121.80	N/A	N/A	Peak
2		5725.000	58.45	1.01	59.45	-8.75	68.20	Peak
3	*	5725.100	61.59	0.95	62.54	-5.66	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5745 MHz		

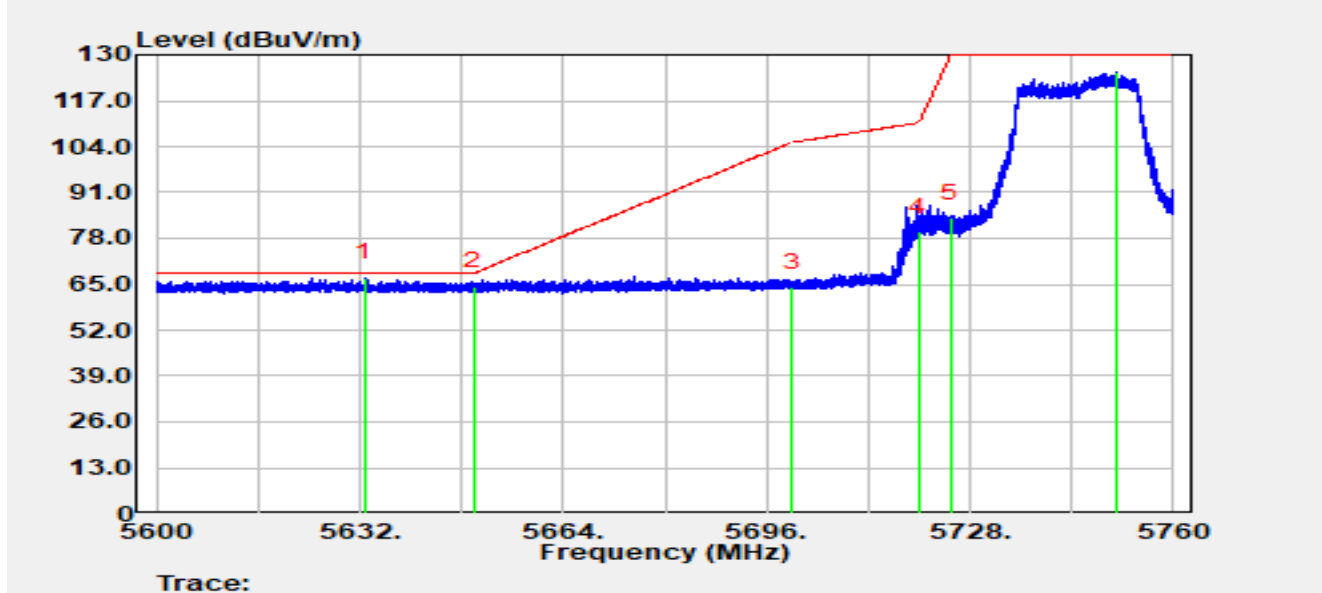


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5632.784	70.33	-3.50	66.83	-1.37	68.20	Peak
2		5650.000	68.10	-3.65	64.45	-3.75	68.20	Peak
3		5700.000	67.64	-3.47	64.17	-41.03	105.20	Peak
4		5720.000	83.22	-3.45	79.76	-31.04	110.80	Peak
5		5725.000	87.22	-3.47	83.76	-46.24	130.00	Peak
6		5751.056	128.59	-3.65	124.94	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5745 MHz		

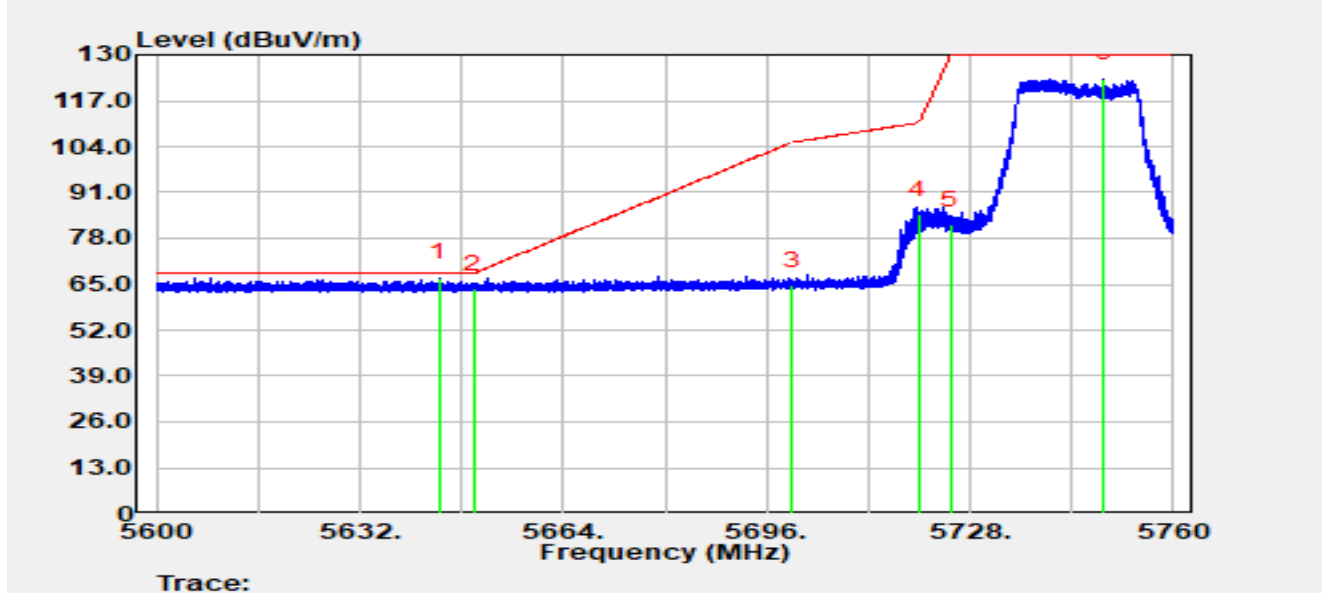


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5644.544	70.55	-3.65	66.90	-1.30	68.20	Peak
2		5650.000	67.27	-3.65	63.63	-4.57	68.20	Peak
3		5700.000	68.17	-3.47	64.70	-40.50	105.20	Peak
4		5720.000	88.23	-3.45	84.78	-26.02	110.80	Peak
5		5725.000	85.36	-3.47	81.90	-48.10	130.00	Peak
6		5749.024	126.85	-3.65	123.20	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5825 MHz		

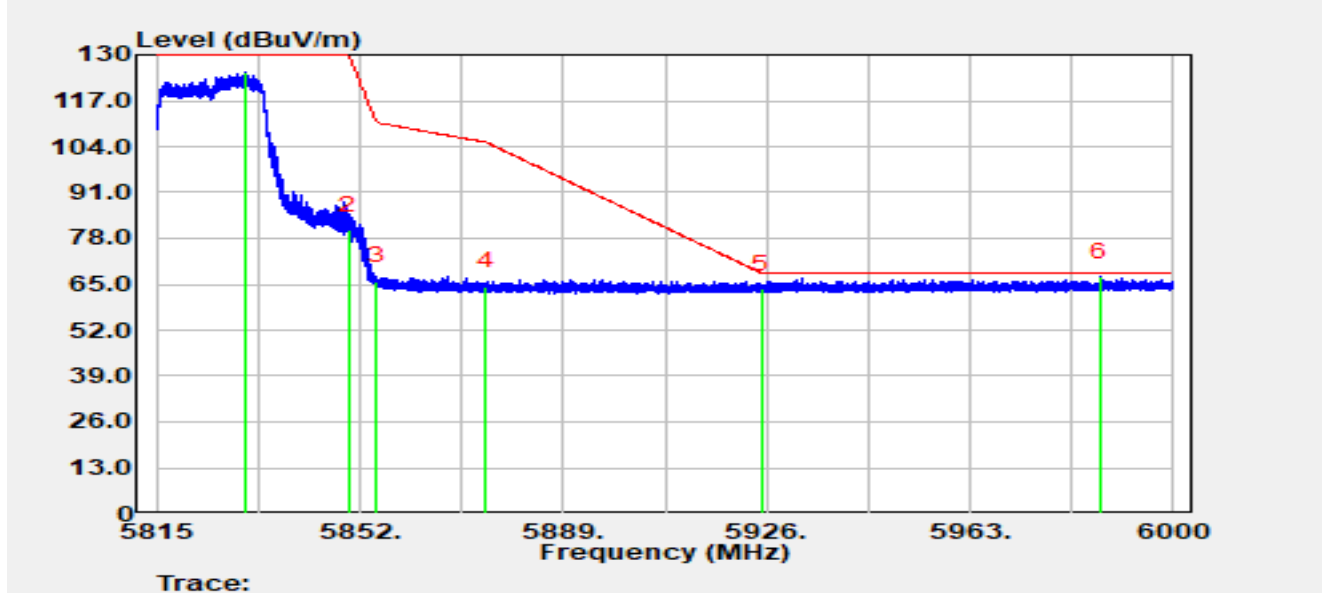


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5831.058	128.80	-3.74	125.06	N/A	N/A	Peak
2		5850.000	84.14	-3.75	80.38	-49.62	130.00	Peak
3		5855.000	69.67	-3.75	65.92	-44.88	110.80	Peak
4		5875.000	68.29	-3.82	64.47	-40.73	105.20	Peak
5		5925.000	67.37	-3.71	63.67	-4.53	68.20	Peak
6	*	5986.680	70.75	-3.68	67.07	-1.13	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5825 MHz		

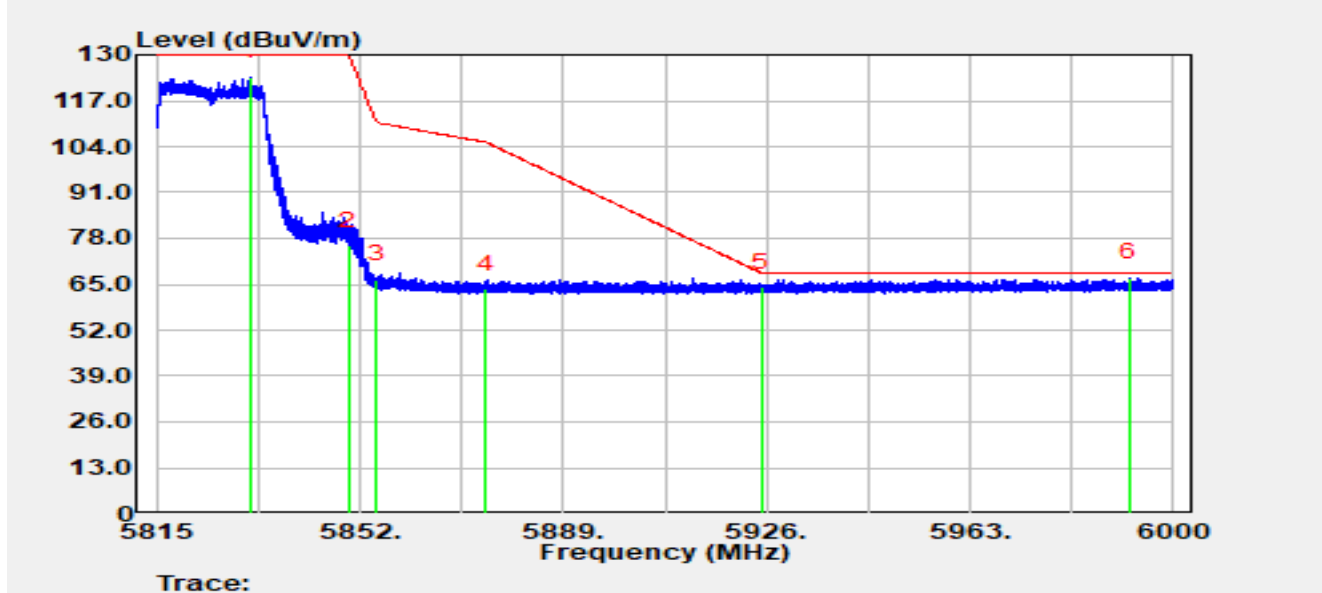


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		5832.020	127.40	-3.74	123.66	N/A	N/A	Peak
2		5850.000	79.67	-3.75	75.92	-54.08	130.00	Peak
3		5855.000	70.03	-3.75	66.28	-44.52	110.80	Peak
4		5875.000	67.40	-3.82	63.58	-41.62	105.20	Peak
5		5925.000	67.83	-3.71	64.12	-4.08	68.20	Peak
6	*	5992.063	70.47	-3.70	66.77	-1.43	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5510 MHz		

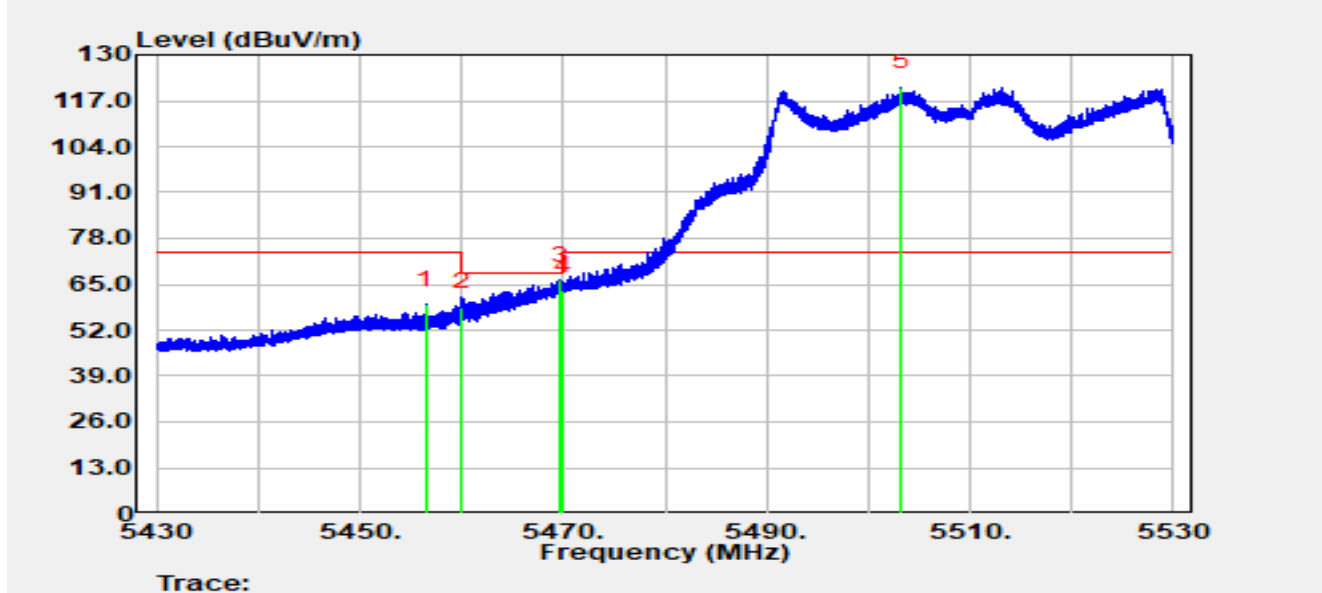


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5456.550	60.33	-0.97	59.36	-14.64	74.00	Peak
2		5460.000	59.12	-0.69	58.43	-9.77	68.20	Peak
3	*	5469.700	65.18	0.90	66.08	-2.12	68.20	Peak
4		5470.000	62.19	1.00	63.19	-5.01	68.20	Peak
5		5503.230	75.78	45.12	120.90	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5510 MHz		

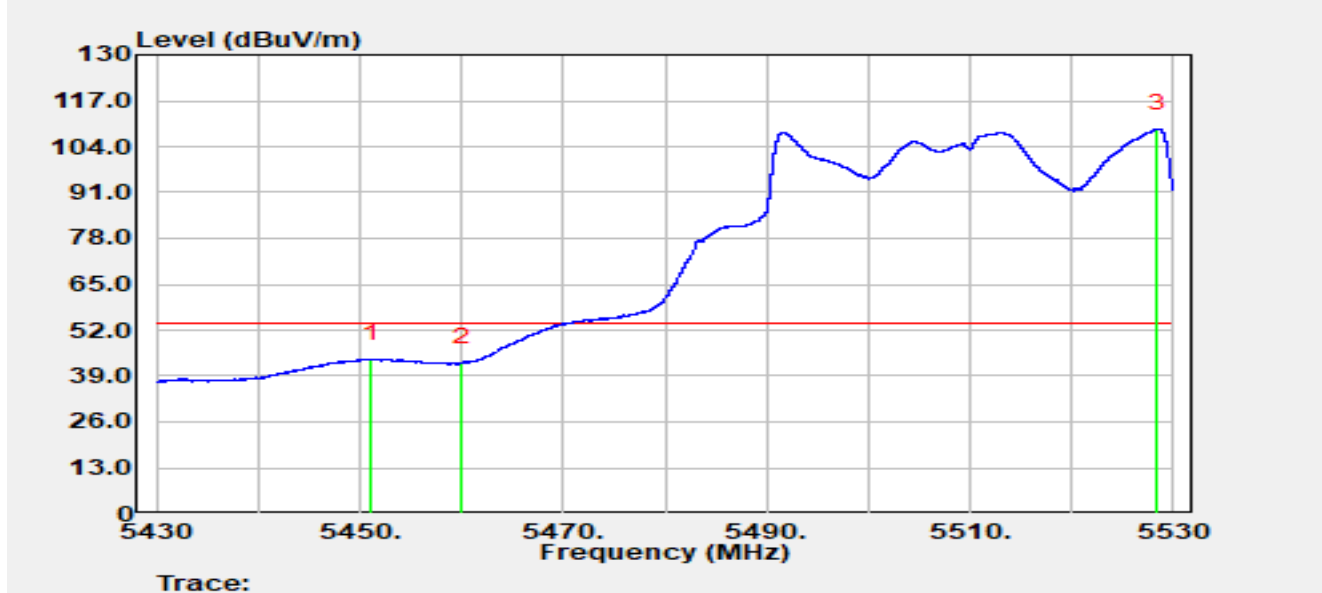


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5451.140	45.01	-1.22	43.79	-10.21	54.00	Average
2		5460.000	43.41	-0.69	42.72	-11.28	54.00	Average
3		5528.460	60.83	48.17	109.01	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5510 MHz		

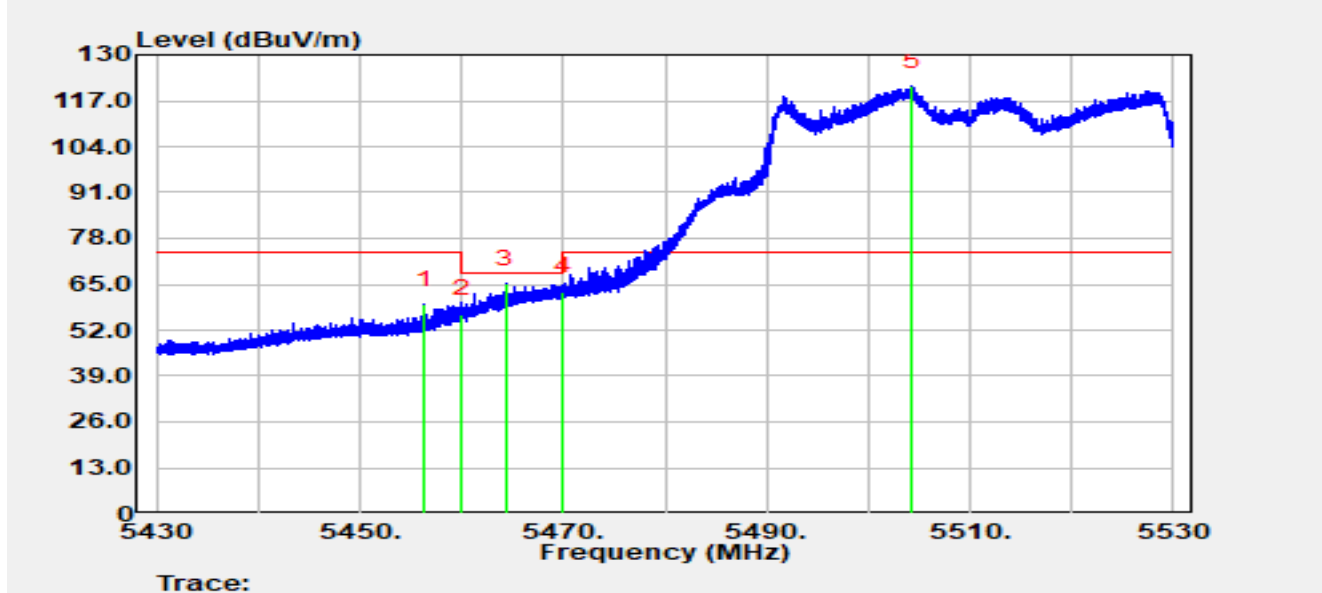


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5456.370	60.34	-1.00	59.34	-14.66	74.00	Peak
2		5460.000	57.17	-0.69	56.48	-11.72	68.20	Peak
3	*	5464.310	65.46	-0.33	65.13	-3.07	68.20	Peak
4		5470.000	61.97	1.00	62.97	-5.23	68.20	Peak
5		5504.310	74.69	46.45	121.15	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5510 MHz		

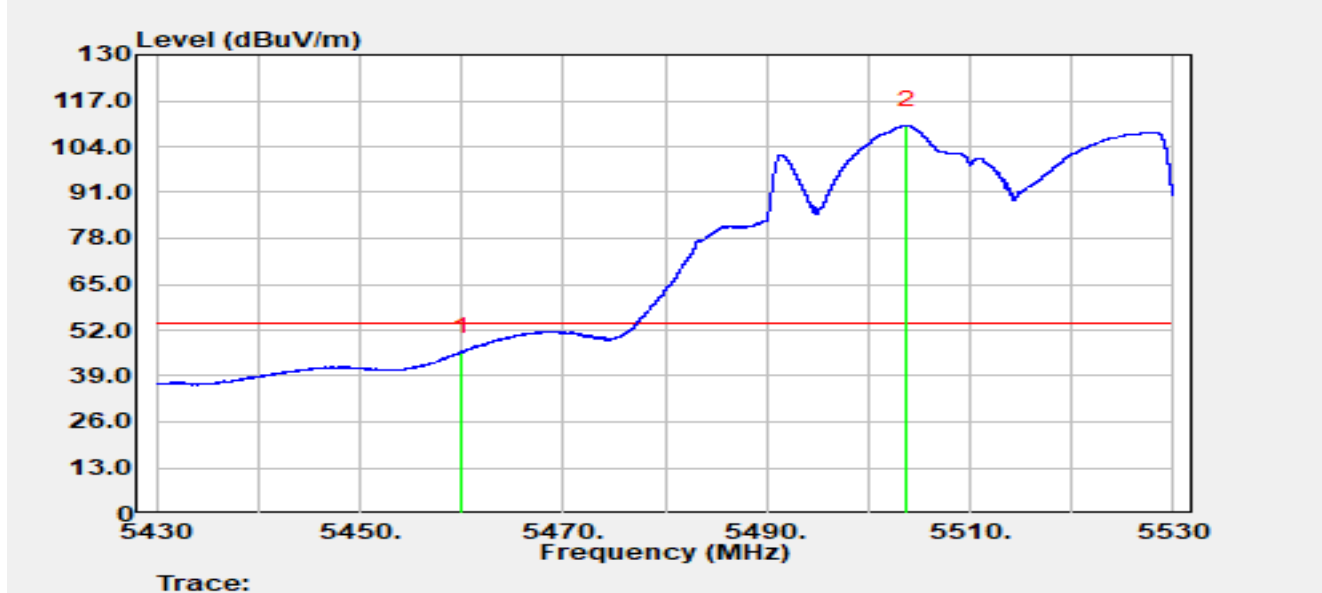


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	46.37	-0.69	45.67	-8.33	54.00	Average
2		5503.740	64.06	45.89	109.95	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5670 MHz		

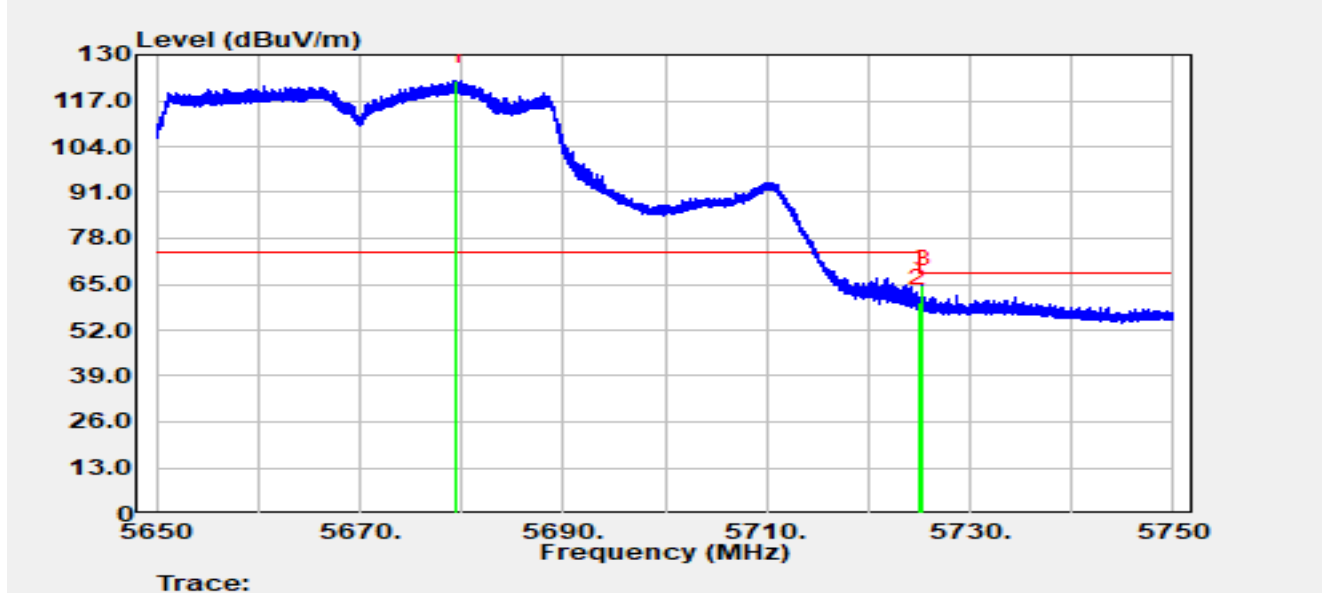


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5679.560	77.09	45.44	122.53	N/A	N/A	Peak
2		5725.000	58.65	1.01	59.66	-8.54	68.20	Peak
3	*	5725.320	64.01	0.83	64.84	-3.36	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5670 MHz		

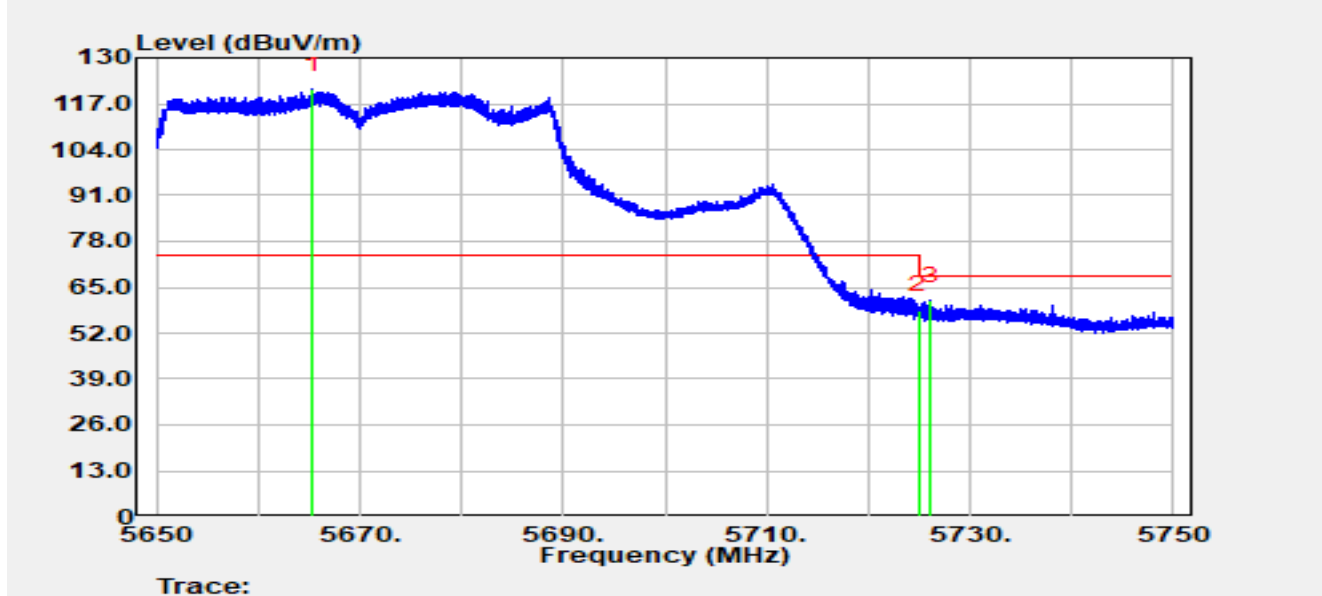


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5665.390	76.01	45.08	121.10	N/A	N/A	Peak
2		5725.000	57.43	1.01	58.43	-9.77	68.20	Peak
3	*	5726.120	60.83	0.40	61.24	-6.96	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5755 MHz		

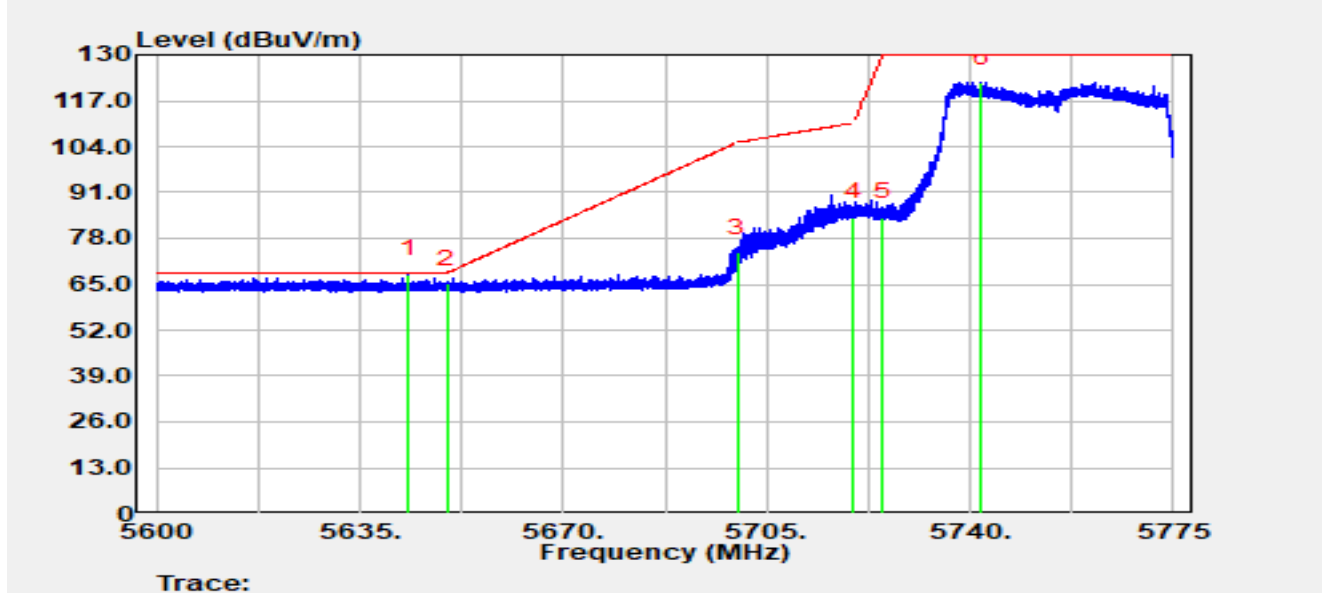


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5643.435	71.38	-3.65	67.73	-0.47	68.20	Peak
2		5650.000	68.84	-3.65	65.19	-3.01	68.20	Peak
3		5700.000	77.54	-3.47	74.07	-31.13	105.20	Peak
4		5720.000	87.40	-3.45	83.95	-26.85	110.80	Peak
5		5725.000	87.57	-3.47	84.10	-45.90	130.00	Peak
6		5741.960	125.75	-3.63	122.12	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5755 MHz		

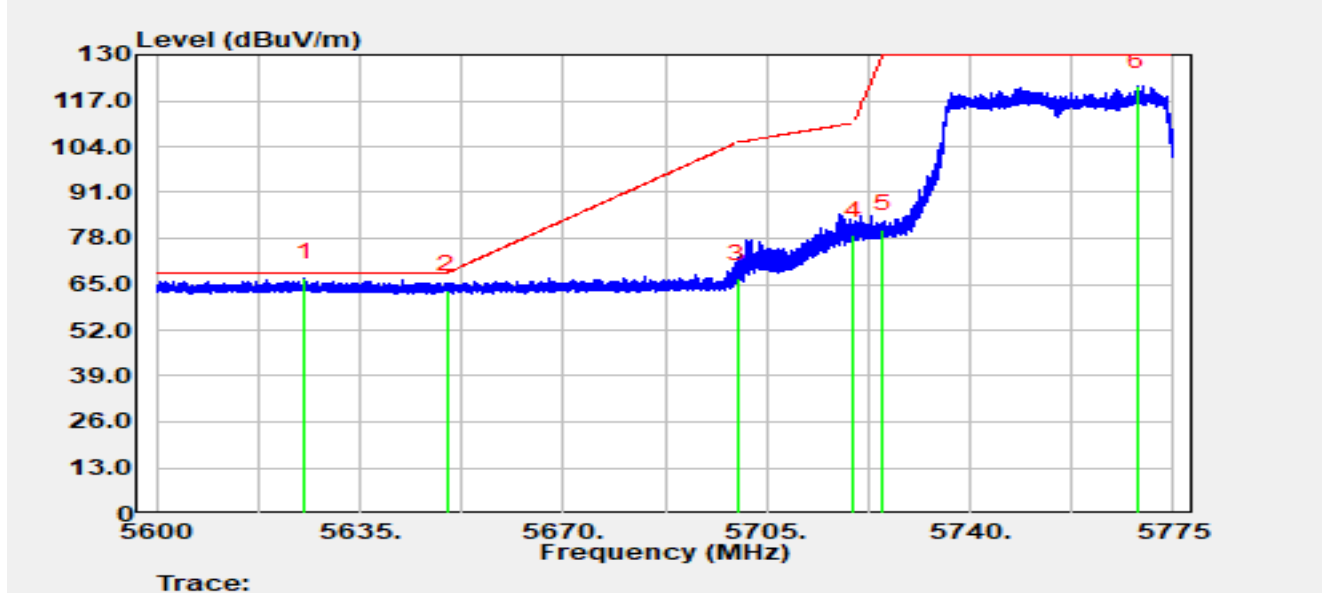


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5625.550	70.15	-3.37	66.79	-1.41	68.20	Peak
2		5650.000	67.09	-3.65	63.44	-4.76	68.20	Peak
3		5700.000	70.18	-3.47	66.71	-38.49	105.20	Peak
4		5720.000	82.22	-3.45	78.77	-32.03	110.80	Peak
5		5725.000	83.96	-3.47	80.49	-49.51	130.00	Peak
6		5768.840	124.66	-3.67	120.99	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5795 MHz		

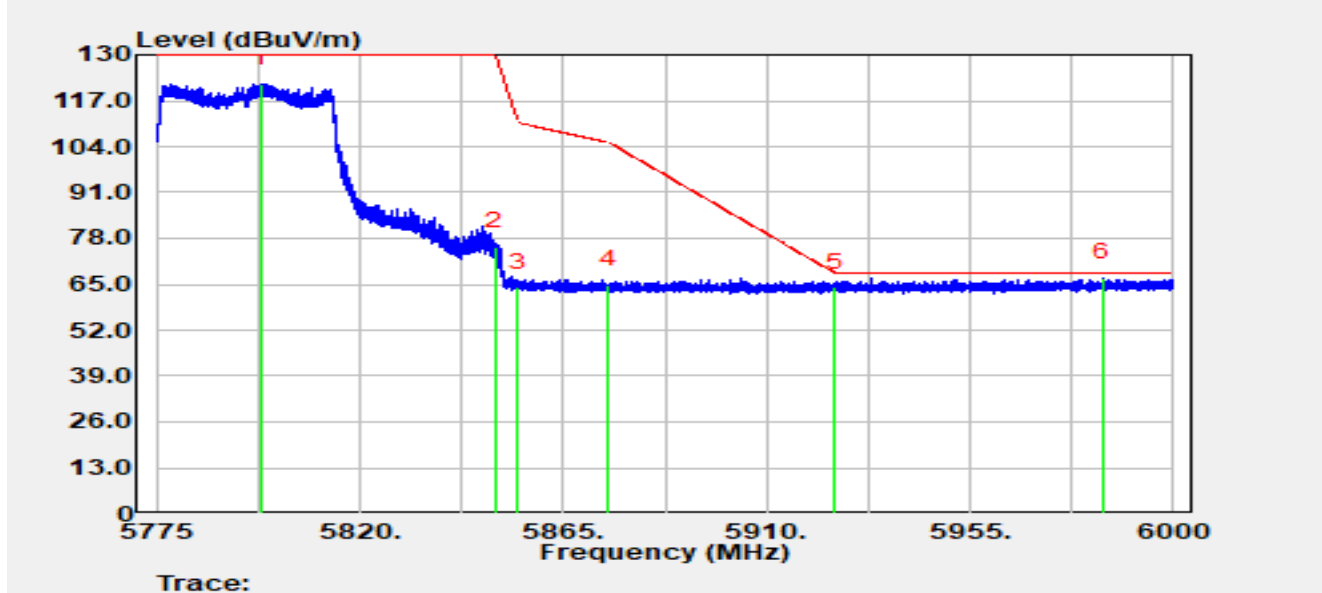


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5797.973	125.39	-3.72	121.67	N/A	N/A	Peak
2		5850.000	79.46	-3.75	75.71	-54.29	130.00	Peak
3		5855.000	67.90	-3.75	64.15	-46.65	110.80	Peak
4		5875.000	68.59	-3.82	64.77	-40.43	105.20	Peak
5		5925.000	67.86	-3.71	64.16	-4.04	68.20	Peak
6	*	5984.250	70.53	-3.67	66.86	-1.34	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	20.9°C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5795 MHz		

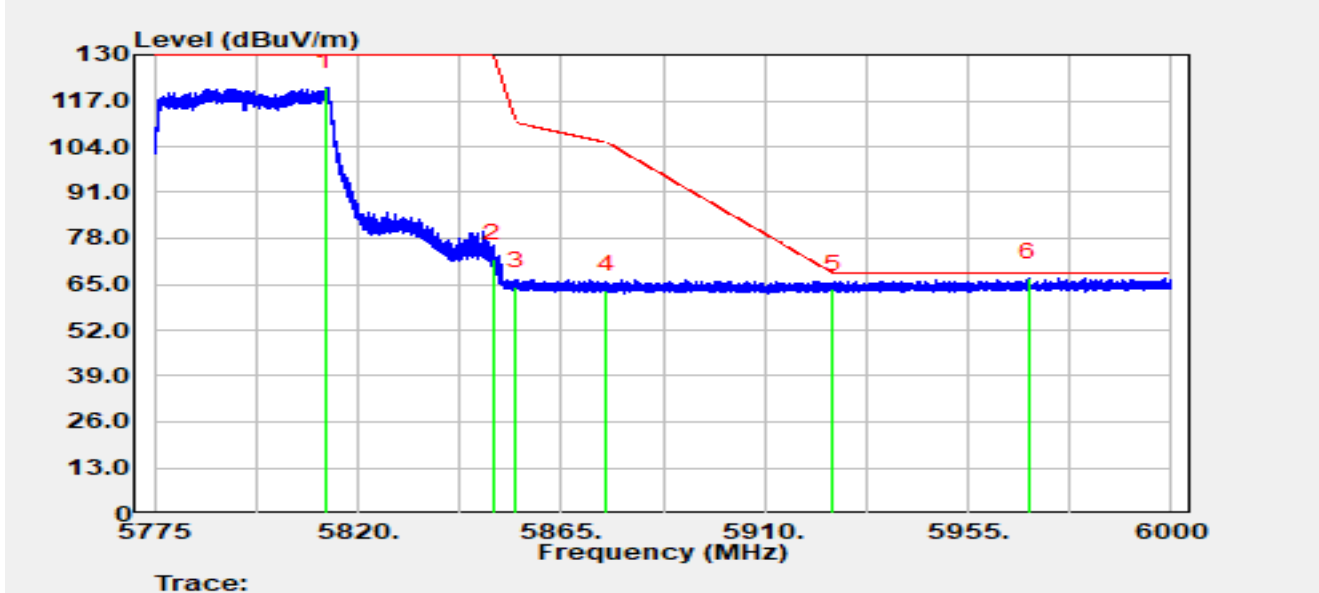

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5812.822	124.52	-3.83	120.69	N/A	N/A	Peak
2		5850.000	75.99	-3.75	72.23	-57.77	130.00	Peak
3		5855.000	68.08	-3.75	64.33	-46.47	110.80	Peak
4		5875.000	67.16	-3.82	63.33	-41.87	105.20	Peak
5		5925.000	67.35	-3.71	63.65	-4.55	68.20	Peak
6	*	5968.433	70.37	-3.64	66.73	-1.47	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).