


Site	SIP-AC3	Test Date	2025-07-29
Temperature	24.7 °C	Humidity	67.2 %
Limit	FCC_Part 15.407_RSE (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	HAN Access Point (AP571)	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 6025 MHz		

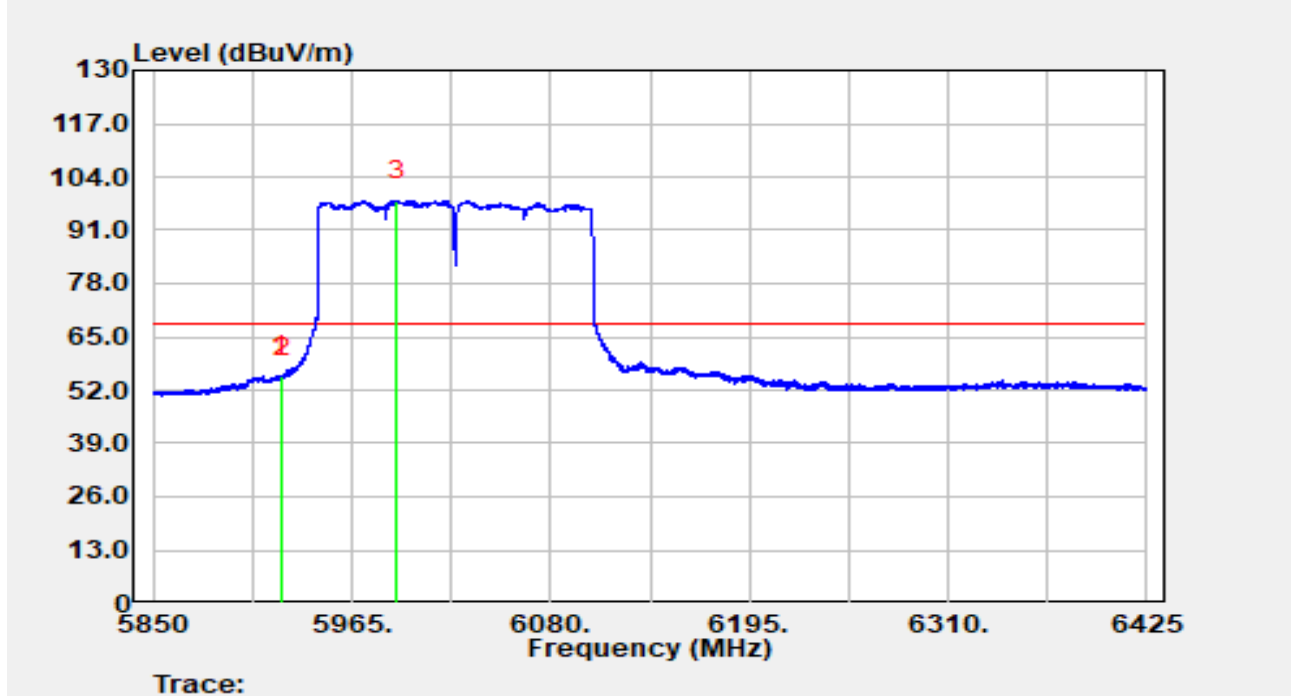


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.002	12.90	42.63	55.53	-12.67	68.20	Average
2		5925.000	12.66	42.64	55.30	-12.90	68.20	Average
3		5990.817	55.54	42.80	98.34	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-07-29
Temperature	24.7 °C	Humidity	67.2 %
Limit	FCC_Part 15.407_RSE (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	HAN Access Point (AP571)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

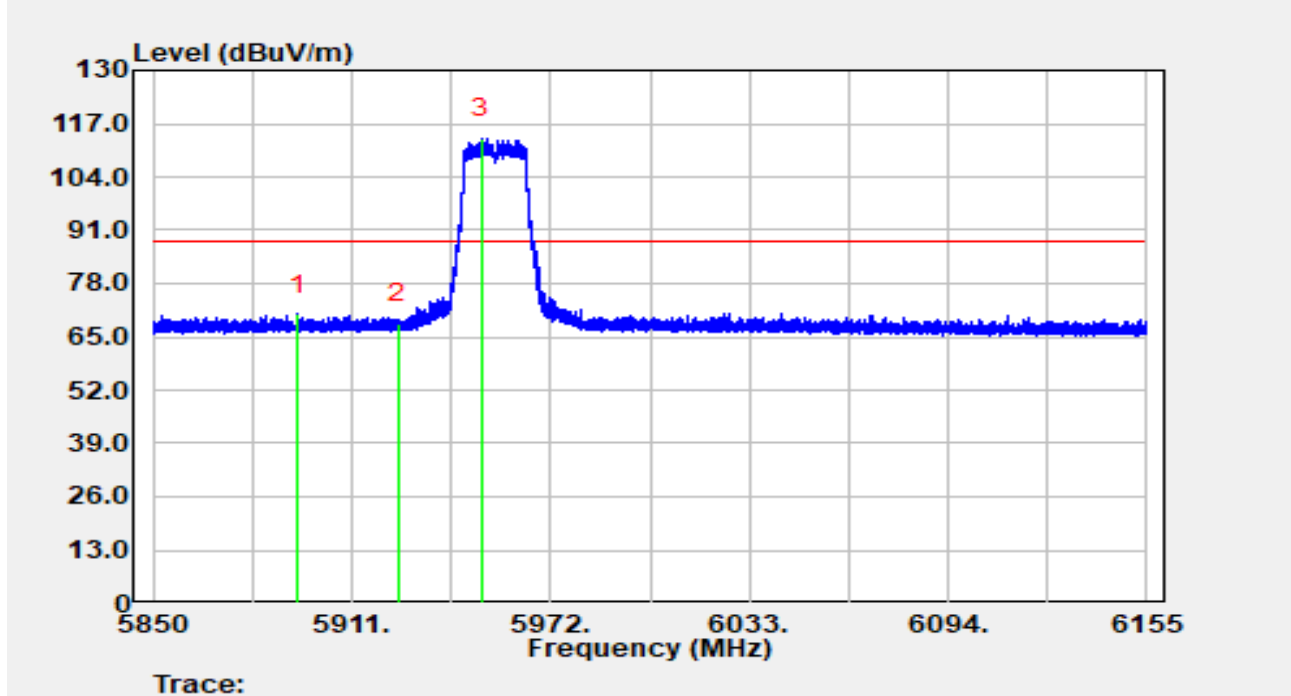


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5894.469	27.91	42.53	70.44	-17.76	88.20	Peak
2		5925.000	25.67	42.64	68.31	-19.89	88.20	Peak
3		5950.742	70.63	42.72	113.35	N/A	N/A	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-07-29
Temperature	24.7 °C	Humidity	67.2 %
Limit	FCC_Part 15.407_RSE (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	HAN Access Point (AP571)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

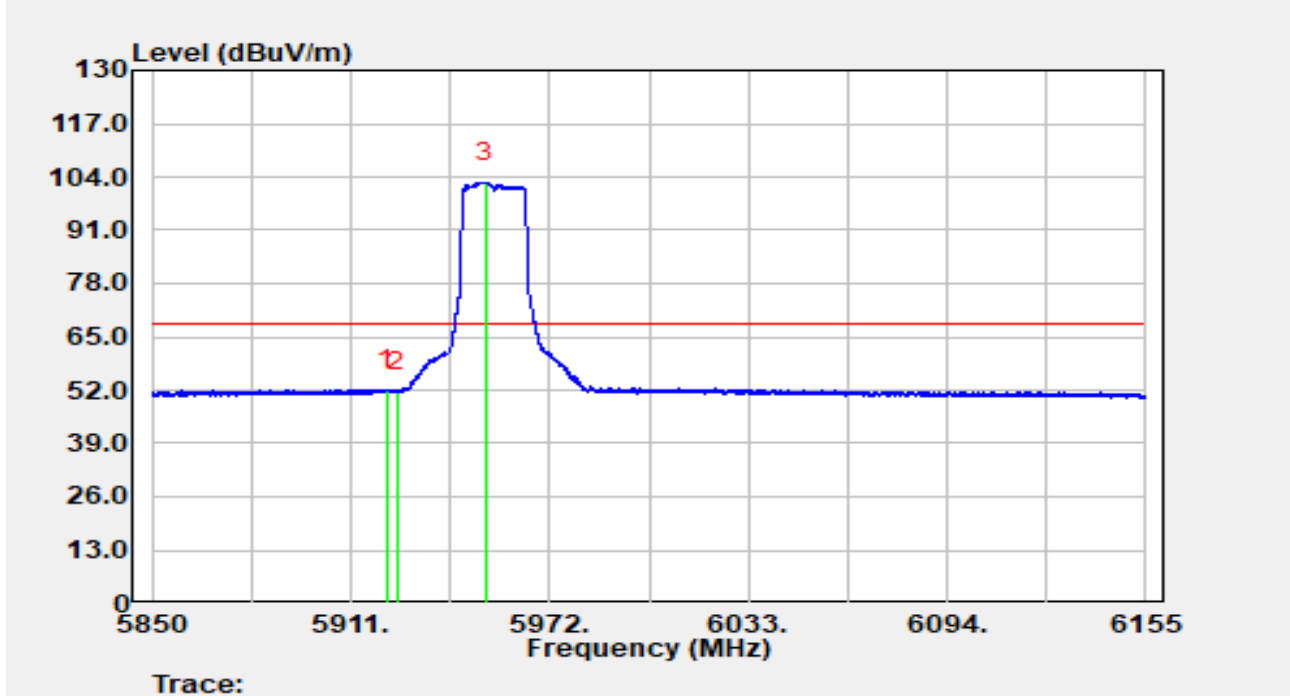


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5921.889	9.58	42.61	52.19	-16.01	68.20	Average
2		5925.000	8.92	42.64	51.56	-16.64	68.20	Average
3		5952.419	60.05	42.72	102.77	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-07-29
Temperature	24.7 °C	Humidity	67.2 %
Limit	FCC_Part 15.407_RSE (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	HAN Access Point (AP571)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

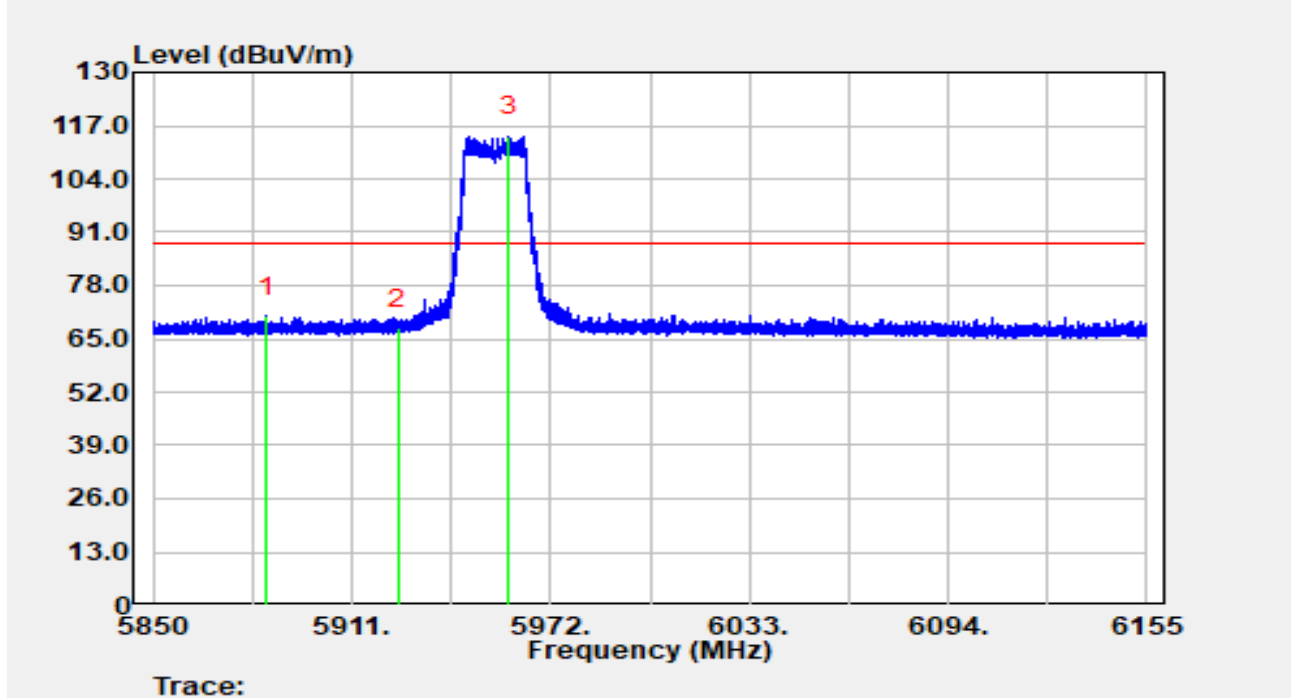


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5885.014	28.01	42.49	70.50	-17.70	88.20	Peak
2		5925.000	24.94	42.64	67.58	-20.62	88.20	Peak
3		5959.038	71.77	42.74	114.51	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-07-29
Temperature	24.7 °C	Humidity	67.2 %
Limit	FCC_Part 15.407_RSE (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	HAN Access Point (AP571)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

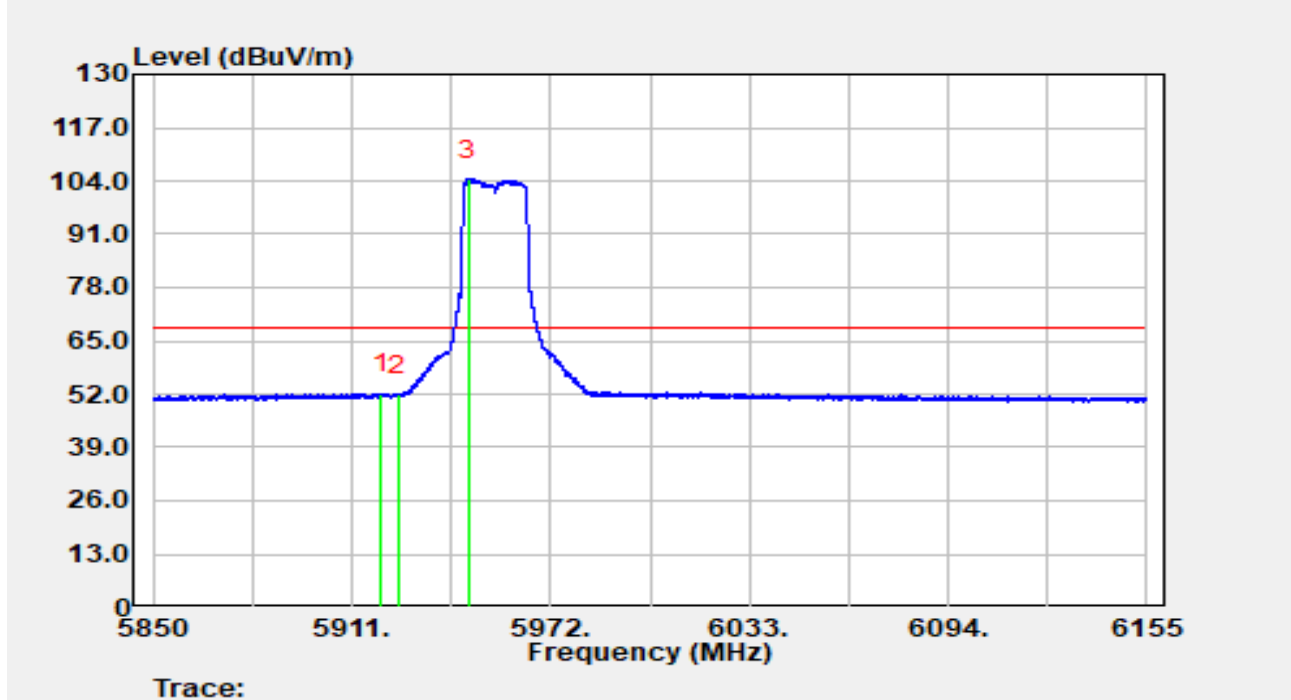


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5920.150	9.51	42.59	52.10	-16.10	68.20	Average
2		5925.000	9.21	42.64	51.85	-16.35	68.20	Average
3		5946.746	61.67	42.69	104.37	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-07-29
Temperature	24.7 °C	Humidity	67.2 %
Limit	FCC_Part 15.407_RSE (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	HAN Access Point (AP571)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

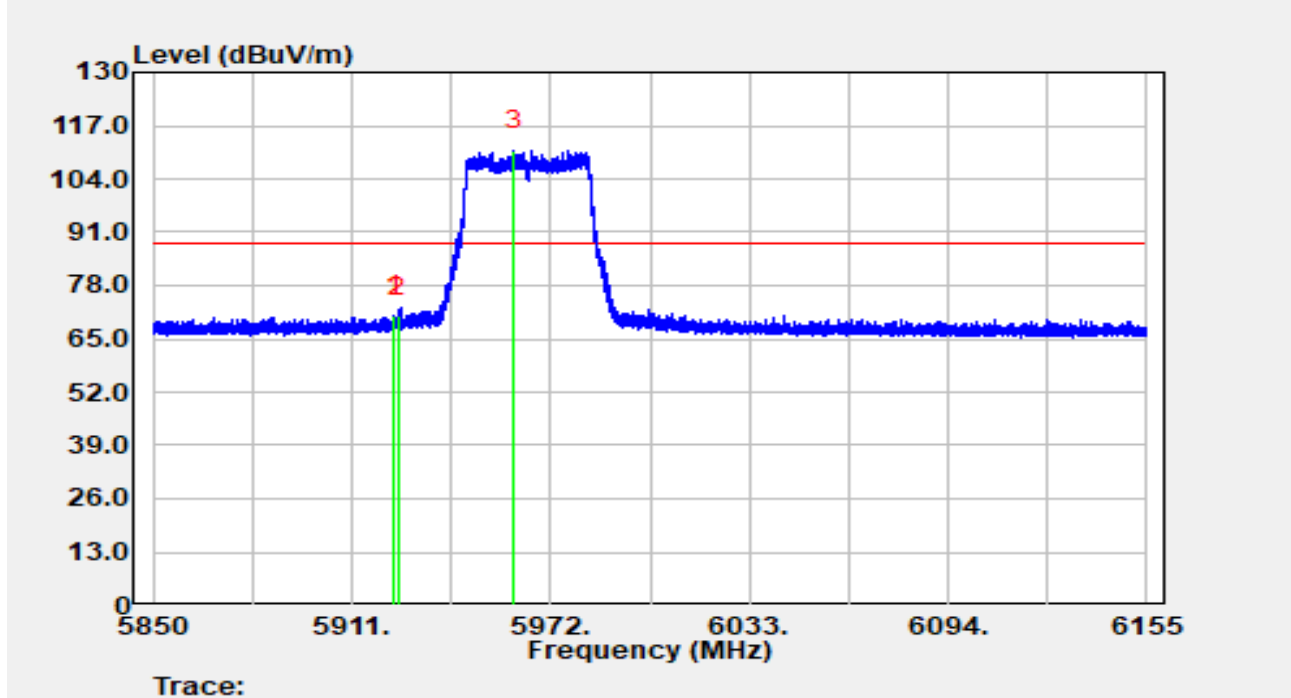


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.871	28.22	42.63	70.85	-17.35	88.20	Peak
2		5925.000	27.93	42.64	70.57	-17.63	88.20	Peak
3		5960.776	68.22	42.75	110.97	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-07-29
Temperature	24.7 °C	Humidity	67.2 %
Limit	FCC_Part 15.407_RSE (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	HAN Access Point (AP571)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

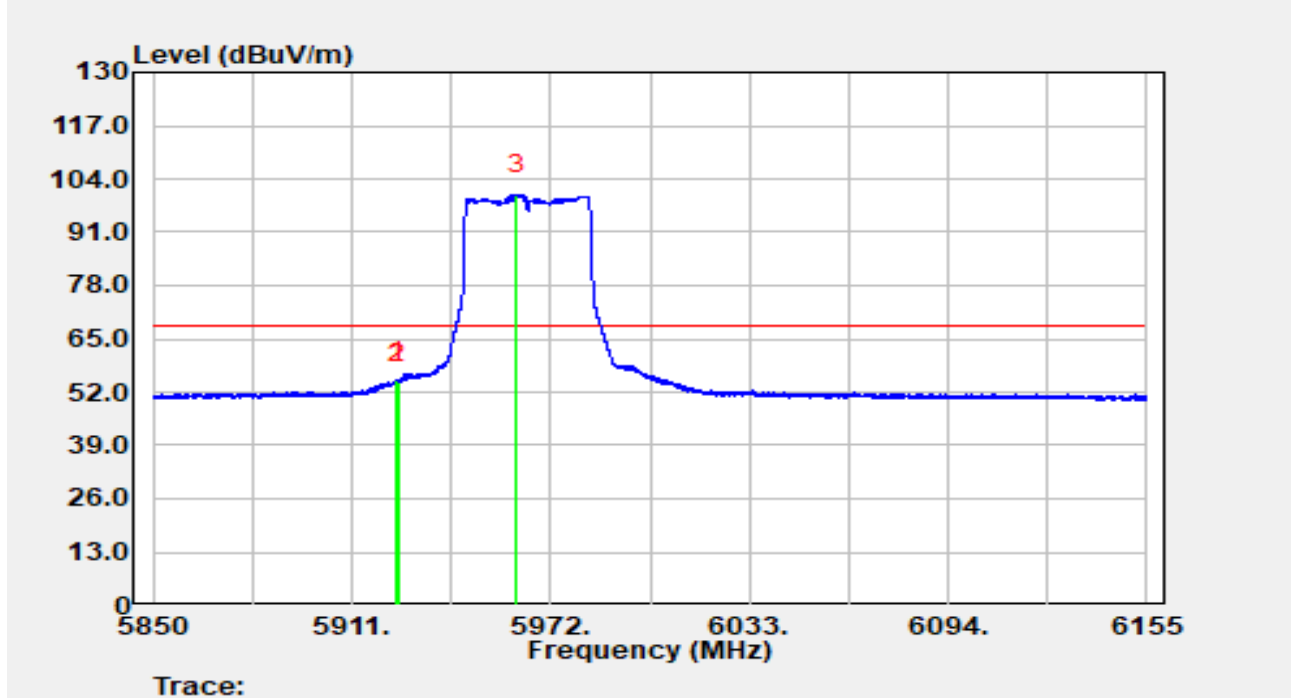


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.603	12.10	42.64	54.74	-13.46	68.20	Average
2		5925.000	11.67	42.64	54.31	-13.89	68.20	Average
3		5961.722	57.45	42.75	100.20	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-07-29
Temperature	24.7 °C	Humidity	67.2 %
Limit	FCC_Part 15.407_RSE (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	HAN Access Point (AP571)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

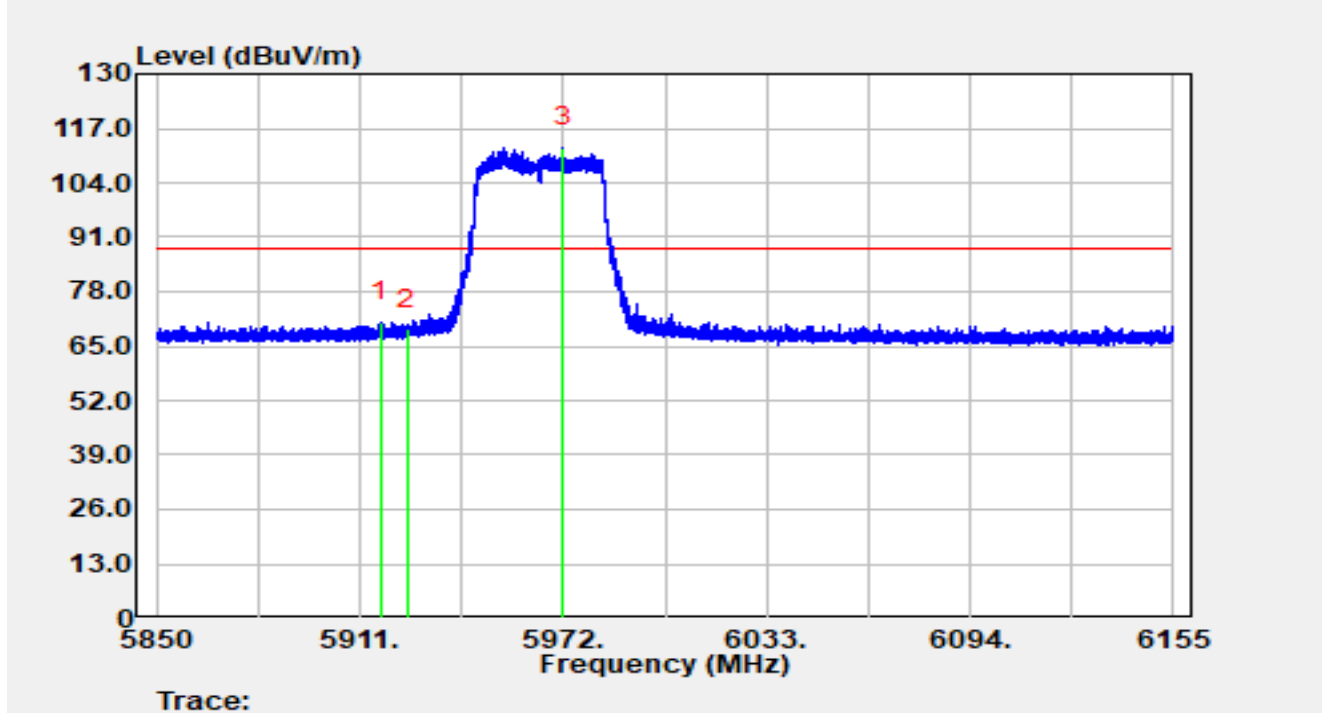


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5917.191	28.12	42.56	70.68	-17.52	88.20	Peak
2		5925.000	26.38	42.64	69.02	-19.18	88.20	Peak
3		5971.909	69.62	42.79	112.41	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-07-29
Temperature	24.7 °C	Humidity	67.2 %
Limit	FCC_Part 15.407_RSE (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	HAN Access Point (AP571)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

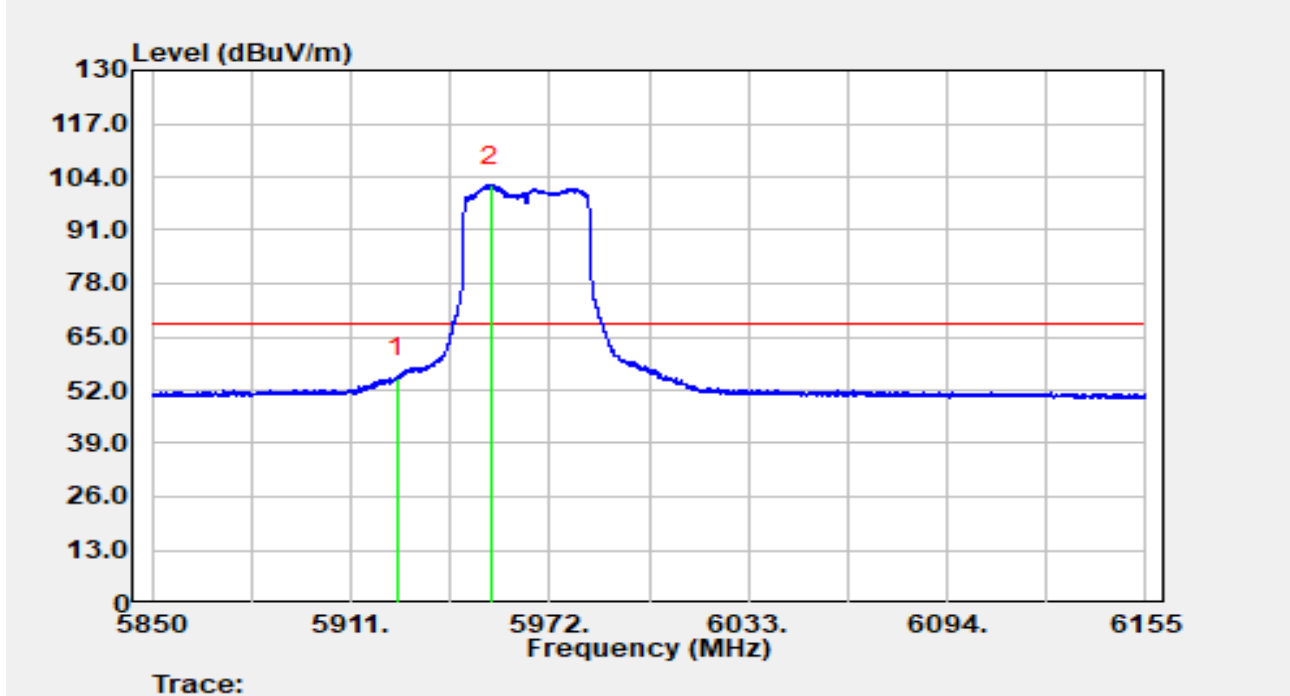


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	12.35	42.64	54.99	-13.21	68.20	Average
2		5953.914	59.26	42.73	101.99	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-07-29
Temperature	24.7 °C	Humidity	67.2 %
Limit	FCC_Part 15.407_RSE (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	HAN Access Point (AP571)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

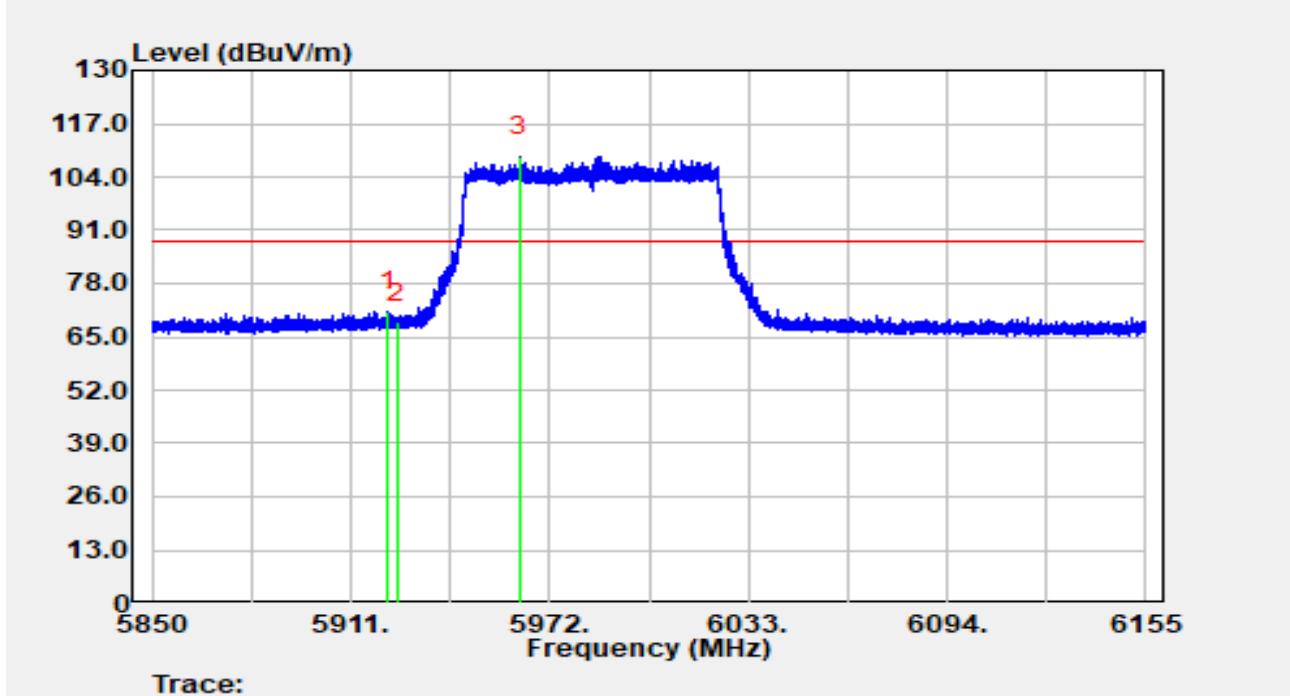


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.438	28.62	42.62	71.23	-16.97	88.20	Peak
2		5925.000	25.99	42.64	68.63	-19.57	88.20	Peak
3		5962.941	66.39	42.75	109.15	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-07-29
Temperature	24.7 °C	Humidity	67.2 %
Limit	FCC_Part 15.407_RSE (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	HAN Access Point (AP571)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

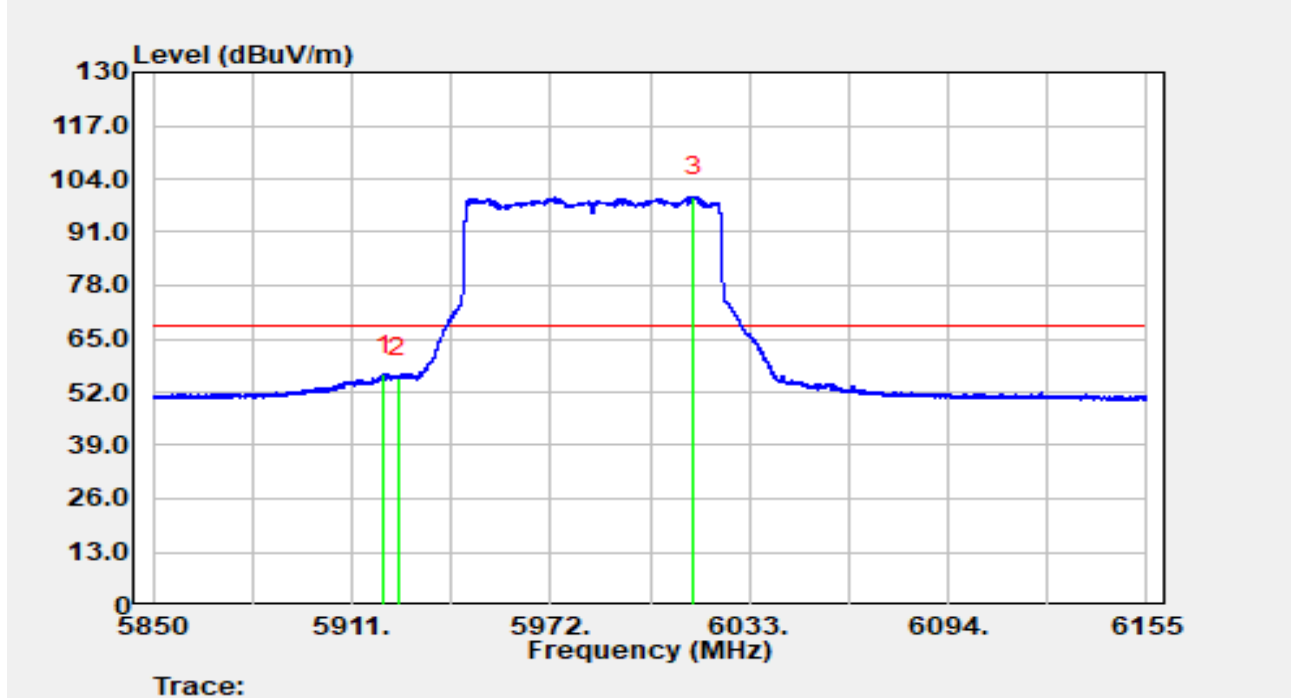


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5920.668	13.70	42.60	56.29	-11.91	68.20	Average
2		5925.000	12.84	42.64	55.48	-12.72	68.20	Average
3		6016.072	56.77	42.89	99.65	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-07-29
Temperature	24.7 °C	Humidity	67.2 %
Limit	FCC_Part 15.407_RSE (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	HAN Access Point (AP571)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

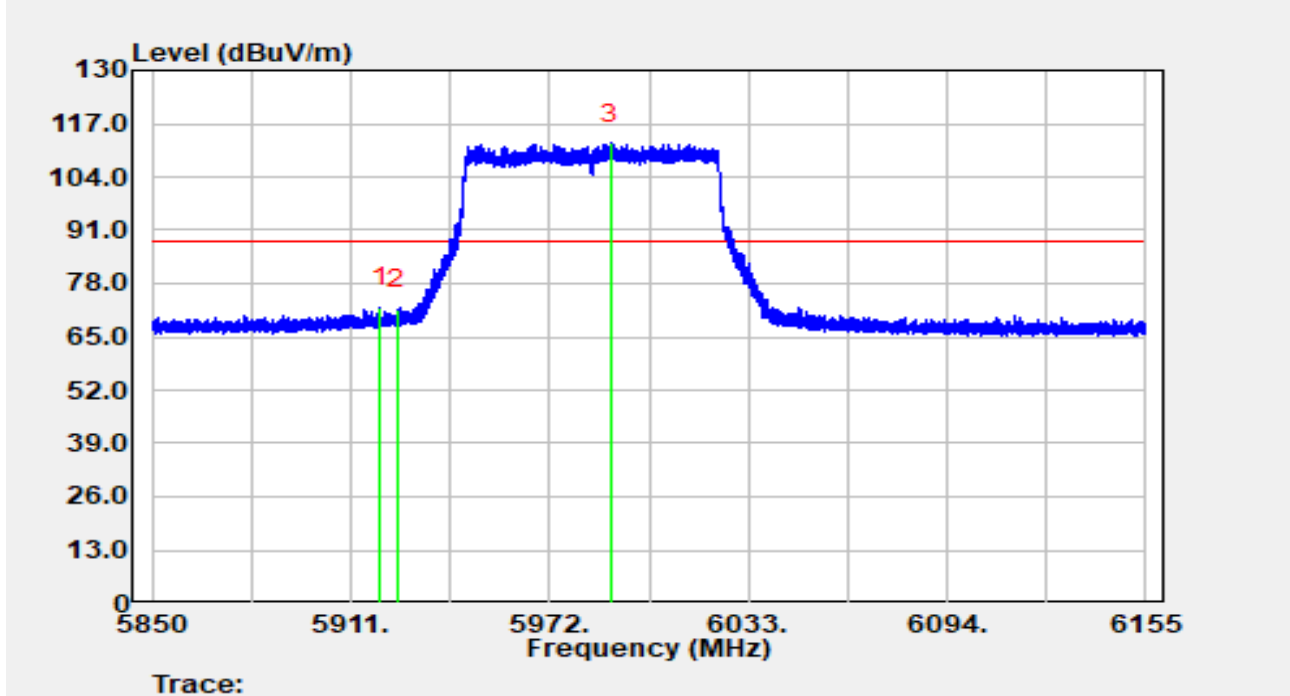


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5919.937	29.55	42.59	72.14	-16.06	88.20	Peak
2		5925.000	28.99	42.64	71.63	-16.57	88.20	Peak
3		5990.788	69.36	42.80	112.16	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-07-29
Temperature	24.7 °C	Humidity	67.2 %
Limit	FCC_Part 15.407_RSE (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	HAN Access Point (AP571)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

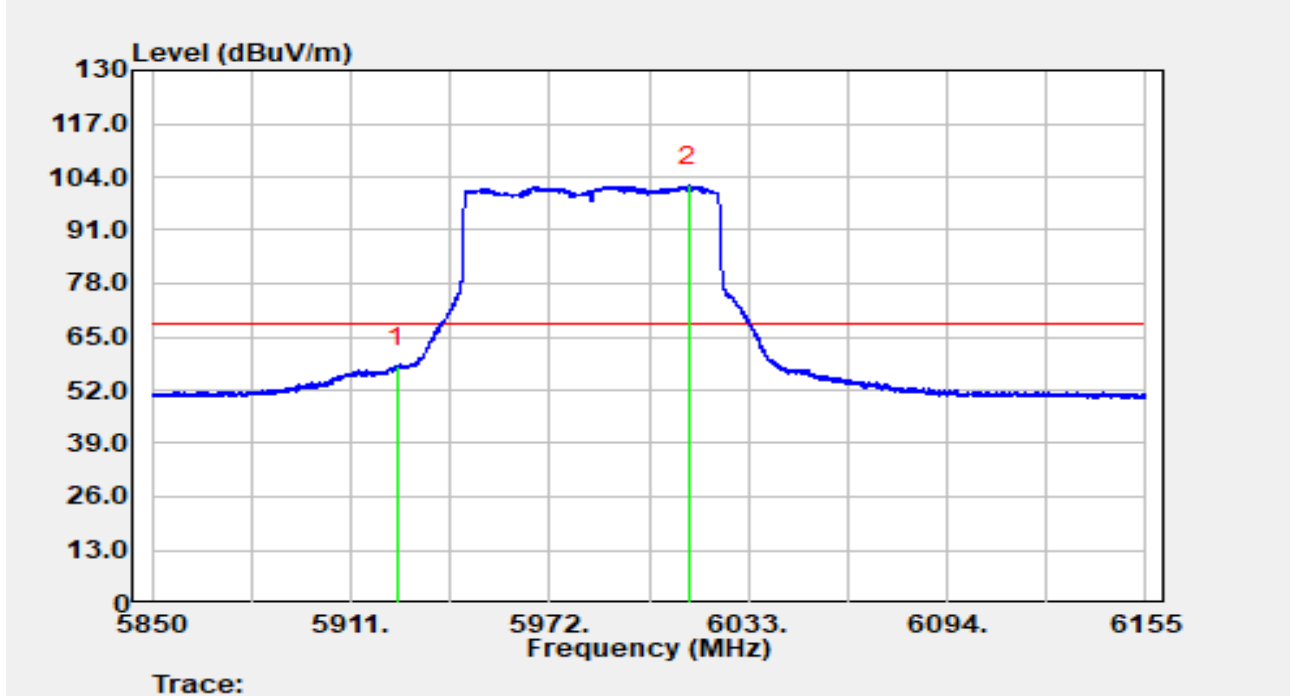


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	15.06	42.64	57.71	-10.49	68.20	Average
2		6014.730	58.92	42.88	101.80	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-07-29
Temperature	24.7 °C	Humidity	67.2 %
Limit	FCC_Part 15.407_RSE (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	HAN Access Point (AP571)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025 MHz		

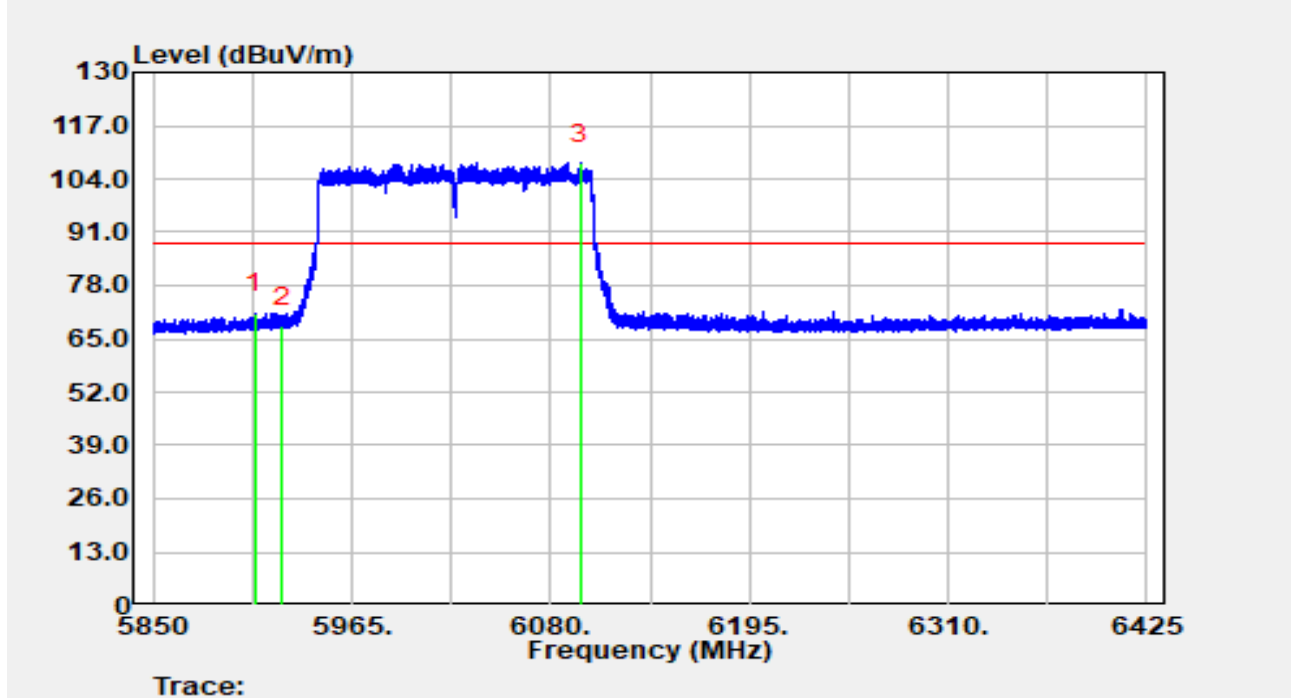


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5909.110	28.70	42.52	71.22	-16.98	88.20	Peak
2		5925.000	25.44	42.64	68.08	-20.12	88.20	Peak
3		6097.250	64.90	43.00	107.90	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-07-29
Temperature	24.7 °C	Humidity	67.2 %
Limit	FCC_Part 15.407_RSE (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	HAN Access Point (AP571)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025 MHz		

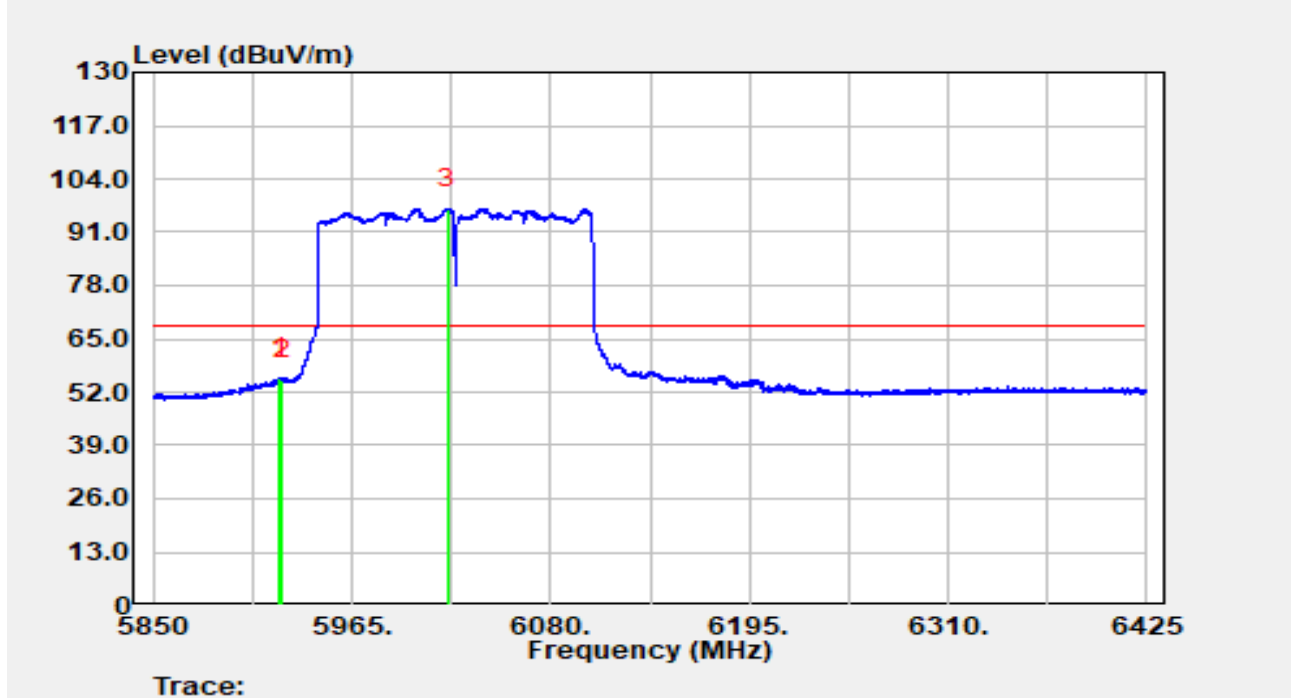


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.083	12.91	42.62	55.53	-12.67	68.20	Average
2		5925.000	12.45	42.64	55.09	-13.11	68.20	Average
3		6020.315	53.97	42.90	96.86	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-07-29
Temperature	24.7 °C	Humidity	67.2 %
Limit	FCC_Part 15.407_RSE (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	HAN Access Point (AP571)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025 MHz		

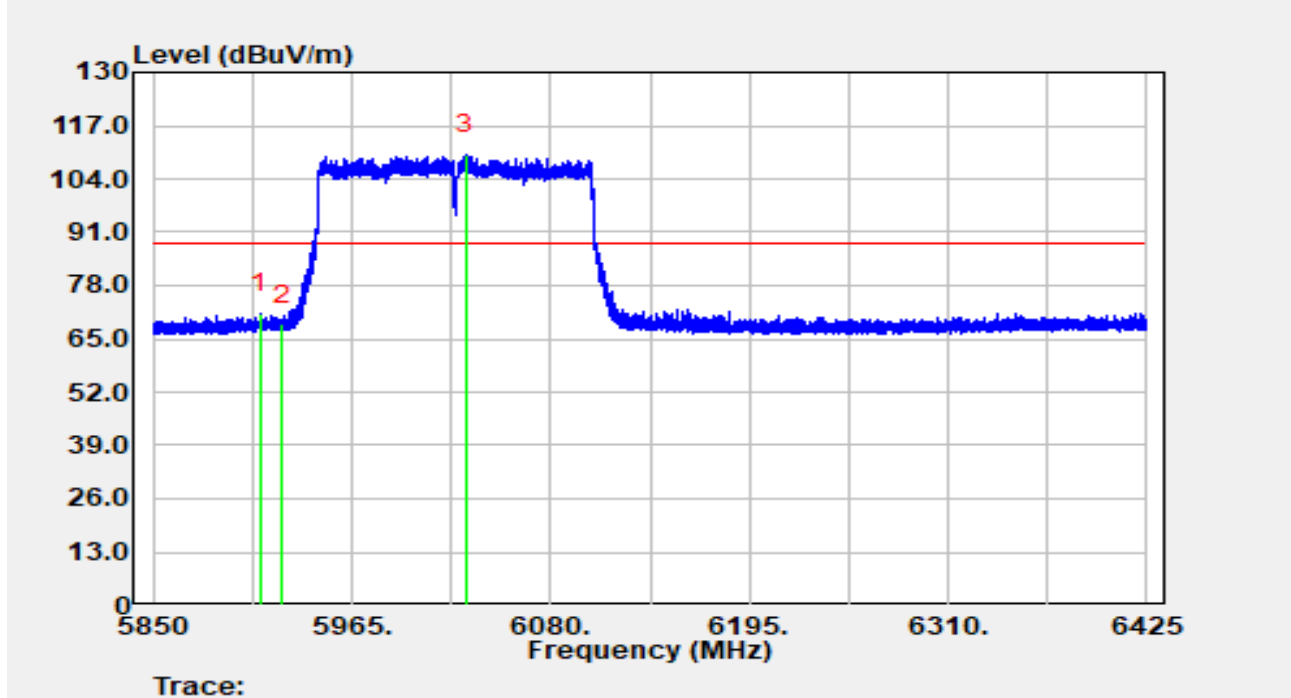


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5912.100	28.80	42.52	71.32	-16.88	88.20	Peak
2		5925.000	25.83	42.64	68.48	-19.72	88.20	Peak
3		6031.240	67.13	42.92	110.05	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-07-29
Temperature	24.7 °C	Humidity	67.2 %
Limit	FCC_Part 15.407_RSE (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	HAN Access Point (AP571)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025 MHz		

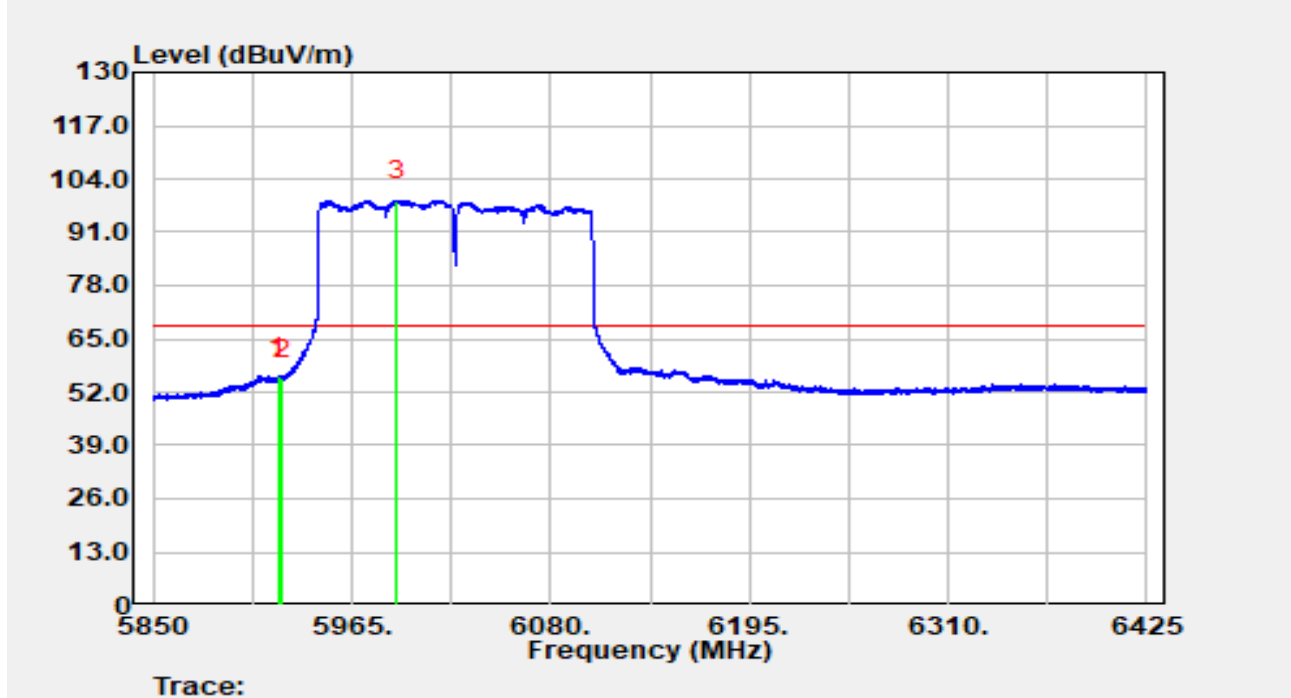


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.220	13.16	42.61	55.78	-12.42	68.20	Average
2		5925.000	12.62	42.64	55.26	-12.94	68.20	Average
3		5991.047	55.96	42.80	98.76	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-07-29
Temperature	24.7 °C	Humidity	67.2 %
Limit	FCC_Part 15.407_RSE (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	HAN Access Point (AP571)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT320-1 at 6105 MHz		

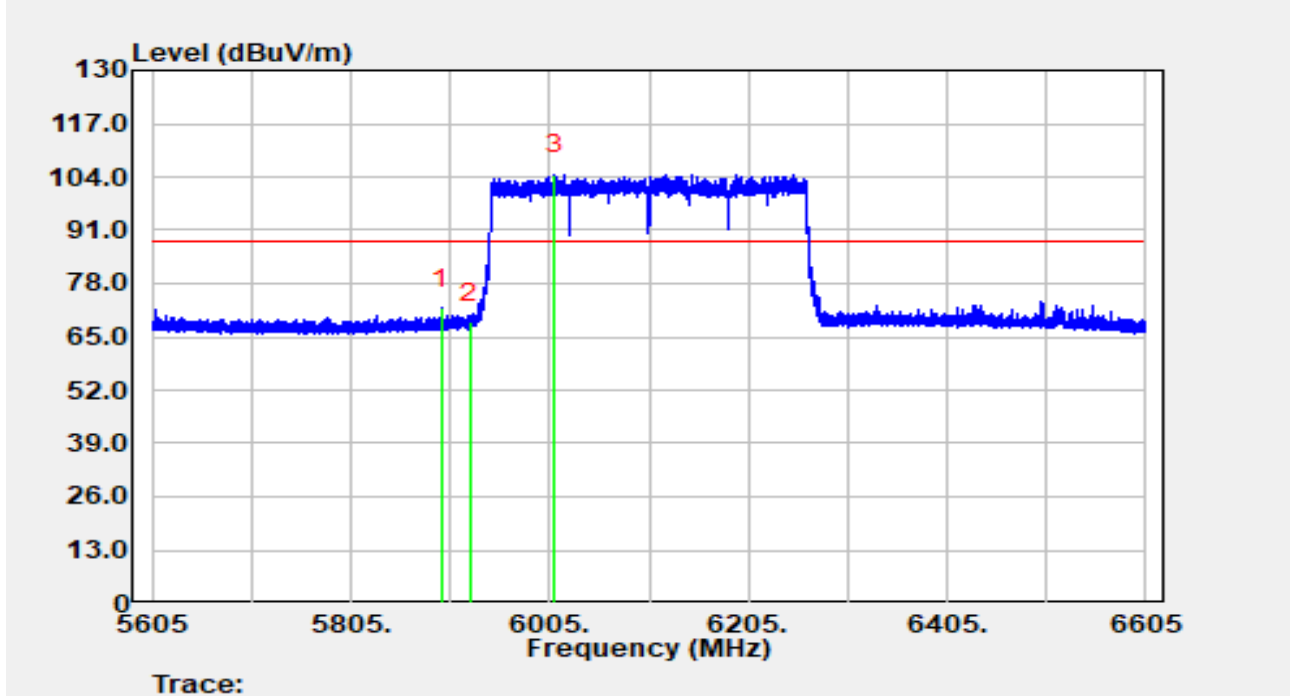


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5896.500	29.49	42.53	72.02	-16.18	88.20	Peak
2		5925.000	25.90	42.64	68.54	-19.66	88.20	Peak
3		6010.300	61.79	42.86	104.65	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-07-29
Temperature	24.7 °C	Humidity	67.2 %
Limit	FCC_Part 15.407_RSE (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	HAN Access Point (AP571)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT320-1 at 6105 MHz		

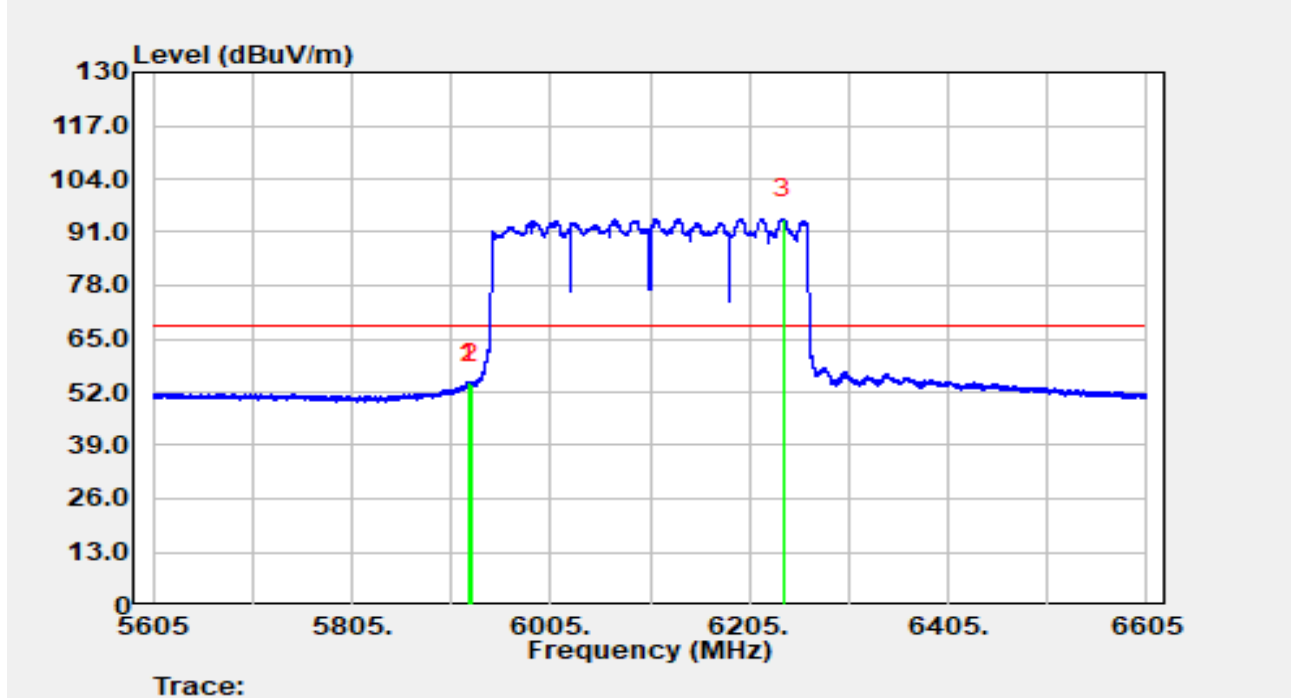


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.900	11.68	42.62	54.30	-13.90	68.20	Average
2		5925.000	11.39	42.64	54.03	-14.17	68.20	Average
3		6239.000	51.36	43.07	94.43	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-07-29
Temperature	24.7 °C	Humidity	67.2 %
Limit	FCC_Part 15.407_RSE (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	HAN Access Point (AP571)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT320-1 at 6105 MHz		

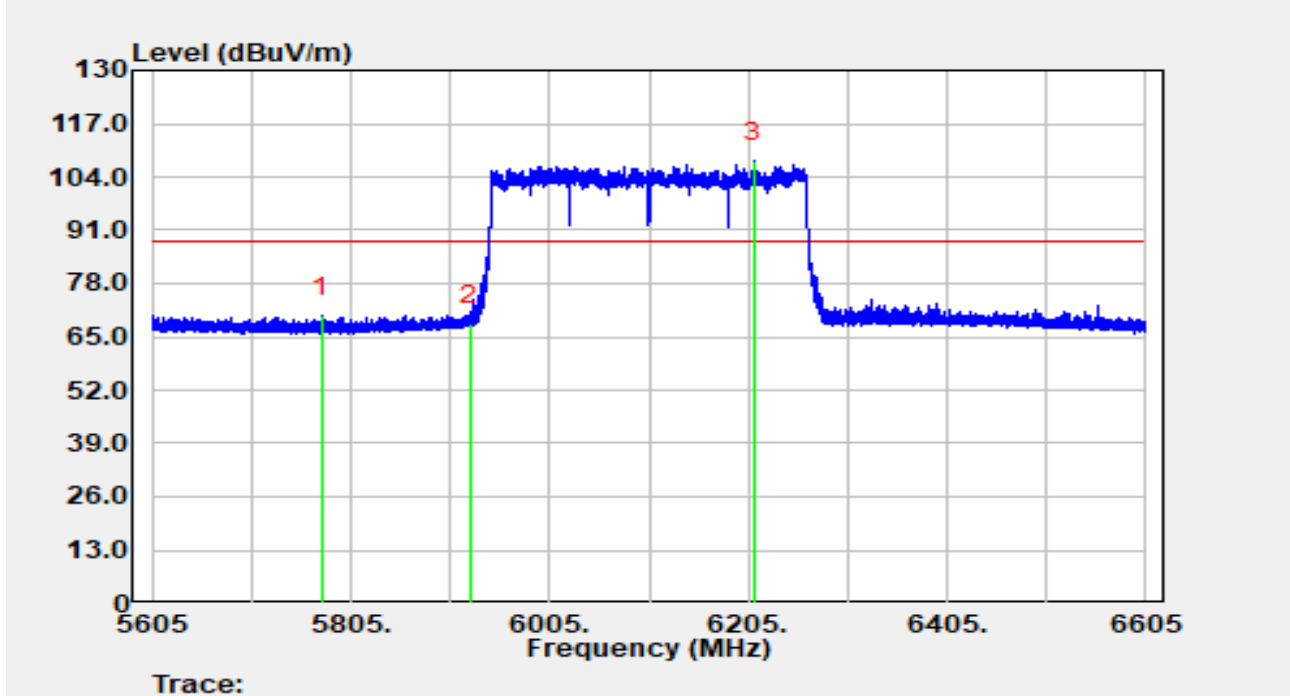


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5775.000	27.77	42.27	70.05	-18.15	88.20	Peak
2		5925.000	25.52	42.64	68.16	-20.04	88.20	Peak
3		6211.000	64.83	43.04	107.88	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-07-29
Temperature	24.7 °C	Humidity	67.2 %
Limit	FCC_Part 15.407_RSE (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	HAN Access Point (AP571)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT320-1 at 6105 MHz		

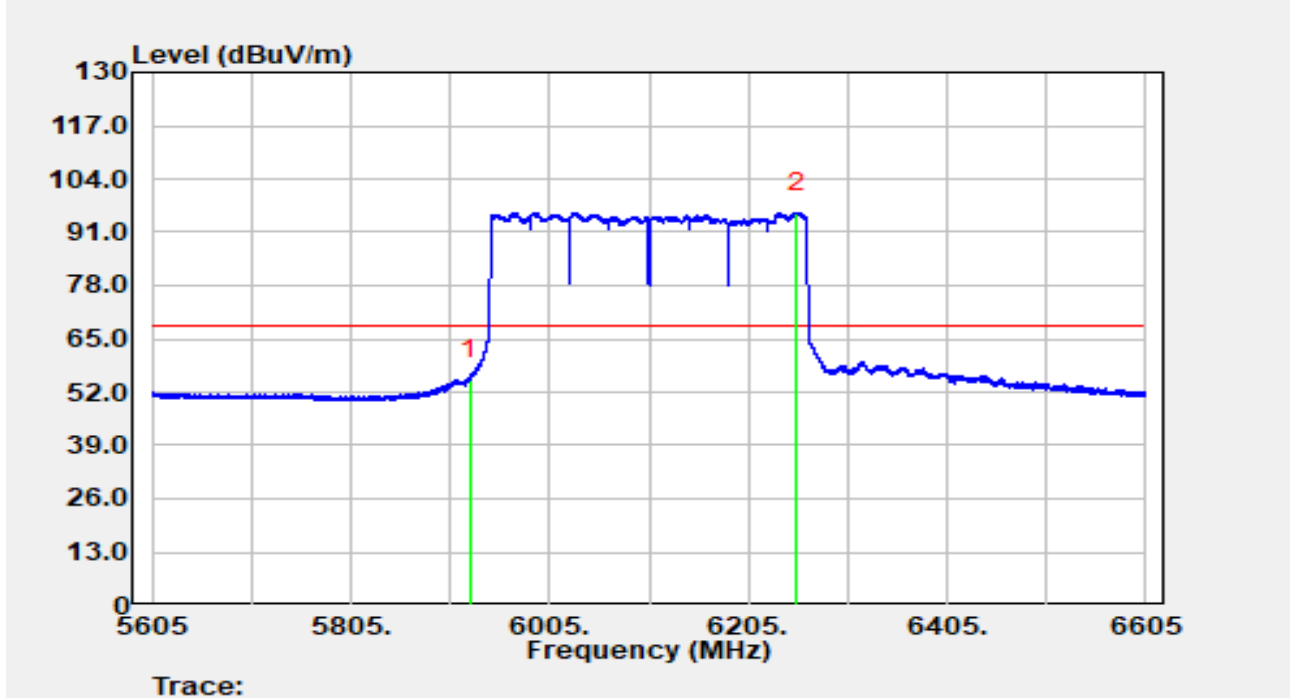


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	12.40	42.64	55.04	-13.16	68.20	Average
2		6253.200	52.79	43.00	95.79	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-07-29
Temperature	24.7 °C	Humidity	67.2 %
Limit	FCC_Part 15.407_RSE (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	HAN Access Point (AP571)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT320-2 at 6265 MHz		

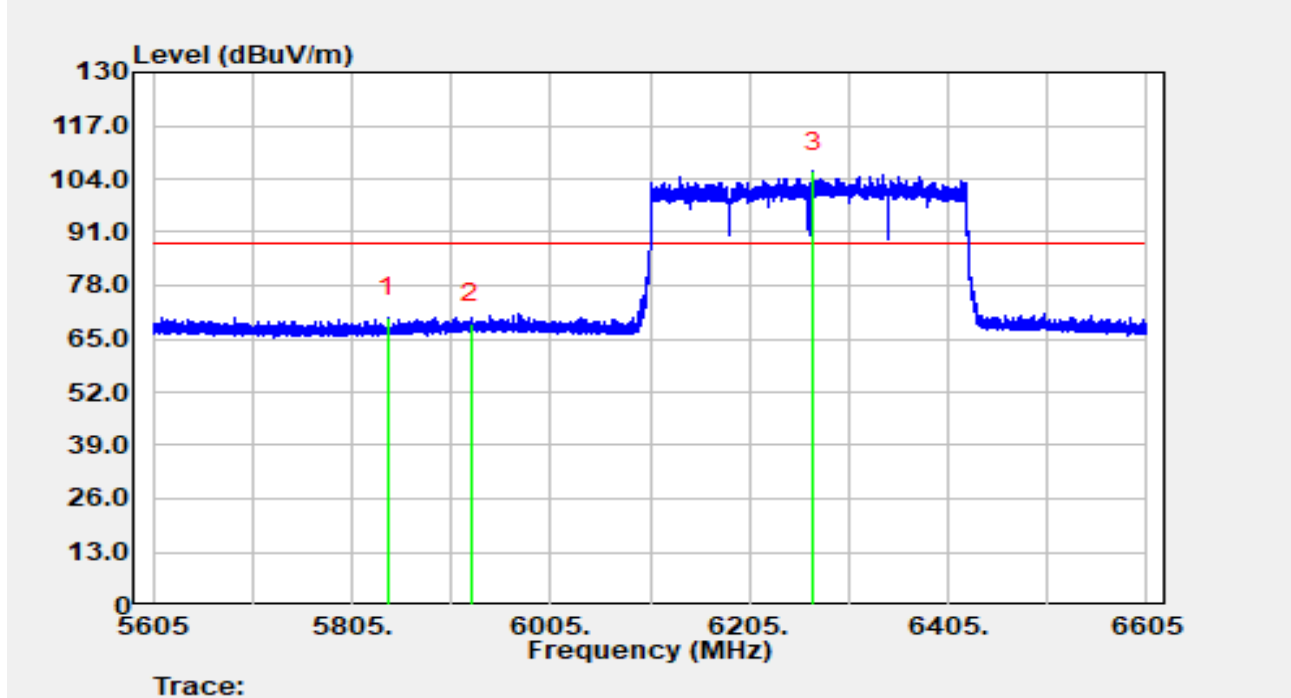


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5840.900	27.78	42.39	70.17	-18.03	88.20	Peak
2		5925.000	26.15	42.64	68.79	-19.41	88.20	Peak
3		6270.000	62.73	43.00	105.72	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-07-29
Temperature	24.7 °C	Humidity	67.2 %
Limit	FCC_Part 15.407_RSE (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	HAN Access Point (AP571)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT320-2 at 6265 MHz		

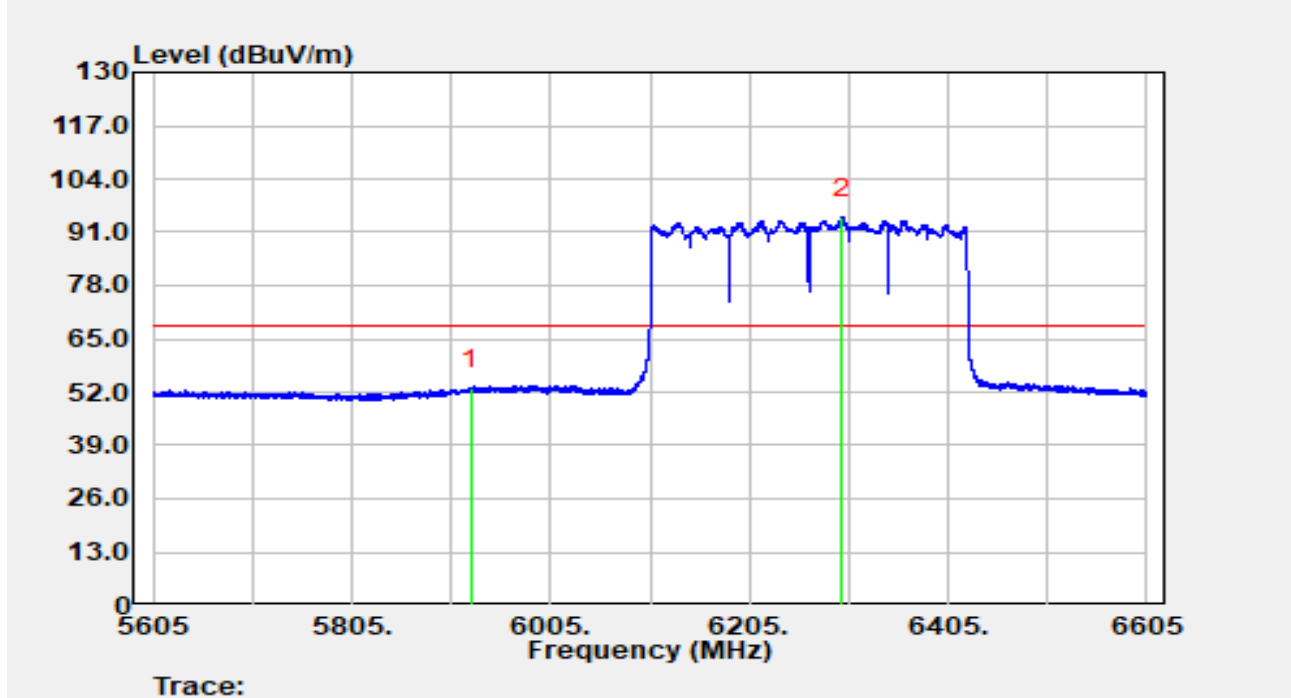


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	10.17	42.64	52.82	-15.38	68.20	Average
2		6298.400	51.50	42.98	94.48	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-07-29
Temperature	24.7 °C	Humidity	67.2 %
Limit	FCC_Part 15.407_RSE (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	HAN Access Point (AP571)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT320-2 at 6265 MHz		

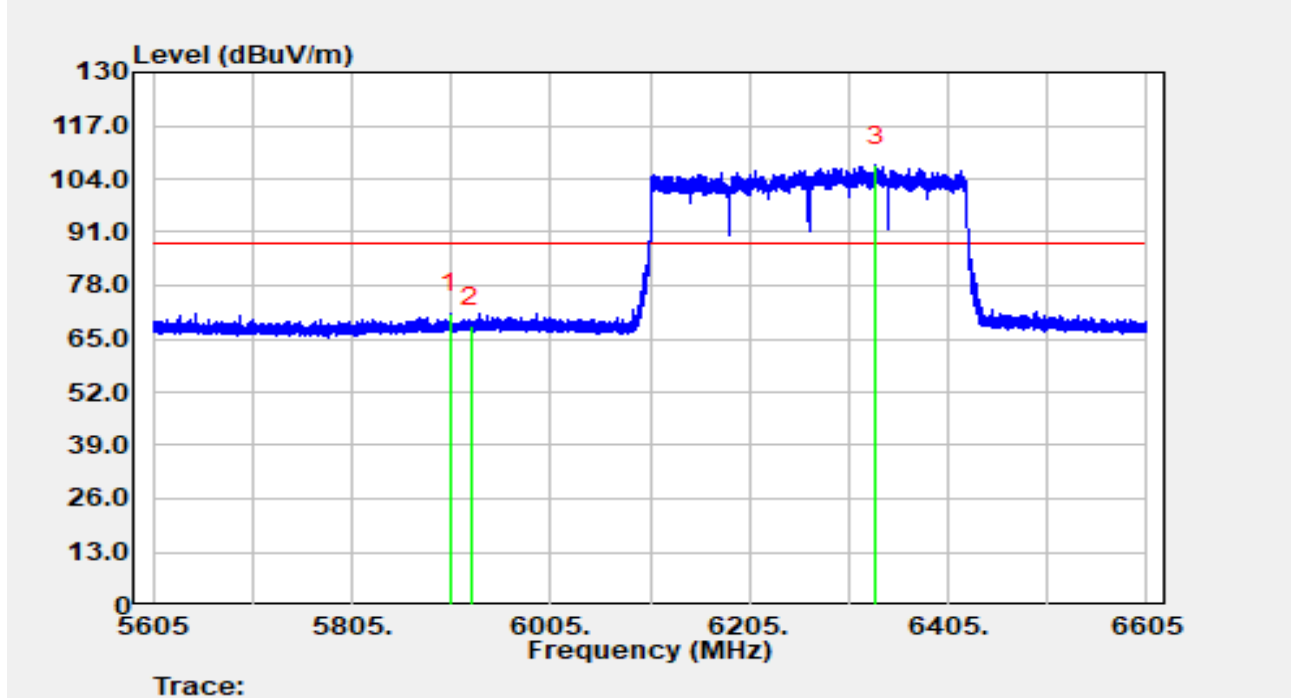


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5903.800	28.63	42.52	71.15	-17.05	88.20	Peak
2		5925.000	25.33	42.64	67.97	-20.23	88.20	Peak
3		6331.600	64.26	43.08	107.34	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-07-29
Temperature	24.7 °C	Humidity	67.2 %
Limit	FCC_Part 15.407_RSE (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	HAN Access Point (AP571)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT320-2 at 6265 MHz		

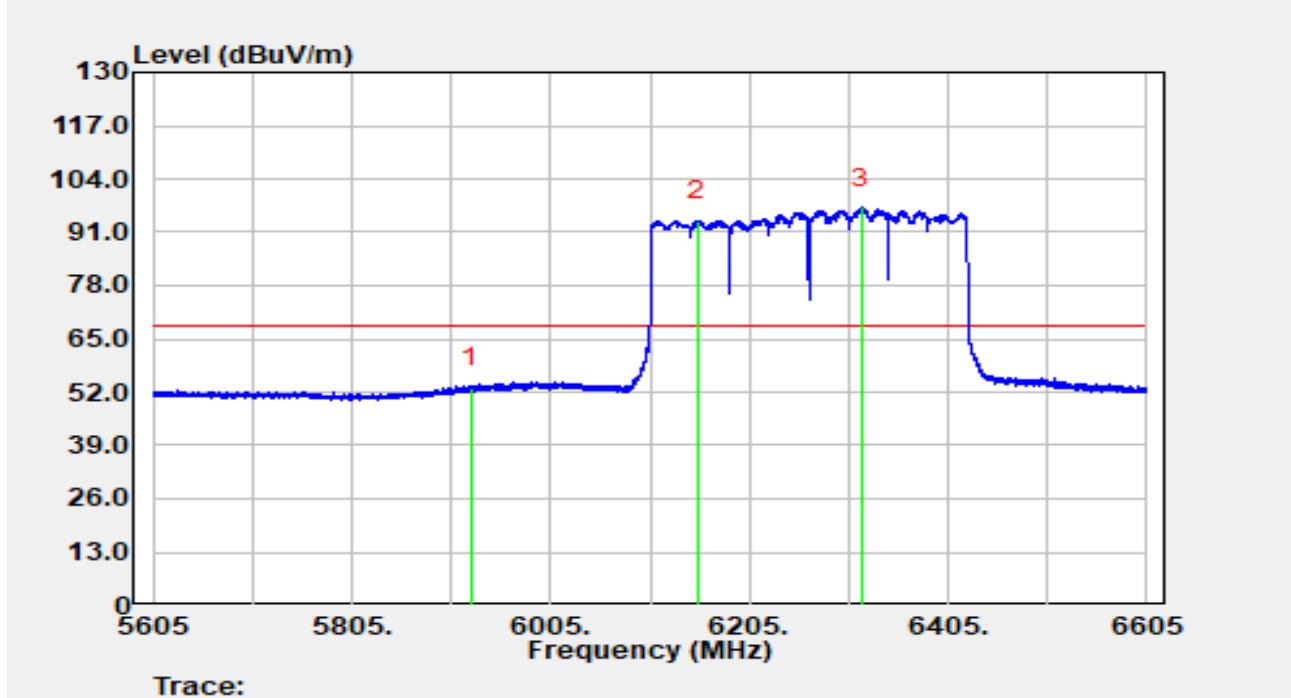


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	10.36	42.64	53.00	-15.20	68.20	Average
2		6152.600	50.93	42.99	93.92	25.72	68.20	Average
3		6318.300	53.87	43.05	96.92	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

AP571e - WLAN Config 1

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5955 MHz		

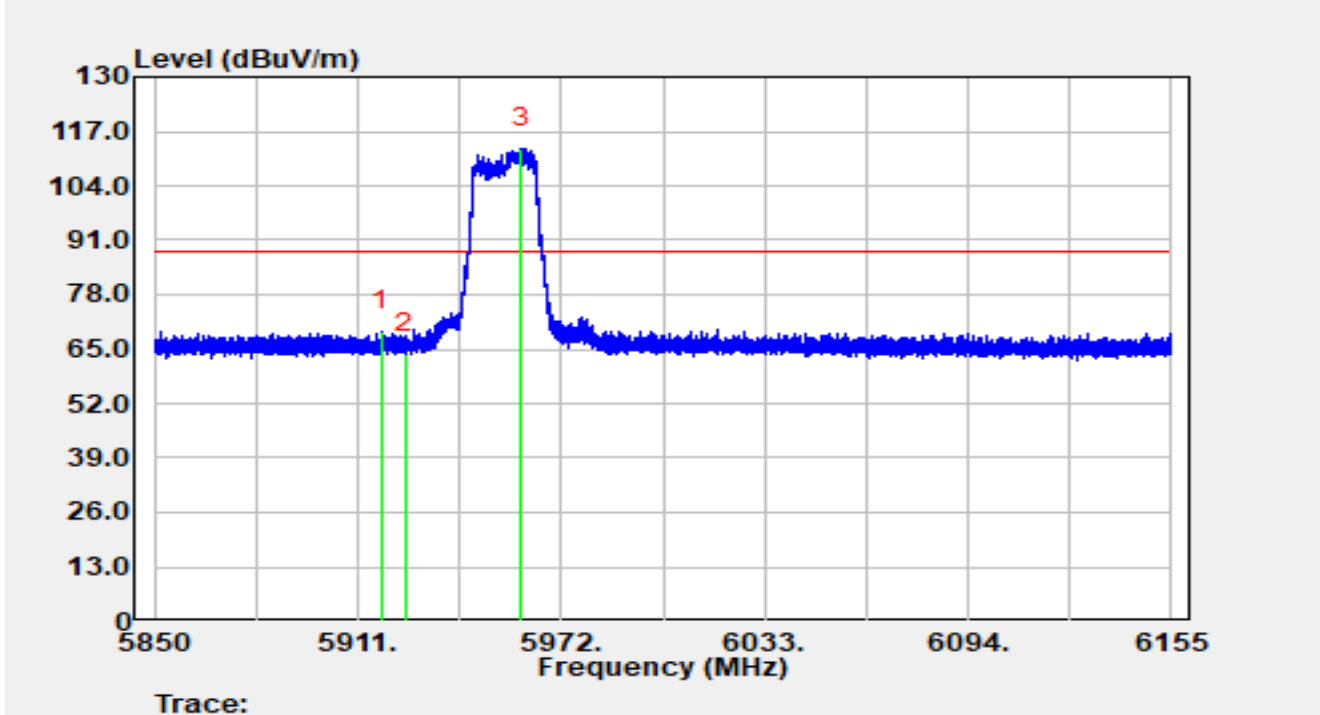


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5917.832	26.76	42.57	69.33	-18.87	88.20	Peak
2		5925.000	21.27	42.64	63.91	-24.29	88.20	Peak
3		5960.075	70.10	42.75	112.85	N/A	N/A	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5955 MHz		

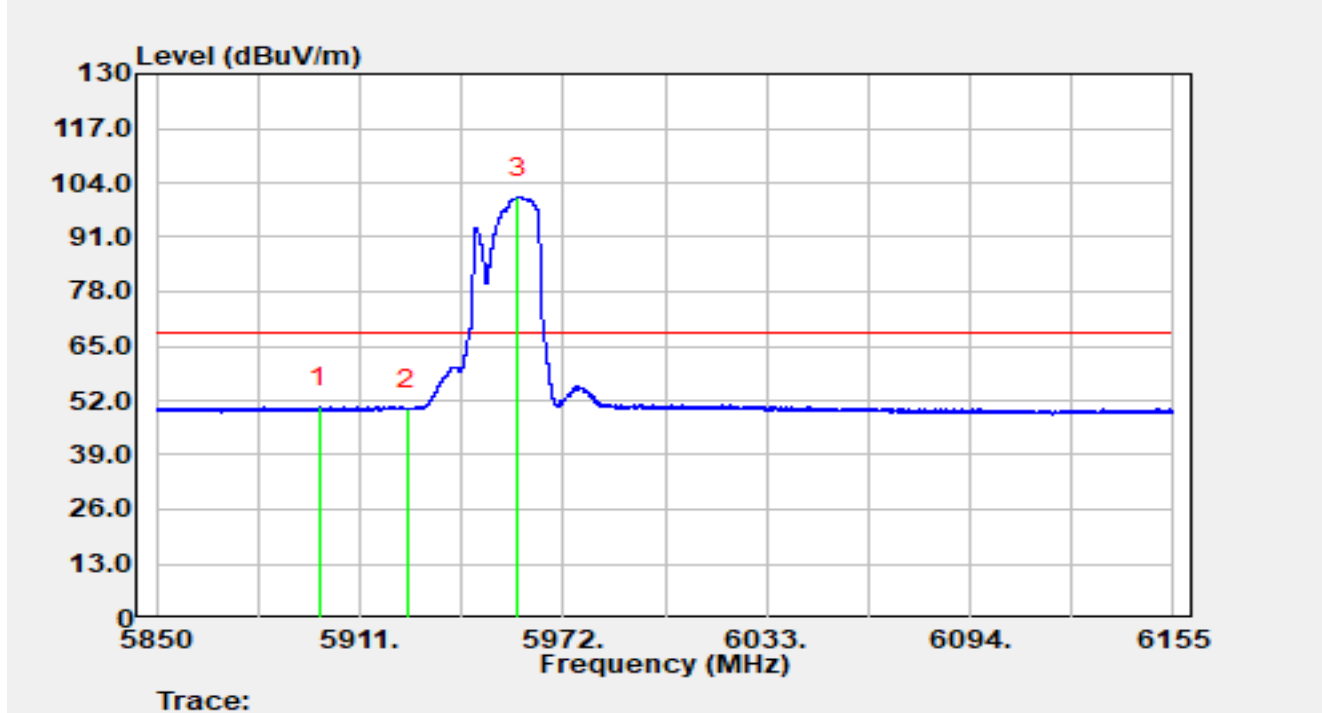


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5898.983	7.95	42.52	50.47	-17.73	68.20	Average
2		5925.000	7.35	42.64	49.99	-18.21	68.20	Average
3		5958.214	57.78	42.74	100.52	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5955 MHz		

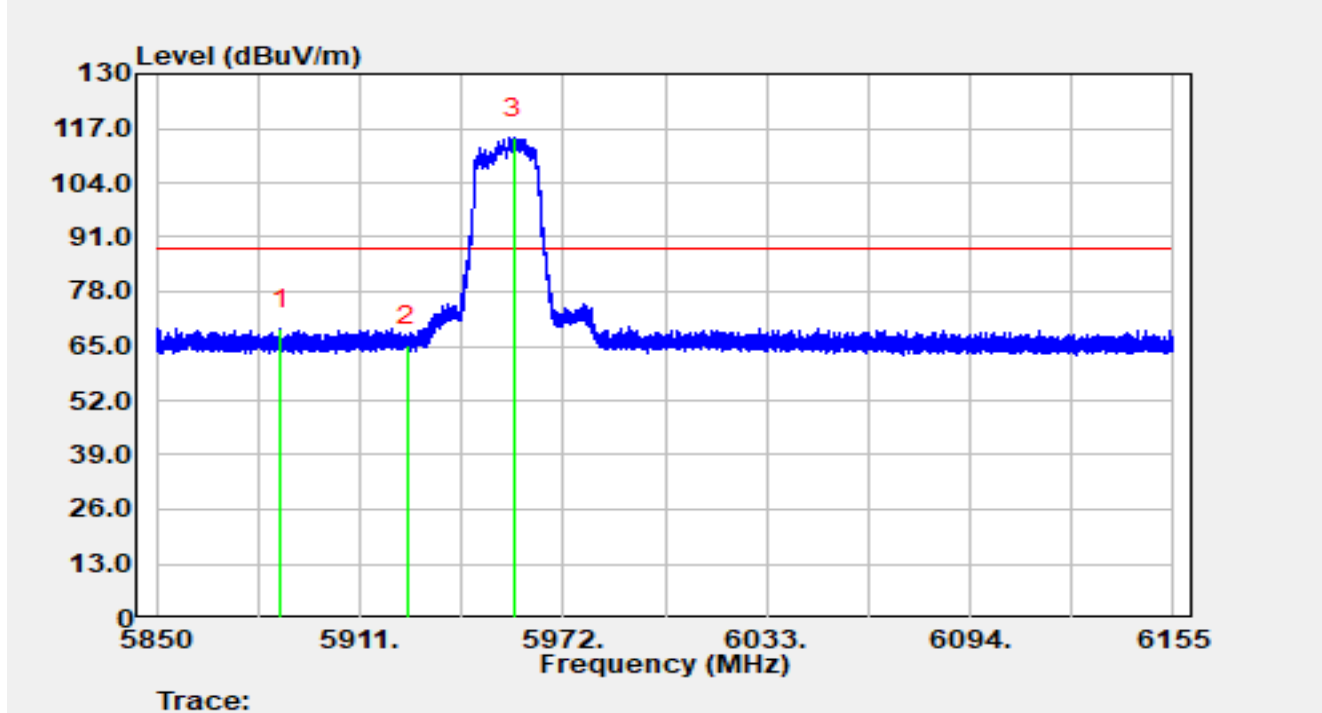


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5887.058	26.56	42.50	69.05	-19.15	88.20	Peak
2		5925.000	22.38	42.64	65.02	-23.18	88.20	Peak
3		5957.238	72.05	42.74	114.79	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5955 MHz		

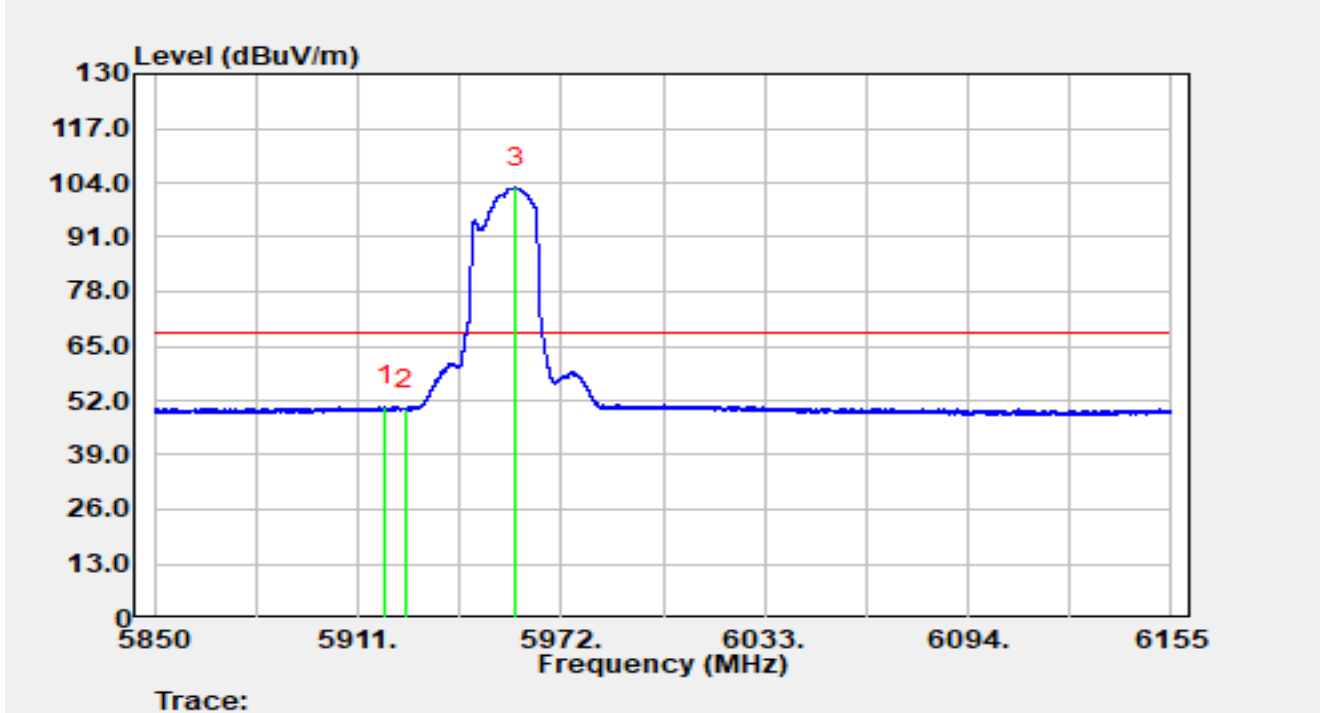


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5919.083	8.14	42.58	50.72	-17.48	68.20	Average
2		5925.000	7.36	42.64	50.00	-18.20	68.20	Average
3		5958.275	60.19	42.74	102.92	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5965 MHz		

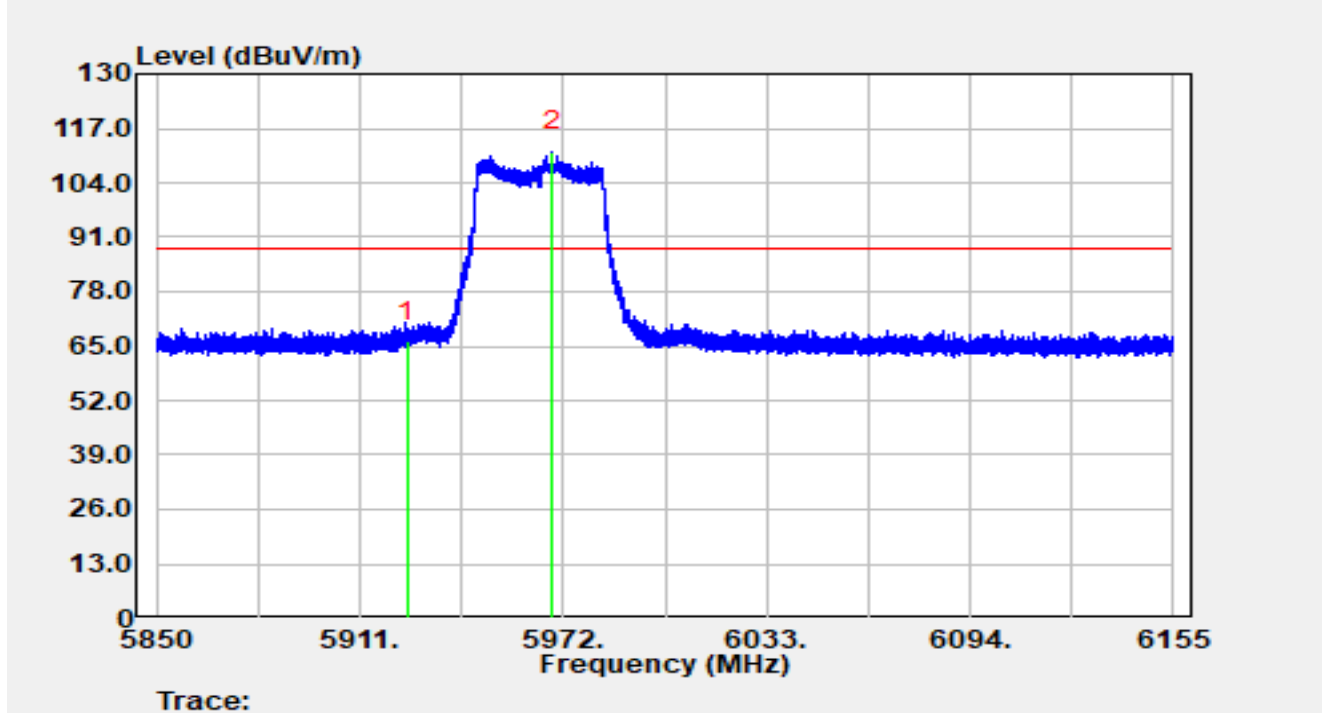


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	23.47	42.64	66.11	-22.09	88.20	Peak
2		5968.828	68.68	42.78	111.46	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5965 MHz		

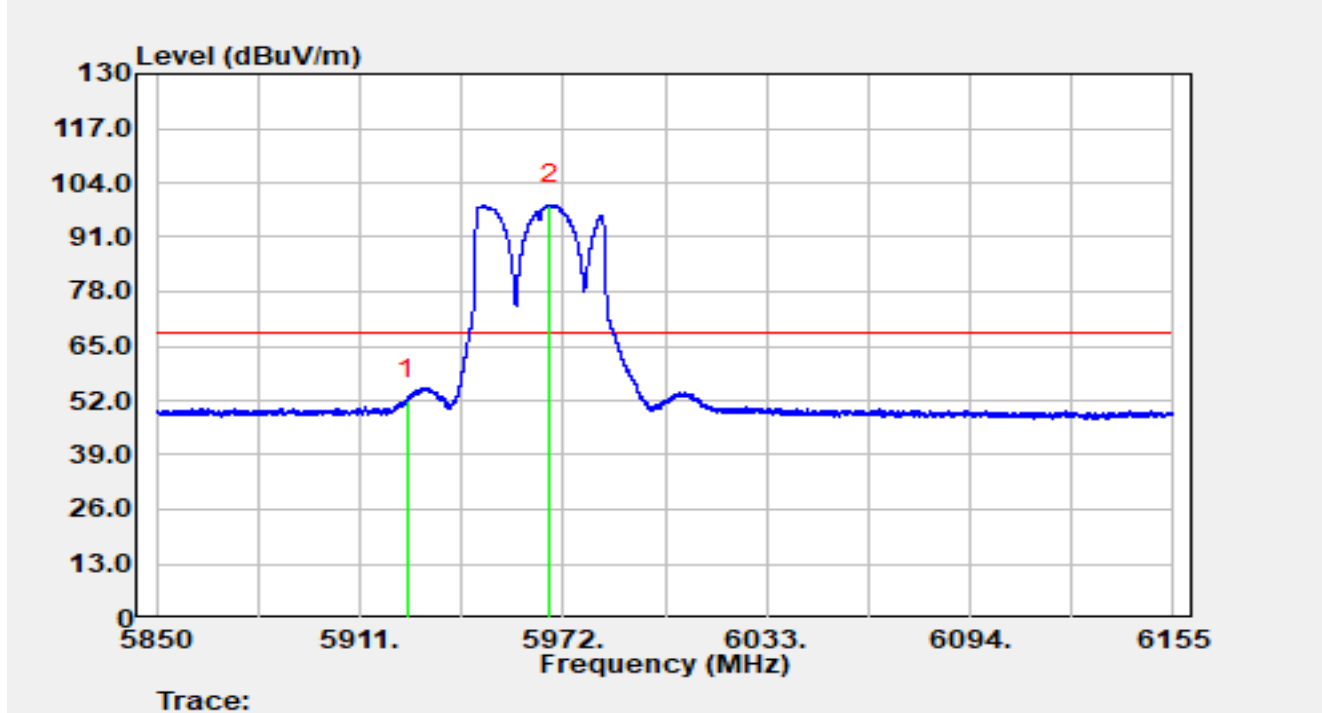


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	9.46	42.64	52.11	-16.09	68.20	Average
2		5967.913	55.90	42.77	98.67	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5965 MHz		

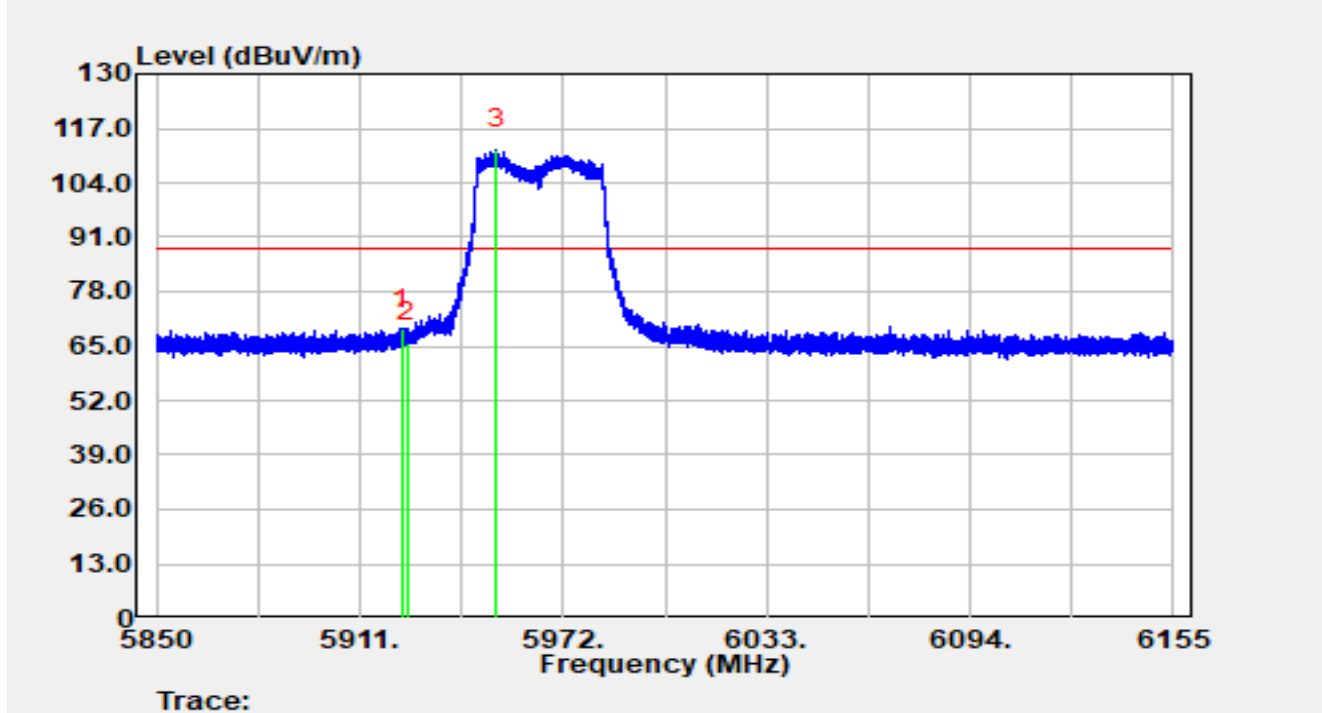


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.779	26.53	42.63	69.15	-19.05	88.20	Peak
2		5925.000	23.30	42.64	65.94	-22.26	88.20	Peak
3		5951.931	69.31	42.72	112.03	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5965 MHz		

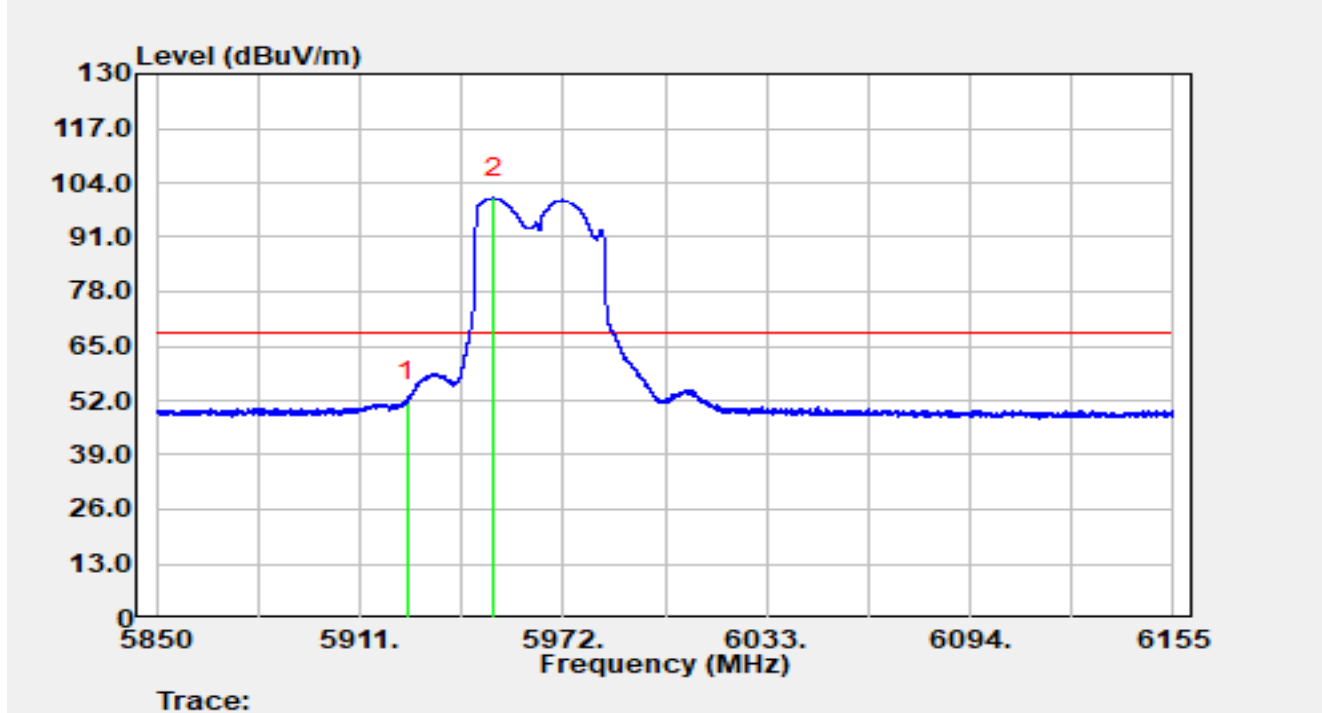


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	9.04	42.64	51.69	-16.51	68.20	Average
2		5951.321	57.63	42.72	100.35	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5985 MHz		

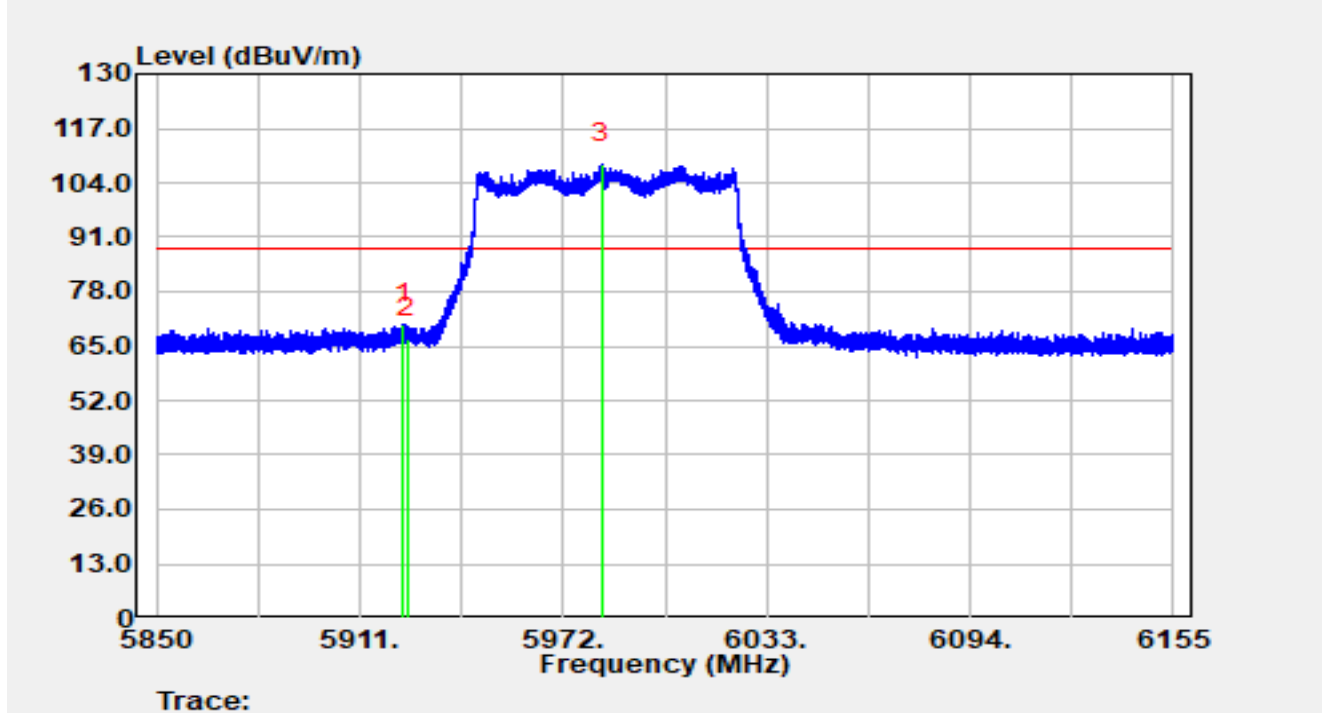


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.115	27.67	42.63	70.30	-17.90	88.20	Peak
2		5925.000	24.28	42.64	66.92	-21.28	88.20	Peak
3		5983.346	65.60	42.82	108.42	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5985 MHz		

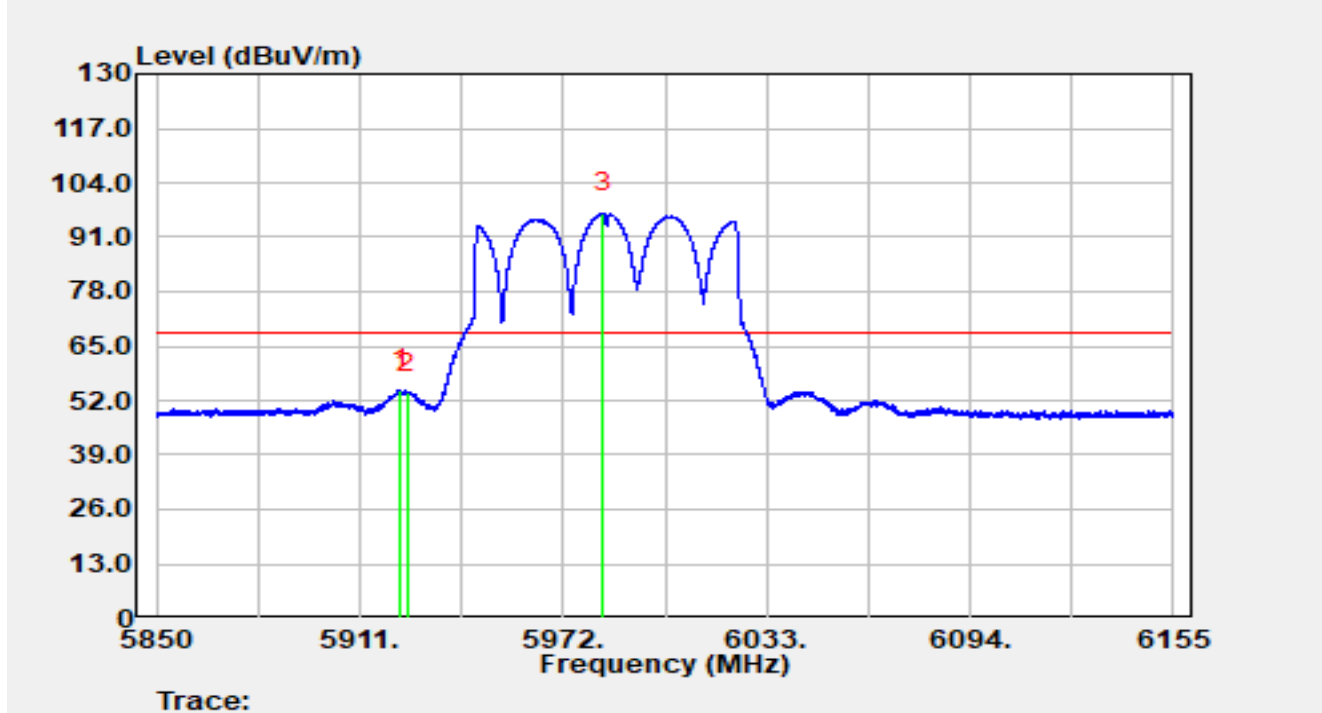


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.047	11.85	42.62	54.47	-13.73	68.20	Average
2		5925.000	11.26	42.64	53.91	-14.29	68.20	Average
3		5983.895	53.85	42.82	96.66	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5985 MHz		

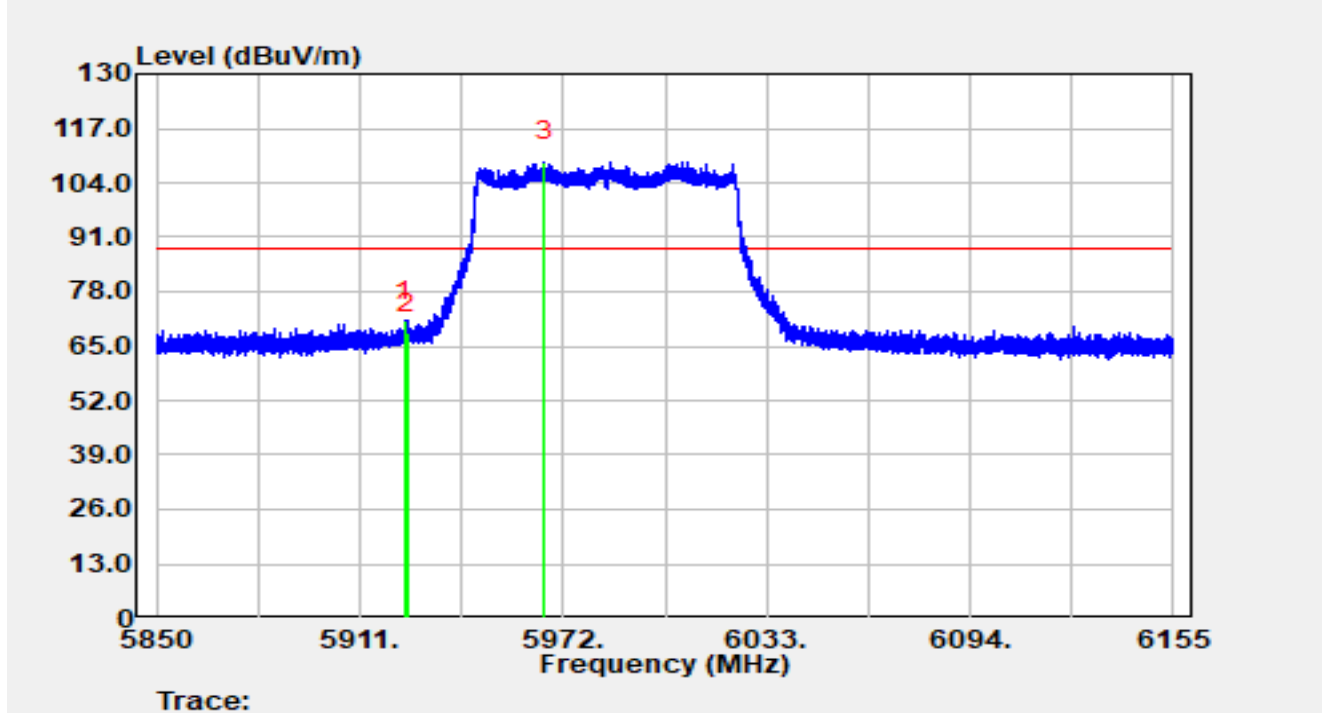


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.329	28.50	42.63	71.13	-17.07	88.20	Peak
2		5925.000	25.51	42.64	68.15	-20.05	88.20	Peak
3		5966.418	66.33	42.77	109.10	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5985 MHz		

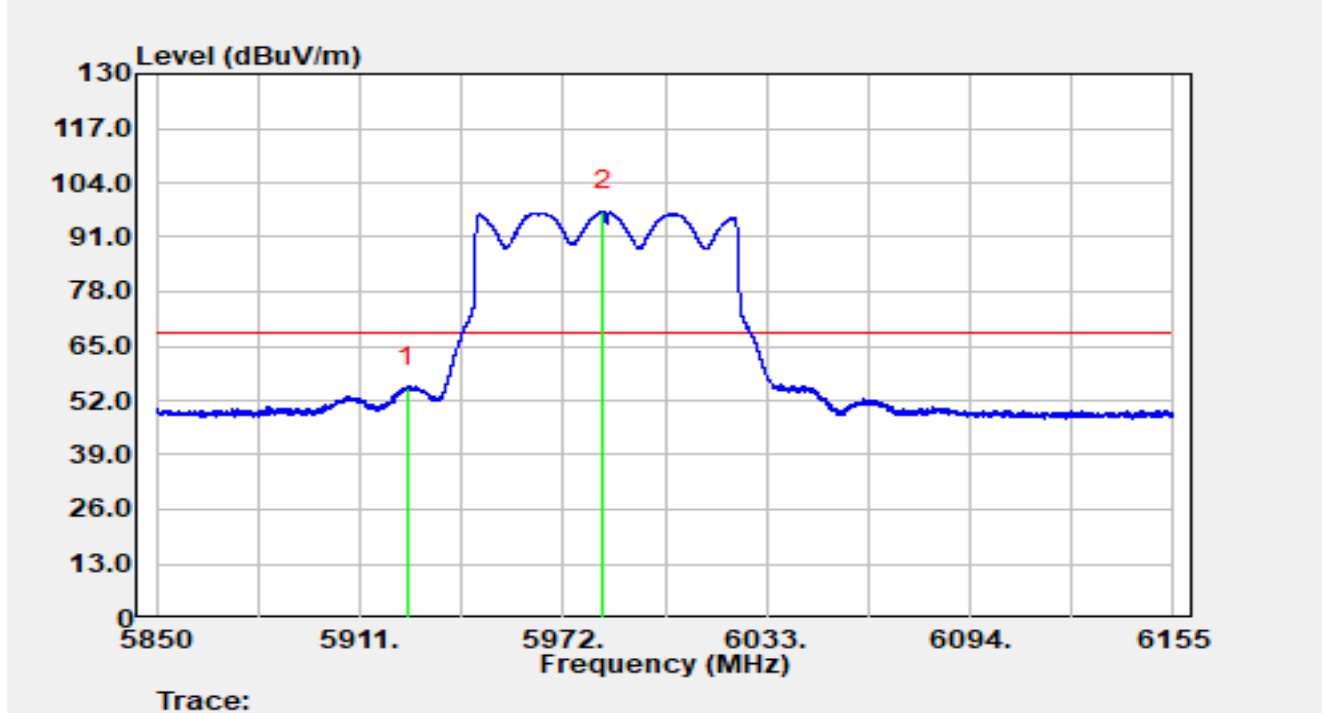


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	12.48	42.64	55.12	-13.08	68.20	Average
2		5983.773	54.38	42.82	97.19	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 6025 MHz		

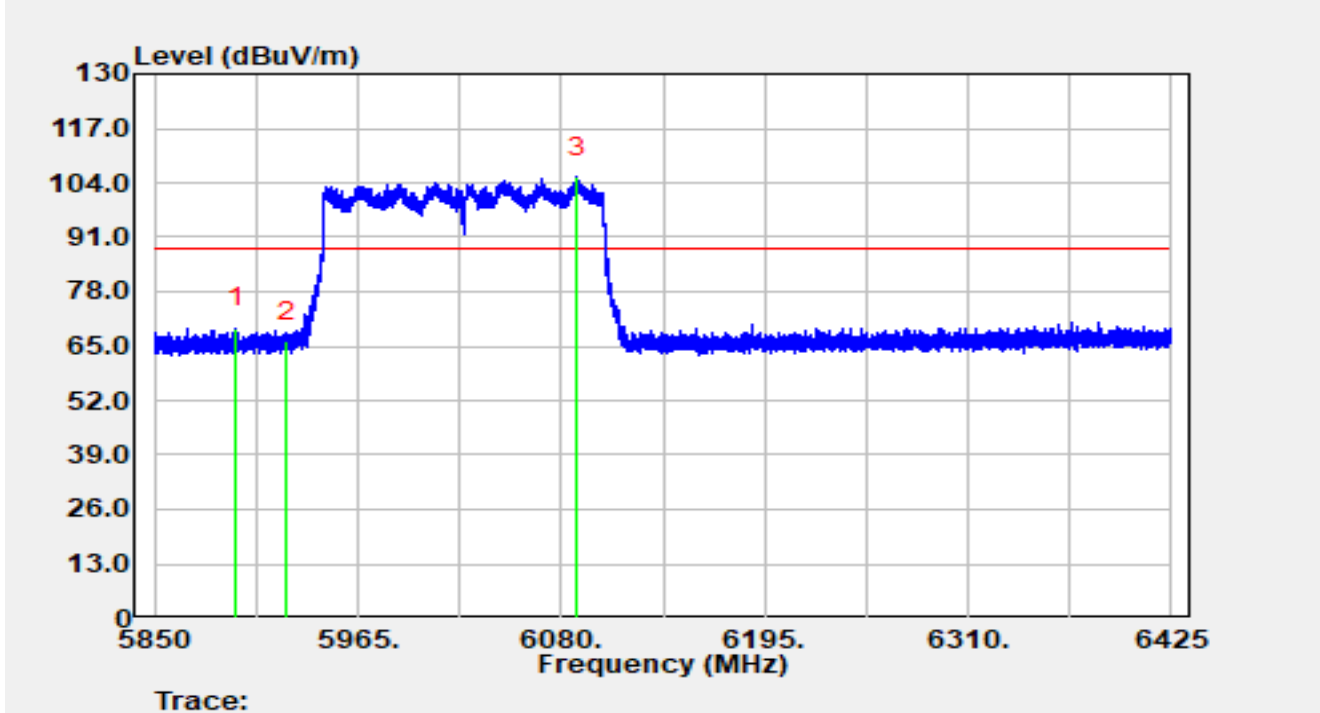


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5896.058	26.70	42.53	69.23	-18.97	88.20	Peak
2		5925.000	23.37	42.64	66.01	-22.19	88.20	Peak
3		6089.027	62.27	43.00	105.27	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 6025 MHz		

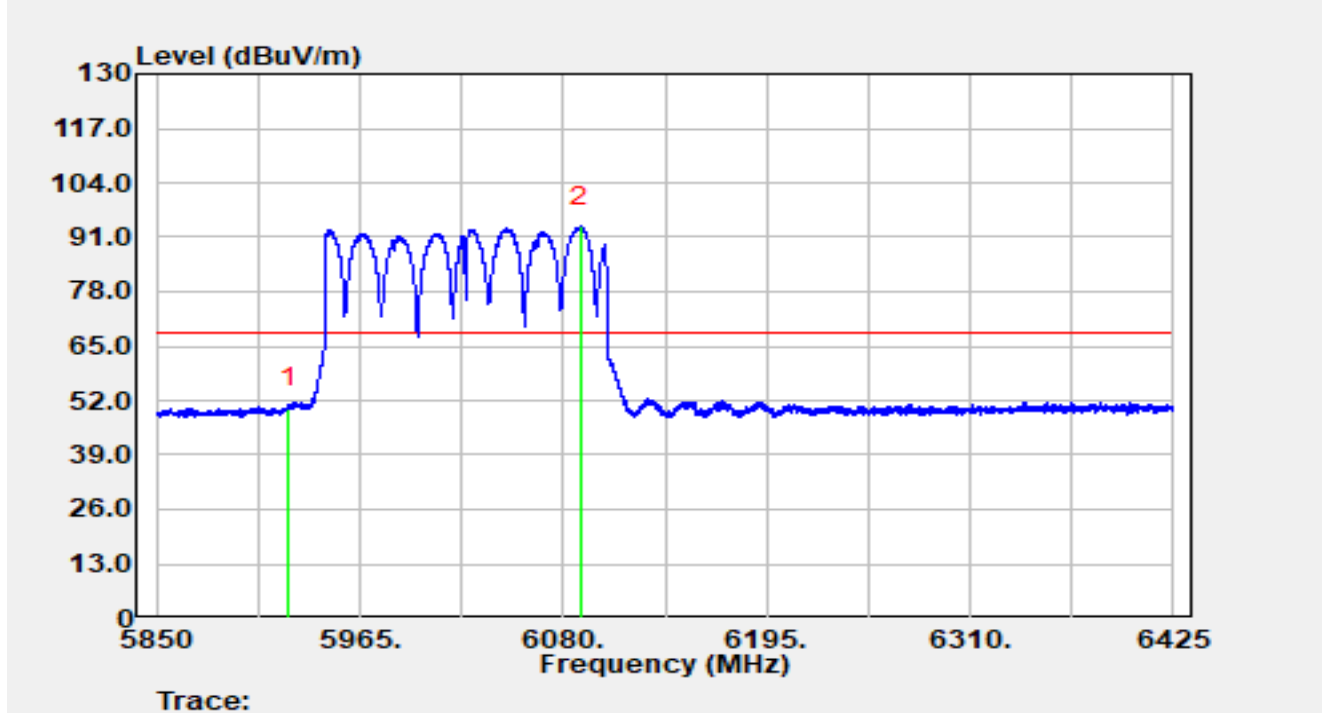


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	7.63	42.64	50.27	-17.93	68.20	Average
2		6089.487	50.51	43.00	93.51	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 6025 MHz		

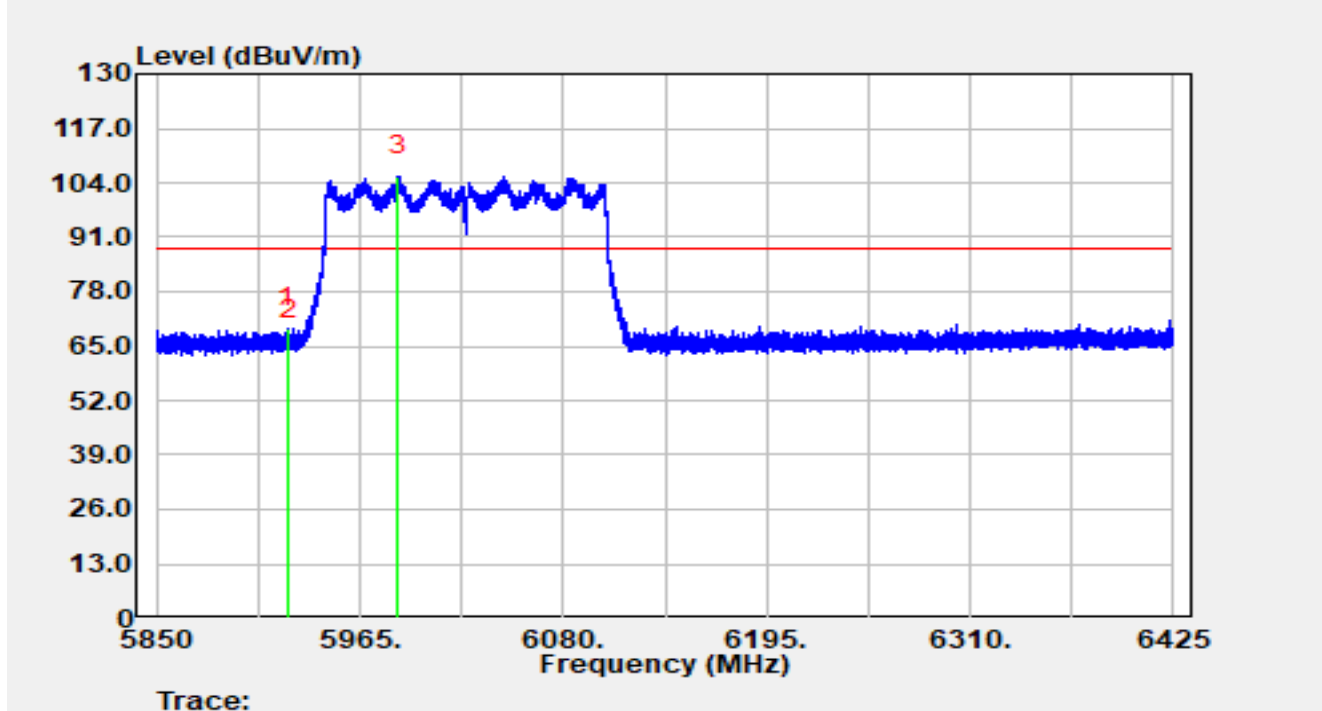


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.002	26.69	42.63	69.32	-18.88	88.20	Peak
2		5925.000	23.60	42.64	66.24	-21.96	88.20	Peak
3		5986.850	62.85	42.81	105.66	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 6025 MHz		

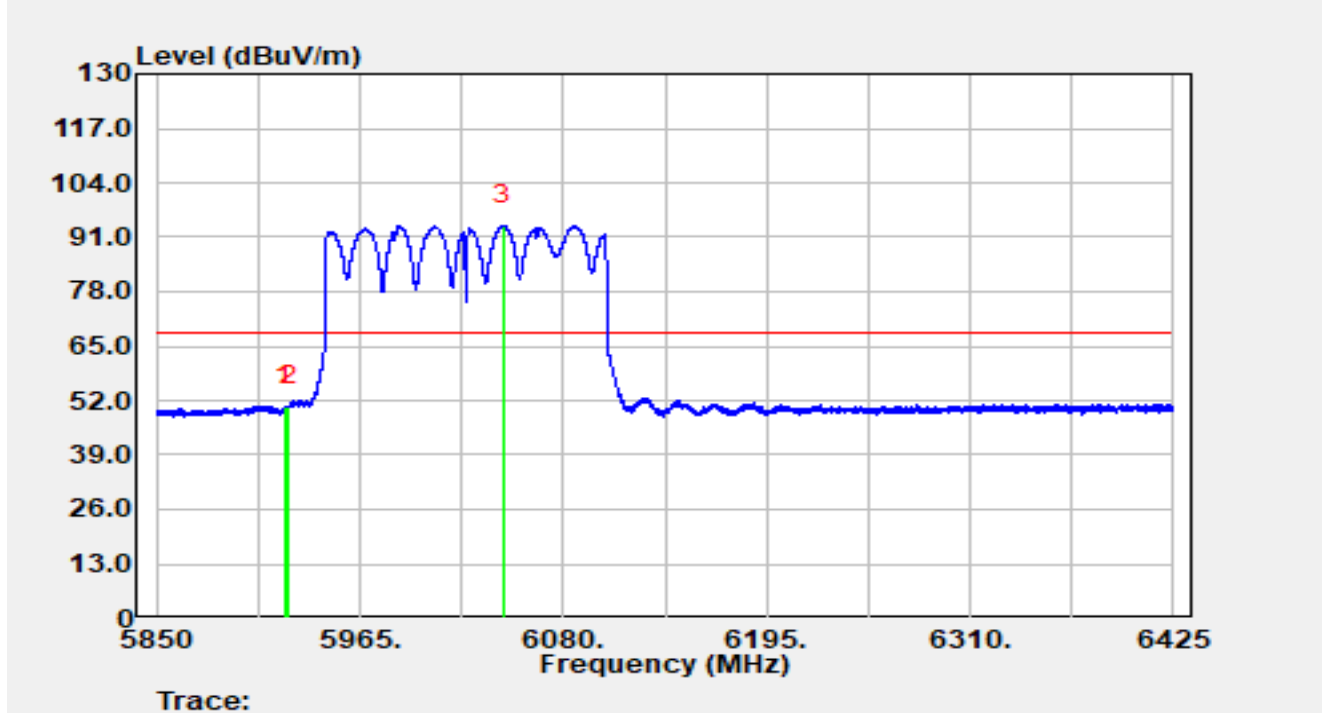


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.680	8.09	42.62	50.71	-17.49	68.20	Average
2		5925.000	8.00	42.64	50.64	-17.56	68.20	Average
3		6046.190	50.82	42.94	93.76	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

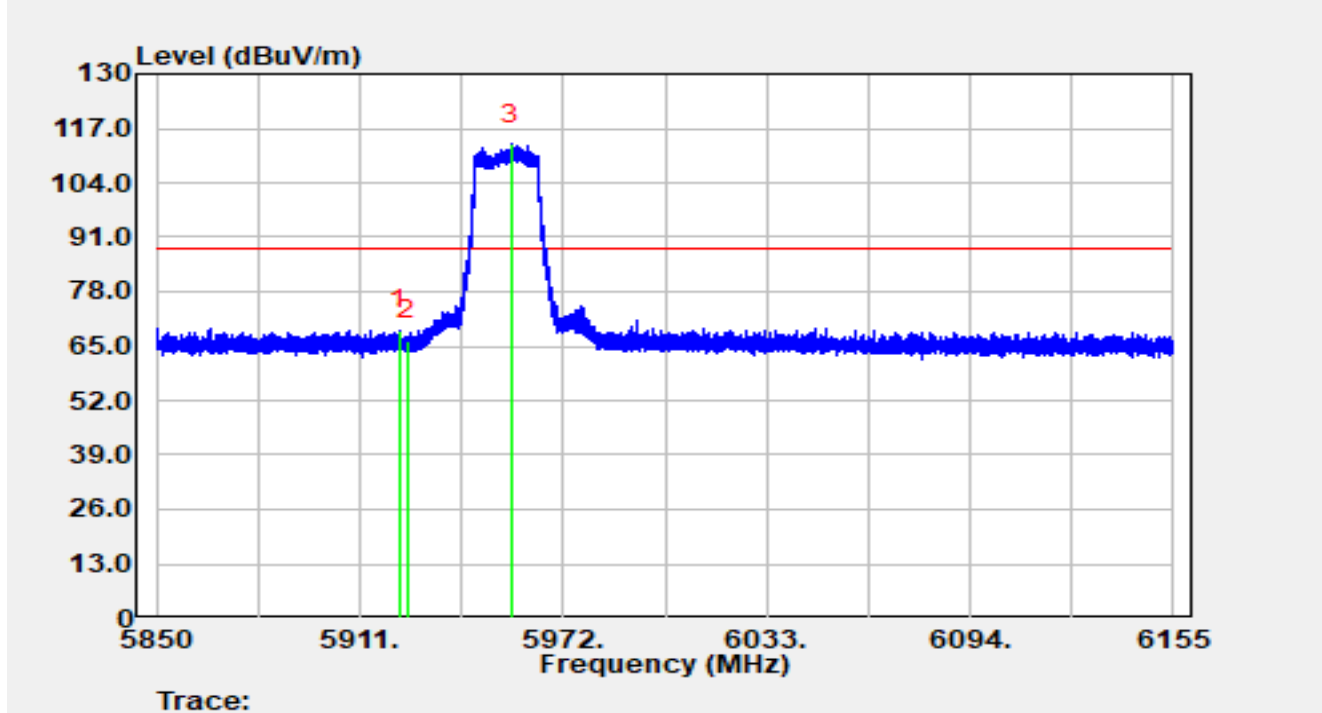


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.743	26.22	42.62	68.84	-19.36	88.20	Peak
2		5925.000	23.76	42.64	66.40	-21.80	88.20	Peak
3		5956.201	70.50	42.73	113.23	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

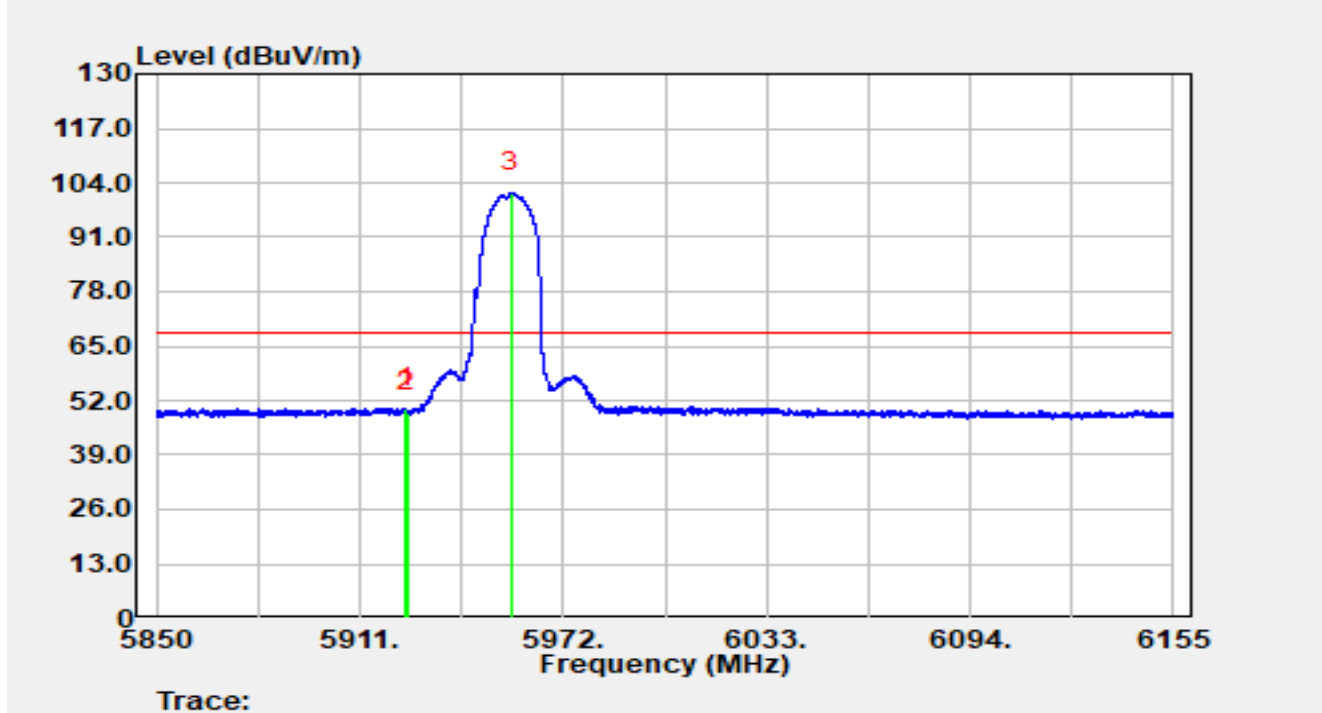


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.847	7.42	42.64	50.06	-18.14	68.20	Average
2		5925.000	6.55	42.64	49.19	-19.01	68.20	Average
3		5956.354	58.86	42.73	101.59	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

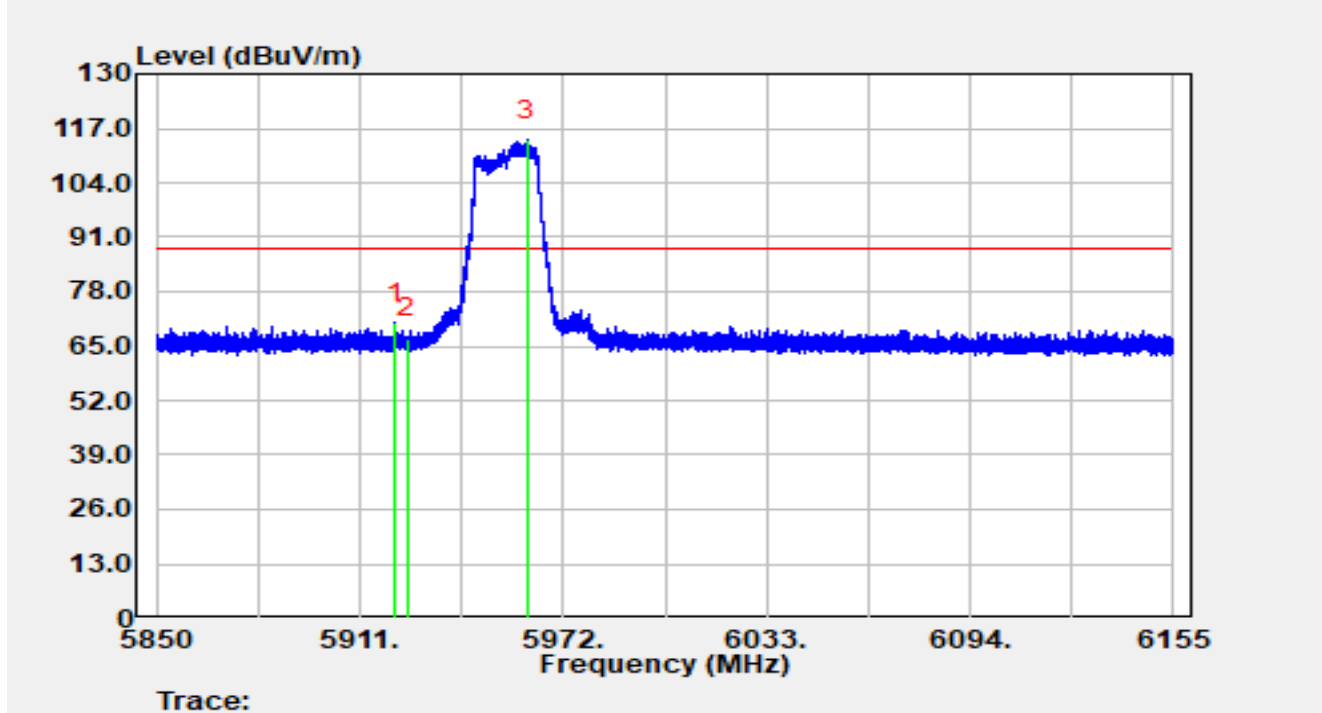


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5921.706	27.80	42.61	70.41	-17.79	88.20	Peak
2		5925.000	24.08	42.64	66.72	-21.48	88.20	Peak
3		5961.050	71.34	42.75	114.09	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5955 MHz		

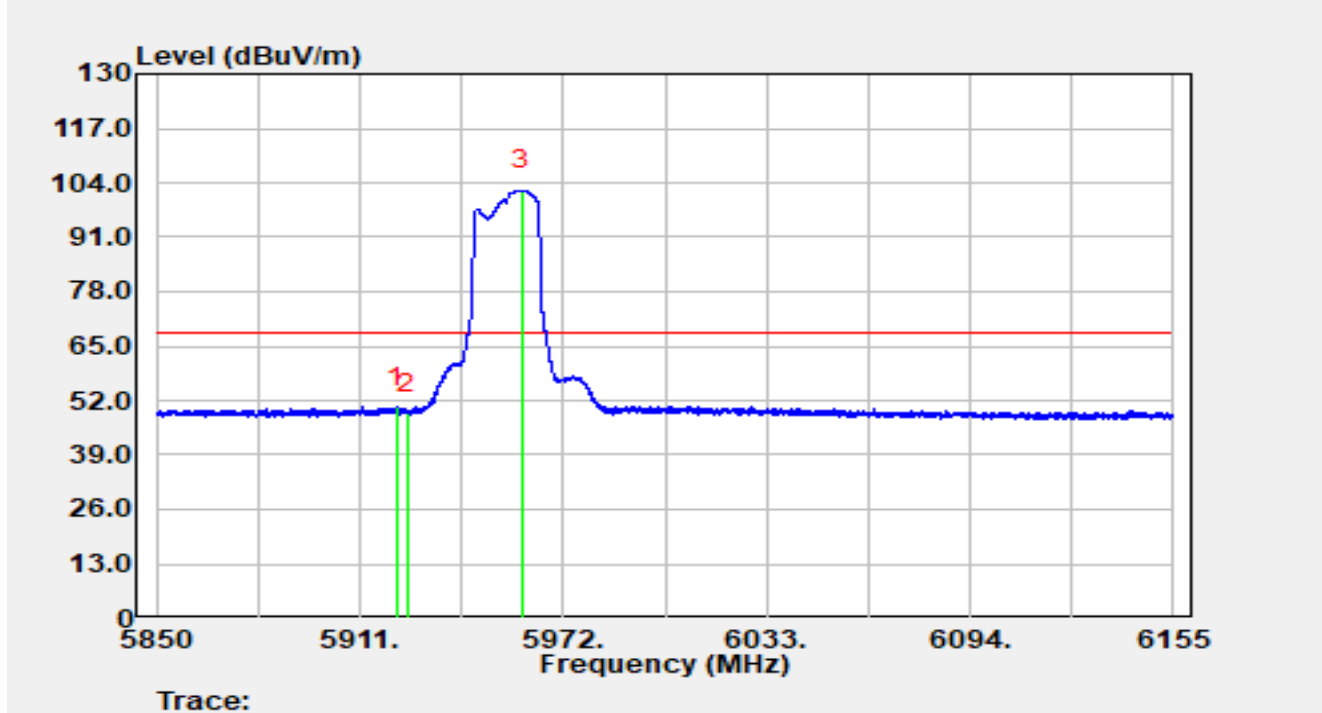


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.102	7.71	42.61	50.32	-17.88	68.20	Average
2		5925.000	6.40	42.64	49.04	-19.16	68.20	Average
3		5959.464	59.40	42.74	102.15	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

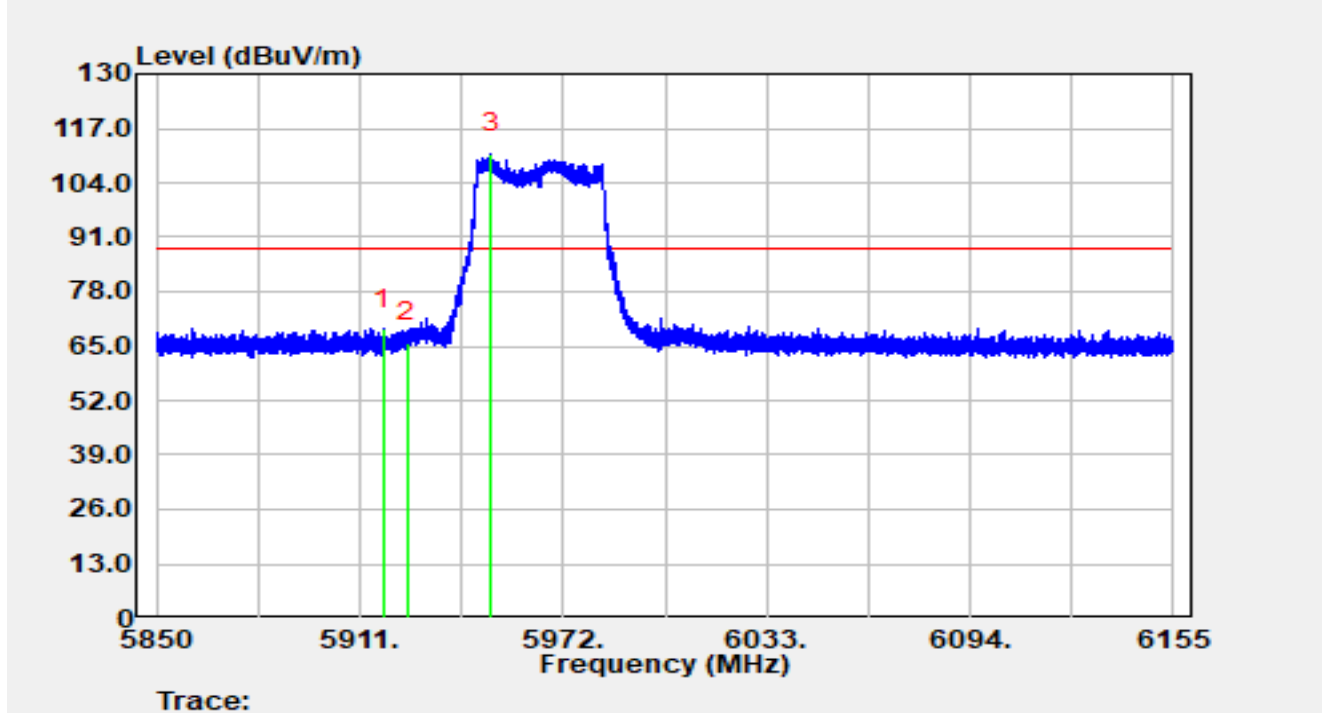


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5918.137	26.54	42.57	69.11	-19.09	88.20	Peak
2		5925.000	23.26	42.64	65.90	-22.30	88.20	Peak
3		5950.467	68.19	42.72	110.91	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

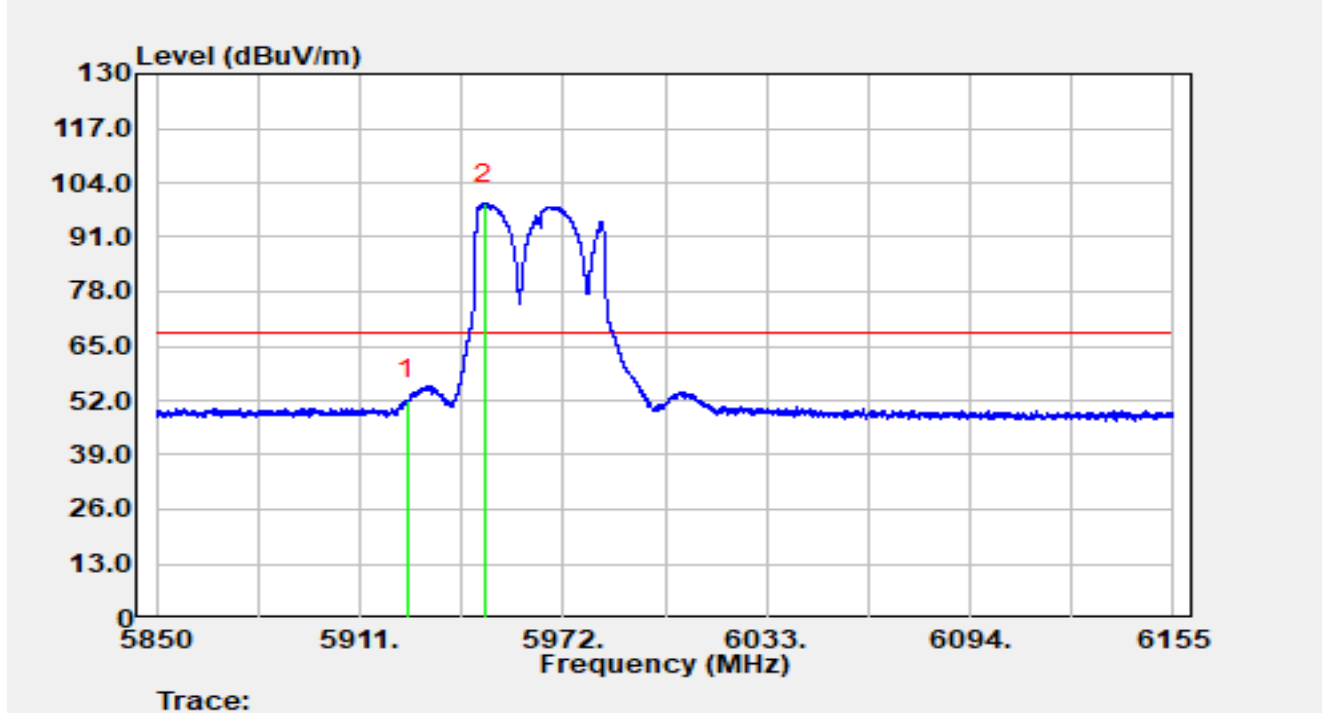


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	9.42	42.64	52.06	-16.14	68.20	Average
2		5948.362	56.29	42.70	98.99	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

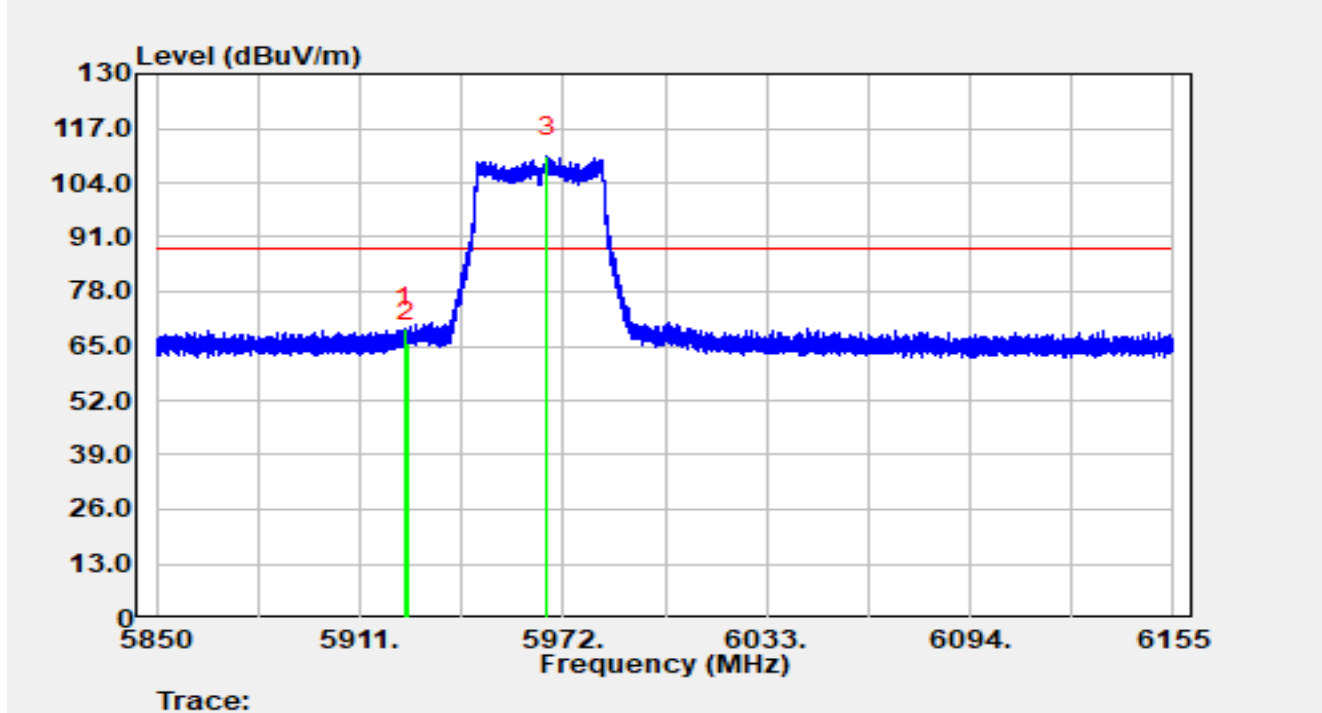


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.268	26.59	42.63	69.22	-18.98	88.20	Peak
2		5925.000	23.22	42.64	65.87	-22.33	88.20	Peak
3		5967.211	67.39	42.77	110.16	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5965 MHz		

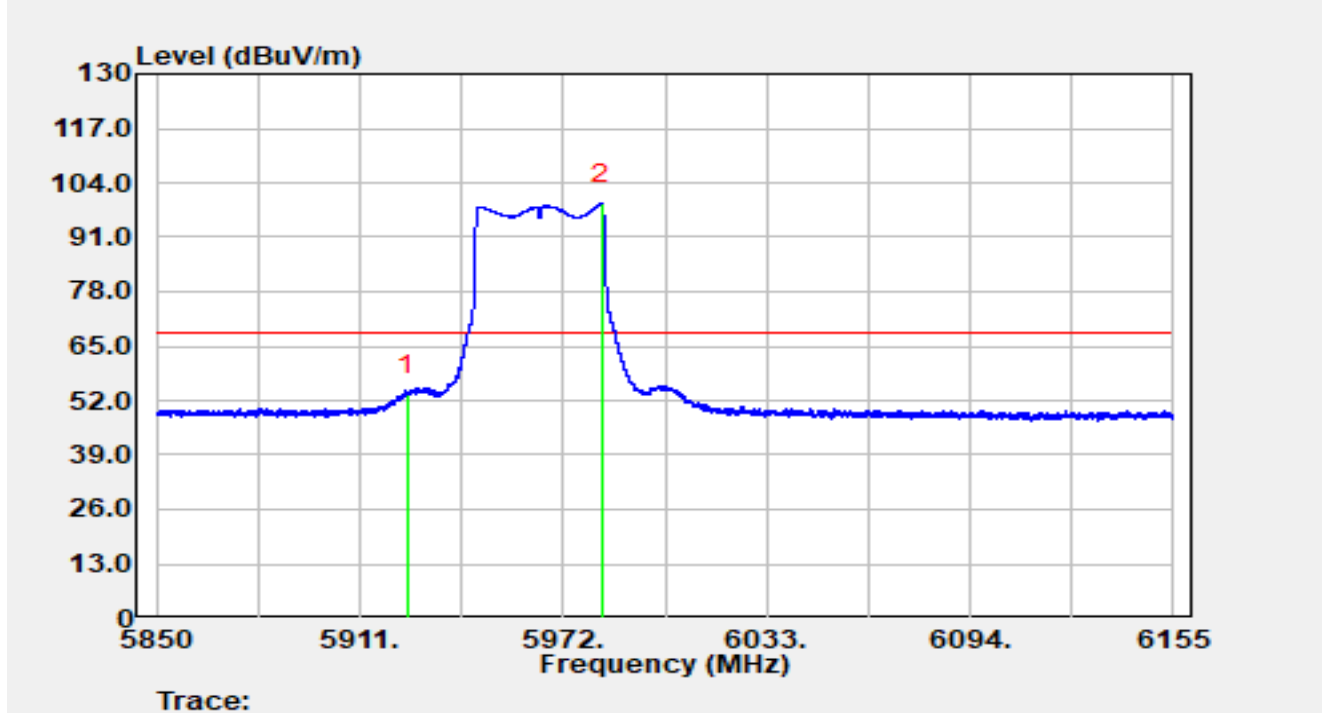


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	10.76	42.64	53.40	-14.80	68.20	Average
2		5983.346	56.06	42.82	98.87	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

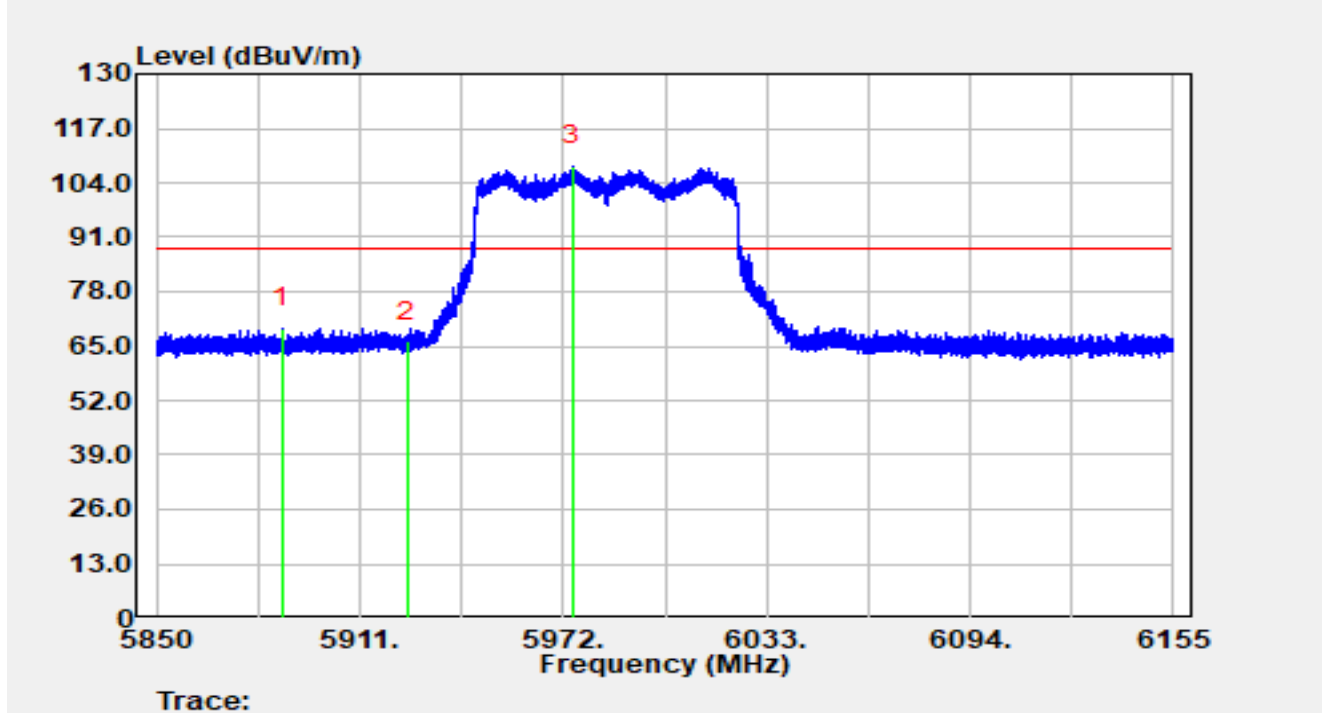


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5887.759	26.69	42.50	69.19	-19.01	88.20	Peak
2		5925.000	23.36	42.64	66.00	-22.20	88.20	Peak
3		5974.653	65.27	42.80	108.07	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

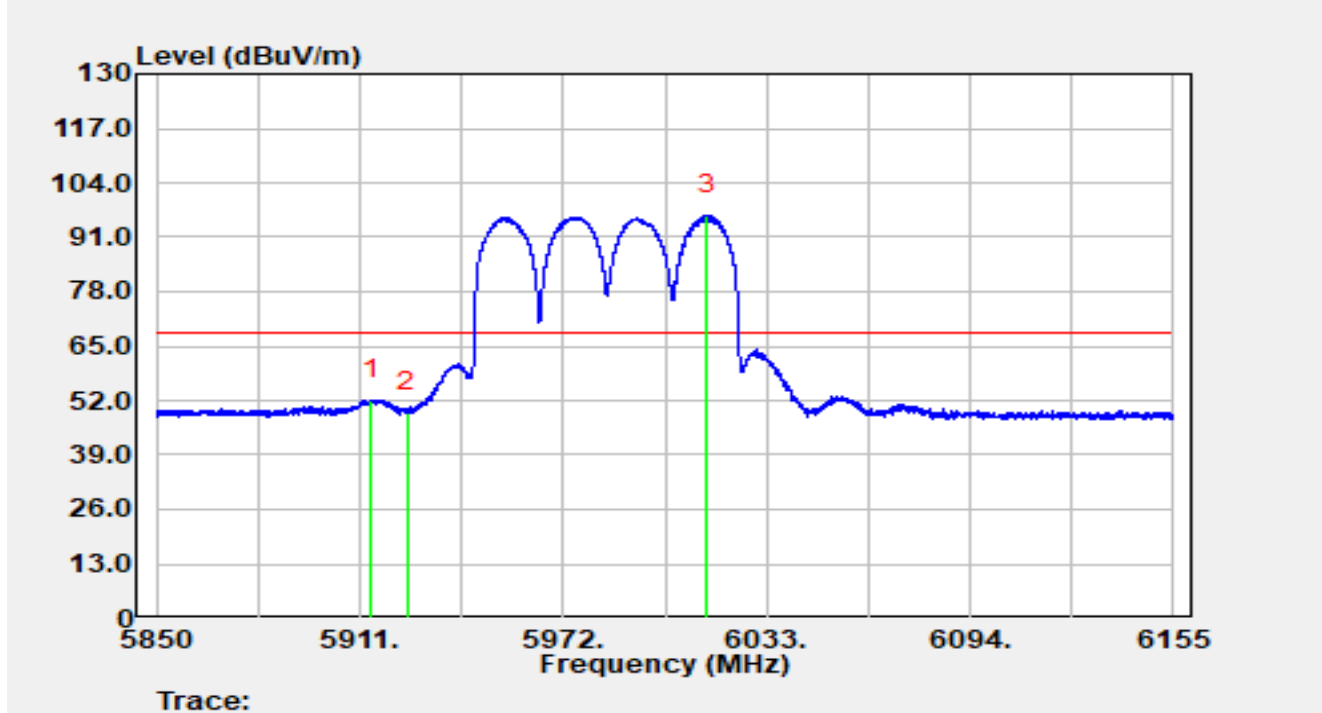


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5914.599	9.70	42.54	52.23	-15.97	68.20	Average
2		5925.000	6.63	42.64	49.27	-18.93	68.20	Average
3		6015.279	53.48	42.89	96.37	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

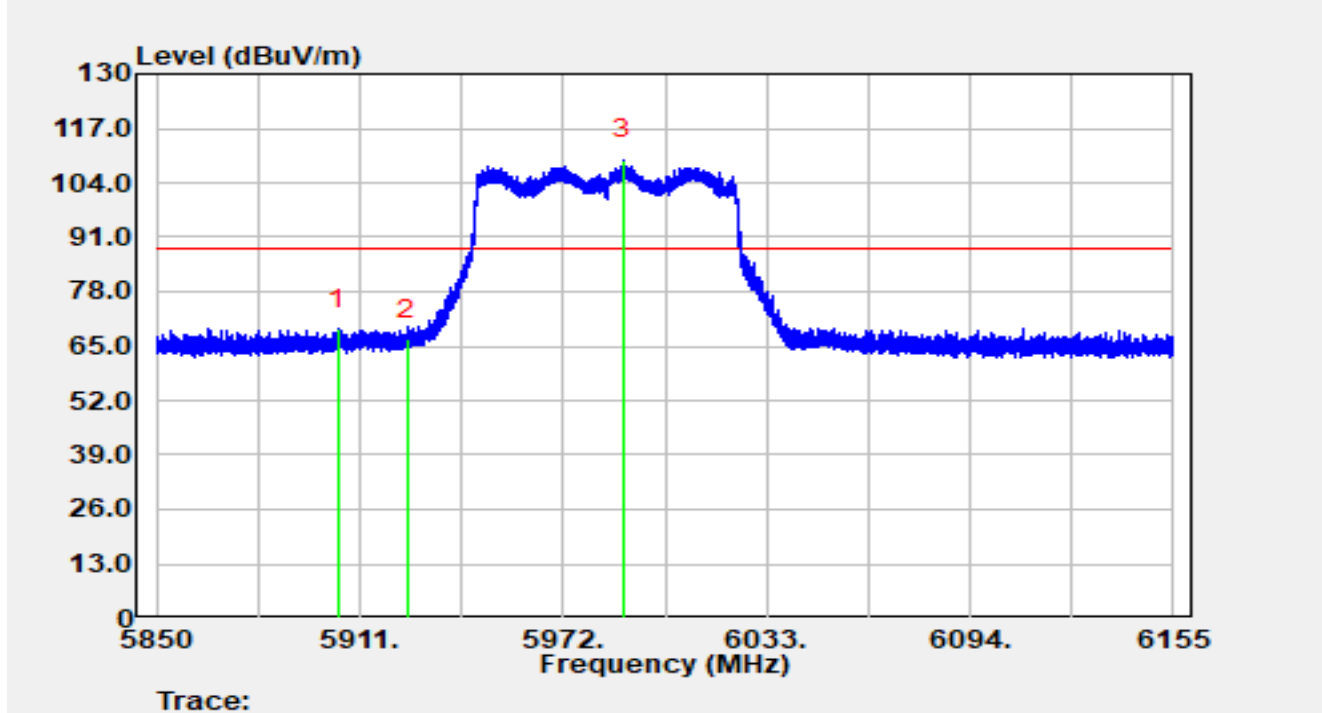


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5904.412	26.49	42.52	69.01	-19.19	88.20	Peak
2		5925.000	24.00	42.64	66.64	-21.56	88.20	Peak
3		5990.056	66.68	42.80	109.48	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5985 MHz		

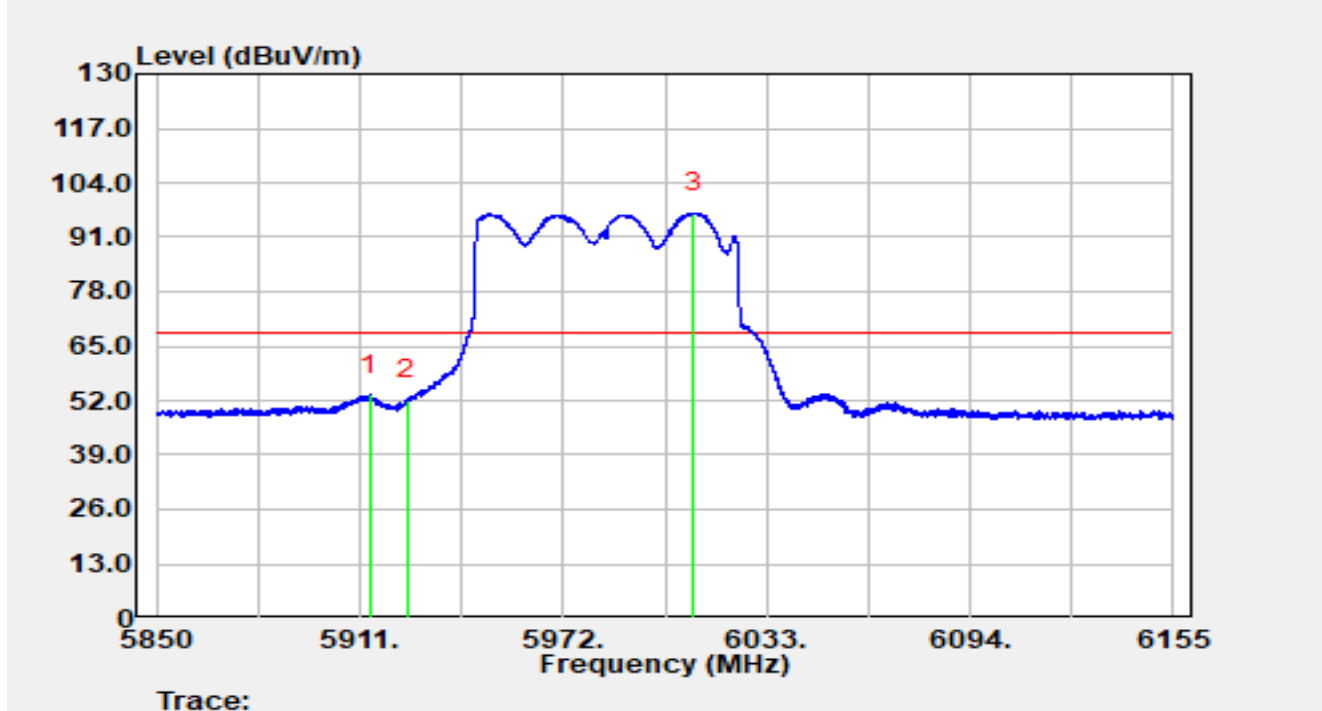


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5913.867	10.74	42.53	53.27	-14.93	68.20	Average
2		5925.000	9.42	42.64	52.06	-16.14	68.20	Average
3		6011.192	53.81	42.86	96.67	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025 MHz		

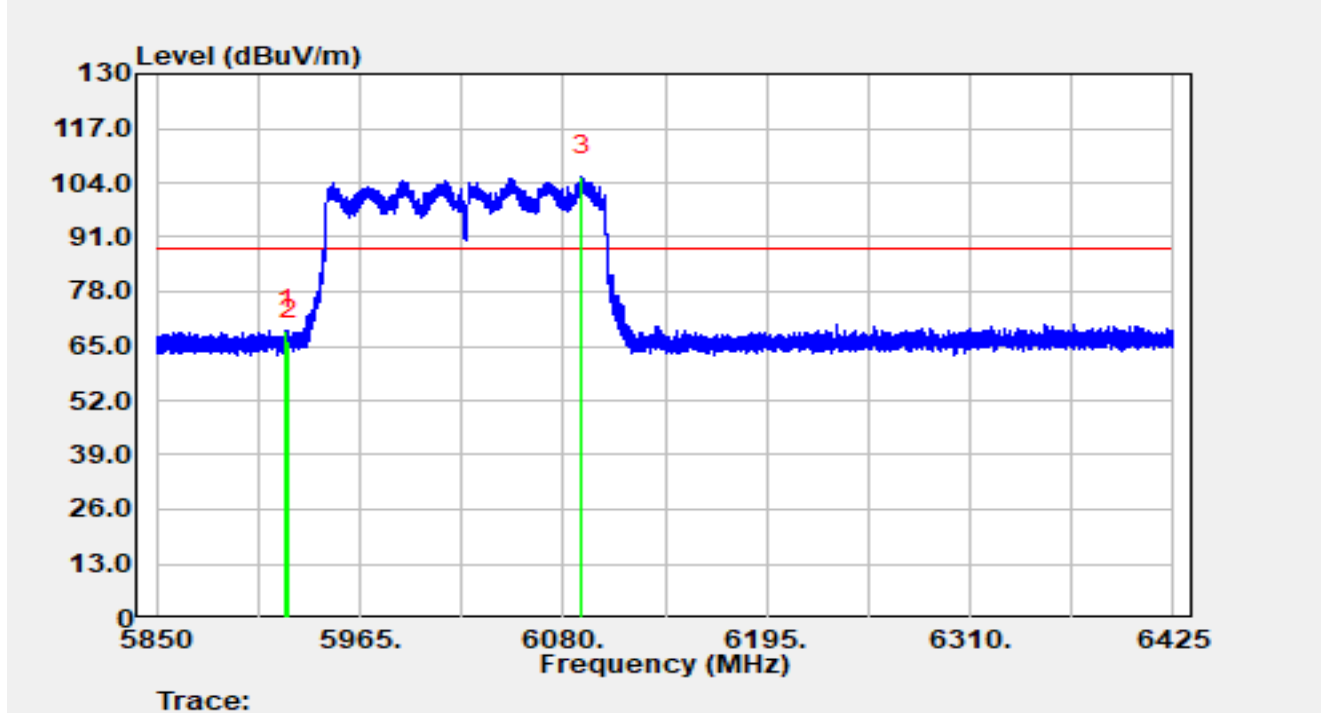


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.428	26.12	42.63	68.75	-19.45	88.20	Peak
2		5925.000	23.63	42.64	66.27	-21.93	88.20	Peak
3		6090.580	62.53	43.00	105.53	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025 MHz		

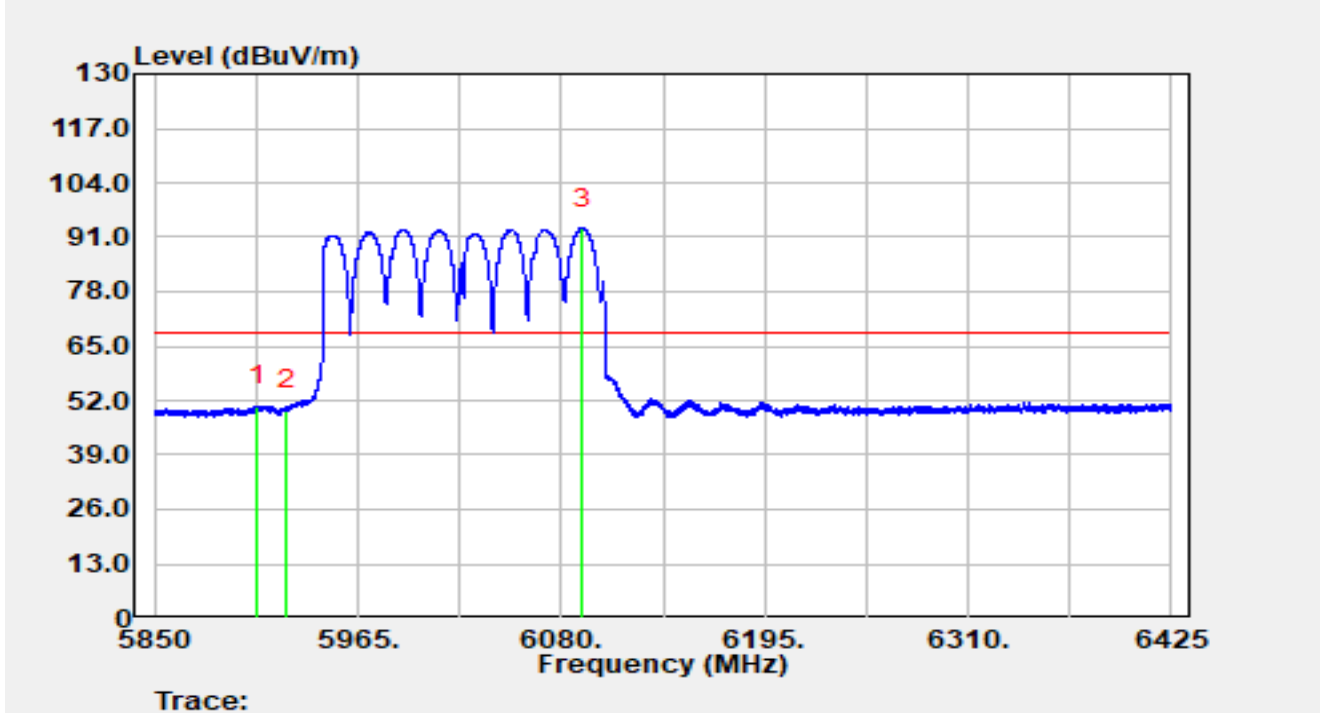


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5908.075	8.15	42.52	50.67	-17.53	68.20	Average
2		5925.000	7.13	42.64	49.77	-18.43	68.20	Average
3		6091.902	50.19	43.00	93.19	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025 MHz		

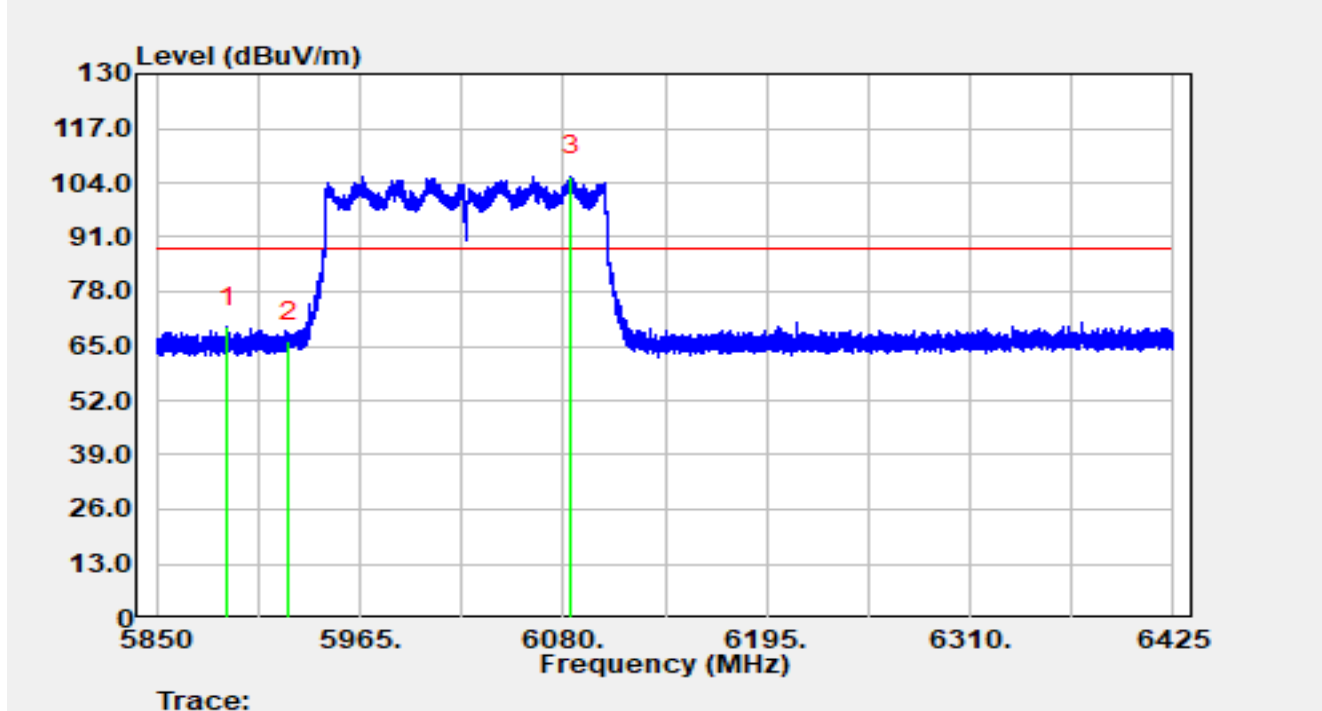


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5890.422	26.93	42.51	69.44	-18.76	88.20	Peak
2		5925.000	23.42	42.64	66.06	-22.14	88.20	Peak
3		6084.715	62.68	42.99	105.67	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT160 at 6025 MHz		

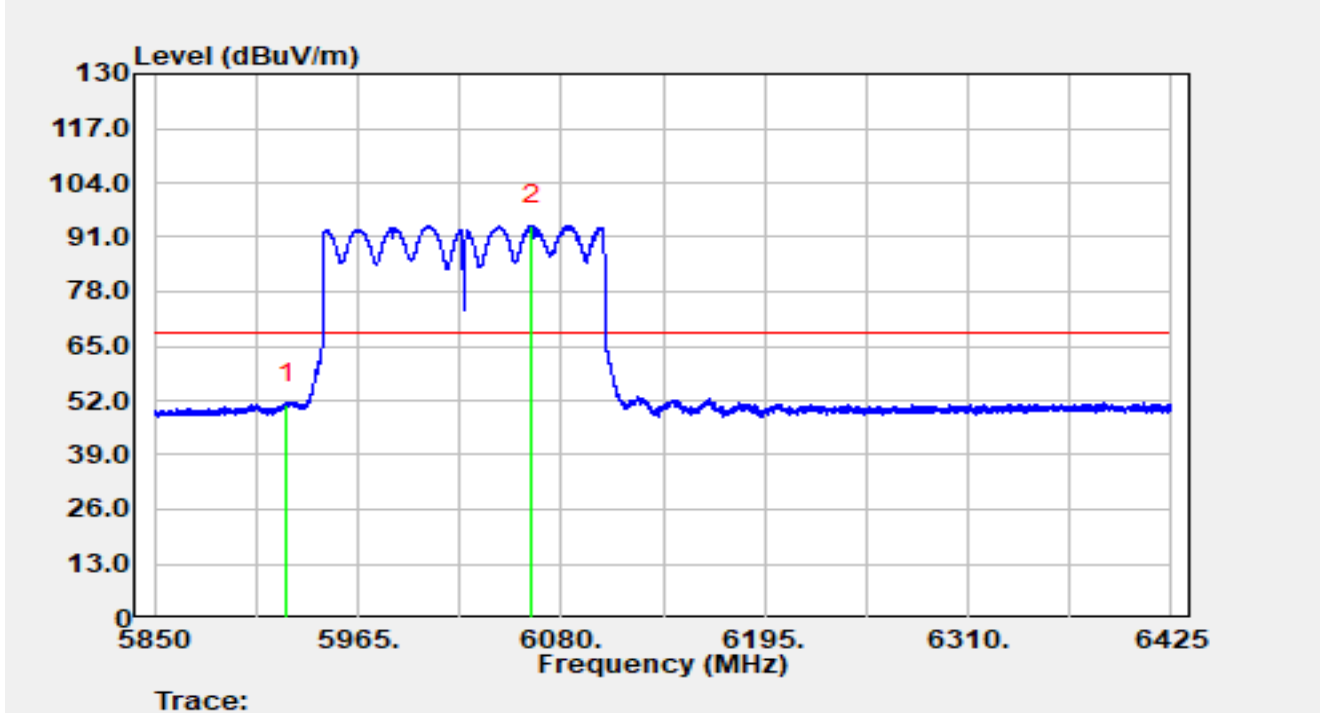


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	8.53	42.64	51.17	-17.03	68.20	Average
2		6063.382	50.83	42.99	93.82	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT320-1 at 6105 MHz		

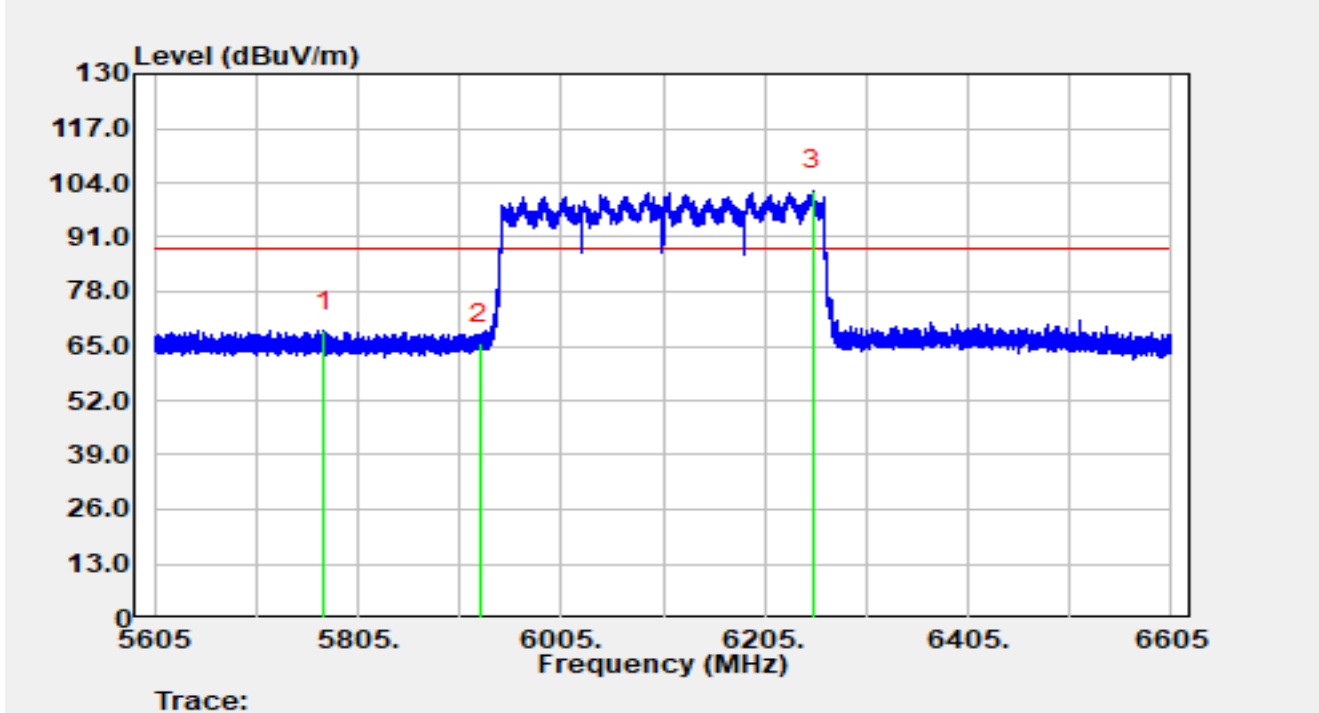


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5771.800	26.34	42.30	68.64	-19.56	88.20	Peak
2		5925.000	22.87	42.64	65.52	-22.68	88.20	Peak
3		6252.800	59.08	43.00	102.08	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT320-1 at 6105 MHz		

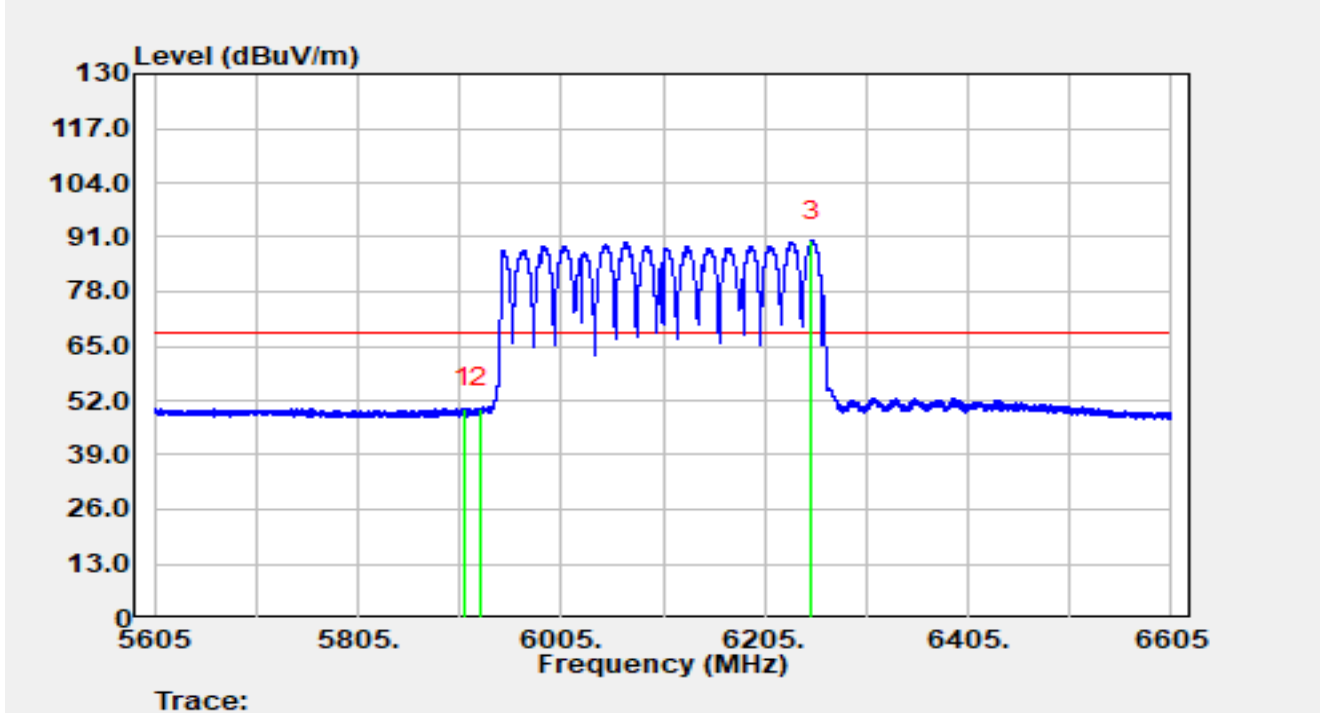


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5909.200	7.72	42.52	50.24	-17.96	68.20	Average
2		5925.000	7.45	42.64	50.09	-18.11	68.20	Average
3		6251.700	47.21	43.01	90.21	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT320-1 at 6105 MHz		

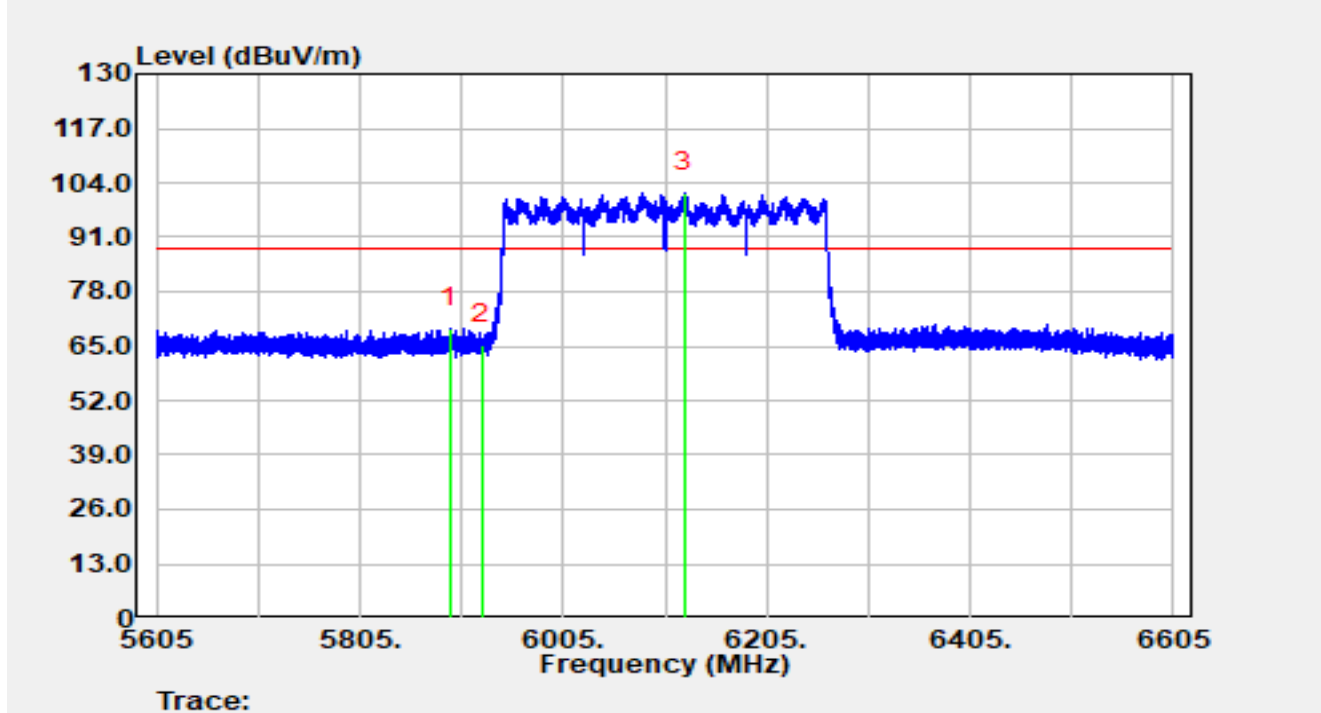


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5893.800	26.79	42.53	69.31	-18.89	88.20	Peak
2		5925.000	22.73	42.64	65.37	-22.83	88.20	Peak
3		6124.300	58.64	42.98	101.62	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT320-1 at 6105 MHz		

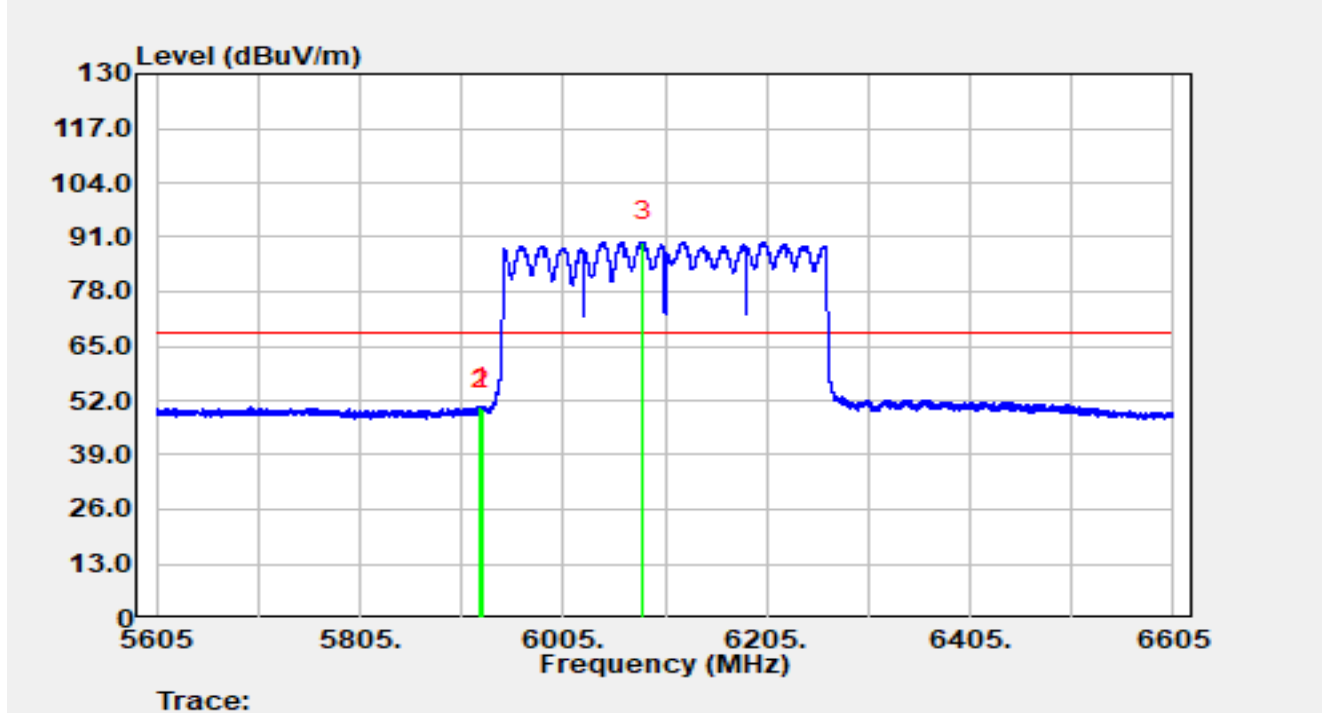


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.100	7.80	42.63	50.43	-17.77	68.20	Average
2		5925.000	7.23	42.64	49.87	-18.33	68.20	Average
3		6082.900	47.00	42.99	90.00	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT320-2 at 6265 MHz		

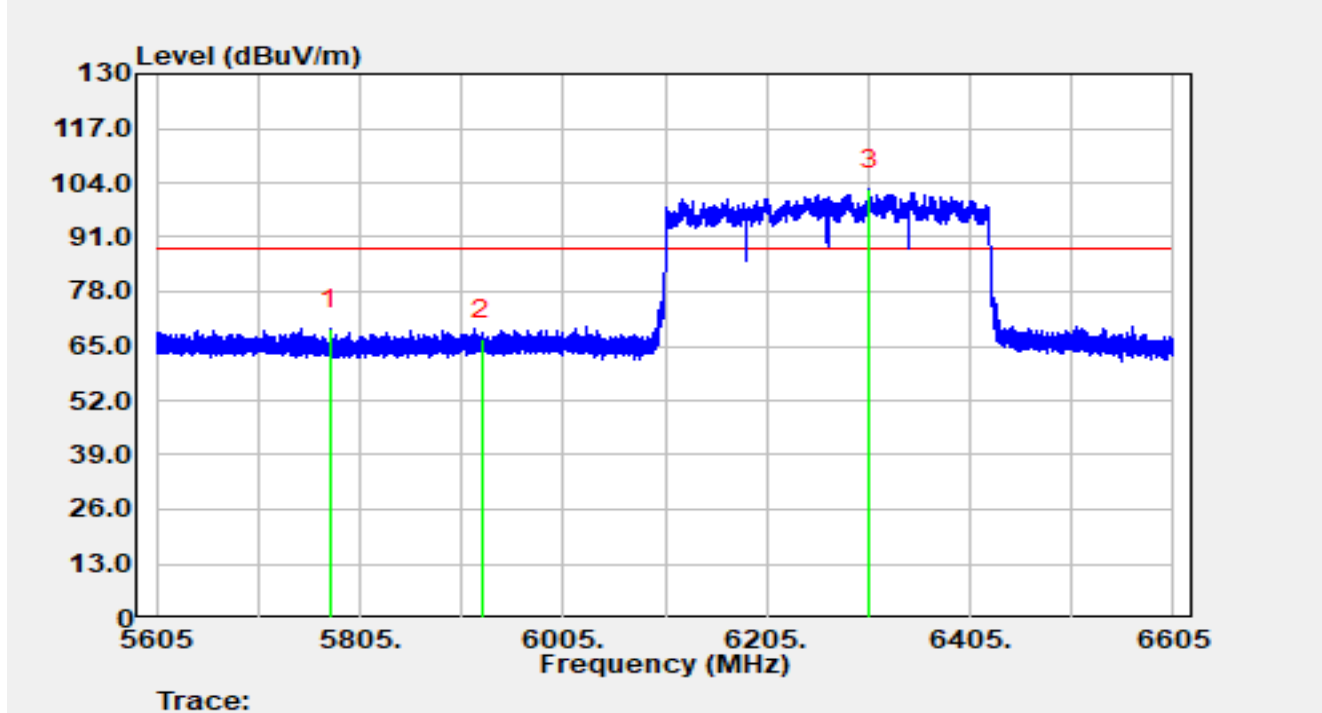


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5775.300	26.73	42.27	69.00	-19.20	88.20	Peak
2		5925.000	23.87	42.64	66.51	-21.69	88.20	Peak
3		6306.300	59.47	43.01	102.48	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT320-2 at 6265 MHz		

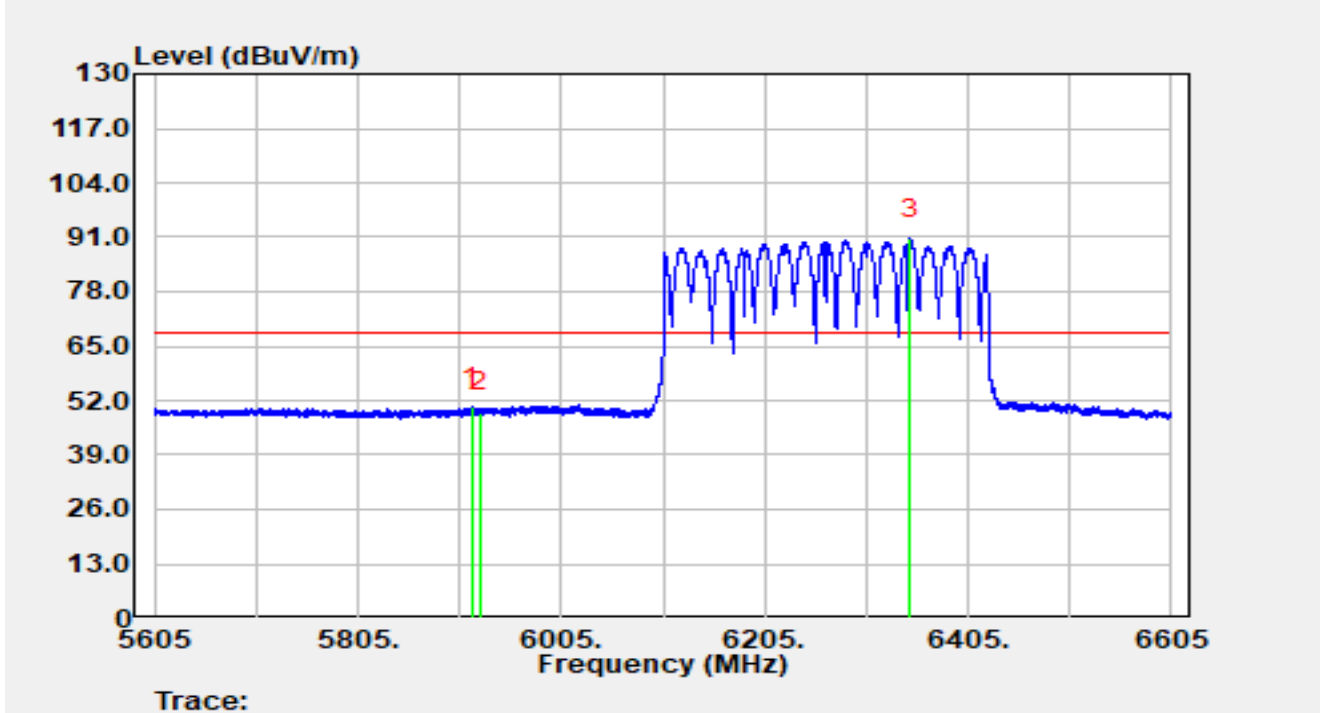


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5917.600	7.88	42.57	50.45	-17.75	68.20	Average
2		5925.000	6.58	42.64	49.22	-18.98	68.20	Average
3		6347.700	47.44	43.10	90.54	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT320-2 at 6265 MHz		

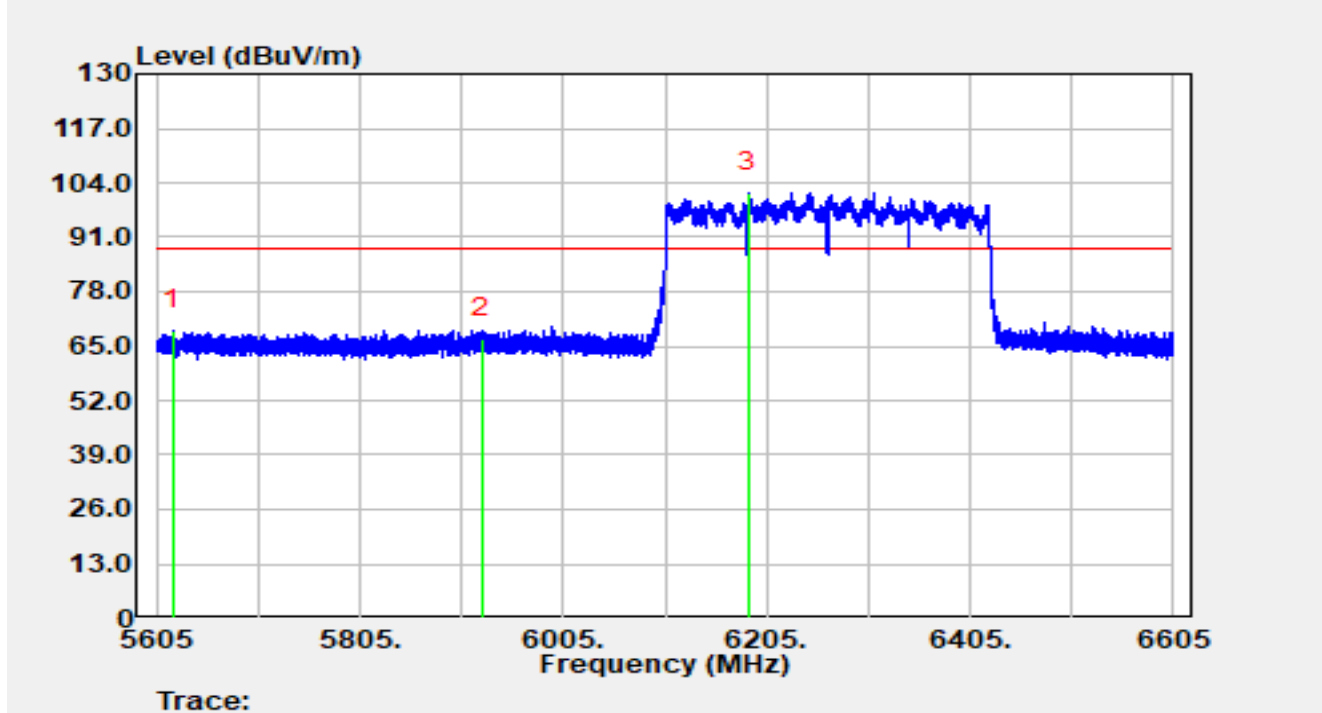


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5620.600	26.46	42.34	68.80	-19.40	88.20	Peak
2		5925.000	24.28	42.64	66.93	-21.27	88.20	Peak
3		6187.000	58.70	43.03	101.74	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-08-11
Temperature	24.9 °C	Humidity	64.9 %
Limit	FCC_Part15_Band Edge (3 m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	HAN Access Point (AP571e)	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT320-2 at 6265 MHz		

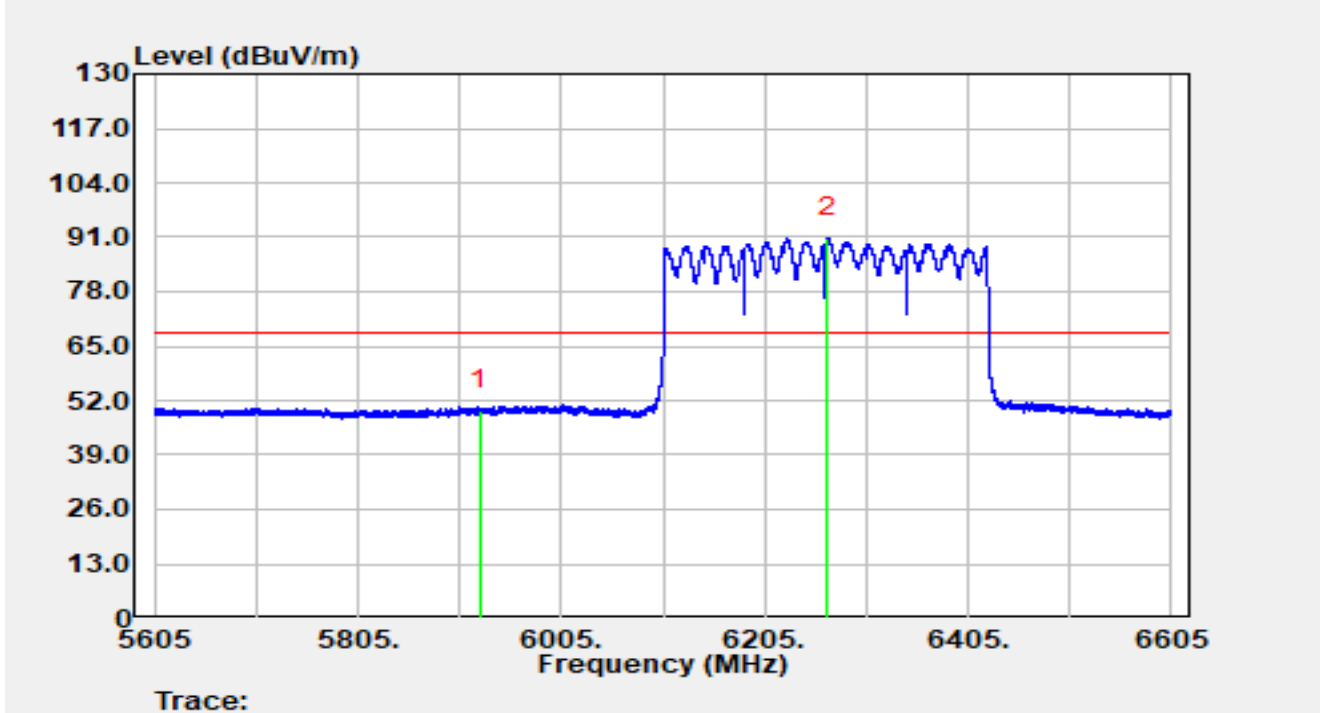


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	6.98	42.64	49.63	-18.57	68.20	Average
2		6267.100	47.86	43.00	90.85	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.9 AC Conducted Emissions Test Result

Site	SIP-SR2	Test Date	2025-08-20
Temperature	24.9 °C	Humidity	63.6%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Poli Cai
Factor	ENV216_101684_C	Polarity	Line
Test Mode	Transmit by 802.11ax-HE20 at 5955 MHz	Test Voltage	AC 120 V/60 Hz

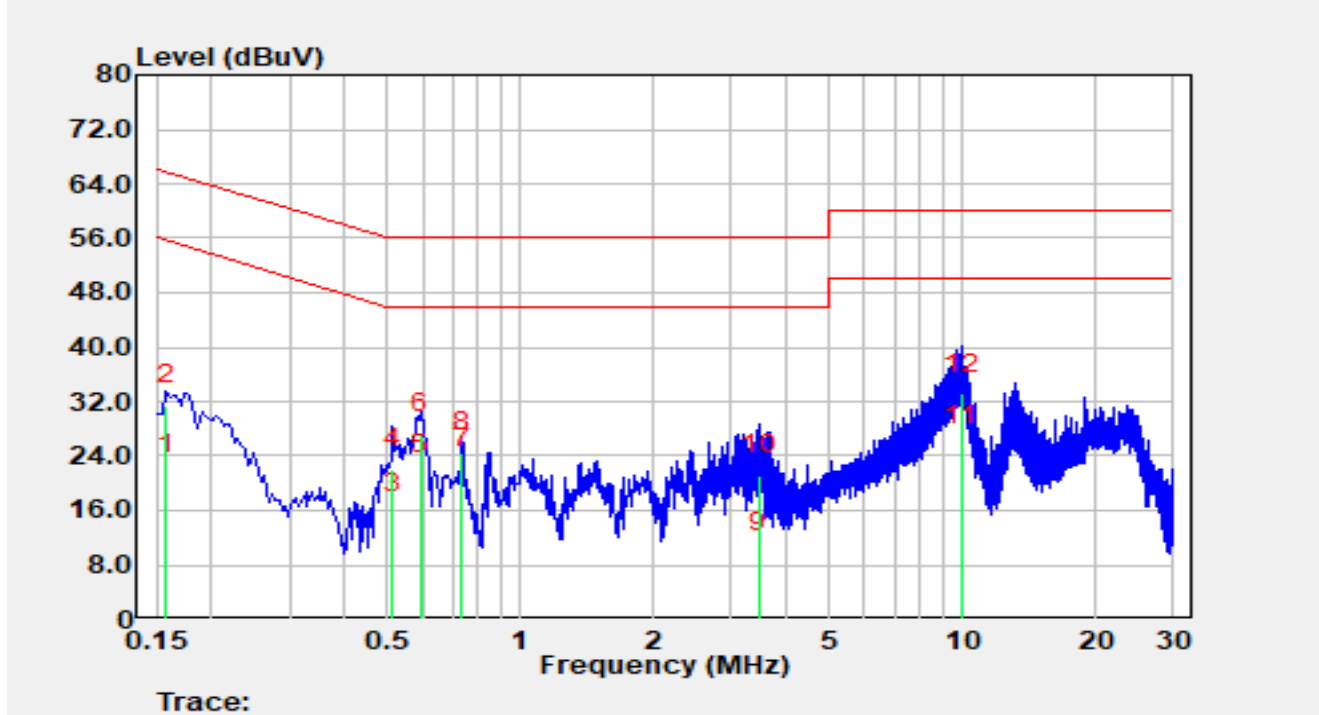


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.158	11.67	9.63	21.30	-34.27	55.57	Average
2		0.158	21.83	9.63	31.46	-34.10	65.57	QP
3		0.514	5.82	9.74	15.56	-30.44	46.00	Average
4		0.514	12.42	9.74	22.16	-33.84	56.00	QP
5		0.594	11.45	9.74	21.19	-24.81	46.00	Average
6		0.594	17.47	9.74	27.21	-28.79	56.00	QP
7	*	0.738	12.46	9.74	22.21	-23.79	46.00	Average
8		0.738	14.84	9.74	24.58	-31.42	56.00	QP
9		3.470	0.08	9.86	9.95	-36.05	46.00	Average
10		3.470	11.29	9.86	21.15	-34.85	56.00	QP
11		9.910	15.34	10.20	25.53	-24.47	50.00	Average
12		9.910	22.89	10.20	33.09	-26.91	60.00	QP

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.

2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Site	SIP-SR2	Test Date	2025-08-20
Temperature	24.9 °C	Humidity	63.6%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Poli Cai
Factor	ENV216_101684_C	Polarity	Neutral
Test Mode	Transmit by 802.11ax-HE20 at 5955 MHz	Test Voltage	AC 120 V/60 Hz

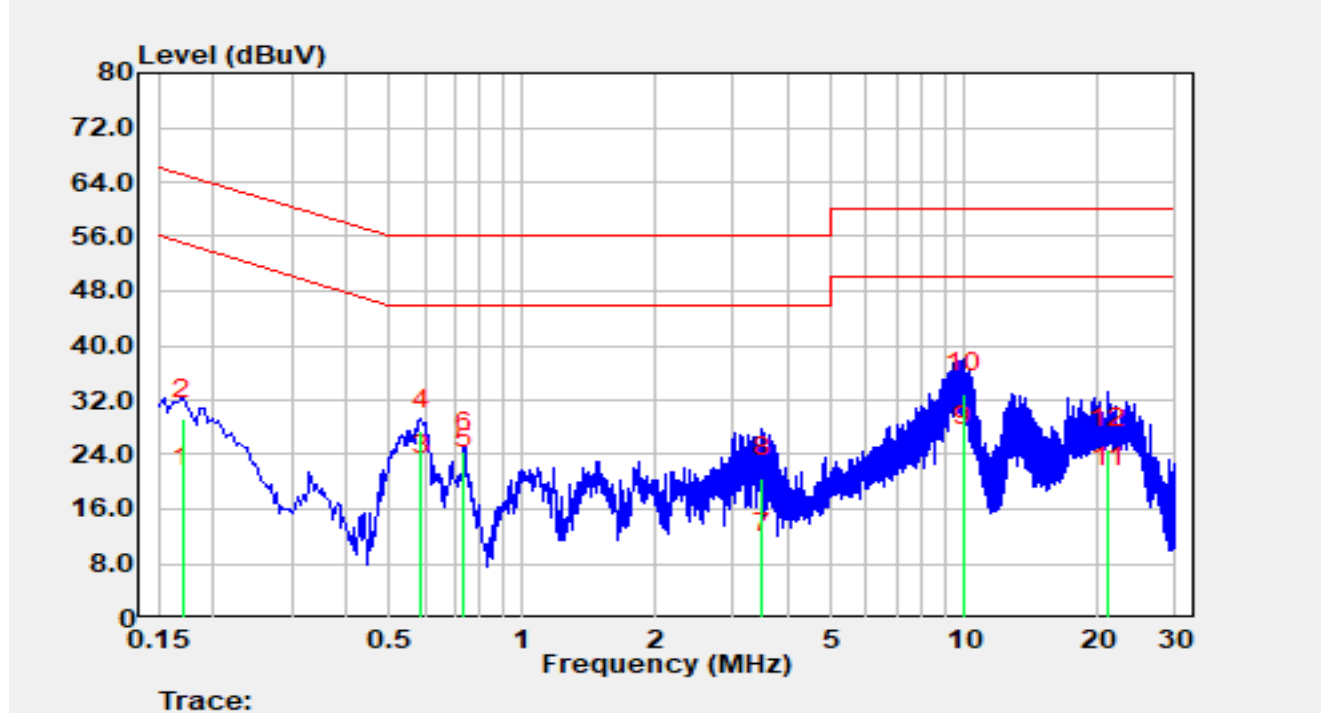

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.170	9.50	9.61	19.11	-35.85	54.96	Average
2		0.170	19.66	9.61	29.27	-35.69	64.96	QP
3		0.590	11.39	9.72	21.11	-24.89	46.00	Average
4		0.590	17.86	9.72	27.58	-28.42	56.00	QP
5	*	0.738	12.17	9.72	21.89	-24.11	46.00	Average
6		0.738	14.62	9.72	24.34	-31.66	56.00	QP
7		3.490	-0.48	9.84	9.36	-36.64	46.00	Average
8		3.490	10.83	9.84	20.67	-35.33	56.00	QP
9		9.920	15.09	10.19	25.28	-24.72	50.00	Average
10		9.920	22.80	10.19	32.98	-27.02	60.00	QP
11		21.160	8.69	10.49	19.18	-30.82	50.00	Average
12		21.160	14.33	10.49	24.82	-35.18	60.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).

3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Appendix B – Test Setup Photograph

Refer to “R25S1073095-UT” file.

Appendix C – EUT Photograph

Refer to “R25S1073095-UE” file.

_____ The End _____