

# ***FCC Part 15***

## ***EMI TEST REPORT***

E.U.T. : Dimming Controller (Zigbee)  
FCC ID : 2ALN2372170000000HS  
MODEL : AZB02-U1; AZB02-U2;  
AZB02-U3; AZB02-U4;  
CBH64H-HS; CBH64H-HY;  
CBH64H-HR; CBH64H-HW

*for*

APPLICANT : HIGH PERFECTION TECHNOLOGY. CO.,  
LTD.  
ADDRESS : No.4, Aly. 19, Ln. 379, Zhonghua Rd., Shulin  
Dist., New Taipei City 23850, Taiwan, (R. O. C.)

Test Performed by

### **ELECTRONICS TESTING CENTER, TAIWAN**

NO. 34. LIN 5. DINGFU VIL., LINKOU DIST.,  
NEW TAIPEI CITY, TAIWAN, 24442, R.O.C.

Tel : (02)26023052 Fax : (02)26010910

<http://www.etc.org.tw> ; e-mail: [emc@etc.org.tw](mailto:emc@etc.org.tw)

Report Number : 15-12-RBF-028-01

# TEST REPORT CERTIFICATION

Applicant : HIGH PERFECTION TECHNOLOGY. CO., LTD.  
No.4, Aly. 19,Ln. 379, Zhonghua Rd., Shulin Dist., New Taipei City  
23850, Taiwan, (R. O. C.)

Manufacturer : HIGH PERFECTION TECHNOLOGY. CO., LTD.  
No.4, Aly. 19,Ln. 379, Zhonghua Rd., Shulin Dist., New Taipei City  
23850, Taiwan, (R. O. C.)

## Description of EUT

- a) Type of EUT : Dimming Controller (Zigbee)  
b) Trade Name : HIGH PERFECTION TECH.  
c) Model No. : AZB02-U1;AZB02-U2;AZB02-U3;AZB02-U4;  
CBH64H-HS;CBH64H-HY;CBH64H-HR;CBH64H-HW  
d) Power Supply : 100-277VAC, 50/60Hz, 4.55A, 10VDC

Regulation Applied : FCC Rules and Regulations Part 15 Subpart C

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in ANSI C63.10-2013, and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

Note: 1. The result of the testing report relate only to the item tested.  
2. The testing report shall not be reproduced expect in full, without the written approval of ETC

## Summary of Tests

| Test                            | Results     |
|---------------------------------|-------------|
| Radiated Emission               | <b>Pass</b> |
| Conducted Emission              | <b>Pass</b> |
| Emission Bandwidth              | <b>Pass</b> |
| Output Power                    | <b>Pass</b> |
| 100 kHz Bandwidth of Band Edges | <b>Pass</b> |
| Power Density                   | <b>Pass</b> |
| Out-of-Band Conducted Emission  | <b>Pass</b> |
| Duty Cycle                      | <b>N.A.</b> |

Date Test Item Received : Jul. 13, 2016  
Date Test Campaign Completed : Nov. 24, 2016  
Date of Issue : Dec. 02, 2016

Test Engineer : Brian Huang  
(Brian Huang , Engineer )

Approve & Authorized Signer : S. S. Liou  
S. S. Liou, Section Manager  
EMC Dept. II of ELECTRONICS  
TESTING CENTER, TAIWAN



| <b>Table of Contents</b>                      | <b>Page</b> |
|-----------------------------------------------|-------------|
| <b>1 GENERAL INFORMATION.....</b>             | <b>1</b>    |
| 1.1 Product Description.....                  | 1           |
| 1.2 Characteristics of Device .....           | 1           |
| 1.3 Test Methodology .....                    | 1           |
| 1.4 Test Facility.....                        | 1           |
| <b>2 PROVISIONS APPLICABLE.....</b>           | <b>2</b>    |
| 2.1 Definition .....                          | 2           |
| 2.2 Requirement for Compliance .....          | 3           |
| 2.3 Restricted Bands of Operation .....       | 5           |
| 2.4 Labeling Requirement.....                 | 5           |
| 2.5 User Information .....                    | 6           |
| <b>3. SYSTEM TEST CONFIGURATION.....</b>      | <b>7</b>    |
| 3.1 Justification .....                       | 7           |
| 3.2 Devices for Tested System.....            | 7           |
| <b>4 RADIATED EMISSION MEASUREMENT .....</b>  | <b>8</b>    |
| 4.1 Applicable Standard.....                  | 8           |
| 4.2 Measurement Procedure.....                | 8           |
| 4.3 Measuring Instrument .....                | 10          |
| 4.4 Radiated Emission Data .....              | 11          |
| 4.5 Field Strength Calculation .....          | 18          |
| 4.6 Photos of Radiation Measuring Setup.....  | 19          |
| <b>5 CONDUCTED EMISSION MEASUREMENT .....</b> | <b>21</b>   |
| 5.1 Standard Applicable .....                 | 21          |
| 5.2 Measurement Procedure.....                | 21          |
| 5.3 Conducted Emission Data .....             | 22          |
| 5.4 Result Data Calculation .....             | 24          |
| 5.5 Conducted Measurement Equipment .....     | 24          |
| 5.6 Photos of Conduction Measuring Setup..... | 25          |
| <b>6 ANTENNA REQUIREMENT .....</b>            | <b>26</b>   |
| 6.1 Standard Applicable .....                 | 26          |
| 6.2 Antenna Construction.....                 | 26          |
| <b>7 EMISSION BANDWIDTH MEASUREMENT .....</b> | <b>27</b>   |
| 7.1 Standard Applicable .....                 | 27          |
| 7.2 Measurement Procedure.....                | 27          |

|                                                             |           |
|-------------------------------------------------------------|-----------|
| 7.3 Measurement Equipment .....                             | 27        |
| 7.4 Measurement Data .....                                  | 28        |
| <b>8 OUTPUT POWER MEASUREMENT .....</b>                     | <b>32</b> |
| 8.1 Standard Applicable .....                               | 32        |
| 8.2 Measurement Procedure.....                              | 32        |
| 8.3 Measurement Equipment .....                             | 32        |
| 8.4 Measurement Data .....                                  | 33        |
| <b>9 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT .....</b>  | <b>34</b> |
| 9.1 Standard Applicable .....                               | 34        |
| 9.2 Measurement Procedure.....                              | 34        |
| 9.3 Measurement Equipment .....                             | 34        |
| 9.4 Measurement Data .....                                  | 35        |
| <b>10 POWER DENSITY MEASUREMENT .....</b>                   | <b>37</b> |
| 10.1 Standard Applicable .....                              | 37        |
| 10.2 Measurement Procedure.....                             | 37        |
| 10.3 Measurement Equipment .....                            | 37        |
| 10.4 Measurement Data .....                                 | 38        |
| <b>11. OUT-OF-BAND CONDUCTED EMISSION MEASUREMENT .....</b> | <b>42</b> |
| 11.1 Standard Applicable .....                              | 42        |
| 11.2 Measurement Procedure.....                             | 42        |
| 11.3 Measurement Equipment .....                            | 42        |
| 11.4 Measurement Data .....                                 | 43        |
| <b>12. DUTY CYCLE .....</b>                                 | <b>47</b> |
| 12.1 Standard Applicable .....                              | 47        |
| 12.2 Measurement Equipment .....                            | 47        |
| 12.3 Measurement Data .....                                 | 47        |

## 1 GENERAL INFORMATION

### 1.1 Product Description

- a) Type of EUT : Dimming Controller (Zigbee)
- b) Trade Name : HIGH PERFECTION TECH.
- c) Model No. : AZB02-U1;AZB02-U2;AZB02-U3;AZB02-U4;  
CBH64H-HS;CBH64H-HY;CBH64H-HR;CBH64H-HW
- d) FCC ID : 2ALN2372170000000HS
- e) Power Supply : 100-277VAC, 50/60Hz, 4.55A, 10VDC
- f) Serial Difference : AZB02-U1: (1 channel o/p),  
Description : AZB02-U2: (2 channel o/p),  
AZB02-U3: (3 channel o/p),  
AZB02-U4: (4 channel o/p)  
CBH64H-HS: (Single o/p),  
CBH64H-HY: (YW o/p),  
CBH64H-HR: (RGB o/p),  
CBH64H-HW: (RGBW o/p)

### 1.2 Characteristics of Device

The product is the Dimming Controller (Zigbee)

1. Frequency band: 2405~2480MHz
2. Radiated Power: 14 dBm +/- 1dBm
3. Transmitter antenna source: Integral Antenna

### 1.3 Test Methodology

Both conducted and radiated emissions were performed according to the procedures illustrated in ANSI C63.10-2013. Other required measurements were illustrated in separate sections of this test report for details. For RF test the measurement procedure was referred to FCC KDB 558074 D01 DTS Meas Guidance v03r05.

The EUT set for test with the continuous transmission mode and the duty cycle >98%.

Measurement Software

| Software | Version          | Note                    |
|----------|------------------|-------------------------|
| e3       | Version 0618b    | Radiated Emission Test  |
| e3       | Version 6.100421 | Conducted Emission Test |

### 1.4 Test Facility

Location of the Test site: No.34, Lin 5, Dingfu Vil., Linkou Dist., New Taipei City, Taiwan 24442, R.O.C.

Designation Number: TW2628.

## 2 PROVISIONS APPLICABLE

### 2.1 Definition

**Unintentional radiator:**

A device that intentionally generates and radio frequency energy for use within the device, or that sends radio frequency signals by conduction to associated equipment via connecting wiring, but which is not intended to emit RF energy by radiation or induction.

**Class A Digital Device:**

A digital device which is marketed for use in commercial or business environment; exclusive of a device which is market for use by the general public, or which is intended to be used in the home.

**Class B Digital Device :**

A digital device which is marketed for use in a residential environment notwithstanding use in a commercial, business of industrial environment. Example of such devices that are marketed for the general public.

Note : A manufacturer may also qualify a device intended to be marketed in a commercial, business, or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

**Intentional radiator:**

A device that intentionally generates and emits radio frequency energy by radiation or induction.

## 2.2 Requirement for Compliance

### (1) Conducted Emission Requirement

Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

| Frequency<br>MHz | Quasi Peak<br>dB $\mu$ V | Average<br>dB $\mu$ V |
|------------------|--------------------------|-----------------------|
| 0.15 - 0.5       | 66-56*                   | 56-46*                |
| 0.5 - 5.0        | 56                       | 46                    |
| 5.0 - 30.0       | 60                       | 50                    |

\* Decreases with the logarithm of the frequency

### (2) Radiated Emission Requirement

For unintentional device, according to §15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

| Frequency<br>MHz | Distance<br>Meters | Radiated<br>dB $\mu$ V/m | Radiated<br>$\mu$ V/m |
|------------------|--------------------|--------------------------|-----------------------|
| 30 - 88          | 3                  | 40.0                     | 100                   |
| 88 - 216         | 3                  | 43.5                     | 150                   |
| 216 - 960        | 3                  | 46.0                     | 200                   |
| Above 960        | 3                  | 54.0                     | 500                   |

For intentional device, according to §15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

### (3) Antenna Requirement

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

**(4) Bandwidth Requirement**

For direct sequence system, according to 15.247(a)(2), the minimum 6dB bandwidth shall be at least 500 kHz.

**(5) Output Power Requirement**

For direct sequence system, according to 15.247(b), the maximum peak output power of the transmitter shall not exceed 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**(6) 100 kHz Bandwidth of Frequency Band Edges Requirement**

According to 15.247(c), if any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a), whichever results in the lesser attenuation.

**(7) Power Density Requirement**

According to 15.247(d), for direct sequence systems, the transmitted power density averaged over any 1 second interval shall not be greater than 8 dBm in any 3 kHz bandwidth within these bands.

## 2.3 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below :

| MHz               | MHz                   | MHz           | GHz         |
|-------------------|-----------------------|---------------|-------------|
| 0.090 - 0.110     | 16.42-16.423          | 399.9-410     | 4.5-5.15    |
| 0.495 - 0.505 **  | 16.69475 - 16.69525   | 608-614       | 5.35-5.46   |
| 2.1735 - 2.1905   | 16.80425 - 16.80475   | 960-1240      | 7.25-7.75   |
| 4.125-4.128       | 25.5-25.67            | 1300-1427     | 8.025-8.5   |
| 4.17725-4.17775   | 37.5-38.25            | 1435-1626.5   | 9.0-9.2     |
| 4.20725-4.20775   | 73-74.6               | 1645.5-1646.5 | 9.3-9.5     |
| 6.215-6.218       | 74.8-75.2             | 1660-1710     | 10.6-12.7   |
| 6.26775-6.26825   | 108-121.94            | 1718.8-1722.2 | 13.25-13.4  |
| 6.31175-6.31225   | 123-138               | 2200-2300     | 14.47-14.5  |
| 8.291-8.294       | 149.9-150.05          | 2310-2390     | 15.35-16.2  |
| 8.362-8.366       | 156.52475 - 156.52525 | 2483.5-2500   | 17.7-21.4   |
| 8.37625-8.38675   | 156.7-156.9           | 2655-2900     | 22.01-23.12 |
| 8.41425-8.41475   | 162.0125-167.17       | 3260-3267     | 23.6-24.0   |
| 12.29-12.293      | 167.72-173.2          | 3332-3339     | 31.2-31.8   |
| 12.51975-12.52025 | 240-285               | 3345.8-3358   | 36.43-36.5  |
| 12.57675-12.57725 | 322-335.4             | 3360-4400     | Above 38.6  |
| 13.36-13.41       |                       |               |             |

\*\* : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

## 2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device :

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions : (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

## 2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

The Federal Communications Commission Radio Frequency Interference Statement includes the following paragraph.

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

### 3. SYSTEM TEST CONFIGURATION

#### 3.1 Justification

The modular transmitter was tested in a stand-alone configuration. The power line and the data lines are at least 10 centimeters hence the EUT was 10 centimeters separated from the supporting equipment.

For conducted and radiated spurious emissions, whichever RF channel is operated, the digital circuits function identically. As the reason, measurement of radiated emissions from digital circuits is only performed with channel 1 by transmitting mode.

#### 3.2 Devices for Tested System

| Device                       | Manufacture                           | Model    | Cable Description |
|------------------------------|---------------------------------------|----------|-------------------|
| Dimming Controller (Zigbee)* | HIGH PERFECTION TECHNOLOGY. CO., LTD. | AZB02-U1 | ----              |
| 250W Lamp*4                  | N/A                                   | N/A      | N/A               |

Remark “\*” means equipment under test.

## 4 RADIATED EMISSION MEASUREMENT

### 4.1 Applicable Standard

For unintentional radiator, the radiated emission shall comply with §15.109(a).

For intentional radiators, according to §15.247 (a), operation under this provision is limited to frequency hopping and direct sequence spread spectrum, and the out band emission shall be comply with §15.247 (c)

### 4.2 Measurement Procedure

1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 1 GHz respectively.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.
5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.
7. Check the three frequencies of highest emission with varying the placement of cables associated with EUT to obtain the worse case and record the result.

Figure 1 : Frequencies measured below 1 GHz configuration


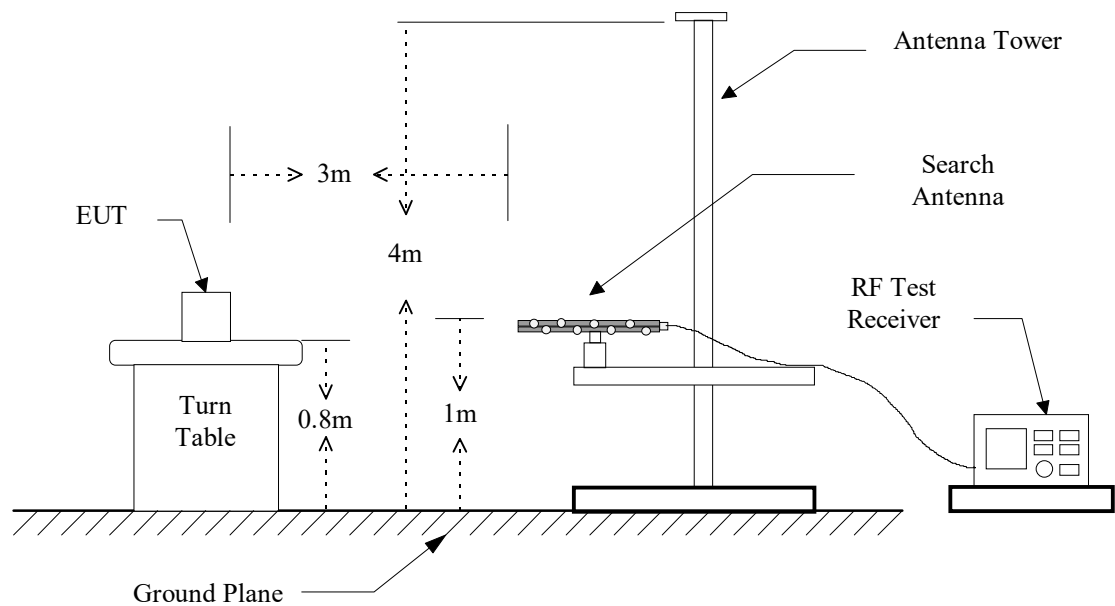


Figure 2 : Frequencies measured above 1 GHz configuration

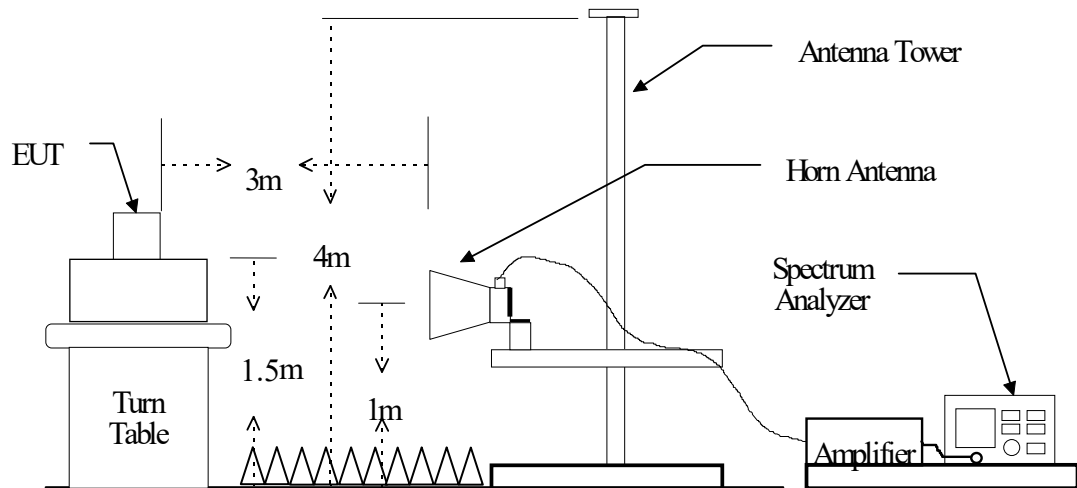

### 4.3 Measuring Instrument

The following instruments are used for radiated emissions measurement:

| Equipment                        | Manufacturer    | Model No. | Calibration Date | Next Cal. Date |
|----------------------------------|-----------------|-----------|------------------|----------------|
| EMI Test Receiver                | Rohde & Schwarz | ESU 40    | 2016/11/10       | 2017/11/09     |
| Double Ridged Antenna            | EMCO            | 3115      | 2016/10/05       | 2017/10/04     |
| Double Ridged Guide Horn Antenna | EMCO            | 3116      | 2016/10/05       | 2017/10/04     |
| Bi-Log Antenna                   | ETC             | MCTD 2786 | 2016/07/15       | 2017/07/14     |
| Amplifier                        | HP              | 8449B     | 2016/10/14       | 2017/10/13     |
| Amplifier                        | HP              | 8447D     | 2016/09/26       | 2017/09/25     |
| Amplifier                        | HP              | 83051A    | 2016/07/18       | 2017/07/17     |
| LOOP Antenna                     | EMCO            | 6512      | 2016/10/12       | 2017/10/11     |

Measuring instrument setup in measured frequency band when specified detector function is used :

| Frequency Band (MHz) | Instrument        | Function   | Resolution bandwidth | Video Bandwidth              |
|----------------------|-------------------|------------|----------------------|------------------------------|
| 30 to 1000           | RF Test Receiver  | Quasi-Peak | 120 kHz              | N/A                          |
|                      | Spectrum Analyzer | Peak       | 100 kHz              | 100 kHz                      |
| Above 1000           | Spectrum Analyzer | Peak       | 1 MHz                | 1 MHz                        |
|                      | Spectrum Analyzer | Average    | 1 MHz                | 10 Hz or $\geq 1/T$ (Note 1) |


Note 1:

VBW = 10 Hz, when the duty cycle is no less than 98%.

VBW  $\geq 1/T$ , when duty cycle is less than 98% where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

## 4.4 Radiated Emission Data

### 4.4.1 RF Portion

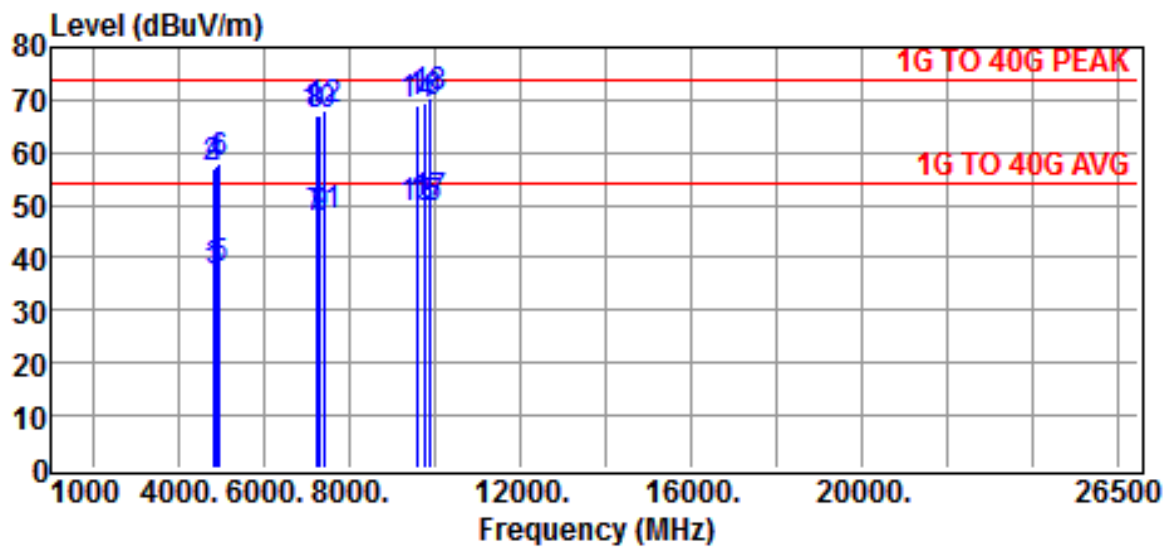


|              |                                         |           |             |
|--------------|-----------------------------------------|-----------|-------------|
| Site         | :CHAMBER #2                             | Date      | :2016-11-18 |
| Limit        | :1G TO 40G PEAK                         | Ant. Pol. | :HORIZONTAL |
| EUT          | :Zigbee Control Box                     | Model     | :AZB02-U1   |
| Power Rating | :120V 60Hz                              | Temp.     | :25 °C      |
| Engineer     | :Brian Huang                            | Humi.     | :53 %       |
| Test Mode    | :TXRX-CH LO 2405 - MI 2445 - HI 2480MHz |           |             |

| Freq<br>MHz | Reading<br>dBμV | Correction<br>Factor<br>dB | Result<br>dBμV/m | Limits<br>dBμV/m | Over limit<br>dB | Detector |
|-------------|-----------------|----------------------------|------------------|------------------|------------------|----------|
| 4810.0000   | 36.0            | 1.1                        | 37.1             | 54.0             | -16.9            | Average  |
| 4810.0000   | 56.0            | 1.1                        | 57.1             | 74.0             | -16.9            | Peak     |
| 4890.0000   | 36.0            | 1.4                        | 37.4             | 54.0             | -16.6            | Average  |
| 4890.0000   | 56.0            | 1.4                        | 57.4             | 74.0             | -16.6            | Peak     |
| 4960.0000   | 36.4            | 1.6                        | 38.0             | 54.0             | -16.0            | Average  |
| 4960.0000   | 56.4            | 1.6                        | 58.0             | 74.0             | -16.0            | Peak     |
| 7215.0000   | 41.6            | 5.6                        | 47.2             | 54.0             | -6.8             | Average  |
| 7215.0000   | 61.6            | 5.6                        | 67.2             | 74.0             | -6.8             | Peak     |
| 7335.0000   | 41.3            | 6.0                        | 47.3             | 54.0             | -6.7             | Average  |
| 7335.0000   | 61.3            | 6.0                        | 67.3             | 74.0             | -6.7             | Peak     |
| 7440.0000   | 41.7            | 6.3                        | 48.0             | 54.0             | -6.0             | Average  |
| 7440.0000   | 61.7            | 6.3                        | 68.0             | 74.0             | -6.0             | Peak     |
| 9620.0000   | 40.4            | 8.8                        | 49.2             | 54.0             | -4.8             | Average  |
| 9620.0000   | 60.4            | 8.8                        | 69.2             | 74.0             | -4.8             | Peak     |
| 9780.0000   | 40.3            | 9.0                        | 49.3             | 54.0             | -4.7             | Average  |
| 9780.0000   | 60.3            | 9.0                        | 69.3             | 74.0             | -4.7             | Peak     |

| Freq<br>MHz | Reading<br>dBμV | Correction<br>Factor<br>dB | Result<br>dBμV/m | Limits<br>dBμV/m | Over limit<br>dB | Detector |
|-------------|-----------------|----------------------------|------------------|------------------|------------------|----------|
| 9920.0000   | 41.1            | 9.1                        | 50.2             | 54.0             | -3.8             | Average  |
| 9920.0000   | 61.1            | 9.1                        | 70.2             | 74.0             | -3.8             | Peak     |

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result

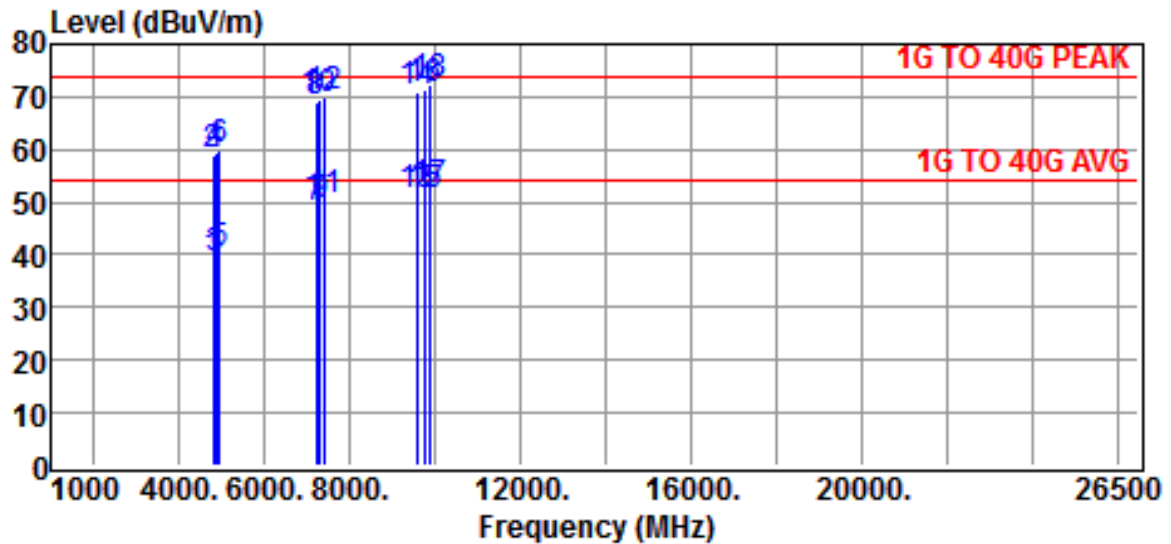


|              |                                         |           |             |
|--------------|-----------------------------------------|-----------|-------------|
| Site         | :CHAMBER #2                             | Date      | :2016-11-18 |
| Limit        | :1G TO 40G PEAK                         | Ant. Pol. | :VERTICAL   |
| EUT          | :Zigbbe Control Box                     | Model     | :AZB02-U1   |
| Power Rating | :120V 60Hz                              | Temp.     | :25 °C      |
| Engineer     | :Brian Huang                            | Humi.     | :53 %       |
| Test Mode    | :TXRX-CH LO 2405 - MI 2445 - HI 2480MHz |           |             |

| Freq<br>MHz | Reading<br>dBμV | Correction<br>Factor<br>dB | Result<br>dBμV/m | Limits<br>dBμV/m | Over limit<br>dB | Detector |
|-------------|-----------------|----------------------------|------------------|------------------|------------------|----------|
| 4810.0000   | 37.9            | 1.1                        | 39.0             | 54.0             | -15.0            | Average  |
| 4810.0000   | 57.9            | 1.1                        | 59.0             | 74.0             | -15.0            | Peak     |
| 4890.0000   | 38.1            | 1.4                        | 39.5             | 54.0             | -14.5            | Average  |
| 4890.0000   | 58.1            | 1.4                        | 59.5             | 74.0             | -14.5            | Peak     |
| 4960.0000   | 38.5            | 1.6                        | 40.1             | 54.0             | -13.9            | Average  |
| 4960.0000   | 58.5            | 1.6                        | 60.1             | 74.0             | -13.9            | Peak     |
| 7215.0000   | 43.4            | 5.6                        | 49.0             | 54.0             | -5.0             | Average  |
| 7215.0000   | 63.4            | 5.6                        | 69.0             | 74.0             | -5.0             | Peak     |
| 7335.0000   | 43.4            | 6.0                        | 49.4             | 54.0             | -4.6             | Average  |
| 7335.0000   | 63.4            | 6.0                        | 69.4             | 74.0             | -4.6             | Peak     |
| 7440.0000   | 43.8            | 6.3                        | 50.1             | 54.0             | -3.9             | Average  |
| 7440.0000   | 63.8            | 6.3                        | 70.1             | 74.0             | -3.9             | Peak     |
| 9620.0000   | 42.3            | 8.8                        | 51.1             | 54.0             | -2.9             | Average  |
| 9620.0000   | 62.3            | 8.8                        | 71.1             | 74.0             | -2.9             | Peak     |
| 9780.0000   | 42.4            | 9.0                        | 51.4             | 54.0             | -2.6             | Average  |
| 9780.0000   | 62.4            | 9.0                        | 71.4             | 74.0             | -2.6             | Peak     |
| 9920.0000   | 43.1            | 9.1                        | 52.2             | 54.0             | -1.8             | Average  |
| 9920.0000   | 63.1            | 9.1                        | 72.2             | 74.0             | -1.8             | Peak     |

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result

#### 4.4.2 Radiated Emission of Restricted bands

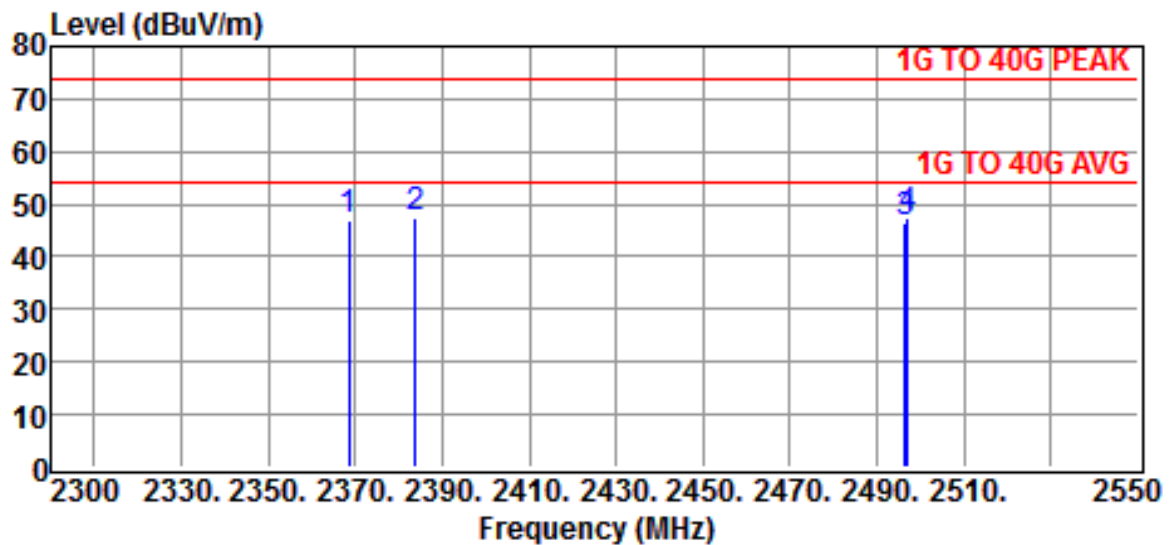


Site :CHAMBER #2  
 Limit :1G TO 40G PEAK  
 EUT :Zigbee Control Box  
 Power Rating :120V 60Hz  
 Engineer :Brian Huang  
 Test Mode :OPERATION MODE

Date :2016-11-18  
 Ant. Pol. :HORIZONTAL  
 Model :AZB02-U1  
 Temp. :25 °C  
 Humi. :53%

| Freq<br>MHz | Reading<br>dBμV | Correction<br>Factor<br>dB | Result<br>dBμV/m | Limits<br>dBμV/m | Over limit<br>dB | Detector |
|-------------|-----------------|----------------------------|------------------|------------------|------------------|----------|
| 2368.5000   | 52.9            | -5.9                       | 47.0             | 74.0             | -27.0            | Peak     |
| 2384.0000   | 53.5            | -5.9                       | 47.6             | 74.0             | -26.4            | Peak     |
| 2496.5000   | 52.3            | -5.7                       | 46.6             | 74.0             | -27.4            | Peak     |
| 2497.0000   | 53.0            | -5.7                       | 47.3             | 74.0             | -26.7            | Peak     |

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

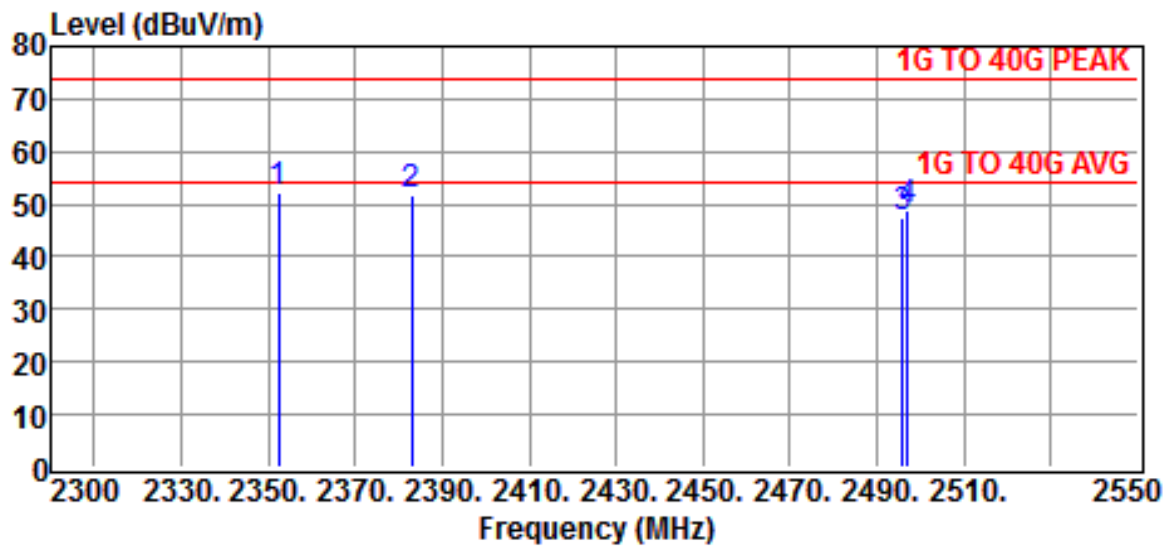

Site :CHAMBER #2  
 Limit :1G TO 40G PEAK  
 EUT :Zigbbe Control Box  
 Power Rating :120V 60Hz  
 Engineer :Brian Huang  
 Test Mode :OPERATION MODE

Date :2016-11-18  
 Ant. Pol. :VERTICAL  
 Model :AZB02-U1  
 Temp. :25 °C  
 Humi. :53 %


| Freq<br>MHz | Reading<br>dBμV | Correction<br>Factor<br>dB | Result<br>dBμV/m | Limits<br>dBμV/m | Over limit<br>dB | Detector |
|-------------|-----------------|----------------------------|------------------|------------------|------------------|----------|
| 2352.5000   | 58.0            | -5.9                       | 52.1             | 74.0             | -21.9            | Peak     |
| 2383.0000   | 57.4            | -5.9                       | 51.5             | 74.0             | -22.5            | Peak     |
| 2495.7500   | 53.0            | -5.7                       | 47.3             | 74.0             | -26.7            | Peak     |
| 2497.0000   | 54.4            | -5.7                       | 48.7             | 74.0             | -25.3            | Peak     |

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

### 4.4.3 Other Emission

#### a) Emission frequencies below 1 GHz

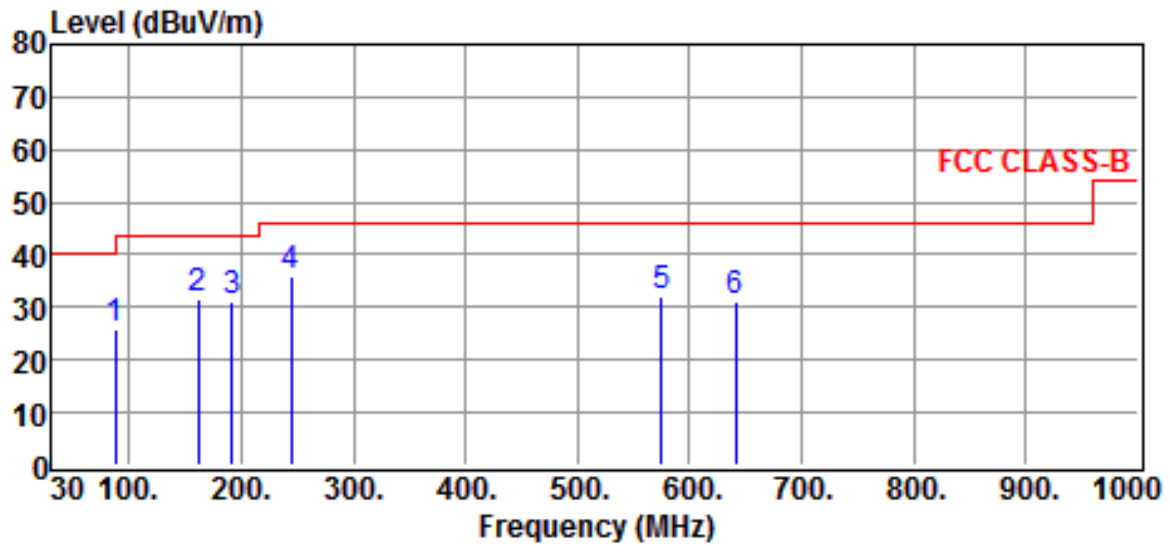

Site :CHAMBER #2

Date :2016-11-18

Limit :FCC CLASS-B

Ant. Pol. :HORIZONTAL

EUT :Zigbbe Control Box

Model :AZB02-U1

Power Rating :AC 120V60Hz

Temp. :25 °C

Engineer :Brian Huang


Humi. :53 %

| Freq<br>MHz | Reading<br>dBμV | Correction<br>Factor<br>dB | Result<br>dBμV/m | Limits<br>dBμV/m | Over limit<br>dB | Detector |
|-------------|-----------------|----------------------------|------------------|------------------|------------------|----------|
| 87.2300     | 37.3            | -11.4                      | 25.9             | 40.0             | -14.1            | QP       |
| 161.9200    | 39.1            | -7.4                       | 31.7             | 43.5             | -11.8            | QP       |
| 191.9900    | 40.2            | -9.0                       | 31.2             | 43.5             | -12.3            | QP       |
| 244.3700    | 41.1            | -5.4                       | 35.7             | 46.0             | -10.3            | QP       |
| 575.1400    | 31.1            | 1.2                        | 32.3             | 46.0             | -13.7            | QP       |
| 641.1000    | 28.7            | 2.4                        | 31.1             | 46.0             | -14.9            | QP       |

1. Result = Reading + Corrected Factor

2. Corrected Factor = Antenna Factor + Cable Loss

3. The margin value=Limit - Result

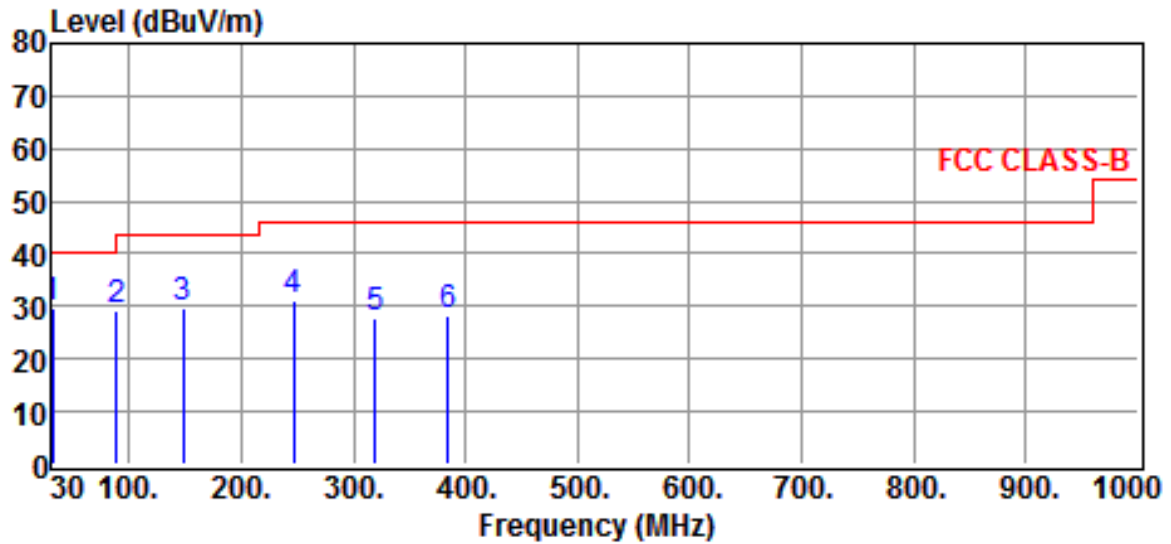

Site : CHAMBER #2  
 Limit : FCC CLASS-B  
 EUT : Zigbee Control Box  
 Power Rating : AC 120V60Hz  
 Engineer : Brian Huang

Date : 2016-11-18  
 Ant. Pol. : VERTICAL  
 Model : AZB02-U1  
 Temp. : 25 °C  
 Humi. : 53 %

| Freq<br>MHz | Reading<br>dBμV | Correction<br>Factor<br>dB | Result<br>dBμV/m | Limits<br>dBμV/m | Over limit<br>dB | Detector |
|-------------|-----------------|----------------------------|------------------|------------------|------------------|----------|
| 31.9400     | 32.5            | -2.9                       | 29.6             | 40.0             | -10.4            | QP       |
| 89.1700     | 40.1            | -11.1                      | 29.0             | 43.5             | -14.5            | QP       |
| 148.3400    | 36.4            | -6.8                       | 29.6             | 43.5             | -13.9            | QP       |
| 247.2800    | 36.4            | -5.1                       | 31.3             | 46.0             | -14.7            | QP       |
| 319.0600    | 30.6            | -2.6                       | 28.0             | 46.0             | -18.0            | QP       |
| 384.0500    | 29.4            | -1.4                       | 28.0             | 46.0             | -18.0            | QP       |

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value = Limit - Result

b) Emission frequencies above 1 GHz

Radiated emission frequencies above 1 GHz to 26.5 GHz were too low to be measured with a pre-amplifier of 35 dB.

c) Emission frequencies below 30MHz (9kHz - 30MHz)

According to exploratory test no any obvious emission were detected from 9kHz to 30MHz. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

## 4.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, High Pass Filter Loss(if used) and Cable Loss, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation calculation is as follows:


$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

where

Corrected Factor = Antenna FACTOR + Cable Loss + High Pass Filter Loss - Amplifier Gain

## 4.6 Photos of Radiation Measuring Setup

**30MHz~1000MHz**

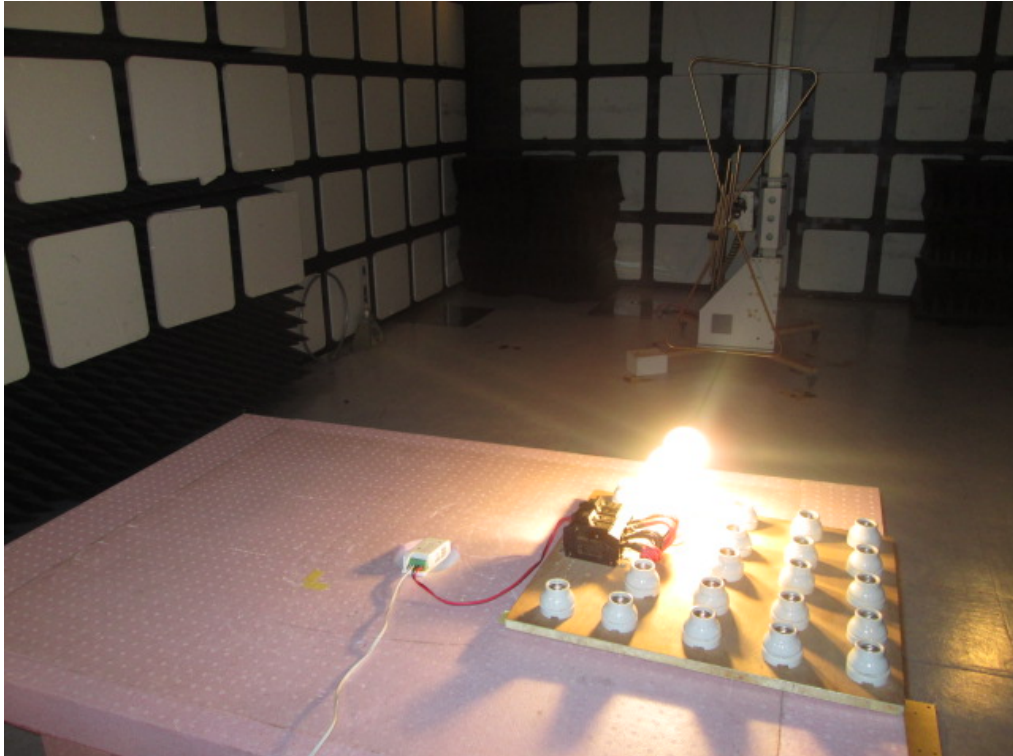

**Above 1GHz**



## 5 CONDUCTED EMISSION MEASUREMENT


### 5.1 Standard Applicable

For unintentional and intentional device, Line Conducted Emission Limits are in accordance to § 15.107(a) and § 15.207(a) respectively. Both Limits are identical specification.


### 5.2 Measurement Procedure

1. Setup the configuration per figure 3.
2. A preliminary scan with a spectrum monitor is performed to identify the frequency of emission that has the highest amplitude relative to the limit by operating the EUT in selected modes of operation, typical cable positions, and with a typical system configuration.
3. Record the 6 or 8 highest emissions relative to the limit.
4. Measure each frequency obtained from step 3 by a test receiver set on quasi peak detector function, and then record the accuracy frequency and emission level. If all emissions measured in the specified band are attenuated more than 20 dB from the limit, this step would be ignored, and the peak detector function would be used.
5. Confirm the highest three emissions with variation of the EUT cable configuration and record the final data.
6. Repeat all above procedures on measuring each operation mode of EUT.

Figure 3 : Conducted emissions measurement configuration

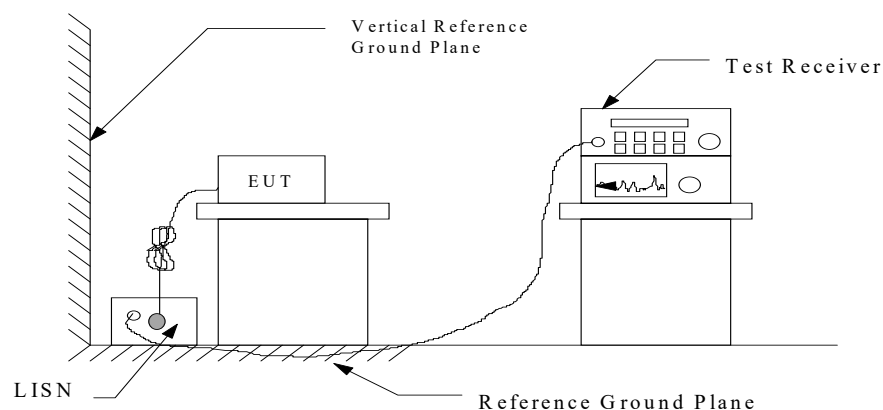

### 5.3 Conducted Emission Data

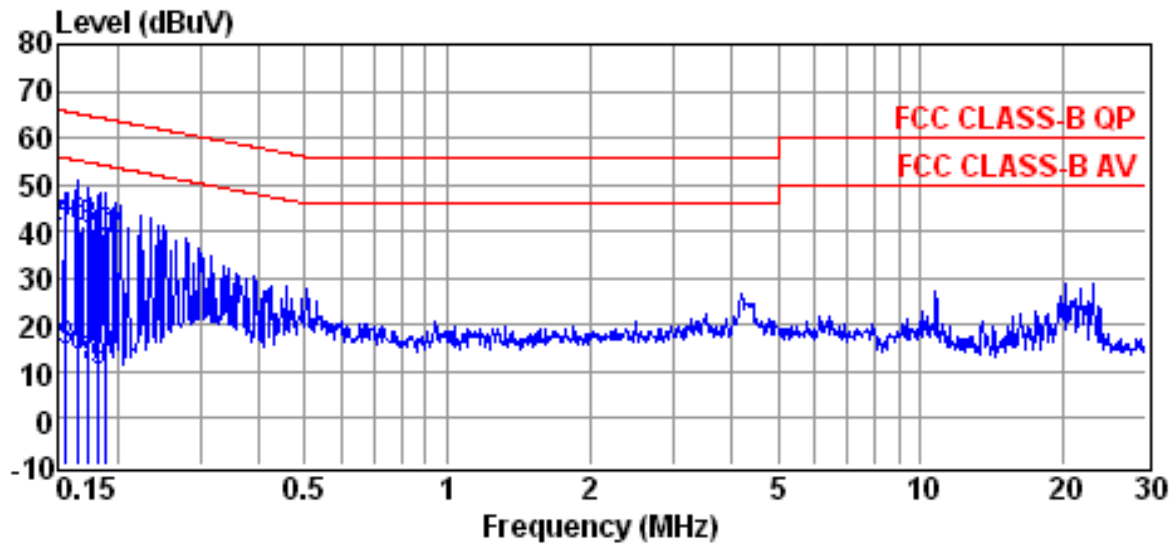


|           |                      |              |               |
|-----------|----------------------|--------------|---------------|
| Site      | : conducted #1       | Date         | : 11-21-2016  |
| Condition | : FCC CLASS-B QP     | LISN         | : NEUTRAL     |
| Tem / Hum | : 24 °C / 55%        | Test Mode    | : AZB02-U1    |
| EUT       | : Zigbee Control Box | Power Rating | : AC 120V60Hz |
| Memo      | :                    | Memo         | :             |

| Freq (MHz) | Reading (dBμV) | Factor (dB) | Emission Level (dBμV) | Limit Line (dBμV) | Over Limit (dB) | Remark  |
|------------|----------------|-------------|-----------------------|-------------------|-----------------|---------|
| 0.1500     | 6.57           | 10.15       | 16.72                 | 56.00             | -39.28          | Average |
| 0.1500     | 30.43          | 10.15       | 40.58                 | 66.00             | -25.42          | QP      |
| 0.1557     | 4.03           | 10.15       | 14.18                 | 55.69             | -41.51          | Average |
| 0.1557     | 31.39          | 10.15       | 41.54                 | 65.69             | -24.15          | QP      |
| 0.1659     | 3.14           | 10.15       | 13.29                 | 55.16             | -41.87          | Average |
| 0.1659     | 30.34          | 10.15       | 40.49                 | 65.16             | -24.67          | QP      |
| 0.1740     | 1.04           | 10.15       | 11.19                 | 54.77             | -43.58          | Average |
| 0.1740     | 29.75          | 10.15       | 39.90                 | 64.77             | -24.87          | QP      |
| 0.1825     | -0.10          | 10.15       | 10.05                 | 54.37             | -44.32          | Average |
| 0.1825     | 28.39          | 10.15       | 38.54                 | 64.37             | -25.83          | QP      |
| 0.1884     | 1.09           | 10.15       | 11.24                 | 54.11             | -42.87          | Average |
| 0.1884     | 27.91          | 10.15       | 38.06                 | 64.11             | -26.05          | QP      |

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

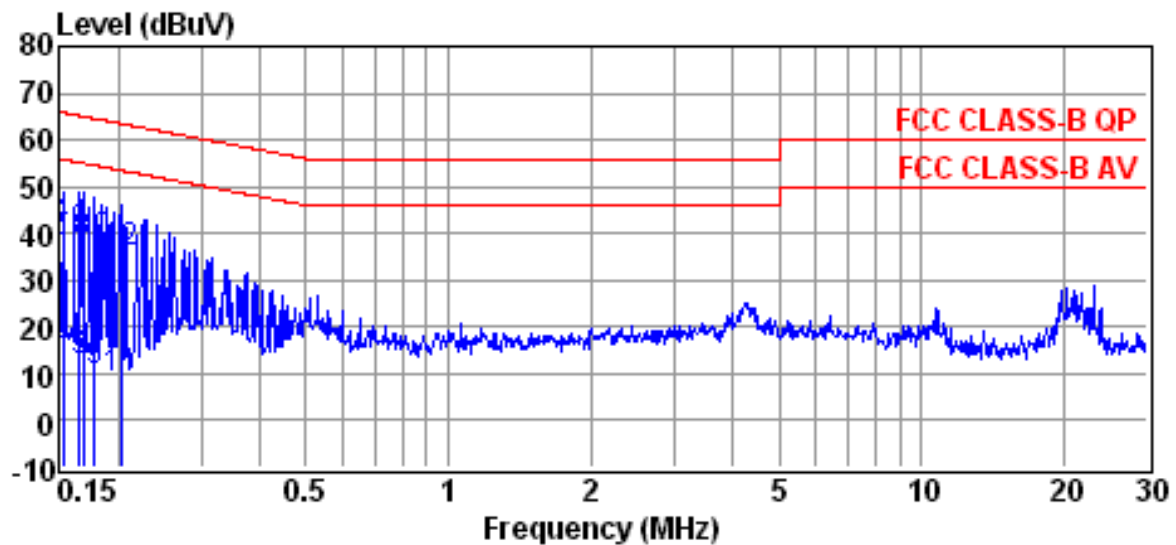

|           |                      |              |               |
|-----------|----------------------|--------------|---------------|
| Site      | : conducted #1       | Date         | : 11-21-2016  |
| Condition | : FCC CLASS-B QP     | LISN         | : LINE        |
| Tem / Hum | : 24 °C / 55%        | Test Mode    | : AZB02-U1    |
| EUT       | : Zigbee Control Box | Power Rating | : AC 120V60Hz |
| Memo      | :                    | Memo         | :             |

| Freq (MHz) | Reading (dBμV) | Factor (dB) | Emission Level (dBμV) | Limit Line (dBμV) | Over Limit (dB) | Remark  |
|------------|----------------|-------------|-----------------------|-------------------|-----------------|---------|
| 0.1500     | 6.98           | 10.15       | 17.13                 | 56.00             | -38.87          | Average |
| 0.1500     | 27.72          | 10.15       | 37.87                 | 66.00             | -28.13          | QP      |
| 0.1532     | 5.91           | 10.15       | 16.06                 | 55.82             | -39.76          | Average |
| 0.1532     | 31.04          | 10.15       | 41.19                 | 65.82             | -24.63          | QP      |
| 0.1659     | 2.43           | 10.15       | 12.58                 | 55.16             | -42.58          | Average |
| 0.1659     | 29.23          | 10.15       | 39.38                 | 65.16             | -25.78          | QP      |
| 0.1685     | 1.92           | 10.15       | 12.07                 | 55.03             | -42.96          | Average |
| 0.1685     | 28.03          | 10.15       | 38.18                 | 65.03             | -26.85          | QP      |
| 0.1787     | 0.28           | 10.16       | 10.44                 | 54.55             | -44.11          | Average |
| 0.1787     | 27.97          | 10.16       | 38.13                 | 64.55             | -26.42          | QP      |
| 0.2029     | -1.28          | 10.16       | 8.88                  | 53.49             | -44.61          | Average |
| 0.2029     | 25.45          | 10.16       | 35.61                 | 63.49             | -27.88          | QP      |

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

## 5.4 Result Data Calculation

The result data is calculated by adding the LISN Factor to the measured reading. The basic equation with a sample calculation is as follows:

$$\text{RESULT} = \text{READING} + \text{LISN FACTOR}$$

Assume a receiver reading of 22.5 dB  $\mu$  V is obtained, and LISN Factor is 0.1 dB, then the total of disturbance voltage is 22.6 dB  $\mu$  V.

$$\text{RESULT} = 22.5 + 0.1 = 22.6 \text{ dB } \mu \text{ V}$$

$$\begin{aligned} \text{Level in } \mu \text{ V} &= \text{Common Antilogarithm}[(22.6 \text{ dB } \mu \text{ V})/20] \\ &= 13.48 \mu \text{ V} \end{aligned}$$

## 5.5 Conducted Measurement Equipment

The following test equipment are used during the conducted test .

| Equipment         | Manufacturer    | Model No. | Calibration Date | Next Cal. Date |
|-------------------|-----------------|-----------|------------------|----------------|
| EMI Test Receiver | Rohde & Schwarz | ESCI      | 2016/09/07       | 2017/09/06     |
| LISN              | Rohde & Schwarz | ESH2-Z5   | 2016/05/05       | 2017/05/04     |

## 5.6 Photos of Conduction Measuring Setup



## **6 ANTENNA REQUIREMENT**

### **6.1 Standard Applicable**

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### **6.2 Antenna Construction**

The antenna is integrated on the device. No consideration of replacement. Please refer to the construction Photo for details.

## 7 EMISSION BANDWIDTH MEASUREMENT


### 7.1 Standard Applicable

According to 15.247(a)(2), for direct sequence system, the minimum 6dB bandwidth shall be at least 500 kHz.

### 7.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value. The settings of spectrum analyzer is as followings.
  - 1) Set RBW = 30 kHz.
  - 2) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
  - 3) Detector = Peak.
  - 4) Trace mode = max hold.
  - 5) Sweep = auto couple.
  - 6) Allow the trace to stabilize.
  - 7) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
3. Repeat above procedures until all frequencies measured were complete.

Figure 4: Emission bandwidth measurement configuration.



### 7.3 Measurement Equipment

| Equipment         | Manufacturer    | Model No. | Calibration Date | Next Cal. Date |
|-------------------|-----------------|-----------|------------------|----------------|
| Spectrum Analyzer | Rohde & Schwarz | FSP40     | 2016/10/03       | 2017/10/02     |
| Attenuator        | MINI-CIRCUITS   | BW-S10W2+ | 2016/09/30       | 2017/09/29     |

## 7.4 Measurement Data

Test Date : Nov. 21, 2016      Temperature : 20 °C      Humidity : 65 %


- a) Channel Low: 6 dB Emission Bandwidth is 1.54 MHz
- b) Channel Mid: 6 dB Emission Bandwidth is 1.54 MHz
- c) Channel High: 6 dB Emission Bandwidth is 1.54 MHz

**Note : The expanded uncertainty:  $\text{frequency} \times 1.65 \times 10^{-6}$  ( $1 \text{ GHz} < f \leq 18 \text{ GHz}$ ).**


Mode: Channel Low




Ref 20 dBm      Att 50 dB      \*RBW 100 kHz      Delta 1 [T1 ]  
VBW 300 kHz      -0.18 dB  
SWT 2.5 ms      1.540000000 MHz

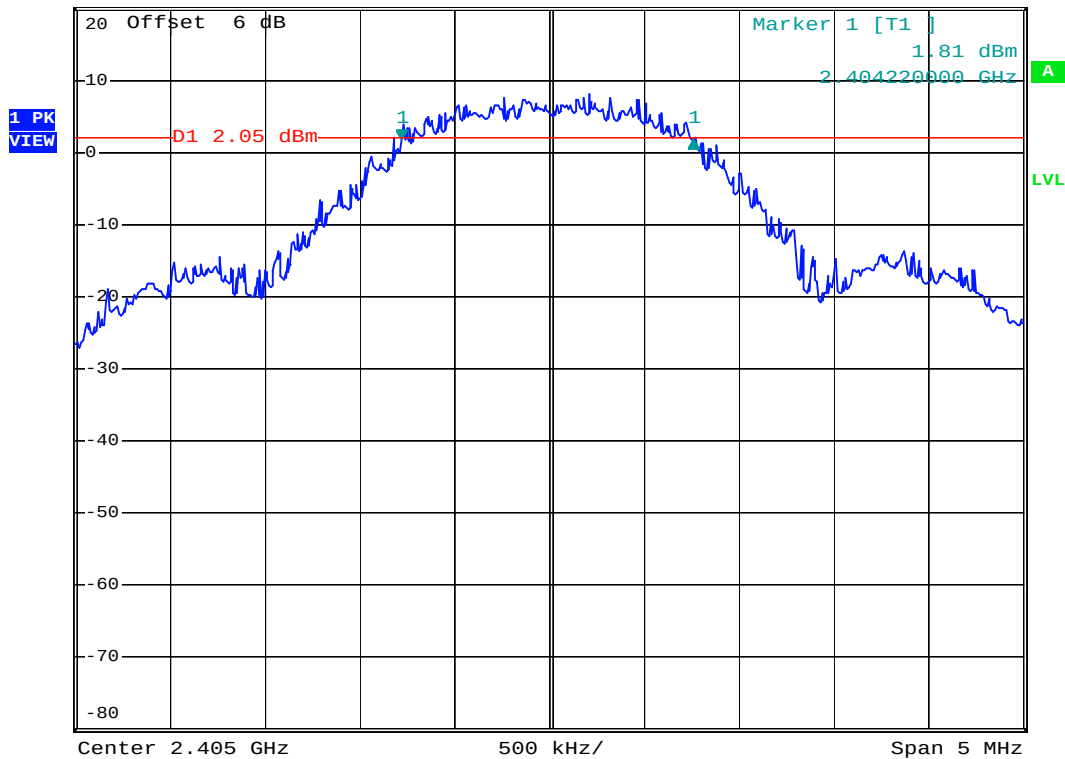

Mode:Channel Middle

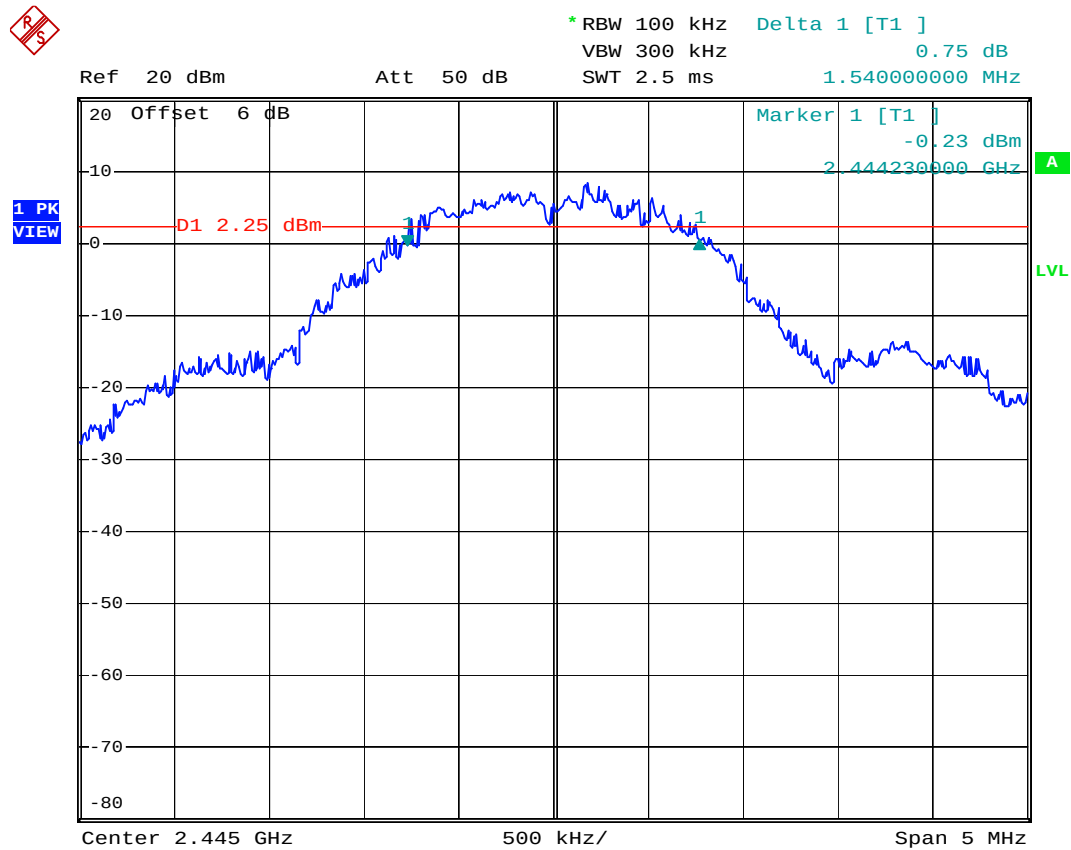

Mode: Channel High

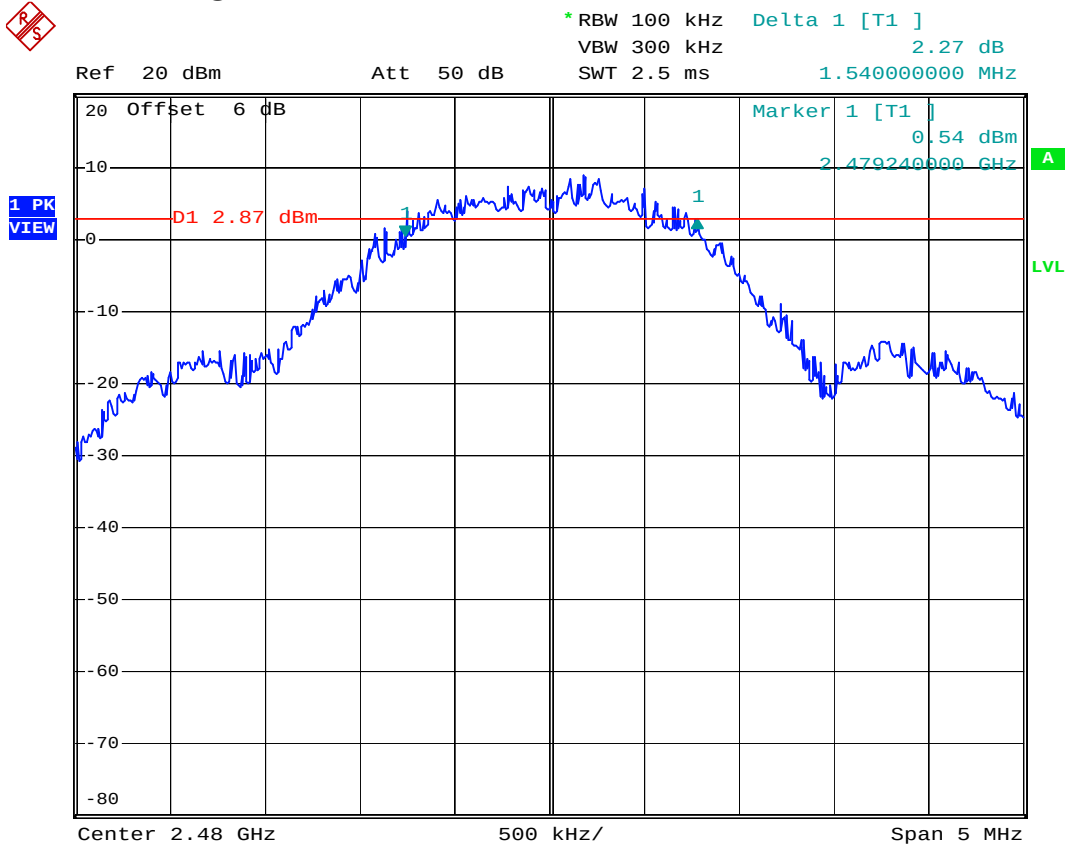

## 8 OUTPUT POWER MEASUREMENT

### 8.1 Standard Applicable

For direct sequence system, according to 15.247(b), the maximum peak output power of the transmitter shall not exceed 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


### 8.2 Measurement Procedure

Measurement Procedure:

#### 9.1.2 PKPM1 Peak power meter method

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 5 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable.
3. Record the readings on the instrument and add a compensat factor of the attenuator.
4. Repeat above procedures until all frequencies measured were complete.

Figure 5: Output power and measurement configuration.



### 8.3 Measurement Equipment

| Equipment              | Manufacturer  | Model No.           | Calibration Date | Next Cal. Date |
|------------------------|---------------|---------------------|------------------|----------------|
| POWER METER<br>+SENSOR | ANRITSU       | ML2487A<br>+MA2491A | 2016/05/12       | 2017/05/11     |
| Attenuator             | MINI-CIRCUITS | BW-S10W2+           | 2016/09/30       | 2017/09/29     |

## 8.4 Measurement Data

Test Date : Nov. 21, 2016      Temperature : 20 °C      Humidity : 65 %

Measurement Procedure: PKPM1

| Output Peak Power |                      | dBm   | mW     |
|-------------------|----------------------|-------|--------|
| <b>ZigBee</b>     | Channel Low:2405MHz  | 13.30 | 21.380 |
|                   | Channel Mid:2445MHz  | 13.64 | 23.121 |
|                   | Channel High:2480MHz | 13.93 | 24.717 |

**Note : The expanded uncertainty: 2dB.**

## 9 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT

### 9.1 Standard Applicable

According to 15.247(c), if any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a), whichever results in the lesser attenuation.

### 9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set both RBW of spectrum analyzer to 100kHz and VBW to 1 MHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### 9.3 Measurement Equipment

| Equipment         | Manufacturer    | Model No. | Calibration Date | Next Cal. Date |
|-------------------|-----------------|-----------|------------------|----------------|
| Spectrum Analyzer | Rohde & Schwarz | FSP40     | 2016/10/03       | 2017/10/02     |
| Attenuator        | MINI-CIRCUITS   | BW-S10W2+ | 2016/09/30       | 2017/09/29     |


## 9.4 Measurement Data

Test Date : Nov. 21, 2016      Temperature : 20 °C      Humidity : 65 %


- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.

***Note : The expanded uncertainty: 2dB.***

Mode: Channel Lowest

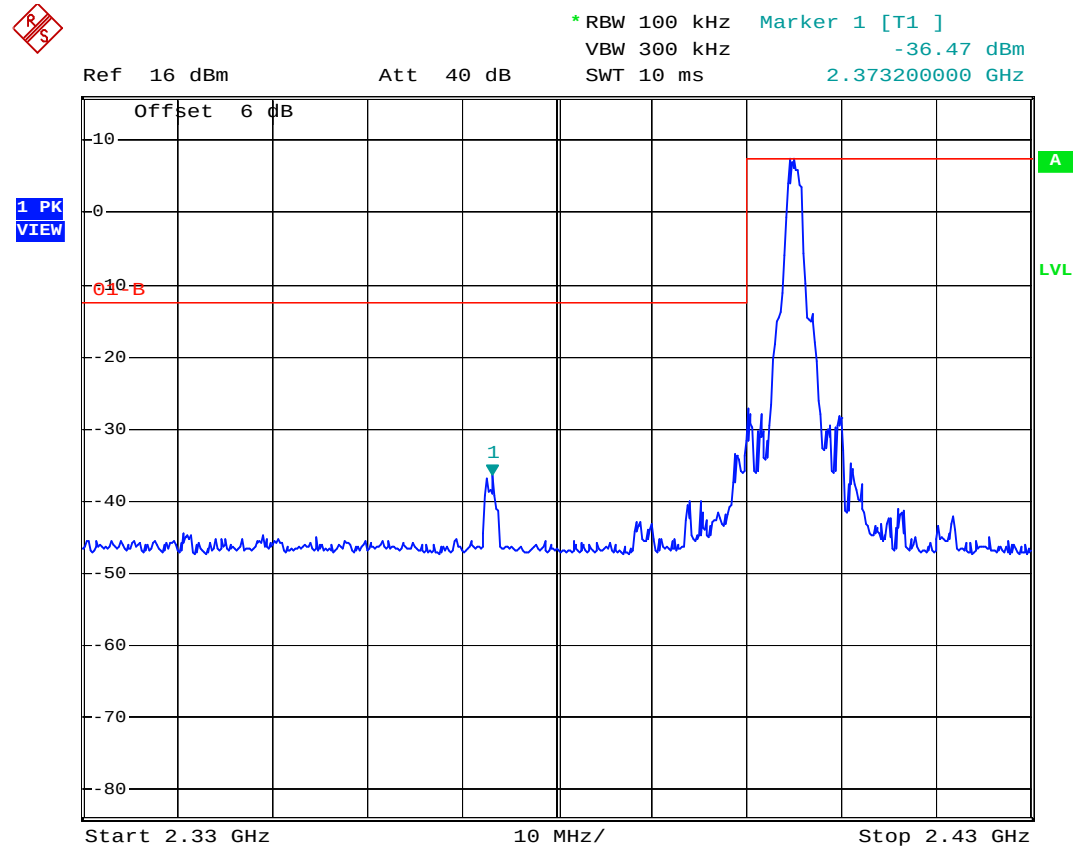

Mode: Channel Highest

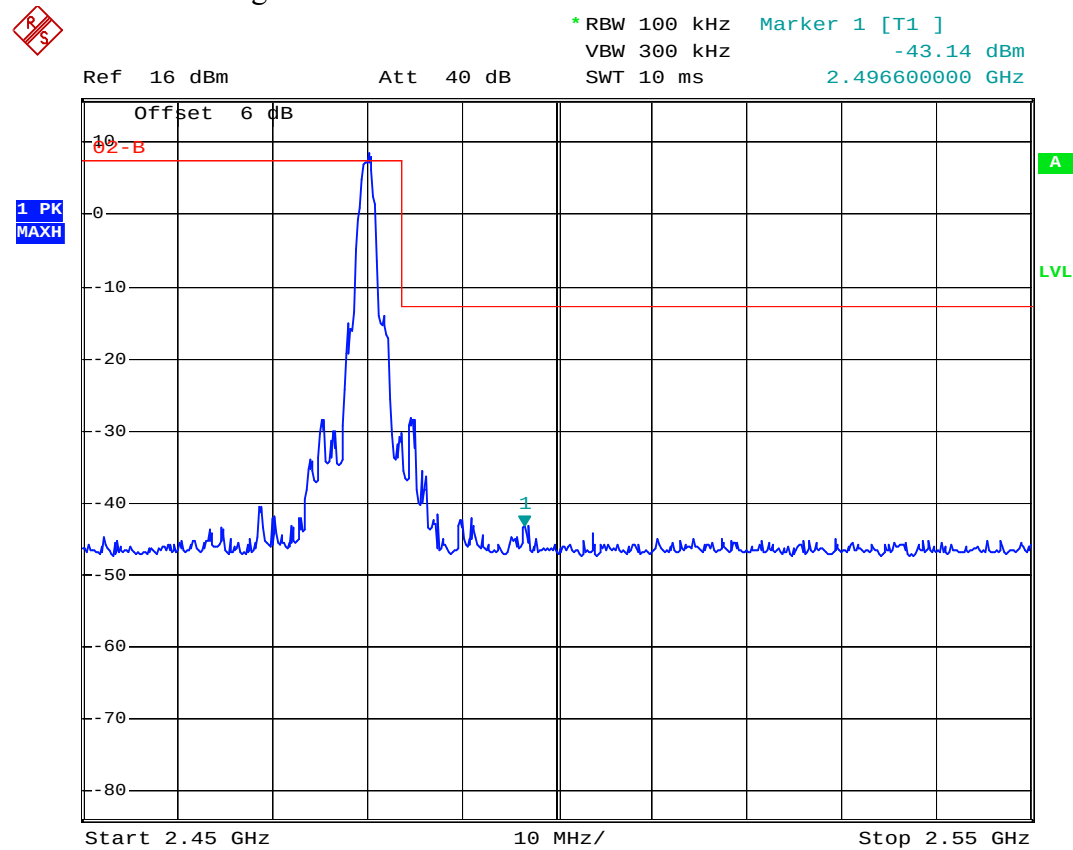

## 10 POWER DENSITY MEASUREMENT

### 10.1 Standard Applicable

According to 15.247(d), for direct sequence systems, the transmitted power density averaged over any 1 second interval shall not be greater than 8 dBm in any 3 kHz bandwidth within these bands.

### 10.2 Measurement Procedure

#### Measurement Method: PKPSD

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 5 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set EUT to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set analyzer center frequency to DTS channel center frequency.
4. Set the span to 1.5 times the DTS bandwidth.
5. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
6. Set the VBW  $\geq 3 \times \text{RBW}$ .
7. Detector = peak.
8. Sweep time = auto couple.
9. Trace mode = max hold.
10. Allow trace to fully stabilize.
11. Use the peak marker function to determine the maximum amplitude level within the RBW.
12. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
13. Repeat above procedures until all measured frequencies were complete.

### 10.3 Measurement Equipment

| Equipment         | Manufacturer    | Model No. | Calibration Date | Next Cal. Date |
|-------------------|-----------------|-----------|------------------|----------------|
| Spectrum Analyzer | Rohde & Schwarz | FSP40     | 2016/10/03       | 2017/10/02     |
| Attenuator        | MINI-CIRCUITS   | BW-S10W2+ | 2016/09/30       | 2017/09/29     |

## 10.4 Measurement Data

Test Date : Nov. 21, 2016      Temperature : 20 °C      Humidity : 65 %


- a) Channel Low:    Maximun PSD is    -3.56   dBm
- b) Channel Mid:    Maximun PSD is    -2.78   dBm
- c) Channel High:   Maximun PSD is    -1.52   dBm

***Note : The expanded uncertainty: 2dB.***

Mode: Channel Low




\*RBW 3 kHz      Marker 1 [T1 ]  
VBW 10 kHz      -3.56 dBm  
SWT 270 ms      2.405115200 GHz

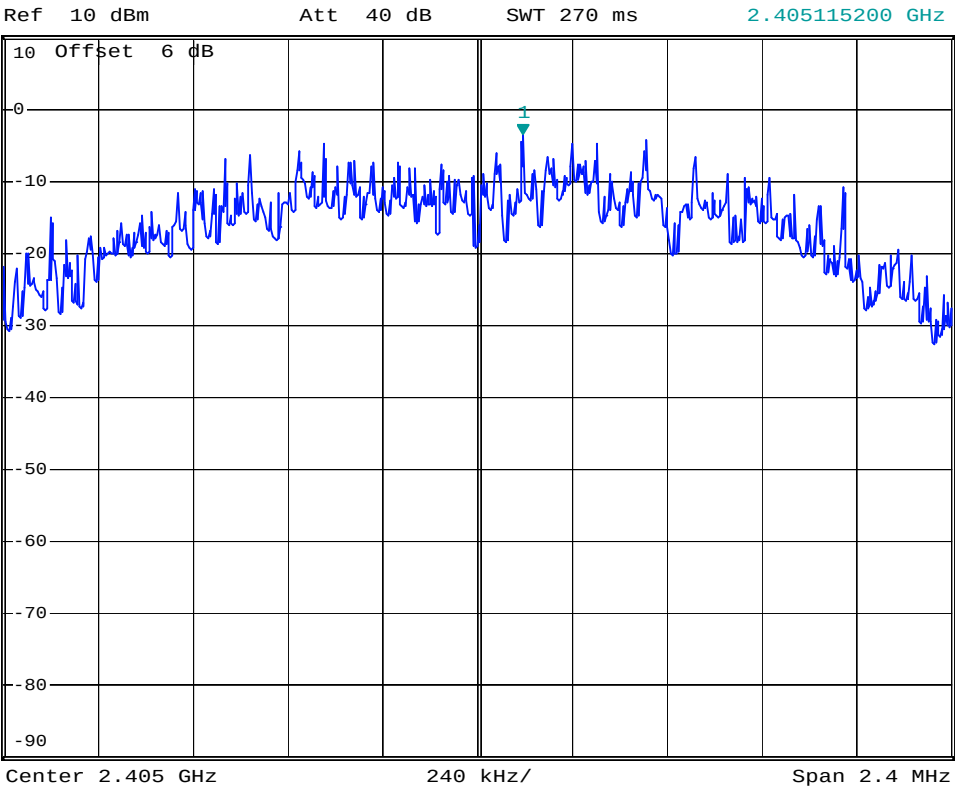

Mode: Channel Middle



\*RBW 3 kHz      Marker 1 [T1 ]  
VBW 10 kHz      -2.78 dBm  
SWT 270 ms      2.444548800 GHz

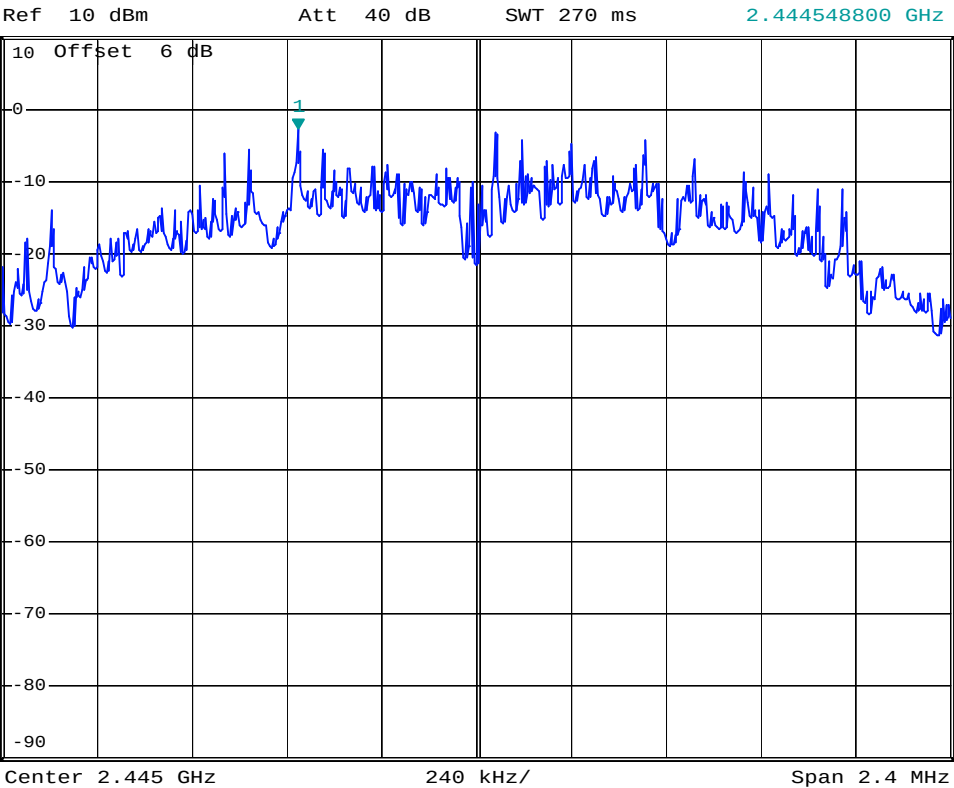

Mode: Channel High



\* RBW 3 kHz

Marker 1 [T1 ]

VBW 10 kHz


-1.52 dBm

SWT 270 ms

2.480048000 GHz

Ref 10 dBm

Att 40 dB

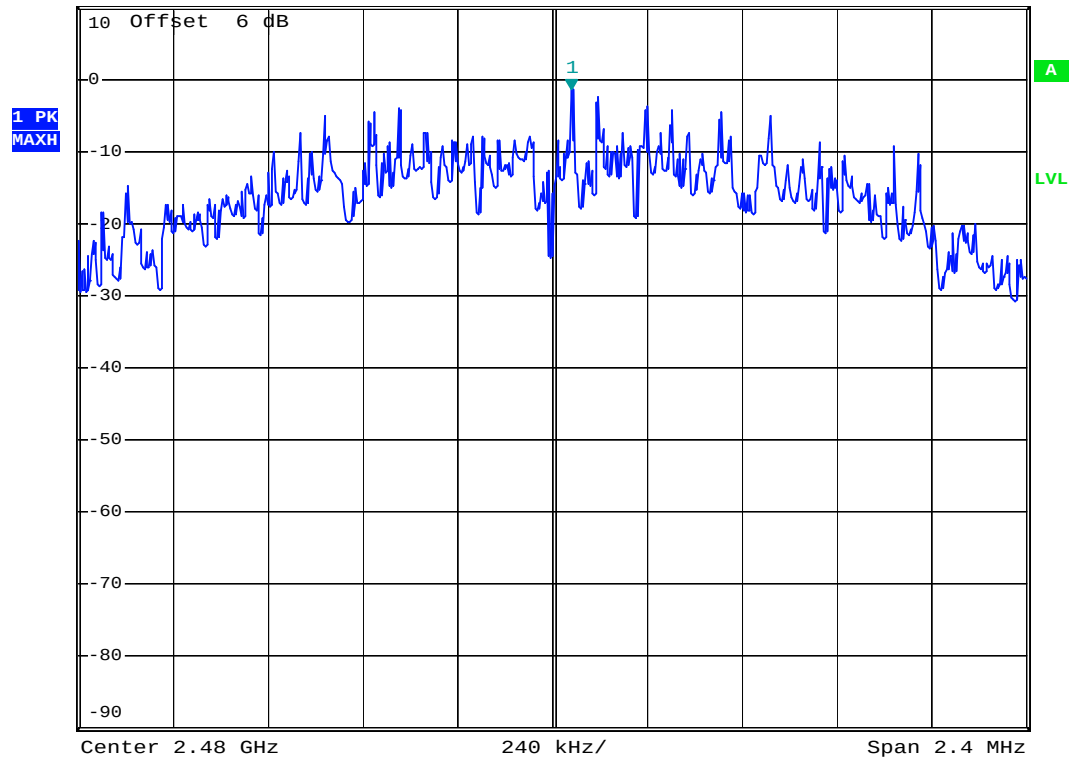

## 11. OUT-OF-BAND CONDUCTED EMISSION MEASUREMENT

### 11.1 Standard Applicable

According to 15.247(c), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

### 11.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.

3. Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold.

4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all measured frequencies were complete.

### 11.3 Measurement Equipment

| Equipment         | Manufacturer    | Model No. | Calibration Date | Next Cal. Date |
|-------------------|-----------------|-----------|------------------|----------------|
| Spectrum Analyzer | Rohde & Schwarz | FSP40     | 2016/10/03       | 2017/10/02     |
| Attenuator        | MINI-CIRCUITS   | BW-S10W2+ | 2016/09/30       | 2017/09/29     |




## 11.4 Measurement Data

Test Date : Nov. 21, 2016      Temperature : 20 °C      Humidity : 65 %




**Mode: Channel Low, Mid, High**

30 MHz to 26.5 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.




***Note : The expanded uncertainty: 2dB.***

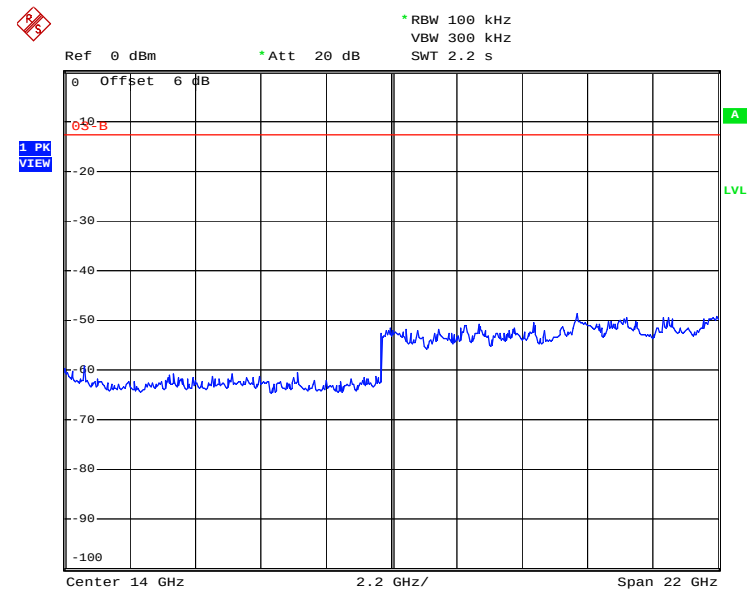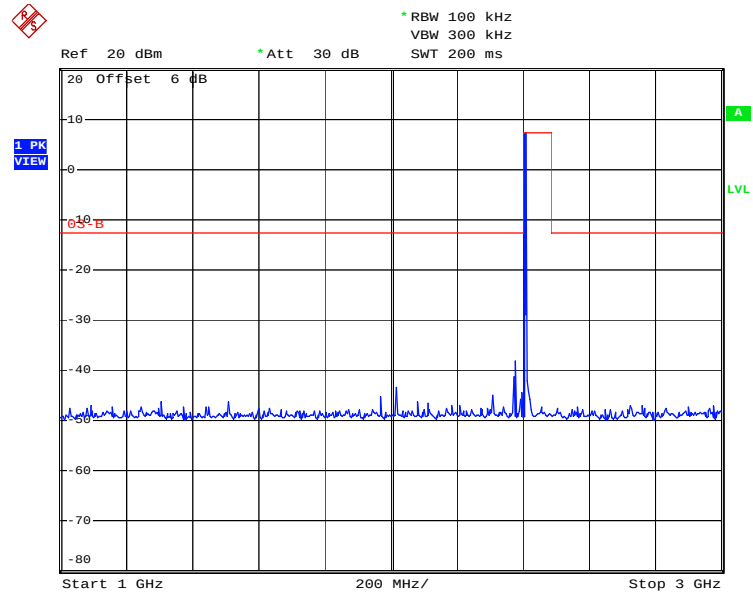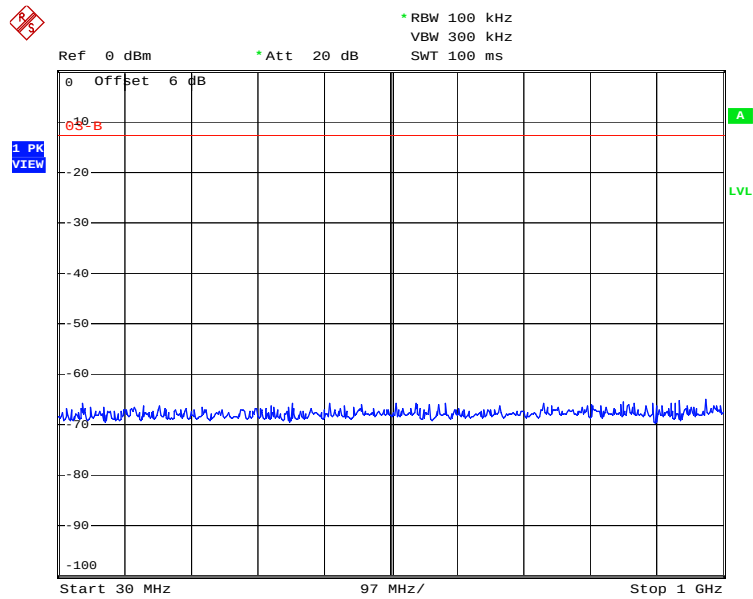**Channel Low**

## Channel Mid

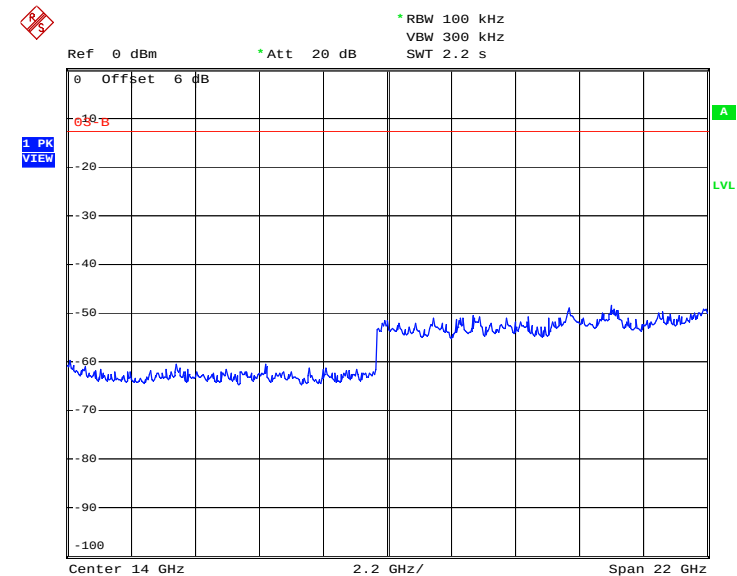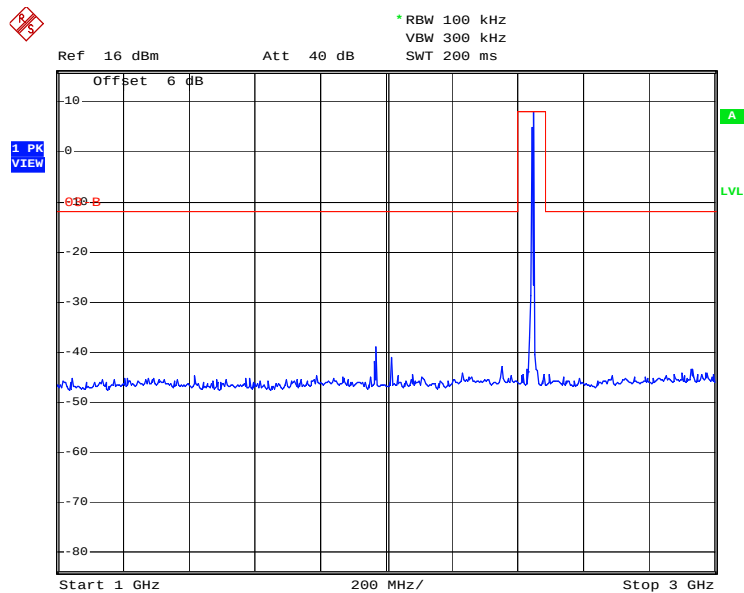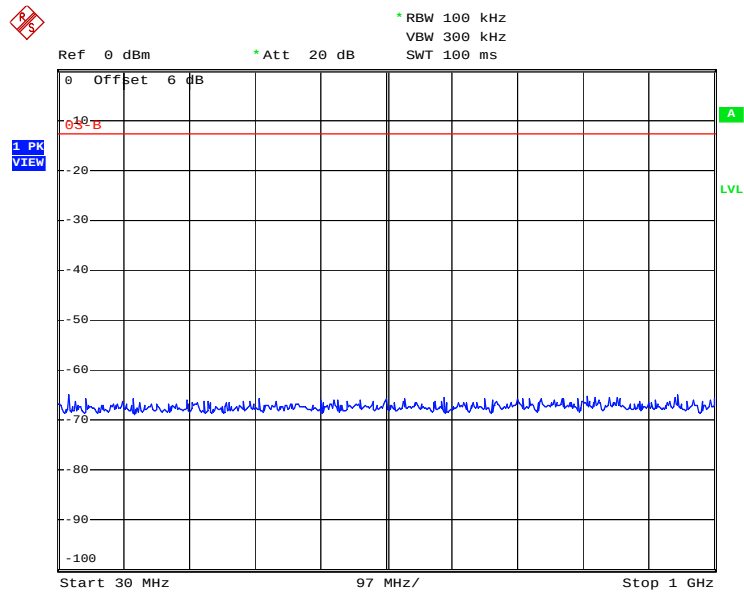

## Channel High

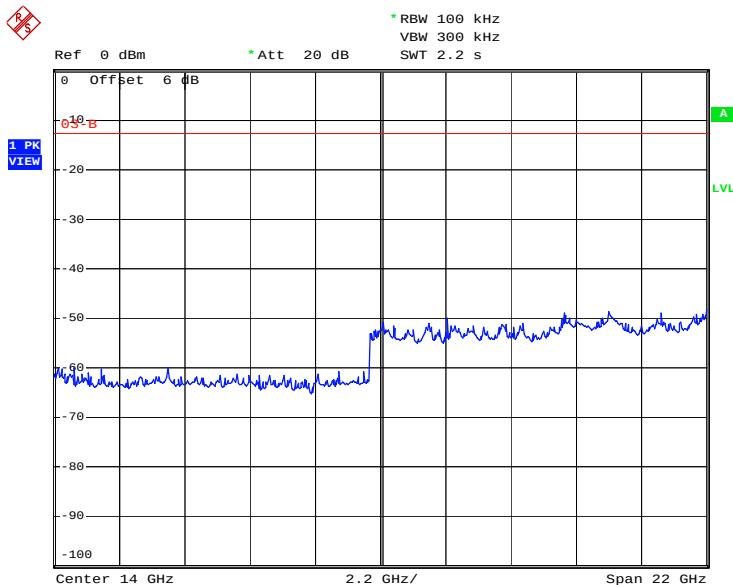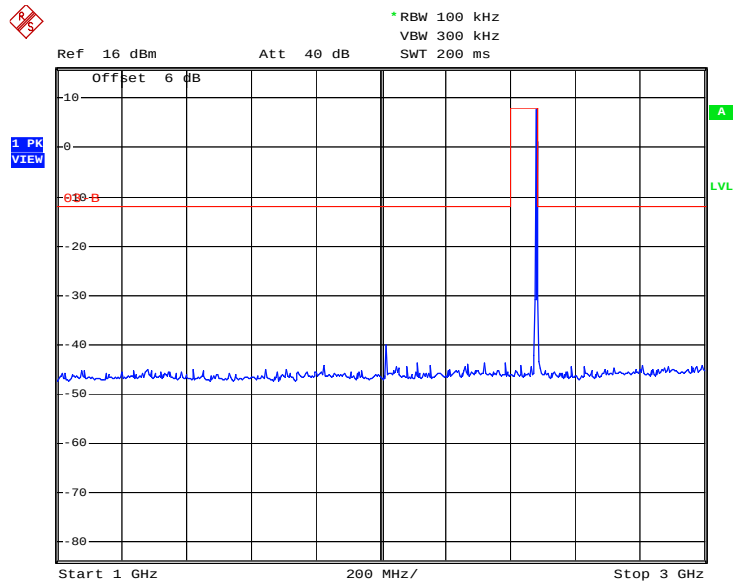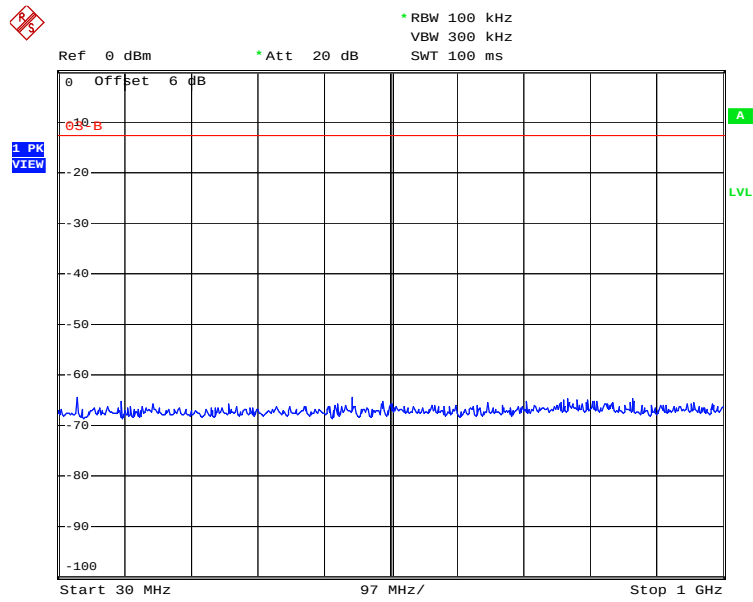

## 12. DUTY CYCLE

### 12.1 Standard Applicable


None. Reference only.

### 12.2 Measurement Equipment

| Equipment         | Manufacturer    | Model No. | Calibration Date | Next Cal. Date |
|-------------------|-----------------|-----------|------------------|----------------|
| Spectrum Analyzer | Rohde & Schwarz | FSP40     | 2016/10/03       | 2017/10/02     |
| Attenuator        | MINI-CIRCUITS   | BW-S10W2+ | 2016/09/30       | 2017/09/29     |

### 12.3 Measurement Data

Test Date : Nov. 21, 2016      Temperature : 20 °C      Humidity : 65 %

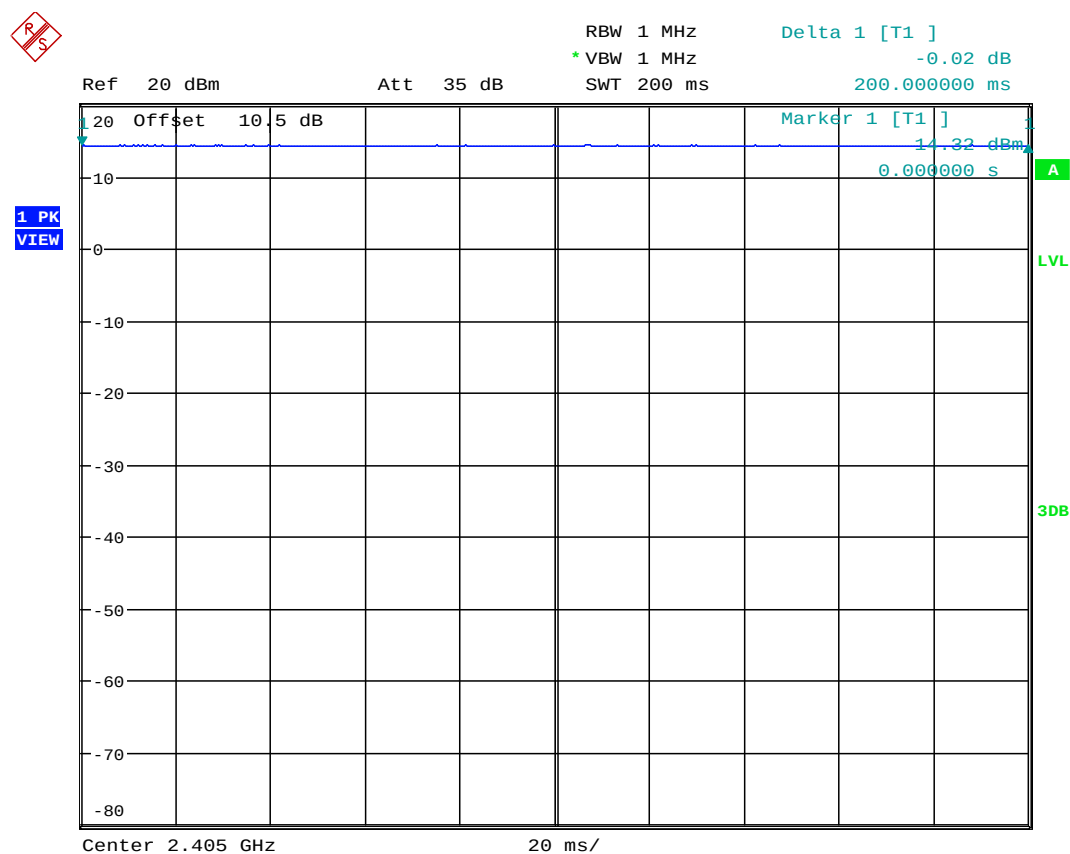

The EUT set for test with the continuous transmission mode and the duty cycle >98%.