

Test Plot 1#: GSM 850_Head Left Cheek_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.469$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.90, 9.90, 9.90) @836.6 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0763 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.503 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.0730 W/kg

SAR(1 g) = 0.064 W/kg; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.0700 W/kg

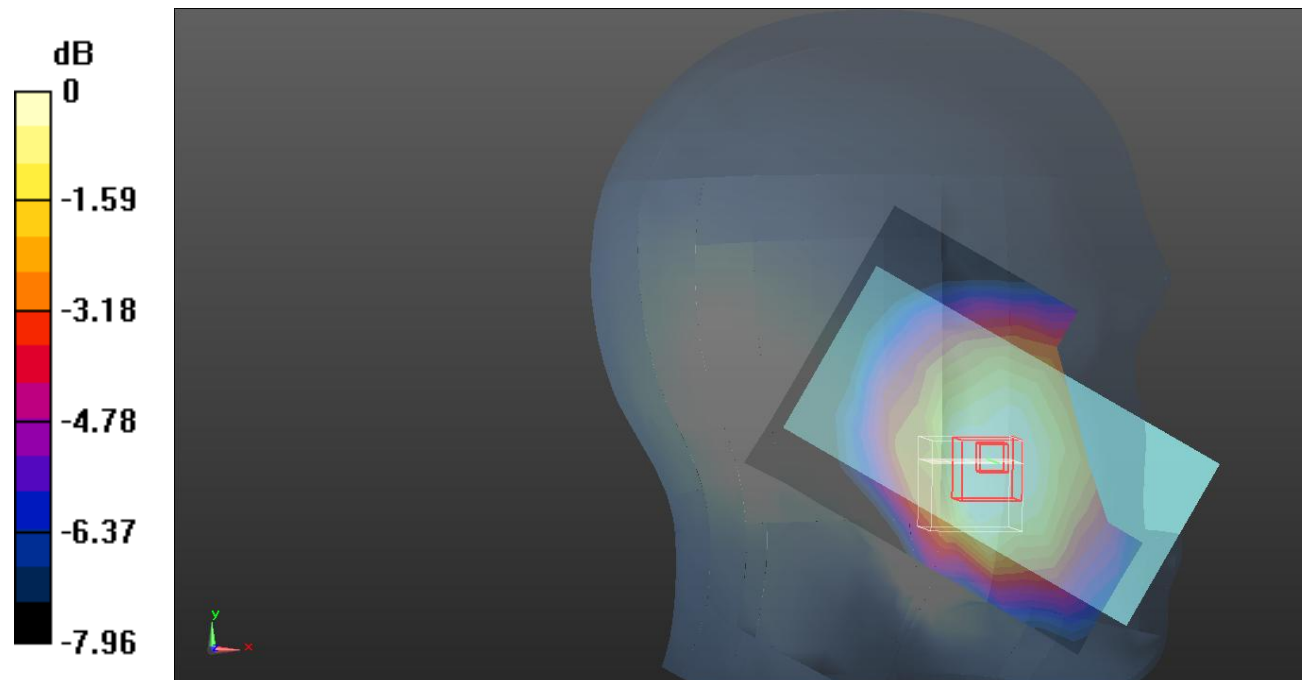

0 dB = 0.0700 W/kg = -11.55 dB dBW/kg

Test Plot 2#: GSM 850_Head Left Tilt_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.469$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.90, 9.90, 9.90) @836.6 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0543 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.711 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0530 W/kg

SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.036 W/kg

Maximum value of SAR (measured) = 0.0499 W/kg

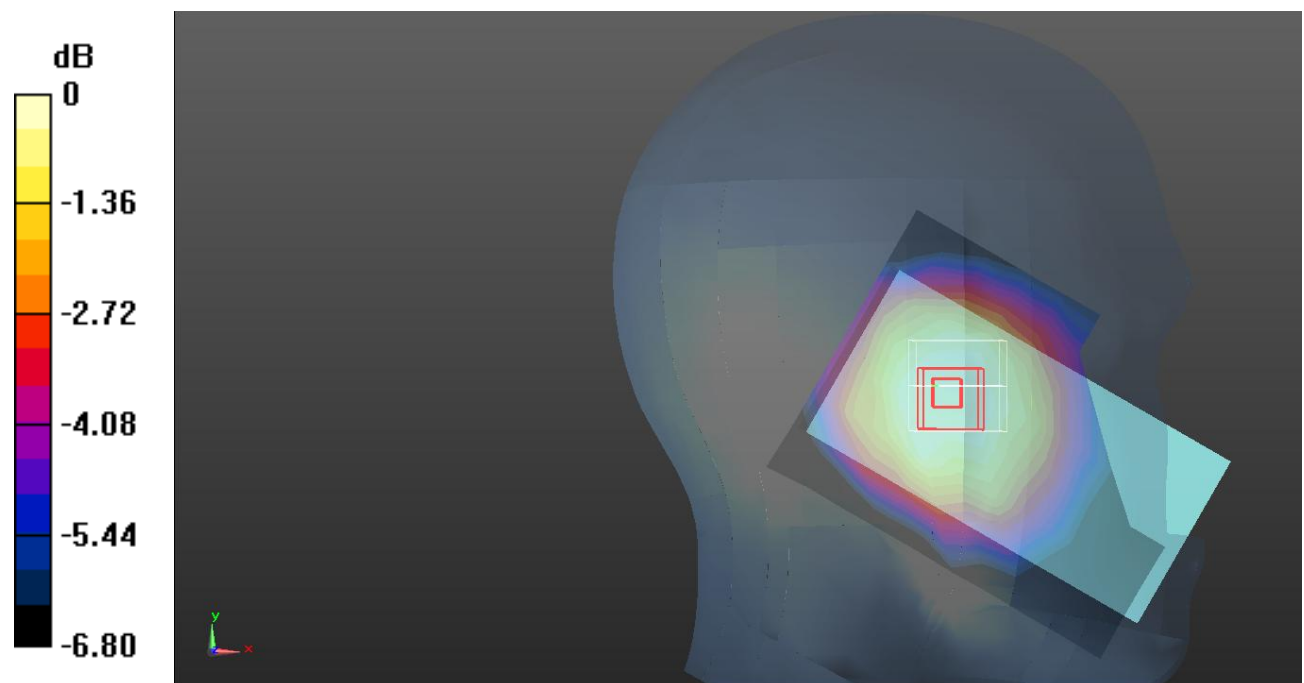

0 dB = 0.0499 W/kg = -13.02 dB dBW/kg

Test Plot 3#: GSM 850_Head Right Cheek_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.469$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.90, 9.90, 9.90) @836.6 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0701 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.964 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0780 W/kg

SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.049 W/kg

Maximum value of SAR (measured) = 0.0709 W/kg

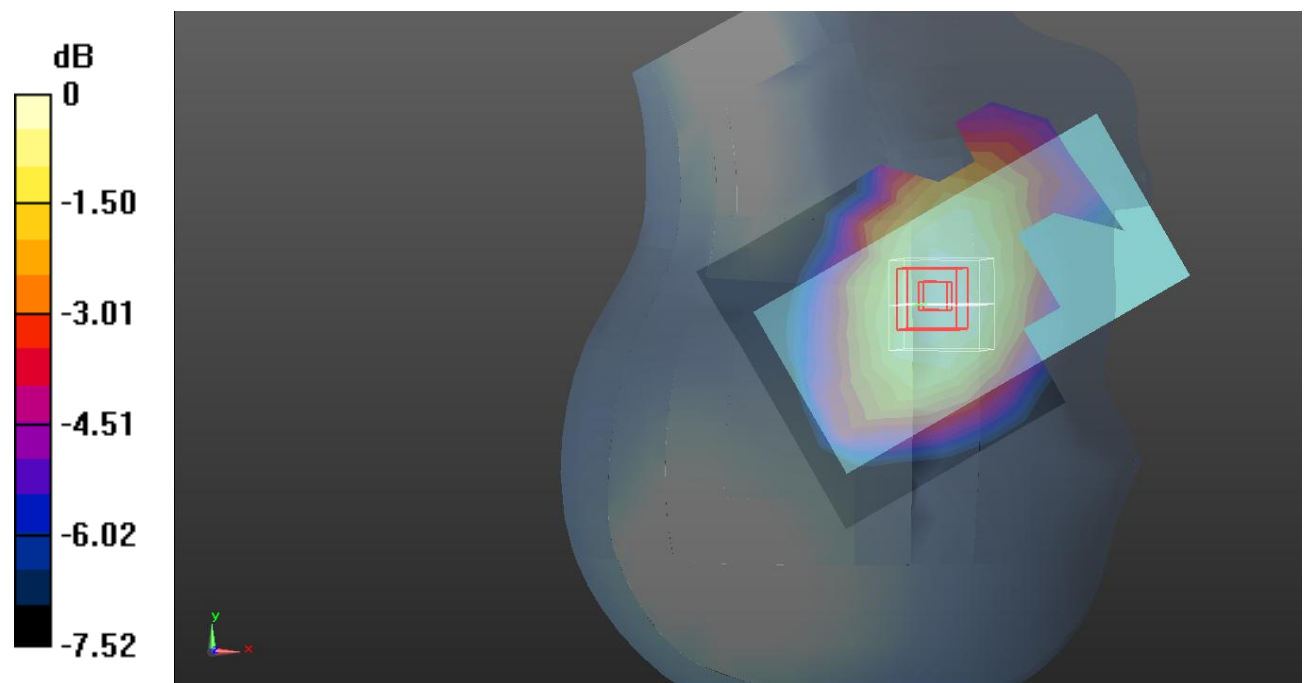

0 dB = 0.0709 W/kg = -11.49 dB dBW/kg

Test Plot 4#: GSM 850_Head Right Tilt_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.469$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.90, 9.90, 9.90) @836.6 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0378 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.246 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.0420 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.024 W/kg

Maximum value of SAR (measured) = 0.0377 W/kg

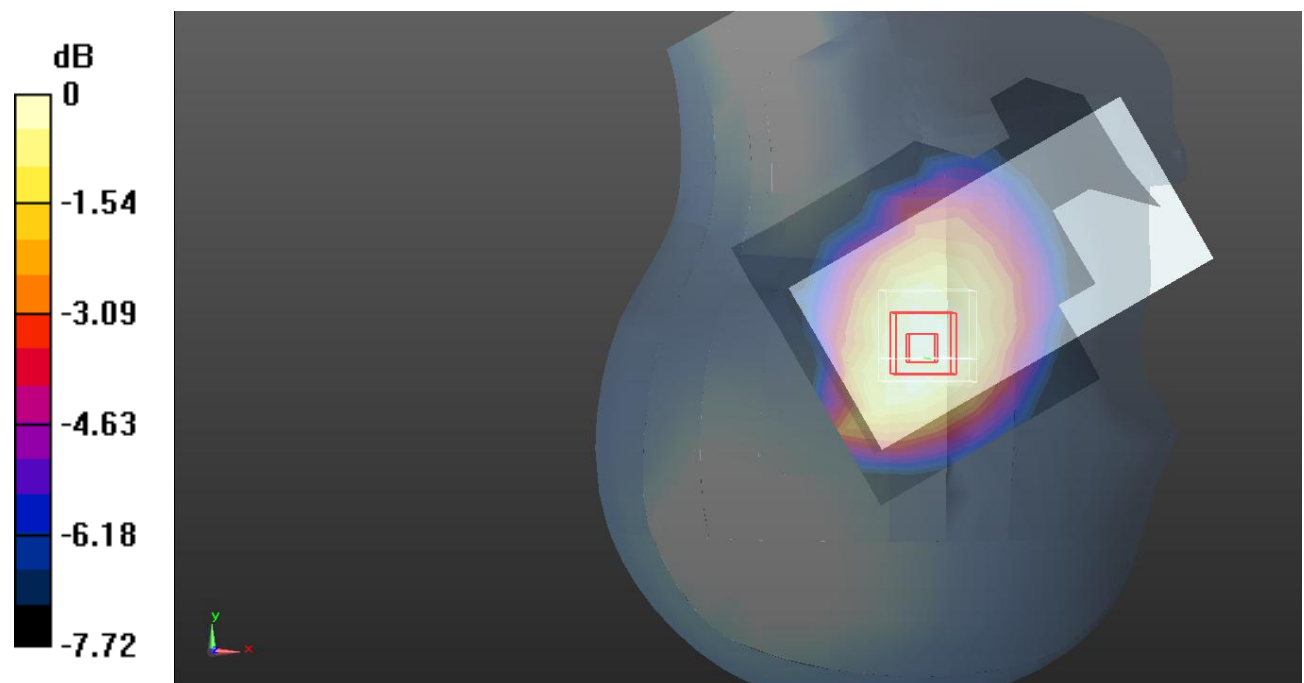

0 dB = 0.0377 W/kg = -14.24 dB dBW/kg

Test Plot 5#: GSM 850_Body Worn Back_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.469$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.90, 9.90, 9.90) @836.6 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.311 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.51 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.416 W/kg

SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.104 W/kg

Maximum value of SAR (measured) = 0.326 W/kg

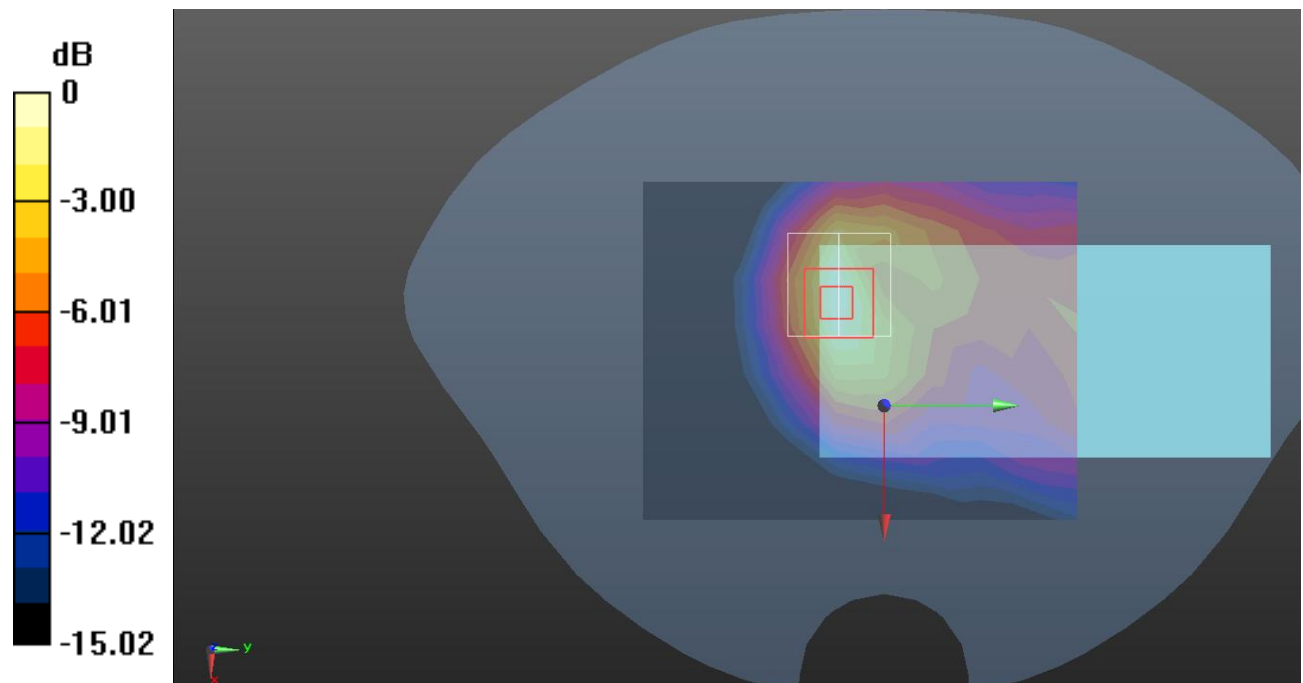

Test Plot 6#: GSM 850_Body Front_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic GPRS-4 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.469$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.90, 9.90, 9.90) @836.6 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.318 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.34 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.379 W/kg

SAR(1 g) = 0.255 W/kg; SAR(10 g) = 0.172 W/kg

Maximum value of SAR (measured) = 0.330 W/kg

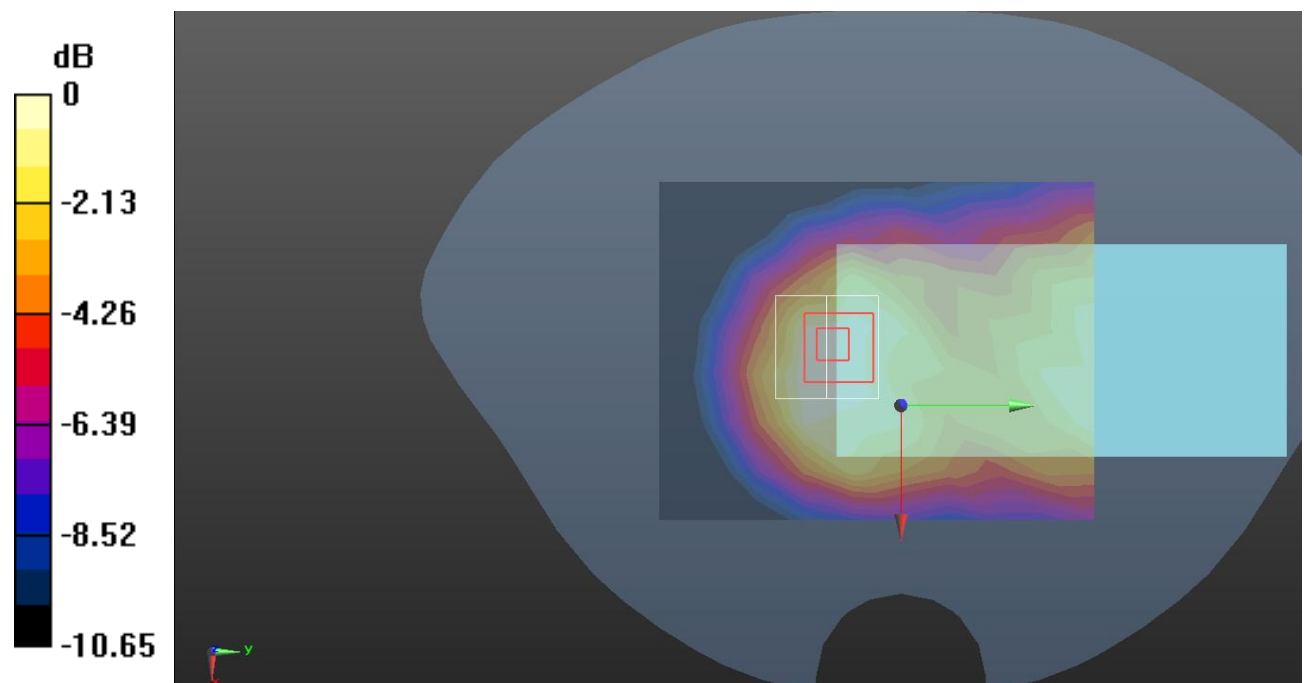

0 dB = 0.330 W/kg = -4.81 dB dBW/kg

Test Plot 7#: GSM 850_Body Back_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic GPRS-4 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.469$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.90, 9.90, 9.90) @836.6 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.25 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.16 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 0.586 W/kg; SAR(10 g) = 0.262 W/kg

Maximum value of SAR (measured) = 1.32 W/kg

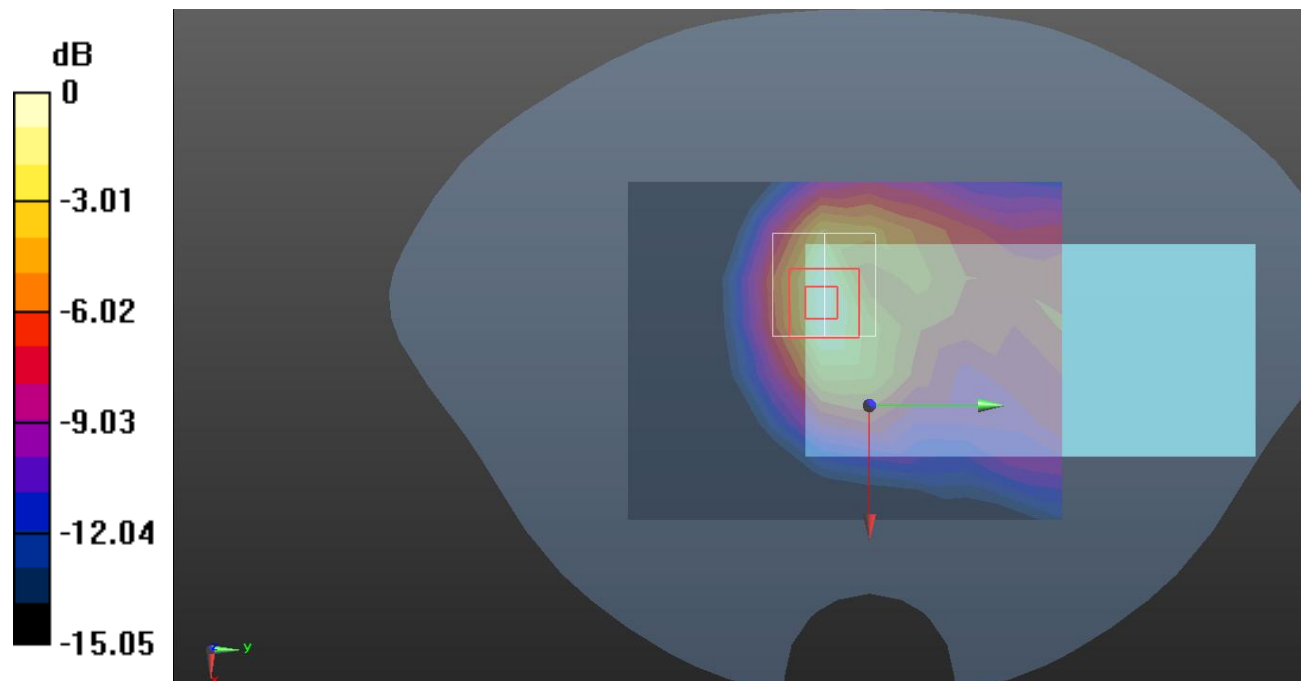

0 dB = 1.32 W/kg = 1.21 dB dBW/kg

Test Plot 8#: GSM 850_Body Left_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic GPRS-4 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.469$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.90, 9.90, 9.90) @836.6 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.187 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.30 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.190 W/kg

SAR(1 g) = 0.153 W/kg; SAR(10 g) = 0.113 W/kg

Maximum value of SAR (measured) = 0.177 W/kg

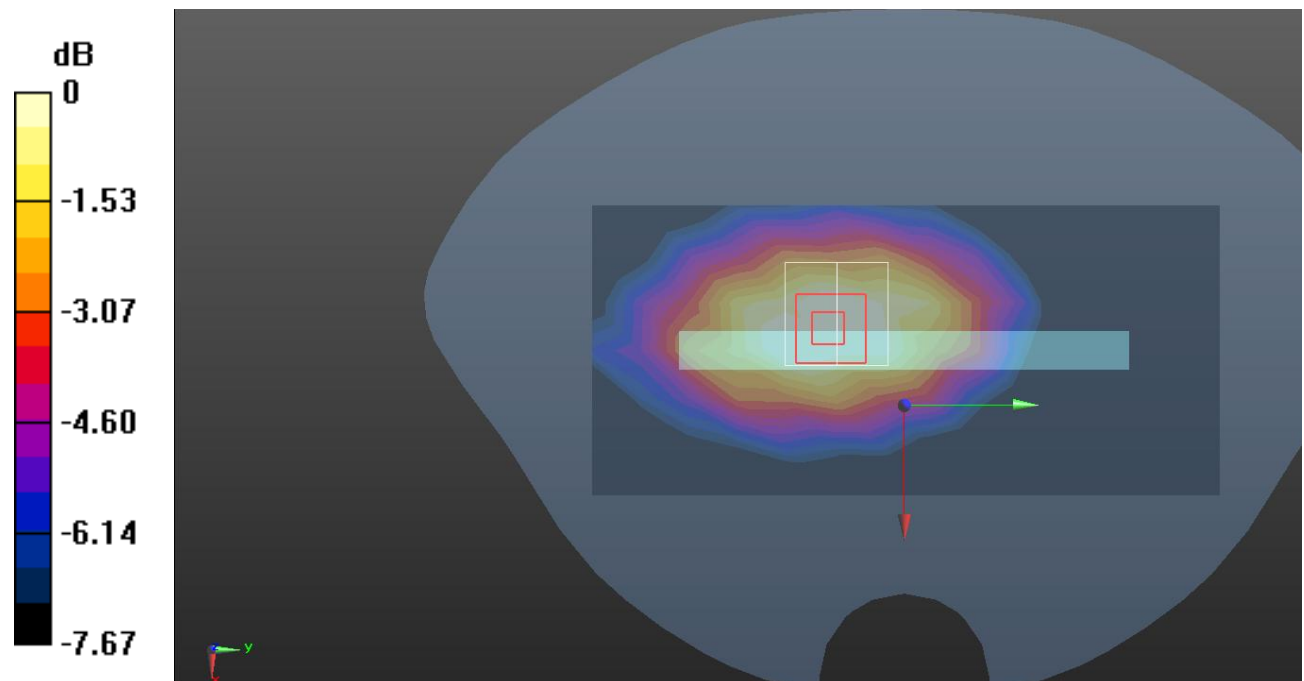

0 dB = 0.177 W/kg = -7.52 dB dBW/kg

Test Plot 9#: GSM 850_Body Right_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic GPRS-4 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.469$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.90, 9.90, 9.90) @836.6 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.515 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.49 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.470 W/kg

SAR(1 g) = 0.381 W/kg; SAR(10 g) = 0.282 W/kg

Maximum value of SAR (measured) = 0.446 W/kg

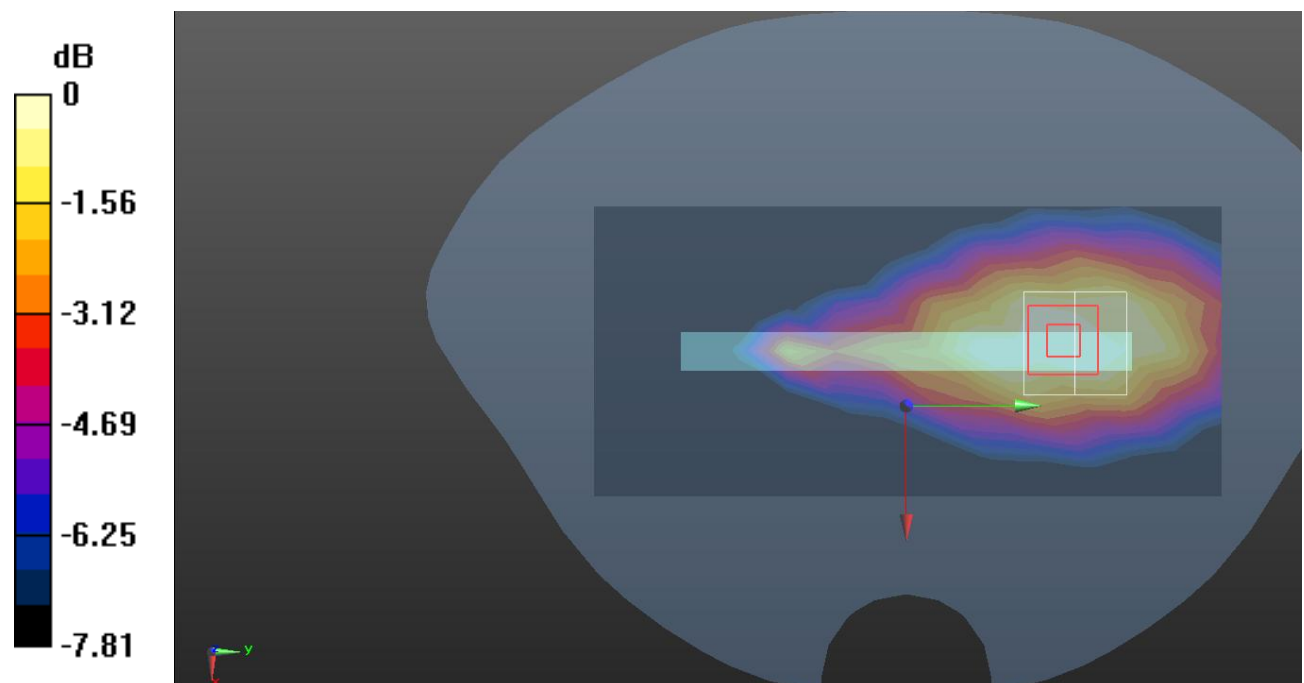

0 dB = 0.446 W/kg = -3.51 dB dBW/kg

Test Plot 10#: GSM 850_Body Bottom_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic GPRS-4 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.469$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.90, 9.90, 9.90) @836.6 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.532 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.83 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.612 W/kg

SAR(1 g) = 0.383 W/kg; SAR(10 g) = 0.220 W/kg

Maximum value of SAR (measured) = 0.518 W/kg

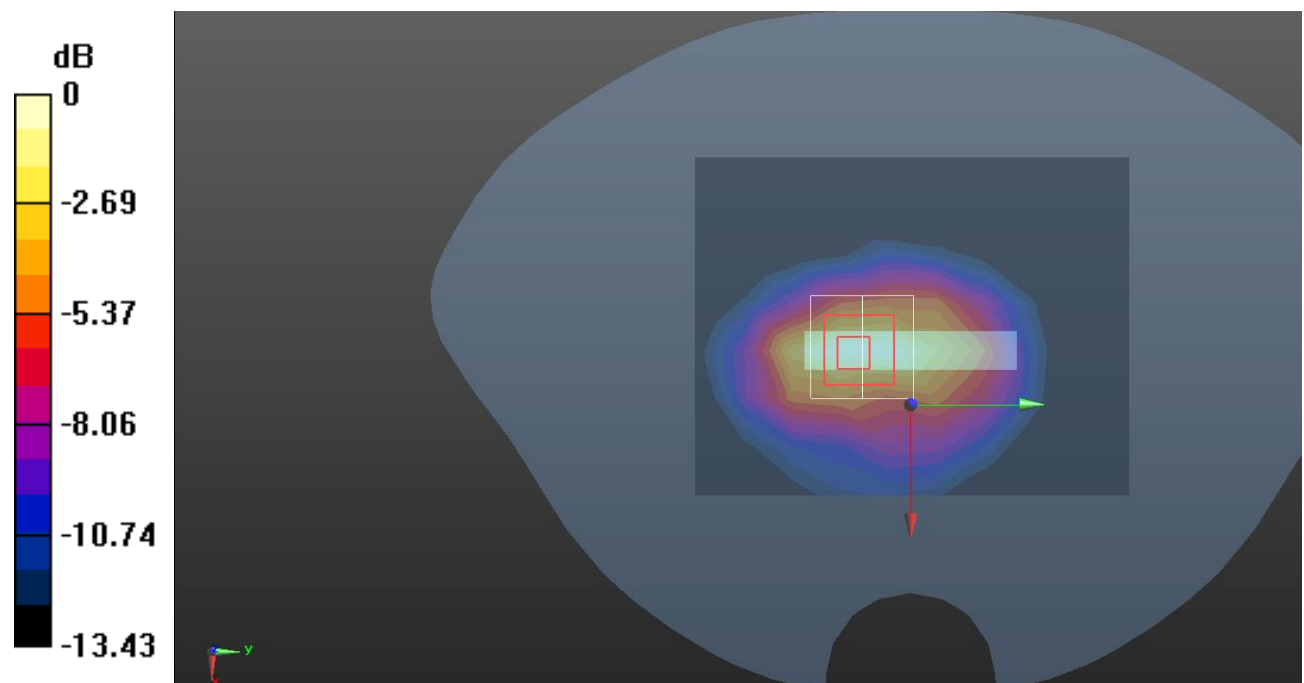

Test Plot 11#: PCS 1900_Head Left Cheek_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.336$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.534 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.49 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.727 W/kg

SAR(1 g) = 0.445 W/kg; SAR(10 g) = 0.240 W/kg

Maximum value of SAR (measured) = 0.637 W/kg

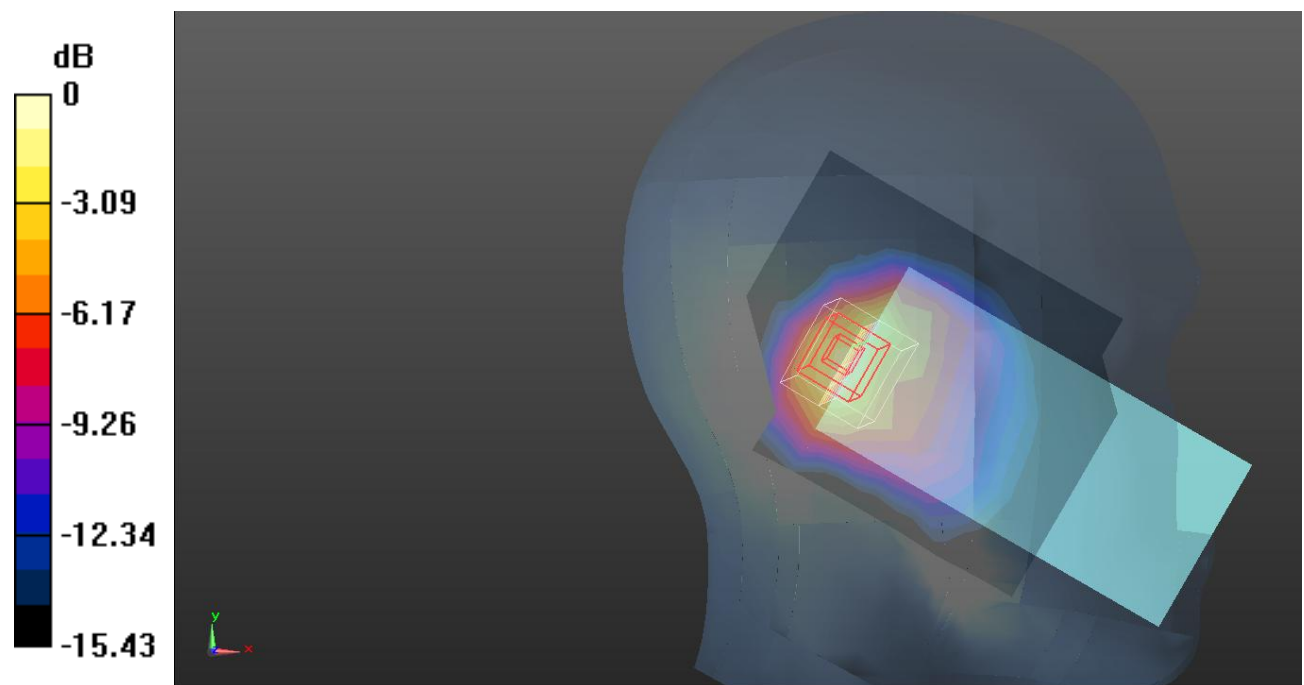

0 dB = 0.637 W/kg = -1.96 dB dBW/kg

Test Plot 12#: PCS 1900_Head Left Tilt_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.336$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.749 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.69 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.899 W/kg

SAR(1 g) = 0.545 W/kg; SAR(10 g) = 0.287 W/kg

Maximum value of SAR (measured) = 0.781 W/kg

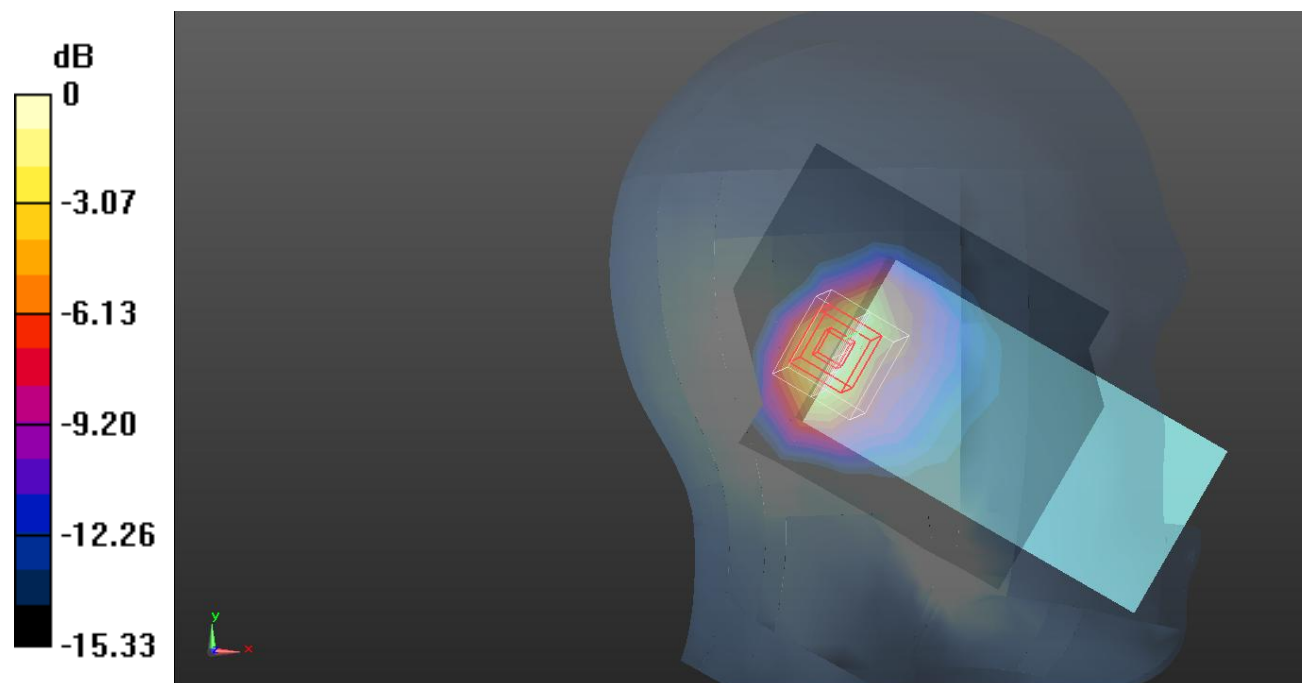

0 dB = 0.781 W/kg = -1.07 dB dBW/kg

Test Plot 13#: PCS 1900_Head Right Cheek_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.336$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.501 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.50 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.942 W/kg

SAR(1 g) = 0.576 W/kg; SAR(10 g) = 0.296 W/kg

Maximum value of SAR (measured) = 0.842 W/kg

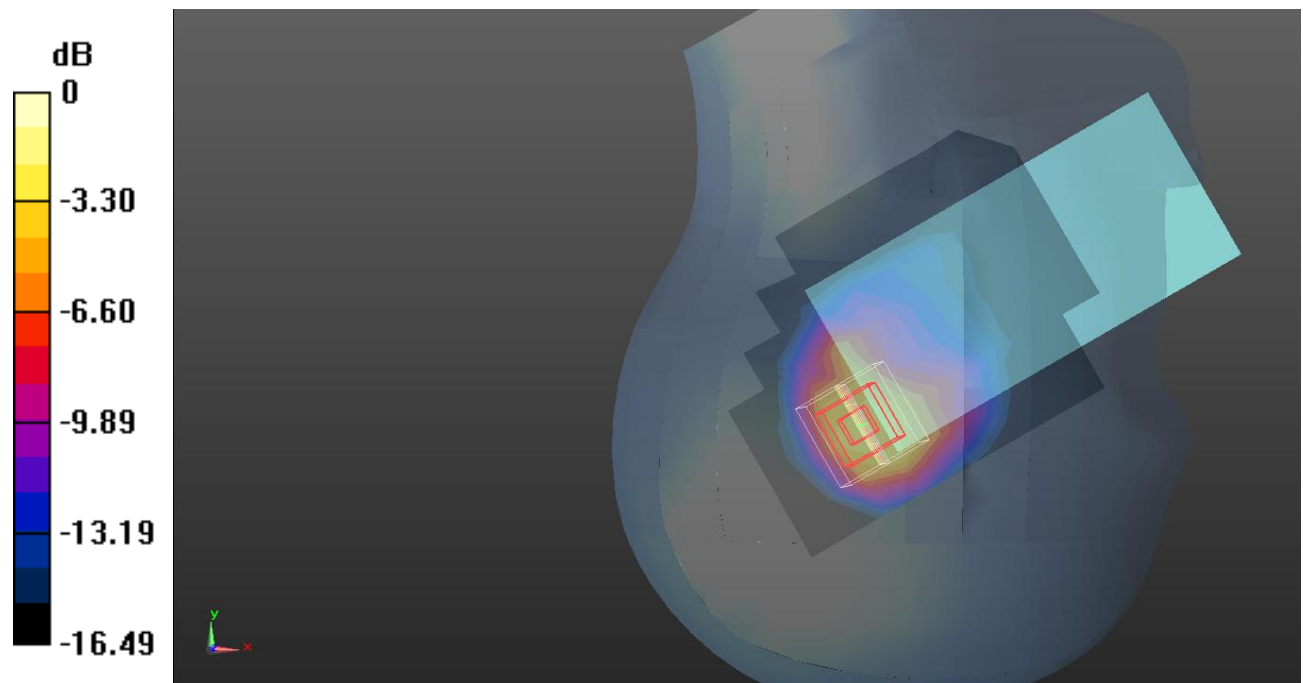

0 dB = 0.842 W/kg = -0.75 dB dBW/kg

Test Plot 14#: PCS 1900_Head Right Tilt_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.336$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.830 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.420 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.694 W/kg; SAR(10 g) = 0.351 W/kg

Maximum value of SAR (measured) = 0.993 W/kg

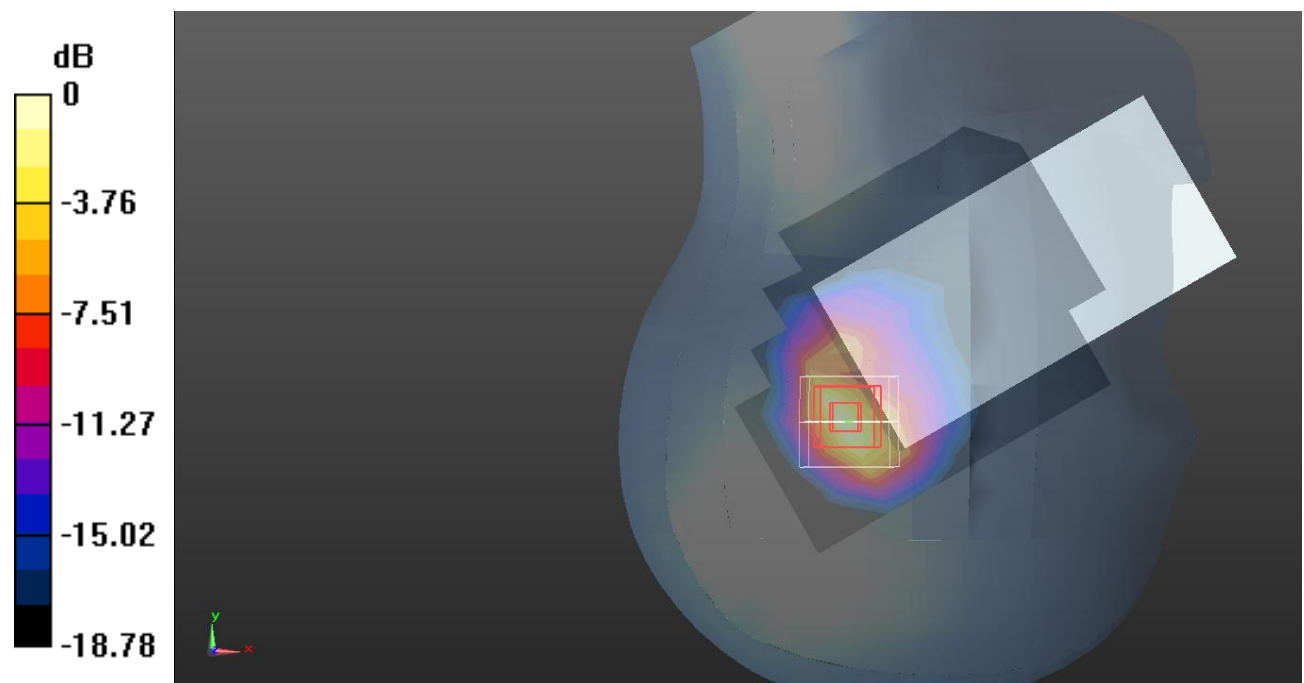

0 dB = 0.993 W/kg = -0.03 dB dBW/kg

Test Plot 15#: PCS 1900_Body Worn Back_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.336$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.260 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.050 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.307 W/kg

SAR(1 g) = 0.198 W/kg; SAR(10 g) = 0.114 W/kg

Maximum value of SAR (measured) = 0.271 W/kg

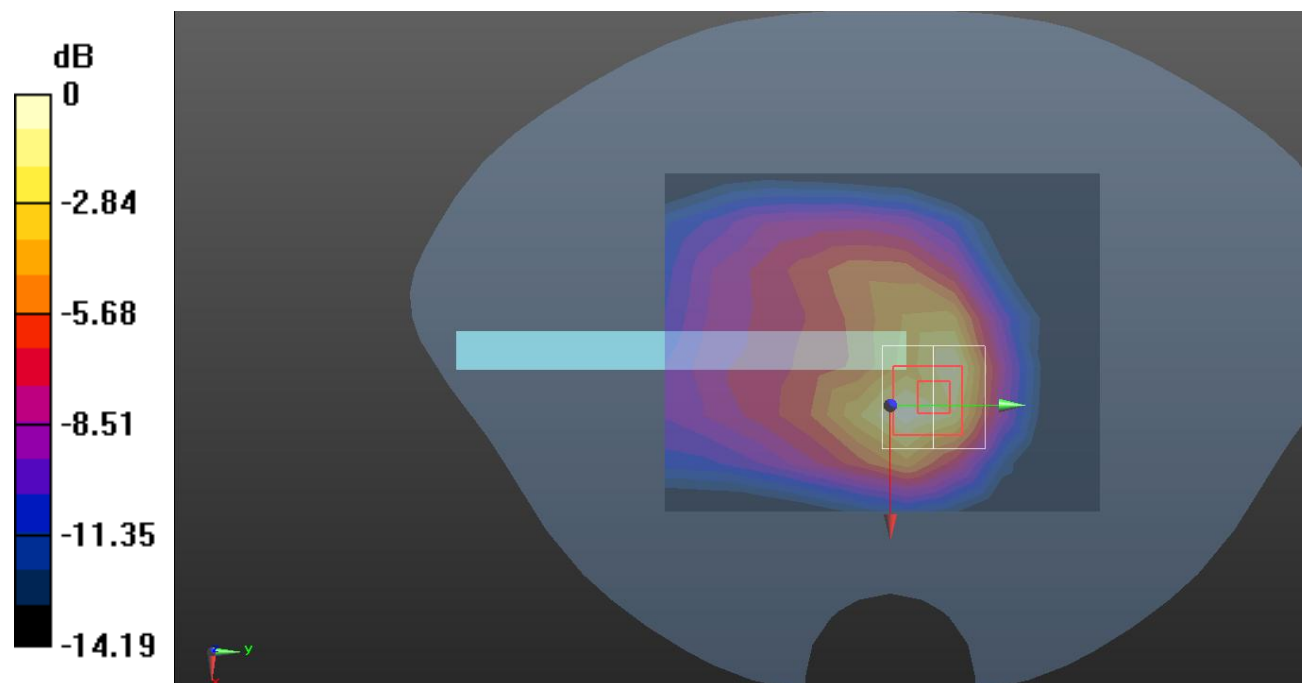

0 dB = 0.271 W/kg = -5.67 dB dBW/kg

Test Plot 16#: PCS 1900_Body Front_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.336$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.725 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.27 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.686 W/kg; SAR(10 g) = 0.387 W/kg

Maximum value of SAR (measured) = 0.916 W/kg

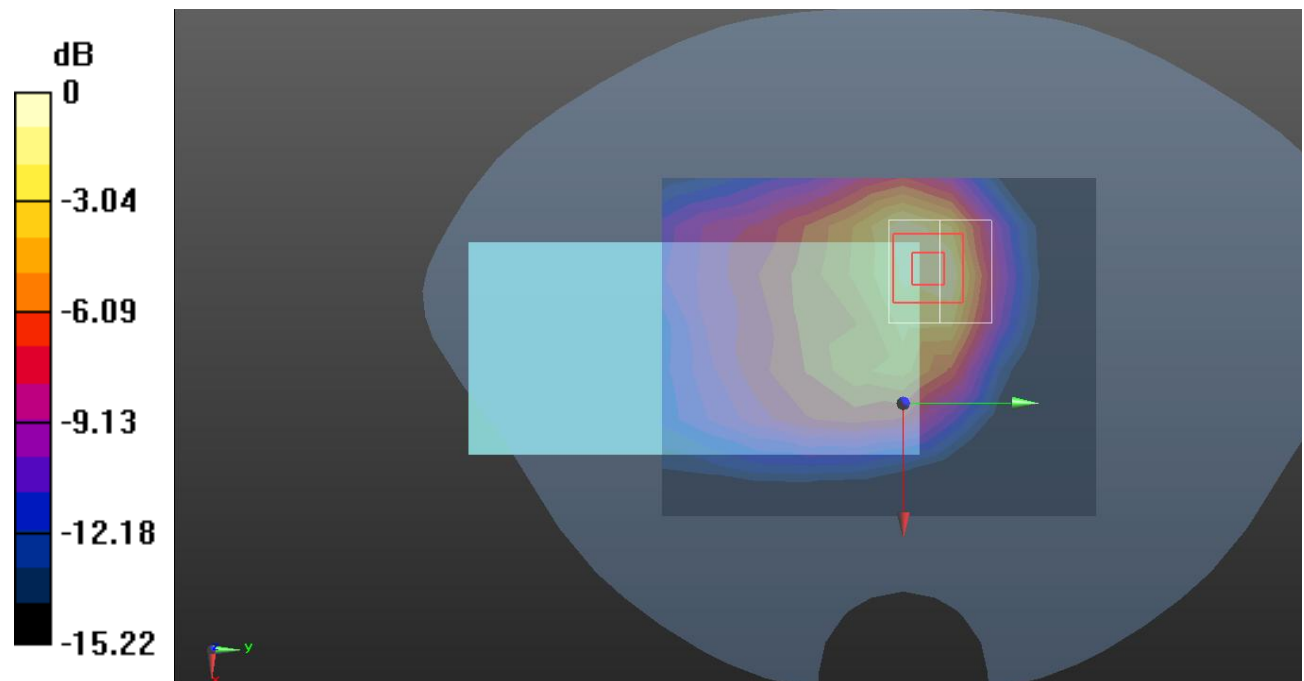

0 dB = 0.916 W/kg = -0.38 dB dBW/kg

Test Plot 17#: PCS 1900_Body Back_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.336$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.925 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.38 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.713 W/kg; SAR(10 g) = 0.406 W/kg

Maximum value of SAR (measured) = 1.02 W/kg

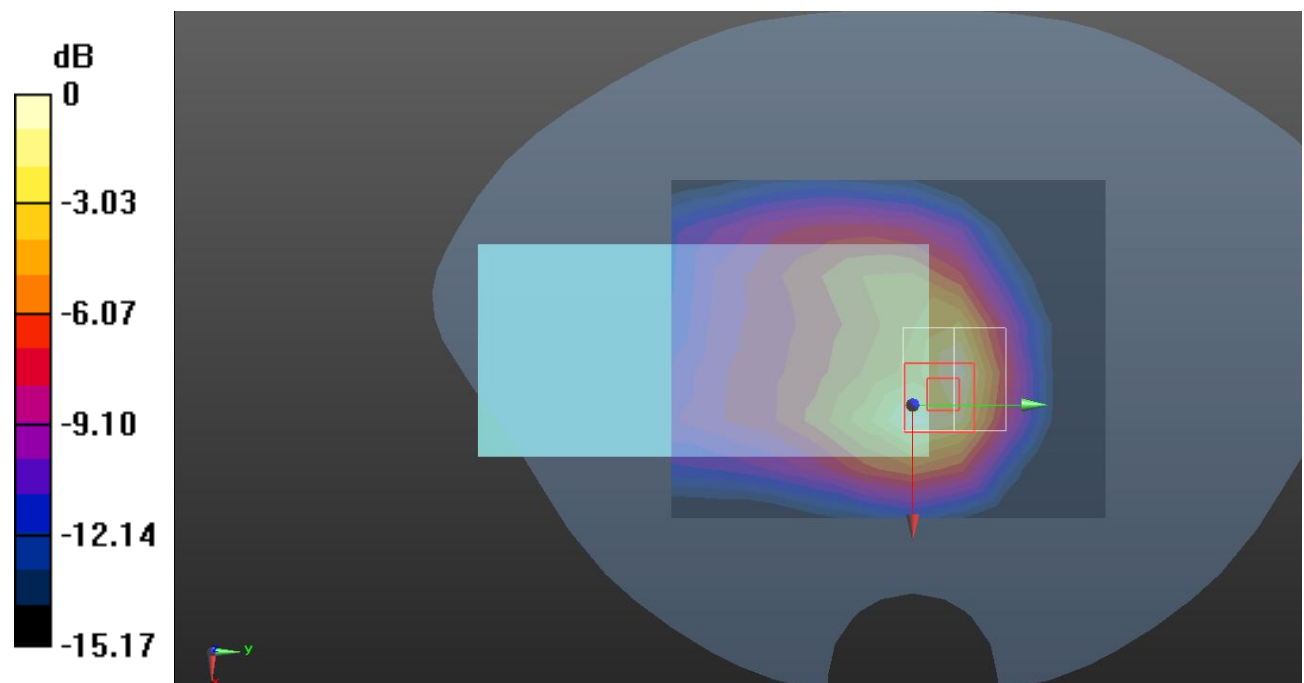

0 dB = 1.02 W/kg = 0.09 dB dBW/kg

Test Plot 18#: PCS 1900_Body Left_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.336$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0628 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.650 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0800 W/kg

SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 0.0730 W/kg

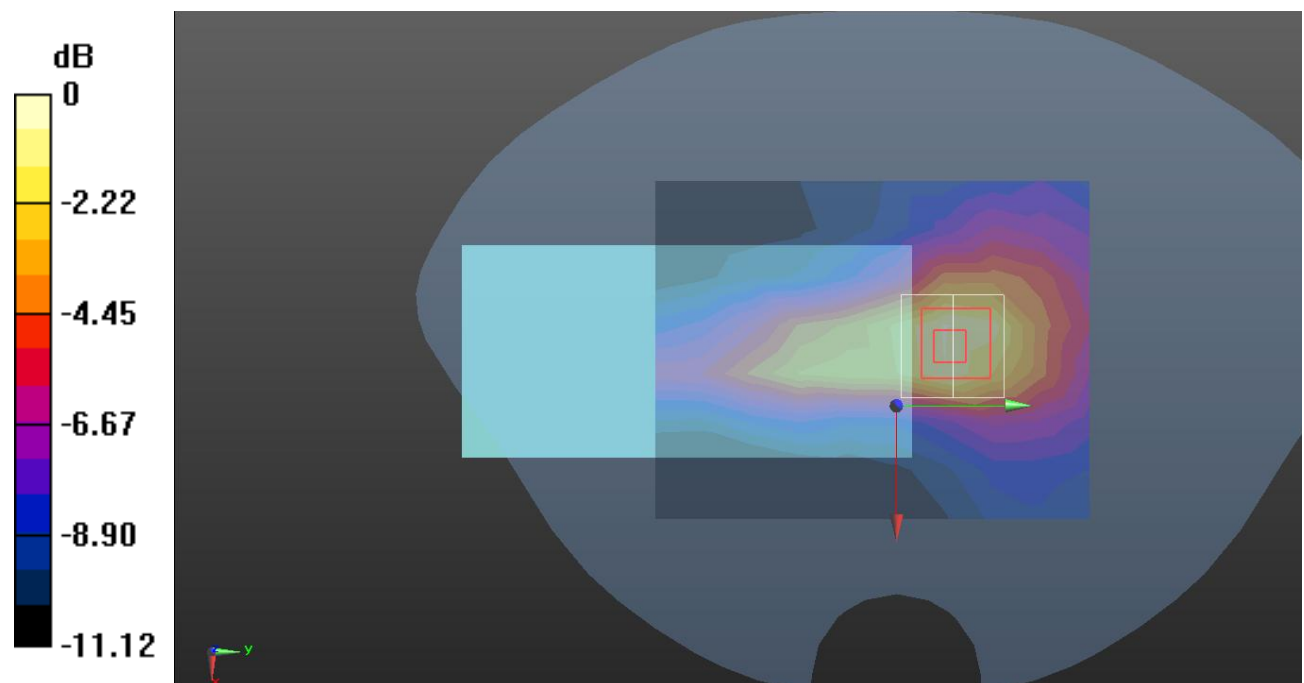

0 dB = 0.0730 W/kg = -11.37 dB dBW/kg

Test Plot 19#: PCS 1900_Body Top_Low**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic GPRS-4 slots (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2
Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 39.373$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1850.2 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.741 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.22 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.811 W/kg; SAR(10 g) = 0.448 W/kg

Maximum value of SAR (measured) = 1.12 W/kg

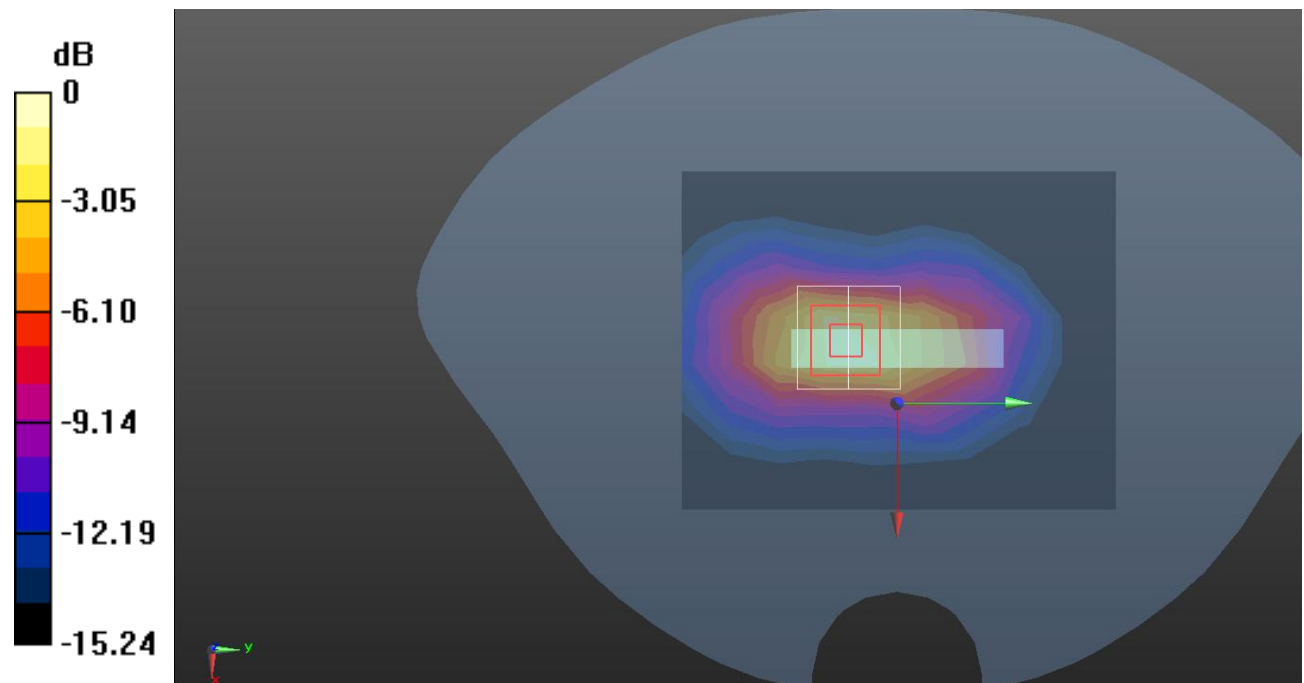

0 dB = 1.12 W/kg = 0.49 dB dBW/kg

Test Plot 20#: PCS 1900_Body Top_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.414 \text{ S/m}$; $\epsilon_r = 40.336$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.795 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.22 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.864 W/kg; SAR(10 g) = 0.471 W/kg

Maximum value of SAR (measured) = 1.22 W/kg

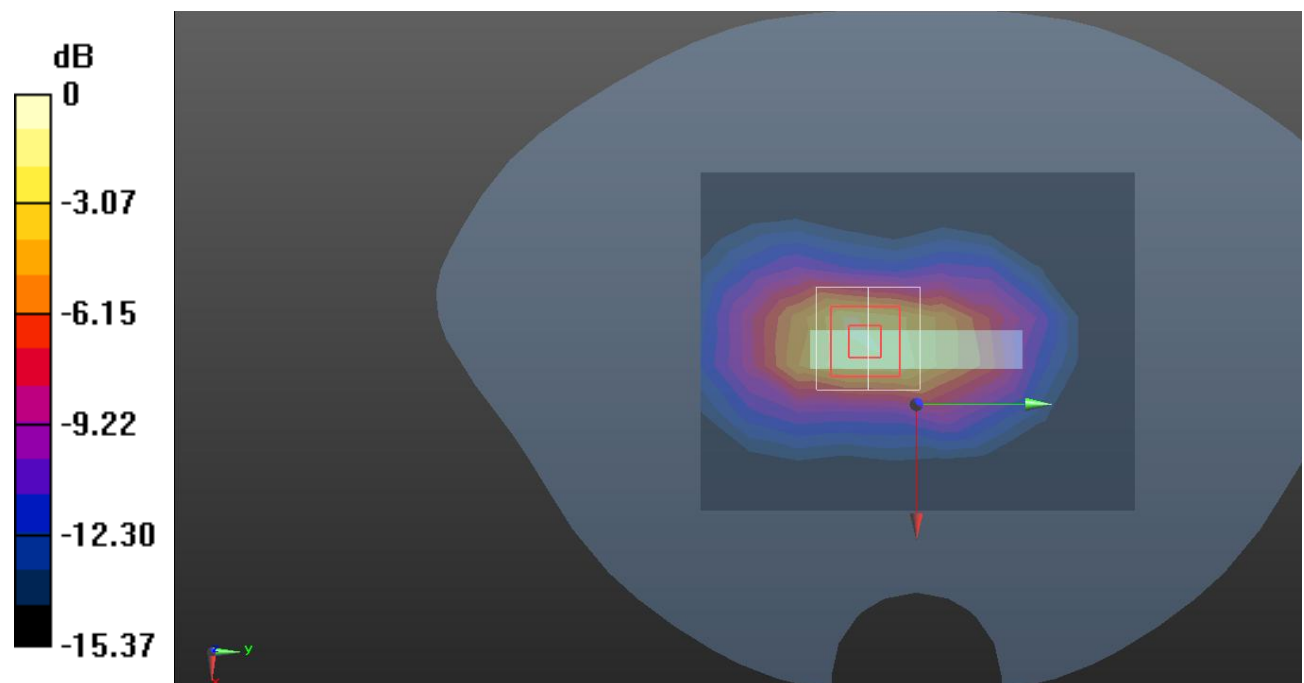

0 dB = 1.22 W/kg = 0.86 dB dBW/kg

Test Plot 21#: PCS 1900_Body Top_High**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic GPRS-4 slots (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2
Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 39.562$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1909.8 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.956 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.40 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.91 W/kg; SAR(10 g) = 0.452 W/kg

Maximum value of SAR (measured) = 1.45 W/kg

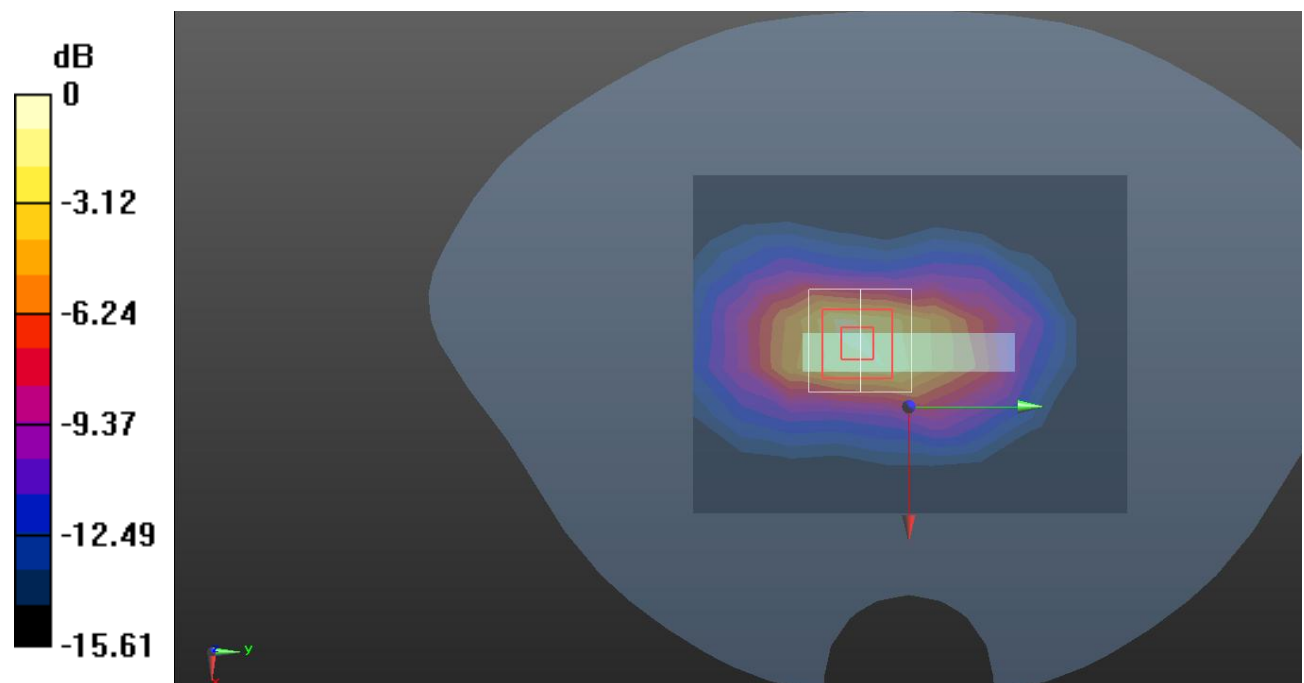

Test Plot 22#: WCDMA Band 2_Head Left Cheek_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.336$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.820 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.56 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.603 W/kg; SAR(10 g) = 0.320 W/kg

Maximum value of SAR (measured) = 0.886 W/kg

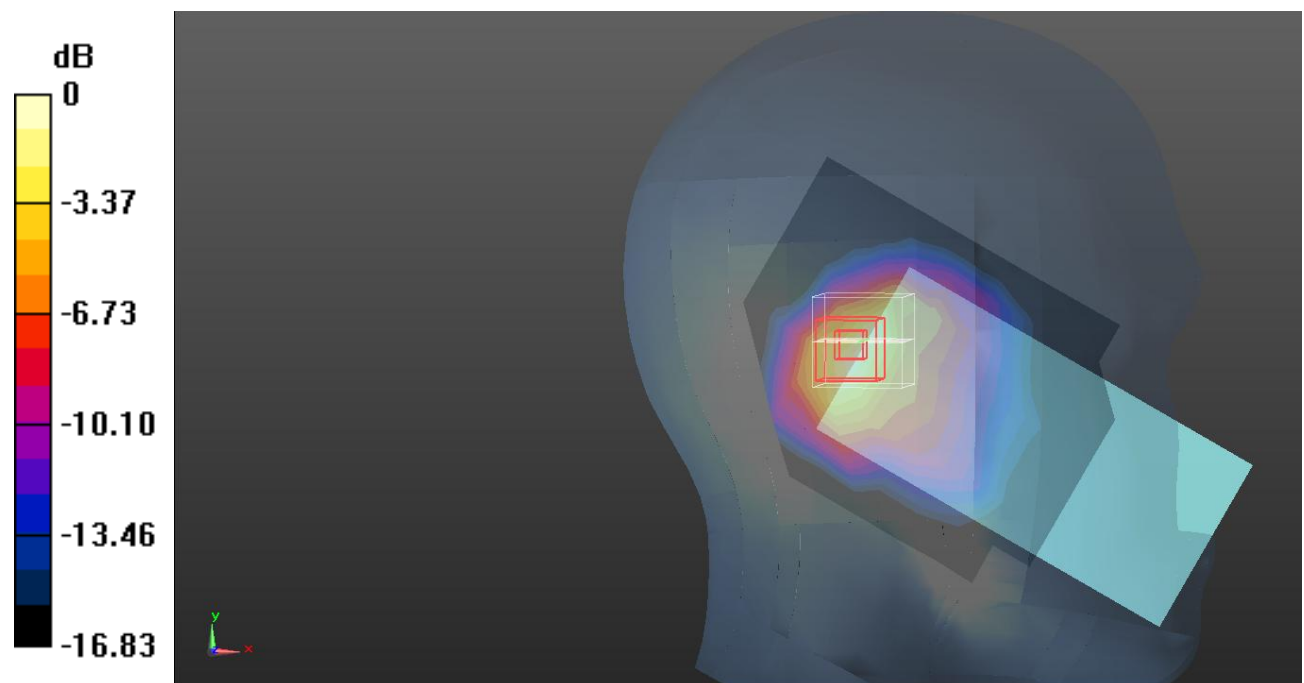

0 dB = 0.886 W/kg = -0.53 dB dBW/kg

Test Plot 23#: WCDMA Band 2_Head Left Tilt_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.336$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.918 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.31 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.660 W/kg; SAR(10 g) = 0.318 W/kg

Maximum value of SAR (measured) = 1.04 W/kg

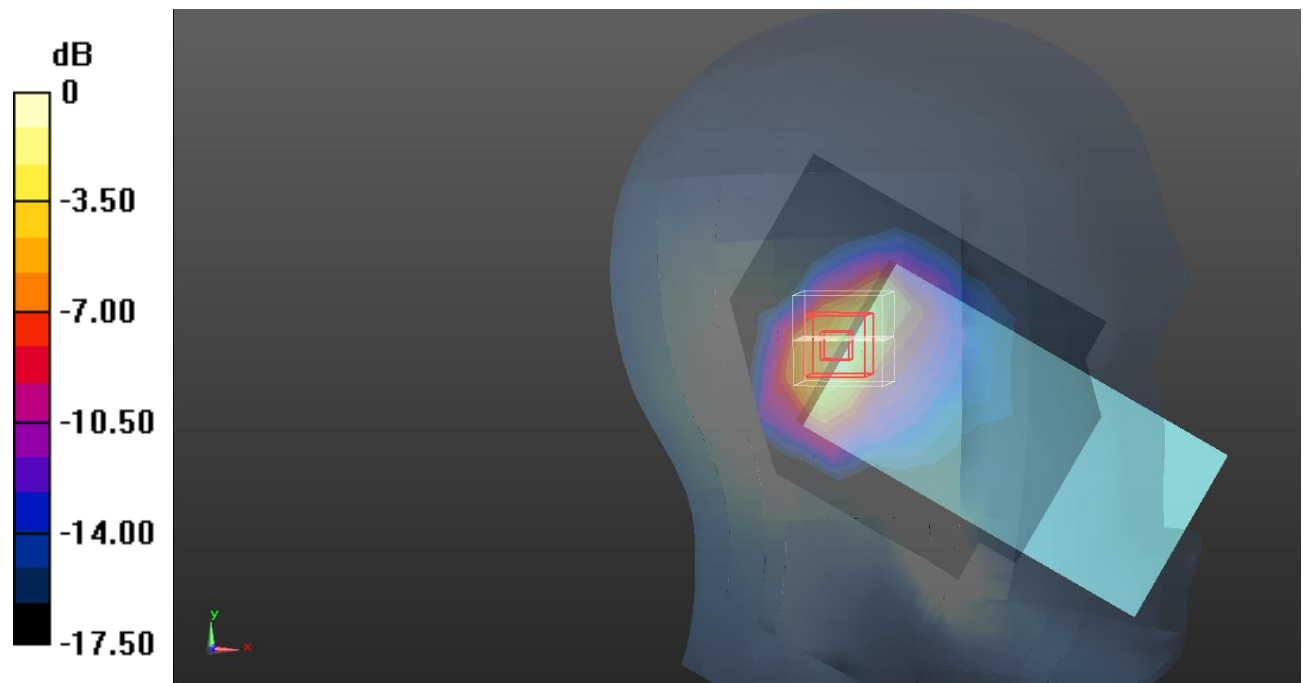

0 dB = 1.04 W/kg = 0.17 dB dBW/kg

Test Plot 24#: WCDMA Band 2_Head Right Cheek_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.336$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.746 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.20 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.710 W/kg; SAR(10 g) = 0.336 W/kg

Maximum value of SAR (measured) = 1.14 W/kg

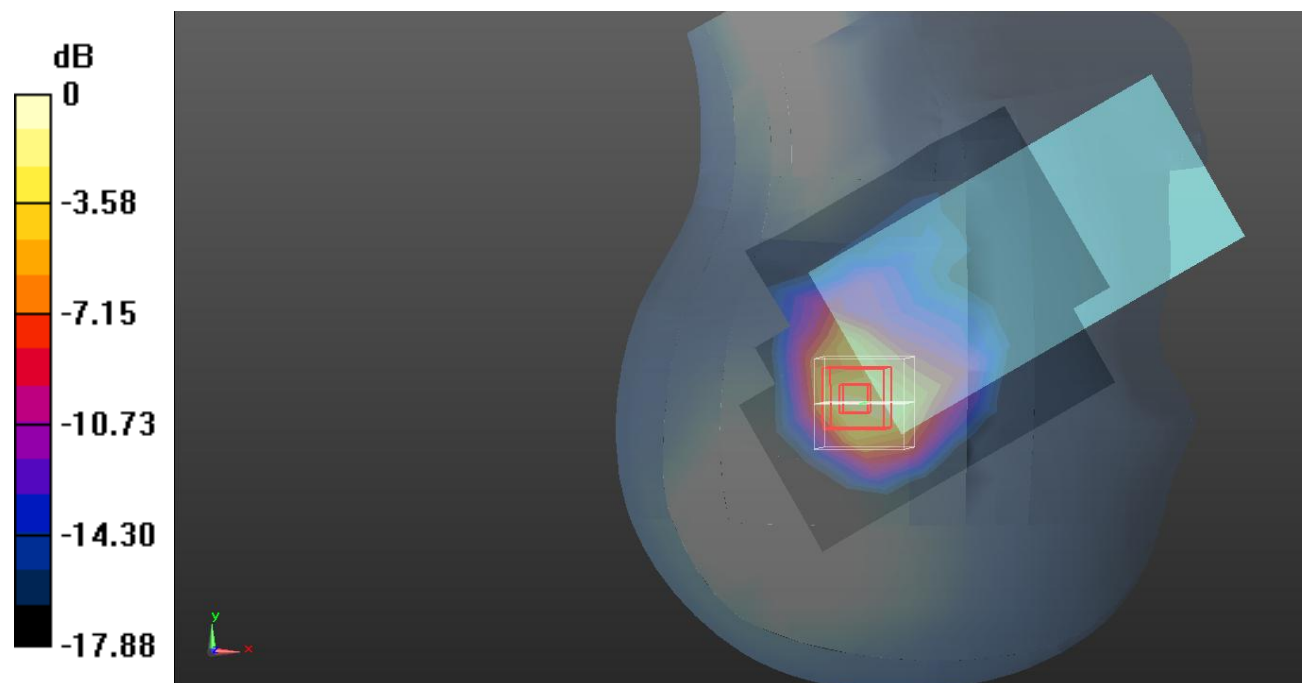

0 dB = 1.14 W/kg = 0.57 dB dBW/kg

Test Plot 25#: WCDMA Band 2_Head Right Tilt_Low**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: WCDMA (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.386$ S/m; $\epsilon_r = 40.112$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1852.4 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.667 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.39 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.648 W/kg; SAR(10 g) = 0.334 W/kg

Maximum value of SAR (measured) = 0.971 W/kg

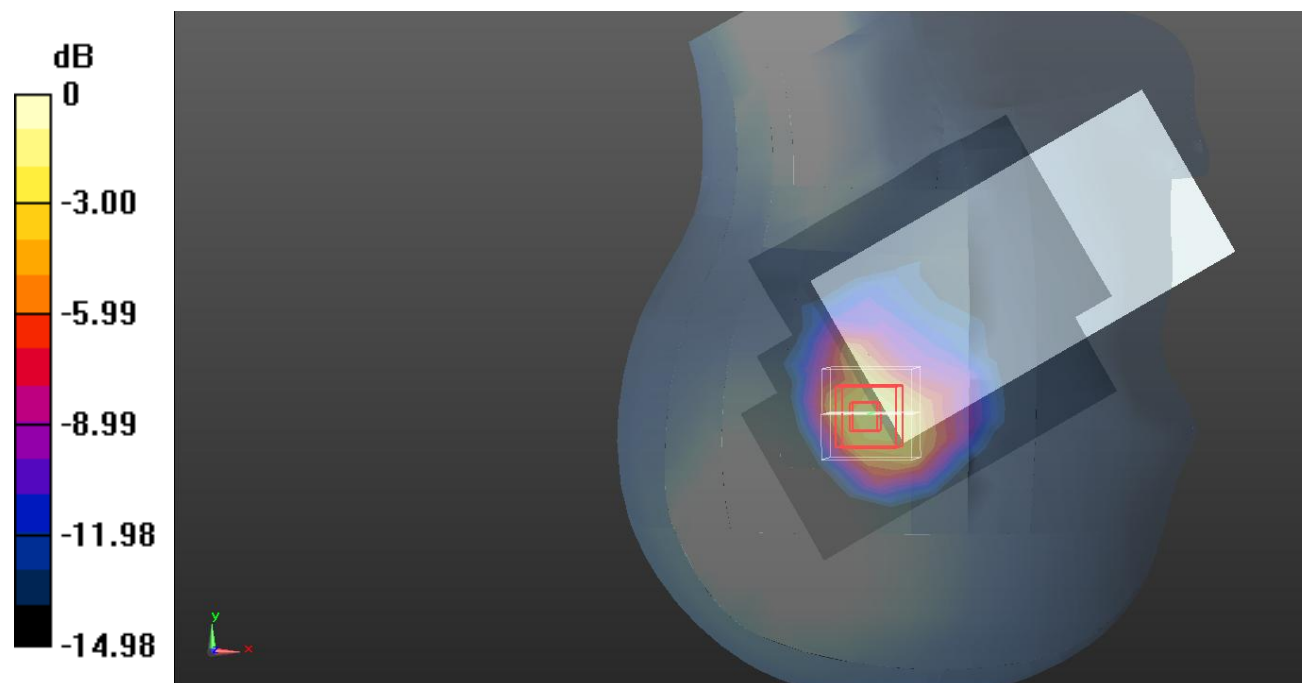

0 dB = 0.971 W/kg = -0.13 dB dBW/kg

Test Plot 26#: WCDMA Band 2_Head Right Tilt_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.336$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.859 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.54 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.909 W/kg; SAR(10 g) = 0.454 W/kg

Maximum value of SAR (measured) = 1.36 W/kg

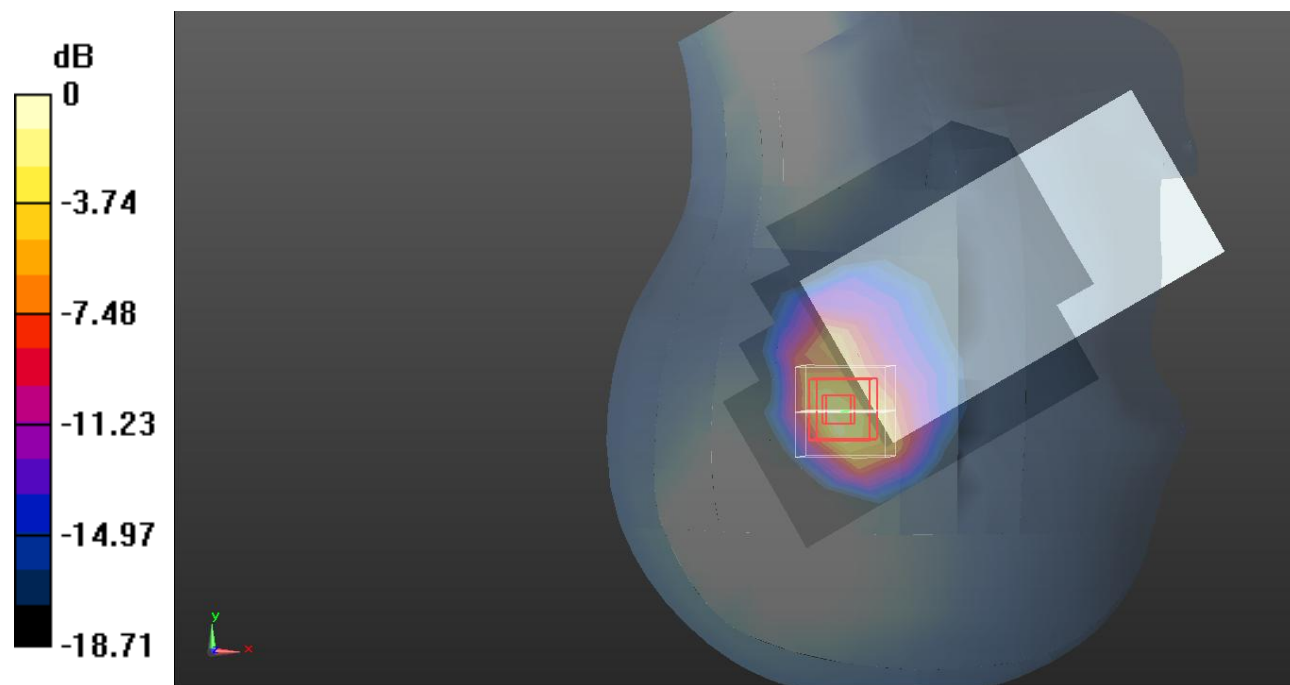

0 dB = 1.36 W/kg = 1.34 dB dBW/kg

Test Plot 27#: WCDMA Band 2_Head Right Tilt_High**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1907.6 \text{ MHz}$; $\sigma = 1.455 \text{ S/m}$; $\epsilon_r = 38.905$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1907.6 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.930 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.95 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.800 W/kg; SAR(10 g) = 0.405 W/kg

Maximum value of SAR (measured) = 1.12 W/kg

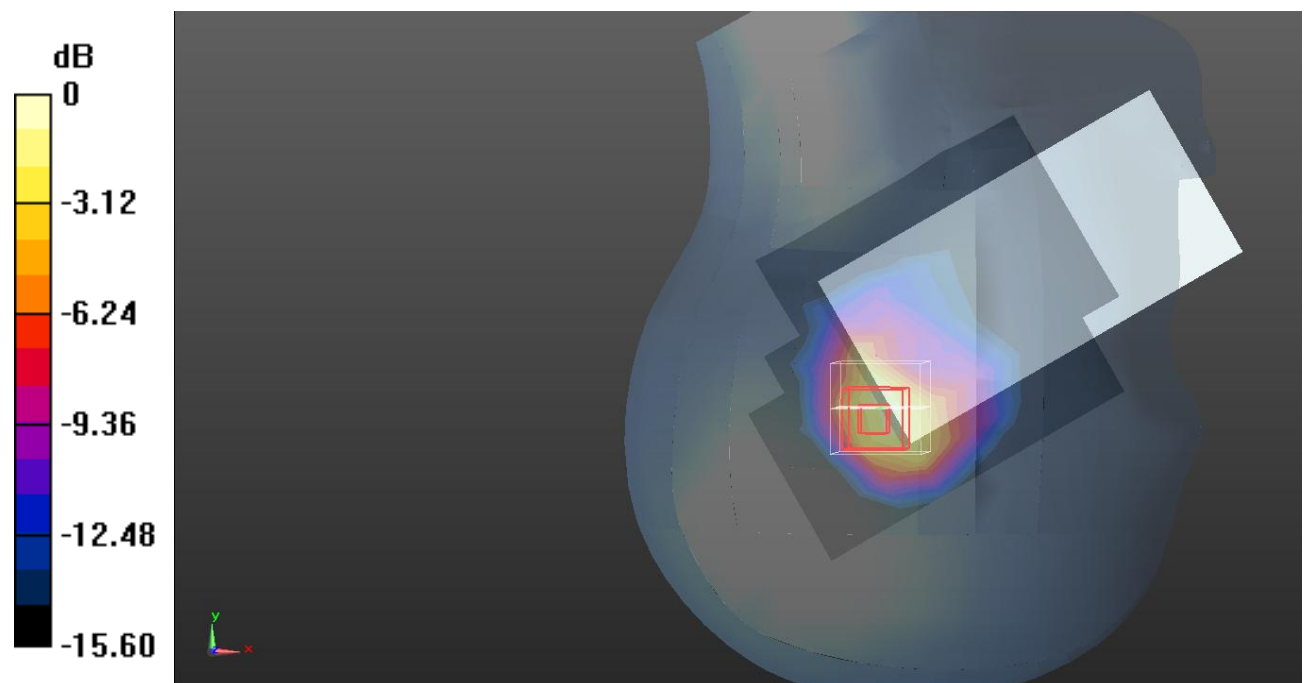

0 dB = 1.12 W/kg = 0.49 dB dBW/kg

Test Plot 28#: WCDMA Band 2_Body Front_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.336$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.297 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.370 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.351 W/kg

SAR(1 g) = 0.217 W/kg; SAR(10 g) = 0.124 W/kg

Maximum value of SAR (measured) = 0.303 W/kg

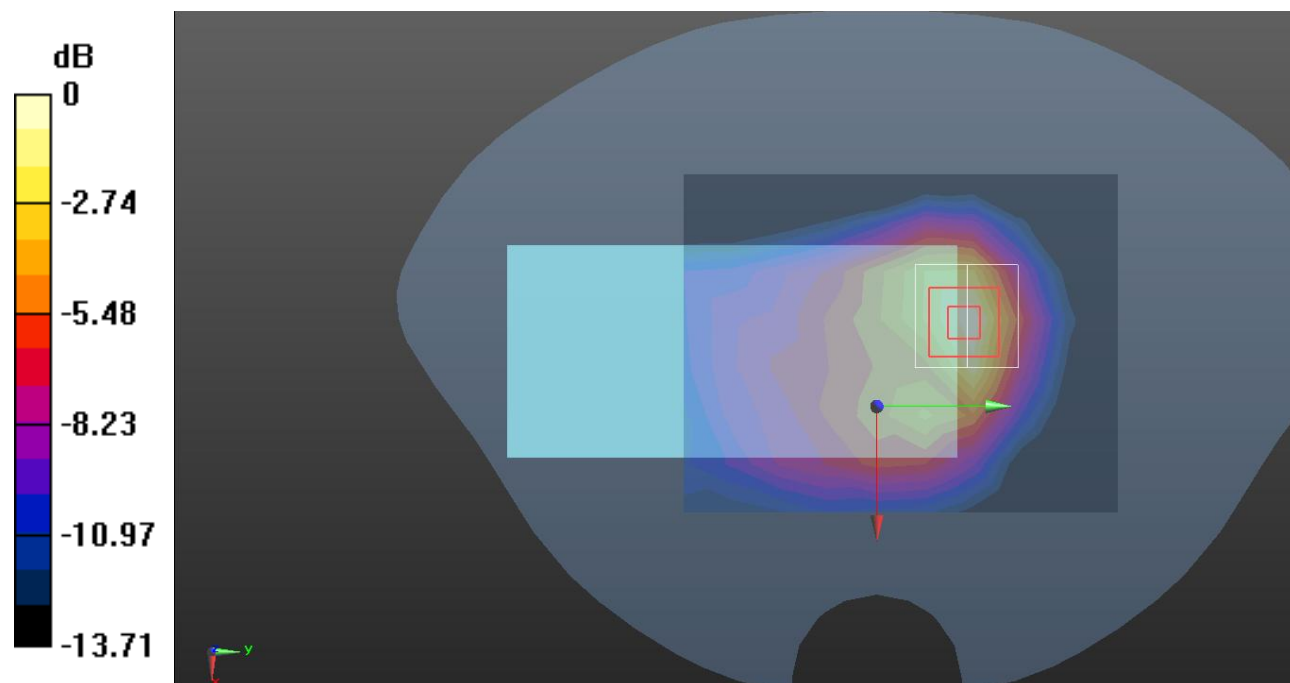

0 dB = 0.303 W/kg = -5.19 dB dBW/kg

Test Plot 29#: WCDMA Band 2_Body Back_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**


Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.414 \text{ S/m}$; $\epsilon_r = 40.336$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

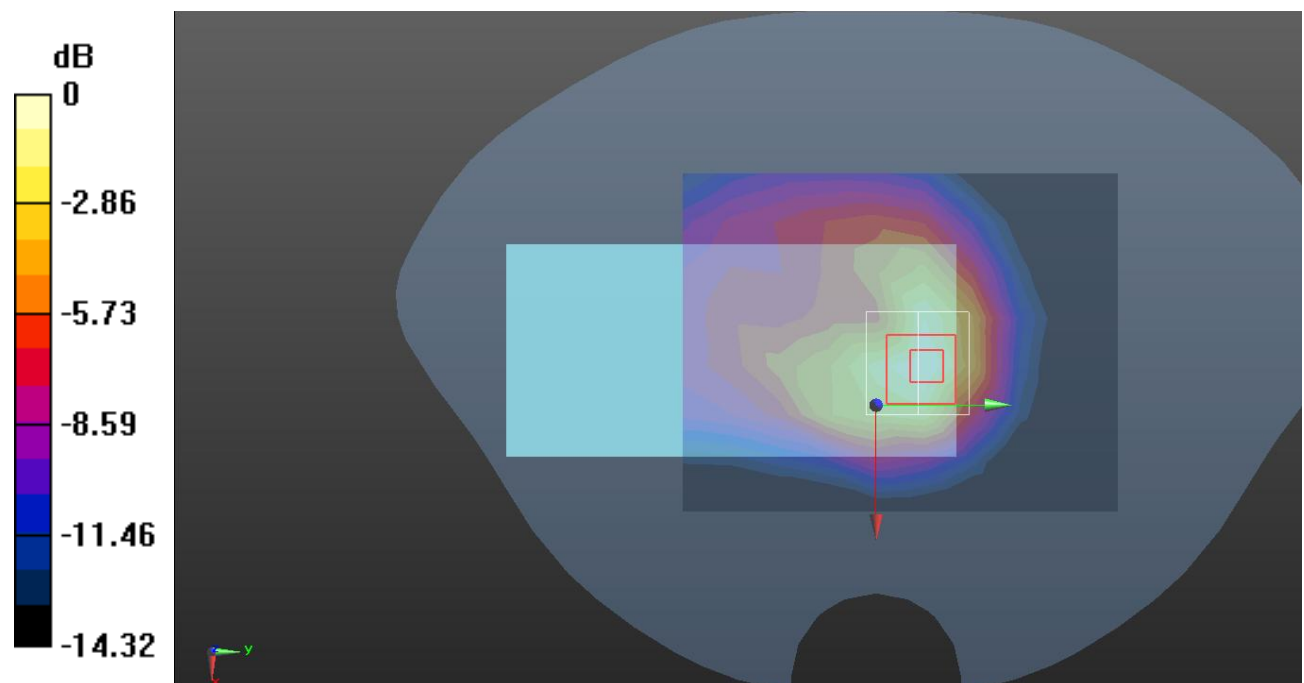Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (interpolated) = 0.375 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 11.62 V/m ; Power Drift = 0.07 dB Peak SAR (extrapolated) = 0.414 W/kg **SAR(1 g) = 0.268 W/kg ; SAR(10 g) = 0.156 W/kg** Maximum value of SAR (measured) = 0.348 W/kg  $0 \text{ dB} = 0.348 \text{ W/kg} = -4.58 \text{ dB dBW/kg}$

Test Plot 30#: WCDMA Band 2_Body Left_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.414 \text{ S/m}$; $\epsilon_r = 40.336$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0689 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.836 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0890 W/kg

SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.036 W/kg

Maximum value of SAR (measured) = 0.0742 W/kg

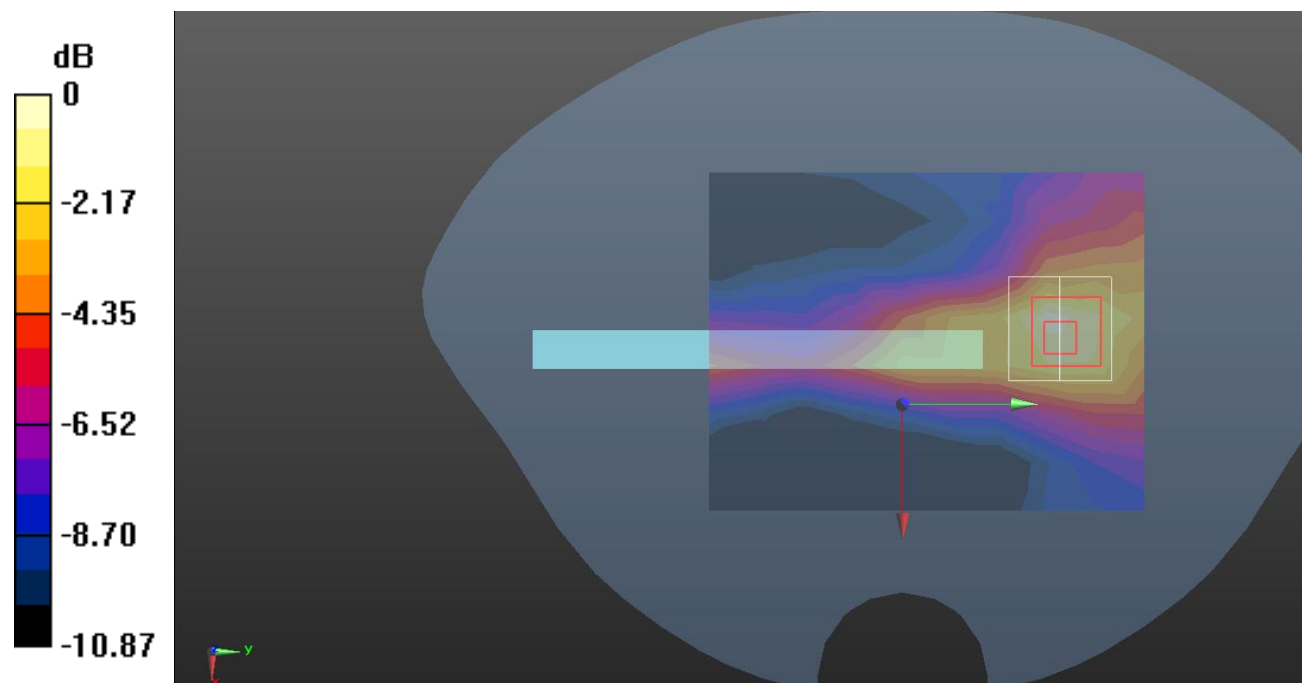

0 dB = 0.0742 W/kg = -11.30 dB dBW/kg

Test Plot 31#: WCDMA Band 2_Body Top_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.336$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.249 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.65 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.393 W/kg

SAR(1 g) = 0.244 W/kg; SAR(10 g) = 0.134 W/kg

Maximum value of SAR (measured) = 0.343 W/kg

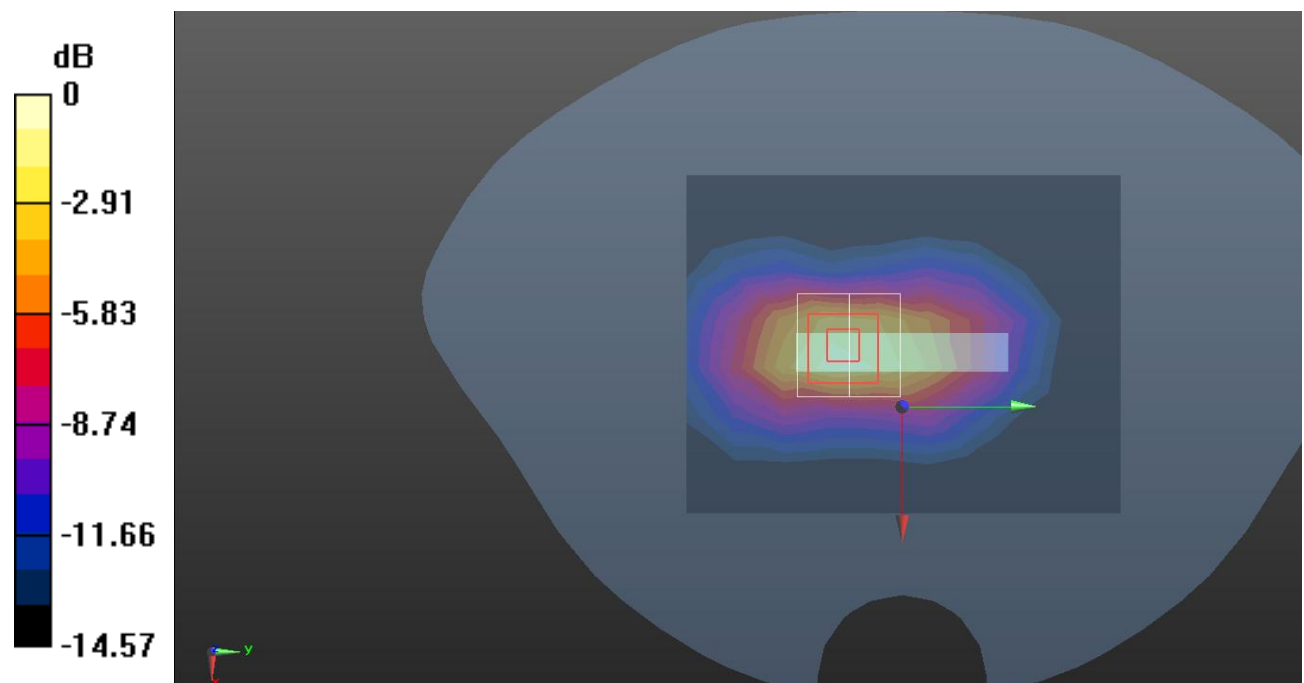

0 dB = 0.343 W/kg = -4.65 dB dBW/kg

Test Plot 32#: WCDMA Band 4_Head Left Cheek_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 39.336$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15)@1732.6 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.233 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.84 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.269 W/kg

SAR(1 g) = 0.164 W/kg; SAR(10 g) = 0.091 W/kg

Maximum value of SAR (measured) = 0.224 W/kg

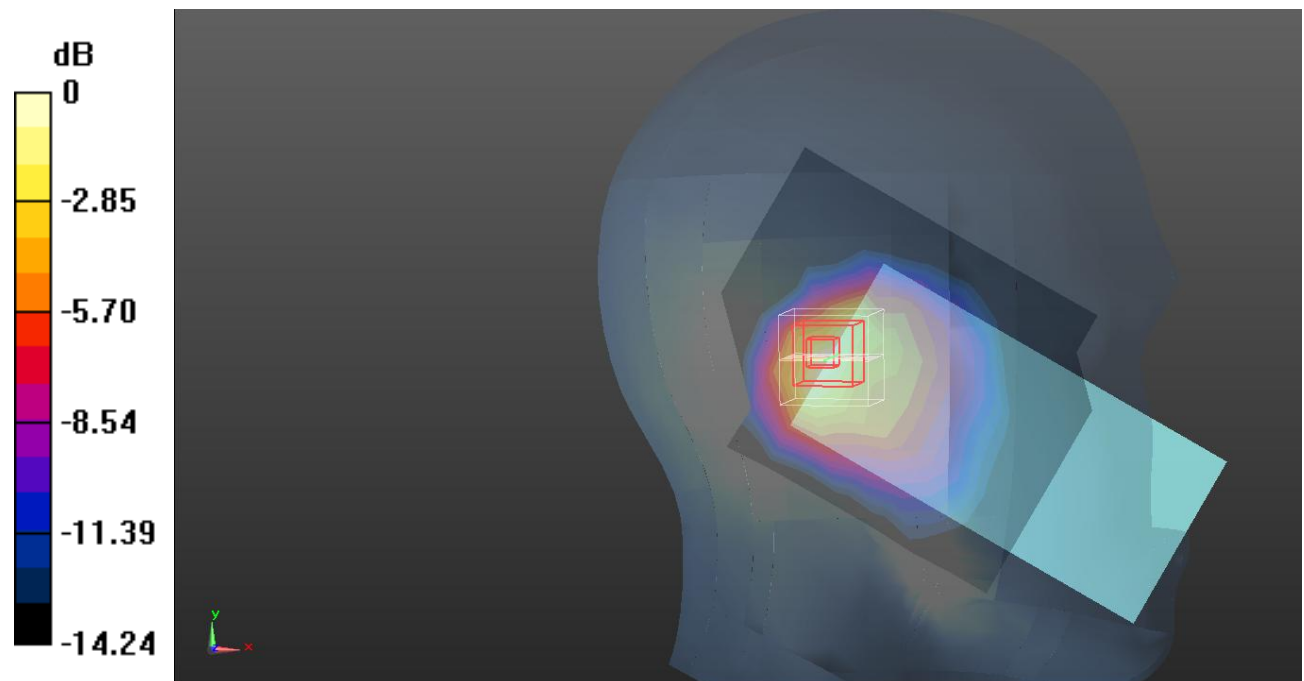

0 dB = 0.224 W/kg = -6.50 dB dBW/kg

Test Plot 33#: WCDMA Band 4_Head Left Tilt_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 39.336$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15)@1732.6 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.283 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.35 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.337 W/kg

SAR(1 g) = 0.203 W/kg; SAR(10 g) = 0.111 W/kg

Maximum value of SAR (measured) = 0.285 W/kg

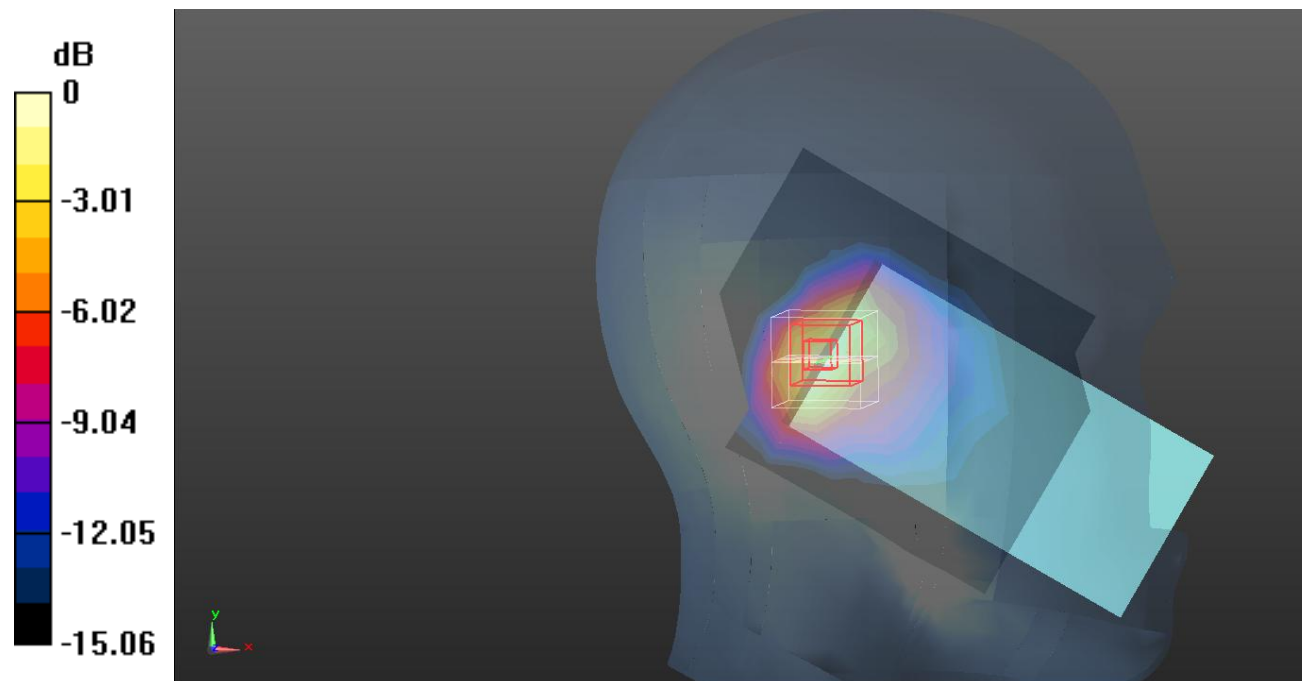

0 dB = 0.285 W/kg = -5.45 dB dBW/kg

Test Plot 34#: WCDMA Band 4_Head Right Cheek_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 39.336$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15)@1732.6 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.260 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.908 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.379 W/kg

SAR(1 g) = 0.212 W/kg; SAR(10 g) = 0.109 W/kg

Maximum value of SAR (measured) = 0.326 W/kg

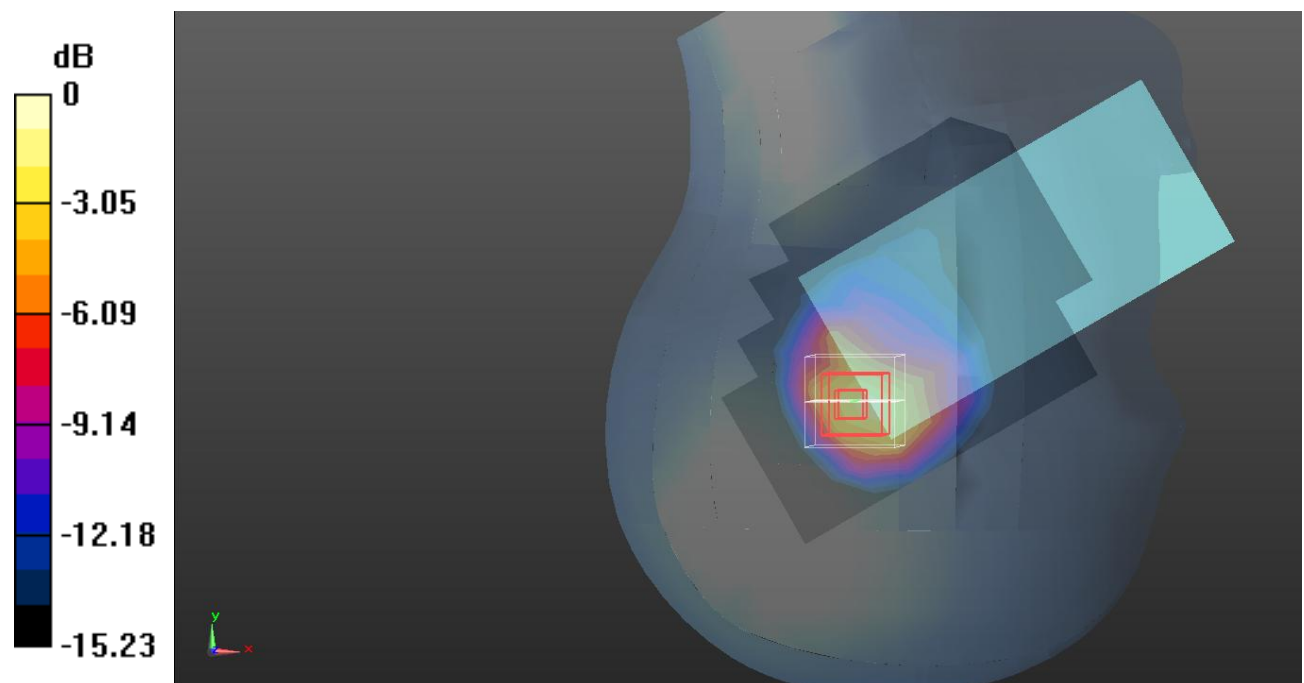

0 dB = 0.326 W/kg = -4.87 dB dBW/kg

Test Plot 35#: WCDMA Band 4_Head Right Tilt_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 39.336$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15)@1732.6 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.570 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.78 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.946 W/kg

SAR(1 g) = 0.504 W/kg; SAR(10 g) = 0.243 W/kg

Maximum value of SAR (measured) = 0.799 W/kg

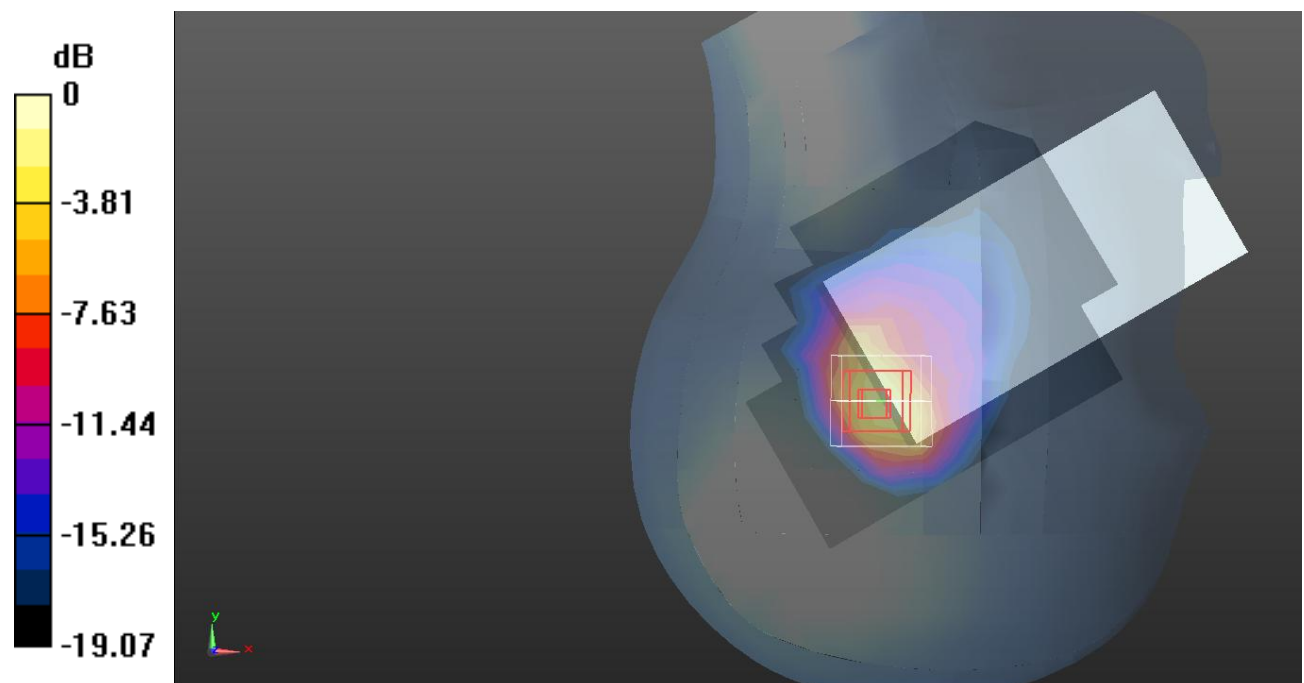

0 dB = 0.799 W/kg = -0.97 dB dBW/kg

Test Plot 36#: WCDMA Band 4_Body Front_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 39.336$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15)@1732.6 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0672 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.756 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0810 W/kg

SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.0680 W/kg

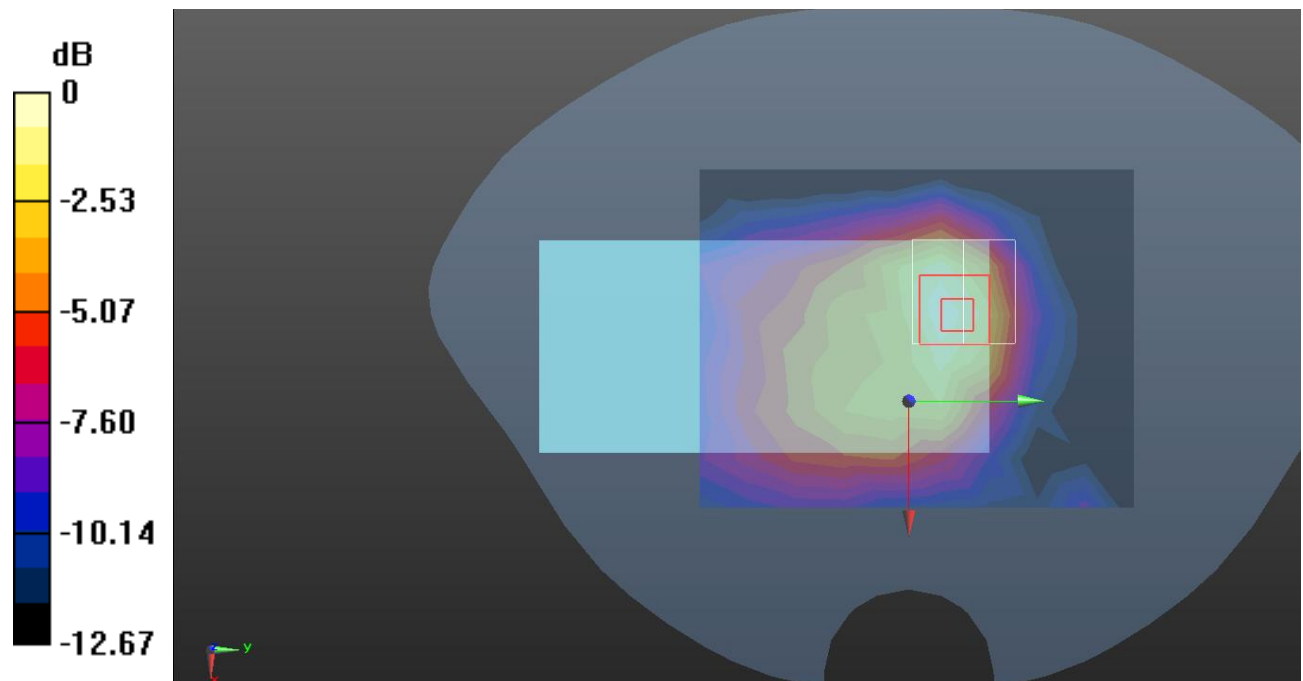

0 dB = 0.0680 W/kg = -11.67 dB dBW/kg

Test Plot 37#: WCDMA Band 4_Body Back_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 39.336$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15)@1732.6 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0945 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.811 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.105 W/kg

SAR(1 g) = 0.067 W/kg; SAR(10 g) = 0.040 W/kg

Maximum value of SAR (measured) = 0.0883 W/kg

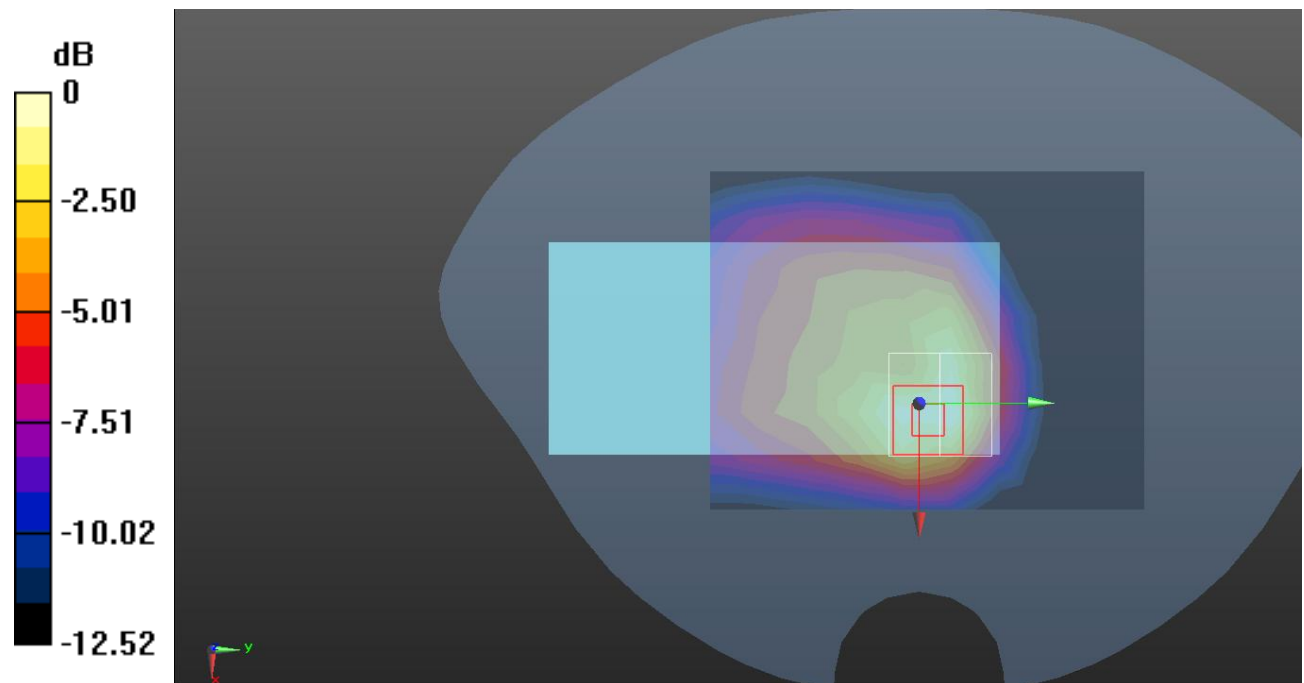

0 dB = 0.0883 W/kg = -10.54 dB dBW/kg

Test Plot 38#: WCDMA Band 4_Body Left_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 39.336$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15)@1732.6 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0320 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.704 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.0350 W/kg

SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.014 W/kg

Maximum value of SAR (measured) = 0.0292 W/kg

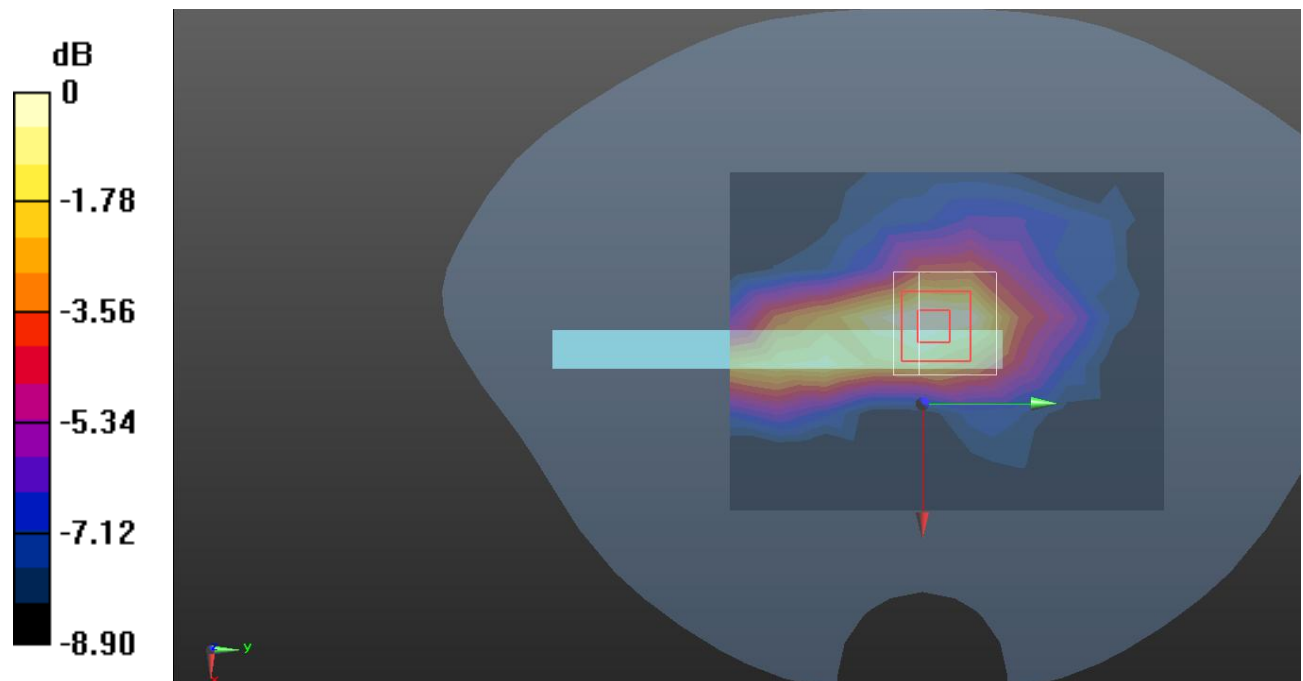

Test Plot 39#: WCDMA Band 4_Body Top_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 39.336$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15)@1732.6 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0748 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.169 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.110 W/kg

SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.0965 W/kg

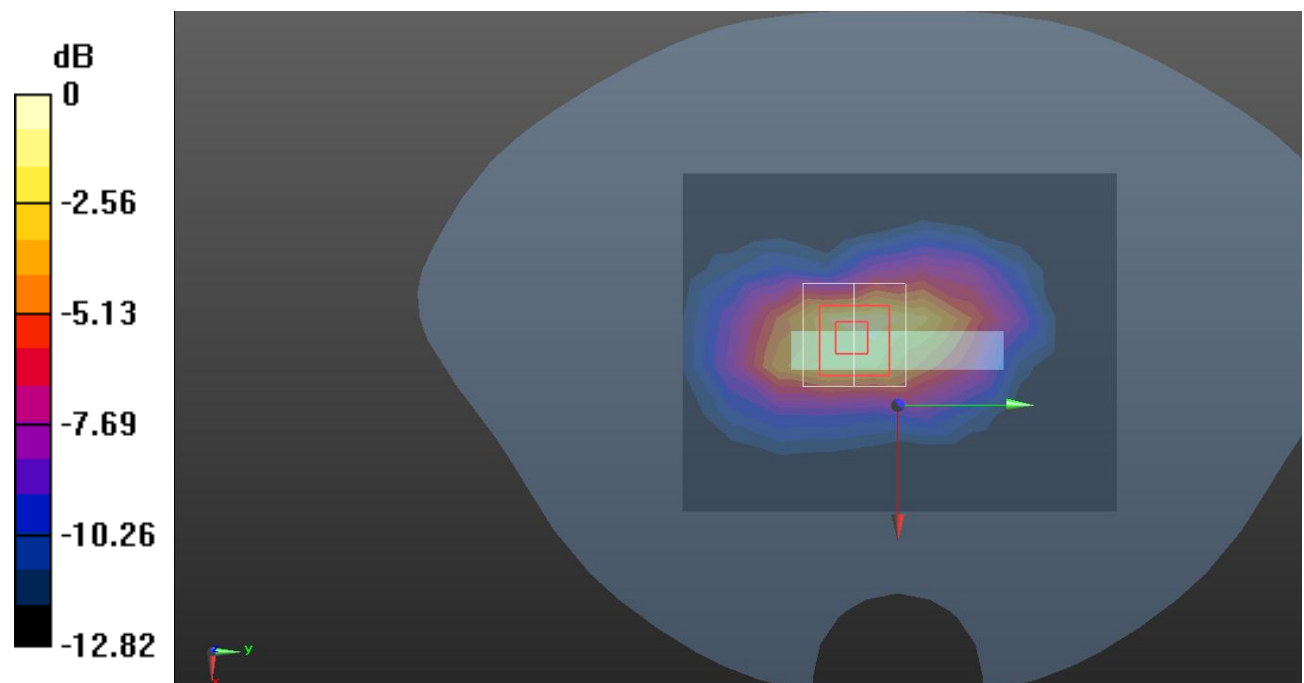

0 dB = 0.0965 W/kg = -10.15 dB dBW/kg

Test Plot 40#: WCDMA Band 5_Head Left Cheek_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.469$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.90, 9.90, 9.90) @836.6 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0724 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.275 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 0.0710 W/kg

SAR(1 g) = 0.061 W/kg; SAR(10 g) = 0.048 W/kg

Maximum value of SAR (measured) = 0.0677 W/kg

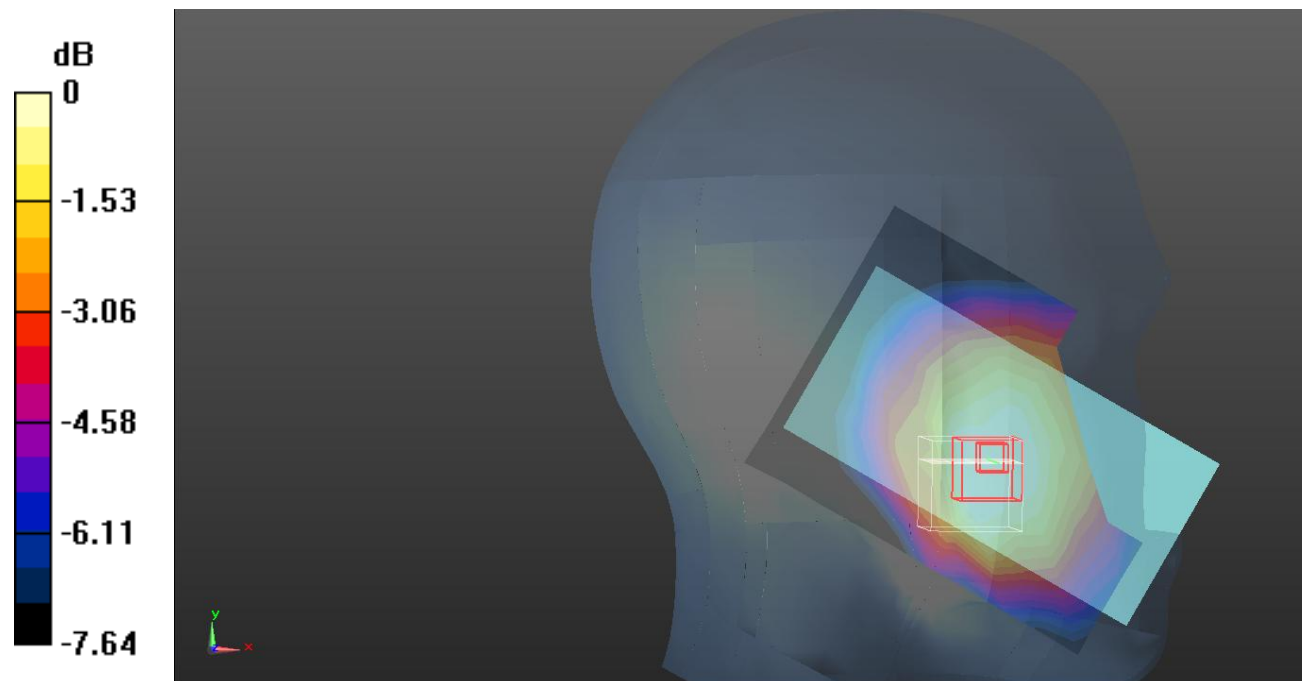

0 dB = 0.0677 W/kg = -11.69 dB dBW/kg

Test Plot 41#: WCDMA Band 5_Head Left Tilt_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.469$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.90, 9.90, 9.90) @836.6 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0414 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.131 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.0440 W/kg

SAR(1 g) = 0.035 W/kg; SAR(10 g) = 0.028 W/kg

Maximum value of SAR (measured) = 0.0414 W/kg

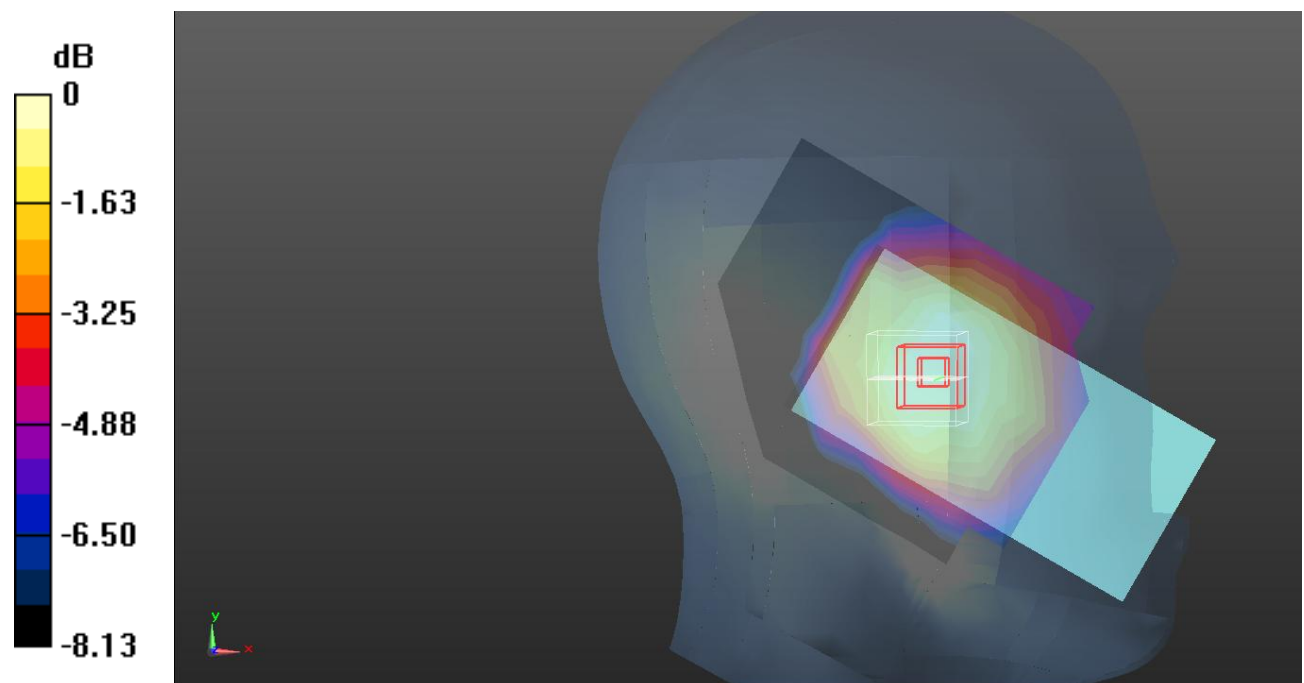

0 dB = 0.0414 W/kg = -13.83 dB dBW/kg

Test Plot 42#: WCDMA Band 5_Head Right Cheek_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.469$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.90, 9.90, 9.90) @836.6 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0850 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.425 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0890 W/kg

SAR(1 g) = 0.067 W/kg; SAR(10 g) = 0.053 W/kg

Maximum value of SAR (measured) = 0.0798 W/kg

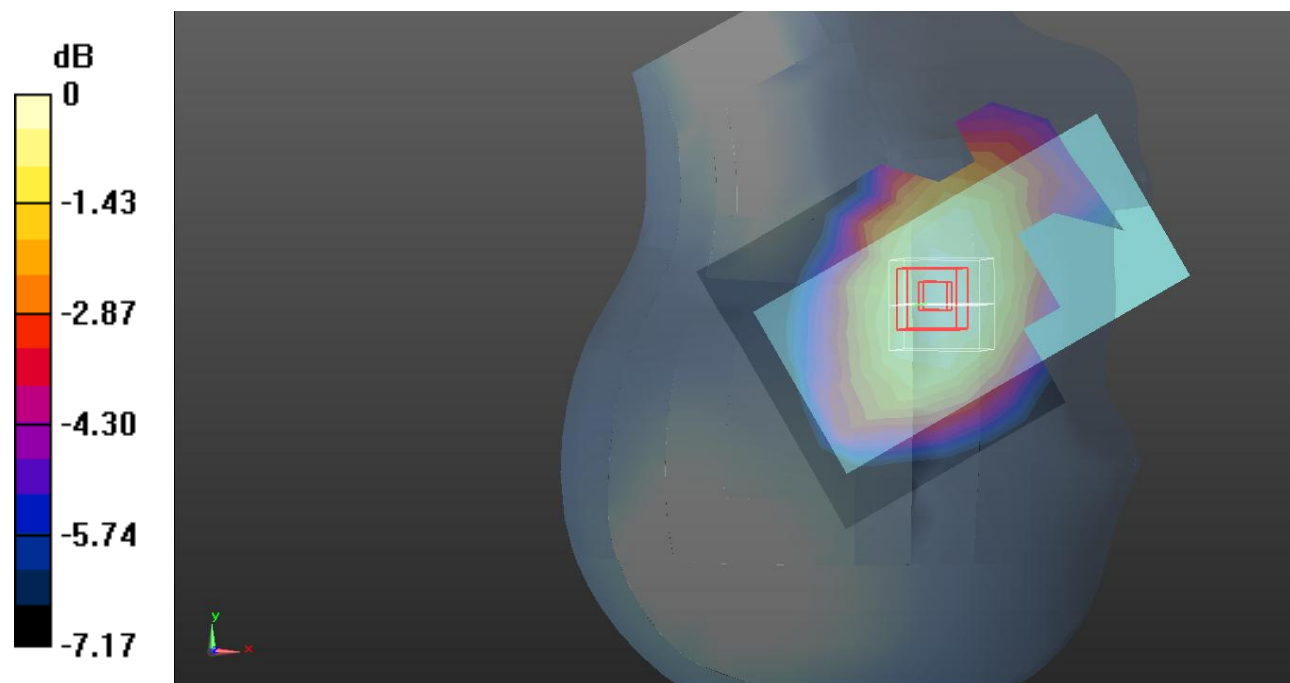

0 dB = 0.0798 W/kg = -10.98 dB dBW/kg

Test Plot 43#: WCDMA Band 5_Head Right Tilt_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.469$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.90, 9.90, 9.90) @836.6 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0345 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.774 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0390 W/kg

SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.022 W/kg

Maximum value of SAR (measured) = 0.0349 W/kg

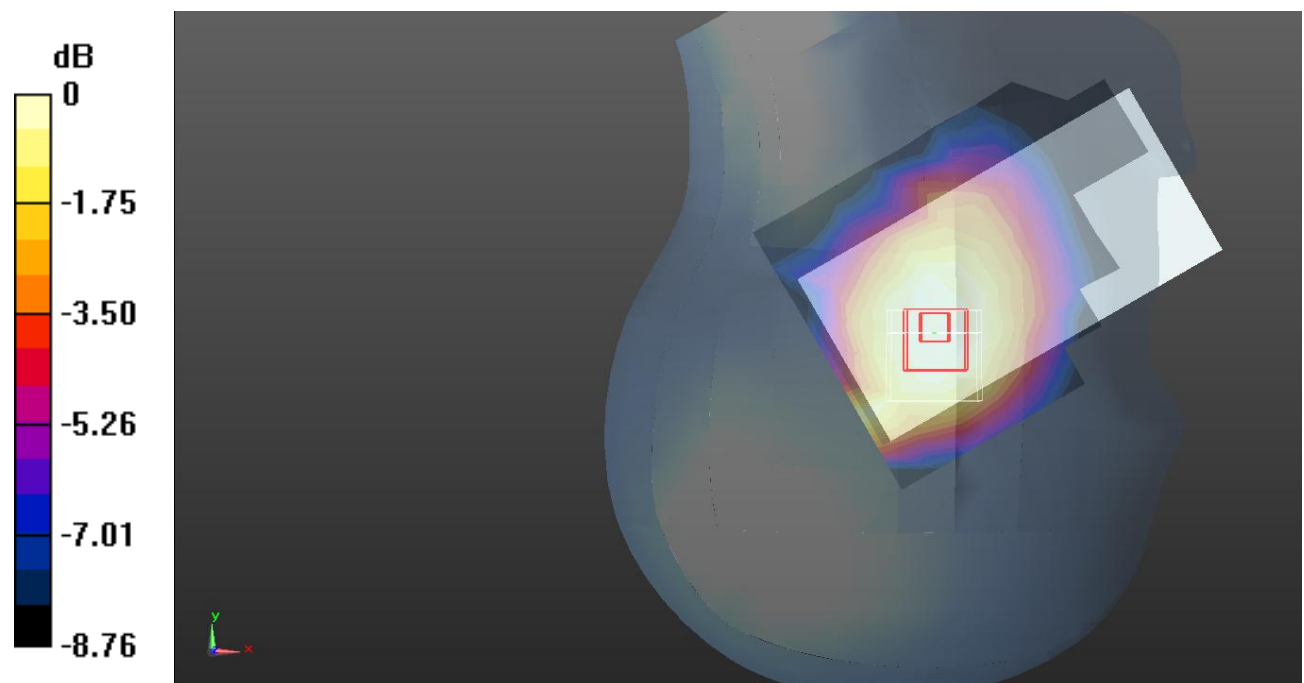

0 dB = 0.0349 W/kg = -14.57 dB dBW/kg

Test Plot 44#: WCDMA Band 5_Body Front_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.469$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.90, 9.90, 9.90) @836.6 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0782 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.727 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.101 W/kg

SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 0.0821 W/kg

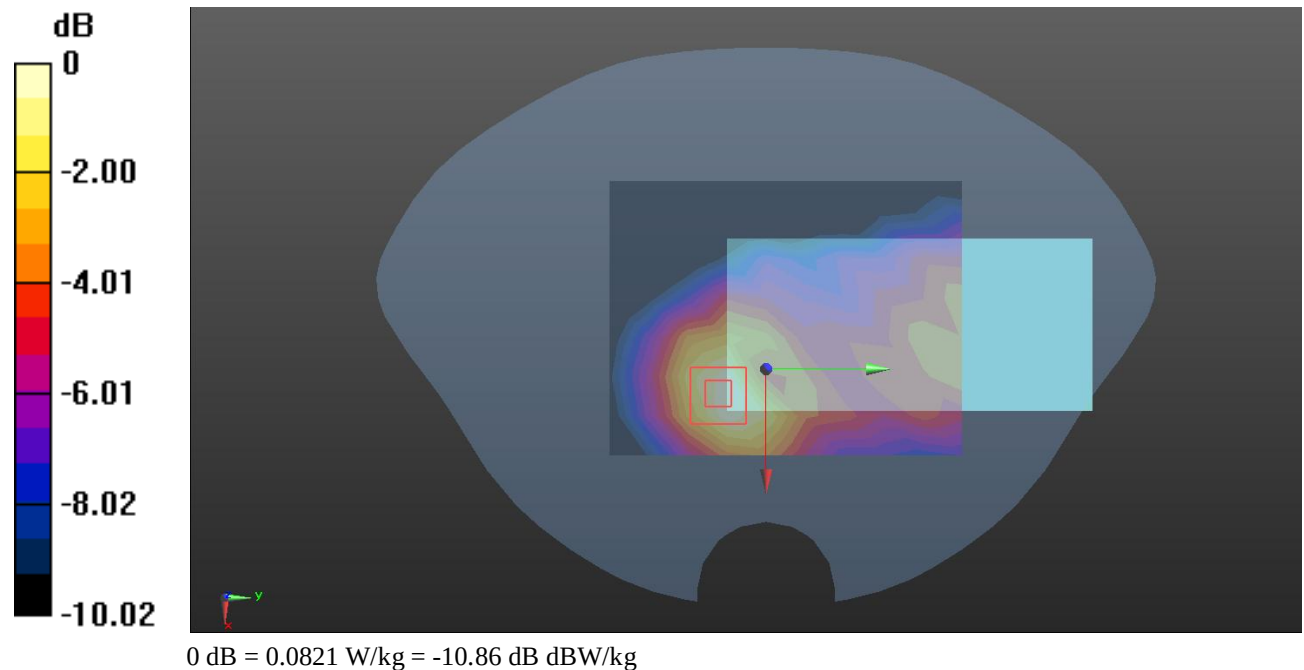

Test Plot 45#: WCDMA Band 5_Body Back_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.469$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.90, 9.90, 9.90) @836.6 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.247 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.37 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.373 W/kg

SAR(1 g) = 0.175 W/kg; SAR(10 g) = 0.094 W/kg

Maximum value of SAR (measured) = 0.288 W/kg

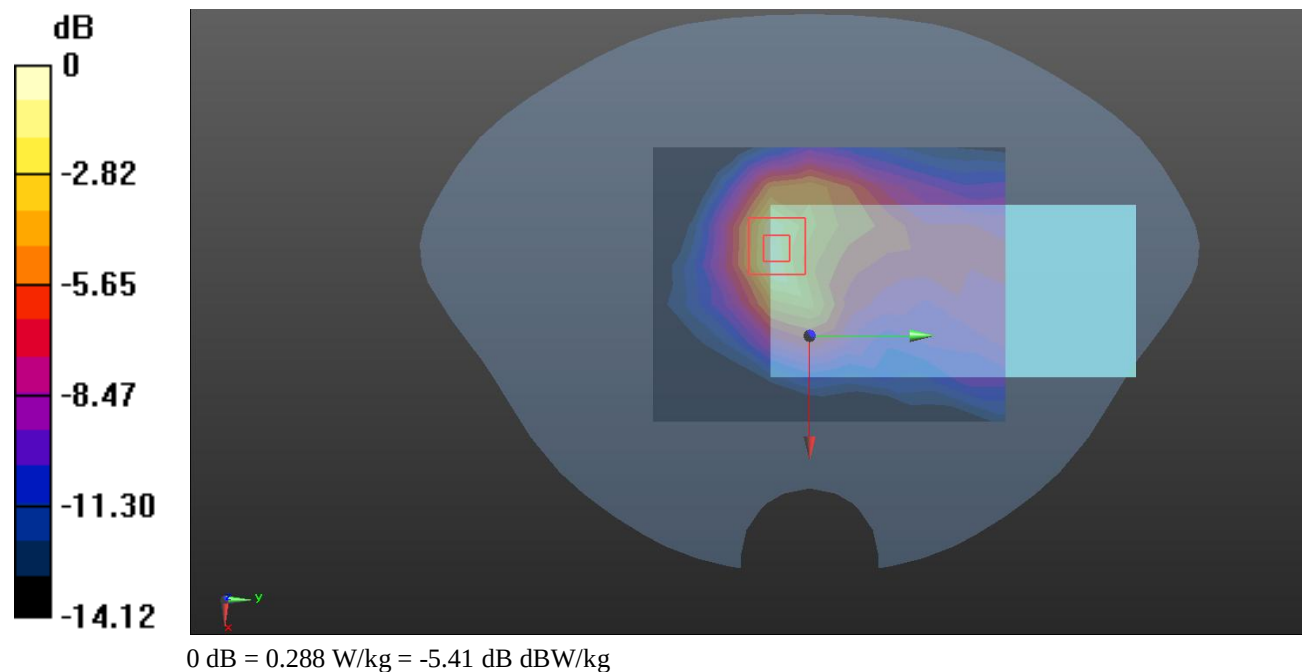

Test Plot 46#: WCDMA Band 5_Body Left_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.469$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.90, 9.90, 9.90) @836.6 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0265 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.527 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0280 W/kg

SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.0262 W/kg

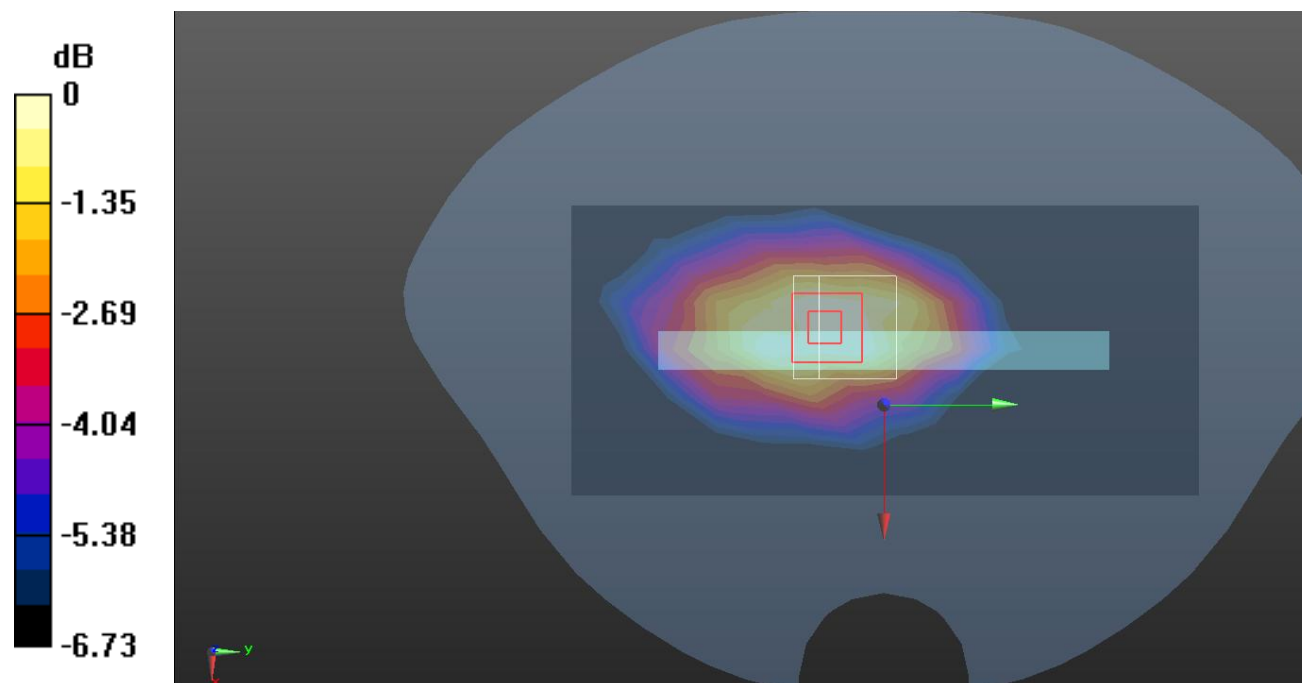

Test Plot 47#: WCDMA Band 5_Body Right_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.469$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.90, 9.90, 9.90) @836.6 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0759 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.577 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0710 W/kg

SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.043 W/kg

Maximum value of SAR (measured) = 0.0659 W/kg

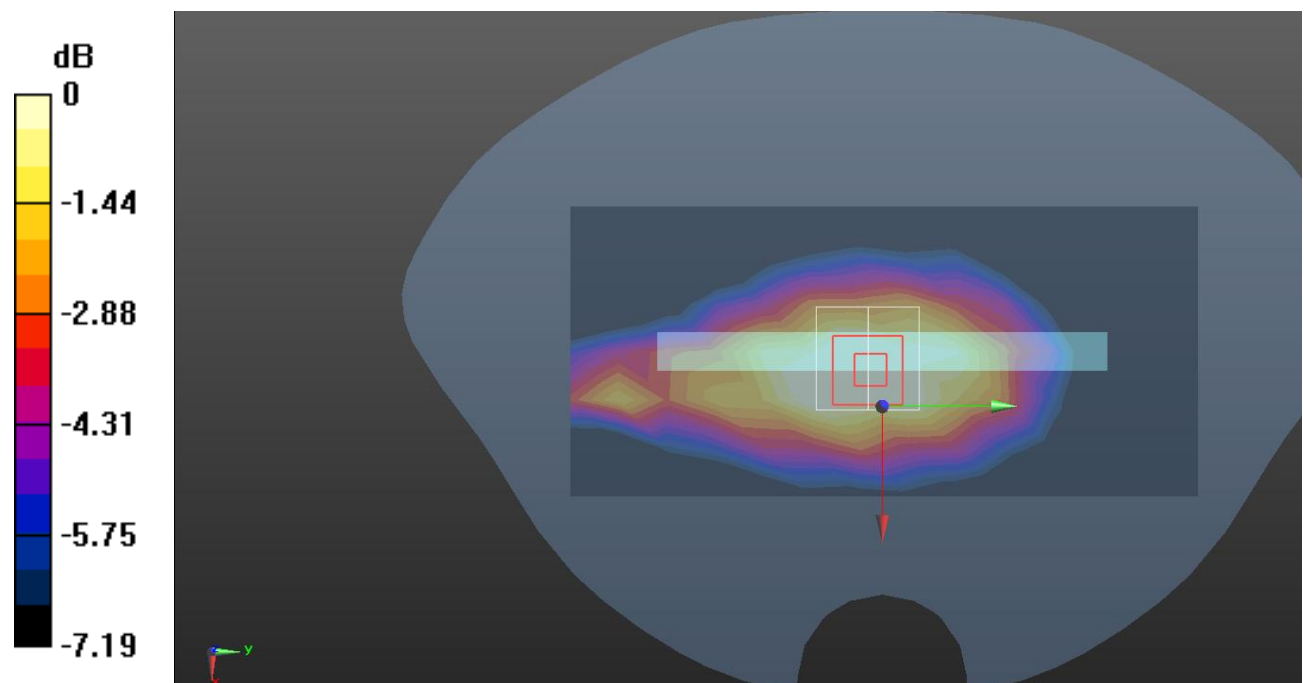

Test Plot 48#: WCDMA Band 5_Body Bottom_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.469$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.90, 9.90, 9.90) @836.6 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0899 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.010 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.136 W/kg

SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.049 W/kg

Maximum value of SAR (measured) = 0.118 W/kg

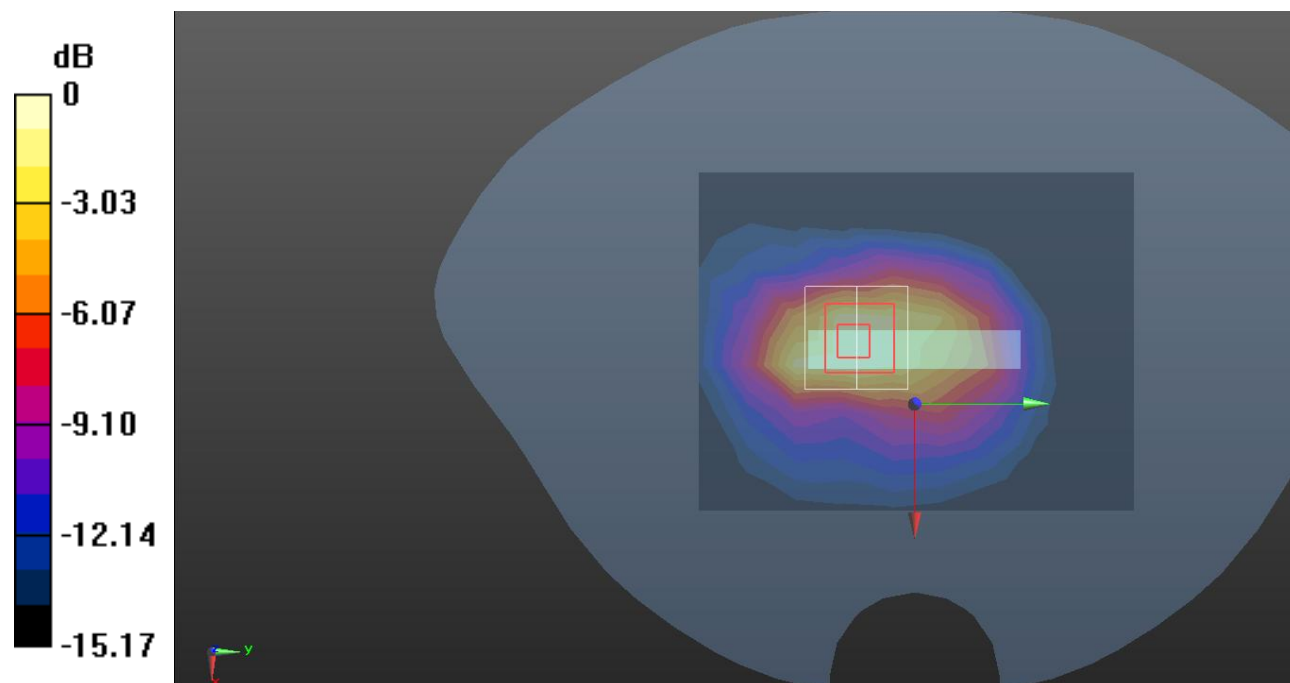

0 dB = 0.118 W/kg = -9.28 dB dBW/kg

Test Plot 49#: LTE Band 2_Head Left Cheek_1RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.336$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.556 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.66 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.771 W/kg

SAR(1 g) = 0.485 W/kg; SAR(10 g) = 0.262 W/kg

Maximum value of SAR (measured) = 0.656 W/kg

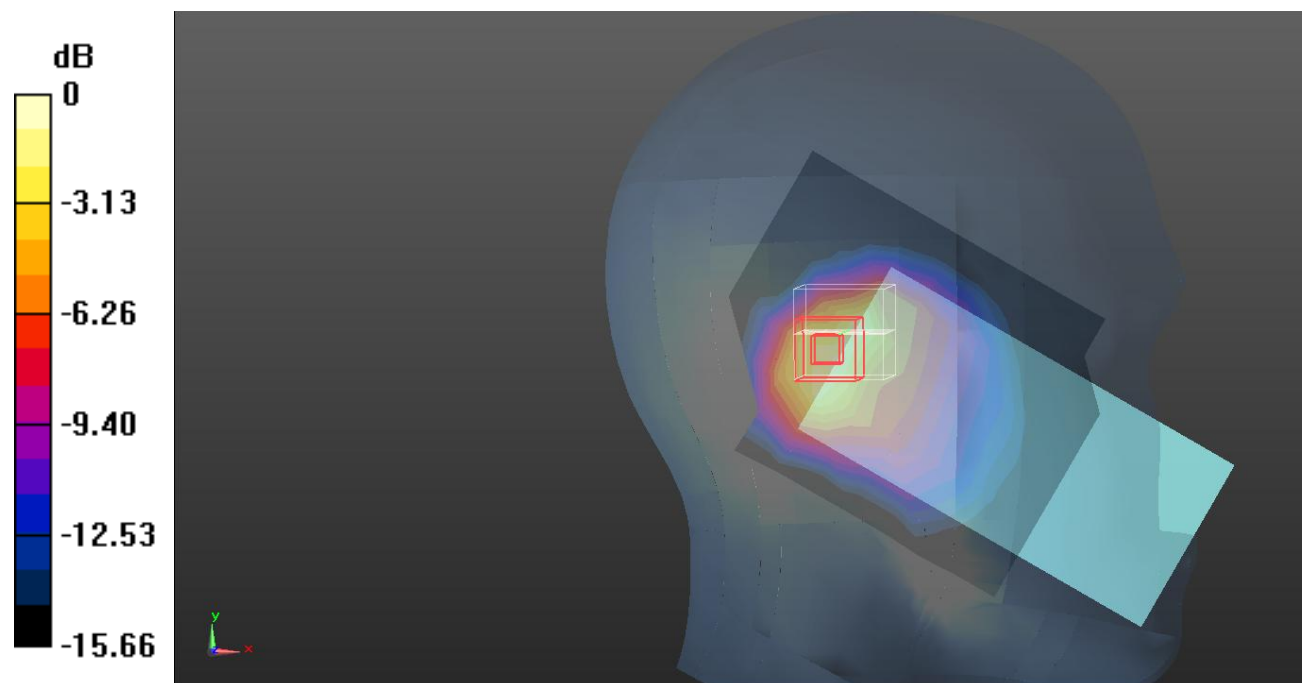

0 dB = 0.656 W/kg = -1.83 dB dBW/kg

Test Plot 50#: LTE Band 2_Head Left Cheek_50%RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.336$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.474 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.88 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.674 W/kg

SAR(1 g) = 0.423 W/kg; SAR(10 g) = 0.227 W/kg

Maximum value of SAR (measured) = 0.566 W/kg

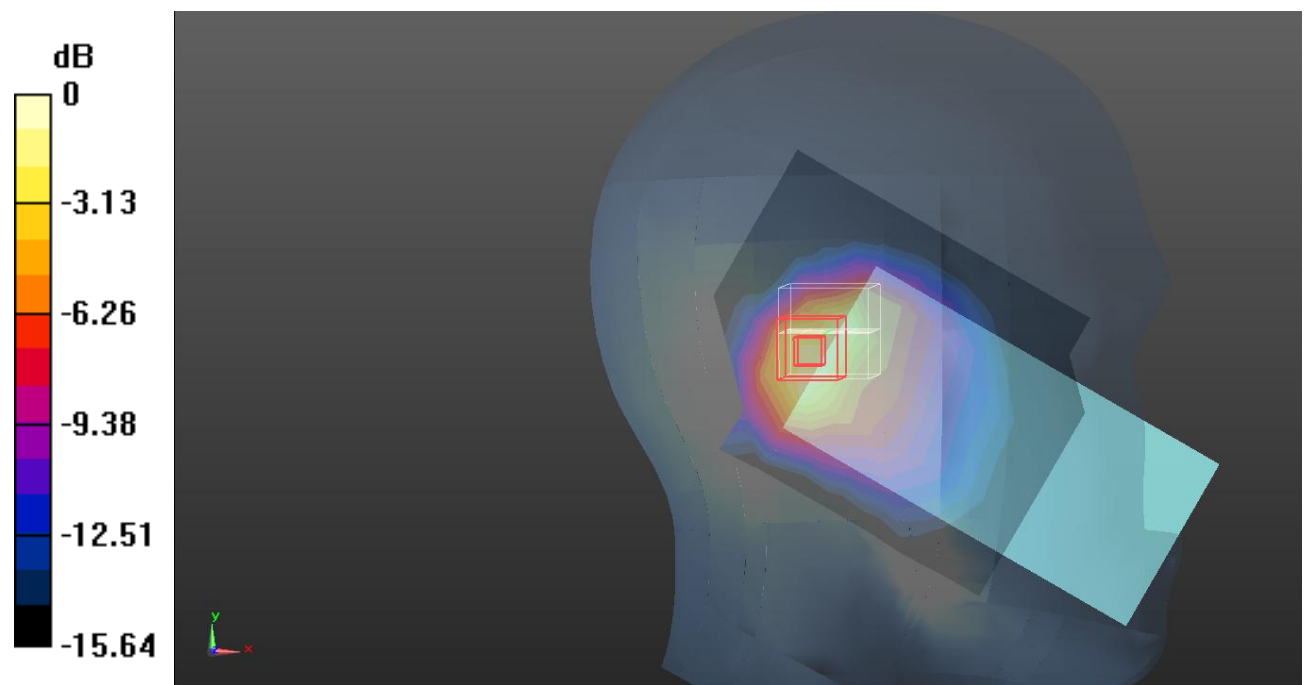

0 dB = 0.566 W/kg = -2.47 dB dBW/kg

Test Plot 51#: LTE Band 2_Head Left Tilt_1RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.336$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.786 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.55 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.882 W/kg

SAR(1 g) = 0.541 W/kg; SAR(10 g) = 0.286 W/kg

Maximum value of SAR (measured) = 0.782 W/kg

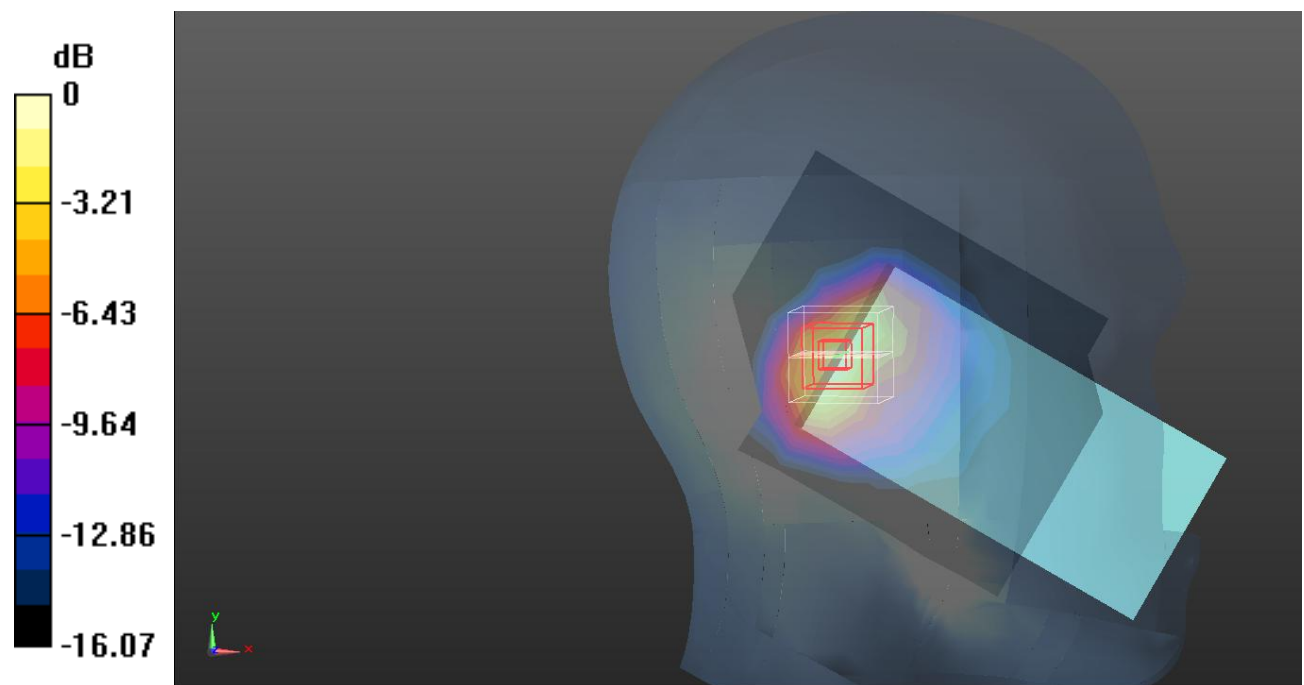

0 dB = 0.782 W/kg = -1.07 dB dBW/kg

Test Plot 52#: LTE Band 2_Head Left Tilt_50%RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.336$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.683 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.27 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.772 W/kg

SAR(1 g) = 0.472 W/kg; SAR(10 g) = 0.249 W/kg

Maximum value of SAR (measured) = 0.684 W/kg

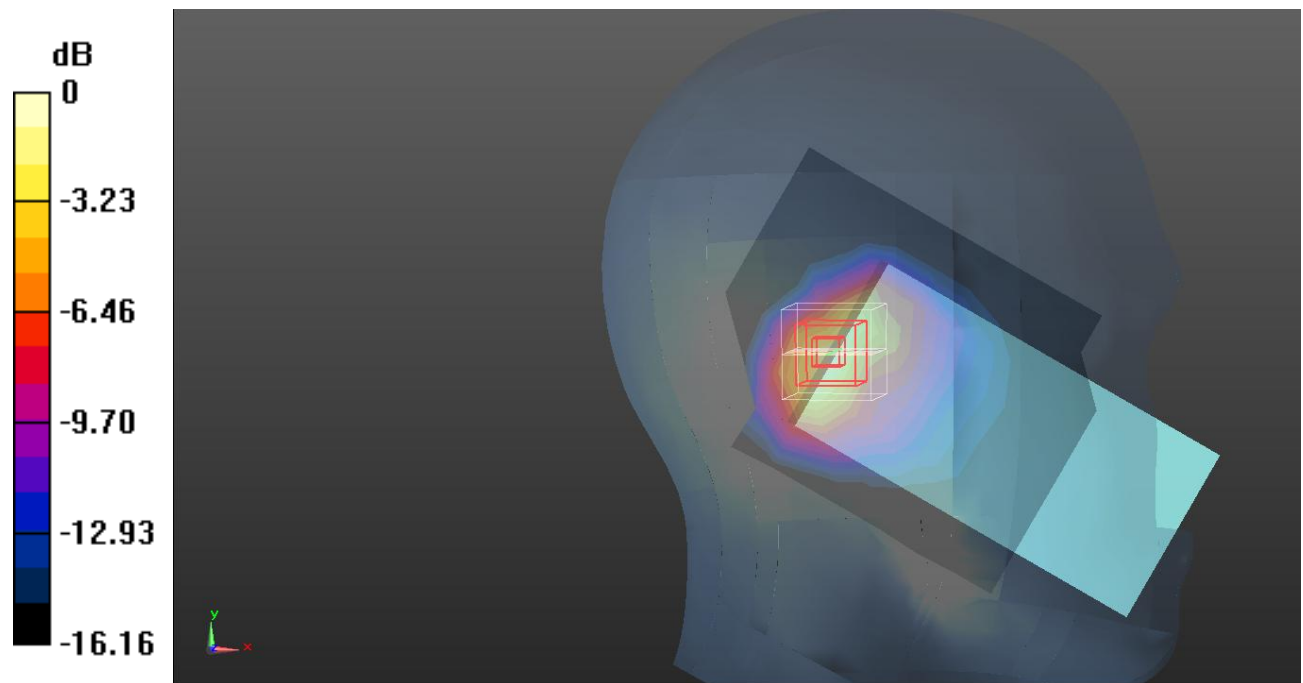

0 dB = 0.684 W/kg = -1.65 dB dBW/kg

Test Plot 53#: LTE Band 2_Head Right Cheek_1RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.336$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.764 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.37 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.650 W/kg; SAR(10 g) = 0.335 W/kg

Maximum value of SAR (measured) = 0.929 W/kg

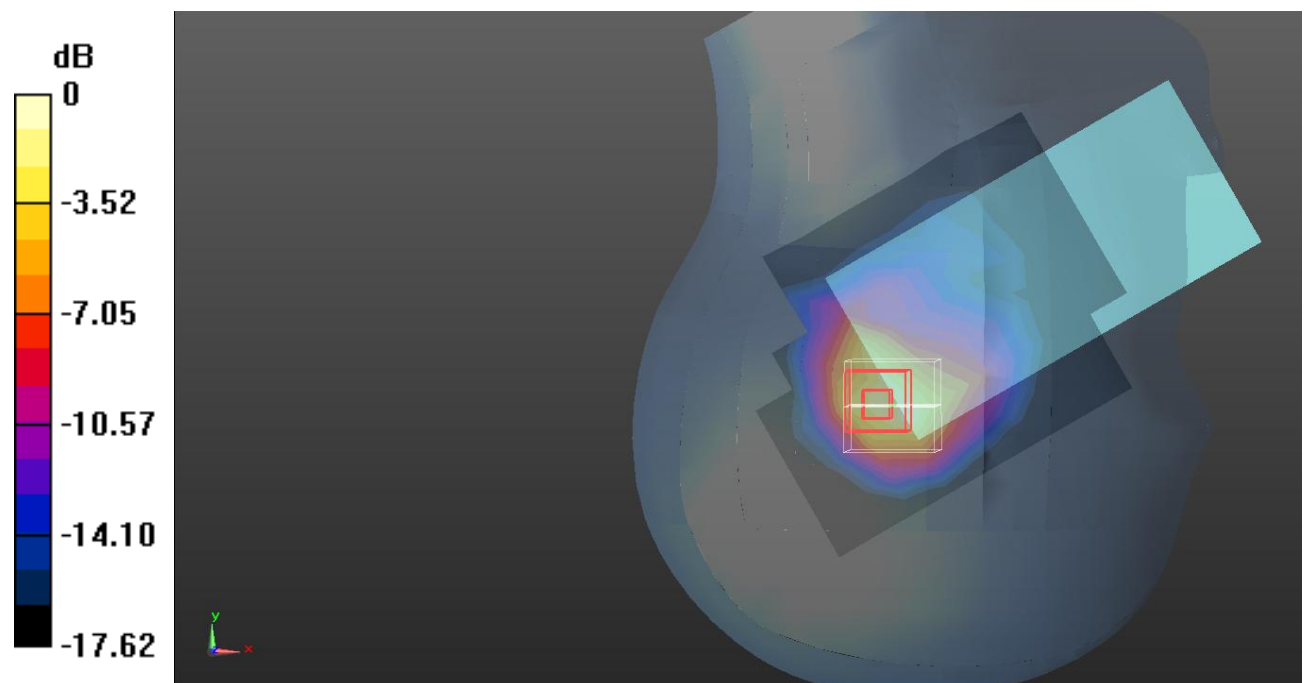

0 dB = 0.929 W/kg = -0.32 dB dBW/kg

Test Plot 54#: LTE Band 2_Head Right Cheek_50%RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.336$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.637 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.72 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.967 W/kg

SAR(1 g) = 0.573 W/kg; SAR(10 g) = 0.292 W/kg

Maximum value of SAR (measured) = 0.846 W/kg

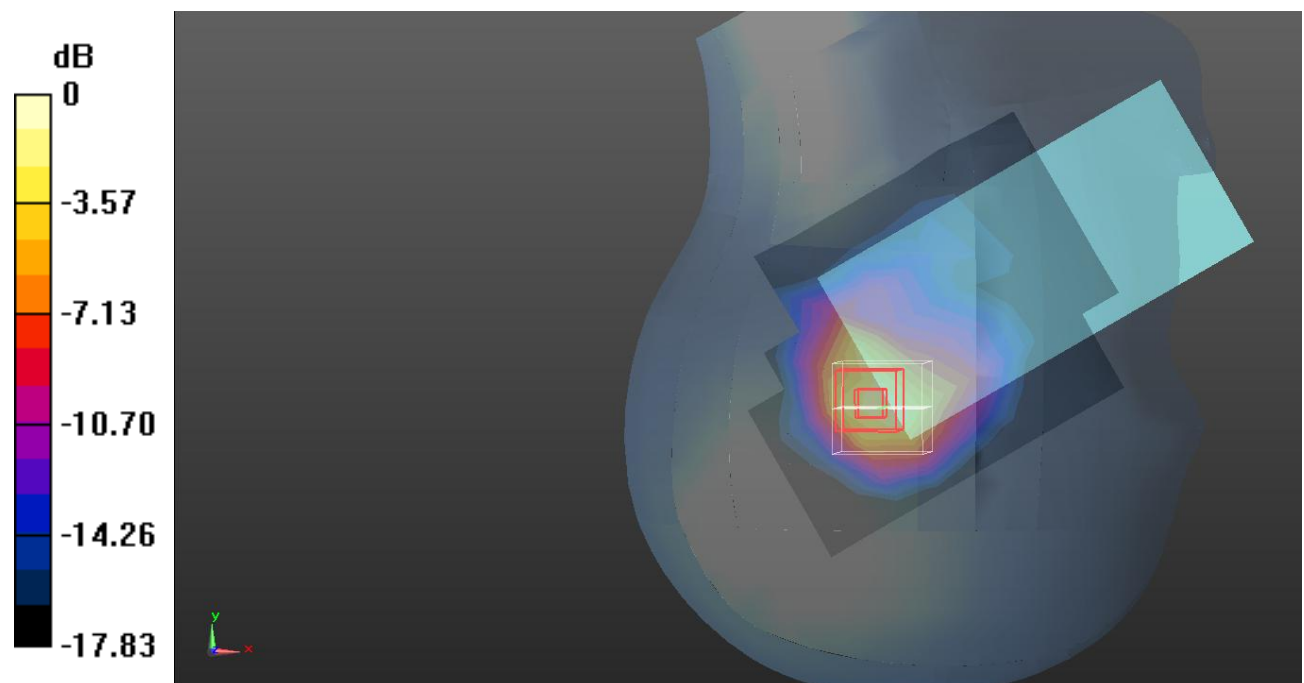

0 dB = 0.846 W/kg = -0.73 dB dBW/kg

Test Plot 55#: LTE Band 2_Head Right Tilt_1RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.336$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.960 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.656 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.731 W/kg; SAR(10 g) = 0.356 W/kg

Maximum value of SAR (measured) = 1.05 W/kg

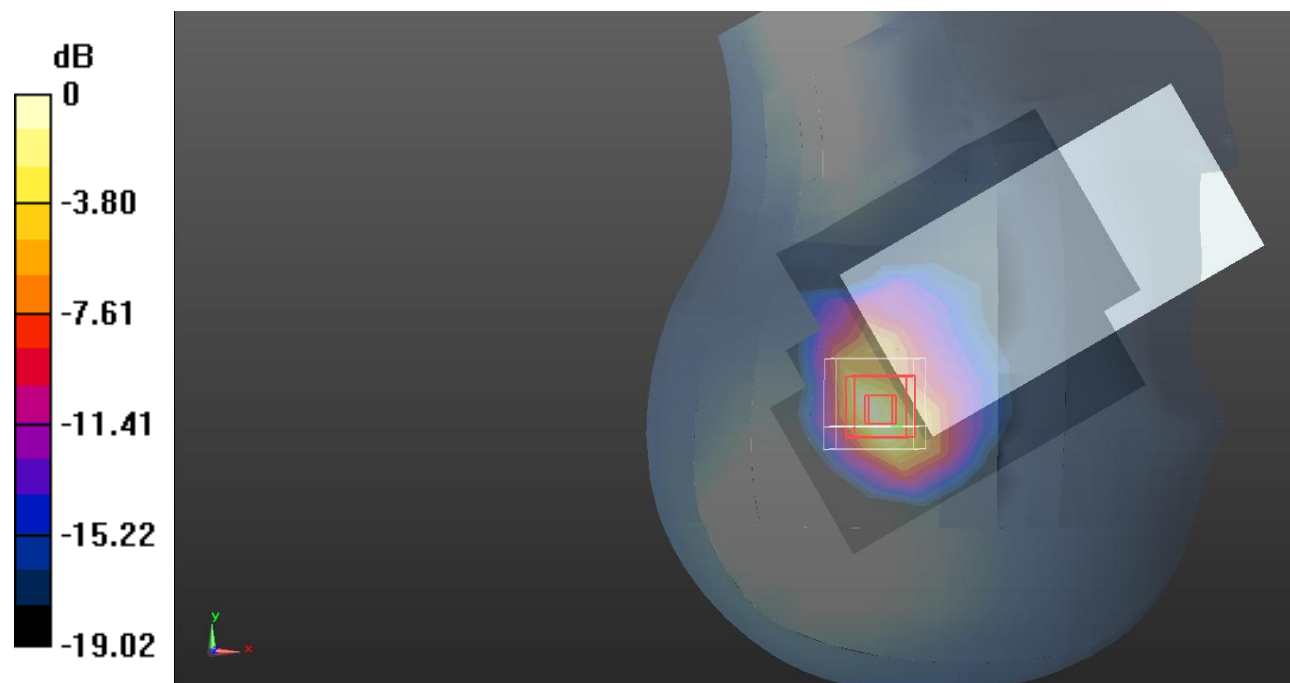

0 dB = 1.05 W/kg = 0.21 dB dBW/kg

Test Plot 56#: LTE Band 2_Head Right Tilt_50%RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.336$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.532 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.18 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.606 W/kg; SAR(10 g) = 0.301 W/kg

Maximum value of SAR (measured) = 0.894 W/kg

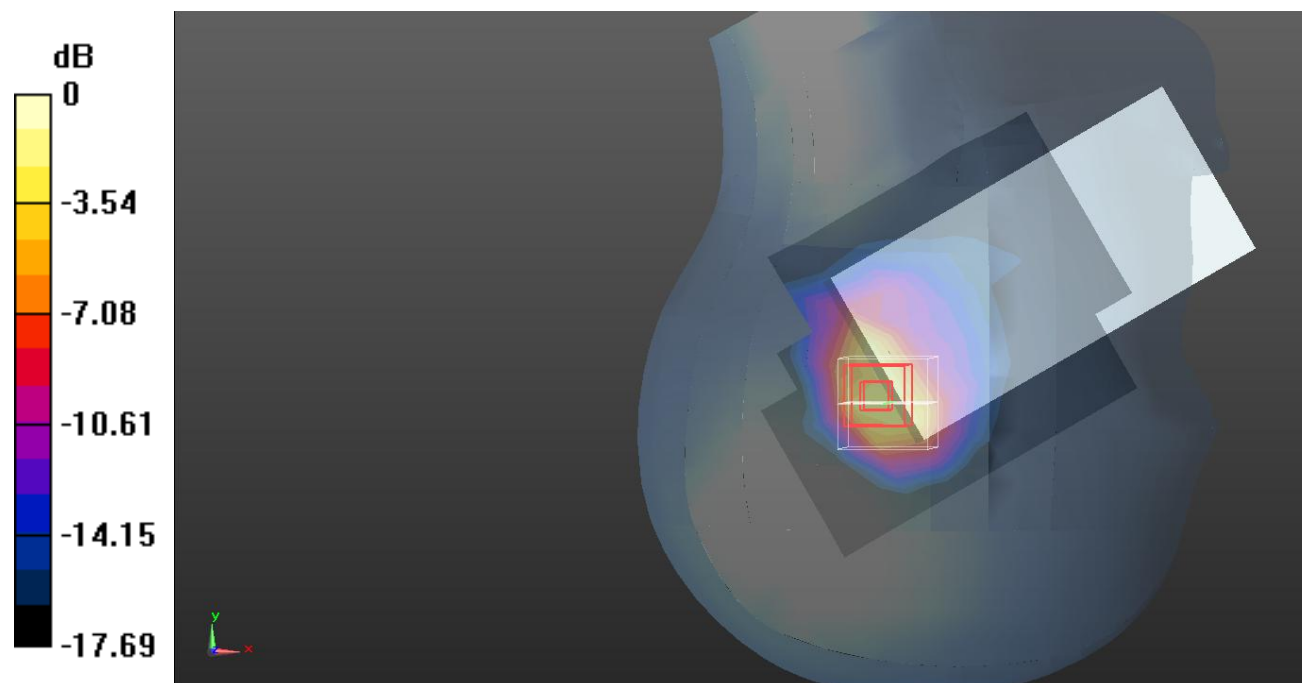

0 dB = 0.894 W/kg = -0.49 dB dBW/kg

Test Plot 57#: LTE Band 2_Body Front_1RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.414 \text{ S/m}$; $\epsilon_r = 40.336$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.253 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.135 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.299 W/kg

SAR(1 g) = 0.181 W/kg; SAR(10 g) = 0.103 W/kg

Maximum value of SAR (measured) = 0.256 W/kg

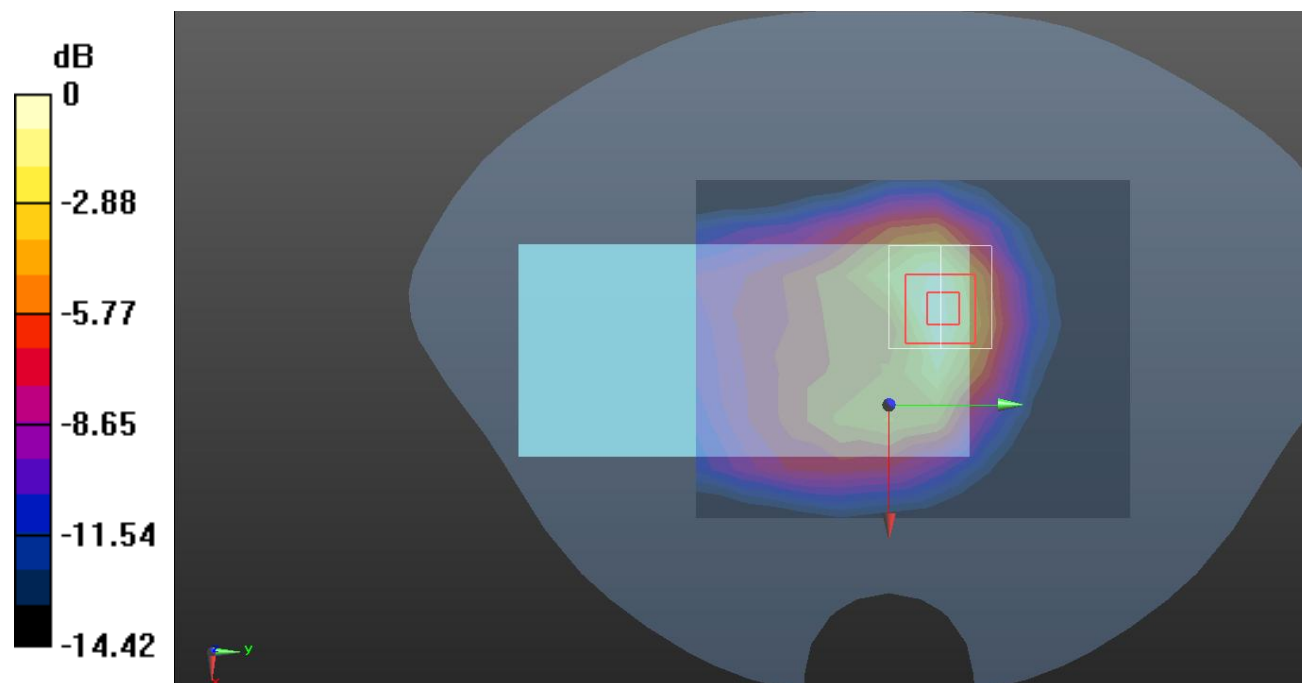

0 dB = 0.256 W/kg = -5.92 dB dBW/kg

Test Plot 58#: LTE Band 2_Body Front_50%RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.336$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.226 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.467 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.261 W/kg

SAR(1 g) = 0.157 W/kg; SAR(10 g) = 0.089 W/kg

Maximum value of SAR (measured) = 0.222 W/kg

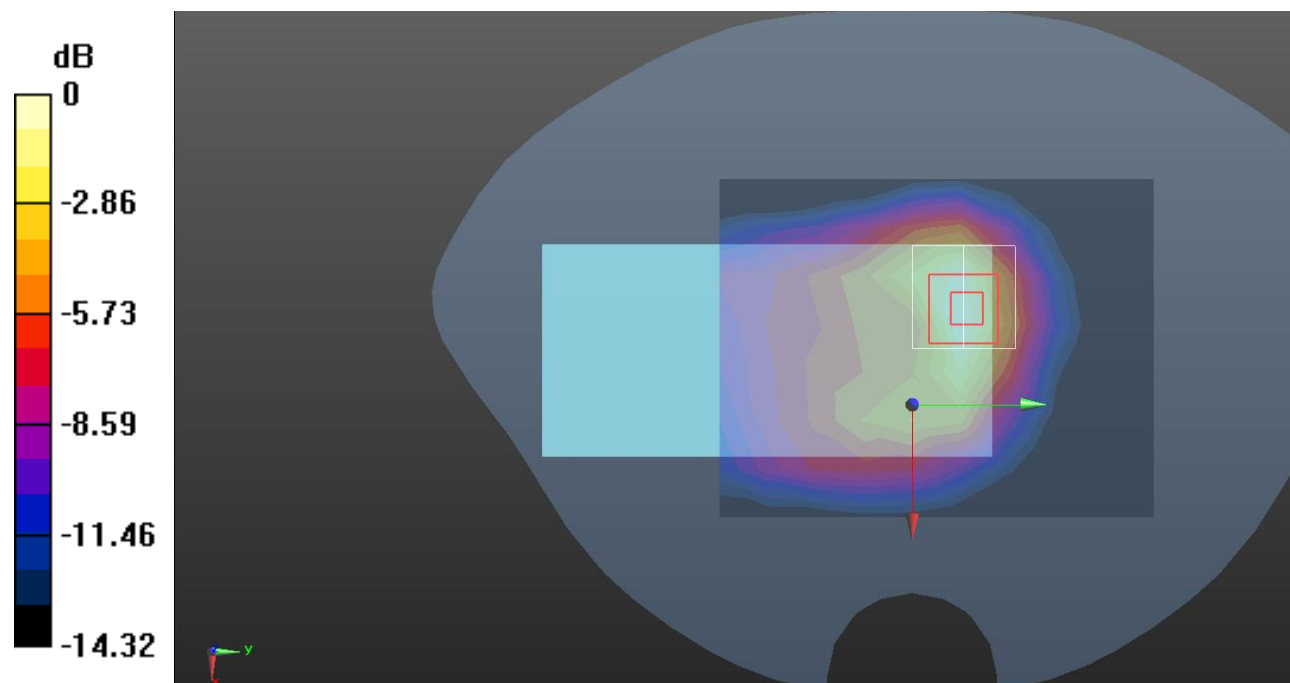

0 dB = 0.222 W/kg = -6.54 dB dBW/kg

Test Plot 59#: LTE Band 2_Body Back_1RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.414 \text{ S/m}$; $\epsilon_r = 40.336$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.286 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.457 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.325 W/kg

SAR(1 g) = 0.211 W/kg; SAR(10 g) = 0.122 W/kg

Maximum value of SAR (measured) = 0.290 W/kg

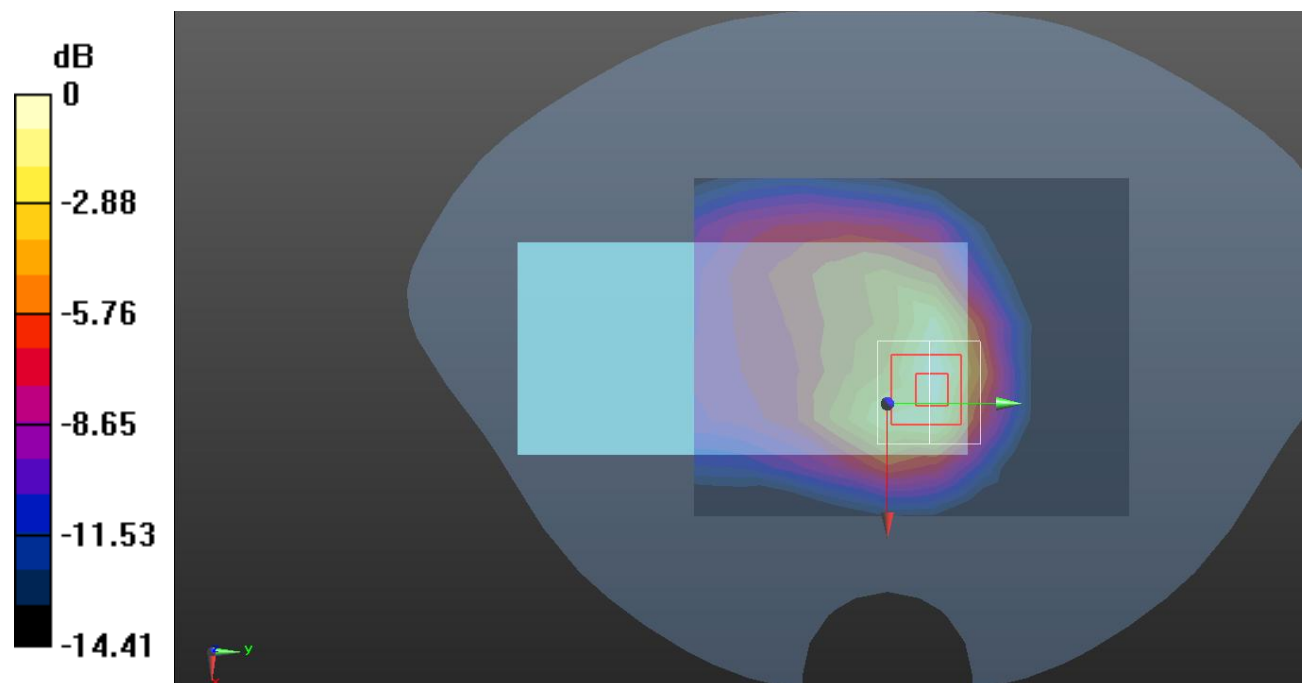

0 dB = 0.290 W/kg = -5.38 dB dBW/kg

Test Plot 60#: LTE Band 2_Body Back_50%RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.336$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.264 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.962 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.306 W/kg

SAR(1 g) = 0.185 W/kg; SAR(10 g) = 0.101 W/kg

Maximum value of SAR (measured) = 0.264 W/kg

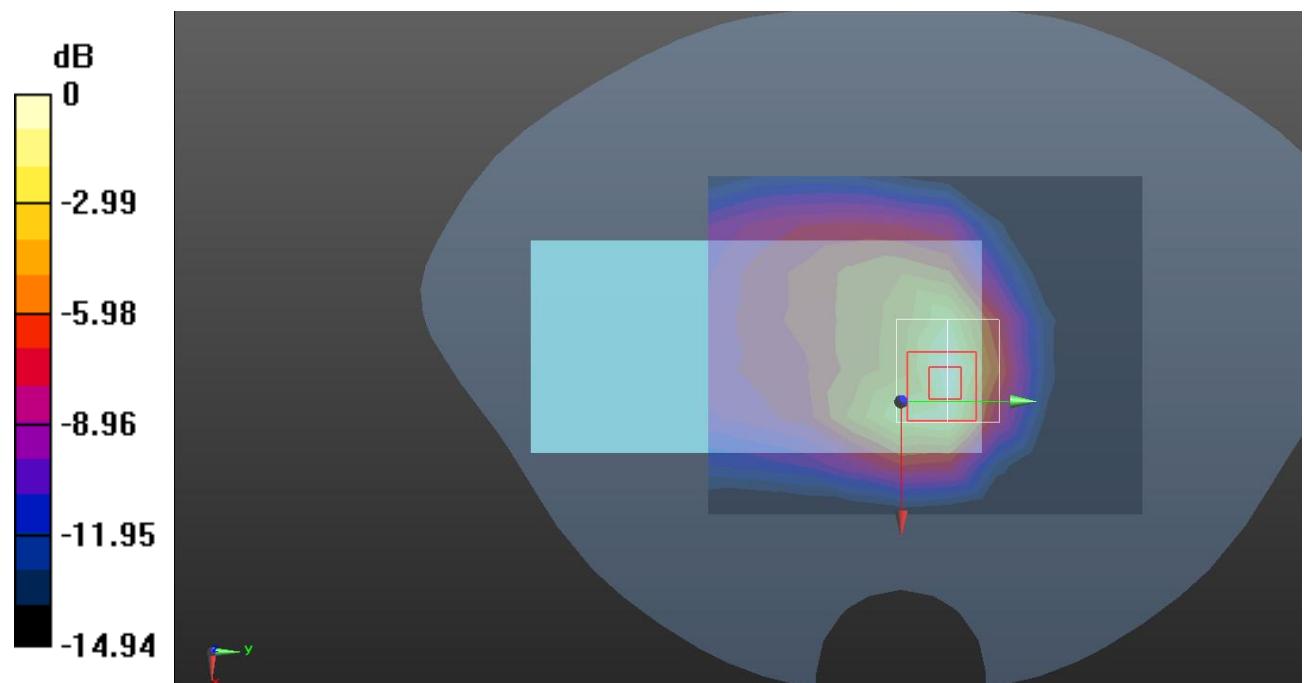

0 dB = 0.264 W/kg = -5.78 dB dBW/kg

Test Plot 61#: LTE Band 2_Body Left_1RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.336$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.105 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.768 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.103 W/kg

SAR(1 g) = 0.069 W/kg; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 0.0902 W/kg

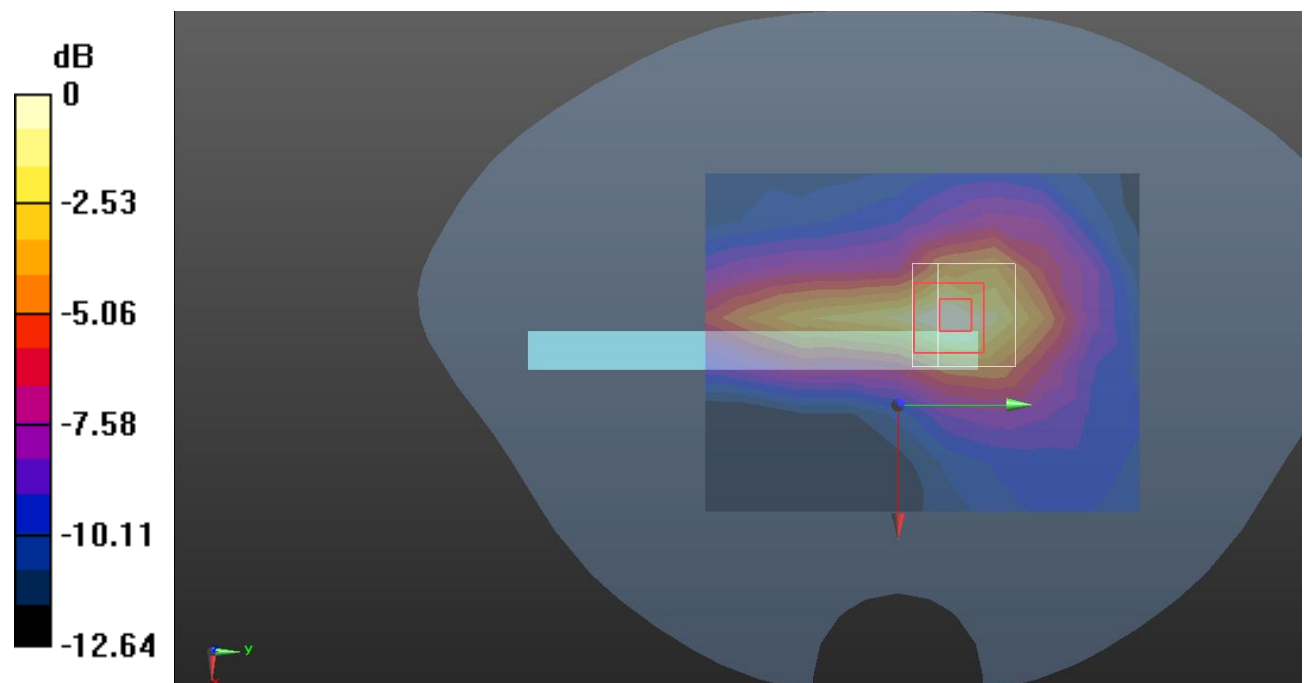

0 dB = 0.0902 W/kg = -10.45 dB dBW/kg

Test Plot 62#: LTE Band 2_Body Left_50%RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.336$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0916 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.353 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0890 W/kg

SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.033 W/kg

Maximum value of SAR (measured) = 0.0791 W/kg

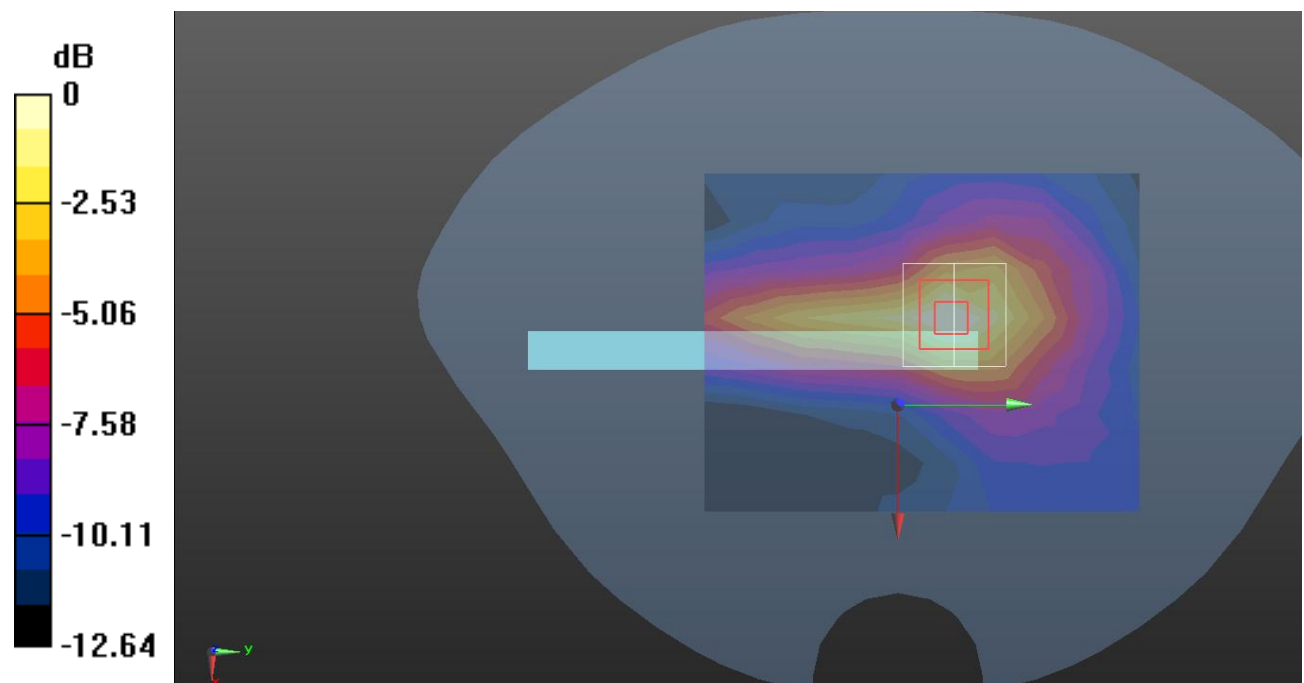

0 dB = 0.0791 W/kg = -11.02 dB dBW/kg

Test Plot 63#: LTE Band 2_Body Top_1RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 40.336$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.251 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.32 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.375 W/kg

SAR(1 g) = 0.233 W/kg; SAR(10 g) = 0.123 W/kg

Maximum value of SAR (measured) = 0.324 W/kg

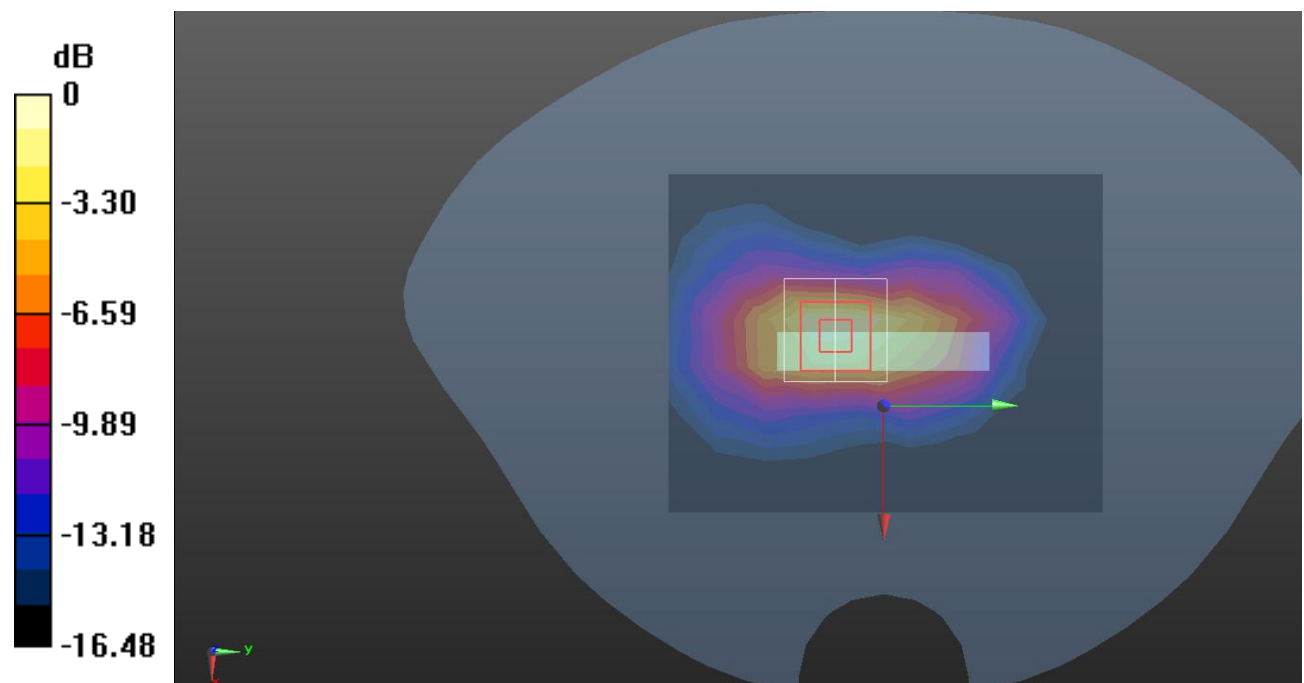

0 dB = 0.324 W/kg = -4.89 dB dBW/kg

Test Plot 64#: LTE Band 2_Body Top_50%RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.414 \text{ S/m}$; $\epsilon_r = 40.336$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1880 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.215 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.44 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.325 W/kg

SAR(1 g) = 0.201 W/kg; SAR(10 g) = 0.106 W/kg

Maximum value of SAR (measured) = 0.280 W/kg

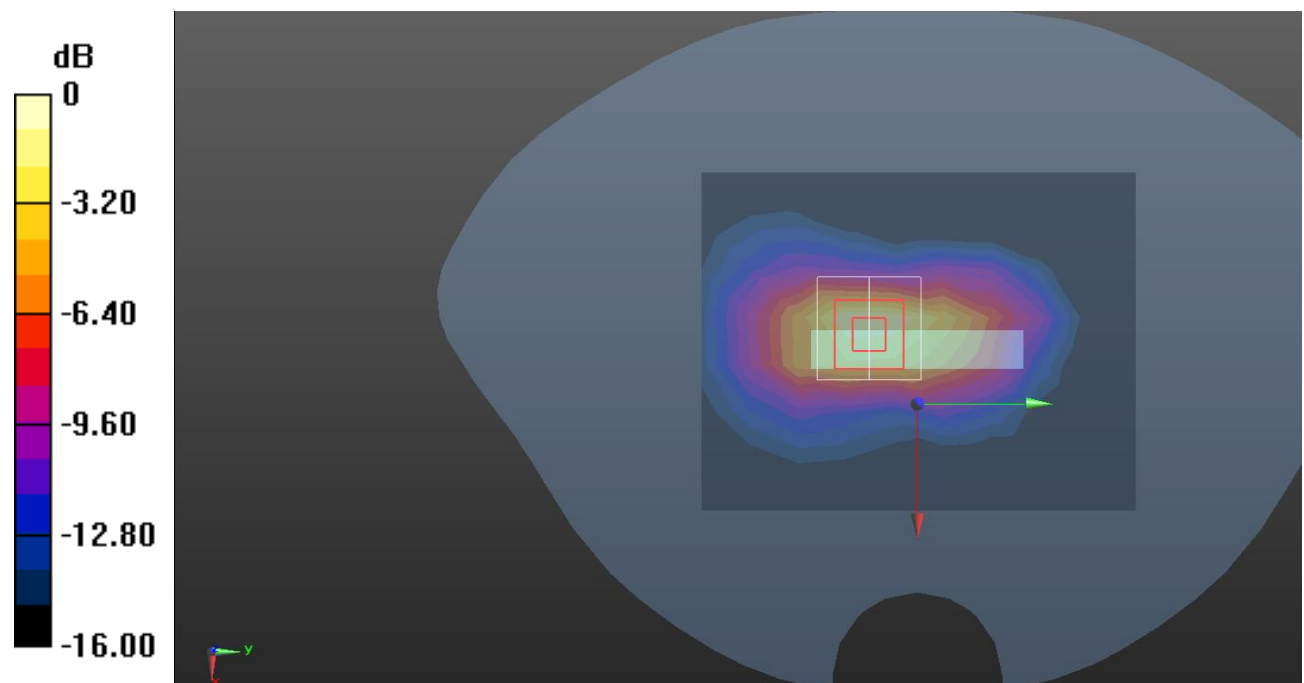

0 dB = 0.280 W/kg = -5.53 dB dBW/kg

Test Plot 65#: LTE Band 7_Head Left Cheek_1RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.491$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.297 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.690 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.340 W/kg

SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.098 W/kg

Maximum value of SAR (measured) = 0.288 W/kg

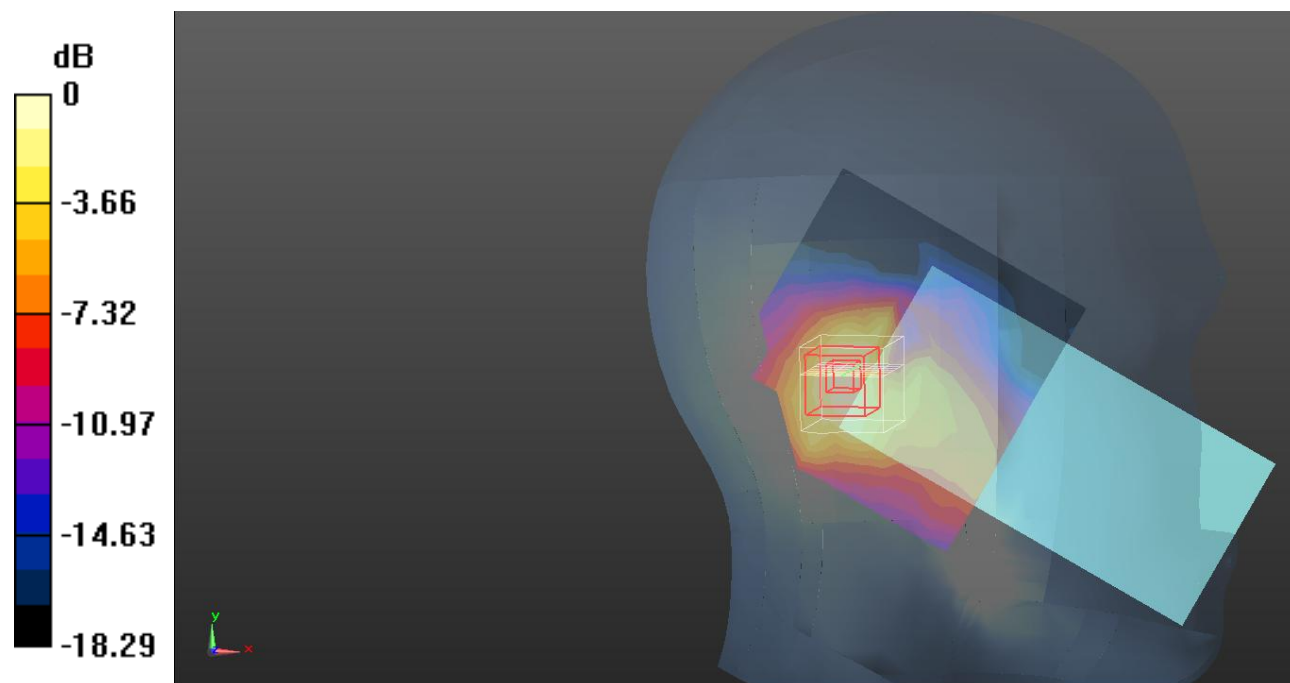

0 dB = 0.288 W/kg = -5.41 dB dBW/kg

Test Plot 66#: LTE Band 7_Head Left Cheek_50%RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.491$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.241 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.993 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.275 W/kg

SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.080 W/kg

Maximum value of SAR (measured) = 0.234 W/kg

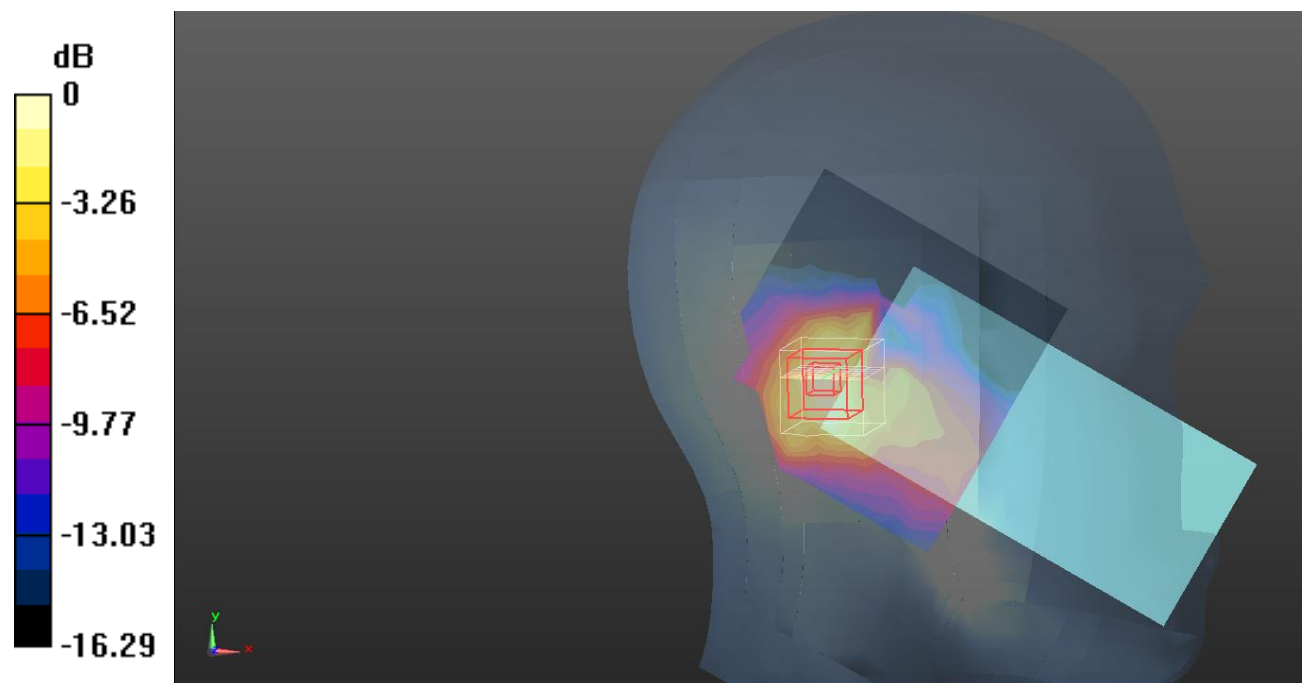

0 dB = 0.234 W/kg = -6.31 dB dBW/kg

Test Plot 67#: LTE Band 7_Head Left Tilt_1RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.491$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.385 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.263 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.397 W/kg

SAR(1 g) = 0.220 W/kg; SAR(10 g) = 0.117 W/kg

Maximum value of SAR (measured) = 0.322 W/kg

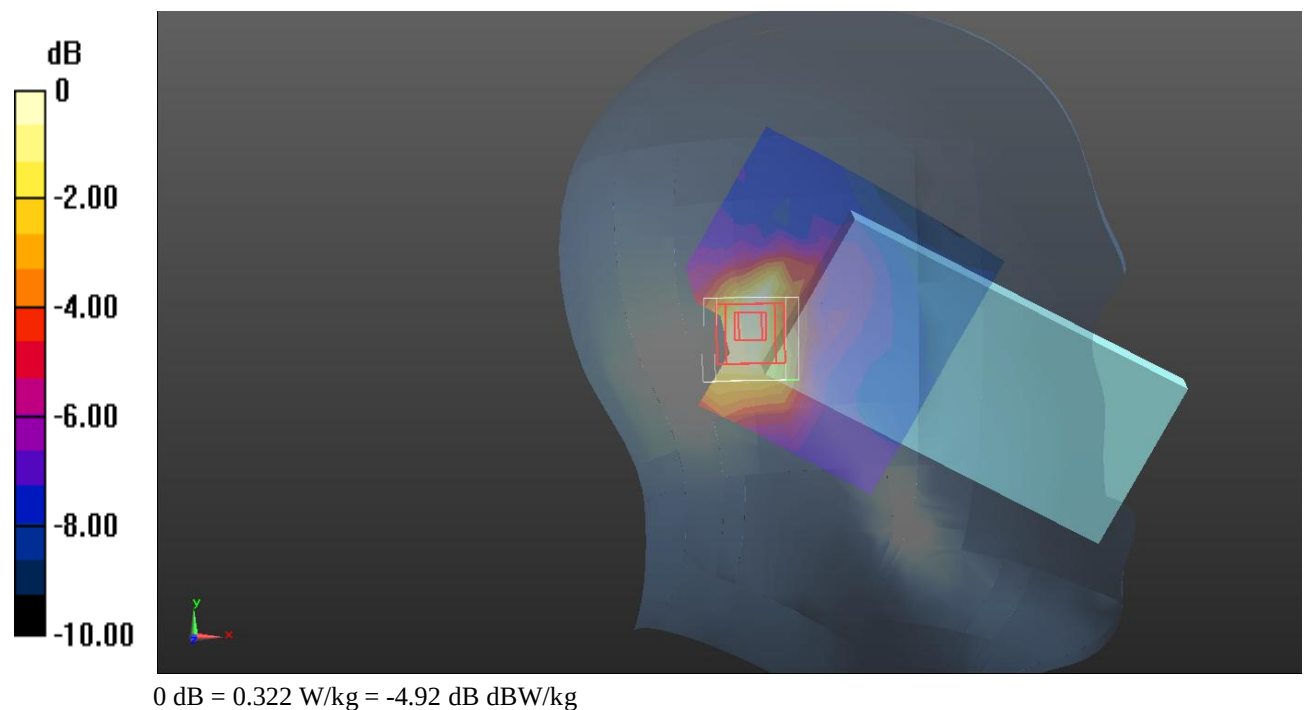

Test Plot 68#: LTE Band 7_Head Left Tilt_50%RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.491$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.339 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.855 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.407 W/kg

SAR(1 g) = 0.219 W/kg; SAR(10 g) = 0.109 W/kg

Maximum value of SAR (measured) = 0.332 W/kg

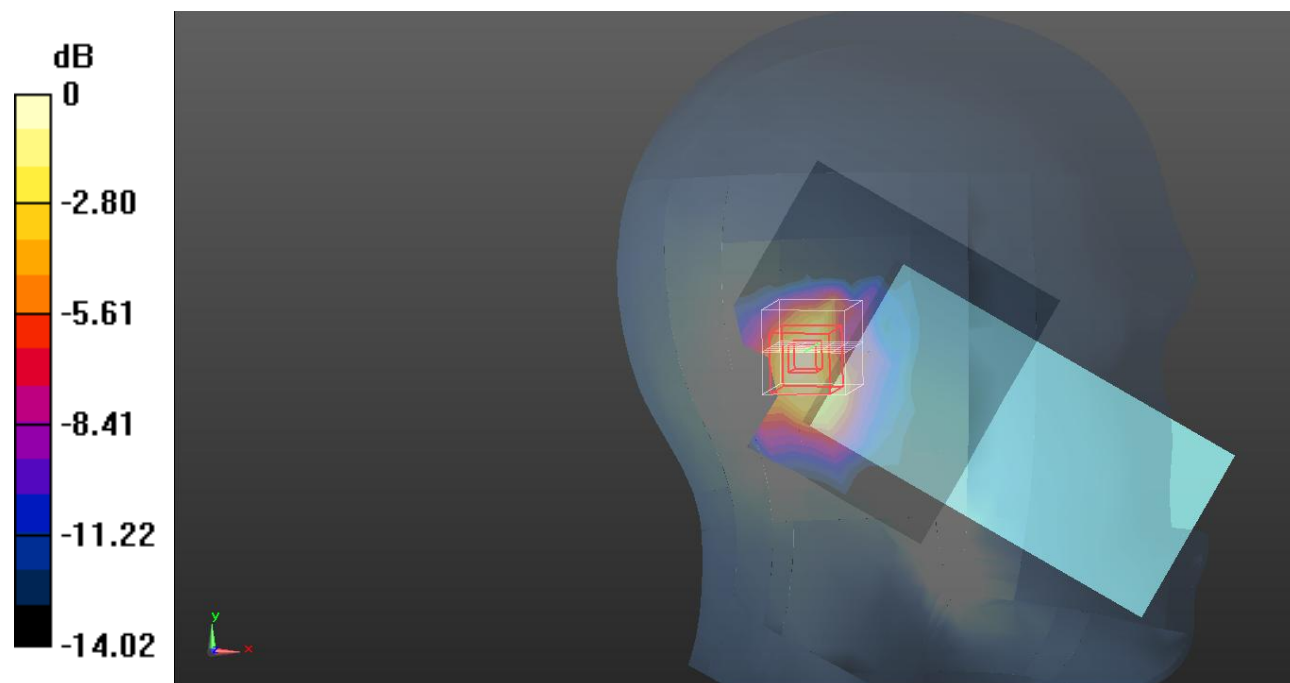

0 dB = 0.332 W/kg = -4.79 dB dBW/kg

Test Plot 69#: LTE Band 7_Head Right Cheek_1RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.491$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.798 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.602 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.967 W/kg

SAR(1 g) = 0.545 W/kg; SAR(10 g) = 0.282 W/kg

Maximum value of SAR (measured) = 0.812 W/kg

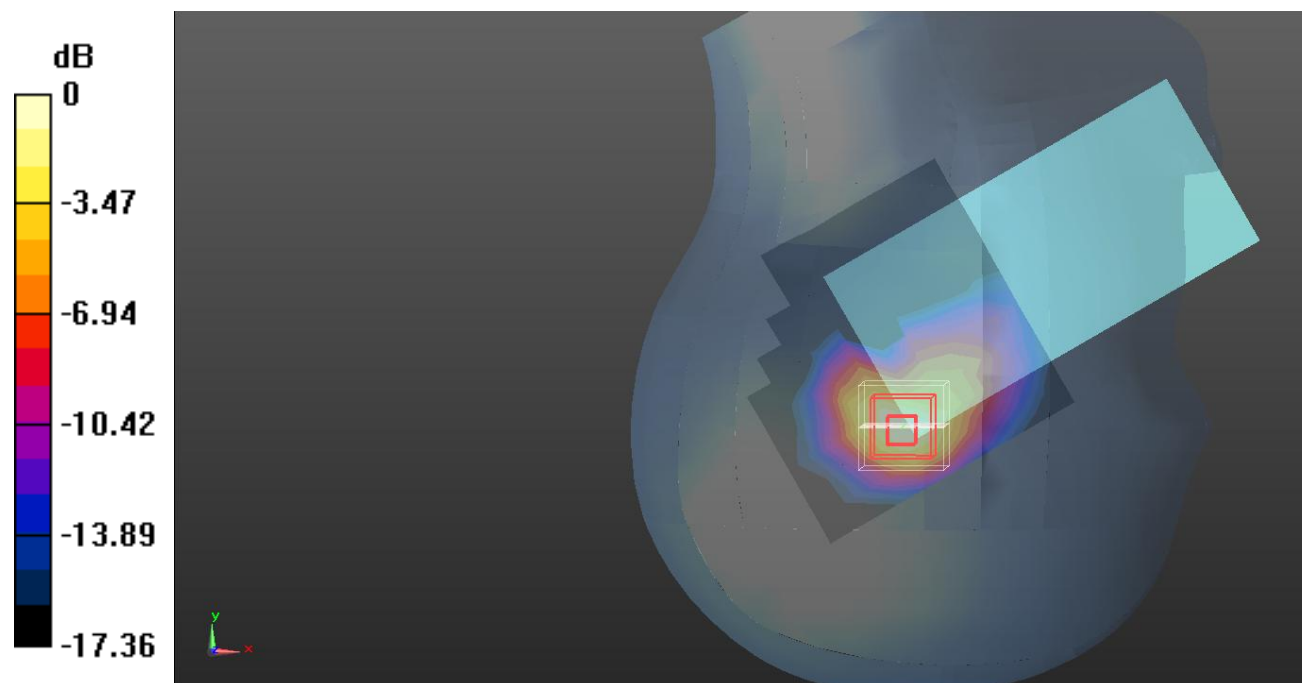

0 dB = 0.812 W/kg = -0.90 dB dBW/kg

Test Plot 70#: LTE Band 7_Head Right Cheek_50%RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.491$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.678 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.825 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.816 W/kg

SAR(1 g) = 0.455 W/kg; SAR(10 g) = 0.235 W/kg

Maximum value of SAR (measured) = 0.678 W/kg

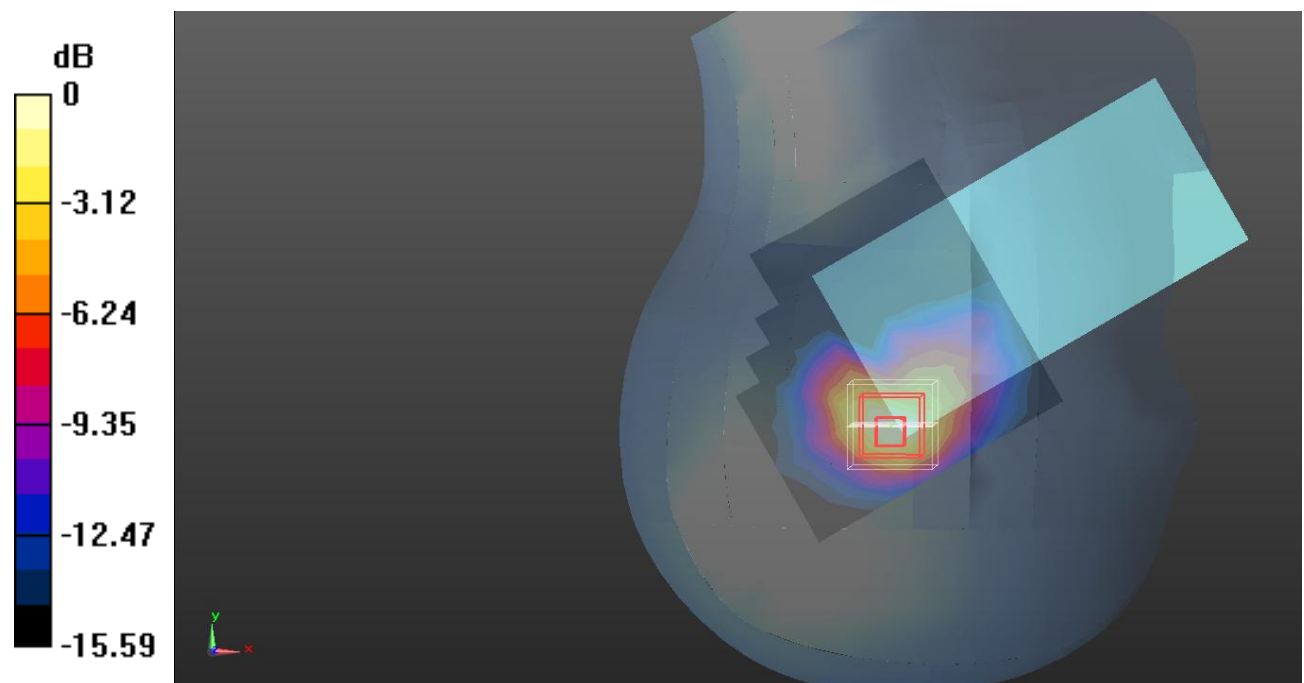

0 dB = 0.678 W/kg = -1.69 dB dBW/kg

Test Plot 71#: LTE Band 7_Head Right Tilt_1RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.491$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.797 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.747 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.619 W/kg; SAR(10 g) = 0.290 W/kg

Maximum value of SAR (measured) = 0.955 W/kg

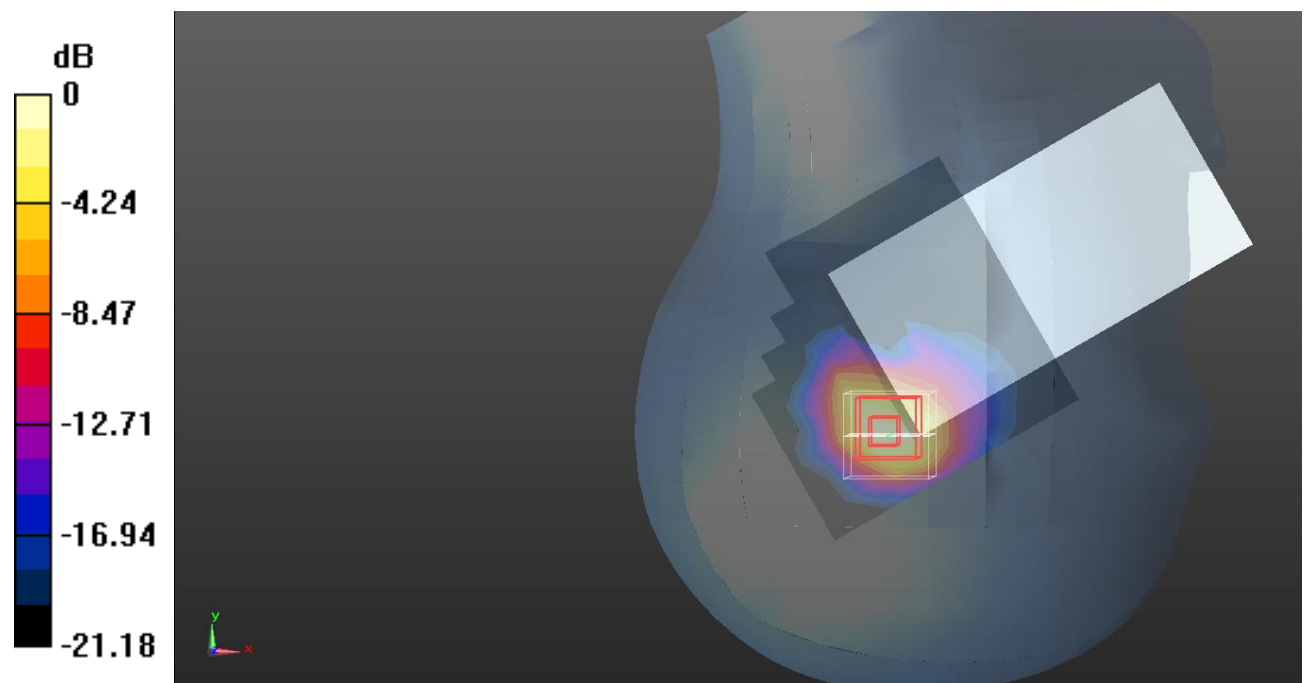

0 dB = 0.955 W/kg = -0.20 dB dBW/kg

Test Plot 72#: LTE Band 7_Head Right Tilt_50%RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.491$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.673 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.298 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.558 W/kg; SAR(10 g) = 0.286 W/kg

Maximum value of SAR (measured) = 0.892 W/kg

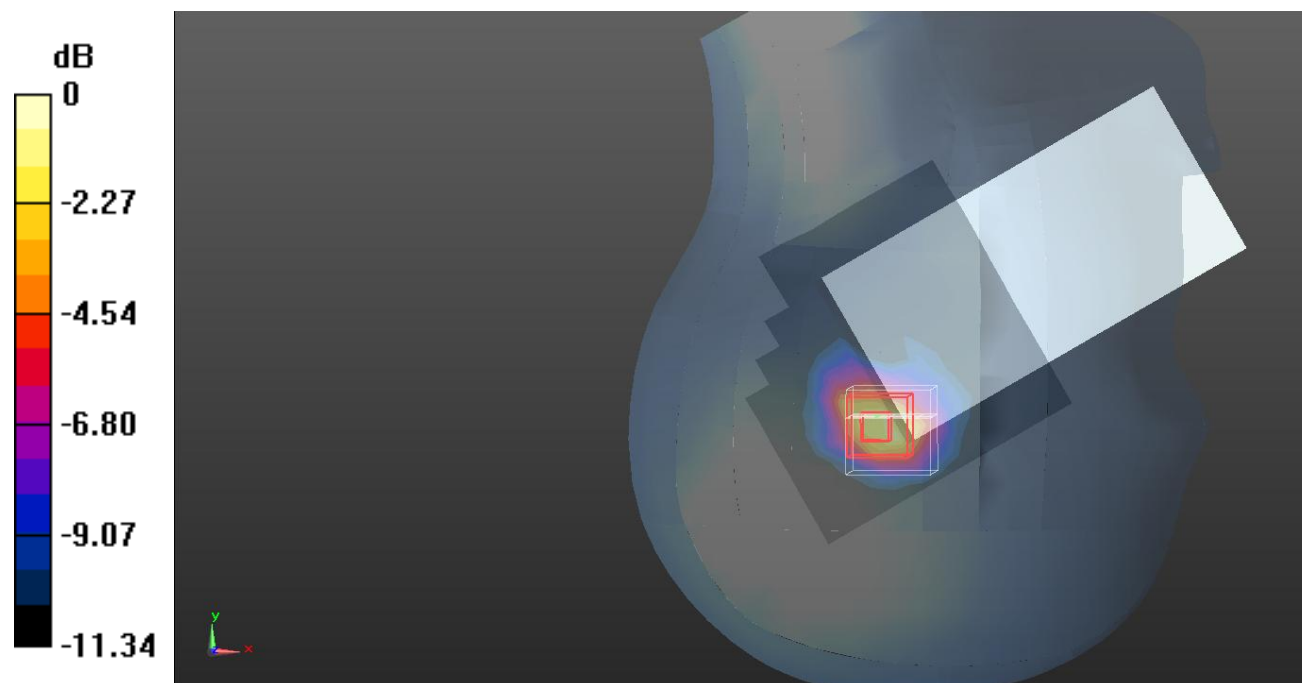

0 dB = 0.892 W/kg = -0.50 dB dBW/kg

Test Plot 73#: LTE Band 7_Body Front_1RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.491$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (12x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.184 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.160 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.221 W/kg

SAR(1 g) = 0.118 W/kg; SAR(10 g) = 0.064 W/kg

Maximum value of SAR (measured) = 0.178 W/kg

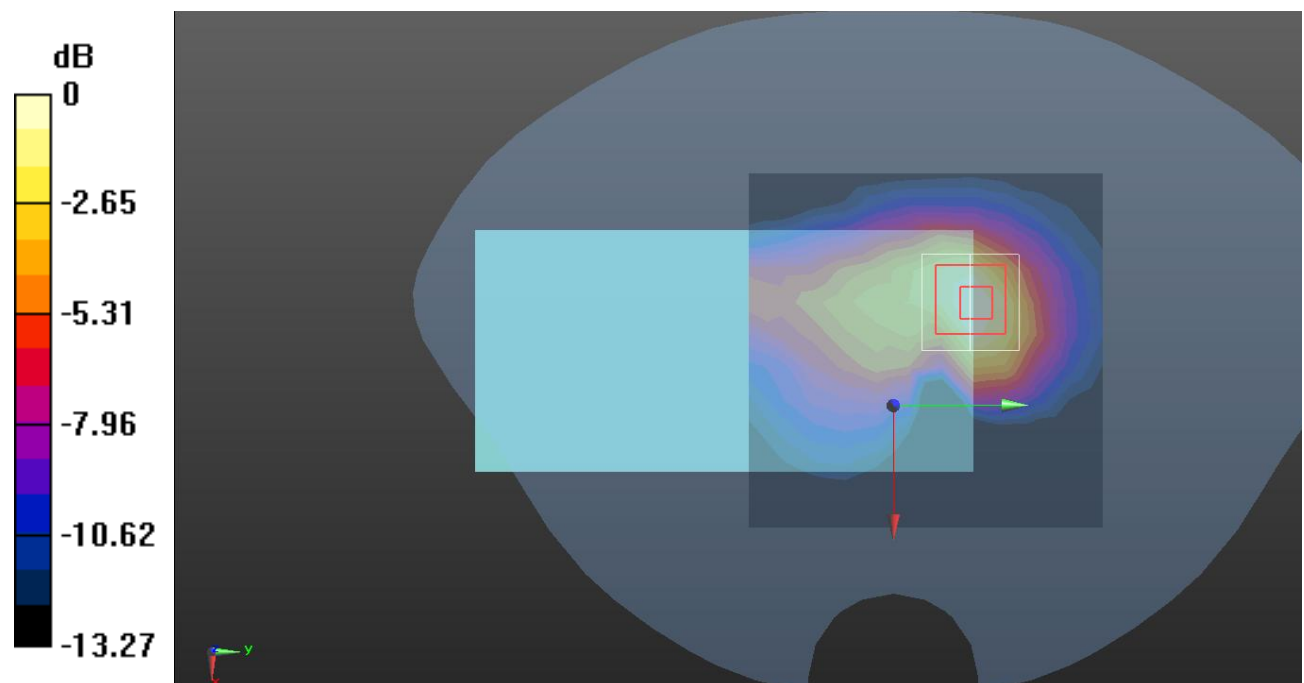

0 dB = 0.178 W/kg = -7.50 dB dBW/kg

Test Plot 74#: LTE Band 7_Body Front_50%RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.491$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (12x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.151 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.346 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.182 W/kg

SAR(1 g) = 0.096 W/kg; SAR(10 g) = 0.052 W/kg

Maximum value of SAR (measured) = 0.145 W/kg

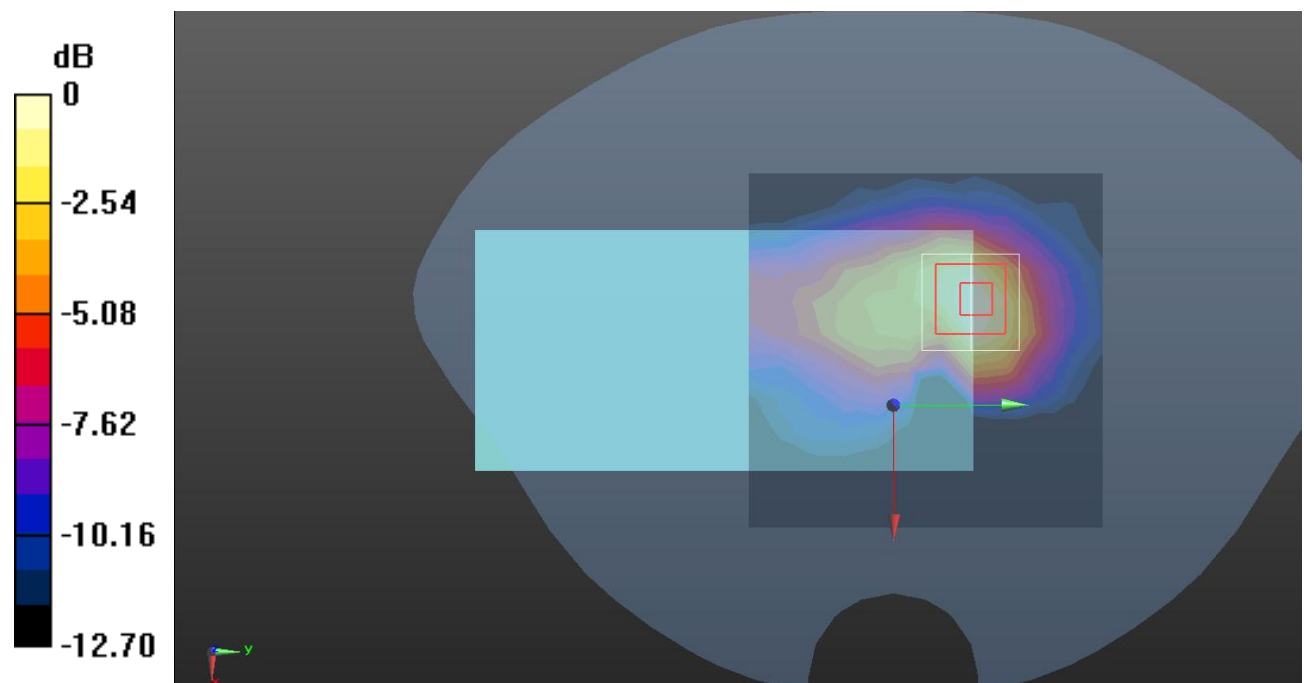

0 dB = 0.145 W/kg = -8.39 dB dBW/kg

Test Plot 75#: LTE Band 7_Body Back_1RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.491$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (12x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.642 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.459 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.762 W/kg

SAR(1 g) = 0.403 W/kg; SAR(10 g) = 0.188 W/kg

Maximum value of SAR (measured) = 0.623 W/kg

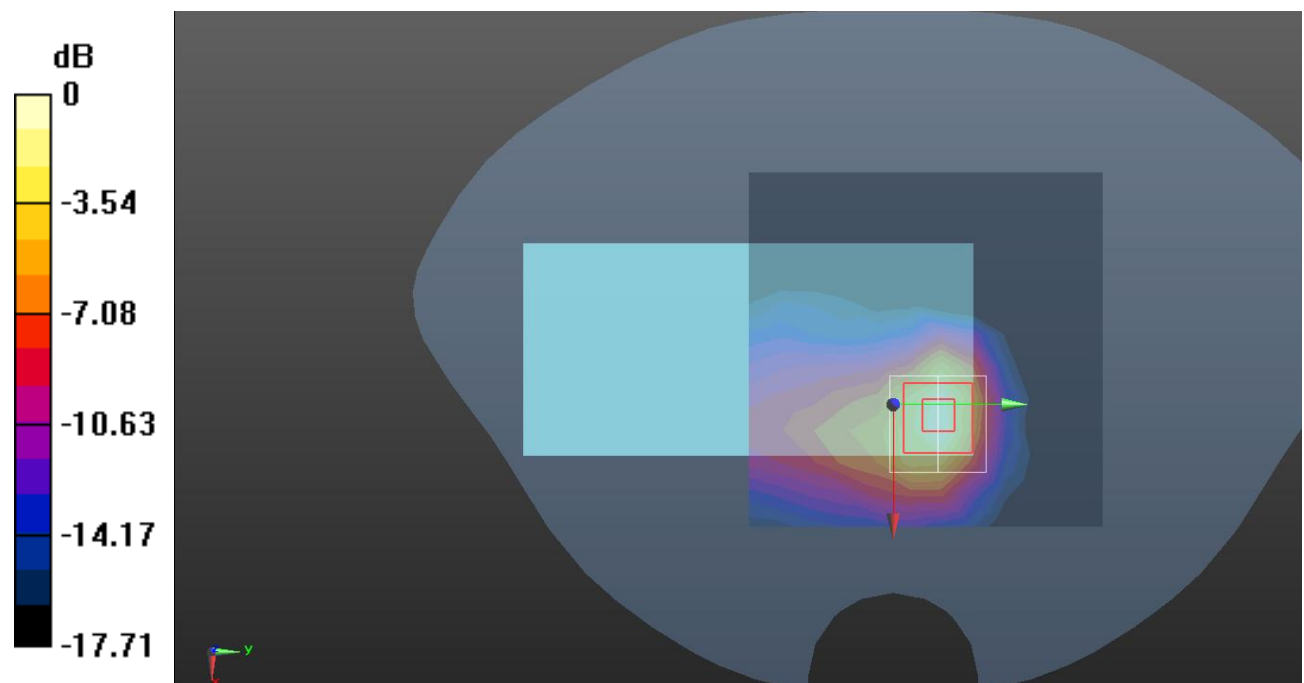

0 dB = 0.623 W/kg = -2.06 dB dBW/kg

Test Plot 76#: LTE Band 7_Body Back_50%RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.491$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (12x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.504 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.616 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.633 W/kg

SAR(1 g) = 0.332 W/kg; SAR(10 g) = 0.155 W/kg

Maximum value of SAR (measured) = 0.516 W/kg

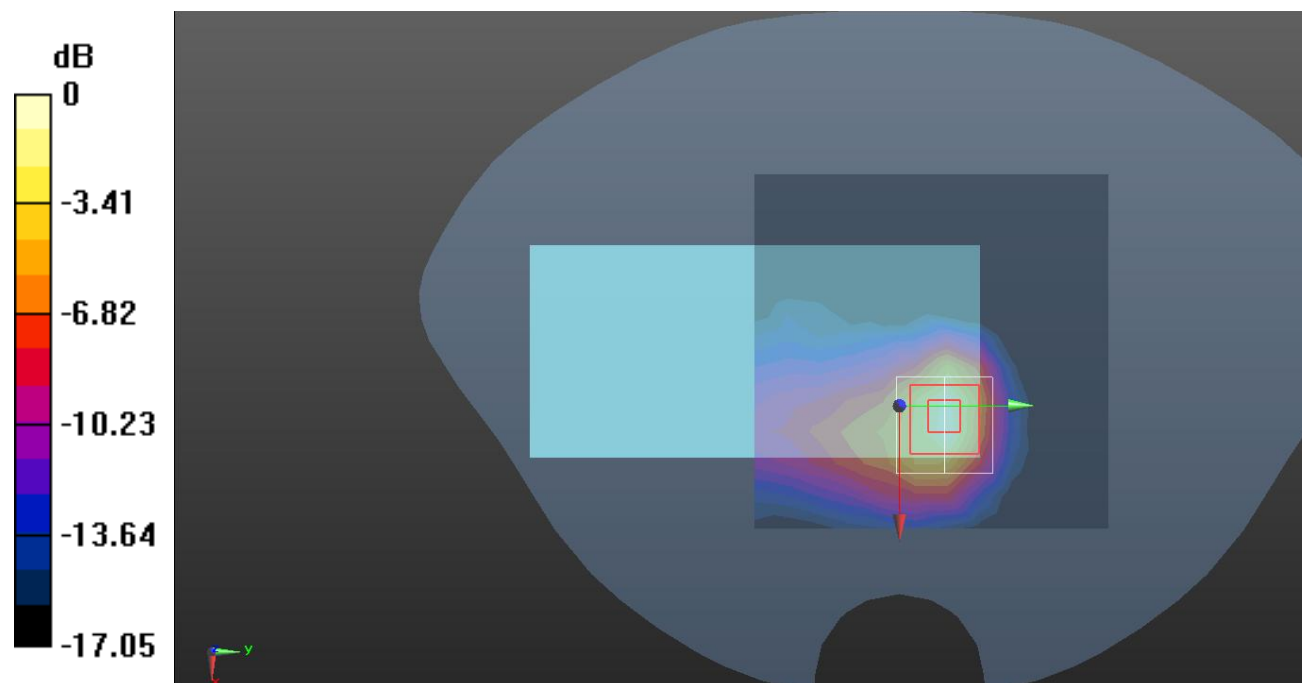

0 dB = 0.516 W/kg = -2.87 dB dBW/kg

Test Plot 77#: LTE Band 7_Body Left_1RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.491$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (9x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.168 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.545 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.186 W/kg

SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.064 W/kg

Maximum value of SAR (measured) = 0.161 W/kg

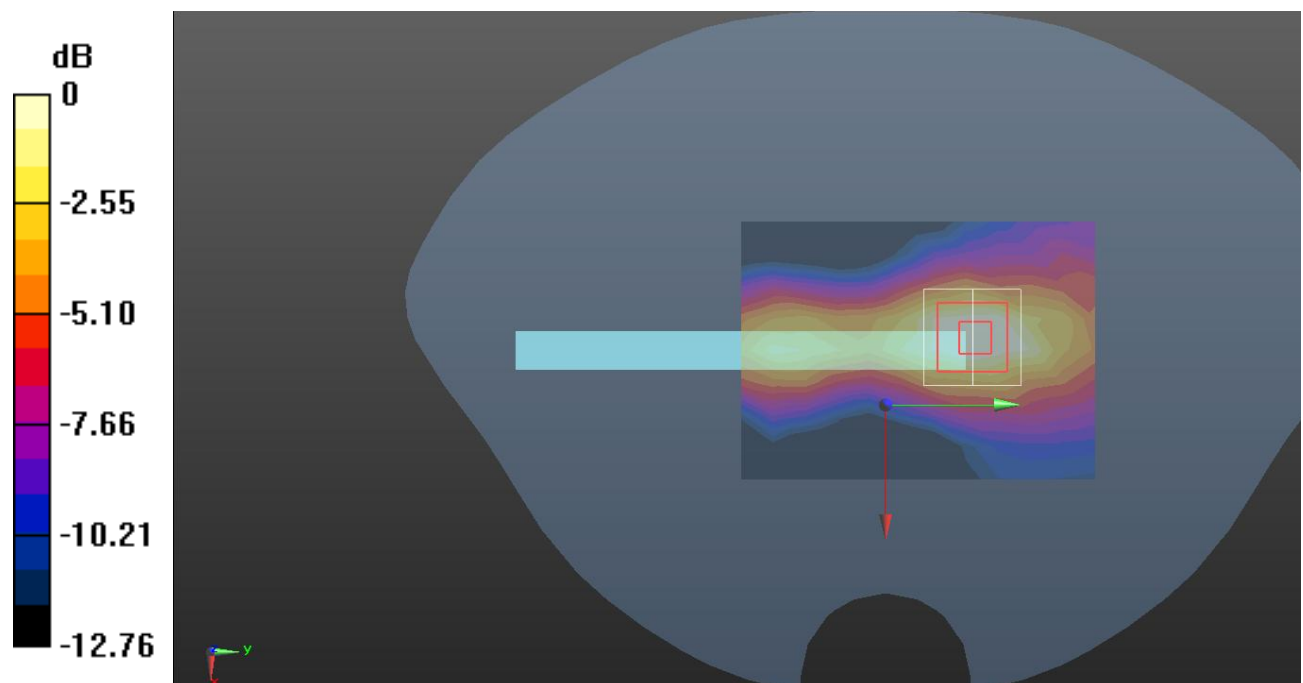

0 dB = 0.161 W/kg = -7.93 dB dBW/kg

Test Plot 78#: LTE Band 7_Body Left_50%RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.491$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (9x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.133 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.371 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.150 W/kg

SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.128 W/kg

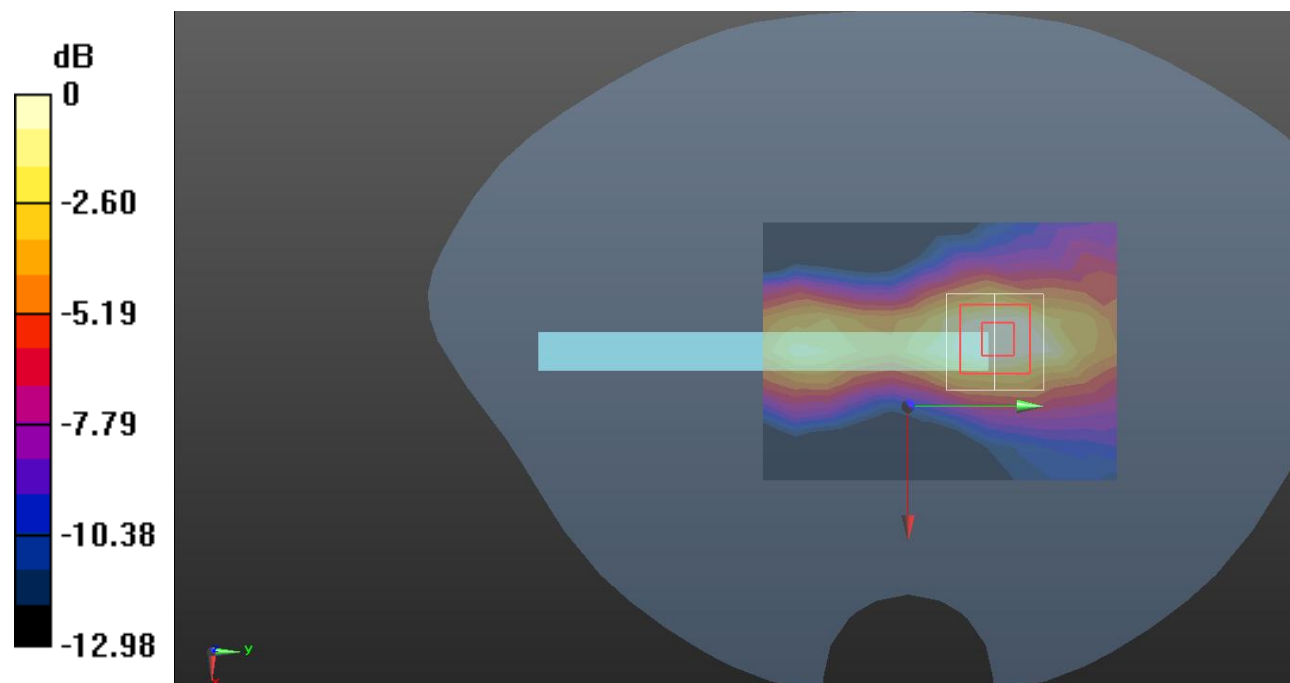

0 dB = 0.128 W/kg = -8.93 dB dBW/kg

Test Plot 79#: LTE Band 7_Body Top_1RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.491$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (9x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.477 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.857 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.538 W/kg

SAR(1 g) = 0.325 W/kg; SAR(10 g) = 0.154 W/kg

Maximum value of SAR (measured) = 0.474 W/kg

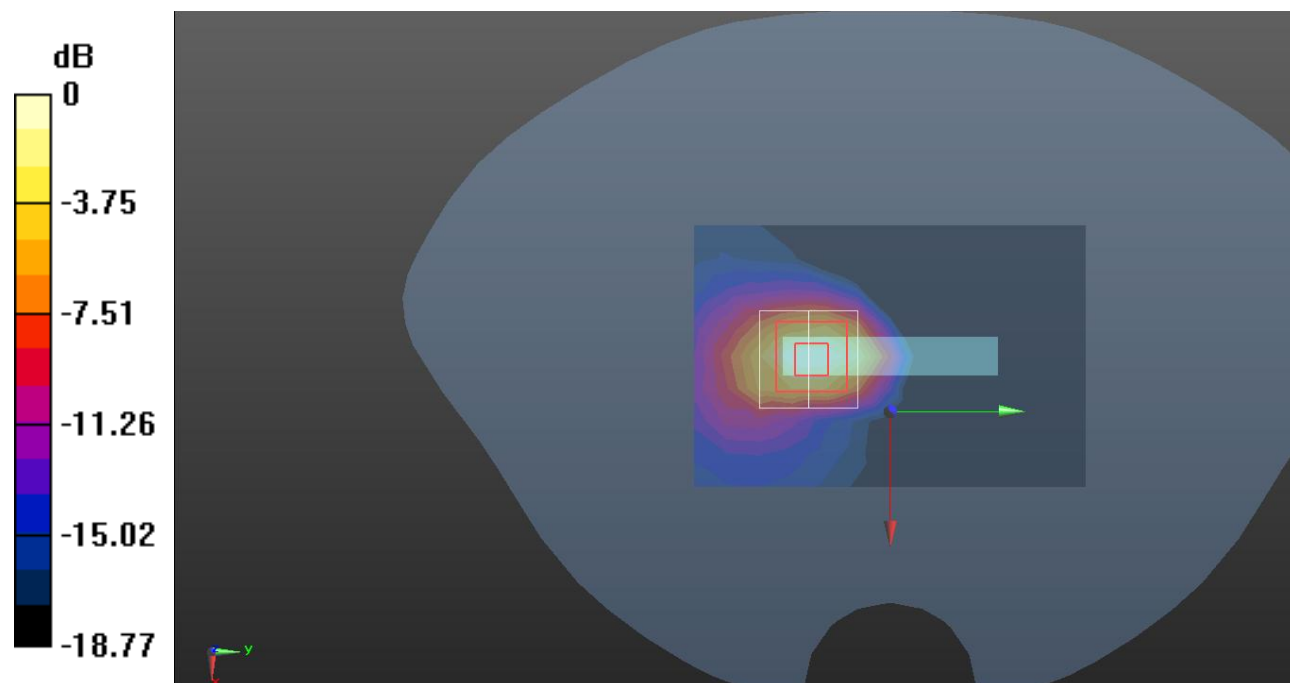

0 dB = 0.474 W/kg = -3.24 dB dBW/kg

Test Plot 80#: LTE Band 7_Body Top_50%RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.491$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (9x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.387 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.816 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.439 W/kg

SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.116 W/kg

Maximum value of SAR (measured) = 0.382 W/kg

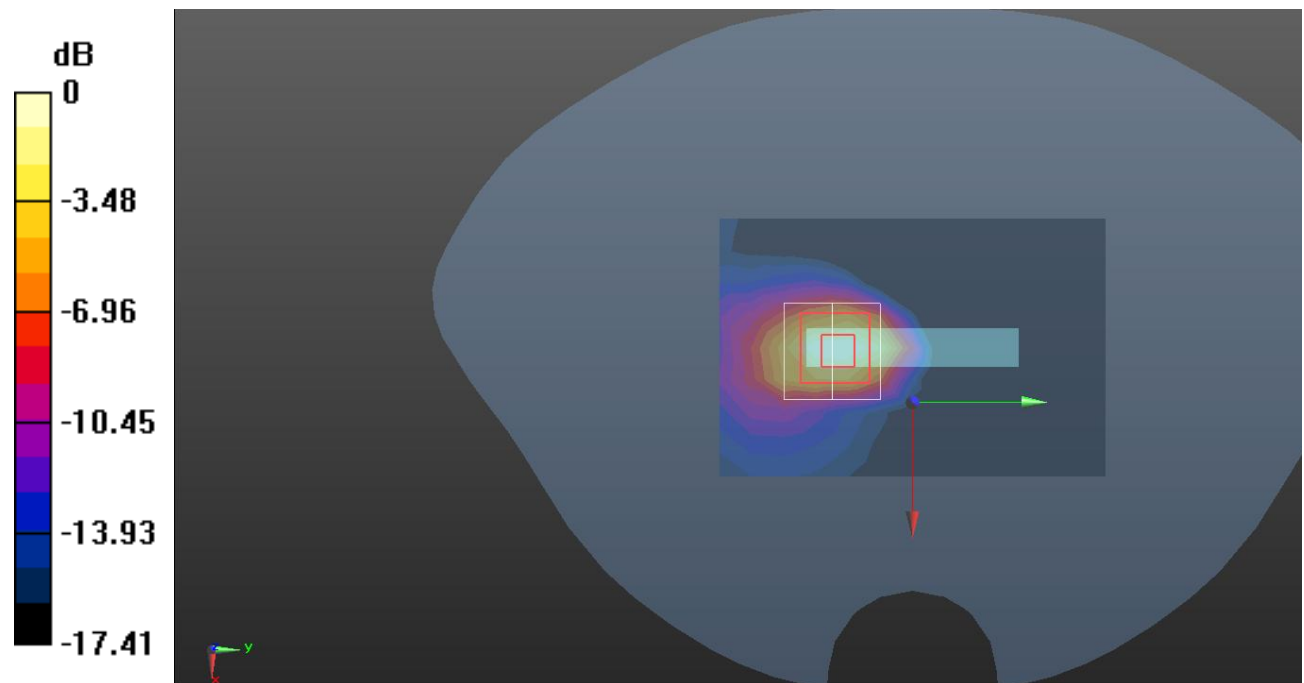

0 dB = 0.382 W/kg = -4.18 dB dBW/kg

Test Plot 81#: LTE Band 66_Head Left Cheek_1RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.383$ S/m; $\epsilon_r = 40.13$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15)@1745 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.263 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.00 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.347 W/kg

SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.115 W/kg

Maximum value of SAR (measured) = 0.291 W/kg

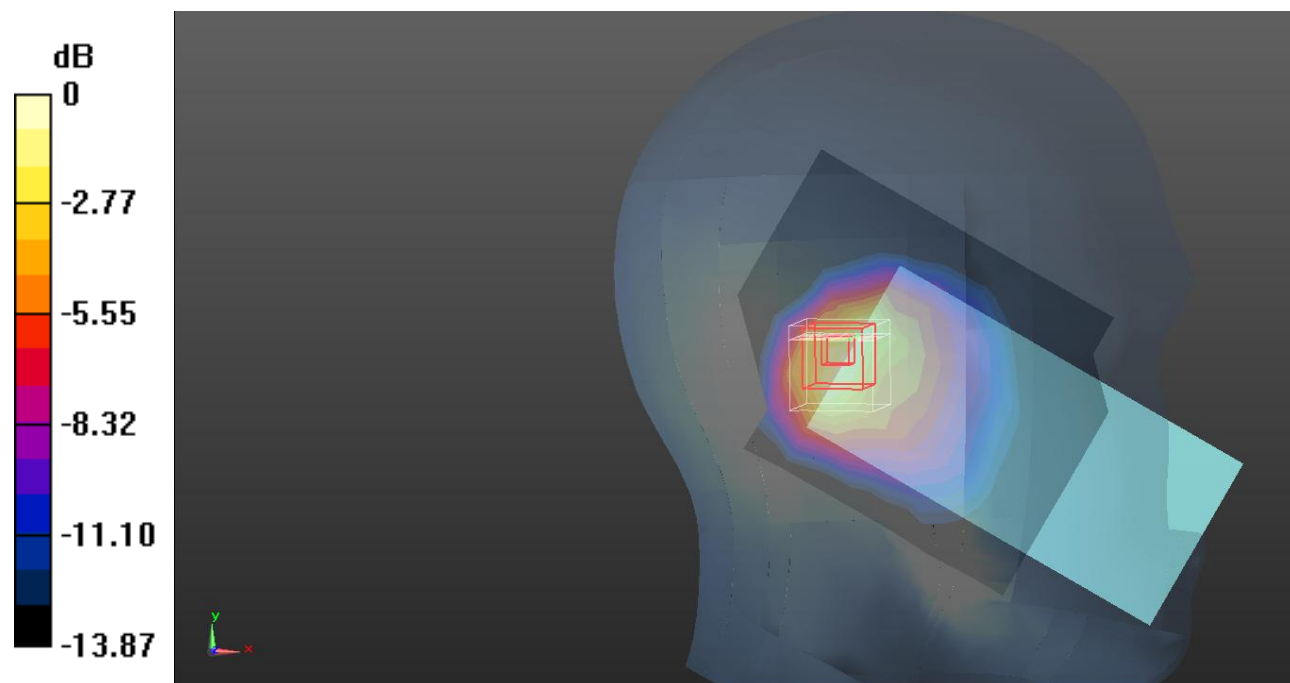

0 dB = 0.291 W/kg = -5.36 dB dBW/kg

Test Plot 82#: LTE Band 66_Head Left Cheek_50%RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.383$ S/m; $\epsilon_r = 40.13$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15)@1745 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.213 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.387 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.290 W/kg

SAR(1 g) = 0.174 W/kg; SAR(10 g) = 0.097 W/kg

Maximum value of SAR (measured) = 0.242 W/kg

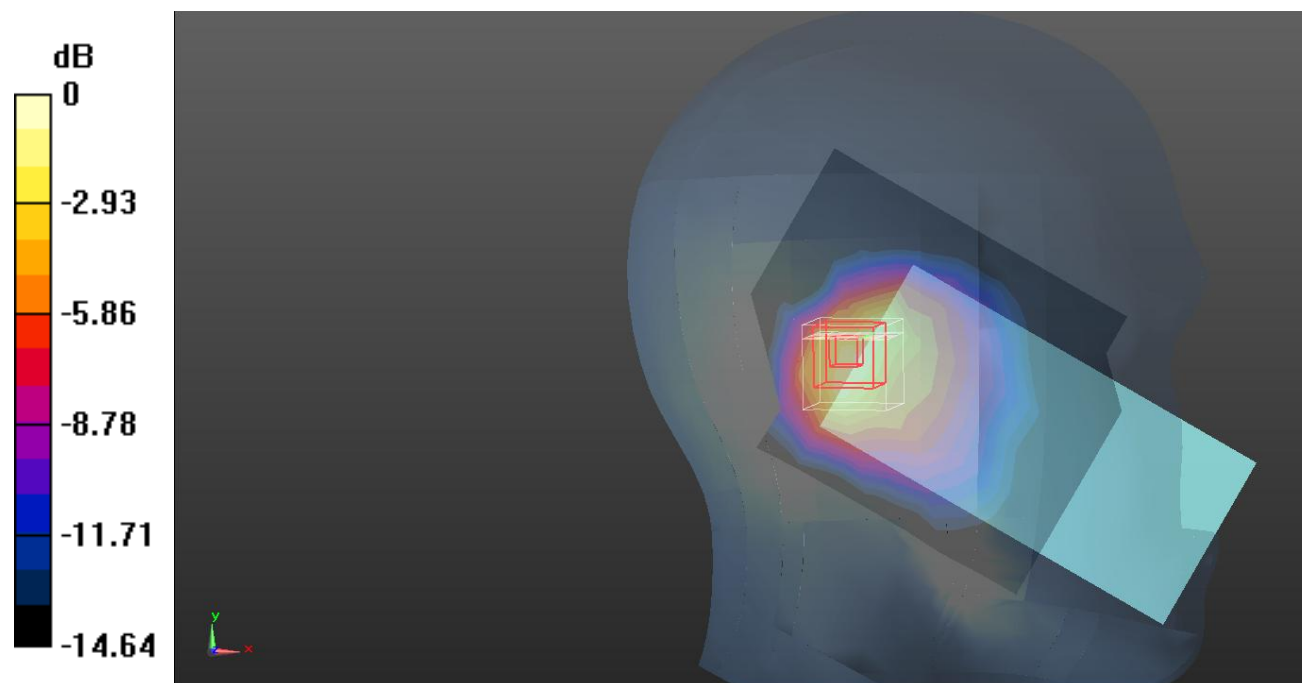

0 dB = 0.242 W/kg = -6.16 dB dBW/kg

Test Plot 83#: LTE Band 66_Head Left Tilt_1RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.383$ S/m; $\epsilon_r = 40.13$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15)@1745 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.361 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.08 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.435 W/kg

SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.133 W/kg

Maximum value of SAR (measured) = 0.358 W/kg

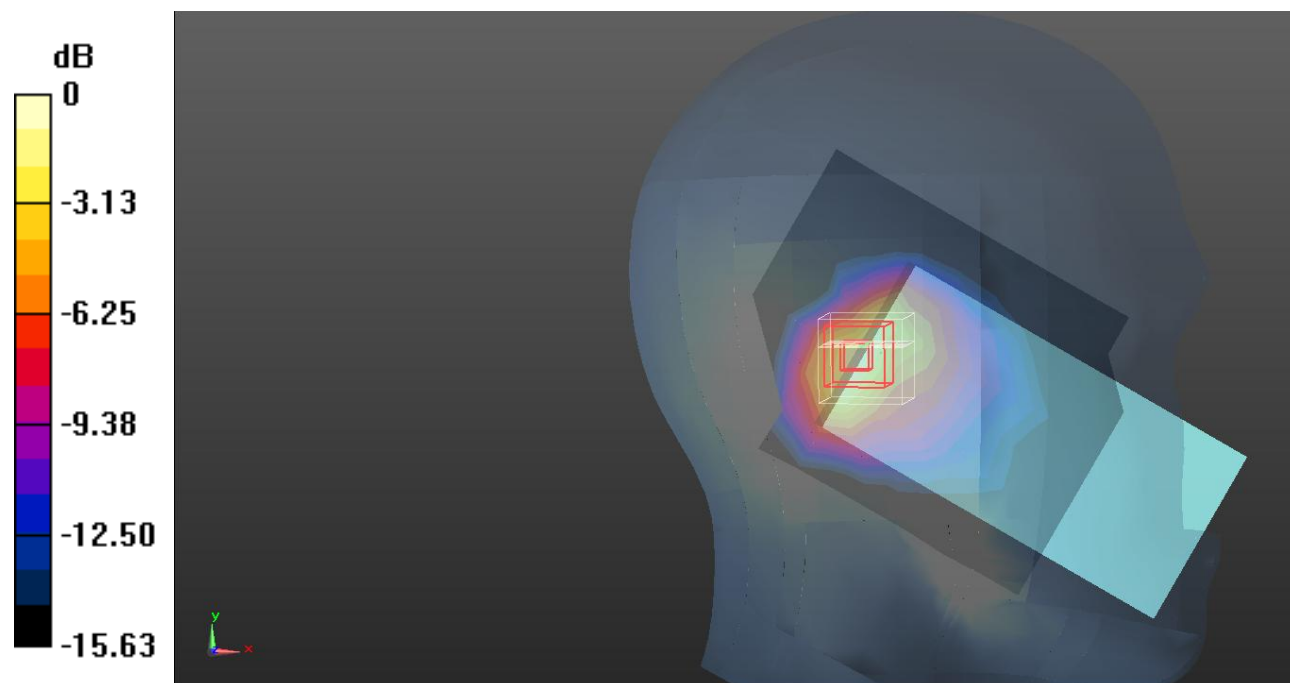

0 dB = 0.358 W/kg = -4.46 dB dBW/kg

Test Plot 84#: LTE Band 66_Head Left Tilt_50%RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.383$ S/m; $\epsilon_r = 40.13$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15)@1745 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.307 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.99 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.368 W/kg

SAR(1 g) = 0.212 W/kg; SAR(10 g) = 0.113 W/kg

Maximum value of SAR (measured) = 0.301 W/kg

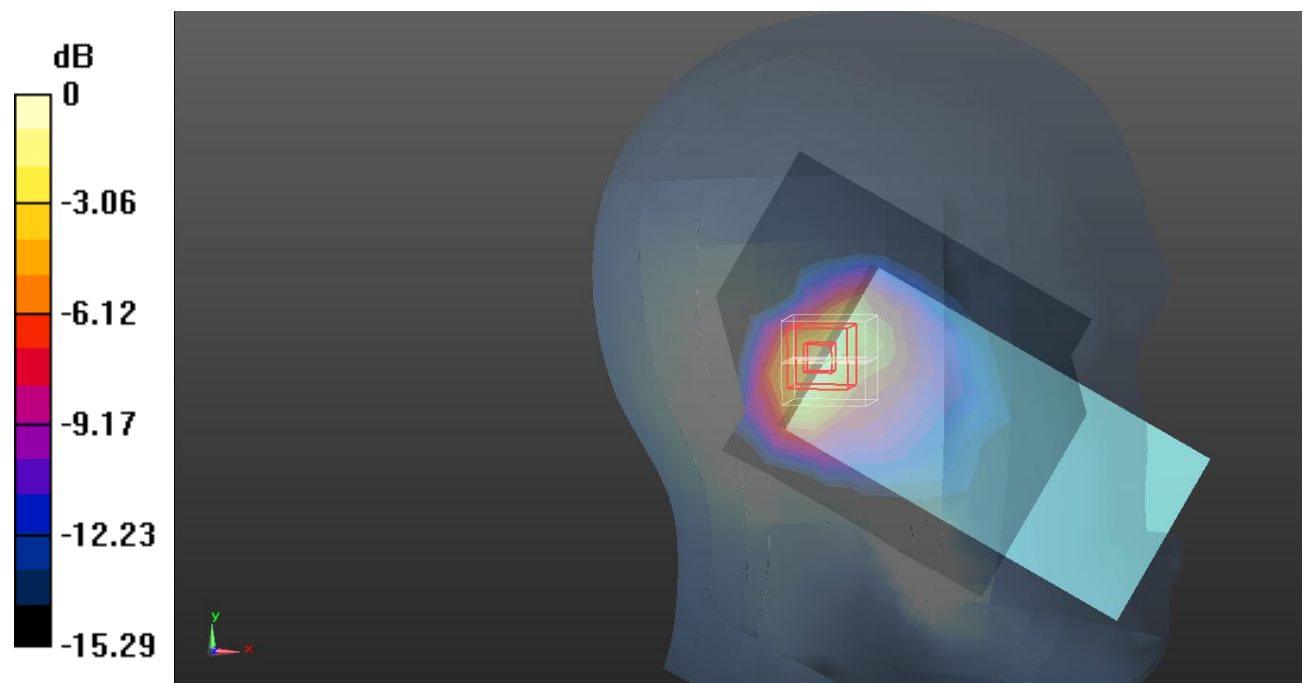

0 dB = 0.301 W/kg = -5.21 dB dBW/kg

Test Plot 85#: LTE Band 66_Head Right Cheek_1RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.383$ S/m; $\epsilon_r = 40.13$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15)@1745 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.336 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.205 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.500 W/kg

SAR(1 g) = 0.274 W/kg; SAR(10 g) = 0.140 W/kg

Maximum value of SAR (measured) = 0.414 W/kg

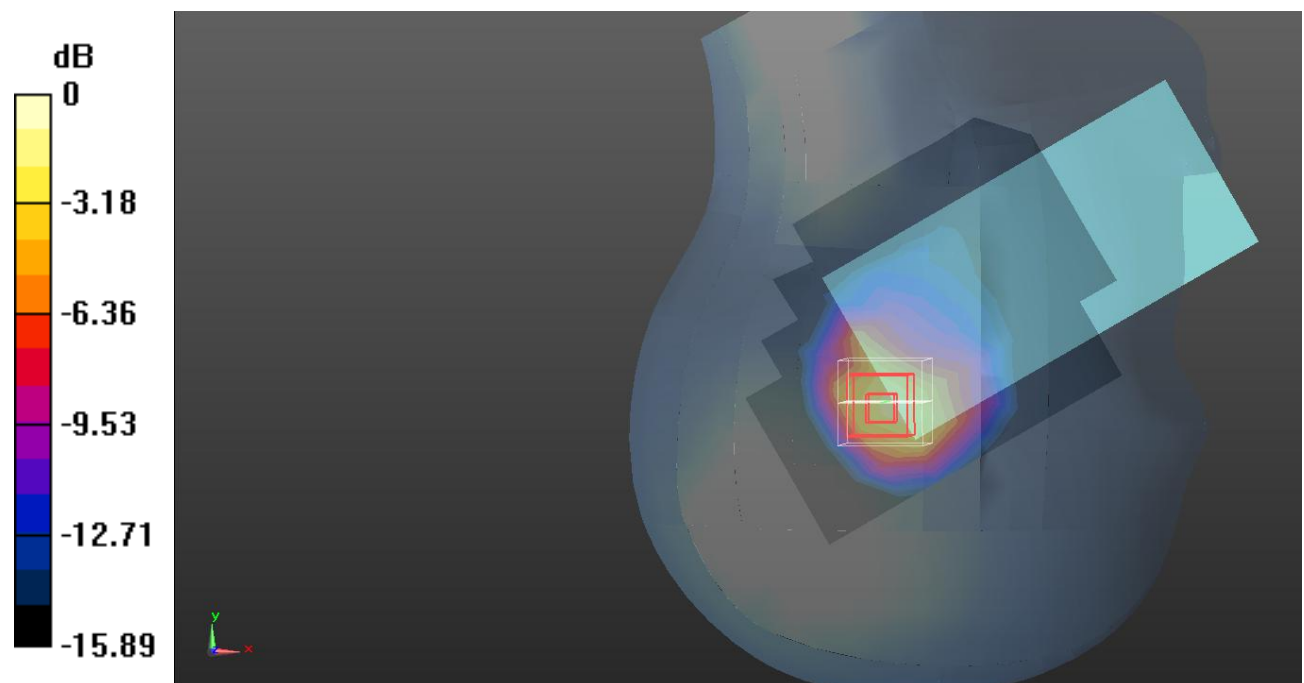

0 dB = 0.414 W/kg = -3.83 dB dBW/kg

Test Plot 86#: LTE Band 66_Head Right Cheek_50%RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.383$ S/m; $\epsilon_r = 40.13$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15)@1745 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.278 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.013 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.423 W/kg

SAR(1 g) = 0.231 W/kg; SAR(10 g) = 0.118 W/kg

Maximum value of SAR (measured) = 0.350 W/kg

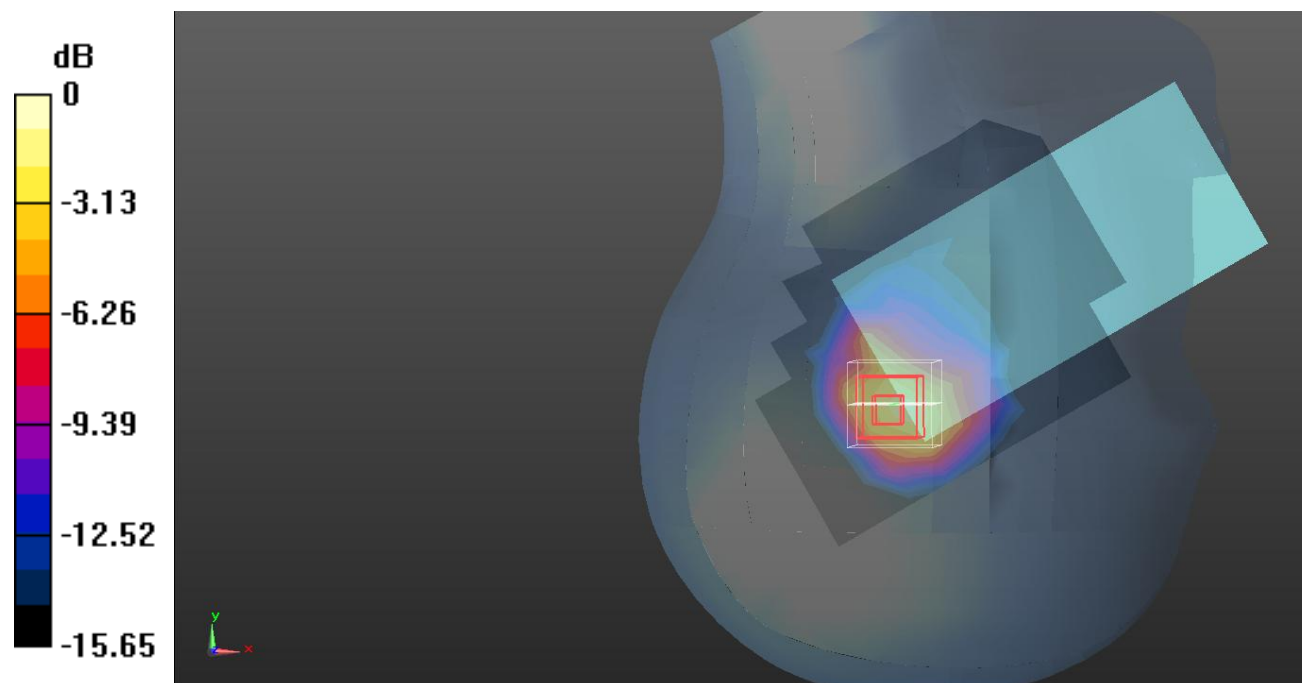

0 dB = 0.350 W/kg = -4.56 dB dBW/kg

Test Plot 87#: LTE Band 66_Head Right Tilt_1RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.383$ S/m; $\epsilon_r = 40.13$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15)@1745 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.458 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.96 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.752 W/kg

SAR(1 g) = 0.407 W/kg; SAR(10 g) = 0.200 W/kg

Maximum value of SAR (measured) = 0.632 W/kg

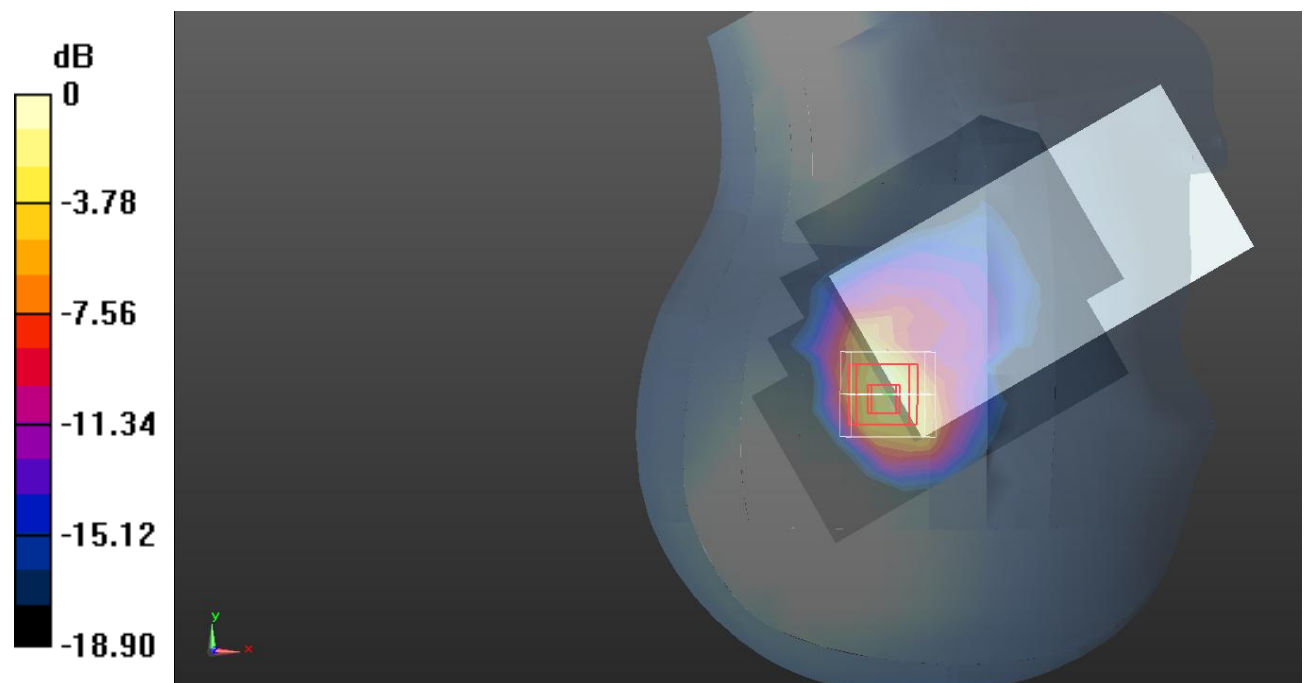

0 dB = 0.632 W/kg = -1.99 dB dBW/kg

Test Plot 88#: LTE Band 66_Head Right Tilt_50%RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.383$ S/m; $\epsilon_r = 40.13$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15)@1745 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.214 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.842 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.460 W/kg

SAR(1 g) = 0.256 W/kg; SAR(10 g) = 0.128 W/kg

Maximum value of SAR (measured) = 0.388 W/kg

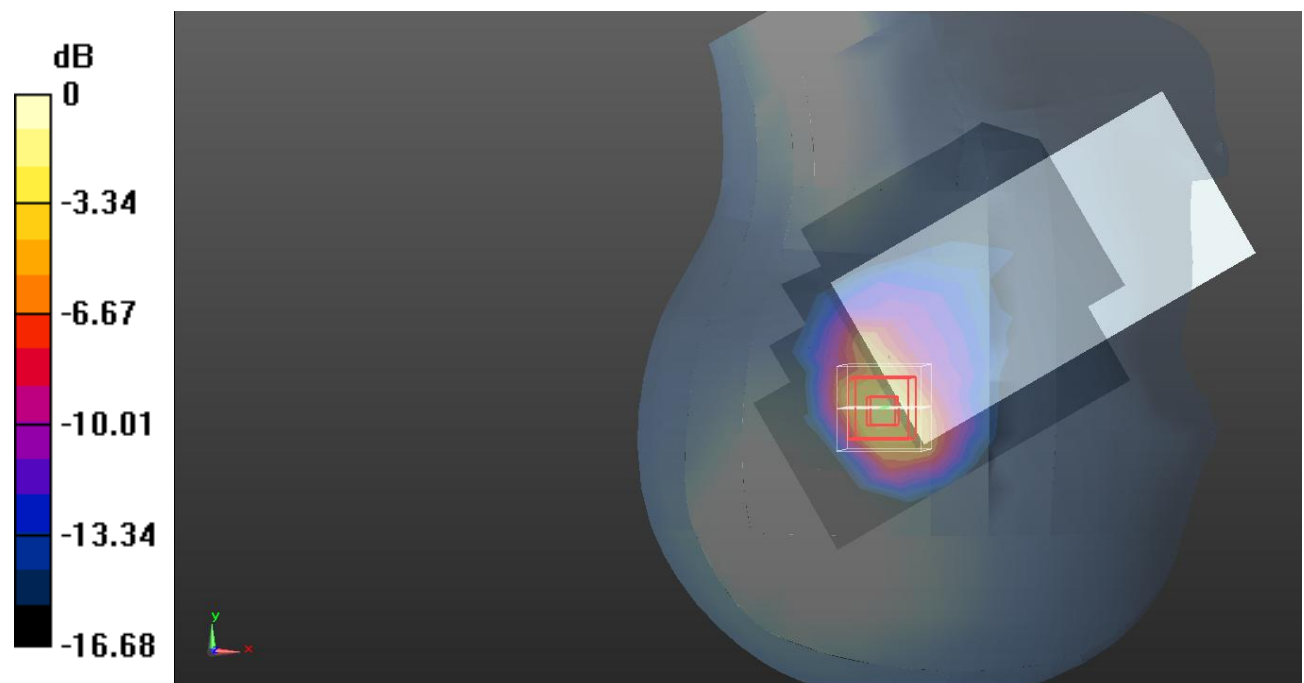

0 dB = 0.388 W/kg = -4.11 dB dBW/kg

Test Plot 89#: LTE Band 66_Body Front_1RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.383 \text{ S/m}$; $\epsilon_r = 40.13$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15)@1745 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0715 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.524 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.0980 W/kg

SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.036 W/kg

Maximum value of SAR (measured) = 0.0813 W/kg

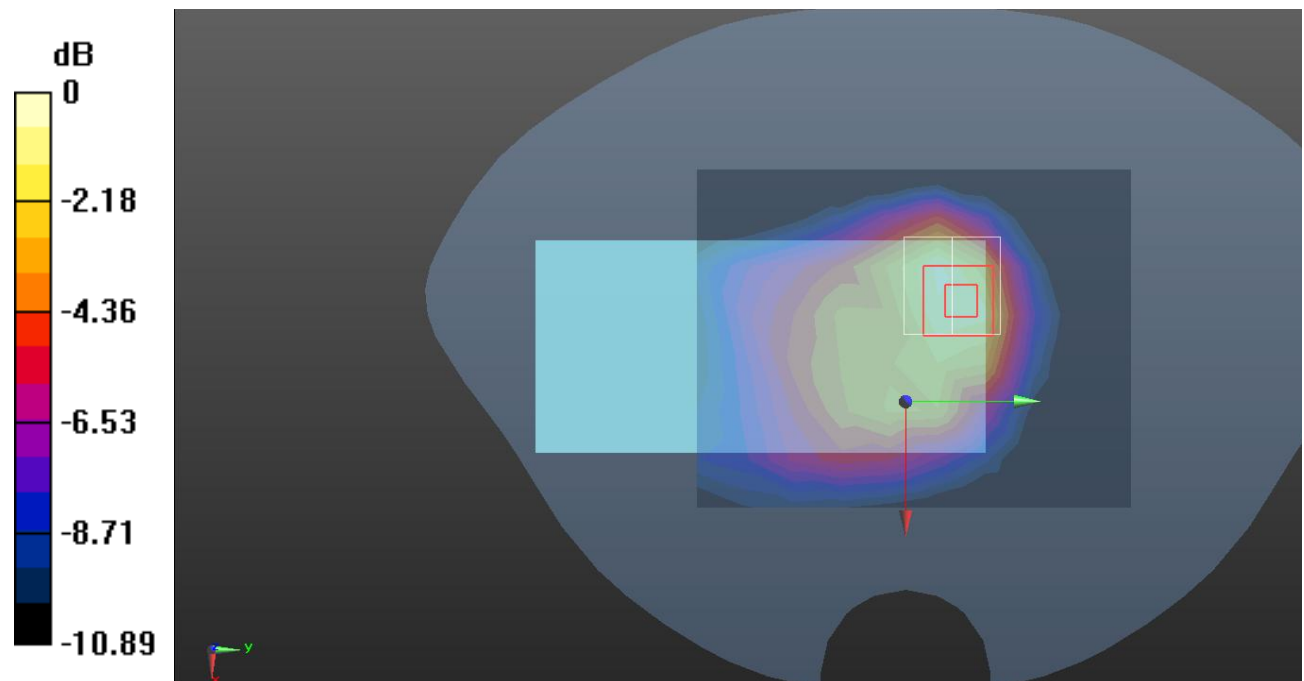

0 dB = 0.0813 W/kg = -10.90 dBW/kg

Test Plot 90#: LTE Band 66_Body Front_50%RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.383$ S/m; $\epsilon_r = 40.13$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15)@1745 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0574 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.848 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0820 W/kg

SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.0682 W/kg

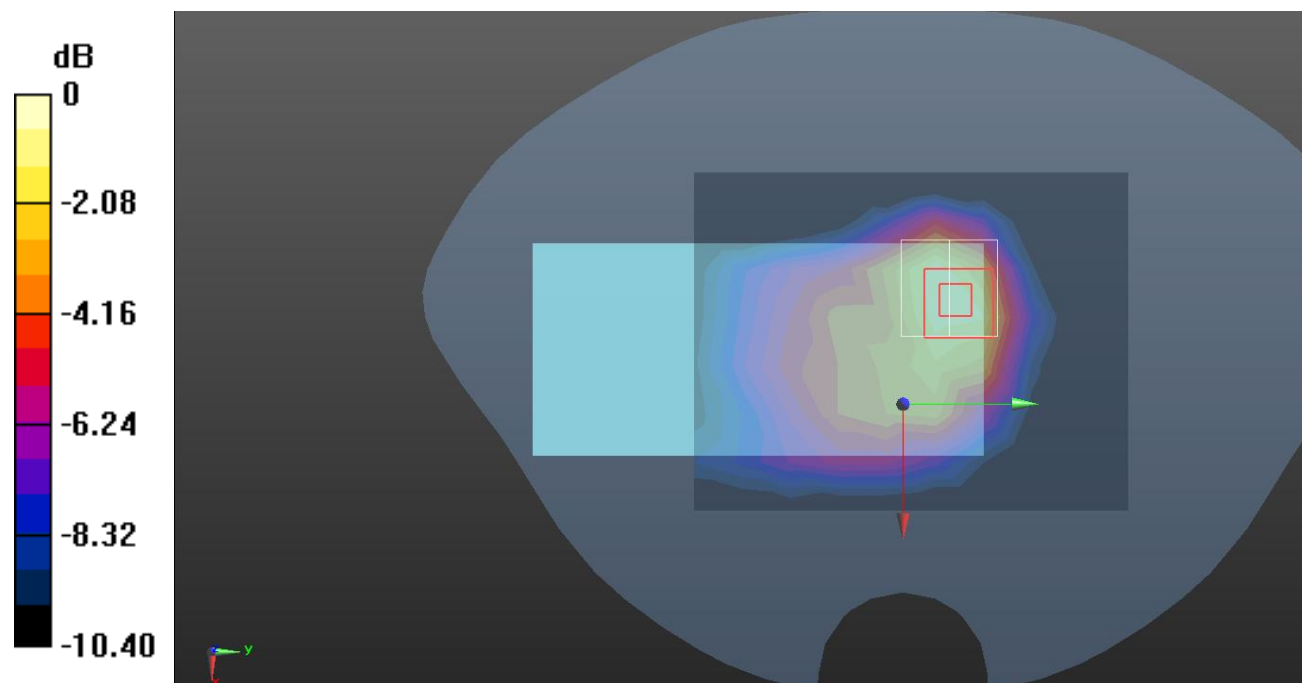

0 dB = 0.0682 W/kg = -11.66 dB dBW/kg

Test Plot 91#: LTE Band 66_Body Back_1RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.383$ S/m; $\epsilon_r = 40.13$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15)@1745 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.102 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.873 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.116 W/kg

SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.044 W/kg

Maximum value of SAR (measured) = 0.101 W/kg

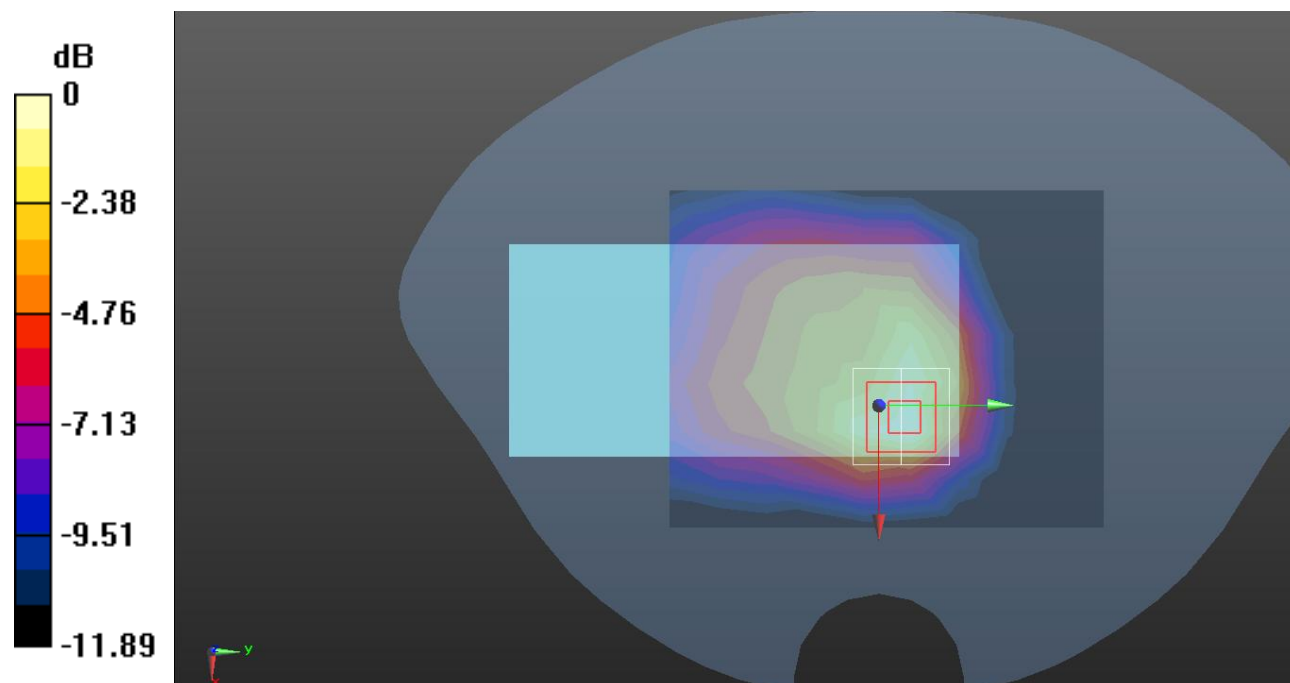

0 dB = 0.101 W/kg = -9.96 dB dBW/kg

Test Plot 92#: LTE Band 66_Body Back_50%RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.383 \text{ S/m}$; $\epsilon_r = 40.13$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15)@1745 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0878 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.213 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0970 W/kg

SAR(1 g) = 0.063 W/kg; SAR(10 g) = 0.037 W/kg

Maximum value of SAR (measured) = 0.0844 W/kg

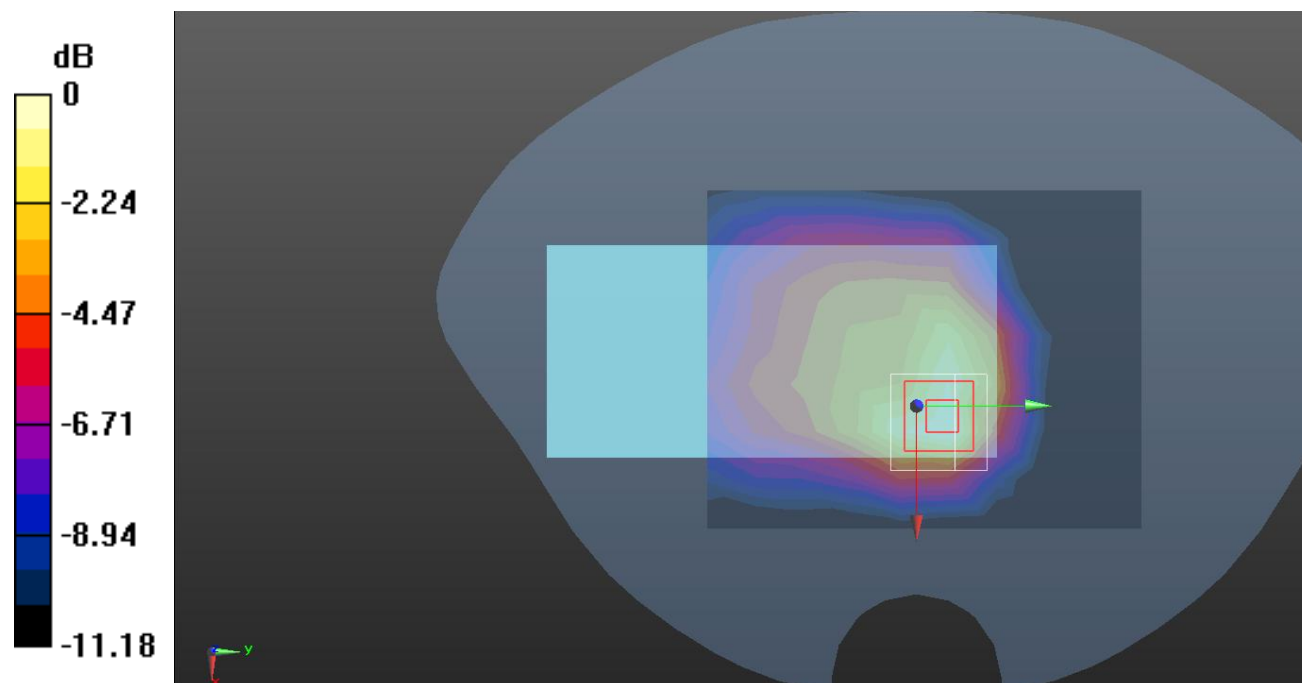

0 dB = 0.0844 W/kg = -10.74 dB dBW/kg

Test Plot 93#: LTE Band 66_Body Left_1RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.383 \text{ S/m}$; $\epsilon_r = 40.13$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15)@1745 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0373 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.060 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0430 W/kg

SAR(1 g) = 0.028 W/kg; SAR(10 g) = 0.017 W/kg

Maximum value of SAR (measured) = 0.0377 W/kg

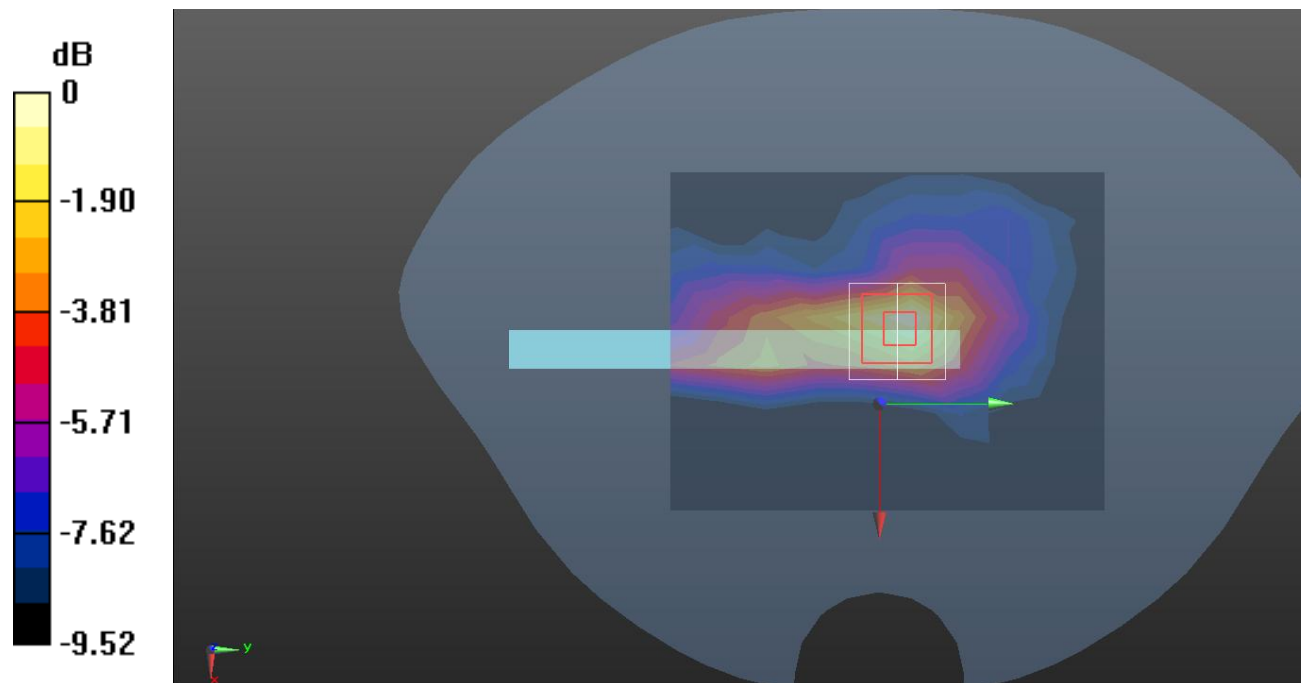

0 dB = 0.0377 W/kg = -14.24 dB dBW/kg

Test Plot 94#: LTE Band 66_Body Left_50%RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.383$ S/m; $\epsilon_r = 40.13$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15)@1745 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0254 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.710 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0370 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.0316 W/kg

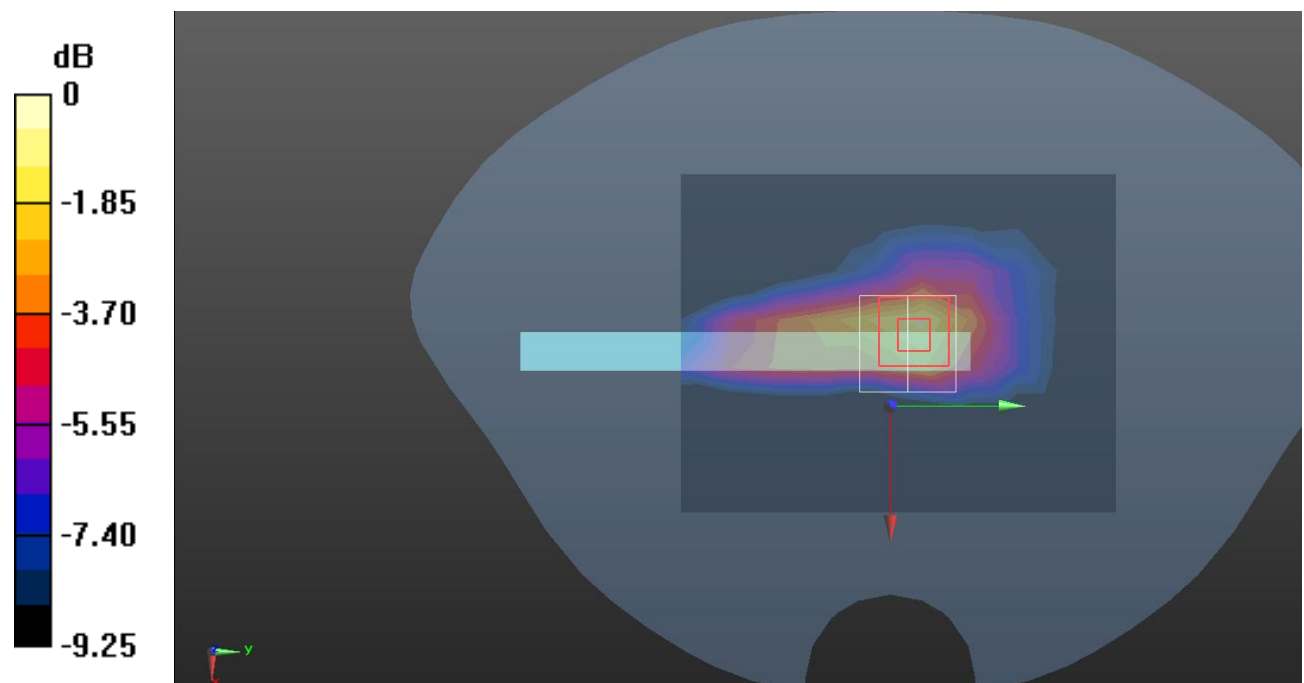

0 dB = 0.0316 W/kg = -15.00 dB dBW/kg

Test Plot 95#: LTE Band 66_Body Top_1RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.383 \text{ S/m}$; $\epsilon_r = 40.13$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15)@1745 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0966 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.434 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.138 W/kg

SAR(1 g) = 0.088 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.122 W/kg

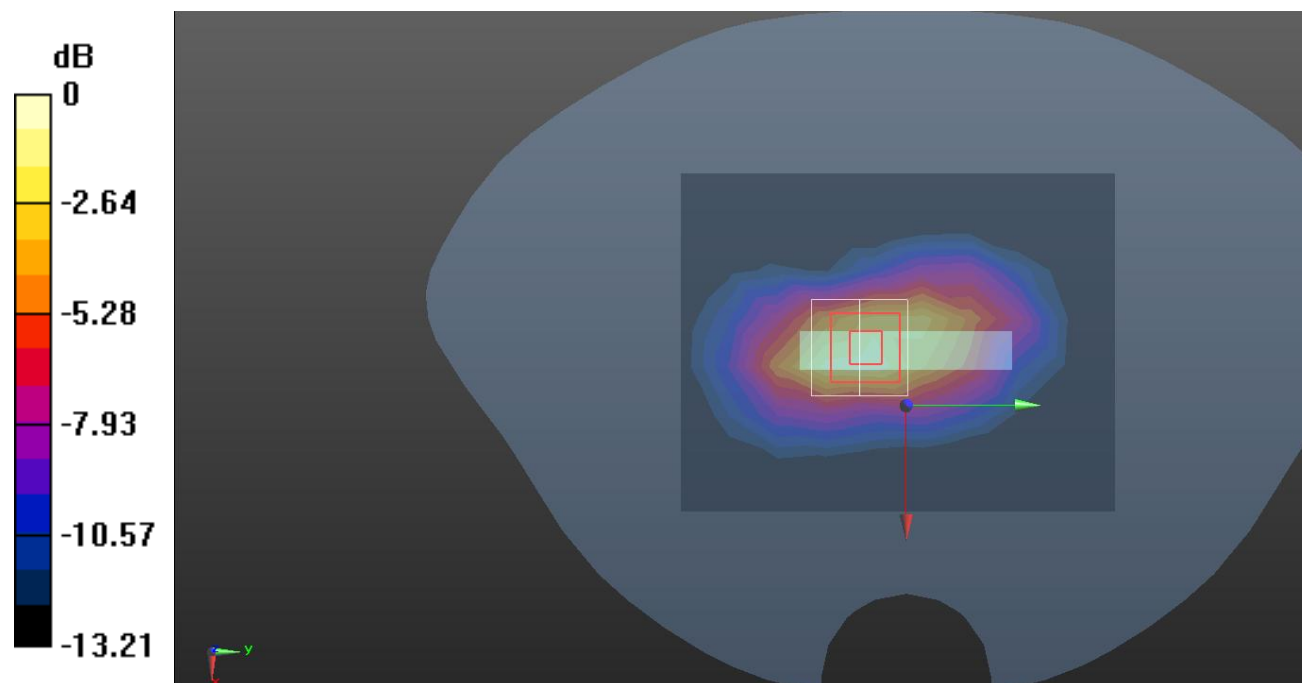

0 dB = 0.122 W/kg = -9.14 dB dBW/kg

Test Plot 96#: LTE Band 66_Body Top_50%RB_Middle**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.383$ S/m; $\epsilon_r = 40.13$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15)@1745 MHz; Calibrated: 2023/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0832 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.998 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.120 W/kg

SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.044 W/kg

Maximum value of SAR (measured) = 0.105 W/kg

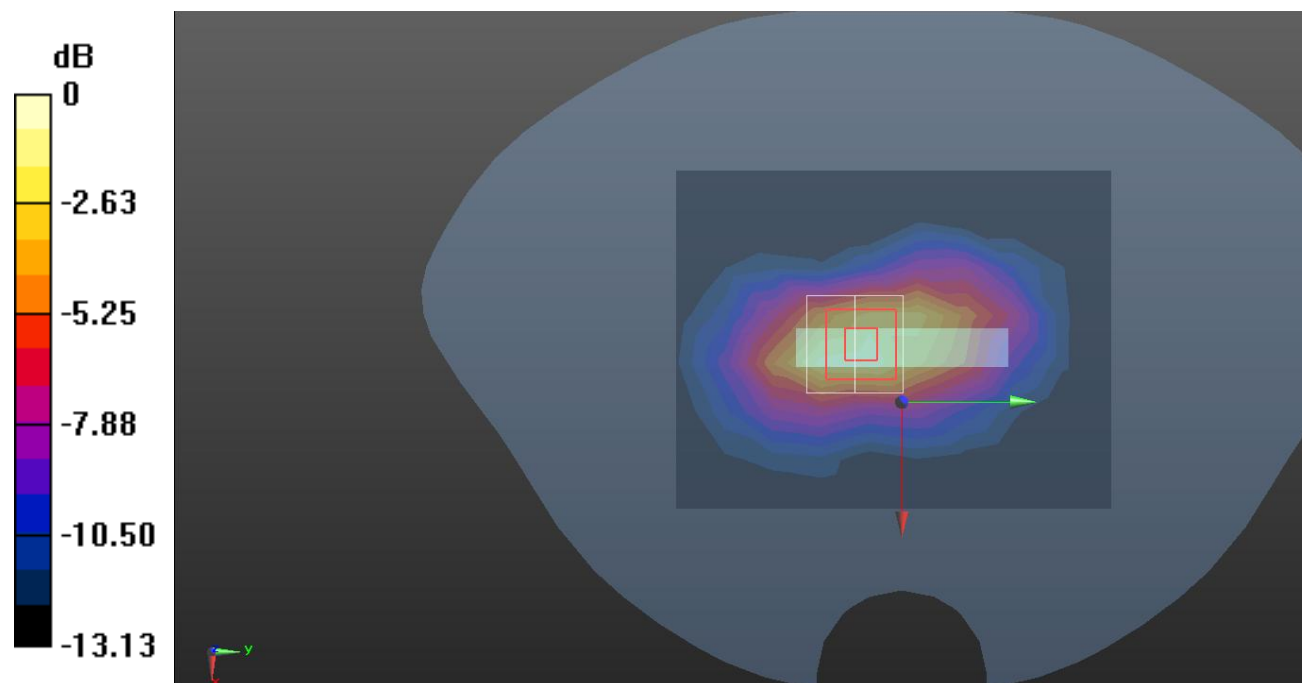

0 dB = 0.105 W/kg = -9.79 dB dBW/kg

Test Plot 97#**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 38.132$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - Sn7522; ConvF(7.42, 7.42, 7.42) @ 2442 MHz; Calibrated: 2023/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Head Left Cheek/WLAN 802.11b Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.440 W/kg


Head Left Cheek/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.220 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.507 W/kg

SAR(1 g) = 0.293 W/kg; SAR(10 g) = 0.161 W/kg

Maximum value of SAR (measured) = 0.424 W/kg

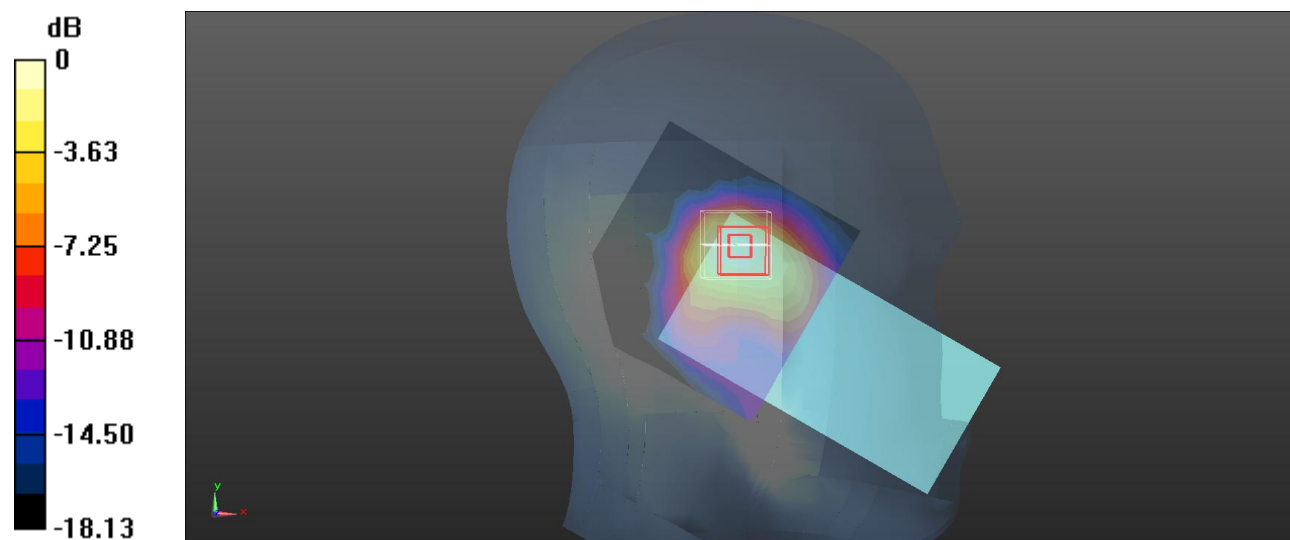

0 dB = 0.424 W/kg = -3.73 dBW/kg

Test Plot 98#**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 38.132$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - Sn7522; ConvF(7.42, 7.42, 7.42) @ 2442 MHz; Calibrated: 2023/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Head Left Tilt/WLAN 802.11b Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.429 W/kg


Head Left Tilt/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.871 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.515 W/kg

SAR(1 g) = 0.247 W/kg; SAR(10 g) = 0.128 W/kg

Maximum value of SAR (measured) = 0.392 W/kg

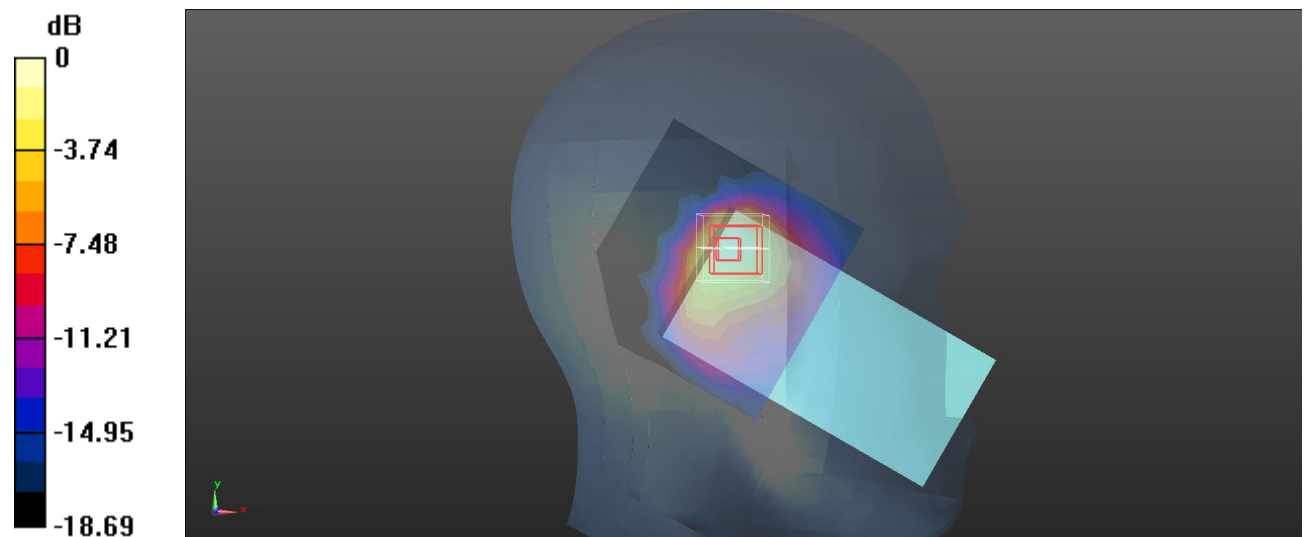

0 dB = 0.392 W/kg = -4.07 dBW/kg

Test Plot 99#**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 38.132$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - Sn7522; ConvF(7.42, 7.42, 7.42) @ 2442 MHz; Calibrated: 2023/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Head Right Cheek/WLAN 802.11b Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.221 W/kg


Head Right Cheek/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.36 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.267 W/kg

SAR(1 g) = 0.154 W/kg; SAR(10 g) = 0.090 W/kg

Maximum value of SAR (measured) = 0.225 W/kg

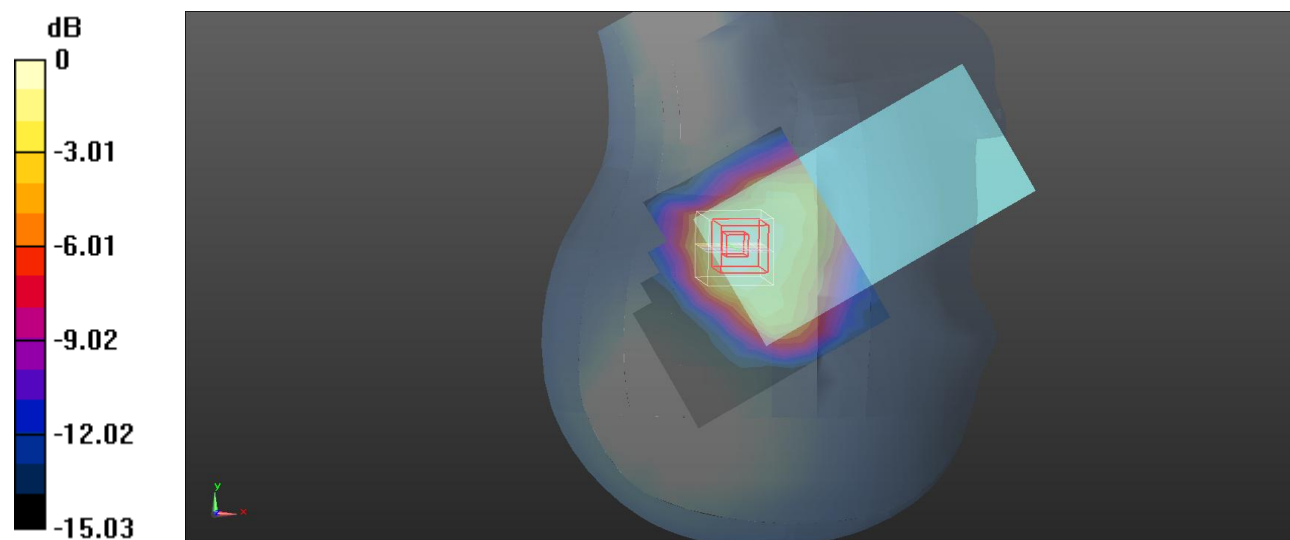

0 dB = 0.225 W/kg = -6.48 dBW/kg

Test Plot 100#**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 38.132$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - Sn7522; ConvF(7.42, 7.42, 7.42) @ 2442 MHz; Calibrated: 2023/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Head Right Tilt/WLAN 802.11b Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.221 W/kg


Head Right Tilt/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.44 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.278 W/kg

SAR(1 g) = 0.139 W/kg; SAR(10 g) = 0.077 W/kg

Maximum value of SAR (measured) = 0.221 W/kg

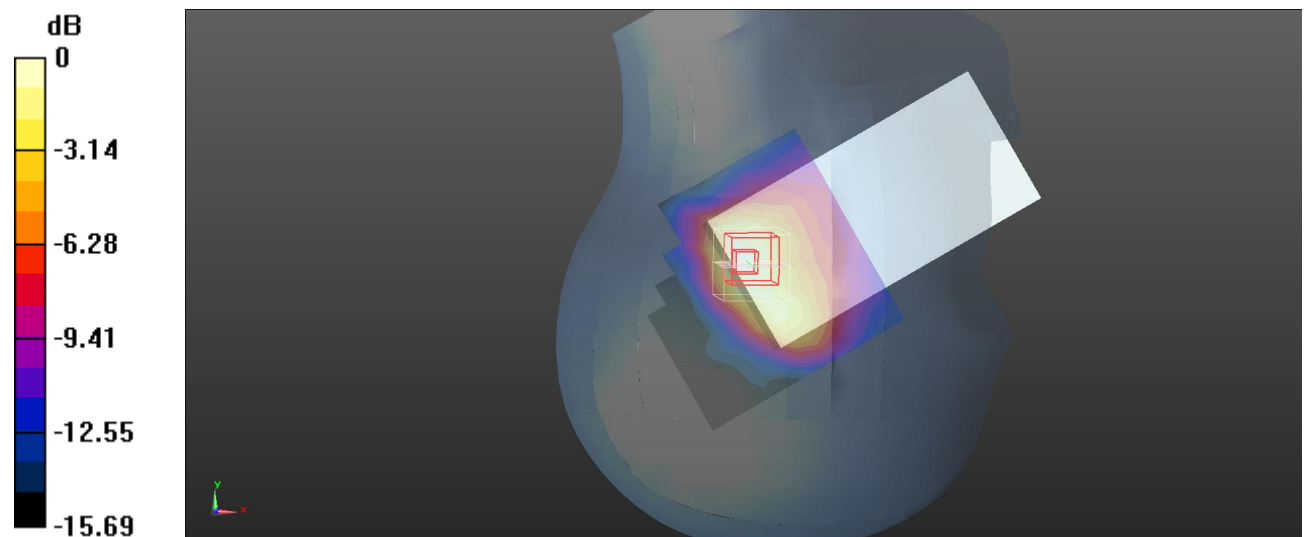

0 dB = 0.221 W/kg = -6.56 dBW/kg

Test Plot 101#**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 38.132$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - Sn7522; ConvF(7.42, 7.42, 7.42) @ 2442 MHz; Calibrated: 2023/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Body Front/WLAN 802.11b Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0947 W/kg


Body Front/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.122 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.119 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.042 W/kg

Maximum value of SAR (measured) = 0.102 W/kg

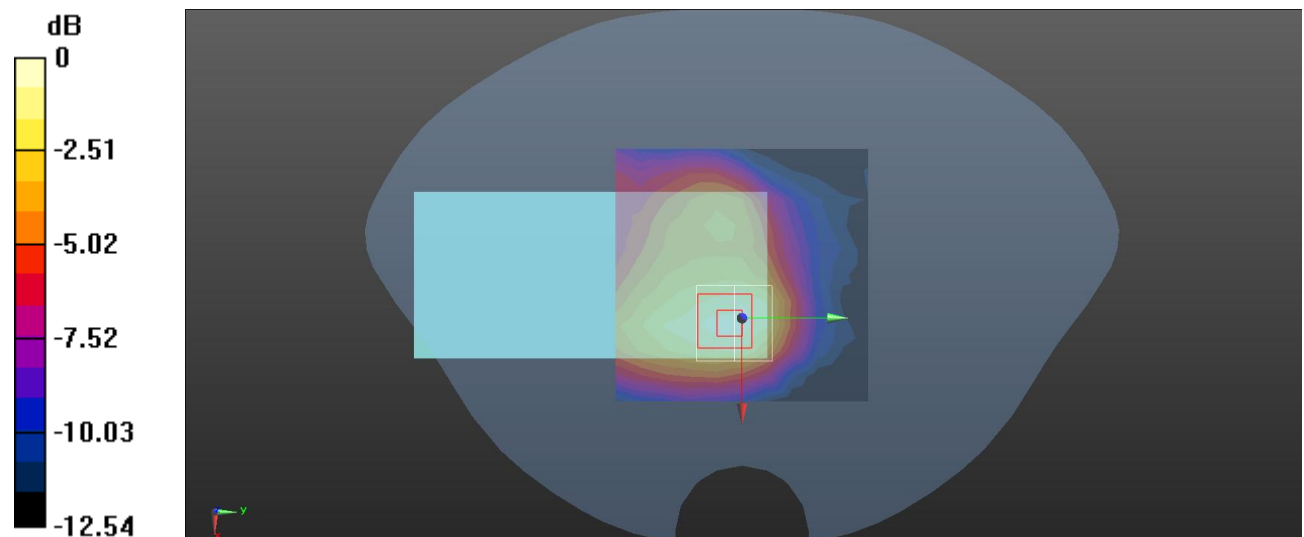

0 dB = 0.102 W/kg = -9.91 dBW/kg

Test Plot 102#**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 38.132$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - Sn7522; ConvF(7.42, 7.42, 7.42) @ 2442 MHz; Calibrated: 2023/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Body Back/WLAN 802.11b Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.126 W/kg


Body Back/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.275 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.136 W/kg

SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.047 W/kg

Maximum value of SAR (measured) = 0.117 W/kg

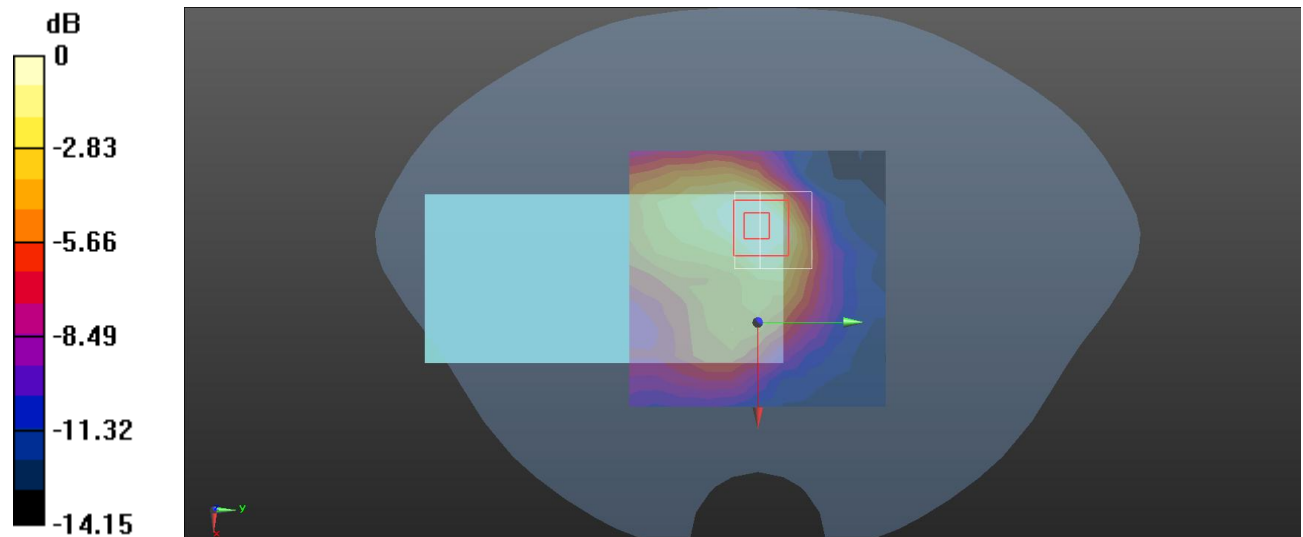

0 dB = 0.117 W/kg = -9.32 dBW/kg

Test Plot 103#**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 38.132$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - Sn7522; ConvF(7.42, 7.42, 7.42) @ 2442 MHz; Calibrated: 2023/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Body Right/WLAN 802.11b Mid/Area Scan (9x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.102 W/kg


Body Right/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.407 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.117 W/kg

SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.043 W/kg

Maximum value of SAR (measured) = 0.103 W/kg

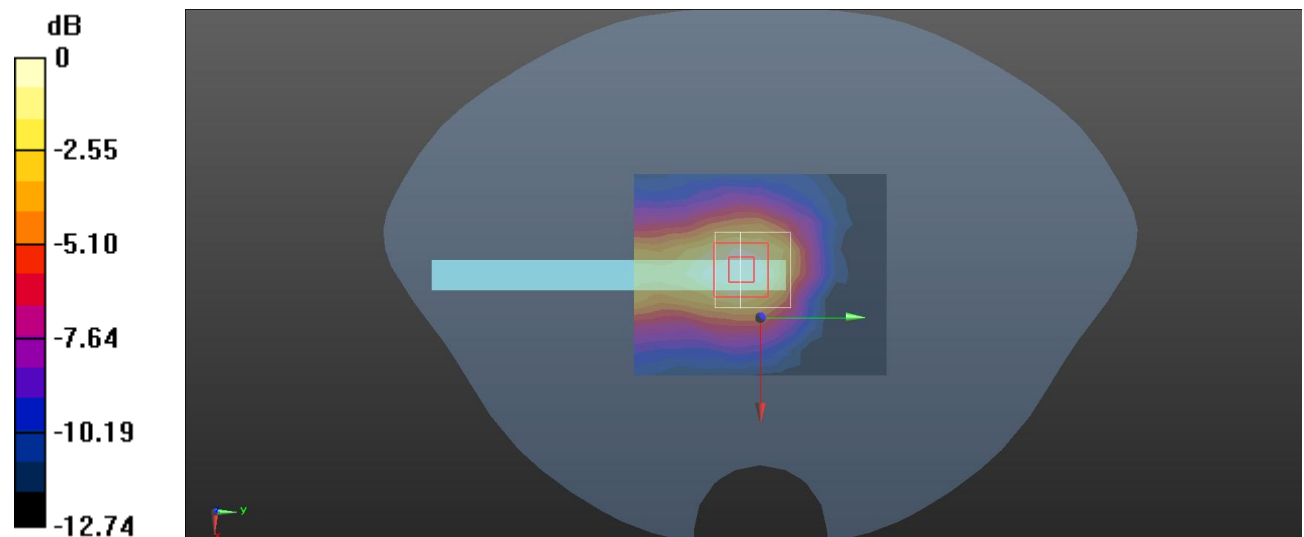

0 dB = 0.103 W/kg = -9.87 dBW/kg

Test Plot 104#**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 38.132$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - Sn7522; ConvF(7.42, 7.42, 7.42) @ 2442 MHz; Calibrated: 2023/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Body Top/WLAN 802.11b Mid/Area Scan (9x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0749 W/kg


Body Top/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.854 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.0850 W/kg

SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.034 W/kg

Maximum value of SAR (measured) = 0.0744 W/kg

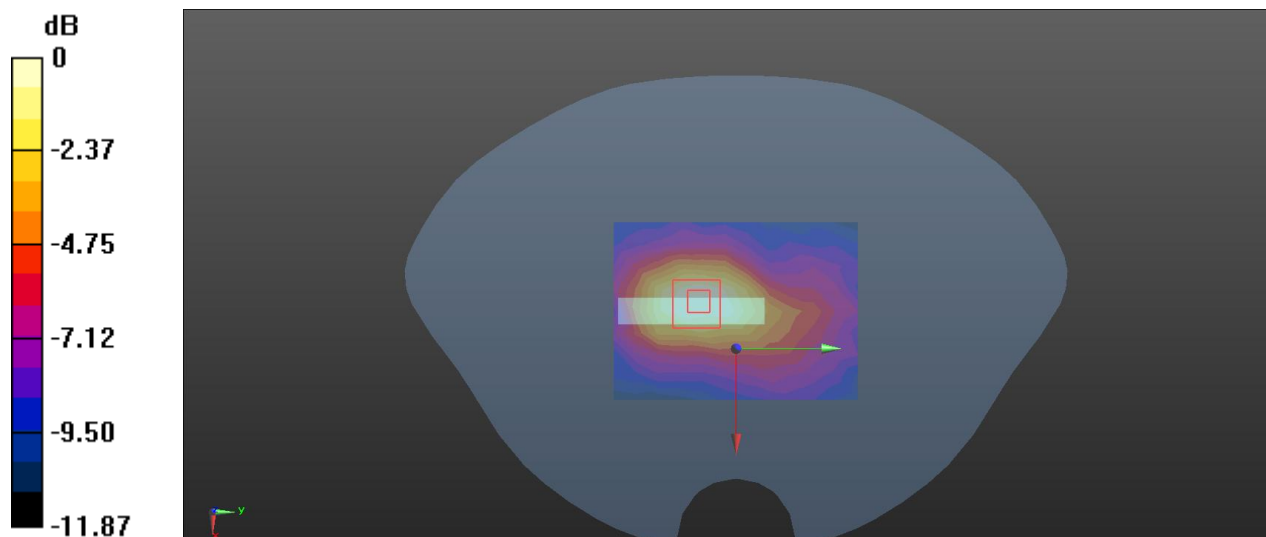

0 dB = 0.0744 W/kg = -11.28 dBW/kg

Test Plot 105#**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**


Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.617 \text{ S/m}$; $\epsilon_r = 35.434$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - Sn7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

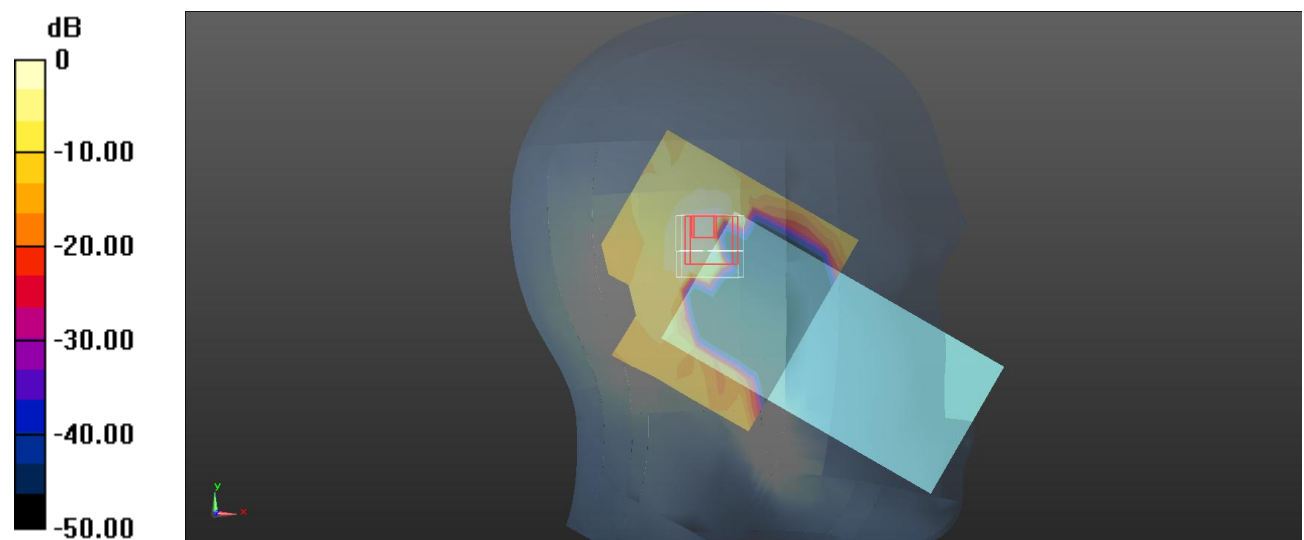Head Left Cheek/WLAN 5.2G 802.11a Mid/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.115 W/kg **Head Left Cheek/WLAN 5.2G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 2.001 V/m ; Power Drift = -0.08 dB Peak SAR (extrapolated) = 0.495 W/kg **SAR(1 g) = 0.028 W/kg ; SAR(10 g) = 0.00547 W/kg** Maximum value of SAR (measured) = 0.109 W/kg  $0 \text{ dB} = 0.109 \text{ W/kg} = -9.63 \text{ dBW/kg}$

Test Plot 106#**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**


Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.617 \text{ S/m}$; $\epsilon_r = 35.434$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - Sn7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543;Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

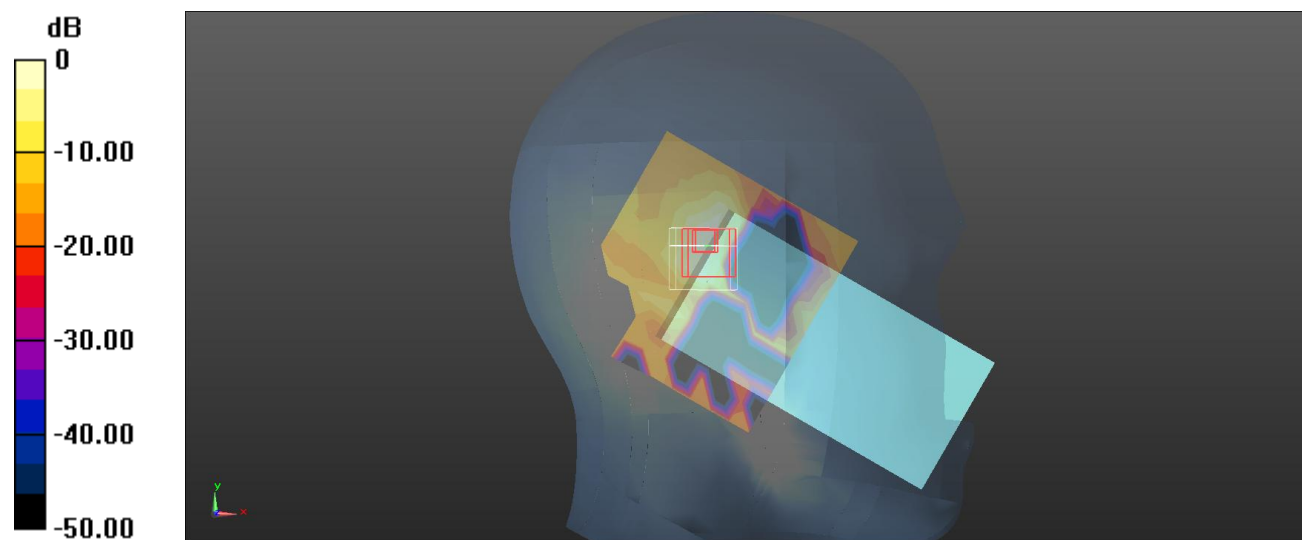Head Left Tilt/WLAN 5.2G 802.11a Mid/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.214 W/kg **Head Left Tilt/WLAN 5.2G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 4.806 V/m ; Power Drift = 0.02 dB Peak SAR (extrapolated) = 0.363 W/kg **SAR(1 g) = 0.164 W/kg ; SAR(10 g) = 0.078 W/kg** Maximum value of SAR (measured) = 0.197 W/kg  $0 \text{ dB} = 0.197 \text{ W/kg} = -7.06 \text{ dBW/kg}$

Test Plot 107#**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**


Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.617 \text{ S/m}$; $\epsilon_r = 35.434$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - Sn7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

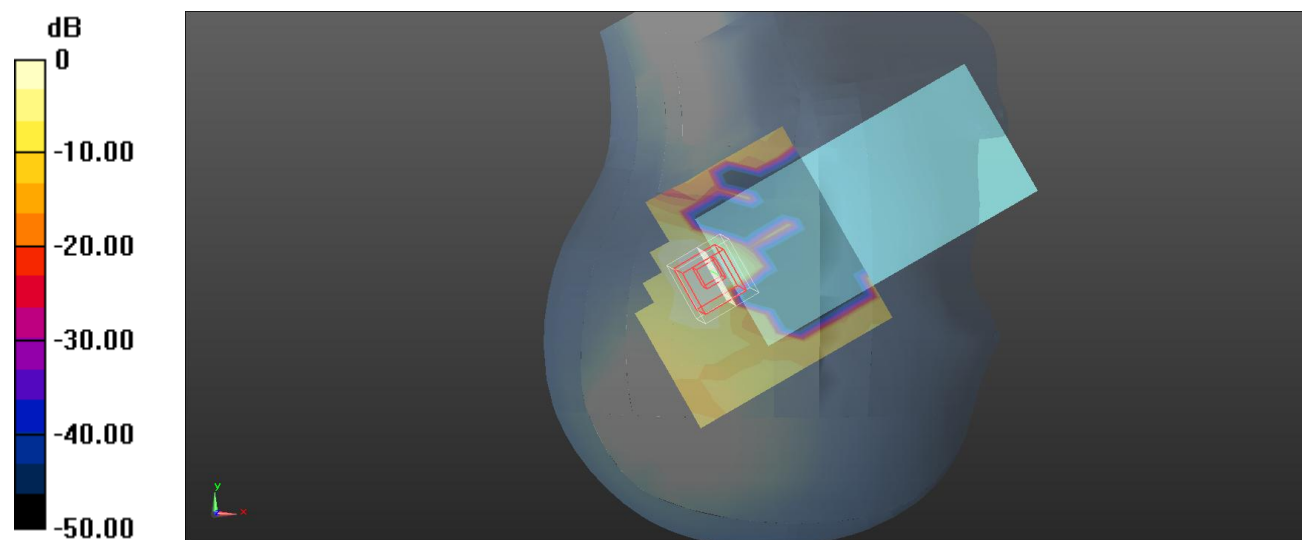Head Right Cheek/WLAN 5.2G 802.11a Mid/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.130 W/kg **Head Right Cheek/WLAN 5.2G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 2.936 V/m ; Power Drift = -0.06 dB Peak SAR (extrapolated) = 0.254 W/kg **SAR(1 g) = 0.052 W/kg ; SAR(10 g) = 0.015 W/kg** Maximum value of SAR (measured) = 0.128 W/kg  $0 \text{ dB} = 0.128 \text{ W/kg} = -8.93 \text{ dBW/kg}$

Test Plot 108#**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**


Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.617 \text{ S/m}$; $\epsilon_r = 35.434$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - Sn7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

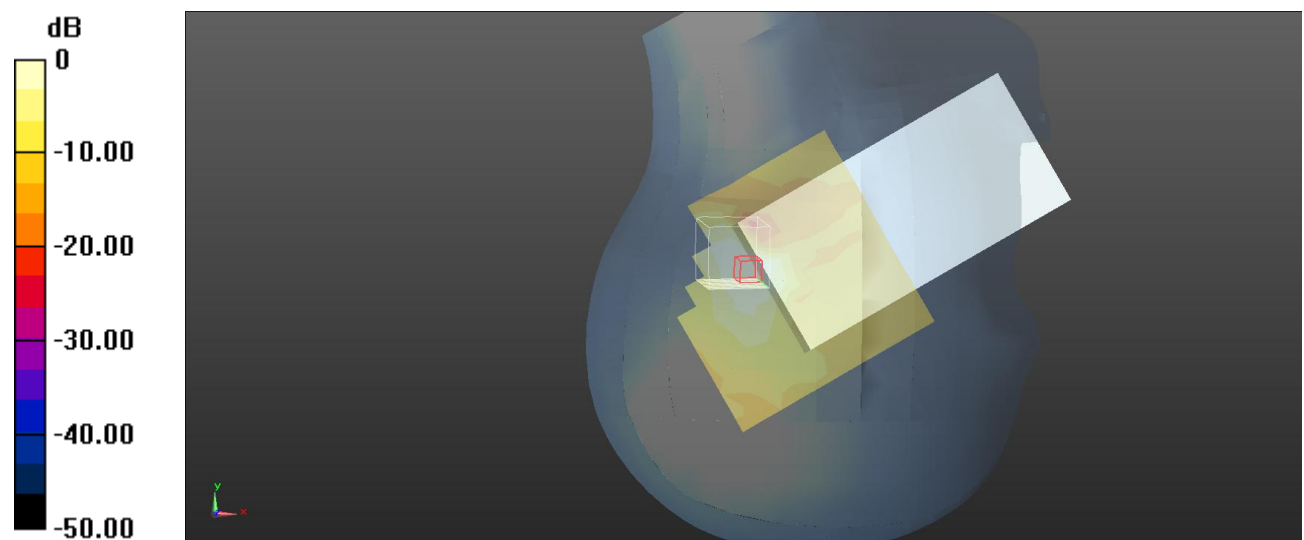Head Right Tilt/WLAN 5.2G 802.11a Mid/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.158 W/kg **Head Right Tilt/WLAN 5.2G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 3.629 V/m ; Power Drift = -0.08 dB Peak SAR (extrapolated) = 0.219 W/kg **SAR(1 g) = 0.104 W/kg ; SAR(10 g) = 0.041** Maximum value of SAR (measured) = 0.142 W/kg  $0 \text{ dB} = 0.142 \text{ W/kg} = -8.48 \text{ dBW/kg}$

Test Plot 109#**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.617 \text{ S/m}$; $\epsilon_r = 35.434$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - Sn7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Body Front/WLAN 5.2G 802.11a Mid/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.0262 W/kg


Body Front/WLAN 5.2G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.187 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.0820 W/kg

SAR(1 g) = 0.009 W/kg; SAR(10 g) = 0.00357 W/kg

Maximum value of SAR (measured) = 0.0195 W/kg

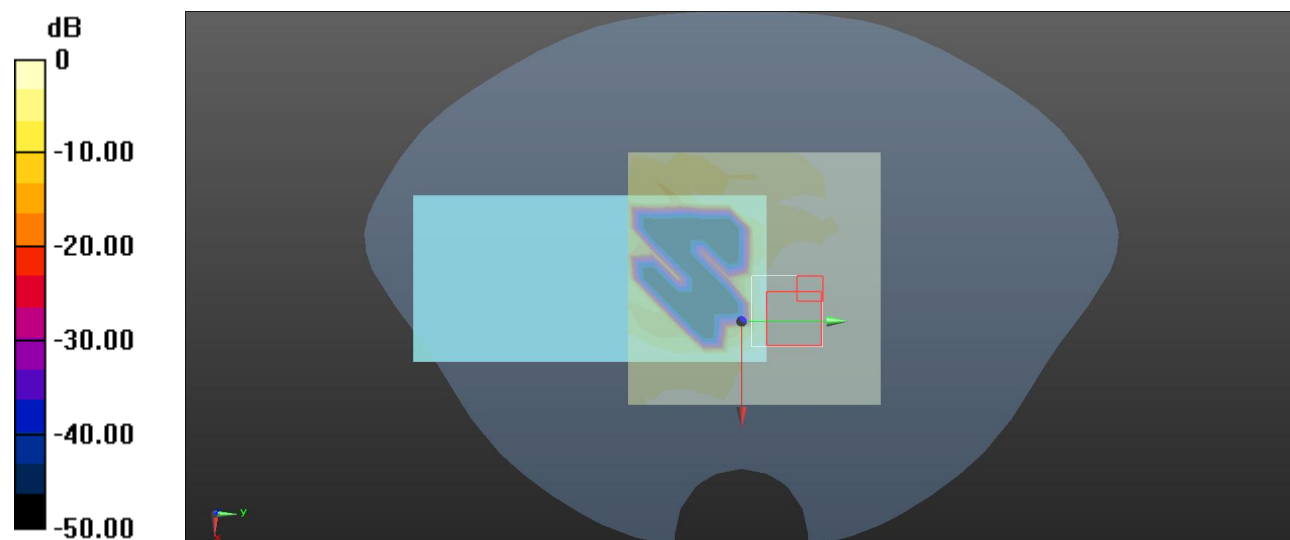

0 dB = 0.0195 W/kg = -17.10 dBW/kg

Test Plot 110#**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.617 \text{ S/m}$; $\epsilon_r = 35.434$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - Sn7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Body Back/WLAN 5.2G 802.11a Mid/Area Scan (11x14x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.131 W/kg


Body Back/WLAN 5.2G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 4.003 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.170 W/kg

SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.119 W/kg

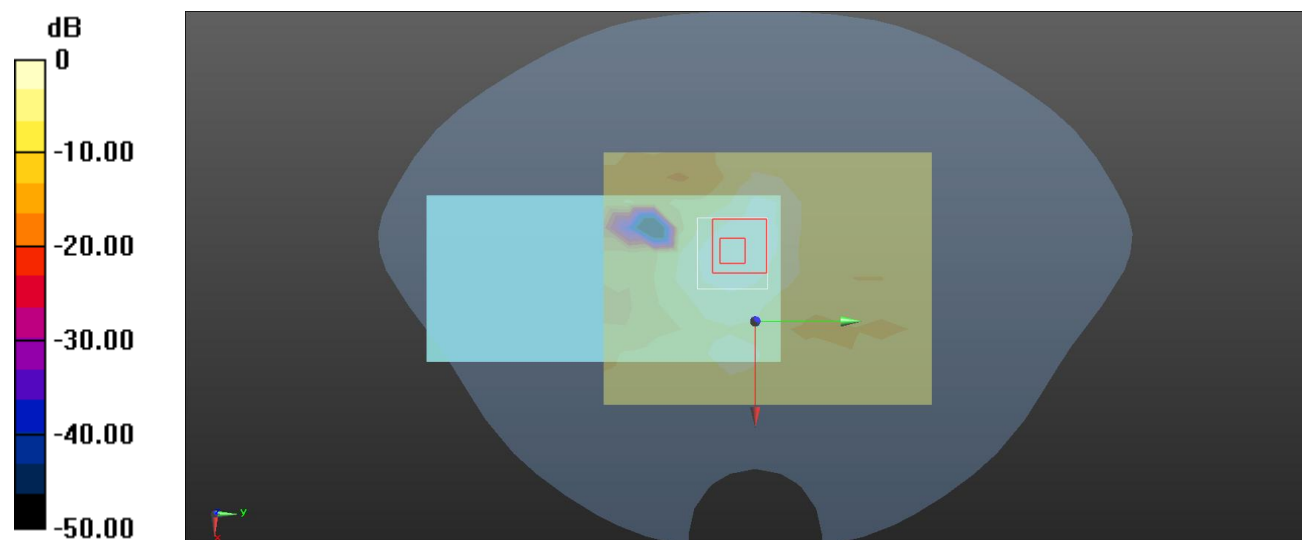

0 dB = 0.119 W/kg = -9.24 dBW/kg

Test Plot 111#**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.617 \text{ S/m}$; $\epsilon_r = 35.434$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - Sn7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/05/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Body Right/WLAN 5.2G 802.11a Mid/Area Scan (9x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.0253 W/kg


Body Right/WLAN 5.2G 802.11a Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.173 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.146 W/kg

SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.00979 W/kg

Maximum value of SAR (measured) = 0.0215 W/kg

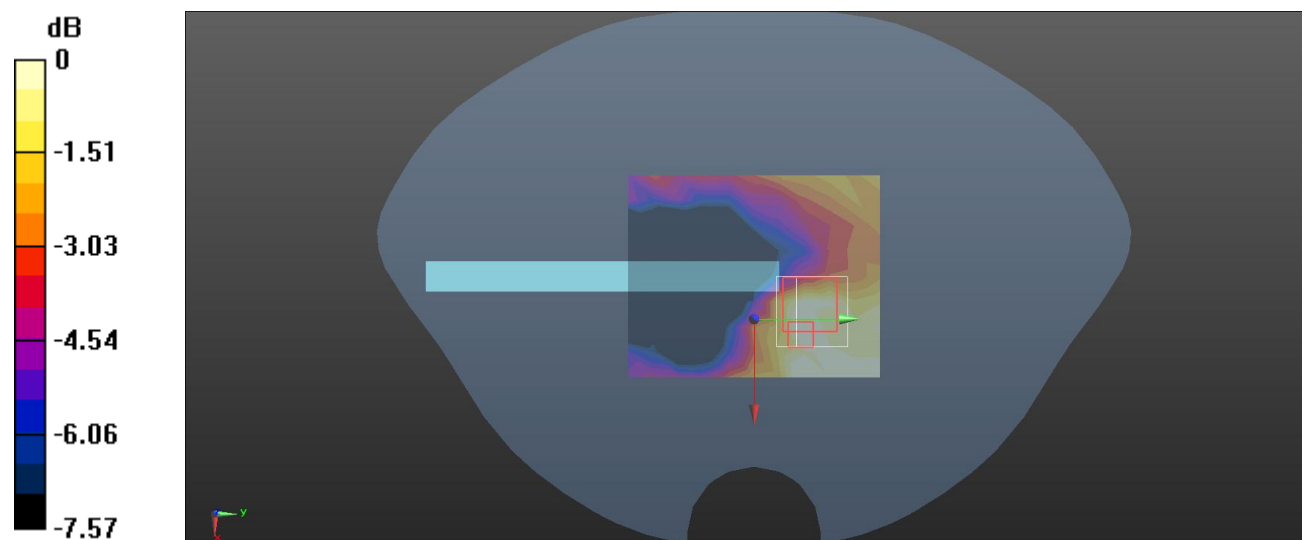 $0 \text{ dB} = 0.0215 \text{ W/kg} = -16.68 \text{ dBW/kg}$

Test Plot 112#**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**


Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.617 \text{ S/m}$; $\epsilon_r = 35.434$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - Sn7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

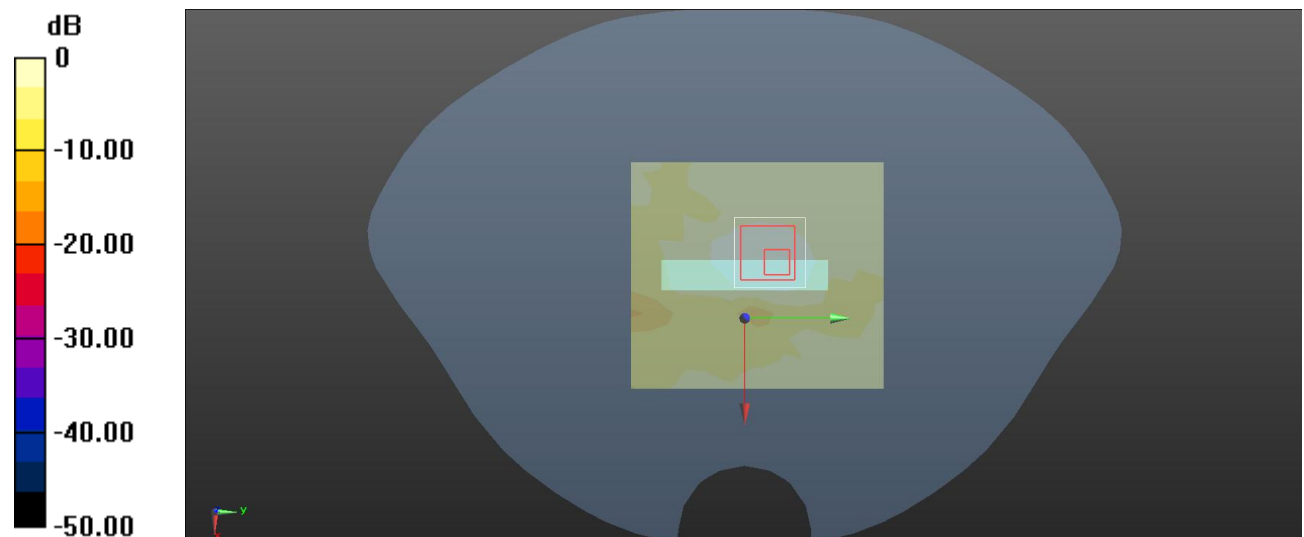Body Top/WLAN 5.2G 802.11a Mid/Area Scan (10x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.0486 W/kg **Body Top/WLAN 5.2G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 2.382 V/m ; Power Drift = 0.05 dB Peak SAR (extrapolated) = 0.109 W/kg **SAR(1 g) = 0.019 W/kg ; SAR(10 g) = 0.00881 W/kg** Maximum value of SAR (measured) = 0.0460 W/kg  $0 \text{ dB} = 0.0460 \text{ W/kg} = -13.37 \text{ dBW/kg}$

Test Plot 113#**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5280$ MHz; $\sigma = 4.786$ S/m; $\epsilon_r = 34.99$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - Sn7522; ConvF(5.36, 5.36, 5.36) @ 5280 MHz; Calibrated: 2023/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Head Left Cheek/WLAN 5.3G 802.11a Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.226 W/kg


Head Left Cheek/WLAN 5.3G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.200 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.028 W/kg

Maximum value of SAR (measured) = 0.203 W/kg

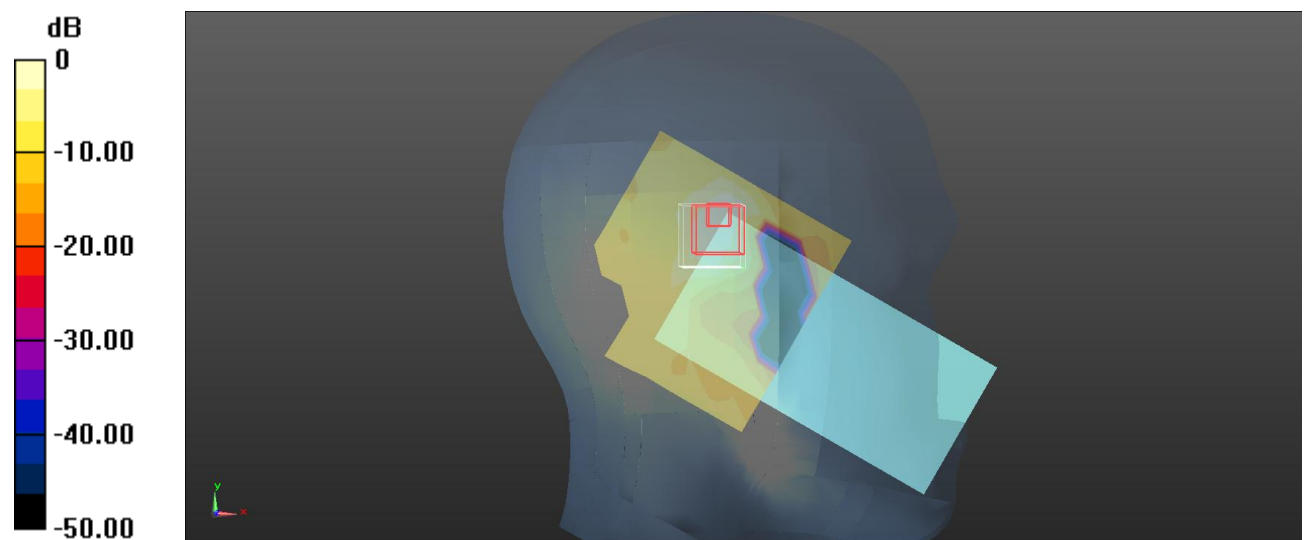

0 dB = 0.203 W/kg = -6.93 dBW/kg

Test Plot 114#**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5280$ MHz; $\sigma = 4.786$ S/m; $\epsilon_r = 34.99$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - Sn7522; ConvF(5.36, 5.36, 5.36) @ 5280 MHz; Calibrated: 2023/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Head Left Tilt/WLAN 5.3G 802.11a Mid/Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.424 W/kg


Head Left Tilt/WLAN 5.3G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.671 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.546 W/kg

SAR(1 g) = 0.226 W/kg; SAR(10 g) = 0.157 W/kg

Maximum value of SAR (measured) = 0.401 W/kg

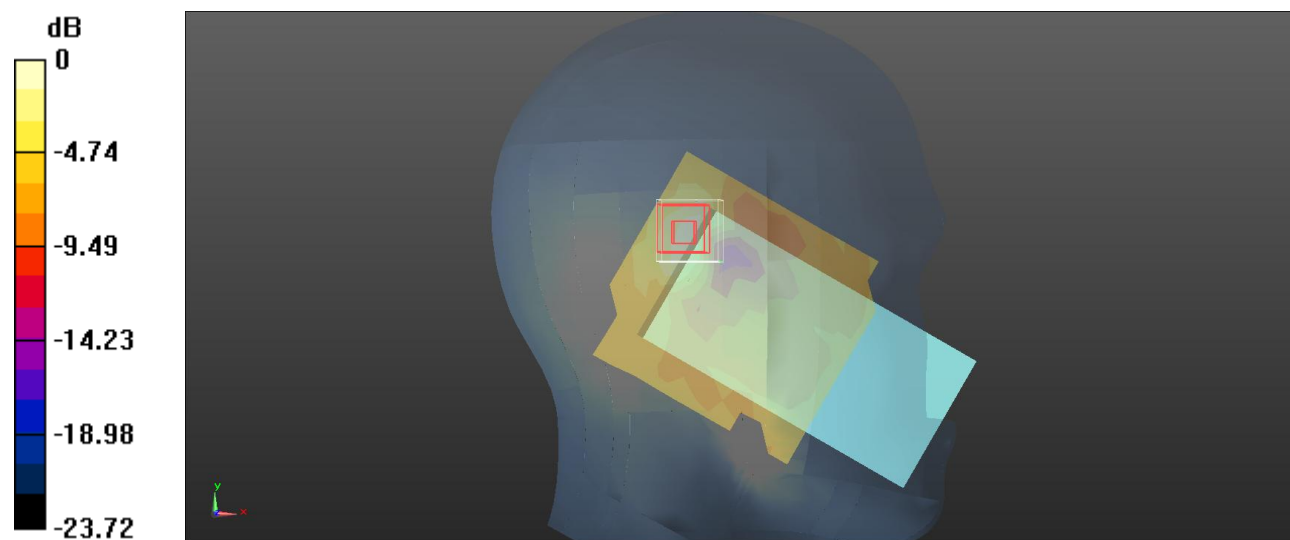

0 dB = 0.401 W/kg = -3.97 dBW/kg

Test Plot 115#**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5280$ MHz; $\sigma = 4.786$ S/m; $\epsilon_r = 34.99$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - Sn7522; ConvF(5.36, 5.36, 5.36) @ 5280 MHz; Calibrated: 2023/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Head Right Cheek/WLAN 5.3G 802.11a Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.204 W/kg


Head Right Cheek/WLAN 5.3G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.416 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.344 W/kg

SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 0.193 W/kg

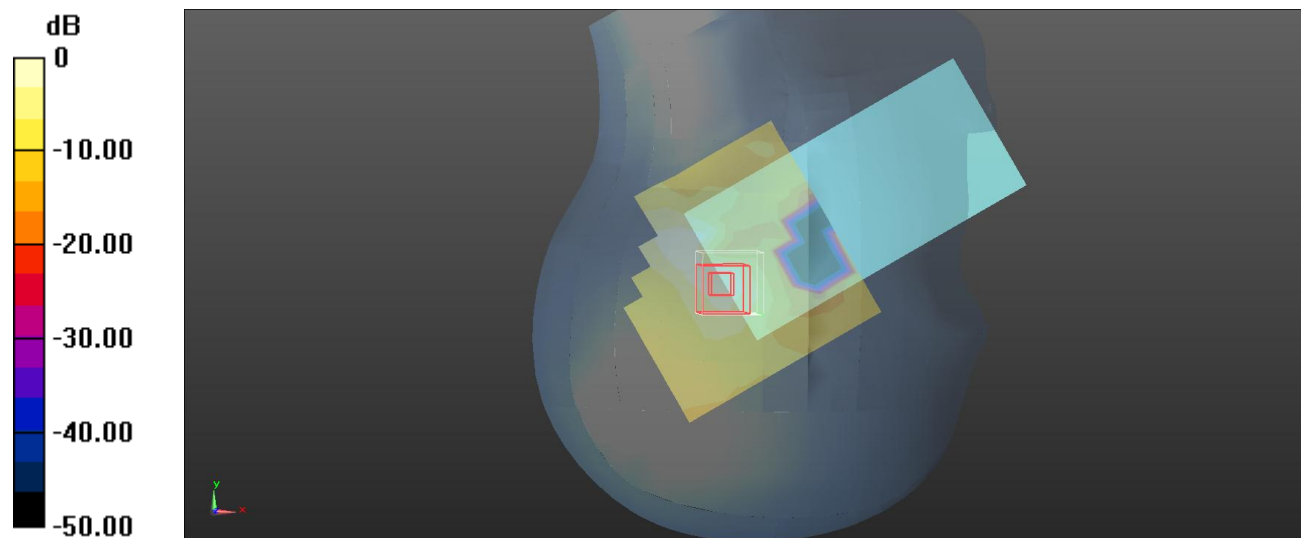

0 dB = 0.193 W/kg = -7.14 dBW/kg

Test Plot 116#**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5280$ MHz; $\sigma = 4.786$ S/m; $\epsilon_r = 34.99$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - Sn7522; ConvF(5.36, 5.36, 5.36) @ 5280 MHz; Calibrated: 2023/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Head Right Tilt/WLAN 5.3G 802.11a Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.295 W/kg


Head Right Tilt/WLAN 5.3G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.610 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.332 W/kg

SAR(1 g) = 0.124 W/kg; SAR(10 g) = 0.052 W/kg

Maximum value of SAR (measured) = 0.270 W/kg

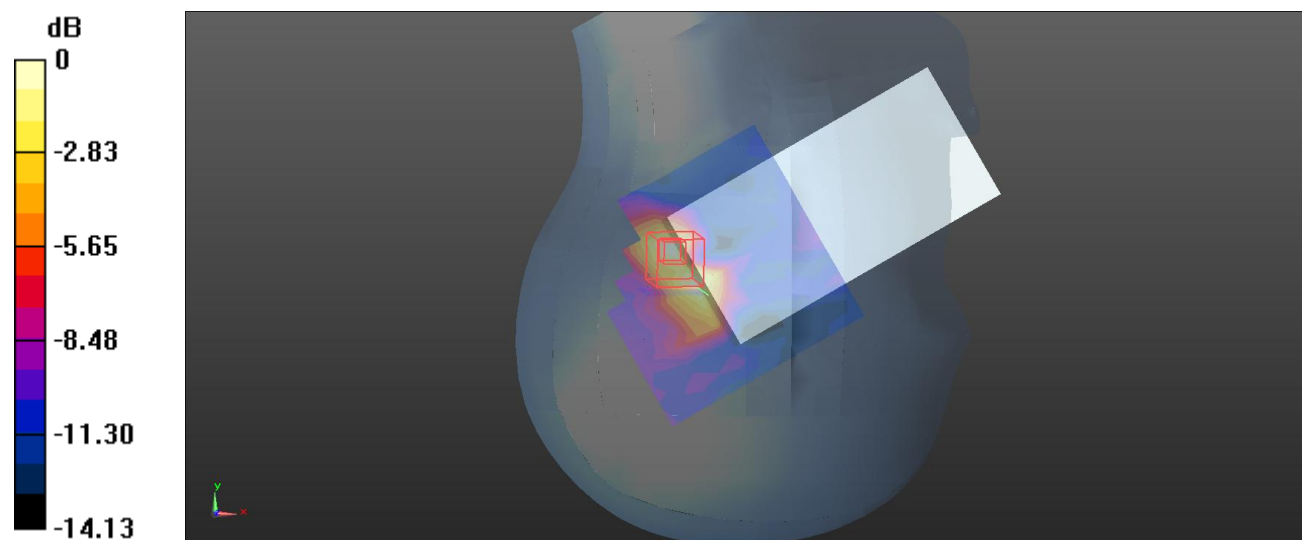

0 dB = 0.270 W/kg = -5.69 dBW/kg

Test Plot 117#**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5280$ MHz; $\sigma = 4.786$ S/m; $\epsilon_r = 34.99$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - Sn7522; ConvF(5.36, 5.36, 5.36) @ 5280 MHz; Calibrated: 2023/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Body Front/WLAN 5.3G 802.11a Mid/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0484 W/kg


Body Front/WLAN 5.3G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.246 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.0690 W/kg

SAR(1 g) = 0.028 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0509 W/kg

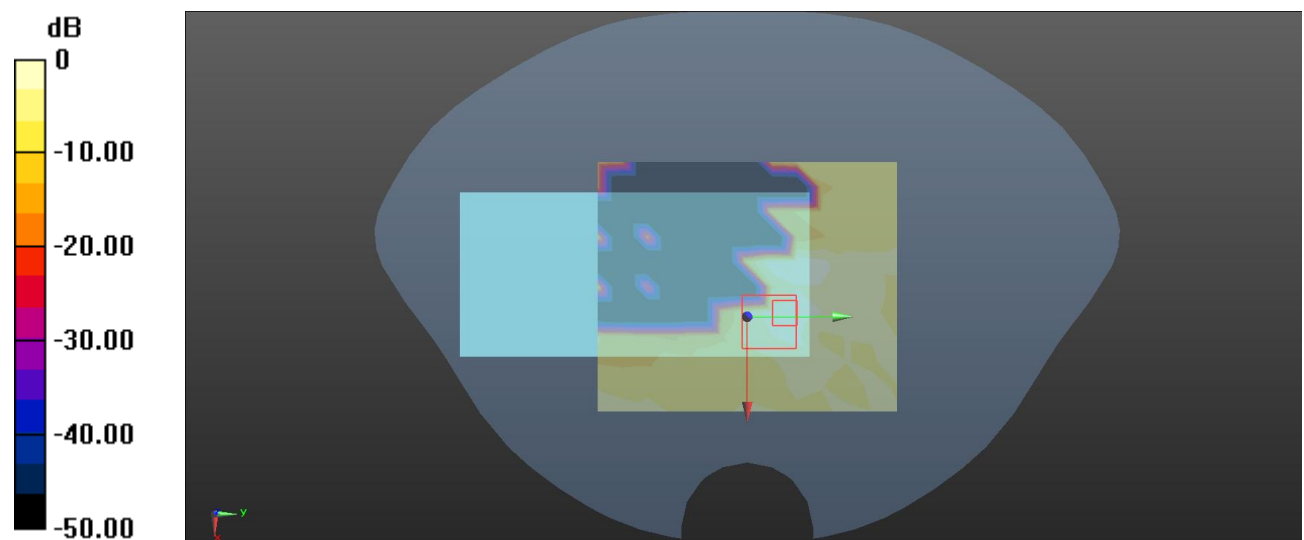

0 dB = 0.0509 W/kg = -12.93 dBW/kg

Test Plot 118#**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5280$ MHz; $\sigma = 4.786$ S/m; $\epsilon_r = 34.99$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - Sn7522; ConvF(5.36, 5.36, 5.36) @ 5280 MHz; Calibrated: 2023/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Body Back/WLAN 5.3G 802.11a Mid/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.192 W/kg


Body Back/WLAN 5.3G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.666 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.320 W/kg

SAR(1 g) = 0.108 W/kg; SAR(10 g) = 0.048 W/kg

Maximum value of SAR (measured) = 0.227 W/kg

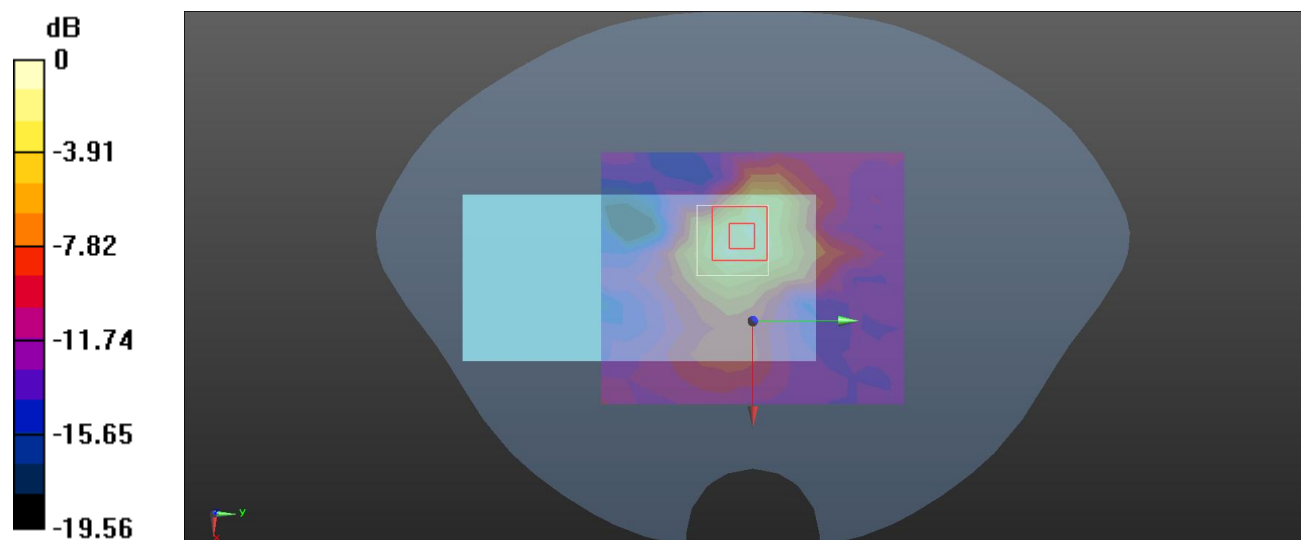

0 dB = 0.227 W/kg = -6.44 dBW/kg

Test Plot 119#**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5280$ MHz; $\sigma = 4.786$ S/m; $\epsilon_r = 34.99$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - Sn7522; ConvF(5.36, 5.36, 5.36) @ 5280 MHz; Calibrated: 2023/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Body Right/WLAN 5.3G 802.11a Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0628 W/kg


Body Right/WLAN 5.3G 802.11a Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.803 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.0880 W/kg

SAR(1 g) = 0.040 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.0670 W/kg

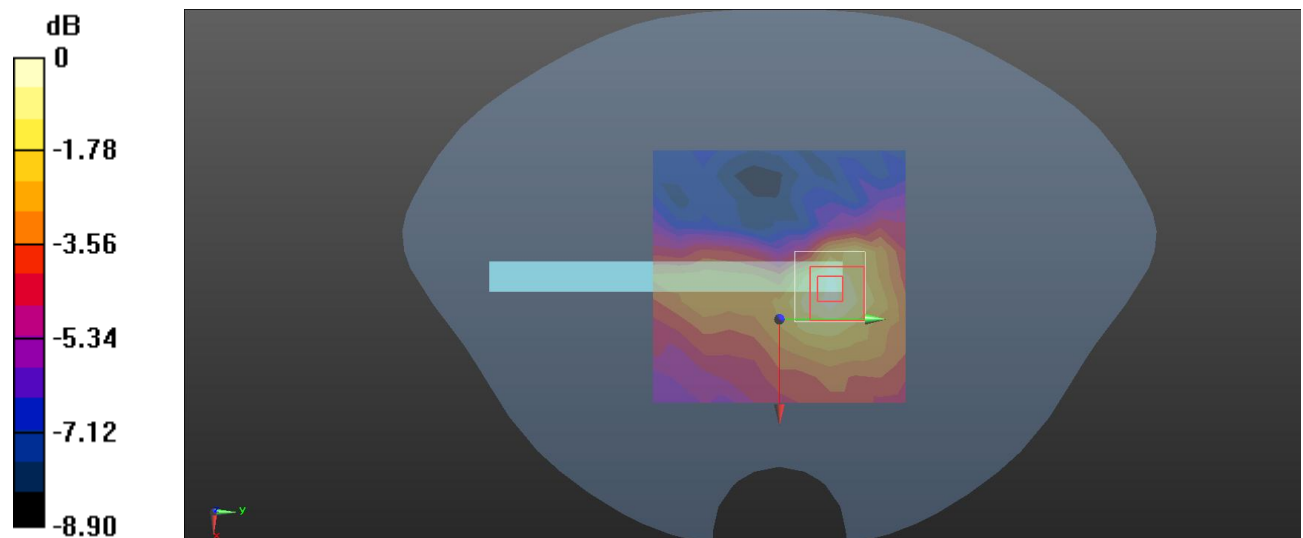

0 dB = 0.0670 W/kg = -11.74 dBW/kg

Test Plot 120#**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5280$ MHz; $\sigma = 4.786$ S/m; $\epsilon_r = 34.99$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - Sn7522; ConvF(5.36, 5.36, 5.36) @ 5280 MHz; Calibrated: 2023/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Body Top/WLAN 5.3G 802.11a Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.151 W/kg


Body Top/WLAN 5.3G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.188 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.203 W/kg

SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.160 W/kg

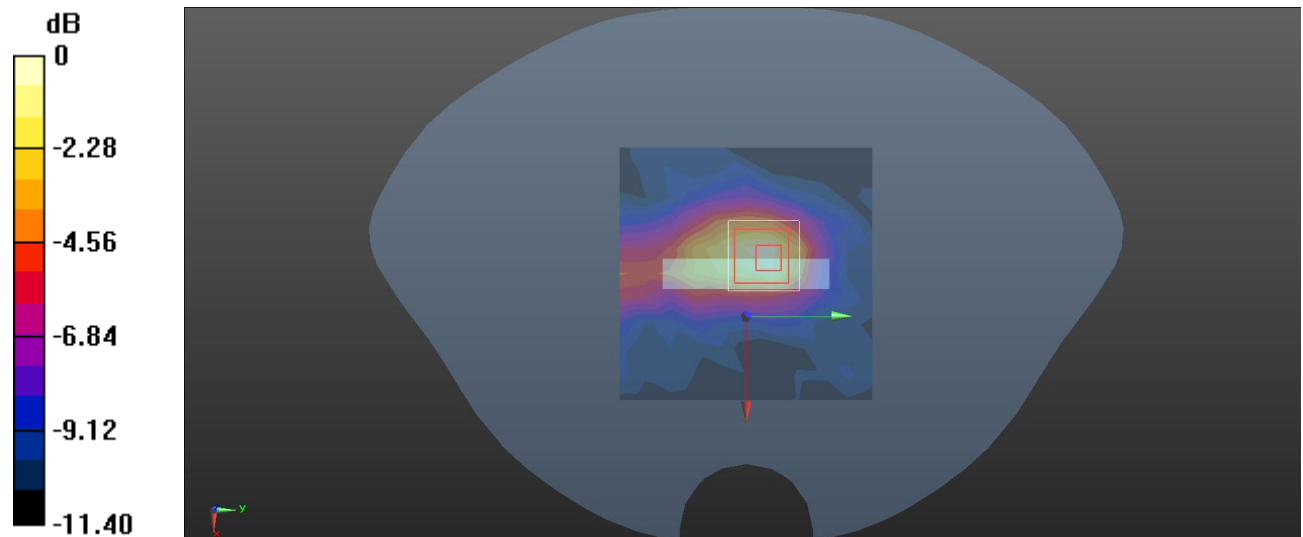

0 dB = 0.160 W/kg = -7.96 dBW/kg

Test Plot 121#**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5580$ MHz; $\sigma = 5.075$ S/m; $\epsilon_r = 34.691$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - Sn7522; ConvF(4.85, 4.85, 4.85) @ 5580 MHz; Calibrated: 2023/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Head Left Cheek/WLAN 5.6G 802.11a Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.378 W/kg


Head Left Cheek/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.087 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.396 W/kg

SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.028 W/kg

Maximum value of SAR (measured) = 0.217 W/kg

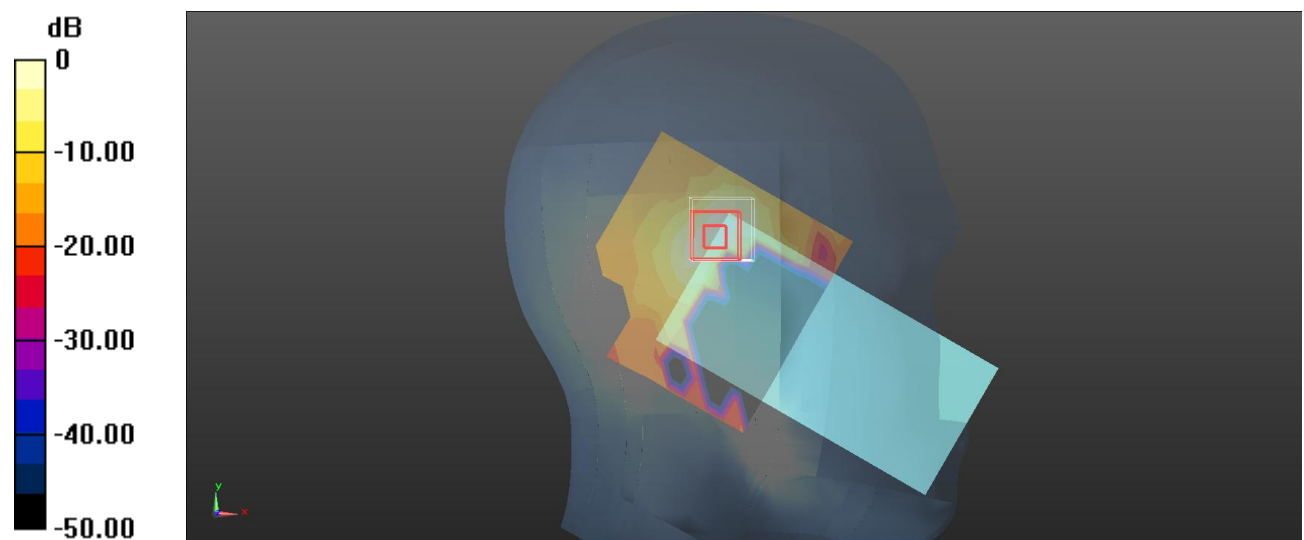

0 dB = 0.217 W/kg = -6.64 dBW/kg

Test Plot 122#**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5580$ MHz; $\sigma = 5.075$ S/m; $\epsilon_r = 34.691$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - Sn7522; ConvF(4.85, 4.85, 4.85) @ 5580 MHz; Calibrated: 2023/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Head Left Tilt/WLAN 5.6G 802.11a Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.362 W/kg


Head Left Tilt/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.176 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.309 W/kg

SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.058 W/kg

Maximum value of SAR (measured) = 0.356 W/kg

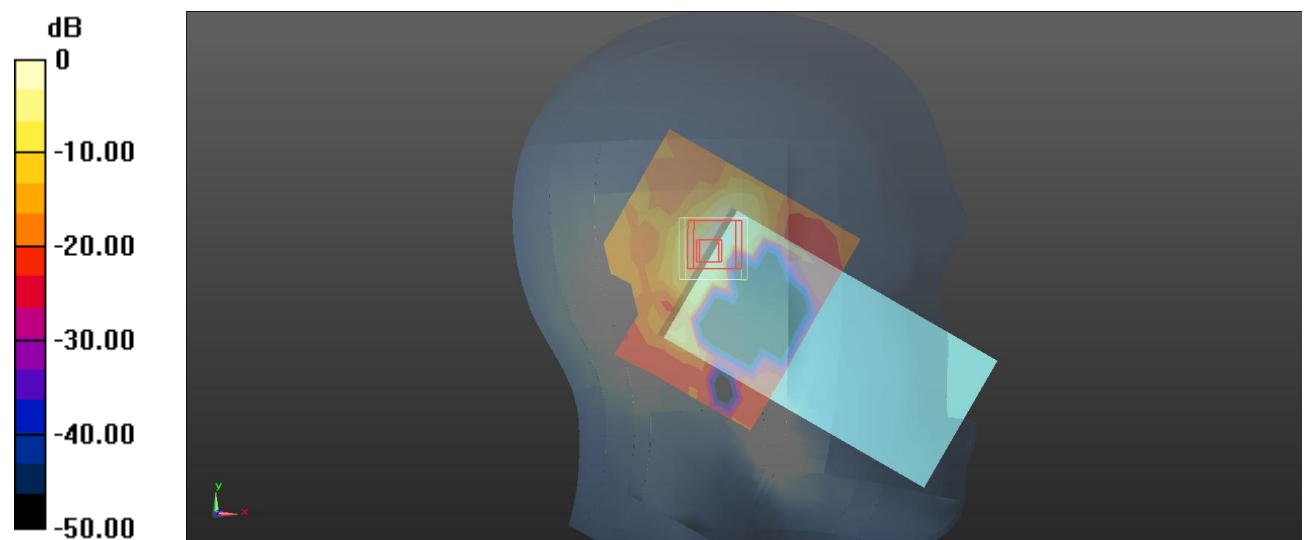

0 dB = 0.356 W/kg = -4.49 dBW/kg

Test Plot 123#**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5580$ MHz; $\sigma = 5.075$ S/m; $\epsilon_r = 34.691$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - Sn7522; ConvF(4.85, 4.85, 4.85) @ 5580 MHz; Calibrated: 2023/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Head Right Cheek/WLAN 5.6G 802.11a Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.400 W/kg


Head Right Cheek/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.724 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.578 W/kg

SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.031 W/kg

Maximum value of SAR (measured) = 0.299 W/kg

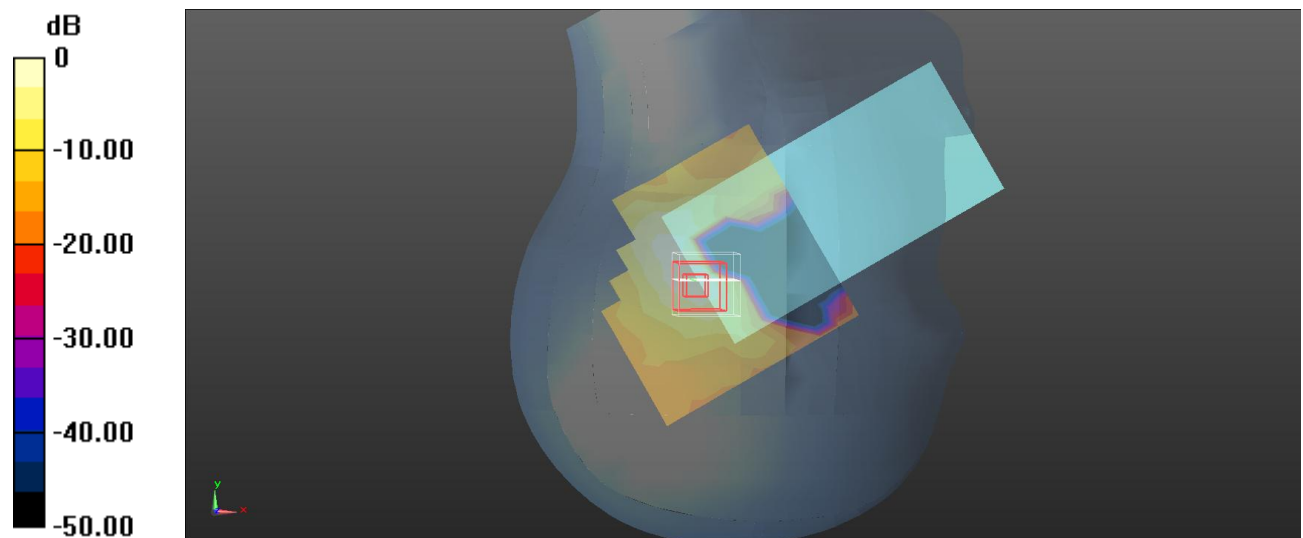

0 dB = 0.299 W/kg = -5.24 dBW/kg

Test Plot 124#**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**


Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5580 \text{ MHz}$; $\sigma = 5.075 \text{ S/m}$; $\epsilon_r = 34.691$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - Sn7522; ConvF(4.85, 4.85, 4.85) @ 5580 MHz; Calibrated: 2023/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

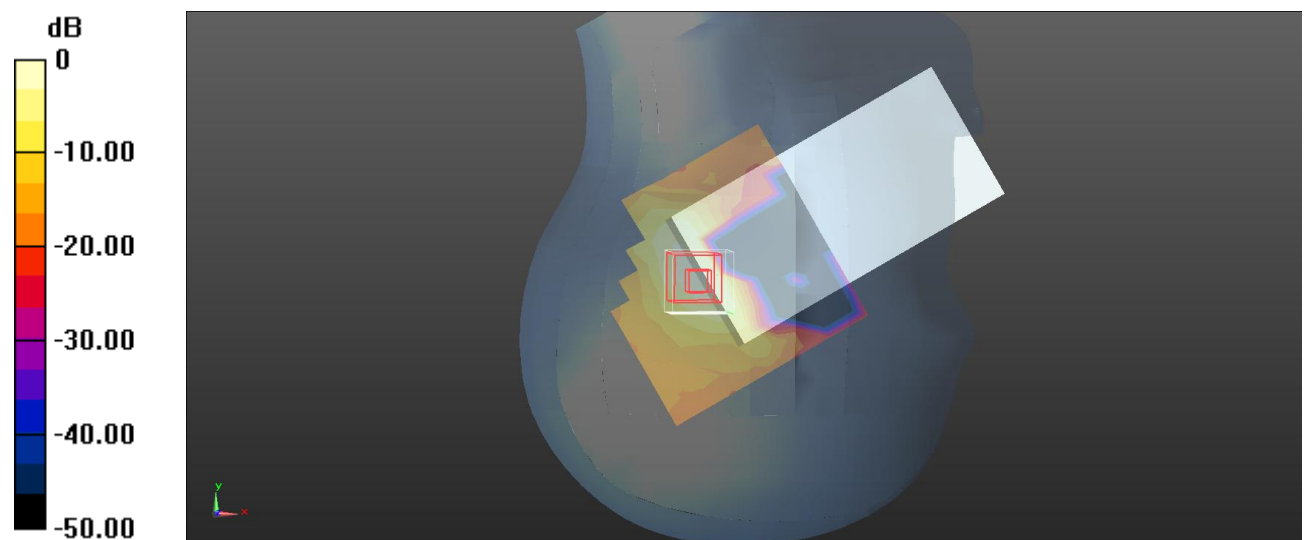Head Right Tilt/WLAN 5.6G 802.11a Mid/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.241 W/kg **Head Right Tilt/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 7.466 V/m ; Power Drift = -0.10 dB Peak SAR (extrapolated) = 0.282 W/kg **SAR(1 g) = 0.094 W/kg ; SAR(10 g) = 0.034 W/kg** Maximum value of SAR (measured) = 0.248 W/kg  $0 \text{ dB} = 0.248 \text{ W/kg} = -6.06 \text{ dBW/kg}$

Test Plot 125#**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5580$ MHz; $\sigma = 5.075$ S/m; $\epsilon_r = 34.691$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - Sn7522; ConvF(4.85, 4.85, 4.85) @ 5580 MHz; Calibrated: 2023/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Body Front/WLAN 5.6G 802.11a Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.124 W/kg


Body Front/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.241 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.254 W/kg

SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.106 W/kg

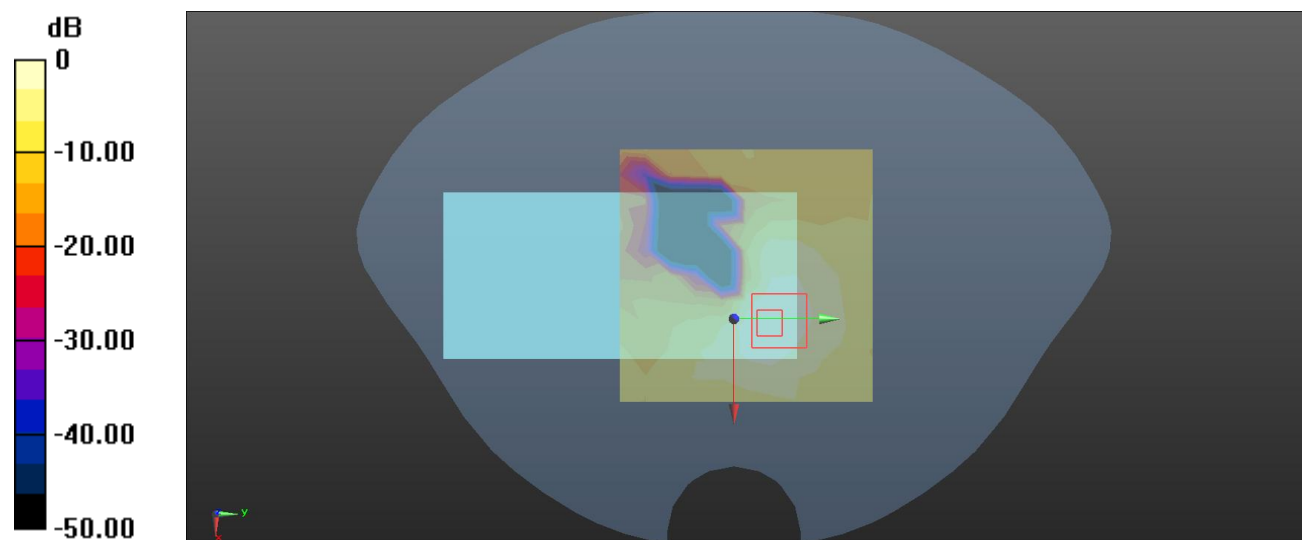

0.106 W/kg = -9.75 dBW/kg

Test Plot 126#**DUT: AVVIO A680; Type: Smart phone; Serial: 2EOD-1;**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5580$ MHz; $\sigma = 5.075$ S/m; $\epsilon_r = 34.691$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - Sn7522; ConvF(4.85, 4.85, 4.85) @ 5580 MHz; Calibrated: 2023/05/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN13543; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7164)

Body Back/WLAN 5.6G 802.11a Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.230 W/kg


Body Back/WLAN 5.6G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.823 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.281 W/kg

SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.036 W/kg

Maximum value of SAR (measured) = 0.269 W/kg

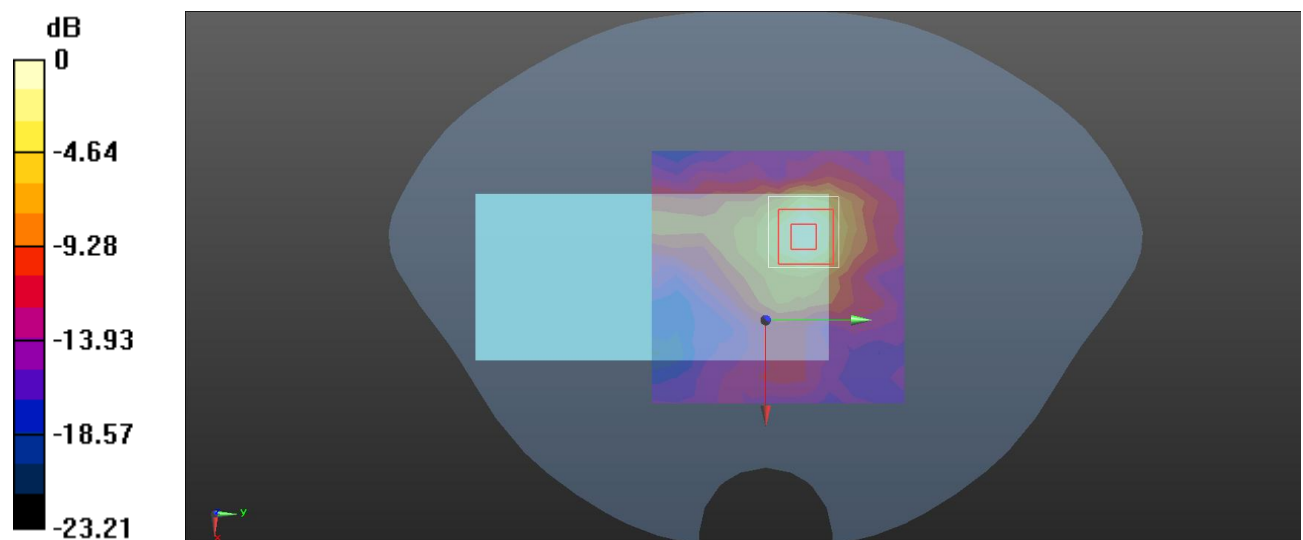

0 dB = 0.269 W/kg = -5.70 dBW/kg