

The BWG Antenna Sample Confirmation

File number: SNW-QR-D-007/A.0

Customer	SHENZHEN ALONG ELECTRONICS CO., LTD.		
Project Name	K23 (ALTTAN)		2023-12-27
		Date	
Project NO.	SN1131		FPC
		Notes	
Frequency Range	BT/WIFI (2. 4G/5G) /GPS		

Designer: SINAWELL Electronics(Shenzhen) Co., Ltd.

Add: 712-717, Block A Jinfulai Building,49-1 Dabao Road,Xinan 28th area,Baoan District,Shenzhen,China

Catalogue

front cover.....	1
catalogue.....	2
1. Overview of specification	3
2. FPC Antenna appearance	3
3. electrical property	3
3.1. Antenna frequency band	3
3.2. matching circuit	3
4. Appearance structure	4
4.1. FPC Antenna material	4
5. remarks	4
6.Appendix I (Structural Drawings)	5
7.Appendix II (3D Test Report)	6、7

1. Overview of specifications

This specification describes the status of K23 built-in antenna, and its frequency band is BT/WIFI/GPS.

2. Antenna appearance




3. Electrical performance

3.1. Antenna frequency band

	Antenna
Transmitting frequency band(MHz)	BT/WIFI(2.4G/5G)/GPS

3.2. Matching circuit

The test point is behind the antenna connector (RF test port), as shown in the figure below.
Note: the antenna matching electronic material should be 1% accurate.

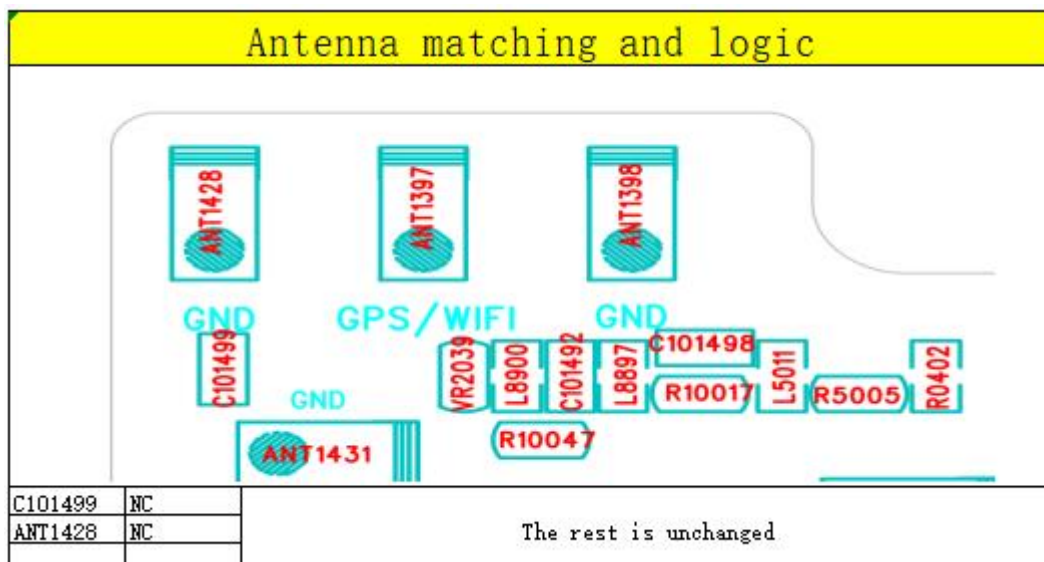

4. Appearance structure

4.1 Antenna material FPC

5. Remarks



The following table format

Appendix I: structural drawings
BT Antenna structure drawing

Appendix 1: Structural Drawings

Appendix II: Electrical Performance Test Report

Appendix 1: FPC structural drawings

		1	2	3	4	5	6	7	8																																
								<table border="1" style="font-size: 8px;"> <tr> <th colspan="2">The third person</th> </tr> <tr> <td>0~10</td> <td>±0.05</td> </tr> <tr> <td>10~18</td> <td>±0.10</td> </tr> <tr> <td>18~30</td> <td>±0.12</td> </tr> <tr> <td>30~40</td> <td>±0.15</td> </tr> <tr> <td>40~</td> <td>±0.20</td> </tr> <tr> <td colspan="2">角度 ±0.5°</td> </tr> </table>		The third person		0~10	±0.05	10~18	±0.10	18~30	±0.12	30~40	±0.15	40~	±0.20	角度 ±0.5°																			
		The third person																																							
0~10	±0.05																																								
10~18	±0.10																																								
18~30	±0.12																																								
30~40	±0.15																																								
40~	±0.20																																								
角度 ±0.5°																																									
																																									
Notes: 1. "*" is the key dimension ; 2. Please refer to the drawing if no dimension is indicated; 3. Meet rohs2.0, reach environmental protection requirements. 4. This drawing is an internal controlled document and is strictly prohibited from being disseminated in any form without our company's permission																																									
Rev. <table border="1" style="width: 100%;"> <tr> <td style="width: 50%;">A</td> <td style="width: 50%;">New drawing</td> </tr> <tr> <td>2</td> <td>Modify the content</td> </tr> <tr> <td></td> <td>Date</td> </tr> <tr> <td></td> <td>Remarks</td> </tr> </table>		A	New drawing	2	Modify the content		Date		Remarks	<table border="1" style="width: 100%; font-size: 8px;"> <tr> <td colspan="2" style="text-align: center;">  </td> <td colspan="2" style="text-align: center;"> 司南微电子 (深圳) 有限公司 SINAWELL Electronics (Shenzhen) Co., LTD </td> <td colspan="2" style="text-align: center;"> Project name 6501(SN1131) </td> <td colspan="2" style="text-align: center;"> Date 2023-11-21 </td> </tr> <tr> <td colspan="2" style="text-align: center;"> Product name BFG Antenna </td> <td colspan="2" style="text-align: center;"> Material no. SN131-BFG-Q3 </td> <td colspan="2" style="text-align: center;"> Material </td> <td colspan="2" style="text-align: center;"> Project RF </td> </tr> <tr> <td colspan="2" style="text-align: center;"> Company SINAWELL </td> <td colspan="2" style="text-align: center;"> Scale 1:1 </td> <td colspan="2" style="text-align: center;"> Rev. A </td> <td colspan="2"></td> </tr> </table>										司南微电子 (深圳) 有限公司 SINAWELL Electronics (Shenzhen) Co., LTD		Project name 6501(SN1131)		Date 2023-11-21		Product name BFG Antenna		Material no. SN131-BFG-Q3		Material		Project RF		Company SINAWELL		Scale 1:1		Rev. A			
		A	New drawing																																						
2	Modify the content																																								
	Date																																								
	Remarks																																								
		司南微电子 (深圳) 有限公司 SINAWELL Electronics (Shenzhen) Co., LTD		Project name 6501(SN1131)		Date 2023-11-21																																			
Product name BFG Antenna		Material no. SN131-BFG-Q3		Material		Project RF																																			
Company SINAWELL		Scale 1:1		Rev. A																																					


Appendix II: 3D Test Report

WIFI-2.4G	Data Rate	Channel	TRP (dBm)	TIS (dBm)
11B	11M	1	11.06	-78.6
		6	11.74	-80.11
		11	11.87	-81.52
WIFI-5G	Data Rate	Channel	TRP (dBm)	TIS (dBm)
11A	54M	40	7.1	-68.41
		56	8.05	-68.66
		157	6.12	-66.02
GPS	Channel		CN (dBm)	TIS (dBm)
GPS	0		40.87	-153.67


Passive efficiency

GPS				BT/WIFI-2.4				WIFI-5G			
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
1550	52.42	-2.8	1.97	2400	24.24	-6.16	-0.9	5150	11.67	-9.33	-3.2
1560	50.79	-2.94	1.99	2410	25.75	-5.89	-0.68	5175	16.65	-7.78	-1.79
1570	46.04	-3.37	1.68	2420	25.52	-5.93	-0.67	5200	14.94	-8.26	-2.21
1580	39.4	-4.04	1.03	2430	26.1	-5.83	-0.42	5225	17.47	-7.58	-1.3
1590	37.82	-4.22	0.94	2440	24.83	-6.05	-0.44	5250	22.26	-6.53	-0.41
1600	39.38	-4.05	0.88	2450	22.64	-6.45	-0.68	5275	20.19	-6.95	-0.83
				2460	22.39	-6.5	-0.57	5300	16.05	-7.95	-1.99
				2470	23.38	-6.31	-0.46	5325	21.93	-6.59	-0.68
				2480	23.71	-6.25	-0.59	5350	13.32	-8.76	-3.23
				2490	22.74	-6.43	-0.74	5375	15.67	-8.05	-1.7
				2500	20.2	-6.95	-1.1	5400	20.49	-6.88	-0.7
								5425	16.08	-7.94	-1.66
								5450	15.37	-8.13	-2.2
								5475	17.08	-7.67	-1.62
								5500	11.68	-9.33	-3.18
								5525	15.94	-7.98	-1.84
								5550	17.25	-7.63	-1.78
								5575	17.36	-7.6	-1.81
								5600	17.68	-7.52	-1.7
								5625	19.08	-7.19	-1.32
								5650	16.31	-7.88	-1.89
								5675	18.45	-7.34	-1.41
								5700	19.27	-7.15	-1.2
								5725	16.88	-7.73	-2.36
								5750	19.21	-7.16	-1.63
								5775	22.04	-6.57	-0.84
								5800	16.65	-7.78	-2.15
								5825	22.17	-6.54	-0.89
								5850	20.54	-6.87	-1.18

Field intensity pattern

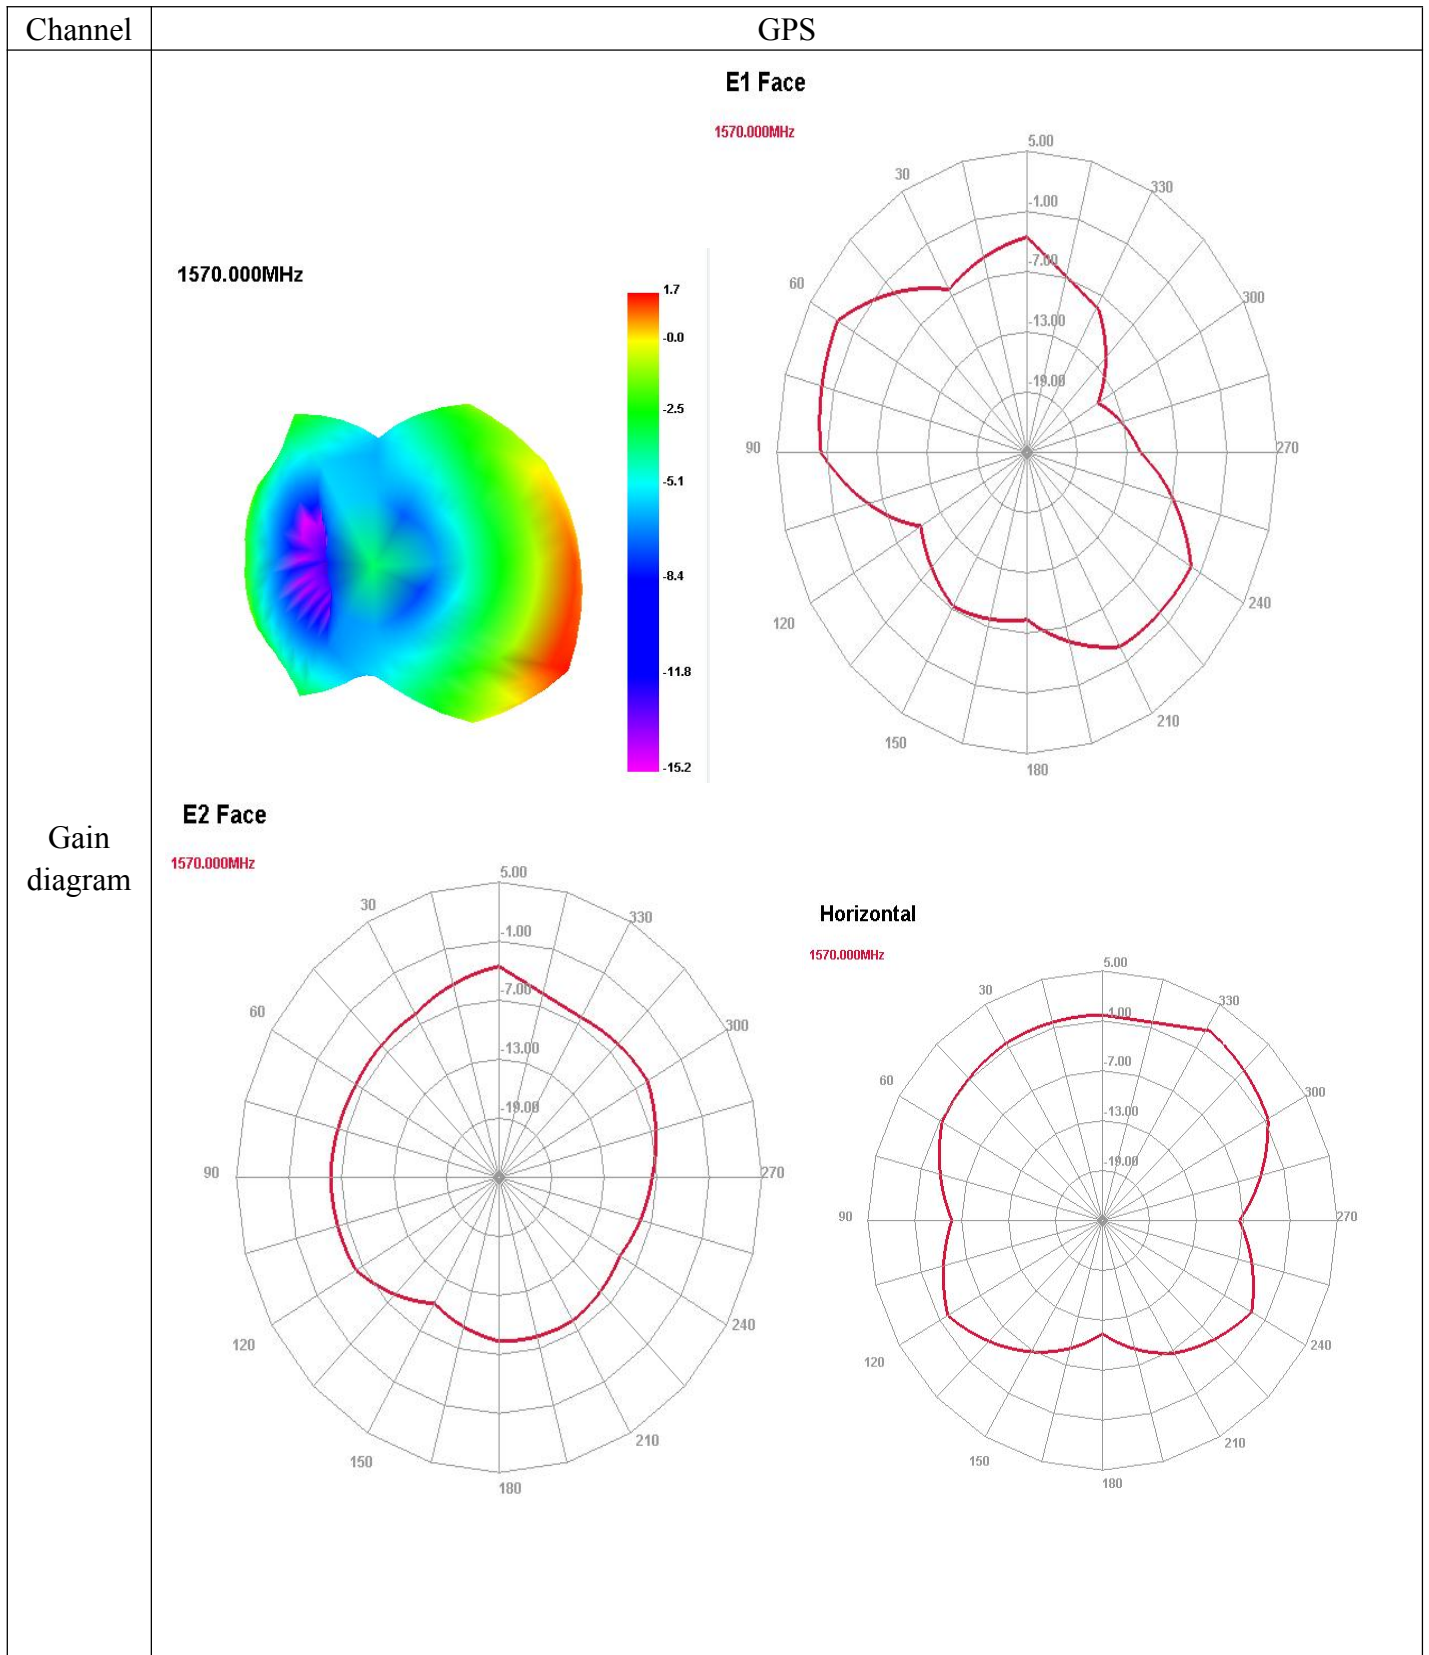

Confirmation of Sample

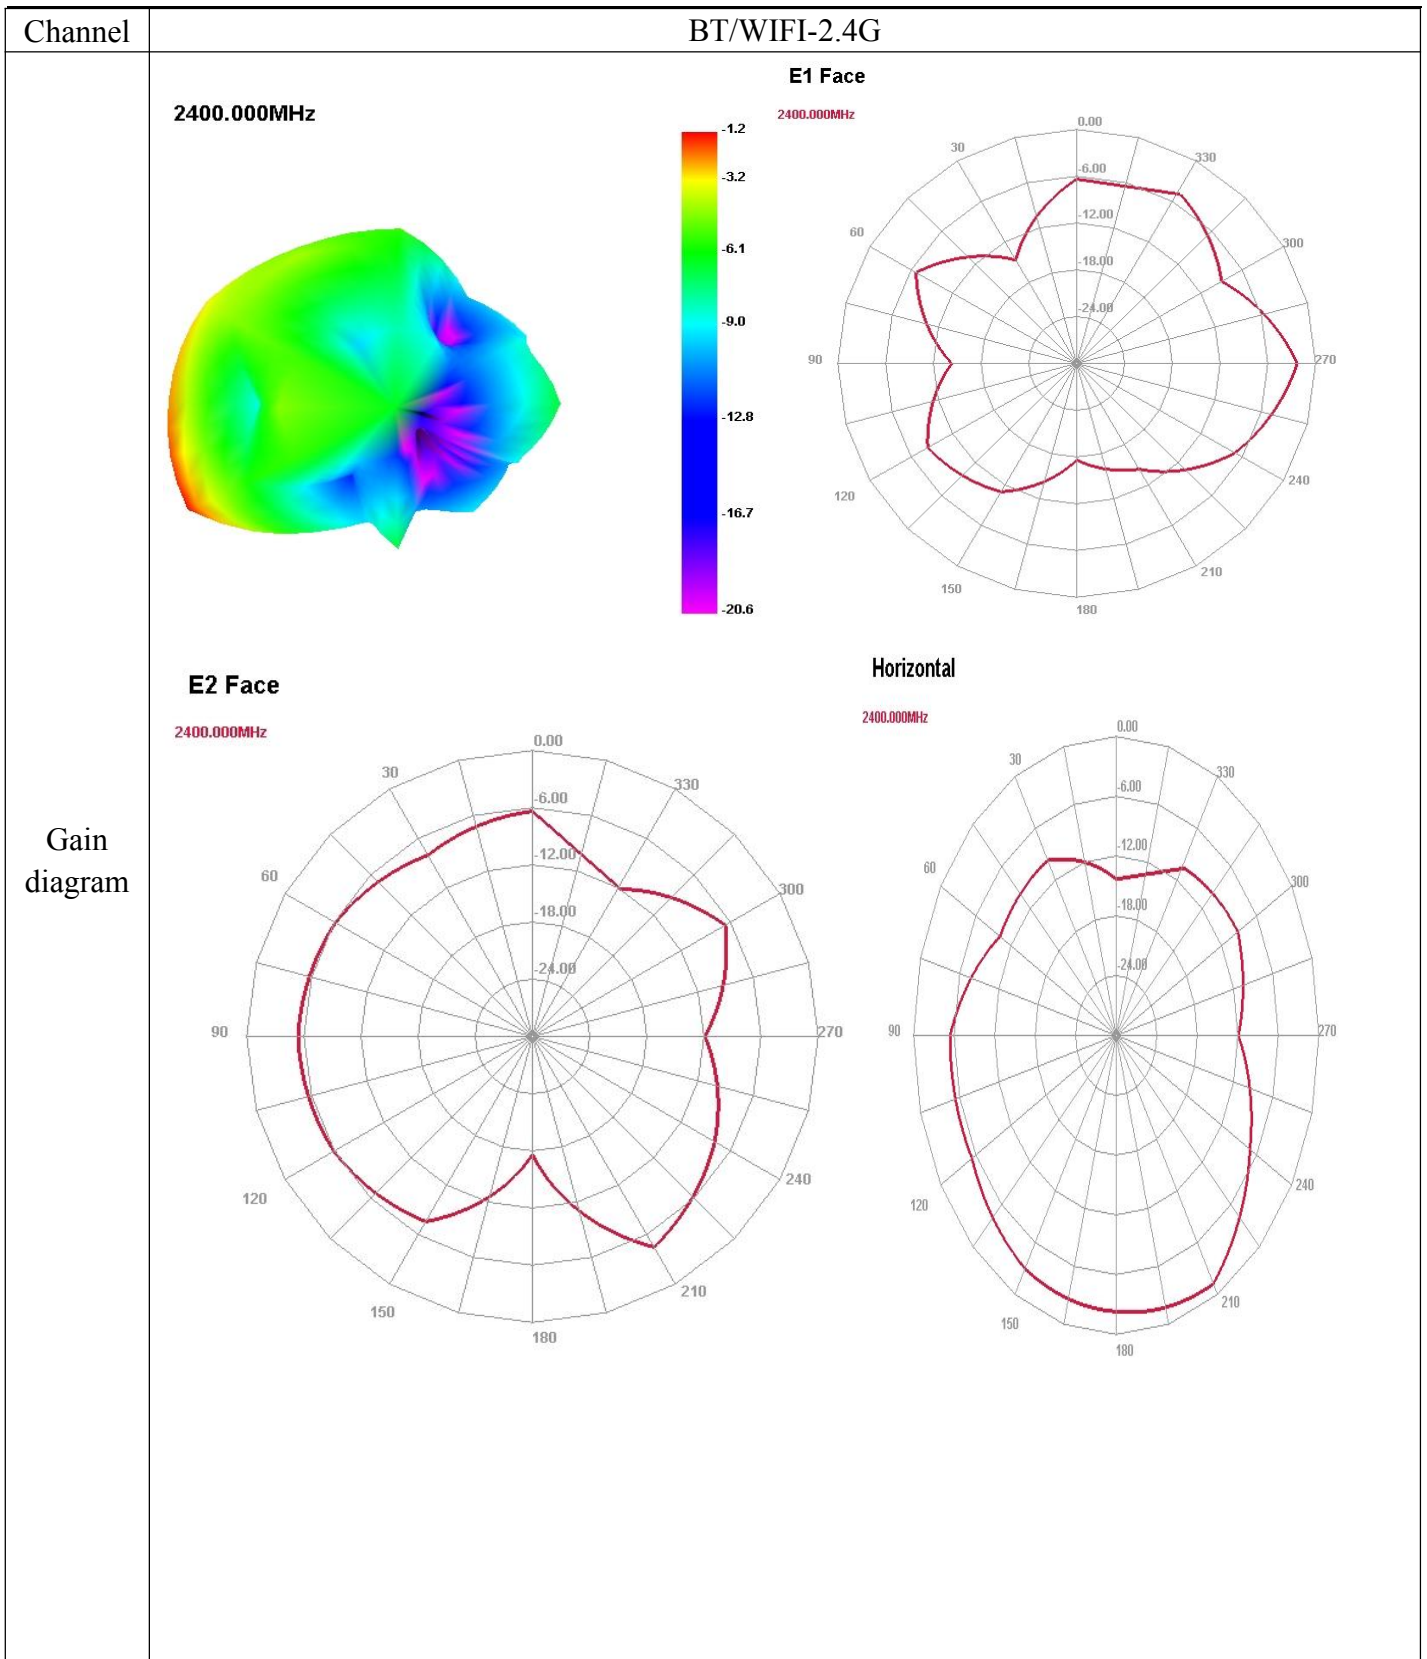

Confirmation of Sample

