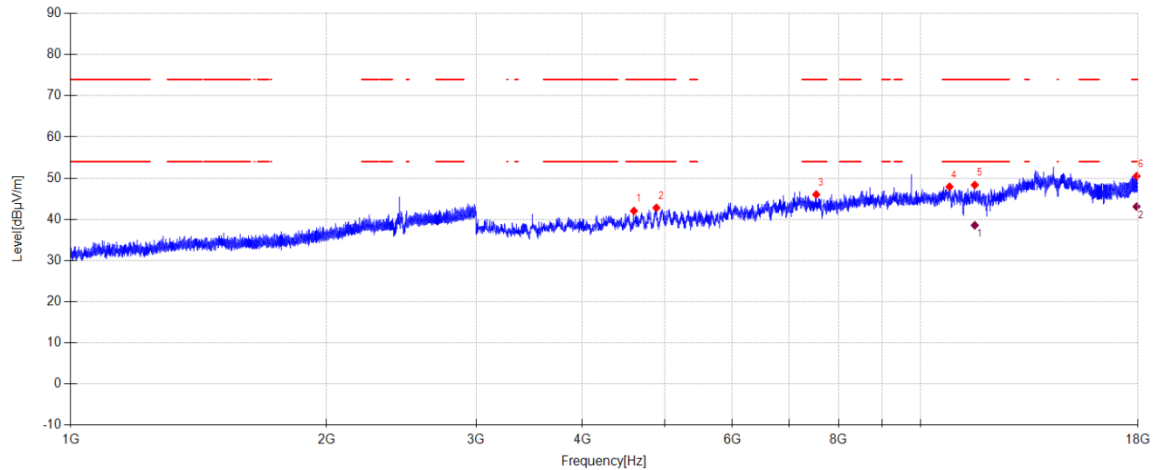


TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-27**Tested By:** Li Xiongbin**Test Mode:** TX BLE 2M 2440MHz Mode**Power Supply:** Battery**Condition:** Temp:22.7°C;Humi:49.0%**Test Site:** 4# Fully Anechoic Room**File Path:** d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\28**Memo:** Sample number: S26070611-011 Left side

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4597.500	51.53	32.40	-41.93	42.00	74.00	32.00	PK	Vertical
2	4885.500	50.89	33.47	-41.59	42.77	74.00	31.23	PK	Vertical
3	7531.500	48.95	37.10	-40.04	46.01	74.00	27.99	PK	Vertical
4	10806.000	43.88	39.99	-35.98	47.89	74.00	26.11	PK	Vertical
5	11571.000	43.95	39.66	-35.29	48.32	74.00	25.68	PK	Vertical
6	17931.000	37.04	42.42	-29.00	50.46	74.00	23.54	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	11571.000	34.15	39.66	-35.29	38.52	54.00	15.48	AV	Vertical
2	17931.000	29.64	42.42	-29.00	43.06	54.00	10.94	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-24 **Tested By:** Zhong Nan
Test Mode: TX BLE 2M 2478MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\25
Memo: Sample number: S26070611-011 Left side

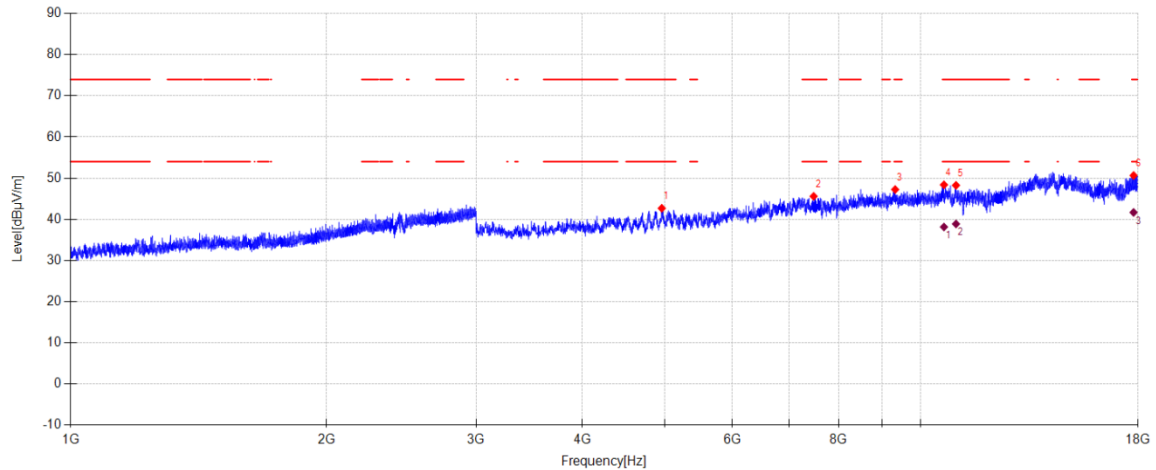**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4957.500	50.62	33.73	-41.70	42.65	74.00	31.35	PK	Horizontal
2	7479.000	48.52	37.10	-40.05	45.57	74.00	28.43	PK	Horizontal
3	9327.000	45.75	39.20	-37.73	47.22	74.00	26.78	PK	Horizontal
4	10644.000	44.17	39.89	-35.70	48.36	74.00	25.64	PK	Horizontal
5	10996.500	44.24	39.71	-35.72	48.23	74.00	25.77	PK	Horizontal
6	17787.000	38.85	41.62	-29.84	50.63	74.00	23.37	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	10644.000	33.92	39.89	-35.70	38.11	54.00	15.89	AV	Horizontal
2	10996.500	34.85	39.71	-35.72	38.84	54.00	15.16	AV	Horizontal
3	17787.000	29.87	41.62	-29.84	41.65	54.00	12.35	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-24 **Tested By:** Zhong Nan
Test Mode: TX BLE 2M 2478MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\26
Memo: Sample number: S26070611-011 Left side

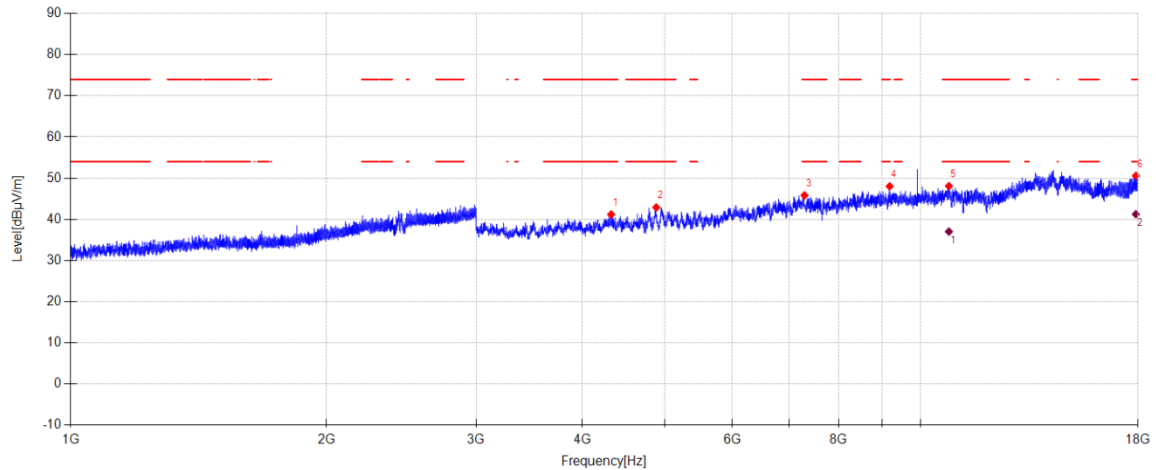**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4323.000	50.09	32.19	-41.13	41.15	74.00	32.85	PK	Vertical
2	4884.000	50.98	33.47	-41.59	42.86	74.00	31.14	PK	Vertical
3	7296.000	48.46	37.71	-40.37	45.80	74.00	28.20	PK	Vertical
4	9189.000	47.19	38.98	-38.17	48.00	74.00	26.00	PK	Vertical
5	10788.000	43.99	40.00	-35.93	48.06	74.00	25.94	PK	Vertical
6	17898.000	37.74	42.29	-29.48	50.55	74.00	23.45	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	10788.000	32.92	40.00	-35.93	36.99	54.00	17.01	AV	Vertical
2	17898.000	28.40	42.29	-29.48	41.21	54.00	12.79	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-25 **Tested By:** Zhong Nan
Test Mode: TX BLE 1M 2402MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\3
Memo: Sample number: S26070611-011 Right side

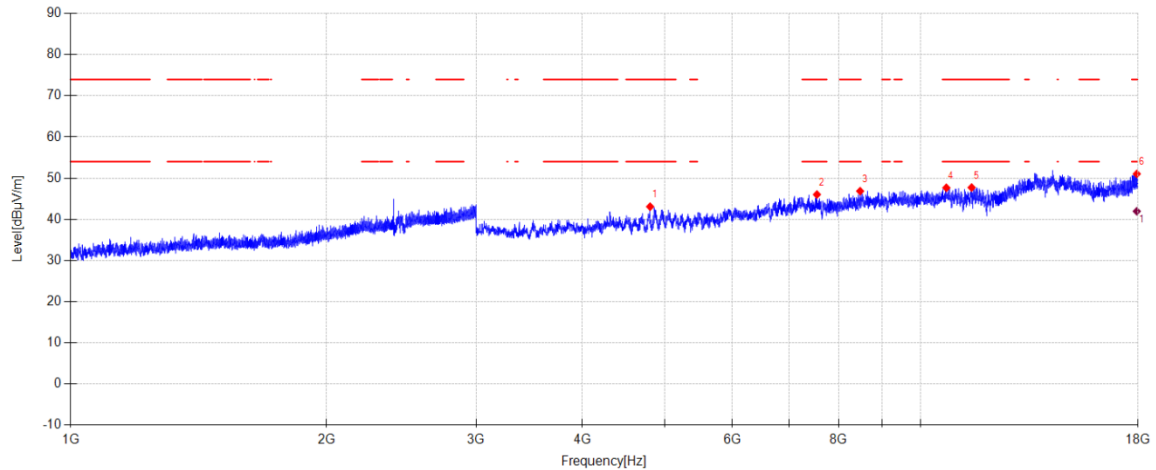**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4803.000	51.55	33.21	-41.71	43.05	74.00	30.95	PK	Horizontal
2	7546.500	48.95	37.10	-40.05	46.00	74.00	28.00	PK	Horizontal
3	8482.500	47.48	38.30	-38.95	46.83	74.00	27.17	PK	Horizontal
4	10713.000	43.29	40.00	-35.65	47.64	74.00	26.36	PK	Horizontal
5	11472.000	43.32	39.86	-35.48	47.70	74.00	26.30	PK	Horizontal
6	17943.000	37.37	42.47	-28.82	51.02	74.00	22.98	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	17943.000	28.28	42.47	-28.82	41.93	54.00	12.07	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Zhong Nan

Test Mode:

TX BLE 1M 2402MHz Mode

Power Supply:

Battery

Condition:

Temp:24.3°C;Humi:47.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\4

Memo:

Sample number: S26070611-011 Right side

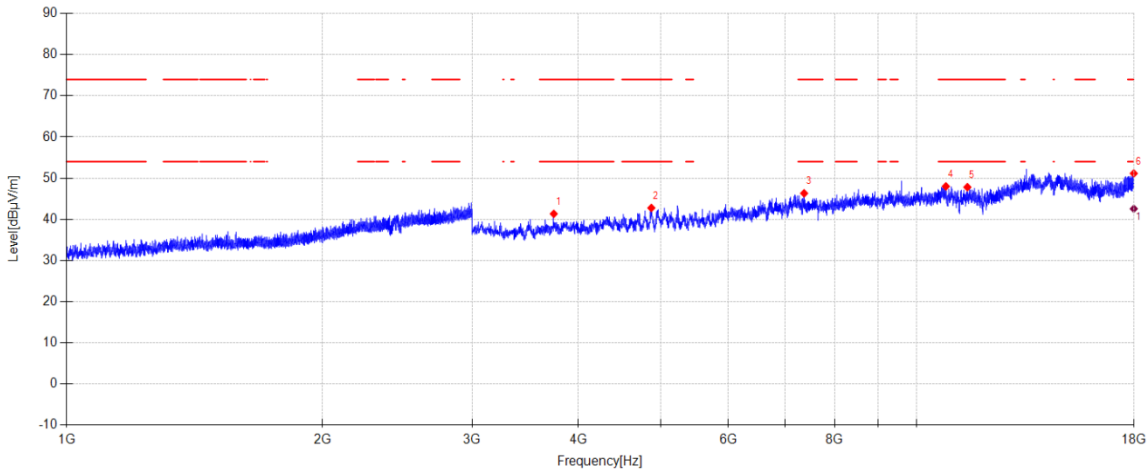

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3741.000	52.09	30.86	-41.64	41.31	74.00	32.69	PK	Vertical
2	4872.000	50.91	33.44	-41.61	42.74	74.00	31.26	PK	Vertical
3	7368.000	49.19	37.33	-40.23	46.29	74.00	27.71	PK	Vertical
4	10815.000	43.97	39.99	-35.98	47.98	74.00	26.02	PK	Vertical
5	11464.500	43.37	39.87	-35.45	47.79	74.00	26.21	PK	Vertical
6	17991.000	36.57	42.66	-28.10	51.13	74.00	22.87	PK	Vertical


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	17991.000	27.97	42.66	-28.10	42.53	54.00	11.47	AV	Vertical

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-25 **Tested By:** Zhong Nan
Test Mode: TX BLE 1M 2440MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\5
Memo: Sample number: S26070611-011 Right side

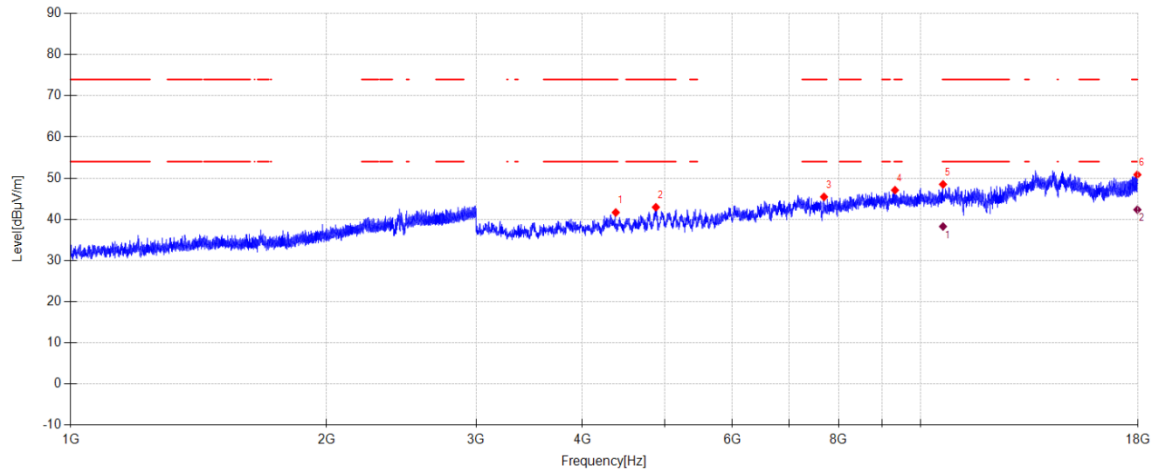

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4377.000	51.02	32.30	-41.69	41.63	74.00	32.37	PK	Horizontal
2	4879.500	51.05	33.46	-41.60	42.91	74.00	31.09	PK	Horizontal
3	7692.000	48.54	37.30	-40.40	45.44	74.00	28.56	PK	Horizontal
4	9322.500	45.57	39.20	-37.71	47.06	74.00	26.94	PK	Horizontal
5	10617.000	44.40	39.83	-35.75	48.48	74.00	25.52	PK	Horizontal
6	17971.500	36.63	42.59	-28.39	50.83	74.00	23.17	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	10617.000	34.14	39.83	-35.75	38.22	54.00	15.78	AV	Horizontal
2	17971.500	28.11	42.59	-28.39	42.31	54.00	11.69	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-25 **Tested By:** Zhong Nan
Test Mode: TX BLE 1M 2440MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\6
Memo: Sample number: S26070611-011 Right side

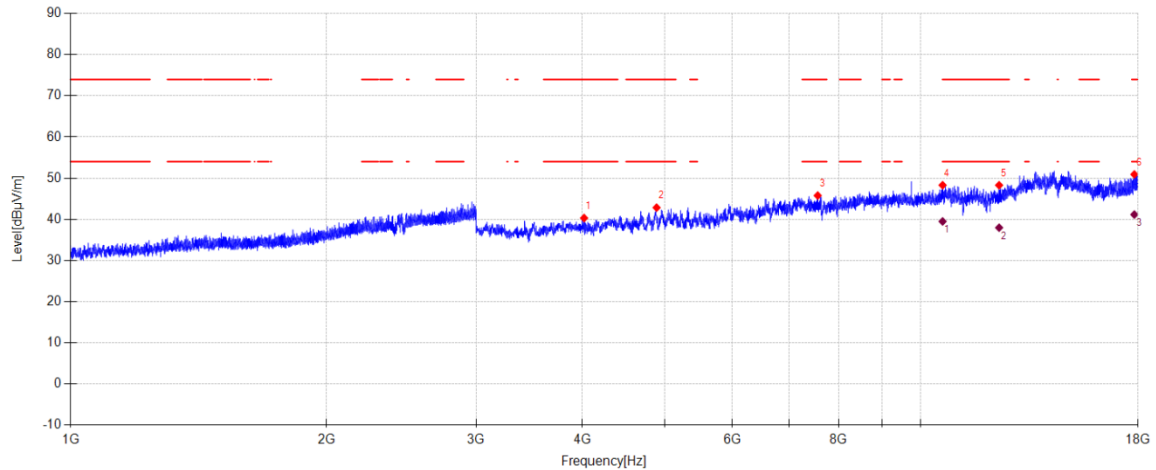

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4017.000	50.39	31.60	-41.71	40.28	74.00	33.72	PK	Vertical
2	4888.500	50.92	33.48	-41.59	42.81	74.00	31.19	PK	Vertical
3	7561.500	48.69	37.12	-40.06	45.75	74.00	28.25	PK	Vertical
4	10605.000	44.24	39.81	-35.77	48.28	74.00	25.72	PK	Vertical
5	12358.500	43.13	39.74	-34.61	48.26	74.00	25.74	PK	Vertical
6	17823.000	38.78	41.84	-29.72	50.90	74.00	23.10	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	10605.000	35.42	39.81	-35.77	39.46	54.00	14.54	AV	Vertical
2	12358.500	32.80	39.74	-34.61	37.93	54.00	16.07	AV	Vertical
3	17823.000	29.00	41.84	-29.72	41.12	54.00	12.88	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Zhong Nan

Test Mode:

TX BLE 1M 2480MHz Mode

Power Supply:

Battery

Condition:

Temp:24.3°C;Humi:47.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\7

Memo:

Sample number: S26070611-011 Right side

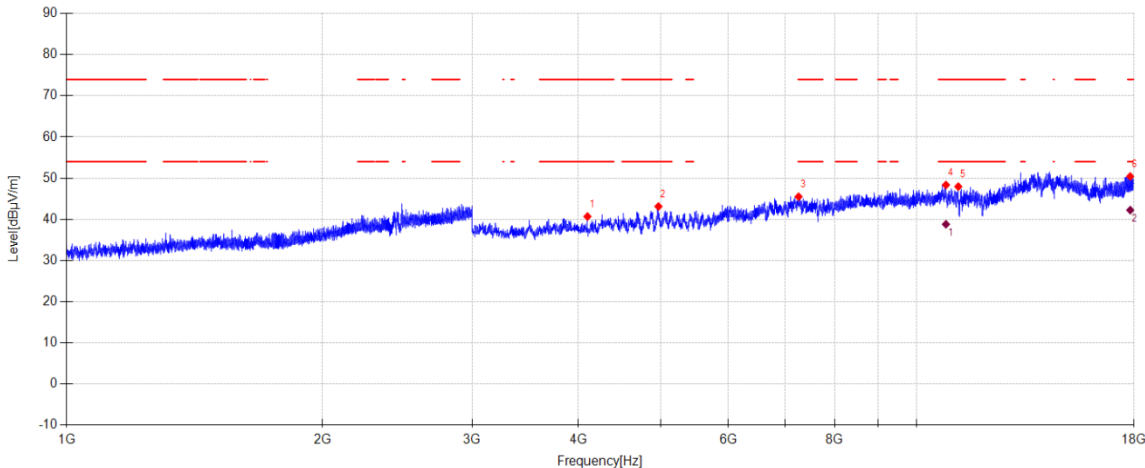

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4098.000	50.90	31.60	-41.85	40.65	74.00	33.35	PK	Horizontal
2	4966.500	51.05	33.77	-41.72	43.10	74.00	30.90	PK	Horizontal
3	7258.500	47.99	37.78	-40.29	45.48	74.00	28.52	PK	Horizontal
4	10818.000	44.34	39.98	-35.99	48.33	74.00	25.67	PK	Horizontal
5	11187.000	43.81	39.87	-35.75	47.93	74.00	26.07	PK	Horizontal
6	17818.500	38.33	41.81	-29.73	50.41	74.00	23.59	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	10818.000	34.78	39.98	-35.99	38.77	54.00	15.23	AV	Horizontal
2	17818.500	30.13	41.81	-29.73	42.21	54.00	11.79	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result


Test Date:2026-07-25Tested By:Zhong Nan

Test Mode:TX BLE 1M 2480MHz ModePower Supply:Battery

Condition:Temp:24.3°C;Humi:47.6%Test Site:4# Fully Anechoic Room

File Path:d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\8

Memo:Sample number: S26070611-011 Right side

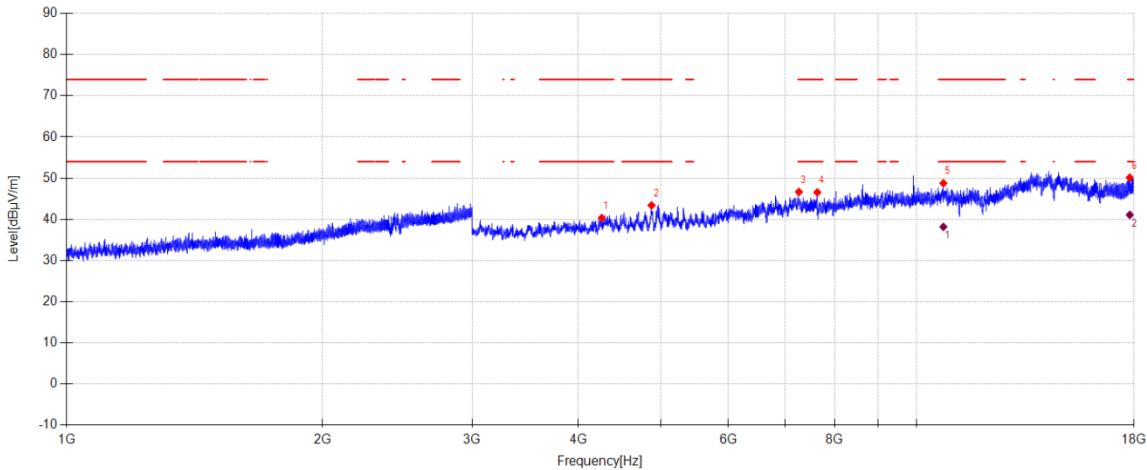

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4260.000	49.46	32.02	-41.19	40.29	74.00	33.71	PK	Vertical
2	4875.000	51.53	33.45	-41.61	43.37	74.00	30.63	PK	Vertical
3	7264.500	49.17	37.77	-40.30	46.64	74.00	27.36	PK	Vertical
4	7635.000	49.46	37.27	-40.20	46.53	74.00	27.47	PK	Vertical
5	10743.000	44.52	40.00	-35.76	48.76	74.00	25.24	PK	Vertical
6	17797.500	38.22	41.69	-29.80	50.11	74.00	23.89	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	10743.000	33.89	40.00	-35.76	38.13	54.00	15.87	AV	Vertical
2	17797.500	29.16	41.69	-29.80	41.05	54.00	12.95	AV	Vertical

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Zhong Nan

Test Mode:

TX BLE 2M 2404MHz Mode

Power Supply:

Battery

Condition:

Temp:24.3°C;Humi:47.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\9

Memo:

Sample number: S26070611-011 Right side

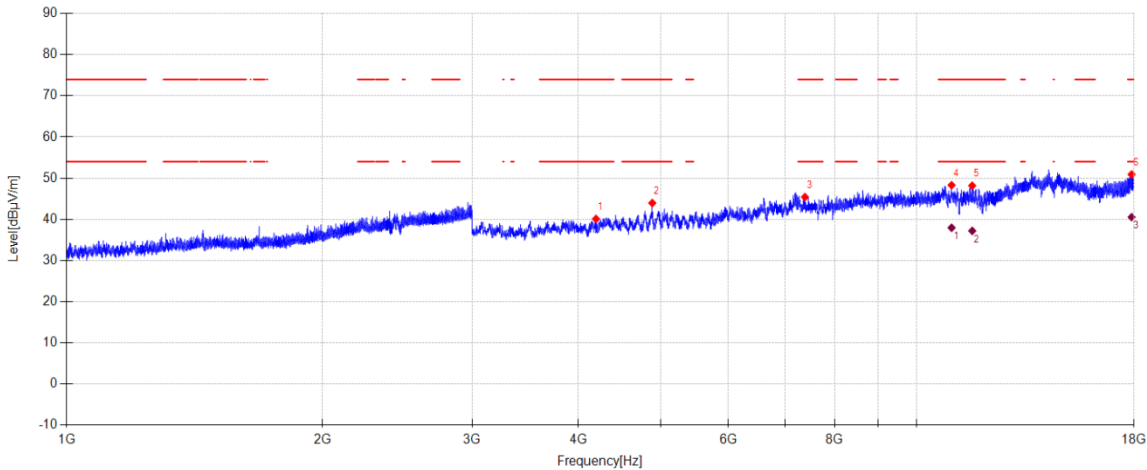

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4194.000	49.85	31.88	-41.66	40.07	74.00	33.93	PK	Horizontal
2	4884.000	52.05	33.47	-41.59	43.93	74.00	30.07	PK	Horizontal
3	7384.500	48.32	37.26	-40.19	45.39	74.00	28.61	PK	Horizontal
4	10984.500	44.30	39.73	-35.76	48.27	74.00	25.73	PK	Horizontal
5	11616.000	43.78	39.58	-35.21	48.15	74.00	25.85	PK	Horizontal
6	17886.000	38.17	42.22	-29.51	50.88	74.00	23.12	PK	Horizontal


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	10984.500	33.95	39.73	-35.76	37.92	54.00	16.08	AV	Horizontal
2	11616.000	32.78	39.58	-35.21	37.15	54.00	16.85	AV	Horizontal
3	17886.000	27.79	42.22	-29.51	40.50	54.00	13.50	AV	Horizontal

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-25 **Tested By:** Zhong Nan
Test Mode: TX BLE 2M 2404MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\10
Memo: Sample number: S26070611-011 Right side

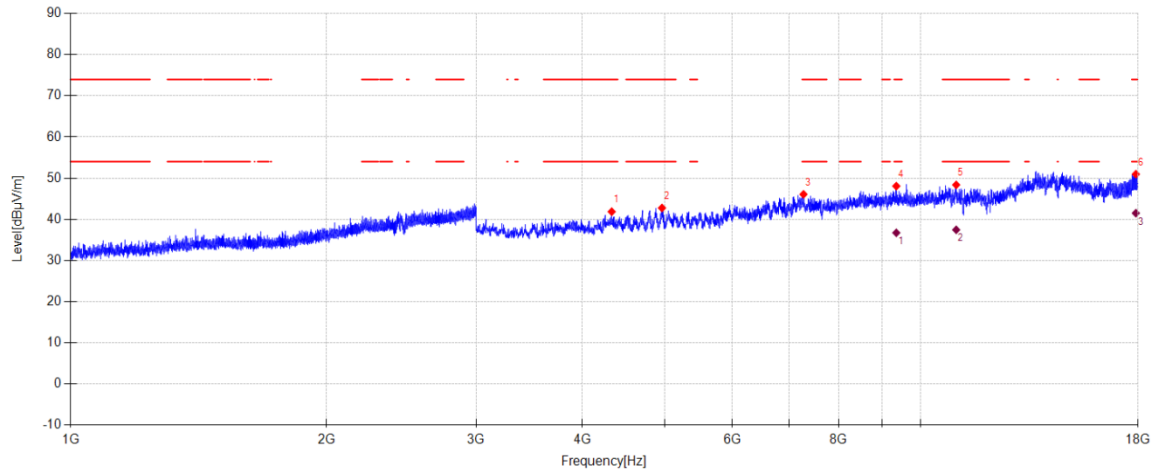**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4329.000	50.80	32.22	-41.19	41.83	74.00	32.17	PK	Vertical
2	4960.500	50.69	33.74	-41.70	42.73	74.00	31.27	PK	Vertical
3	7276.500	48.63	37.75	-40.33	46.05	74.00	27.95	PK	Vertical
4	9355.500	46.71	39.20	-37.87	48.04	74.00	25.96	PK	Vertical
5	11002.500	44.37	39.70	-35.72	48.35	74.00	25.65	PK	Vertical
6	17899.500	38.12	42.30	-29.47	50.95	74.00	23.05	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	9355.500	35.36	39.20	-37.87	36.69	54.00	17.31	AV	Vertical
2	11002.500	33.44	39.70	-35.72	37.42	54.00	16.58	AV	Vertical
3	17899.500	28.64	42.30	-29.47	41.47	54.00	12.53	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Zhong Nan

Test Mode:

TX BLE 2M 2440MHz Mode

Power Supply:

Battery

Condition:

Temp:24.3°C;Humi:47.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\11

Memo:

Sample number: S26070611-011 Right side

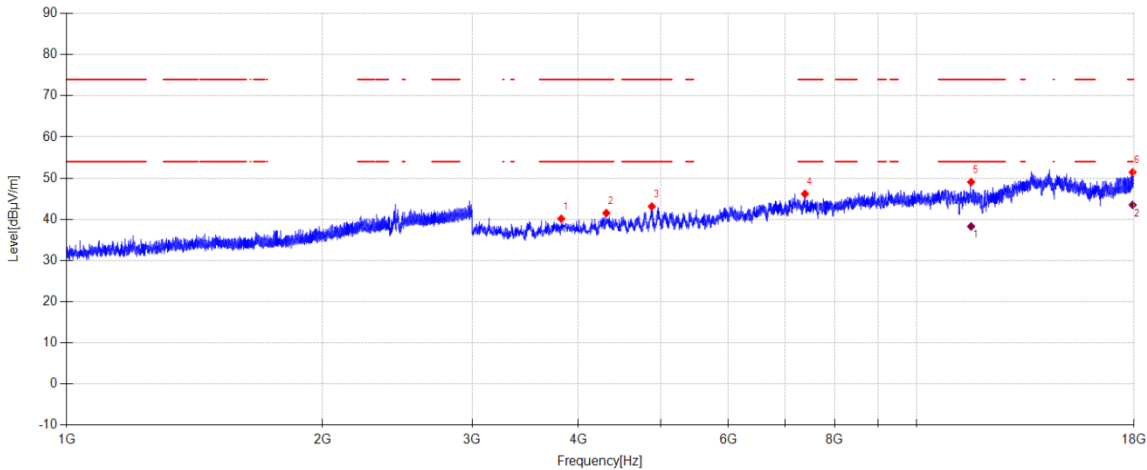

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3817.500	50.53	31.31	-41.73	40.11	74.00	33.89	PK	Horizontal
2	4312.500	50.37	32.15	-41.02	41.50	74.00	32.50	PK	Horizontal
3	4878.000	51.23	33.46	-41.60	43.09	74.00	30.91	PK	Horizontal
4	7384.500	49.08	37.26	-40.19	46.15	74.00	27.85	PK	Horizontal
5	11580.000	44.63	39.64	-35.25	49.02	74.00	24.98	PK	Horizontal
6	17935.500	37.90	42.44	-28.93	51.41	74.00	22.59	PK	Horizontal


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	11580.000	33.85	39.64	-35.25	38.24	54.00	15.76	AV	Horizontal
2	17935.500	29.97	42.44	-28.93	43.48	54.00	10.52	AV	Horizontal

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-25 **Tested By:** Zhong Nan
Test Mode: TX BLE 2M 2440MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\12
Memo: Sample number: S26070611-011 Right side

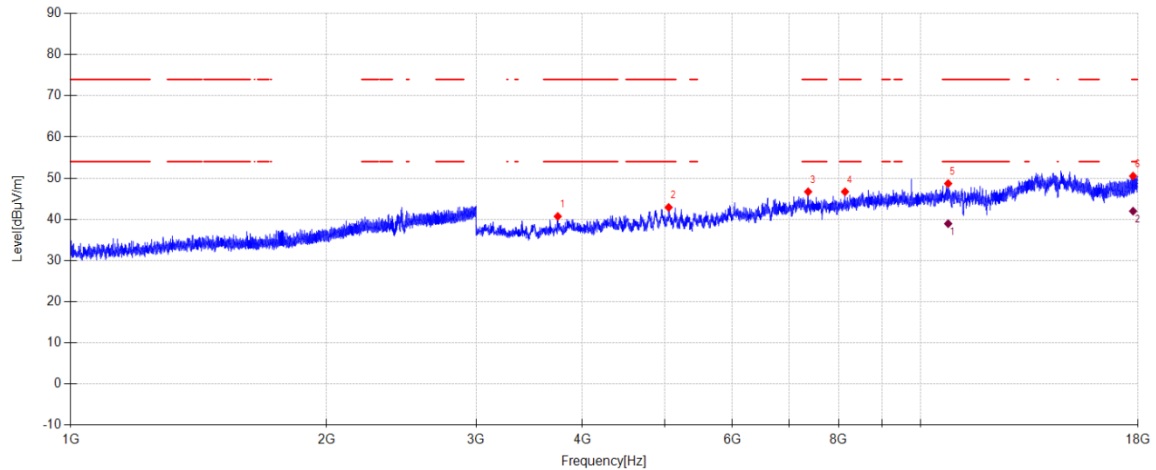**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3741.000	51.46	30.86	-41.64	40.68	74.00	33.32	PK	Vertical
2	5050.500	50.67	34.00	-41.80	42.87	74.00	31.13	PK	Vertical
3	7368.000	49.58	37.33	-40.23	46.68	74.00	27.32	PK	Vertical
4	8142.000	48.19	37.90	-39.41	46.68	74.00	27.32	PK	Vertical
5	10765.500	44.52	40.00	-35.85	48.67	74.00	25.33	PK	Vertical
6	17761.500	38.95	41.47	-29.92	50.50	74.00	23.50	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	10765.500	34.76	40.00	-35.85	38.91	54.00	15.09	AV	Vertical
2	17761.500	30.41	41.47	-29.92	41.96	54.00	12.04	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-25 **Tested By:** Zhong Nan
Test Mode: TX BLE 2M 2478MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\13
Memo: Sample number: S26070611-011 Right side

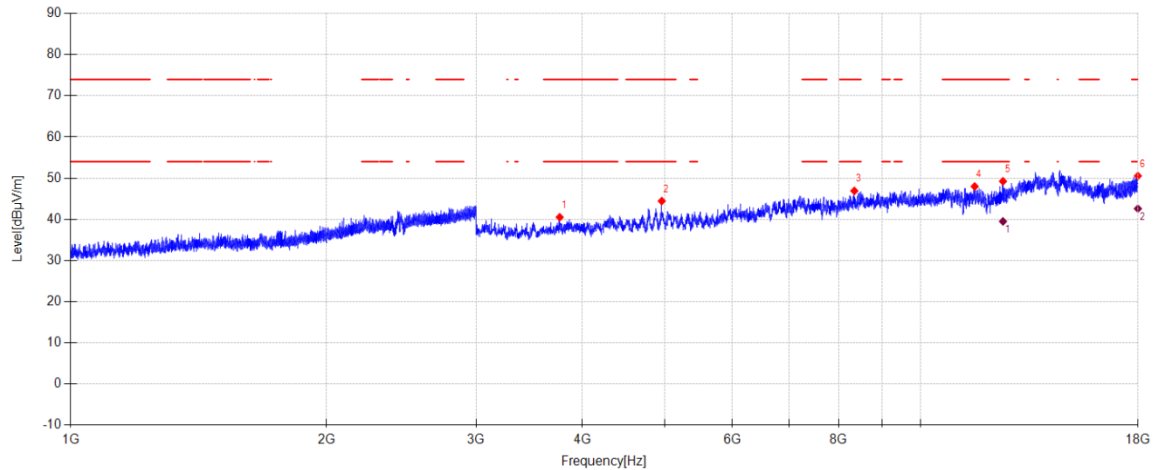**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3760.500	51.18	30.96	-41.66	40.48	74.00	33.52	PK	Horizontal
2	4957.500	52.39	33.73	-41.70	44.42	74.00	29.58	PK	Horizontal
3	8350.500	48.25	38.00	-39.36	46.89	74.00	27.11	PK	Horizontal
4	11566.500	43.60	39.67	-35.31	47.96	74.00	26.04	PK	Horizontal
5	12489.000	43.84	39.79	-34.41	49.22	74.00	24.78	PK	Horizontal
6	17995.500	35.88	42.68	-28.03	50.53	74.00	23.47	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	12489.000	34.08	39.79	-34.41	39.46	54.00	14.54	AV	Horizontal
2	17995.500	27.91	42.68	-28.03	42.56	54.00	11.44	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-25 **Tested By:** Zhong Nan
Test Mode: TX BLE 2M 2478MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\14
Memo: Sample number: S26070611-011 Right side

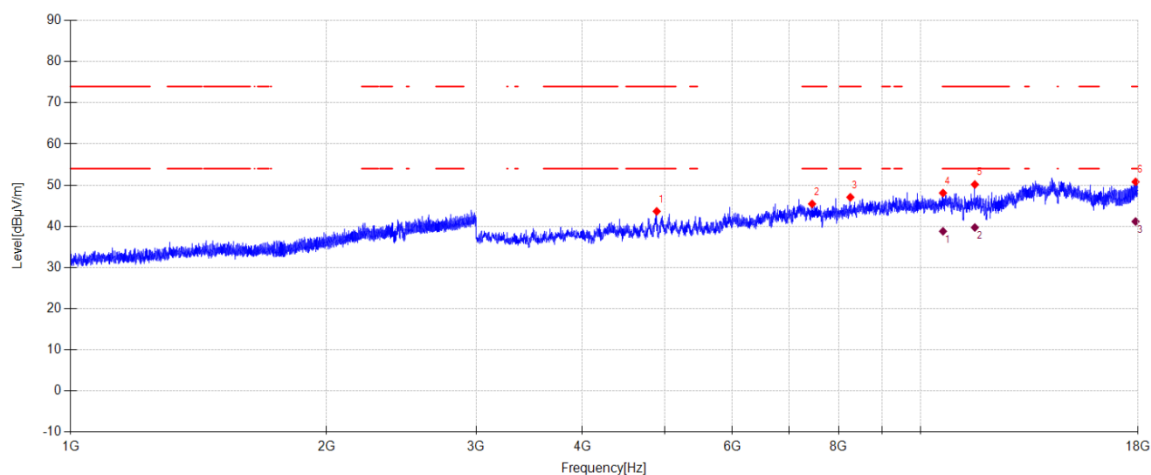

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4890.000	51.71	33.48	-41.58	43.61	74.00	30.39	PK	Vertical
2	7447.500	48.40	37.11	-40.09	45.42	74.00	28.58	PK	Vertical
3	8260.500	48.37	37.92	-39.25	47.04	74.00	26.96	PK	Vertical
4	10617.000	43.99	39.83	-35.75	48.07	74.00	25.93	PK	Vertical
5	11572.500	45.78	39.66	-35.29	50.15	74.00	23.85	PK	Vertical
6	17883.000	38.10	42.20	-29.52	50.78	74.00	23.22	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	10617.000	34.68	39.83	-35.75	38.76	54.00	15.24	AV	Vertical
2	11572.500	35.31	39.66	-35.29	39.68	54.00	14.32	AV	Vertical
3	17883.000	28.46	42.20	-29.52	41.14	54.00	12.86	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-27 **Tested By:** Liang Rijing
Test Mode: TX BLE 1M 2402MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\43
Memo: Sample number: S26070611-011 Left side

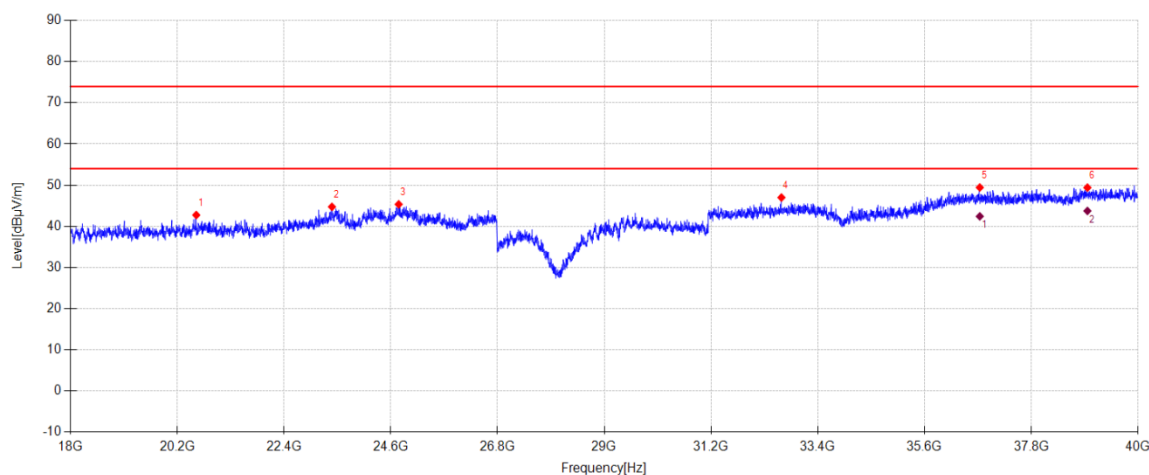

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	20591.869	50.78	38.28	3.82	42.71	74.00	31.29	PK	Horizontal
2	23387.865	51.77	39.22	4.66	44.71	74.00	29.29	PK	Horizontal
3	24763.033	51.05	39.48	4.70	45.32	74.00	28.68	PK	Horizontal
4	32651.447	48.21	41.46	5.21	46.97	74.00	27.03	PK	Horizontal
5	36739.348	49.58	42.87	6.25	49.41	74.00	24.59	PK	Horizontal
6	38957.881	46.94	45.82	6.52	49.38	74.00	24.62	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36739.348	42.56	42.87	6.25	42.39	54.00	11.61	AV	Horizontal
2	38957.881	41.27	45.82	6.52	43.71	54.00	10.29	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-27 **Tested By:** Liang Rijing
Test Mode: TX BLE 1M 2402MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\44
Memo: Sample number: S26070611-011 Left side

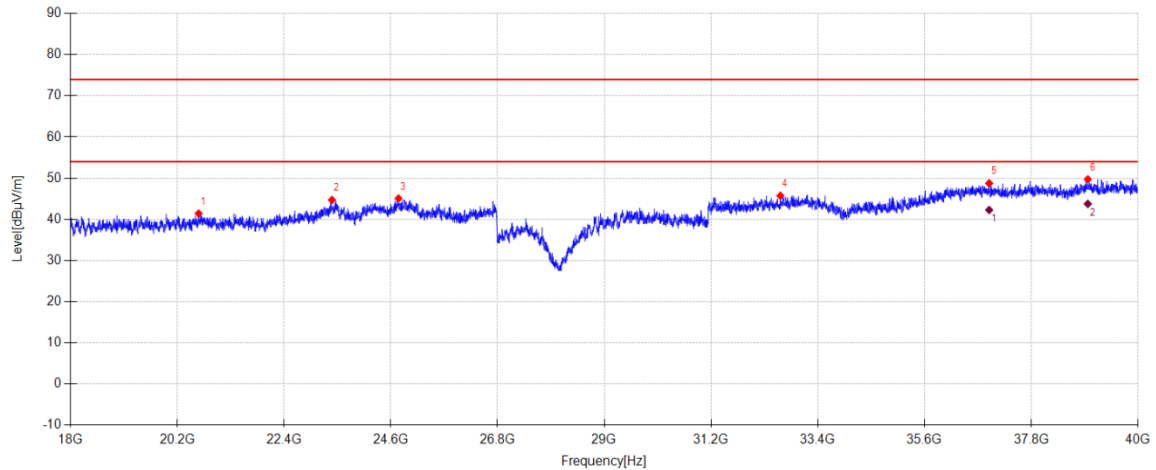

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	20640.215	49.50	38.29	3.80	41.37	74.00	32.63	PK	Vertical
2	23387.865	51.74	39.22	4.66	44.68	74.00	29.32	PK	Vertical
3	24760.347	50.77	39.48	4.70	45.04	74.00	28.96	PK	Vertical
4	32629.960	46.96	41.45	5.20	45.71	74.00	28.29	PK	Vertical
5	36932.731	49.06	42.89	6.10	48.72	74.00	25.28	PK	Vertical
6	38965.938	47.24	45.83	6.54	49.70	74.00	24.30	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36932.731	42.58	42.89	6.10	42.24	54.00	11.76	AV	Vertical
2	38965.938	41.26	45.83	6.54	43.72	54.00	10.28	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-27 **Tested By:** Liang Rijing
Test Mode: TX BLE 1M 2440MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\45
Memo: Sample number: S26070611-011 Left side

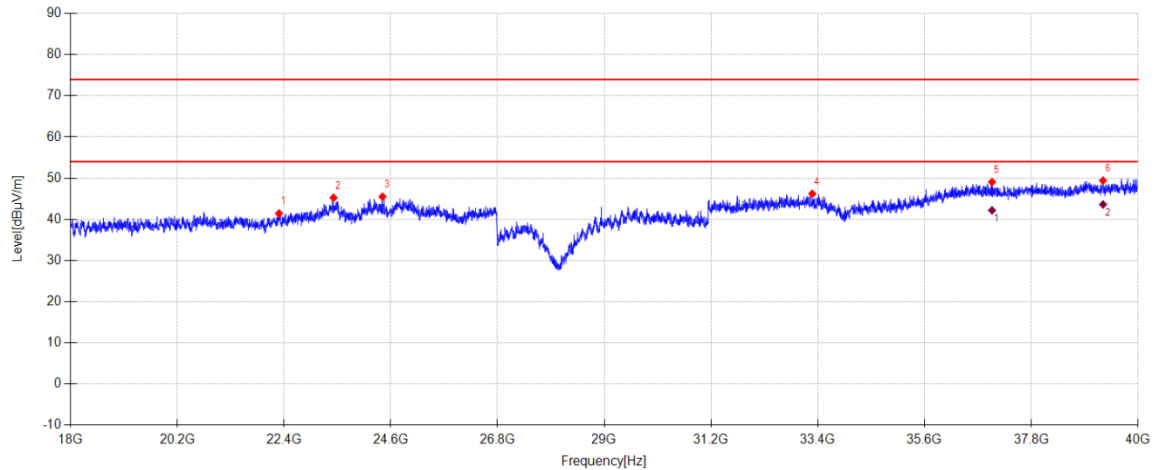**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	22297.400	49.78	38.74	4.17	41.39	74.00	32.61	PK	Horizontal
2	23420.095	52.22	39.22	4.67	45.22	74.00	28.78	PK	Horizontal
3	24429.984	51.56	39.31	4.62	45.48	74.00	28.52	PK	Horizontal
4	33287.999	47.47	41.72	5.46	46.19	74.00	27.81	PK	Horizontal
5	36991.820	49.44	42.90	6.05	49.05	74.00	24.95	PK	Horizontal
6	39280.186	47.02	46.12	6.62	49.40	74.00	24.60	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36991.820	42.53	42.90	6.05	42.14	54.00	11.86	AV	Horizontal
2	39280.186	41.20	46.12	6.62	43.58	54.00	10.42	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-27 **Tested By:** Liang Rijing
Test Mode: TX BLE 1M 2440MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\46
Memo: Sample number: S26070611-011 Left side

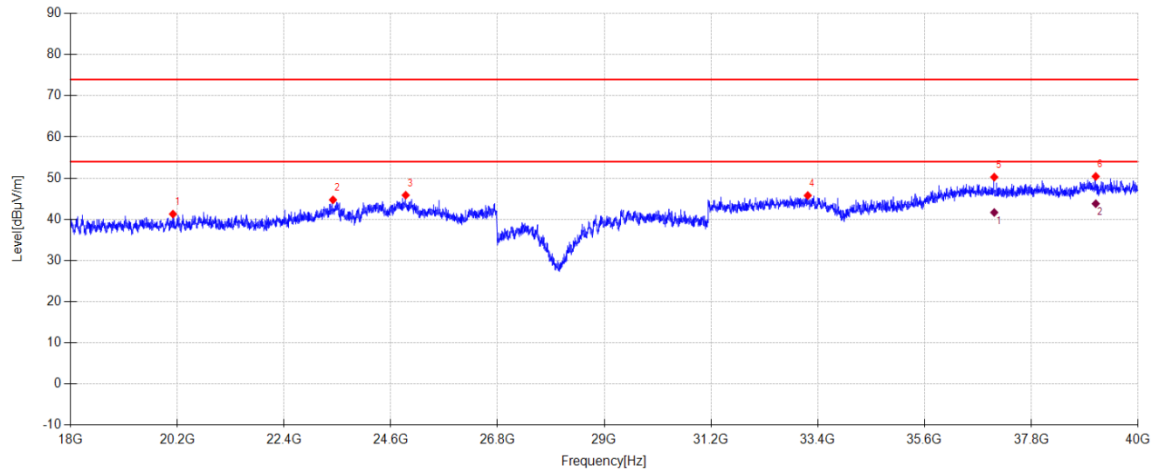**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	20111.098	49.13	38.13	3.73	41.25	74.00	32.75	PK	Vertical
2	23409.352	51.73	39.22	4.67	44.71	74.00	29.29	PK	Vertical
3	24908.070	51.43	39.55	4.73	45.84	74.00	28.16	PK	Vertical
4	33193.993	46.94	41.68	5.43	45.76	74.00	28.24	PK	Vertical
5	37037.480	50.66	42.94	5.97	50.24	74.00	23.76	PK	Vertical
6	39129.777	47.92	46.00	6.61	50.40	74.00	23.60	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	37037.480	42.06	42.94	5.97	41.64	54.00	12.36	AV	Vertical
2	39129.777	41.29	46.00	6.61	43.77	54.00	10.23	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-27 **Tested By:** Liang Rijing
Test Mode: TX BLE 1M 2480MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\47
Memo: Sample number: S26070611-011 Left side

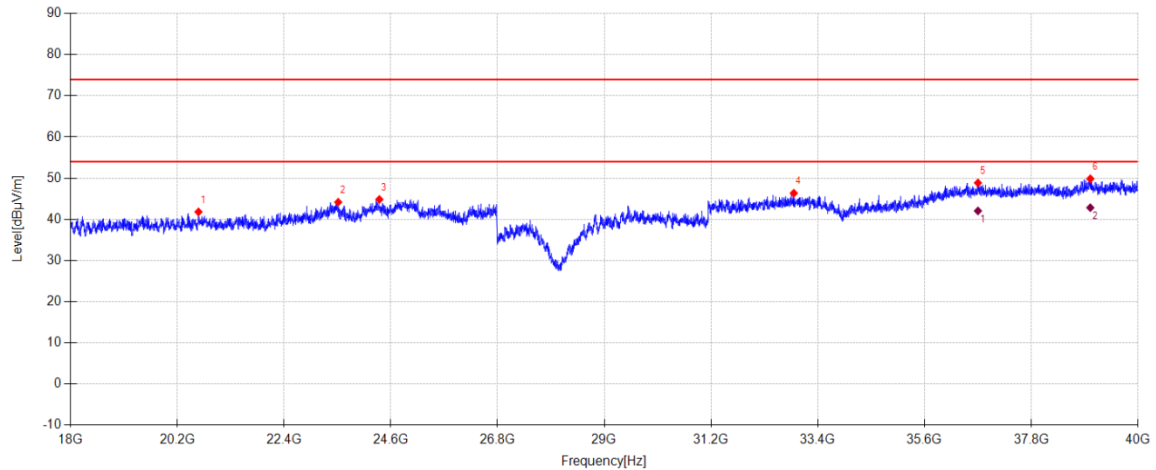

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	20637.529	49.89	38.29	3.80	41.77	74.00	32.23	PK	Horizontal
2	23516.787	51.02	39.20	4.69	44.14	74.00	29.86	PK	Horizontal
3	24365.523	50.96	39.28	4.60	44.81	74.00	29.19	PK	Horizontal
4	32906.605	47.38	41.56	5.32	46.33	74.00	27.67	PK	Horizontal
5	36701.746	48.96	42.87	6.28	48.83	74.00	25.17	PK	Horizontal
6	39016.970	47.31	45.91	6.59	49.84	74.00	24.16	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36701.746	42.15	42.87	6.28	42.02	54.00	11.98	AV	Horizontal
2	39016.970	40.27	45.91	6.59	42.80	54.00	11.20	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-27 **Tested By:** Liang Rijing
Test Mode: TX BLE 1M 2480MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\48
Memo: Sample number: S26070611-011 Left side

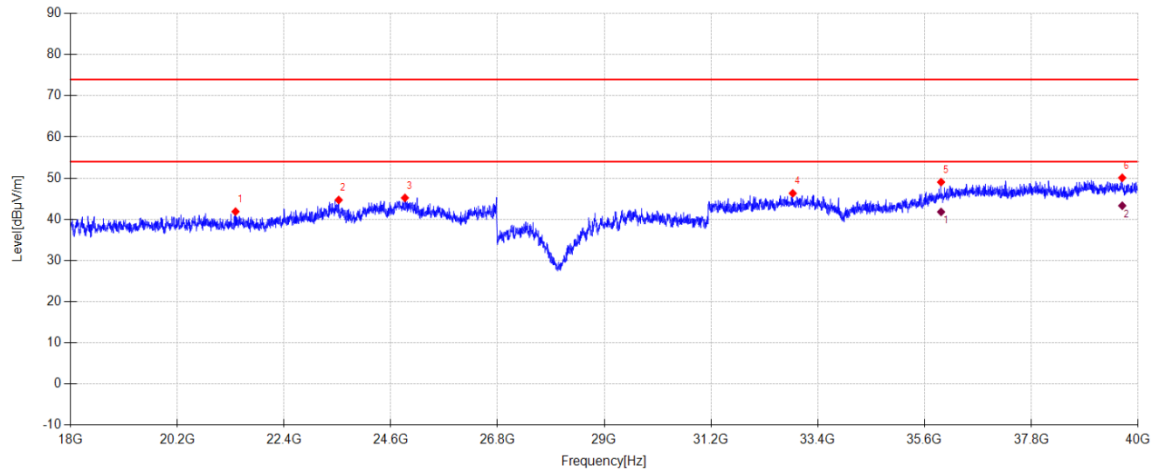

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	21400.317	50.38	38.44	3.85	41.85	74.00	32.15	PK	Vertical
2	23527.530	51.54	39.19	4.69	44.67	74.00	29.33	PK	Vertical
3	24891.955	50.77	39.55	4.73	45.18	74.00	28.82	PK	Vertical
4	32885.118	47.36	41.55	5.31	46.29	74.00	27.71	PK	Vertical
5	35941.643	49.76	42.76	5.70	49.02	74.00	24.98	PK	Vertical
6	39675.009	48.06	46.44	6.52	50.07	74.00	23.93	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	35941.643	42.51	42.76	5.70	41.77	54.00	12.23	AV	Vertical
2	39675.009	41.27	46.44	6.52	43.28	54.00	10.72	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-27 **Tested By:** Liang Rijing
Test Mode: TX BLE 2M 2404MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\49
Memo: Sample number: S26070611-011 Left side

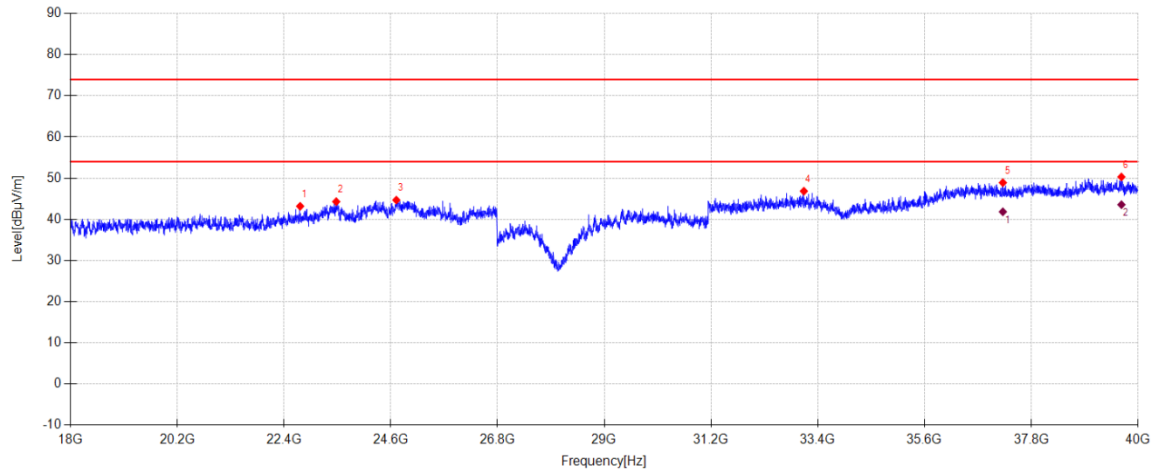**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	22732.511	51.14	39.09	4.31	43.15	74.00	30.85	PK	Horizontal
2	23476.499	51.20	39.20	4.69	44.27	74.00	29.73	PK	Horizontal
3	24714.687	50.43	39.46	4.69	44.65	74.00	29.35	PK	Horizontal
4	33113.417	47.91	41.65	5.40	46.82	74.00	27.18	PK	Horizontal
5	37214.748	49.43	43.11	5.62	48.88	74.00	25.12	PK	Horizontal
6	39658.894	48.25	46.43	6.53	50.28	74.00	23.72	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	37214.748	42.35	43.11	5.62	41.80	54.00	12.20	AV	Horizontal
2	39658.894	41.51	46.43	6.53	43.54	54.00	10.46	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-27 **Tested By:** Liang Rijing
Test Mode: TX BLE 2M 2404MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\50
Memo: Sample number: S26070611-011 Left side

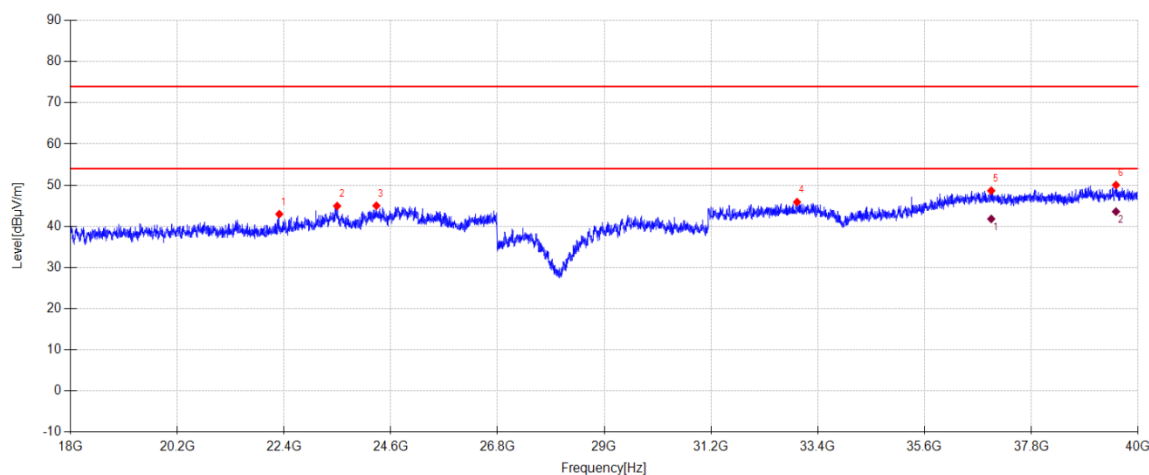**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	22302.771	51.32	38.74	4.17	42.93	74.00	31.07	PK	Vertical
2	23495.300	51.81	39.20	4.70	44.91	74.00	29.09	PK	Vertical
3	24303.748	51.21	39.25	4.58	44.99	74.00	29.01	PK	Vertical
4	32973.752	46.87	41.59	5.35	45.87	74.00	28.13	PK	Vertical
5	36975.705	49.01	42.90	6.06	48.63	74.00	25.37	PK	Vertical
6	39546.087	47.82	46.34	6.61	50.01	74.00	23.99	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36975.705	42.15	42.90	6.06	41.77	54.00	12.23	AV	Vertical
2	39546.087	41.36	46.34	6.61	43.55	54.00	10.45	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-27 **Tested By:** Liang Rijing
Test Mode: TX BLE 2M 2440MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\51
Memo: Sample number: S26070611-011 Left side

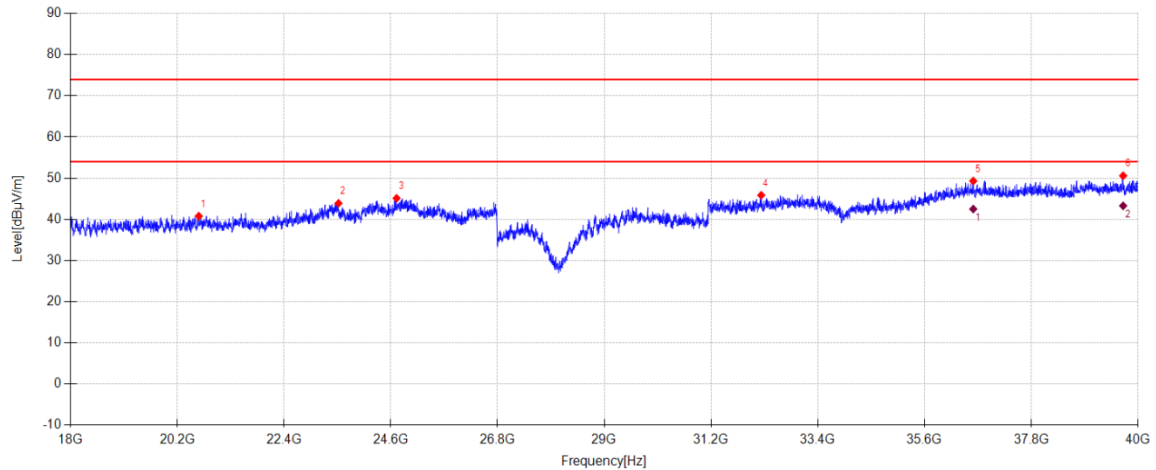**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	20642.901	48.87	38.29	3.80	40.74	74.00	33.26	PK	Horizontal
2	23522.158	50.73	39.20	4.69	43.86	74.00	30.14	PK	Horizontal
3	24720.059	50.87	39.46	4.69	45.10	74.00	28.90	PK	Horizontal
4	32235.136	47.13	41.29	5.27	45.83	74.00	28.17	PK	Horizontal
5	36605.054	49.33	42.86	6.36	49.29	74.00	24.71	PK	Horizontal
6	39693.810	48.59	46.46	6.50	50.57	74.00	23.43	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36605.054	42.51	42.86	6.36	42.47	54.00	11.53	AV	Horizontal
2	39693.810	41.27	46.46	6.50	43.25	54.00	10.75	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-27 **Tested By:** Liang Rijing
Test Mode: TX BLE 2M 2440MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\52
Memo: Sample number: S26070611-011 Left side

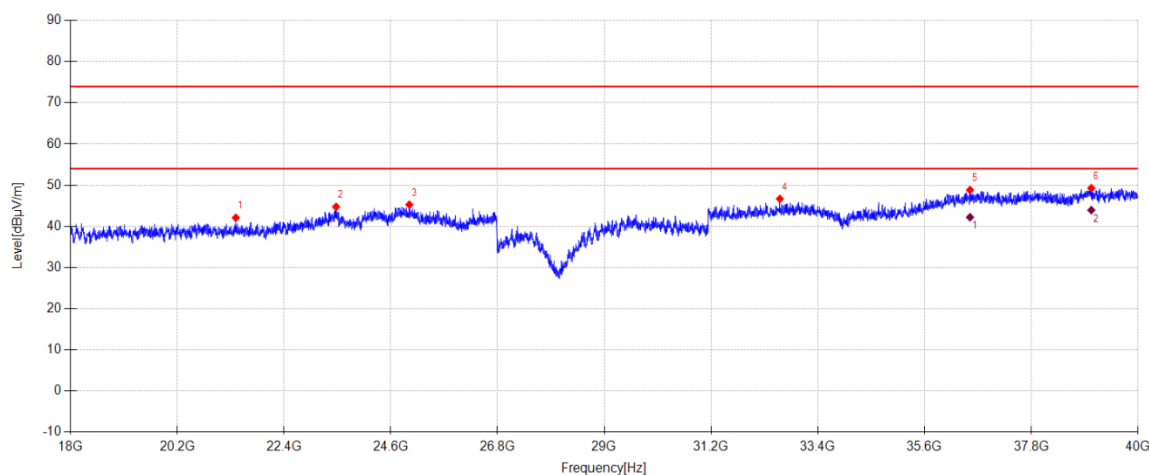**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	21405.689	50.59	38.44	3.85	42.06	74.00	31.94	PK	Vertical
2	23473.813	51.64	39.21	4.69	44.72	74.00	29.28	PK	Vertical
3	24983.274	50.75	39.59	4.75	45.24	74.00	28.76	PK	Vertical
4	32619.216	47.89	41.45	5.20	46.64	74.00	27.36	PK	Vertical
5	36537.907	48.78	42.85	6.42	48.80	74.00	25.20	PK	Vertical
6	39038.457	46.73	45.93	6.59	49.25	74.00	24.75	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36537.907	42.15	42.85	6.42	42.17	54.00	11.83	AV	Vertical
2	39038.457	41.38	45.93	6.59	43.90	54.00	10.10	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-27 **Tested By:** Liang Rijing
Test Mode: TX BLE 2M 2478MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\53
Memo: Sample number: S26070611-011 Left side

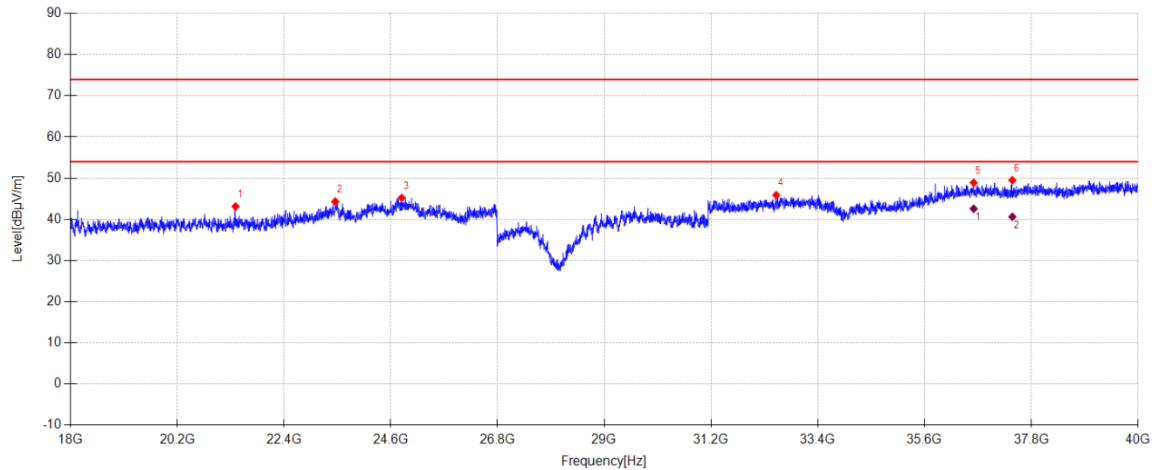

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	21400.317	51.62	38.44	3.85	43.09	74.00	30.91	PK	Horizontal
2	23455.012	51.26	39.21	4.68	44.30	74.00	29.70	PK	Horizontal
3	24824.808	50.85	39.51	4.71	45.18	74.00	28.82	PK	Horizontal
4	32544.012	47.17	41.42	5.17	45.87	74.00	28.13	PK	Horizontal
5	36613.112	48.89	42.86	6.36	48.85	74.00	25.15	PK	Horizontal
6	37410.817	50.17	43.31	5.23	49.49	74.00	24.51	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36613.112	42.58	42.86	6.36	42.54	54.00	11.46	AV	Horizontal
2	37410.817	41.26	43.31	5.23	40.58	54.00	13.42	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-27 **Tested By:** Liang Rijing
Test Mode: TX BLE 2M 2478MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\54
Memo: Sample number: S26070611-011 Left side

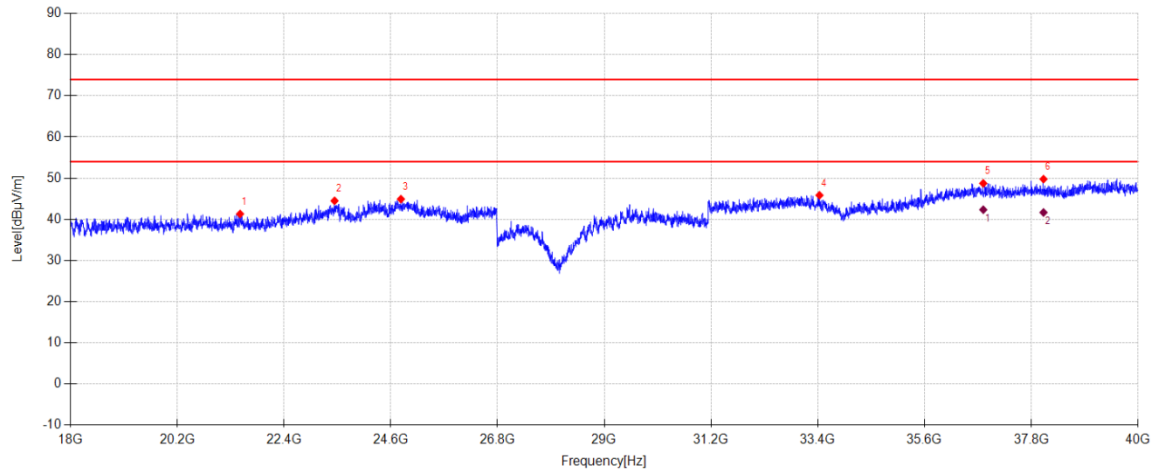**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	21494.323	49.81	38.45	3.90	41.27	74.00	32.73	PK	Vertical
2	23441.582	51.45	39.21	4.68	44.47	74.00	29.53	PK	Vertical
3	24808.692	50.57	39.50	4.71	44.88	74.00	29.12	PK	Vertical
4	33435.722	47.26	41.77	5.51	45.82	74.00	28.18	PK	Vertical
5	36811.867	48.95	42.88	6.19	48.72	74.00	25.28	PK	Vertical
6	38052.741	49.19	44.01	5.64	49.75	74.00	24.25	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36811.867	42.53	42.88	6.19	42.30	54.00	11.70	AV	Vertical
2	38052.741	41.08	44.01	5.64	41.64	54.00	12.36	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-27 **Tested By:** Liang Rijing
Test Mode: TX BLE 1M 2402MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\61
Memo: Sample number: S26070611-011 Right side

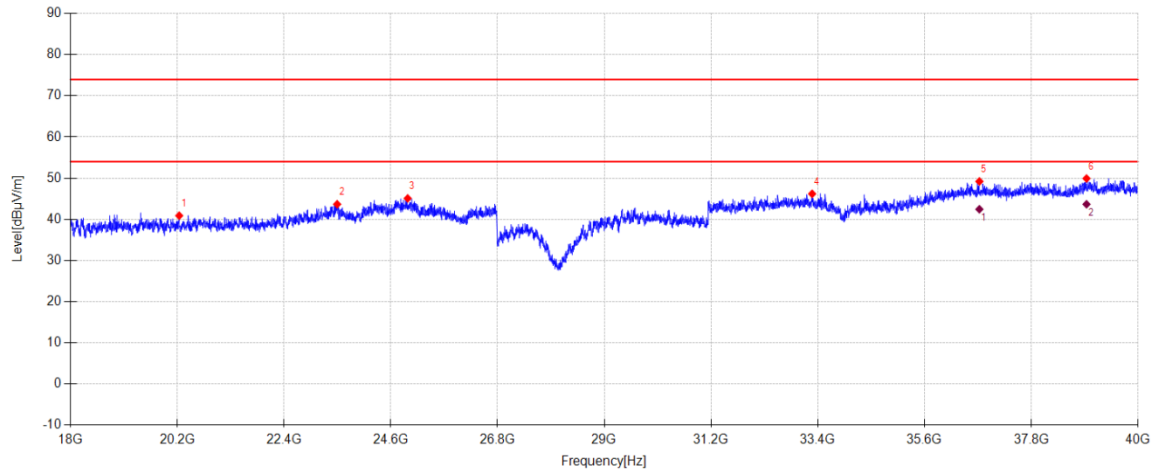**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	20240.020	48.78	38.17	3.77	40.86	74.00	33.14	PK	Horizontal
2	23495.300	50.54	39.20	4.70	43.64	74.00	30.36	PK	Horizontal
3	24948.358	50.61	39.57	4.74	45.06	74.00	28.94	PK	Horizontal
4	33285.313	47.45	41.71	5.46	46.17	74.00	27.83	PK	Horizontal
5	36731.290	49.35	42.87	6.26	49.19	74.00	24.81	PK	Horizontal
6	38939.079	47.53	45.78	6.49	49.91	74.00	24.09	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36731.290	42.58	42.87	6.26	42.42	54.00	11.58	AV	Horizontal
2	38939.079	41.26	45.78	6.49	43.64	54.00	10.36	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-27 **Tested By:** Liang Rijing
Test Mode: TX BLE 1M 2402MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\62
Memo: Sample number: S26070611-011 Right side

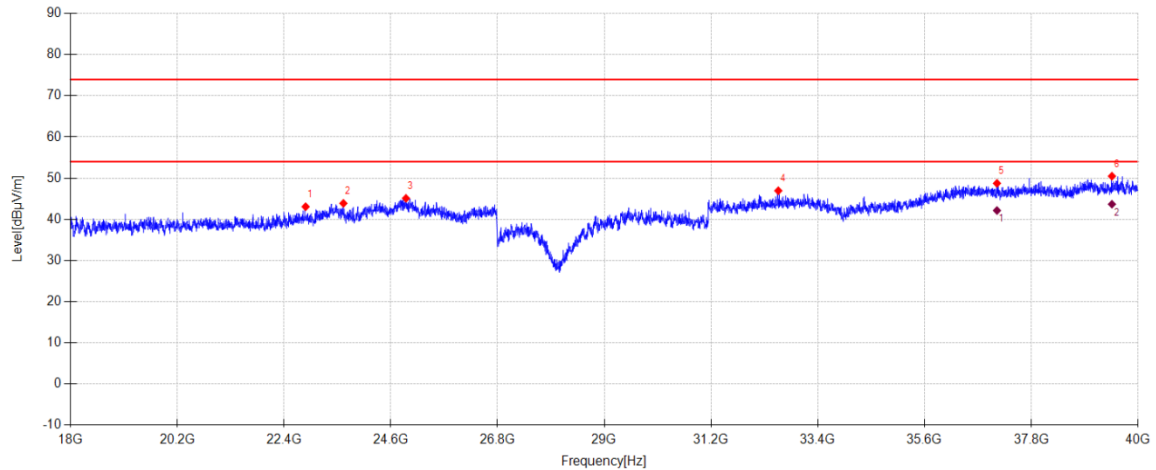**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	22845.318	50.87	39.18	4.40	43.04	74.00	30.96	PK	Vertical
2	23624.222	50.65	39.18	4.65	43.85	74.00	30.15	PK	Vertical
3	24913.442	50.66	39.56	4.73	45.08	74.00	28.92	PK	Vertical
4	32586.986	48.20	41.43	5.19	46.92	74.00	27.08	PK	Vertical
5	37093.884	49.19	42.99	5.86	48.73	74.00	25.27	PK	Vertical
6	39462.825	48.18	46.27	6.65	50.47	74.00	23.53	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	37093.884	42.57	42.99	5.86	42.11	54.00	11.89	AV	Vertical
2	39462.825	41.36	46.27	6.65	43.65	54.00	10.35	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-27 **Tested By:** Liang Rijing
Test Mode: TX BLE 1M 2440MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\63
Memo: Sample number: S26070611-011 Right side

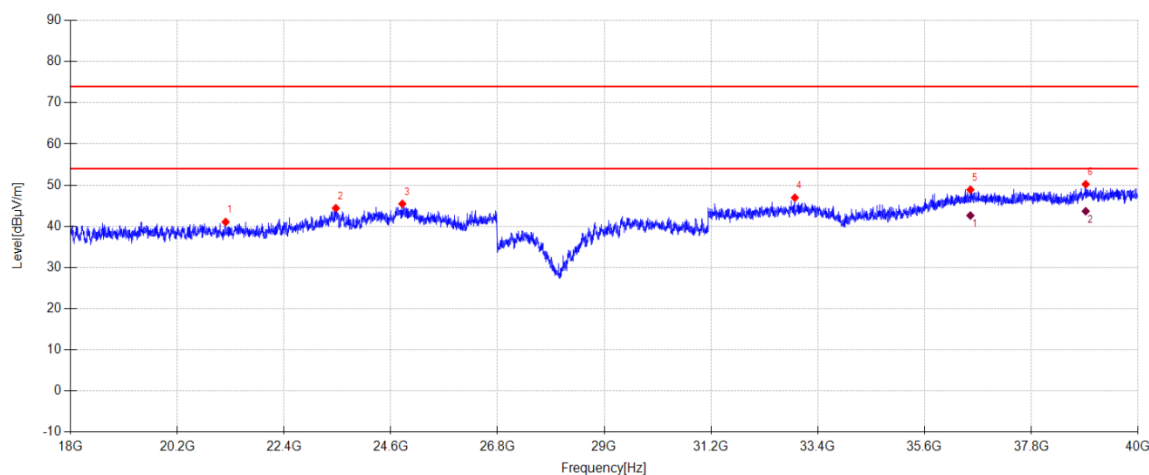**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	21196.191	49.54	38.42	3.75	41.03	74.00	32.97	PK	Horizontal
2	23468.441	51.31	39.21	4.69	44.38	74.00	29.62	PK	Horizontal
3	24838.237	51.10	39.52	4.71	45.44	74.00	28.56	PK	Horizontal
4	32928.092	47.96	41.57	5.33	46.93	74.00	27.07	PK	Horizontal
5	36545.965	48.87	42.85	6.41	48.88	74.00	25.12	PK	Horizontal
6	38922.964	47.85	45.75	6.47	50.20	74.00	23.80	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36545.965	42.58	42.85	6.41	42.59	54.00	11.41	AV	Horizontal
2	38922.964	41.29	45.75	6.47	43.64	54.00	10.36	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-27 **Tested By:** Liang Rijing
Test Mode: TX BLE 1M 2440MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\64
Memo: Sample number: S26070611-011 Right side

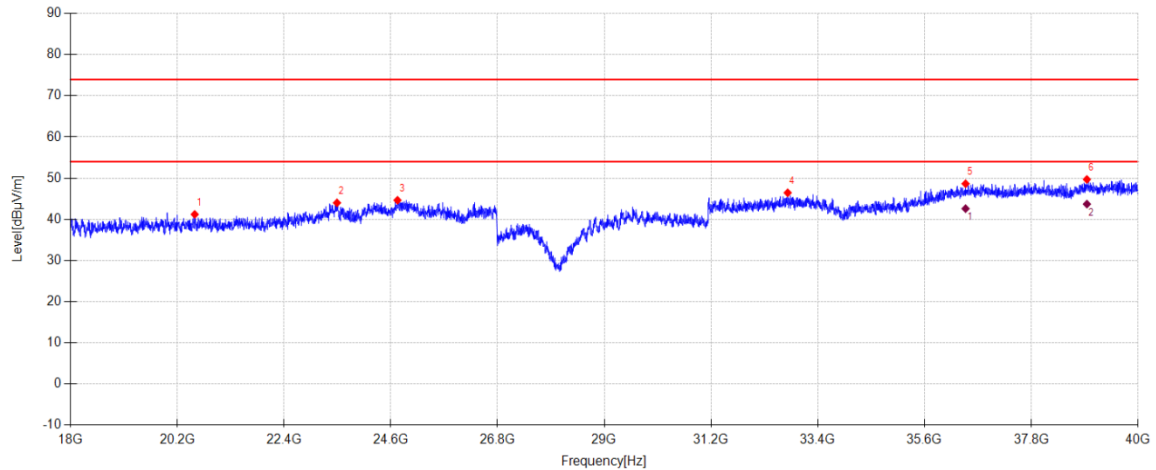**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	20559.639	49.20	38.27	3.84	41.17	74.00	32.83	PK	Vertical
2	23492.614	50.88	39.20	4.70	43.98	74.00	30.02	PK	Vertical
3	24738.860	50.37	39.47	4.69	44.61	74.00	29.39	PK	Vertical
4	32780.369	47.57	41.51	5.27	46.43	74.00	27.57	PK	Vertical
5	36446.588	48.65	42.84	6.37	48.63	74.00	25.37	PK	Vertical
6	38947.137	47.27	45.79	6.51	49.68	74.00	24.32	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36446.588	42.58	42.84	6.37	42.56	54.00	11.44	AV	Vertical
2	38947.137	41.26	45.79	6.51	43.67	54.00	10.33	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-27 **Tested By:** Liang Rijing
Test Mode: TX BLE 1M 2480MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\65
Memo: Sample number: S26070611-011 Right side

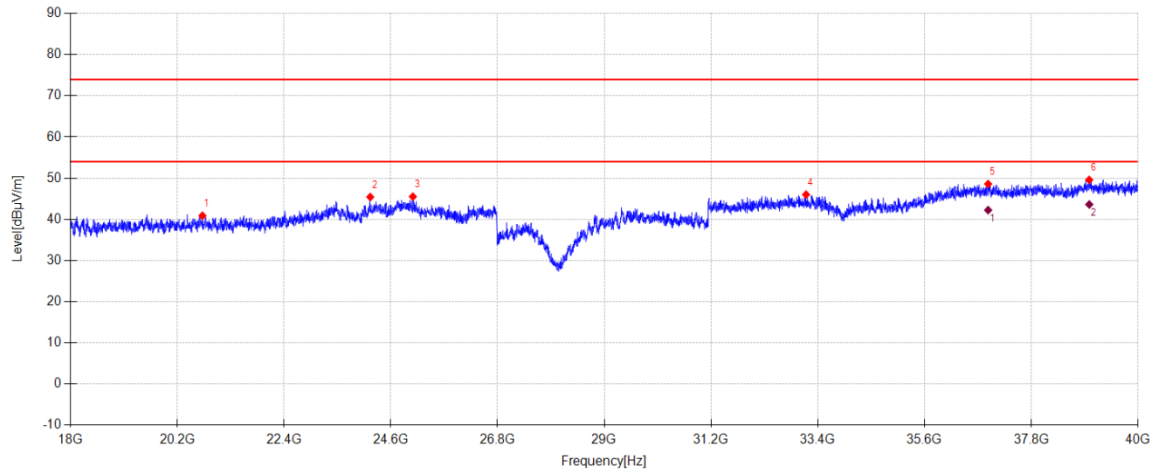**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	20718.105	49.03	38.32	3.77	40.83	74.00	33.17	PK	Horizontal
2	24177.512	51.76	39.19	4.54	45.40	74.00	28.60	PK	Horizontal
3	25055.793	50.99	39.58	4.76	45.48	74.00	28.52	PK	Horizontal
4	33159.077	47.14	41.66	5.41	45.98	74.00	28.02	PK	Horizontal
5	36911.244	48.89	42.89	6.11	48.57	74.00	25.43	PK	Horizontal
6	38995.483	47.03	45.89	6.58	49.56	74.00	24.44	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36911.244	42.53	42.89	6.11	42.21	54.00	11.79	AV	Horizontal
2	38995.483	41.05	45.89	6.58	43.58	54.00	10.42	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-27 **Tested By:** Liang Rijing
Test Mode: TX BLE 1M 2480MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\66
Memo: Sample number: S26070611-011 Right side

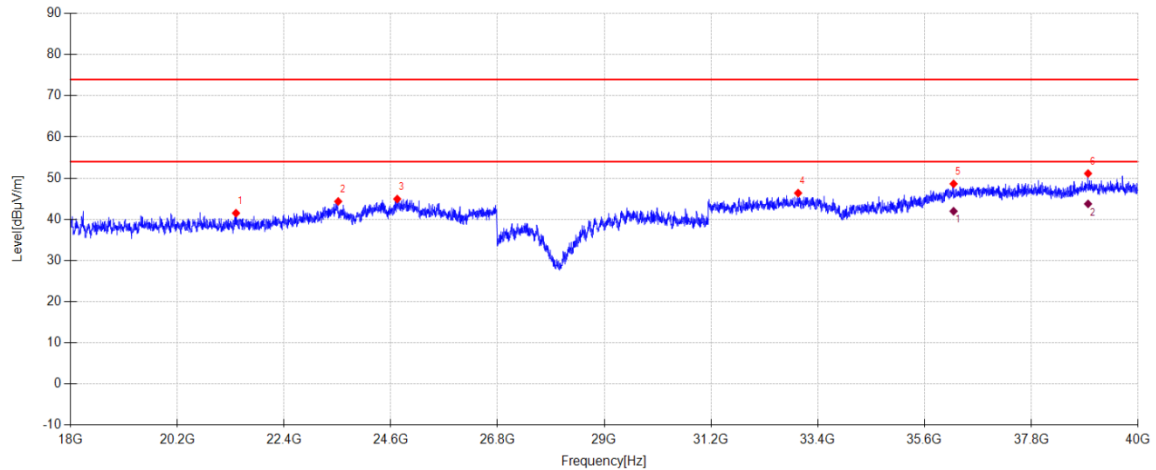**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	21411.061	50.00	38.44	3.86	41.47	74.00	32.53	PK	Vertical
2	23516.787	51.21	39.20	4.69	44.33	74.00	29.67	PK	Vertical
3	24733.488	50.67	39.47	4.69	44.91	74.00	29.09	PK	Vertical
4	32995.239	47.33	41.60	5.36	46.35	74.00	27.65	PK	Vertical
5	36199.487	48.95	42.82	6.02	48.61	74.00	25.39	PK	Vertical
6	38971.310	48.65	45.84	6.54	51.12	74.00	22.88	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36199.487	42.28	42.82	6.02	41.94	54.00	12.06	AV	Vertical
2	38971.310	41.26	45.84	6.54	43.73	54.00	10.27	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-27 **Tested By:** Liang Rijing
Test Mode: TX BLE 2M 2404MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\59
Memo: Sample number: S26070611-011 Right side

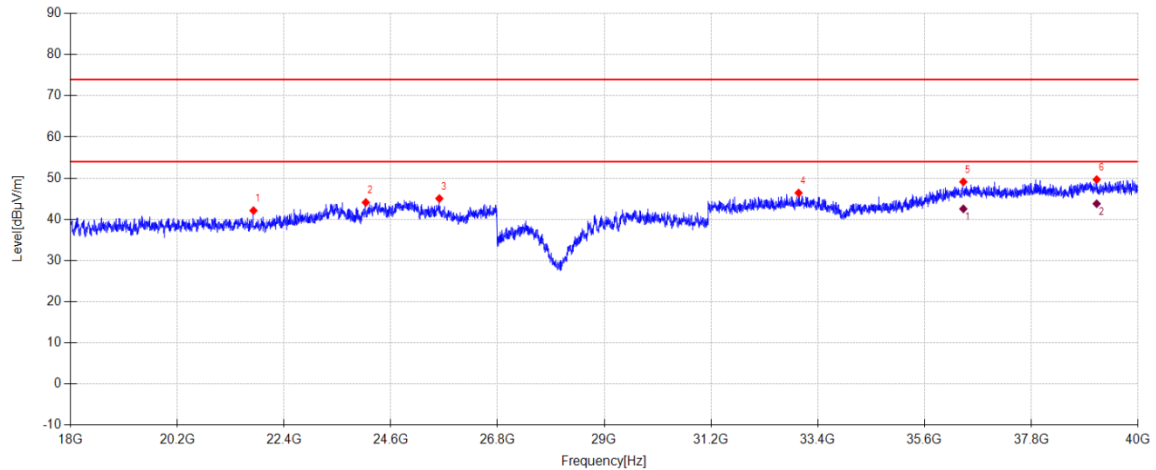**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	21770.968	50.62	38.48	4.07	42.09	74.00	31.91	PK	Horizontal
2	24086.192	50.53	39.14	4.51	44.07	74.00	29.93	PK	Horizontal
3	25601.026	50.70	39.42	4.87	45.03	74.00	28.97	PK	Horizontal
4	33005.982	47.37	41.60	5.36	46.38	74.00	27.62	PK	Horizontal
5	36400.928	49.16	42.84	6.31	49.09	74.00	24.91	PK	Horizontal
6	39148.578	47.18	46.02	6.61	49.65	74.00	24.35	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36400.928	42.58	42.84	6.31	42.51	54.00	11.49	AV	Horizontal
2	39148.578	41.29	46.02	6.61	43.76	54.00	10.24	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-27 **Tested By:** Liang Rijing
Test Mode: TX BLE 2M 2404MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\60
Memo: Sample number: S26070611-011 Right side

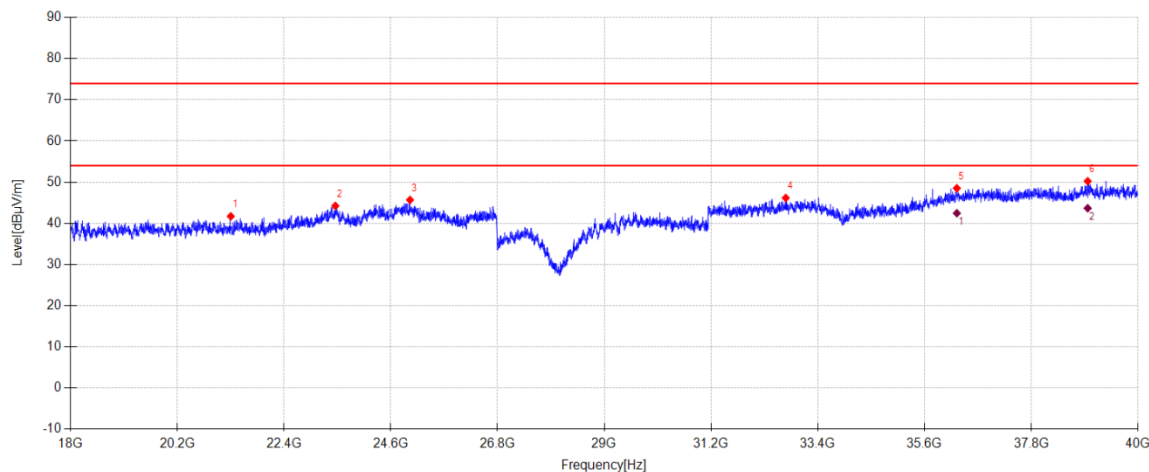

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	21303.626	50.19	38.43	3.81	41.68	74.00	32.32	PK	Vertical
2	23457.697	51.16	39.21	4.68	44.21	74.00	29.79	PK	Vertical
3	24996.704	51.15	39.60	4.75	45.66	74.00	28.34	PK	Vertical
4	32740.081	47.30	41.50	5.25	46.14	74.00	27.86	PK	Vertical
5	36266.634	48.75	42.83	6.11	48.50	74.00	25.50	PK	Vertical
6	38963.252	47.77	45.83	6.53	50.22	74.00	23.78	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36266.634	42.68	42.83	6.11	42.43	54.00	11.57	AV	Vertical
2	38963.252	41.19	45.83	6.53	43.64	54.00	10.36	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-27 **Tested By:** Liang Rijing
Test Mode: TX BLE 2M 2440MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\57
Memo: Sample number: S26070611-011 Right side

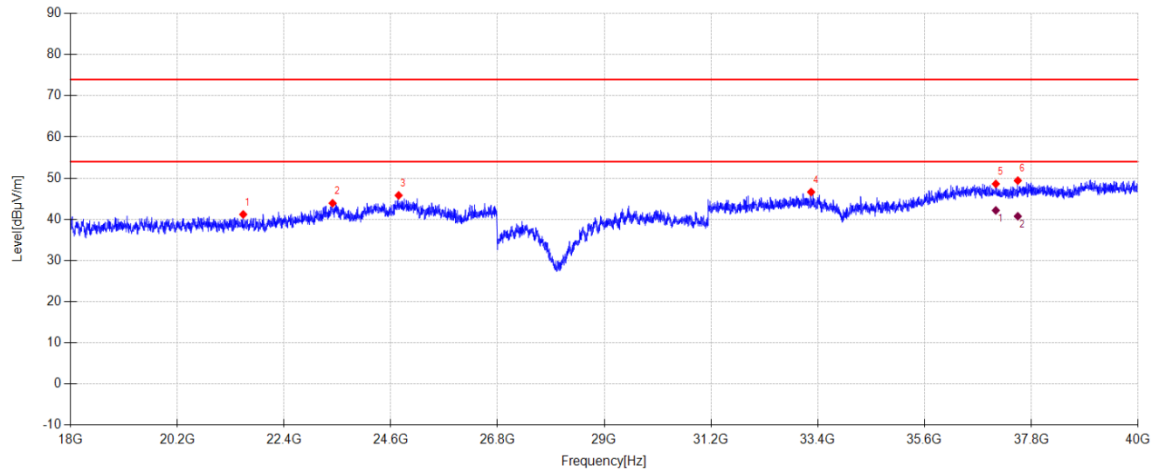

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	21558.784	49.70	38.46	3.94	41.17	74.00	32.83	PK	Horizontal
2	23401.294	50.92	39.22	4.66	43.88	74.00	30.12	PK	Horizontal
3	24763.033	51.52	39.48	4.70	45.79	74.00	28.21	PK	Horizontal
4	33263.826	47.86	41.71	5.45	46.61	74.00	27.39	PK	Horizontal
5	37069.711	49.04	42.97	5.90	48.59	74.00	25.41	PK	Horizontal
6	37523.623	50.06	43.42	5.09	49.39	74.00	24.61	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	37069.711	42.59	42.97	5.90	42.14	54.00	11.86	AV	Horizontal
2	37523.623	41.38	43.42	5.09	40.71	54.00	13.29	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-27 **Tested By:** Liang Rijing
Test Mode: TX BLE 2M 2440MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\58
Memo: Sample number: S26070611-011 Right side

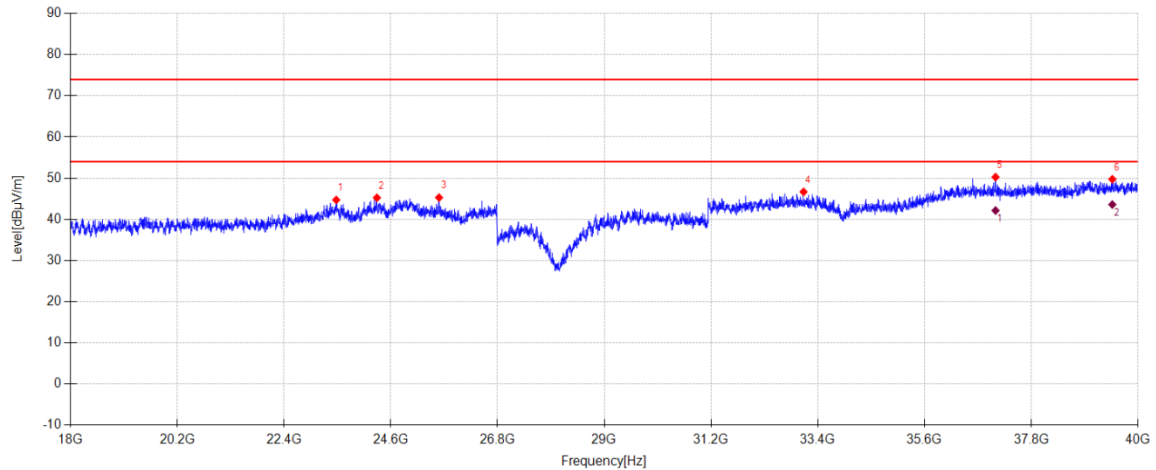**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	23476.499	51.62	39.20	4.69	44.69	74.00	29.31	PK	Vertical
2	24314.492	51.42	39.26	4.58	45.21	74.00	28.79	PK	Vertical
3	25595.654	50.93	39.42	4.87	45.26	74.00	28.74	PK	Vertical
4	33108.045	47.74	41.64	5.40	46.65	74.00	27.35	PK	Vertical
5	37064.339	50.69	42.96	5.91	50.24	74.00	23.76	PK	Vertical
6	39470.883	47.44	46.28	6.65	49.72	74.00	24.28	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	37064.339	42.56	42.96	5.91	42.11	54.00	11.89	AV	Vertical
2	39470.883	41.29	46.28	6.65	43.57	54.00	10.43	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-27 **Tested By:** Liang Rijing
Test Mode: TX BLE 2M 2478MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\55
Memo: Sample number: S26070611-011 Right side

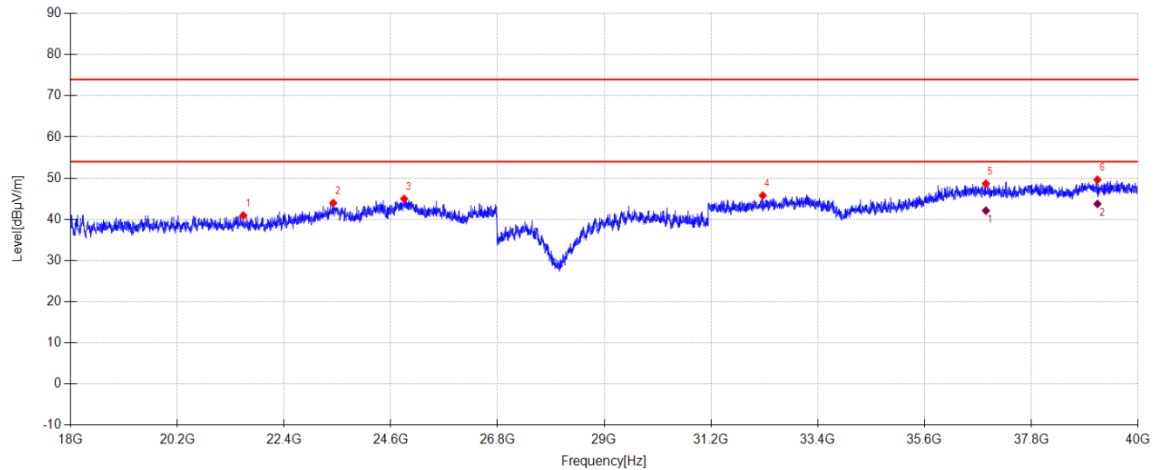

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	21561.470	49.44	38.46	3.94	40.91	74.00	33.09	PK	Horizontal
2	23414.723	50.95	39.22	4.67	43.94	74.00	30.06	PK	Horizontal
3	24875.839	50.58	39.54	4.72	44.96	74.00	29.04	PK	Horizontal
4	32267.367	47.07	41.31	5.25	45.76	74.00	28.24	PK	Horizontal
5	36865.584	48.92	42.89	6.15	48.65	74.00	25.35	PK	Horizontal
6	39164.693	47.14	46.03	6.61	49.59	74.00	24.41	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36865.584	42.35	42.89	6.15	42.08	54.00	11.92	AV	Horizontal
2	39164.693	41.27	46.03	6.61	43.72	54.00	10.28	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-27 **Tested By:** Liang Rijong
Test Mode: TX BLE 2M 2478MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\56
Memo: Sample number: S26070611-011 Right side

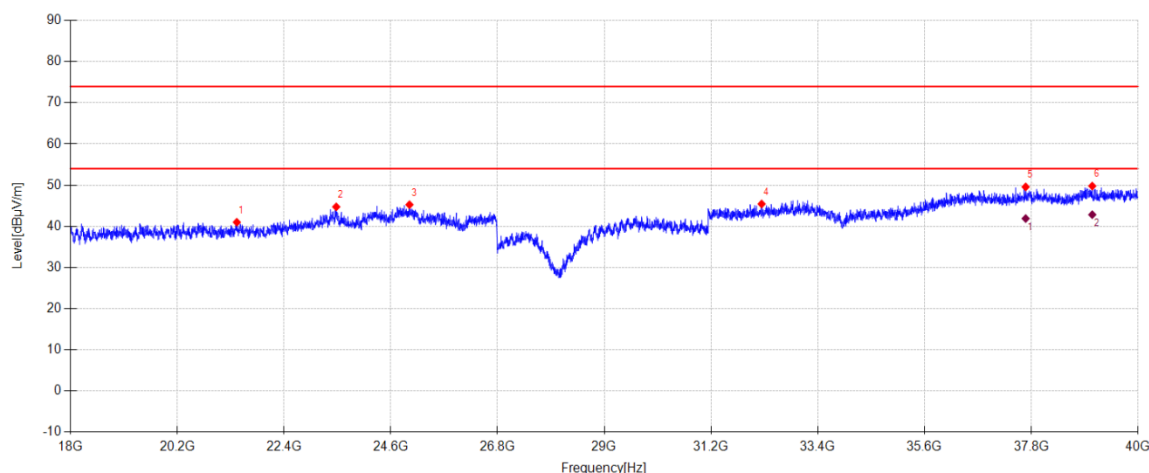

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	21427.176	49.50	38.44	3.87	40.97	74.00	33.03	PK	Vertical
2	23476.499	51.63	39.20	4.69	44.70	74.00	29.30	PK	Vertical
3	24985.960	50.73	39.59	4.75	45.23	74.00	28.77	PK	Vertical
4	32243.194	46.71	41.30	5.26	45.41	74.00	28.59	PK	Vertical
5	37684.776	49.84	43.58	5.27	49.56	74.00	24.44	PK	Vertical
6	39057.258	47.25	45.95	6.60	49.77	74.00	24.23	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	37684.776	42.15	43.58	5.27	41.87	54.00	12.13	AV	Vertical
2	39057.258	40.28	45.95	6.60	42.80	54.00	11.20	AV	Vertical

Note:


1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

13. Band Edge Compliance

13.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
Band Reject Filter Group	Tonscend	JS0806-F	DDT-ZC05733	/
Hochgewinn-Hornantenne	SCHWARZBEC K	BBHA 9120 D	DDT-ZC05922	2027/01/06
Broadband Preamplifier	HPX	BP-01G-18G	DDT-ZC05923	2027/01/06
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2027/03/05
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2027/03/04
Signal & Spectrum analyzer	R&S	FSV40-N	DDT-ZC04979	2027/07/10
SPECTRUM ANALYZER	R&S	FSU26	DDT-ZC00236	2027/06/25
RF Cable	Tonscend	7+1+1+0.5+0.5m	DDT-ZC05978	2027/01/29
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2027/03/04
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2027/02/27
RF cable	Zhongke Junchuang	JCT40P-2.92J-2.92J-1M	DDT-ZC03802	2026/10/10
Radiation disturbance fully automated test software	Tonscend	JS-RE&RSE (V5.0.0)	DDT-ZC06466	/

13.2. Block diagram of test setup

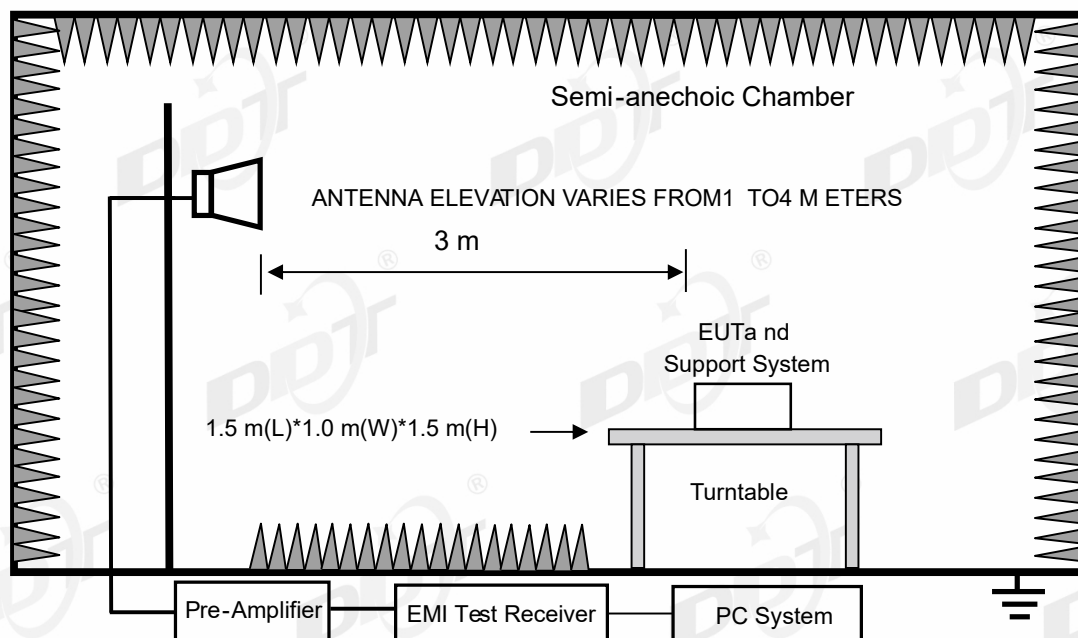

13.3. Limits

All restriction band should comply with 15.209 and RSS-Gen section 8.9 limits, other emission should be at least 20 dB below the fundamental.

13.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

13.5. Test procedure

Same with Radiated Emission except change investigated frequency range.

Remark: All restriction band have been tested, and only the worst case is shown in report.


13.6. Test result

PASS. (See below detailed test result)

13.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-27 **Tested By:** Li Xiongbin
Test Mode: TX BLE 1M 2402MHz Mode **Power Supply:** Battery
Condition: Temp:22.7°C;Humi:49.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE 1G BLE 0724\39
Memo: Sample number: S26070611-011 Left side

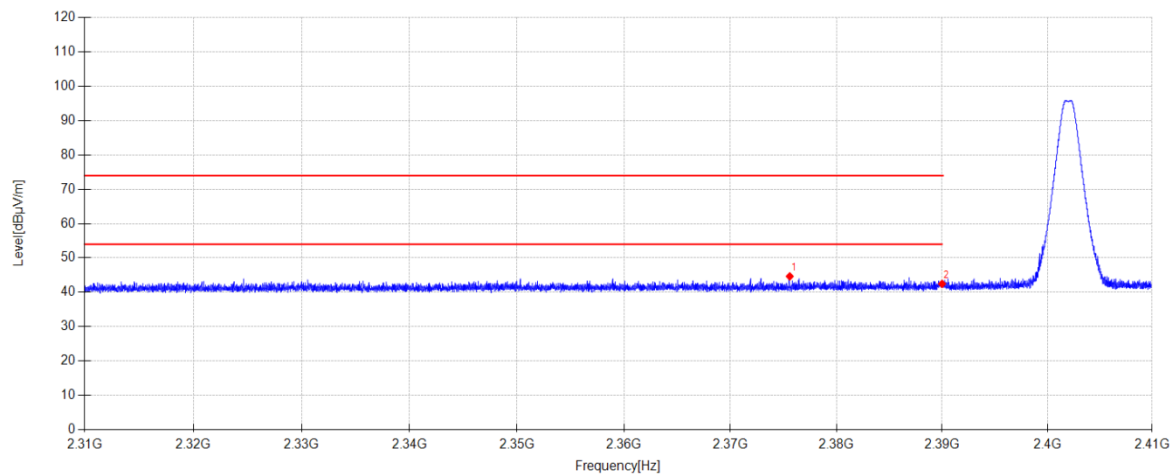

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2375.590	44.66	28.15	-28.17	44.64	74.00	29.36	PK	Horizontal
2	2390.000	42.39	28.18	-28.12	42.45	74.00	31.55	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-27

Tested By:

Li Xiongbín

Test Mode:

TX BLE 1M 2402MHz Mode

Power Supply:

Battery

Condition:

Temp:22.7°C;Humi:49.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\40

Memo:

Sample number: S26070611-011 Left side

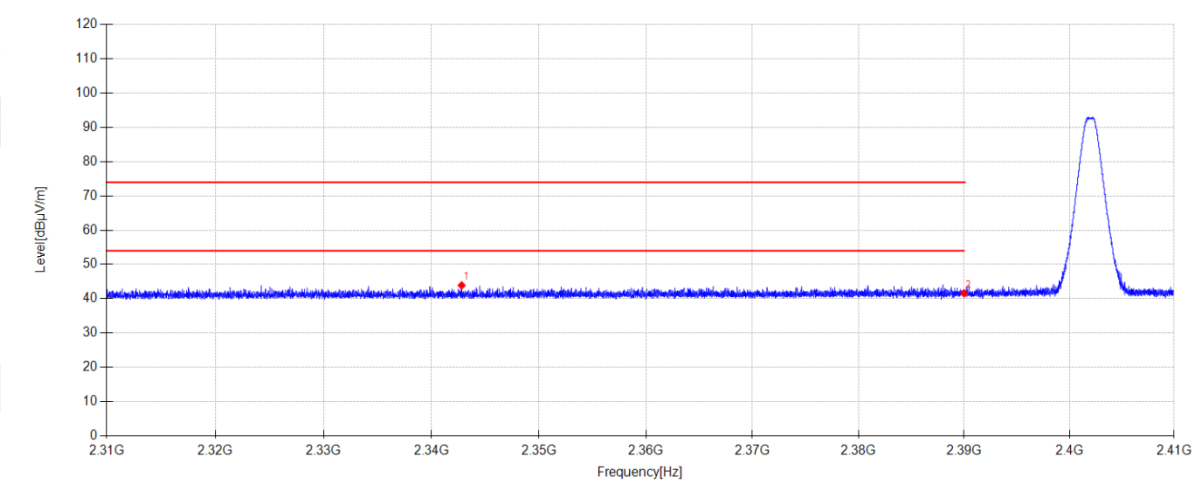

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2342.800	44.08	28.10	-28.29	43.89	74.00	30.11	PK	Vertical
2	2390.000	41.53	28.18	-28.12	41.59	74.00	32.41	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-27

Tested By:

Li Xiongbín

Test Mode:

TX BLE 2M 2404MHz Mode

Power Supply:

Battery

Condition:

Temp:22.7°C;Humi:49.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\41

Memo:

Sample number: S26070611-011 Left side

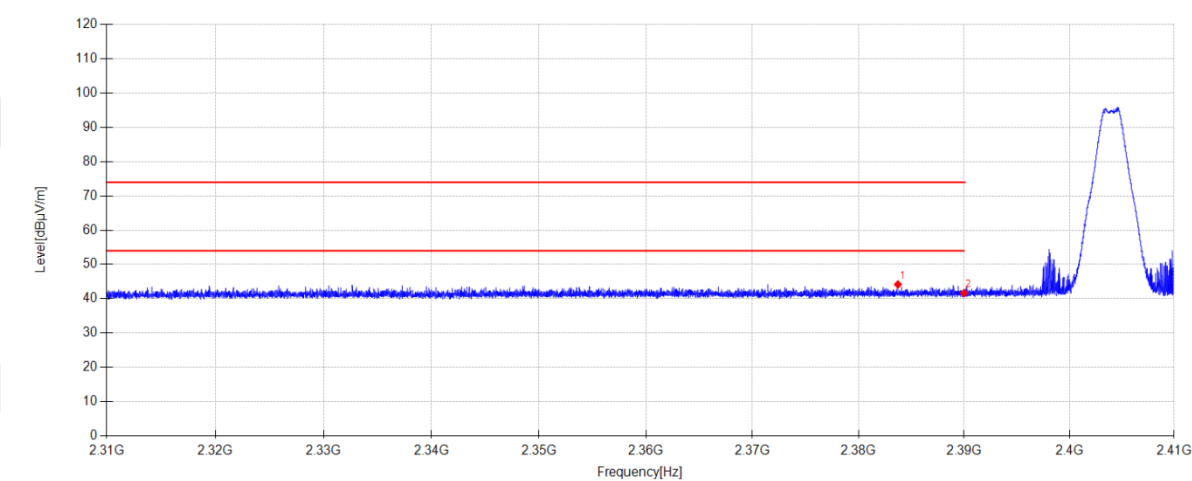

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2383.730	44.14	28.17	-28.14	44.17	74.00	29.83	PK	Horizontal
2	2390.000	41.59	28.18	-28.12	41.65	74.00	32.35	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-27

Tested By:

Li Xiongbín

Test Mode:

TX BLE 2M 2404MHz Mode

Power Supply:

Battery

Condition:

Temp:22.7°C;Humi:49.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\42

Memo:

Sample number: S26070611-011 Left side

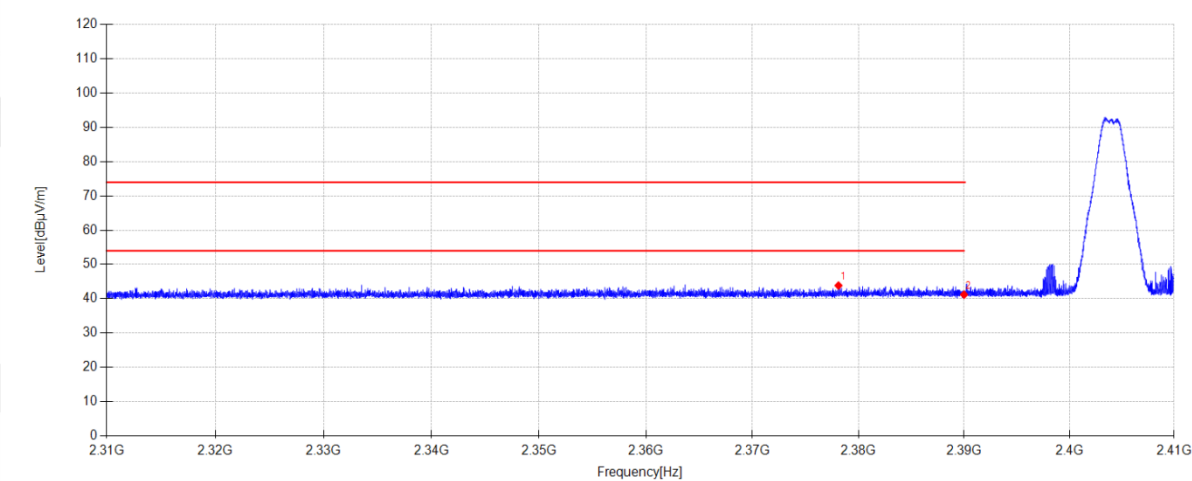

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2378.110	43.84	28.16	-28.16	43.84	74.00	30.16	PK	Vertical
2	2390.000	41.12	28.18	-28.12	41.18	74.00	32.82	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-27

Tested By:

Li Xiongbín

Test Mode:

TX BLE 1M 2480MHz Mode

Power Supply:

Battery

Condition:

Temp:22.7°C;Humi:49.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\37

Memo:

Sample number: S26070611-011 Left side

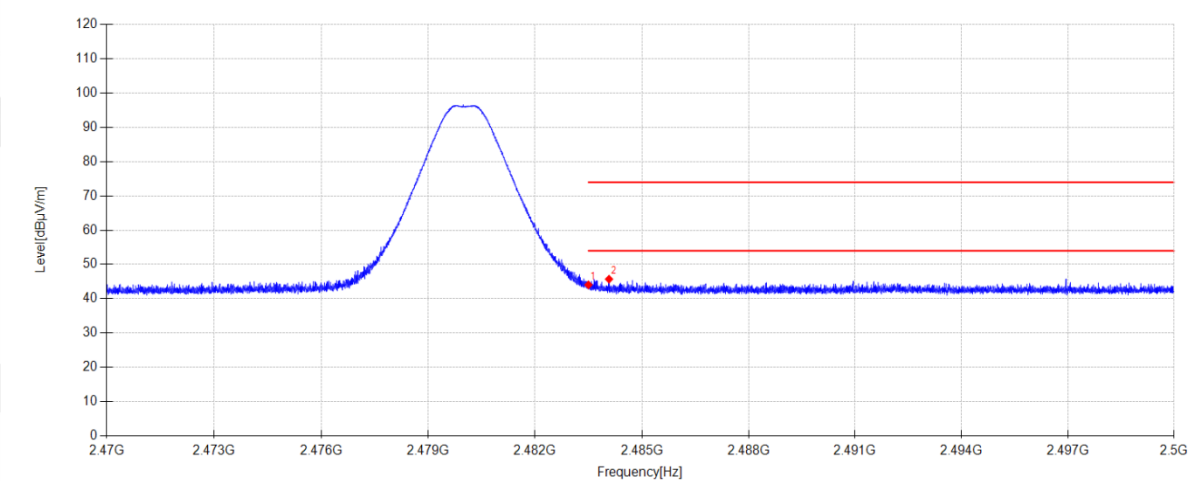

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	43.45	28.60	-27.99	44.06	74.00	29.94	PK	Horizontal
2	2484.076	45.10	28.60	-27.99	45.71	74.00	28.29	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-27

Tested By:

Li Xiongbín

Test Mode:

TX BLE 1M 2480MHz Mode

Power Supply:

Battery

Condition:

Temp:22.7°C;Humi:49.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\38

Memo:

Sample number: S26070611-011 Left side

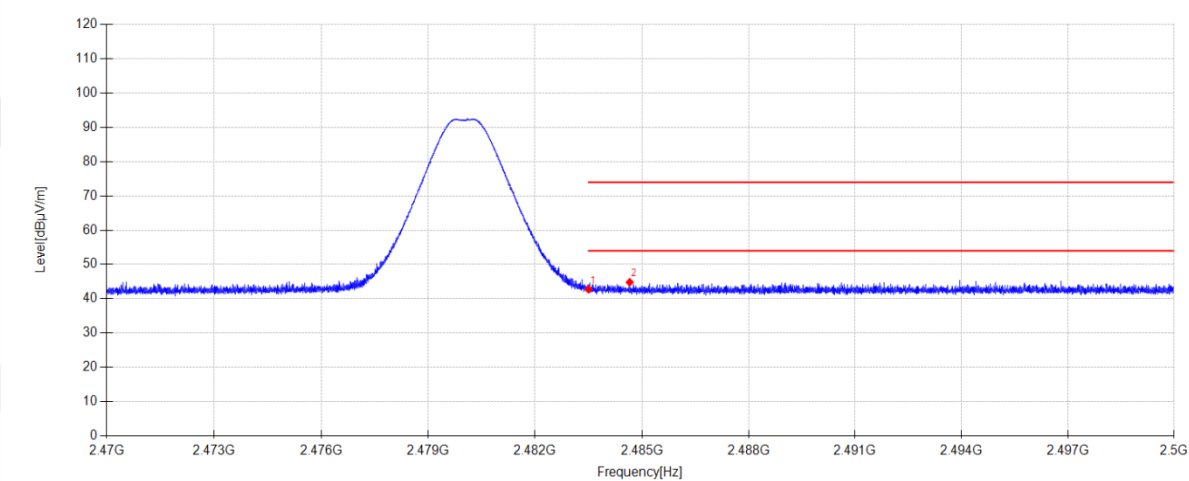

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	42.14	28.60	-27.99	42.75	74.00	31.25	PK	Vertical
2	2484.658	44.20	28.61	-27.99	44.82	74.00	29.18	PK	Vertical


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-27 **Tested By:** Li Xiongbn
Test Mode: TX BLE 2M 2478MHz Mode **Power Supply:** Battery
Condition: Temp:22.7°C;Humi:49.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\35
Memo: Sample number: S26070611-011 Left side

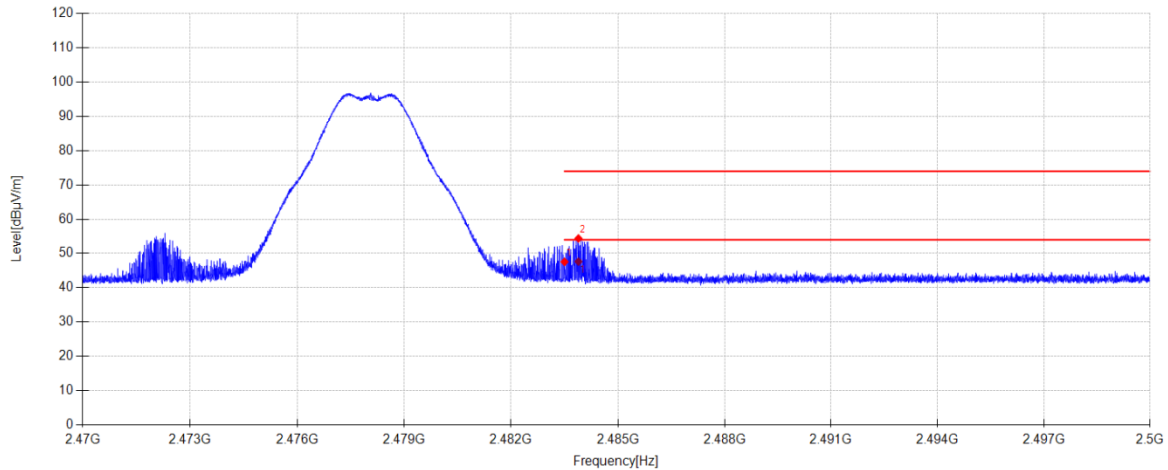**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	46.95	28.60	-27.99	47.56	74.00	26.44	PK	Horizontal
2	2483.893	53.78	28.60	-27.99	54.39	74.00	19.61	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.893	47.02	28.60	-27.99	47.63	54.00	6.37	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-27 **Tested By:** Li Xiongbn
Test Mode: TX BLE 2M 2478MHz Mode **Power Supply:** Battery
Condition: Temp:22.7°C;Humi:49.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\36
Memo: Sample number: S26070611-011 Left side

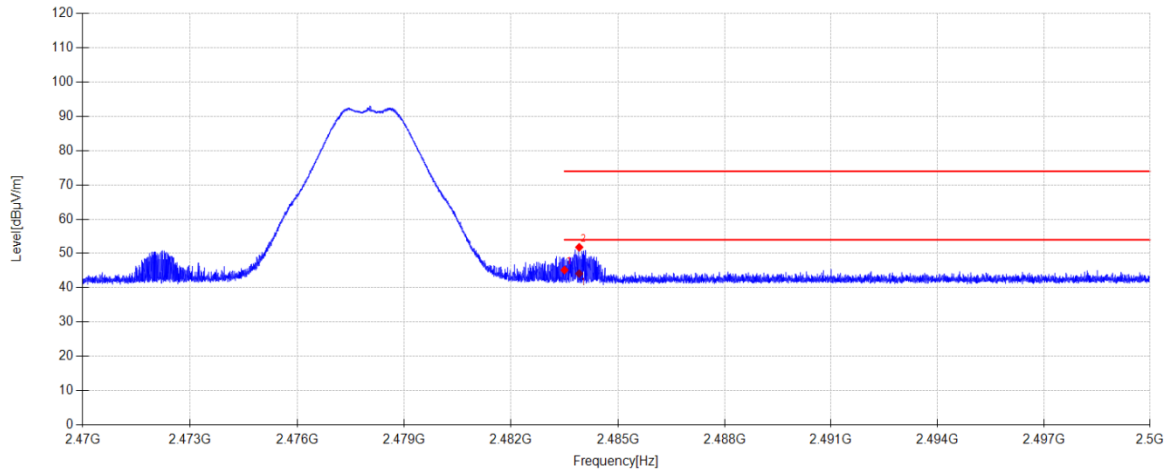

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	44.54	28.60	-27.99	45.15	74.00	28.85	PK	Vertical
2	2483.914	51.20	28.60	-27.99	51.81	74.00	22.19	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.914	43.51	28.60	-27.99	44.12	54.00	9.88	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Zhong Nan

Test Mode:

TX BLE 1M 2402MHz Mode

Power Supply:

Battery

Condition:

Temp:24.3°C;Humi:47.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\21

Memo:

Sample number: S26070611-011 Right side

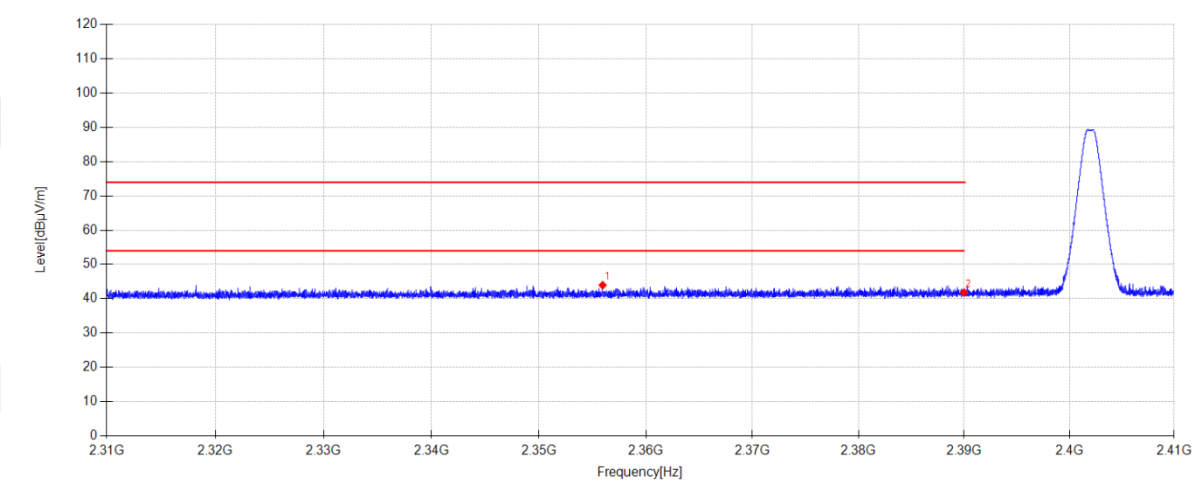

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2355.950	44.08	28.11	-28.24	43.95	74.00	30.05	PK	Horizontal
2	2390.000	41.77	28.18	-28.12	41.83	74.00	32.17	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Zhong Nan

Test Mode:

TX BLE 1M 2402MHz Mode

Power Supply:

Battery

Condition:

Temp:24.3°C;Humi:47.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\22

Memo:

Sample number: S26070611-011 Right side

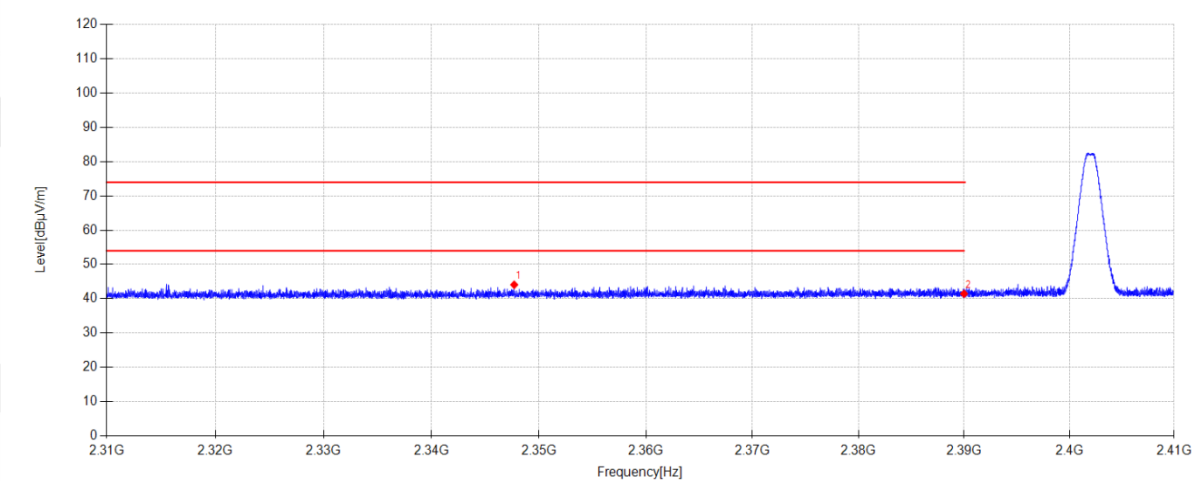

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2347.690	44.24	28.10	-28.27	44.07	74.00	29.93	PK	Vertical
2	2390.000	41.38	28.18	-28.12	41.44	74.00	32.56	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Zhong Nan

Test Mode:

TX BLE 2M 2404MHz Mode

Power Supply:

Battery

Condition:

Temp:24.3°C;Humi:47.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\17

Memo:

R Sample number:S26070611-011 Power Setting:10

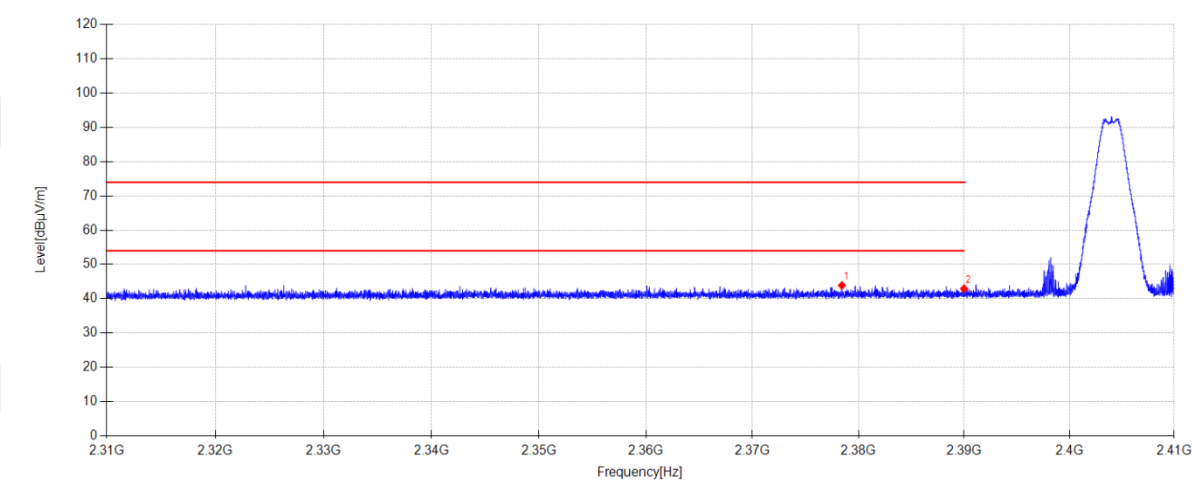

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2378.440	43.89	28.16	-28.16	43.89	74.00	30.11	PK	Horizontal
2	2390.000	42.87	28.18	-28.12	42.93	74.00	31.07	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Zhong Nan

Test Mode:

TX BLE 2M 2404MHz Mode

Power Supply:

Battery

Condition:

Temp:24.3°C;Humi:47.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\18

Memo:

R Sample number:S26070611-011 Power Setting:10

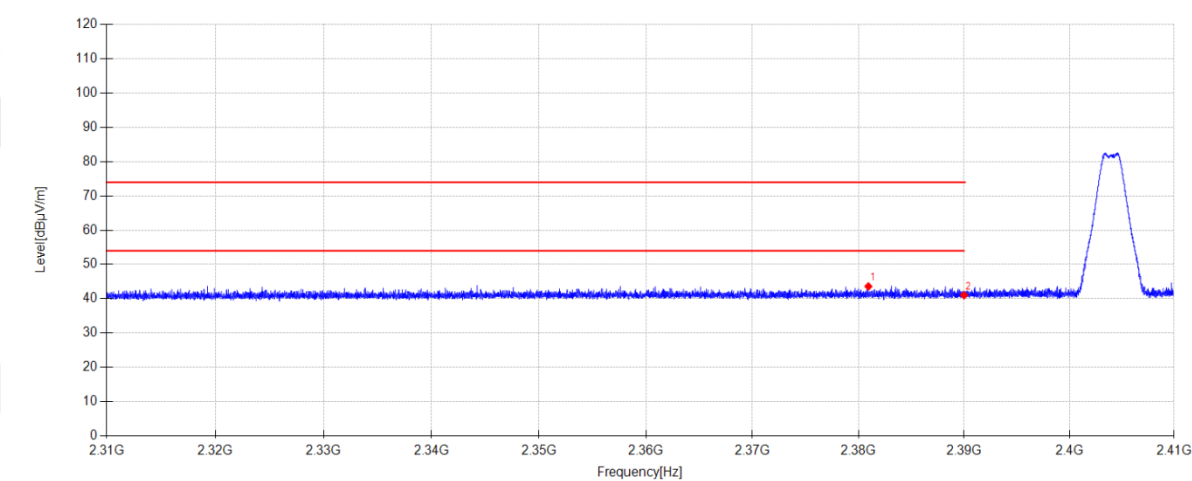

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2380.940	43.58	28.16	-28.15	43.59	74.00	30.41	PK	Vertical
2	2390.000	40.97	28.18	-28.12	41.03	74.00	32.97	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Zhong Nan

Test Mode:

TX BLE 1M 2480MHz Mode

Power Supply:

Battery

Condition:

Temp:24.3°C;Humi:47.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\19

Memo:

Sample number: S26070611-011 Right side

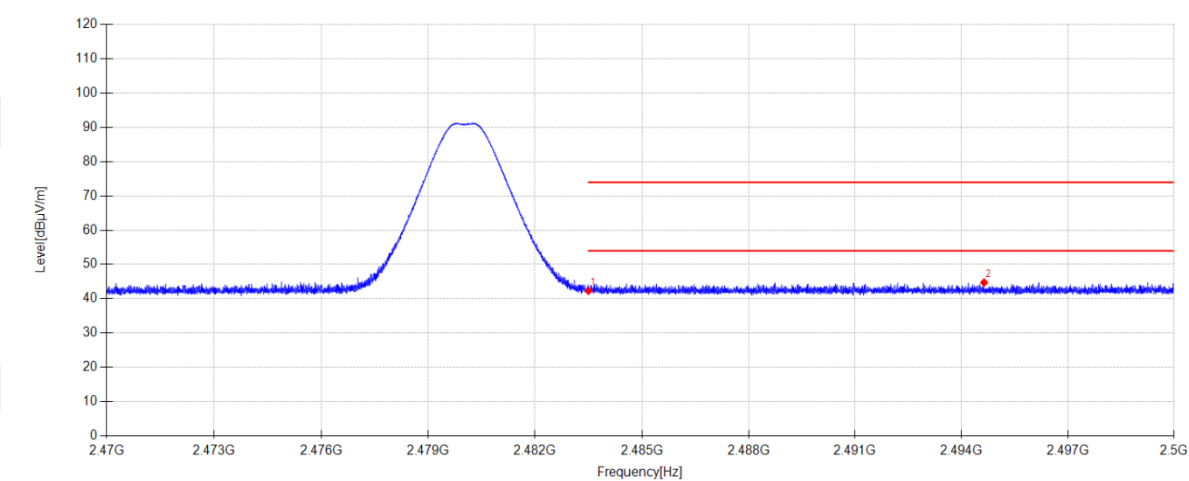

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	41.70	28.60	-27.99	42.31	74.00	31.69	PK	Horizontal
2	2494.636	44.03	28.67	-27.98	44.72	74.00	29.28	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Zhong Nan

Test Mode:

TX BLE 1M 2480MHz Mode

Power Supply:

Battery

Condition:

Temp:24.3°C;Humi:47.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\20

Memo:

Sample number: S26070611-011 Right side

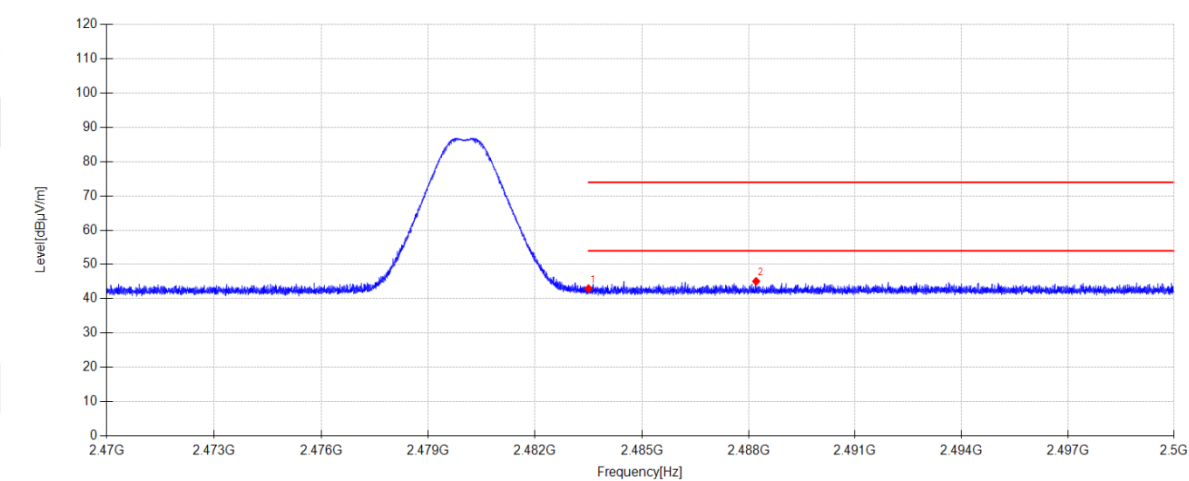


Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	42.35	28.60	-27.99	42.96	74.00	31.04	PK	Vertical
2	2488.213	44.43	28.63	-27.98	45.08	74.00	28.92	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-25 **Tested By:** Zhong Nan
Test Mode: TX BLE 2M 2478MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\15
Memo: Sample number: S26070611-011 Right side

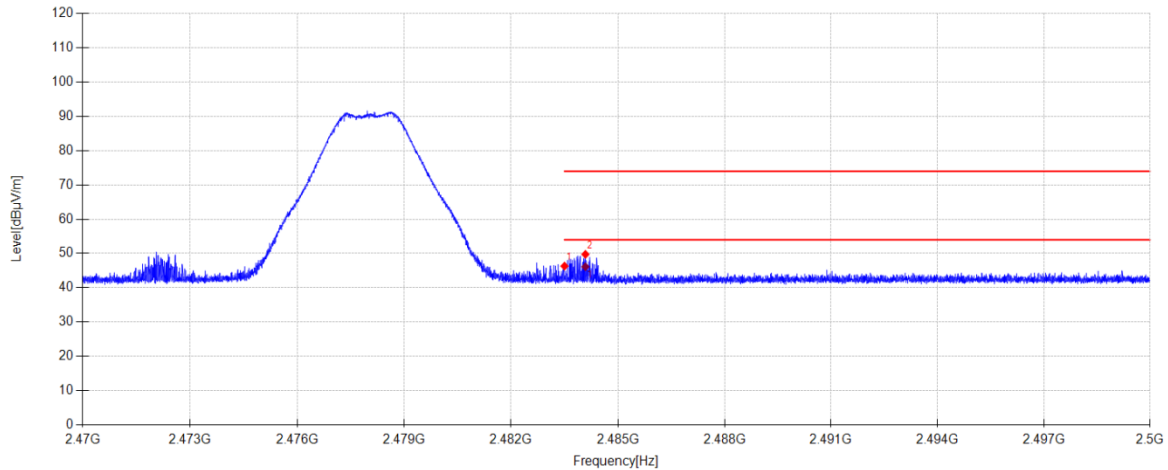**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	45.70	28.60	-27.99	46.31	74.00	27.69	PK	Horizontal
2	2484.088	49.13	28.60	-27.99	49.74	74.00	24.26	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2484.088	45.52	28.60	-27.99	46.13	54.00	7.87	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-25 **Tested By:** Zhong Nan
Test Mode: TX BLE 2M 2478MHz Mode **Power Supply:** Battery
Condition: Temp:24.3°C;Humi:47.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26070611-2E\FCC ABOVE1G BLE 0724\16
Memo: Sample number: S26070611-011 Right side

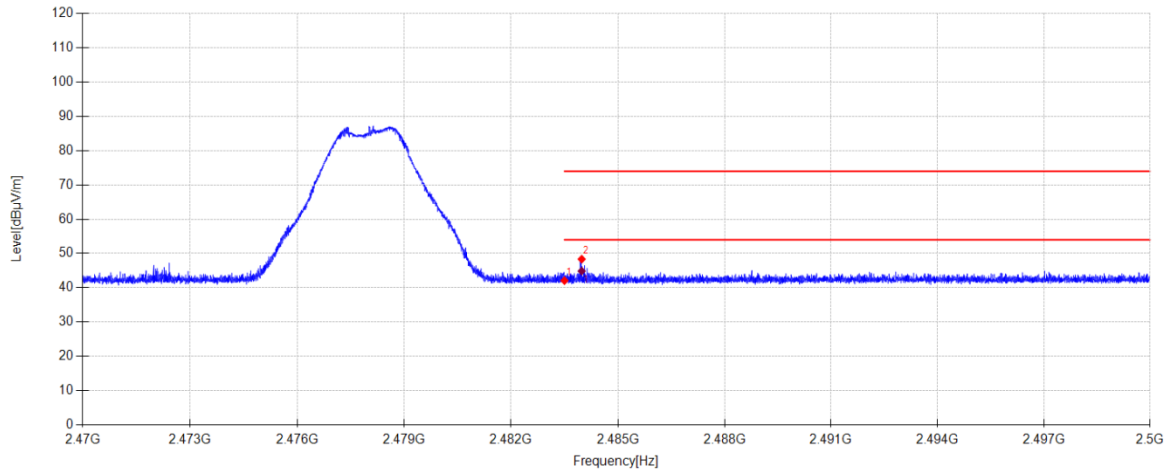

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	41.46	28.60	-27.99	42.07	74.00	31.93	PK	Vertical
2	2483.983	47.73	28.60	-27.99	48.34	74.00	25.66	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.983	44.25	28.60	-27.99	44.86	54.00	9.14	AV	Vertical

Note:


1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

14. Power Line Conducted Emissions

14.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
EMI Test Receiver	R&S	ESCI 3	DDT-ZC00235	2027/06/10
Two Line V-Network	R&S	ENV216	DDT-ZC00535	2027/06/14
Pulse Limiter	SCHWARZBECK	ESH3-Z2	DDT-ZC00539	2027/06/10
CE Cable 1	R&S	ESU8/RF2	DDT-ZC00566	2027/06/21
Conducted & Radiated Software	Audix	e3	DDT-ZC00562	/
Two-line V-shaped artificial network	ROHDE&SCHWARZ	ENV216	DDT-ZC05693	2026/11/04
Artificial mains	R&S	ESH2-Z5	DDT-ZC00538	2027/06/09

14.2. Block diagram of test setup

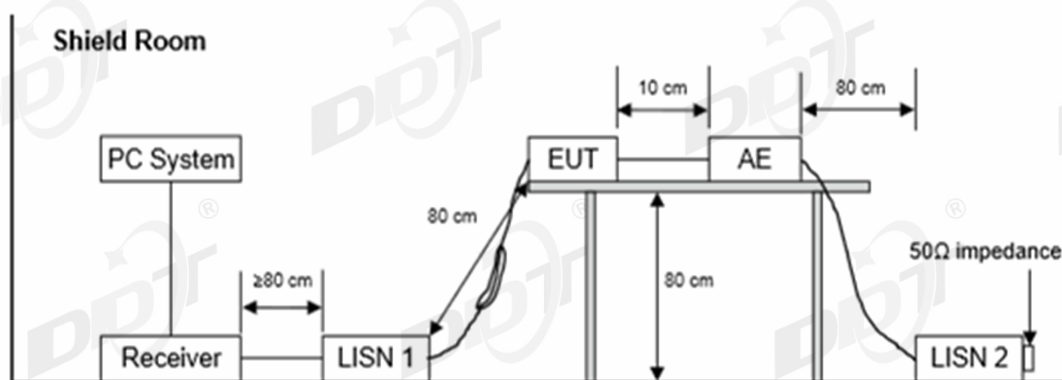

14.3. Limits

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150 kHz~500 kHz	66 ~ 56*	56 ~ 46*
500 kHz~5 MHz	56	46
5 MHz~30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

14.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

14.5. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

14.6. Test result

PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: "----" means Peak detection; "----" means Average detection.


Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded the worst case.

14.7. Test data

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2026 CE Report Data\Q26070611-2E\0729 CE.EM6**
Test Date : 2026-07-29 **Tested By** : Li Xiongbín
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : TEMP:23.1°C, RH:60.4% **LISN** : 2026 1# ENV 216/LINE
Memo : Sample number: S26070611-011

Data: 6

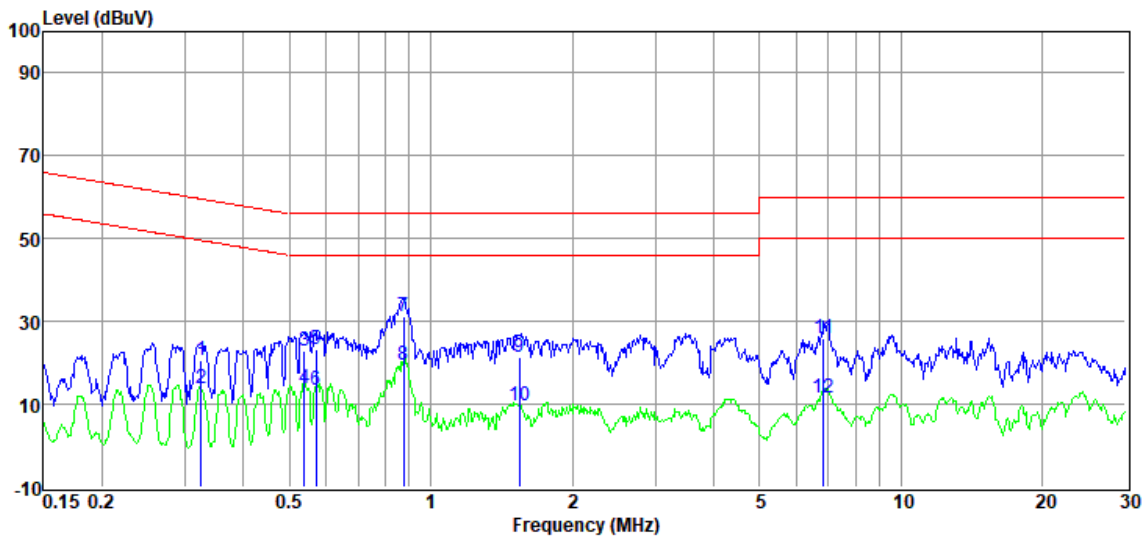

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Margin (dB)	Detector	Phase
1	0.33	1.21	9.58	0.00	9.87	20.66	59.57	38.91	QP	LINE
2	0.33	-5.58	9.58	0.00	9.87	13.87	49.57	35.70	Average	LINE
3	0.54	3.46	9.57	0.00	9.87	22.90	56.00	33.10	QP	LINE
4	0.54	-5.52	9.57	0.00	9.87	13.92	46.00	32.08	Average	LINE
5	0.57	3.77	9.58	0.00	9.87	23.22	56.00	32.78	QP	LINE
6	0.57	-6.12	9.58	0.00	9.87	13.33	46.00	32.67	Average	LINE
7	0.88	11.86	9.59	0.01	9.87	31.33	56.00	24.67	QP	LINE
8	0.88	0.18	9.59	0.01	9.87	19.65	46.00	26.35	Average	LINE
9	1.54	1.89	9.60	0.01	9.87	21.37	56.00	34.63	QP	LINE
10	1.54	-9.98	9.60	0.01	9.87	9.50	46.00	36.50	Average	LINE
11	6.84	6.36	9.63	0.03	9.88	25.90	60.00	34.10	QP	LINE
12	6.84	-7.98	9.63	0.03	9.88	11.56	50.00	38.44	Average	LINE

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room

D:\2026 CE Report Data\Q26070611-2E\0729 CE.EM6

Test Date : 2026-07-29

Tested By : Li Xiongbín

Power Supply : AC 120V/60Hz


Test Mode : Tx mode

Condition : TEMP:23.1°C, RH:60.4%

LISN : 2026 1# ENV 216/NEUTRAL

Memo : Sample number: S26070611-011

Data: 8

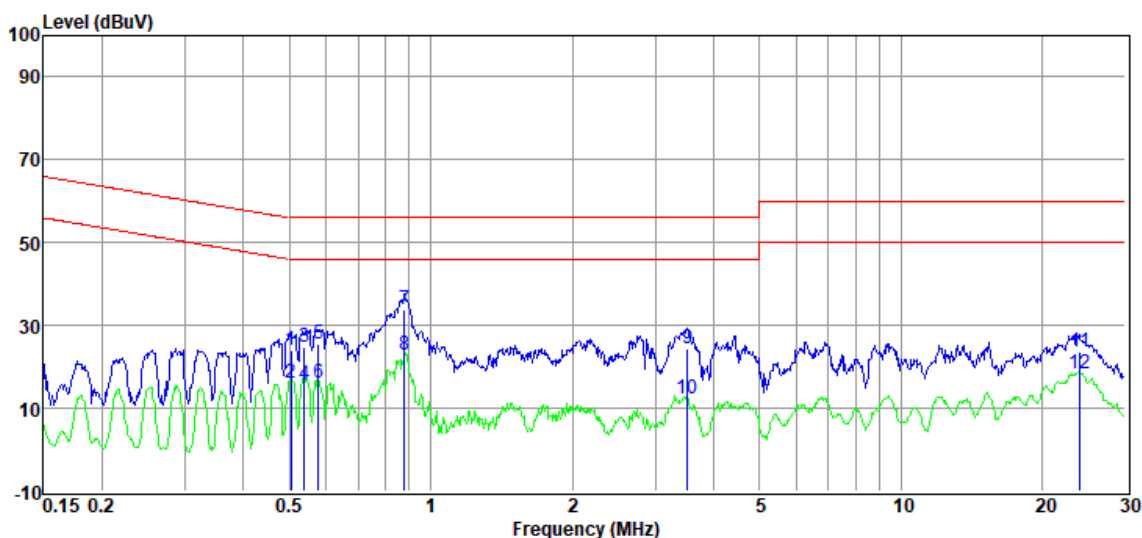

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Margin	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.50	4.61	9.59	0.00	9.87	24.07	56.00	31.93	QP	NEUTRAL
2	0.50	-3.53	9.59	0.00	9.87	15.93	46.00	30.07	Average	NEUTRAL
3	0.54	5.44	9.59	0.00	9.87	24.90	56.00	31.10	QP	NEUTRAL
4	0.54	-3.58	9.59	0.00	9.87	15.88	46.00	30.12	Average	NEUTRAL
5	0.58	5.98	9.59	0.00	9.87	25.44	56.00	30.56	QP	NEUTRAL
6	0.58	-3.43	9.59	0.00	9.87	16.03	46.00	29.97	Average	NEUTRAL
7	0.88	14.47	9.60	0.01	9.87	33.95	56.00	22.05	QP	NEUTRAL
8	0.88	3.55	9.60	0.01	9.87	23.03	46.00	22.97	Average	NEUTRAL
9	3.51	4.84	9.64	0.01	9.87	24.36	56.00	31.64	QP	NEUTRAL
10	3.51	-7.12	9.64	0.01	9.87	12.40	46.00	33.60	Average	NEUTRAL
11	24.02	3.35	10.21	0.10	9.96	23.62	60.00	36.38	QP	NEUTRAL
12	24.02	-2.04	10.21	0.10	9.96	18.23	50.00	31.77	Average	NEUTRAL

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

16. Photos of the EUT

Please refer to DDT-Q26070611-2E appendix I

-----End Report-----