



# RF Exposure Evaluation Report

|                             |                                                                                             |
|-----------------------------|---------------------------------------------------------------------------------------------|
| <b>APPLICANT</b>            | FLORIDA, STATE OF                                                                           |
| <b>ADDRESS</b>              | DEPARTMENT OF TRANSPORTATION<br>605 SUWANNEE St MS 90<br>TALLAHASSEE FLORIDA 32399-0450 USA |
| <b>FCC ID</b>               | 2ALYPDR-06T                                                                                 |
| <b>MODEL NUMBER</b>         | DR-06T                                                                                      |
| <b>PRODUCT DESCRIPTION</b>  | VHF MOBILE TRANSCEIVER                                                                      |
| <b>DATE SAMPLE RECEIVED</b> | 05/17/2017                                                                                  |
| <b>FINAL TEST DATE</b>      | 04/23/2019                                                                                  |
| <b>PREPARED BY</b>          | Franklin Rose                                                                               |
| <b>TEST RESULTS</b>         | <input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL                      |

| Report Number              | Report Version | Description             | Issue Date |
|----------------------------|----------------|-------------------------|------------|
| 858UT19<br>MPE_TestReport_ | Rev1           | Initial Issue           | 05/02/2019 |
| 858UT19<br>MPE_TestReport_ | Rev2           | Updated with High Power | 09/16/2019 |

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**



## TABLE OF CONTENTS

|                                         |          |
|-----------------------------------------|----------|
| <b>GENERAL REMARKS .....</b>            | <b>2</b> |
| <b>GENERAL INFORMATION .....</b>        | <b>3</b> |
| <b>ANTENNA INFORMATION .....</b>        | <b>3</b> |
| <b>MPE CALCULATION .....</b>            | <b>4</b> |
| <b>MPE TABLE .....</b>                  | <b>5</b> |
| <br>GENERAL UNCONTROLLED EXPOSURE ..... | 5        |
| <br>GENERAL CONTROLLED EXPOSURE .....   | 5        |

## GENERAL REMARKS

### Summary

The device under test does:

- ☒ Fulfill the general approval requirements as identified in this test report and was selected by the customer.
- ☐ Not fulfill the general approval requirements as identified in this test report

### Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made at:

**Timco Engineering Inc.**  
**849 NW State Road 45**  
**Newberry, FL 32669**  
**Designation #: US1070**

### Prepared by:



|                       |                                                 |
|-----------------------|-------------------------------------------------|
| <b>Name and Title</b> | Franklin Rose, Project Manager / EMC Specialist |
| <b>Date</b>           | 05/02/2019                                      |

## GENERAL INFORMATION

|                                |                                                                                              |                                                         |                                                |
|--------------------------------|----------------------------------------------------------------------------------------------|---------------------------------------------------------|------------------------------------------------|
| <b>EUT Description</b>         | VHF MOBILE TRANSCEIVER                                                                       |                                                         |                                                |
| <b>Model Number</b>            | DR-06T                                                                                       |                                                         |                                                |
| <b>EUT Power Source</b>        | <input type="checkbox"/> 110–120Vac, 50–60Hz                                                 | <input checked="" type="checkbox"/> DC Power (13.8 VDC) | <input type="checkbox"/> Battery Operated      |
| <b>Test Item</b>               | <input type="checkbox"/> Engineering Prototype                                               | <input type="checkbox"/> Pre-Production                 | <input checked="" type="checkbox"/> Production |
| <b>Type of Equipment</b>       | <input type="checkbox"/> Fixed                                                               | <input checked="" type="checkbox"/> Mobile              | <input type="checkbox"/> Portable              |
| <b>Antenna Connector</b>       | UHF Connector                                                                                |                                                         |                                                |
| <b>Test Conditions</b>         | The temperature was 26°C<br>Relative humidity of 50%.                                        |                                                         |                                                |
| <b>Modification to the EUT</b> | No Modification to EUT.                                                                      |                                                         |                                                |
| <b>Applicable Standards</b>    | FCC CFR 47 Part 2.1091                                                                       |                                                         |                                                |
| <b>Test Facility</b>           | Timco Engineering Inc. at 849 NW State Road 45 Newberry, FL 32669 USA. Designation #: US1070 |                                                         |                                                |

## ANTENNA INFORMATION

| Antenna is Provided | Type          | Max Gain (dBi) |
|---------------------|---------------|----------------|
| Yes                 | Monopole/Whip | 0.63 dBi       |

## POWER OUTPUT OF EUT

| Tuned Frequency (MHz) | Power Mode | ERP (dBm) | Power Output (W) | Rated Power Output (dBm) | Tolerance (dBm) |
|-----------------------|------------|-----------|------------------|--------------------------|-----------------|
| 44.96                 | Low        | 28.70     | 0.74             | 1.00                     | +/- 0.26        |
| 44.96                 | High       | 46.71     | 46.91            | 50.00                    | +/- 3.09        |
| 47.62                 | Low        | 30.46     | 1.11             | 1.00                     | +/- 0.11        |
| 47.62                 | High       | 47.00     | 50.08            | 50.00                    | +/- 0.08        |

## MPE CALCULATION

The minimum separation distance is calculated as follows:


$$E(V/m) = \frac{\sqrt{30 \times P \times G}}{d}$$

$$\text{Power density: } P_d(mW/cm^2) = \frac{E^2}{3770}$$

## MPE LIMITS

**Figure 1. FCC Limits for Maximum Permissible Exposure (MPE)**

*Plane-wave Equivalent Power Density*

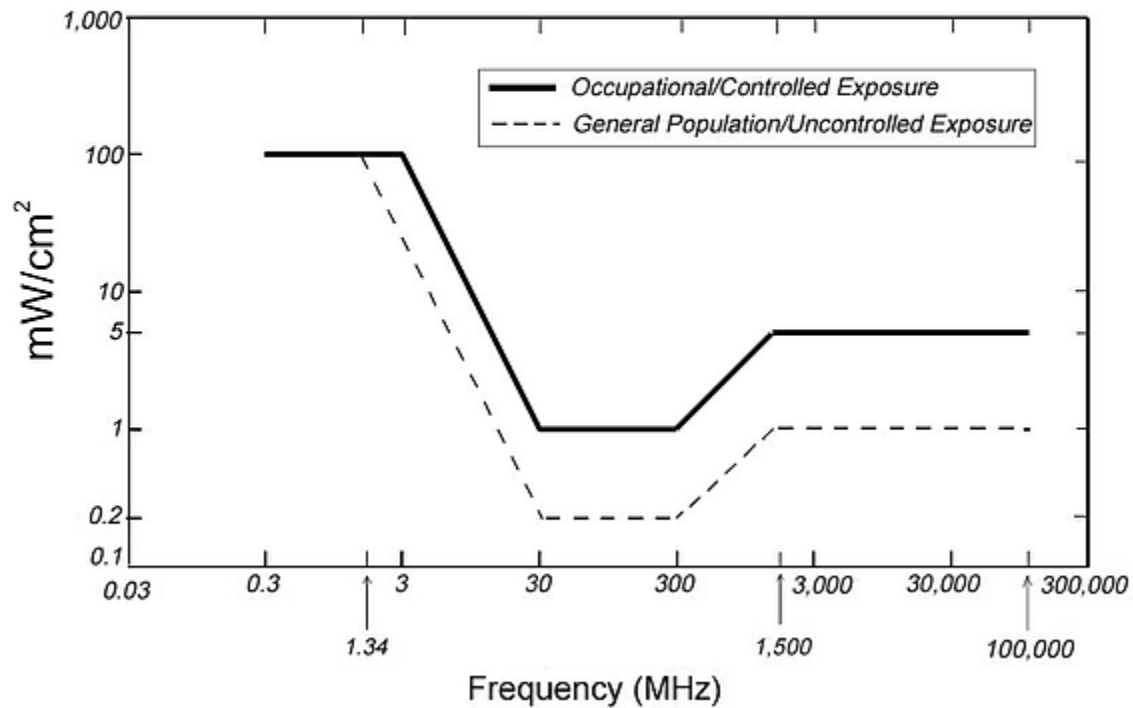


## MPE Table

### General Uncontrolled Exposure

The limit for General Uncontrolled Exposure Environment is calculated as shown in FCC Pt. 1.1310, Table B:

| Variable                    | Value                  |
|-----------------------------|------------------------|
| Max Power                   | 50.00 W                |
| Frequency Range             | 44.96 – 47.62 MHz      |
| Duty Cycle (at full power)  | 100%                   |
| Max Antenna Gain            | 0 dBi                  |
| Coax Loss                   | 0 dB                   |
| Power Density               | 0.2 mW/cm <sup>2</sup> |
| Minimum Separation Distance | 141.05 cm              |

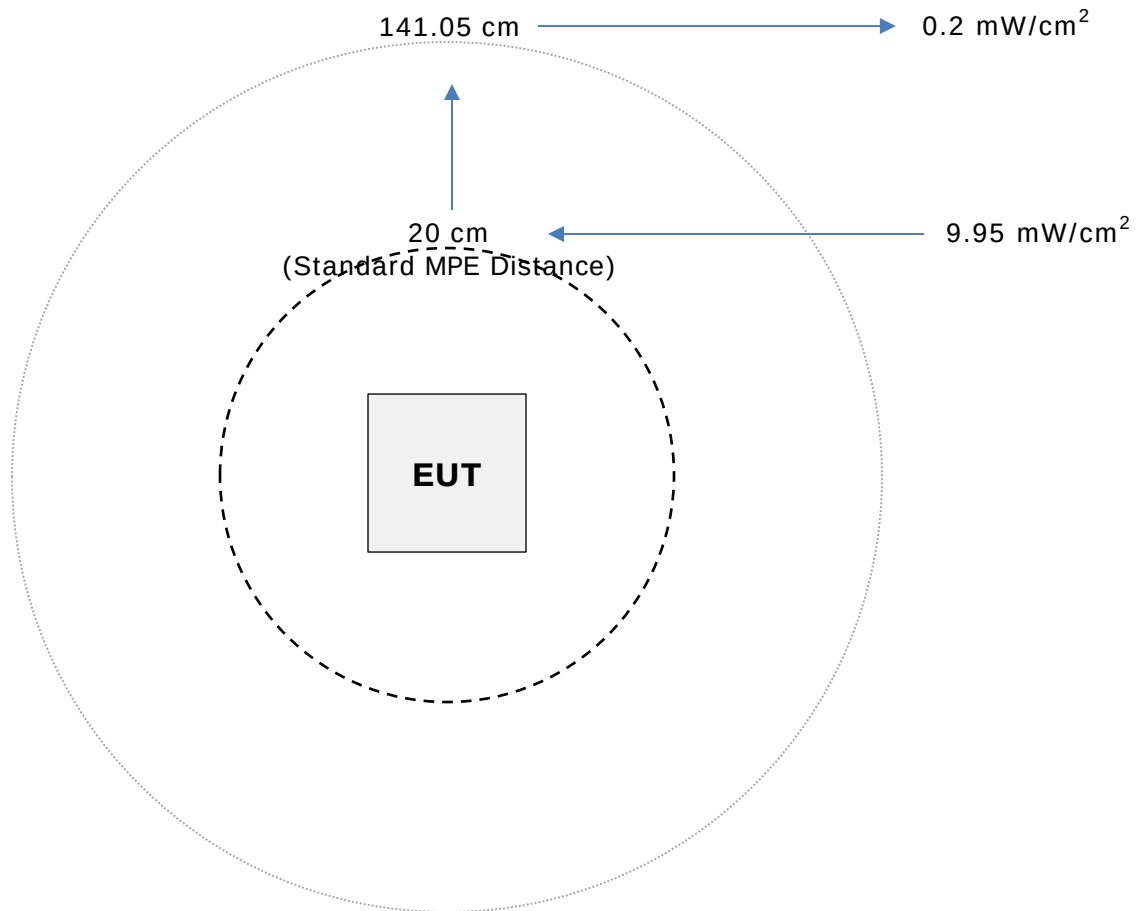

## General Controlled Exposure

The limit for General Controlled Exposure Environment is calculated as shown in FCC Pt. 1.1310, Table A:

| Variable                    | Value                  |
|-----------------------------|------------------------|
| Max Power                   | 50.00 W                |
| Frequency Range             | 44.96 – 47.62 MHz      |
| Duty Cycle (at full power)  | 100%                   |
| Max Antenna Gain            | 0 dBi                  |
| Coax Loss                   | 0 dB                   |
| Power Density               | 1.0 mW/cm <sup>2</sup> |
| Minimum Separation Distance | 63.08 cm               |

