

SPECIFICATION

Daxian Communication Technology Limited

Shenzhen Daxian Technology Co., Ltd.

Unimax L13 Main antenna

Product specification book

client	Unimax	frequency range	WCDMA B2/4/5 LTE B2/4/5/7/12/13/25/26/38/41 (249 6-2690)/42/66/71
project name	L13	edition	V01
Material number	1L-13XXX-109	pigment	black
RF design	Peng.Hu	architectural design	YeZhi.Bi
QA Manager	ZiYin.Hu	Technical Director	Lei Zhang
date	2022-11-29		

Customer confirmation:

Does the assembly meet your requirements: ☐ OK ☐ NG

Shenzhen Topant Technology Co., Ltd.

Buji Town, Longgang District, Shenzhen, China Jihua Road 513, Sh an g shuijing Village (opposite the national defense training base) Dacheng Industrial Park, Building 7.

TEL:0755-28576002

FAX:0755-84276383

Room201, Building8, LongDongRoad3000#, Semiconductor Industry Park, ZhangJiang Hitech Zone, ShangHai

TEL:021-61630552

FAX:755-84276383

Change the resume

[illegible]

www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. has the materials provided by the proprietary technology, and these proprietary materials shall be strictly confidential and are not allowed to be disclosed to anyone or the company without the prior written consent of Shenzhen Daxian Technology Co., Ltd.

index of matrix

I. Project Description.....	4
II. the main antenna.....	4
1. Specification:	4
1.1Electrical Specification Standard	5
1.1.1 Electrical performance index	6
1.2 Structural specification standard.....	7
1.2.1 Antenna composition.....	7
2. Test environment.....	8
3. Test.....	8
3.1 Resident Wave (VSWR) test.....	8
3.1.1 Test the connection to the	8
3.2 Efficiency, power (TRP), sensitivity (TIS) test.....	8
3.2.1, Test site	8
3.2.2. Test instrument	8
3.2.3 test data	8-11
4. Conclusion.....	11
5. Annex chart	12
5.1Return Loss and VSWR and impedance park diagram parameters Figure	12
6、Field pattern diagram.....	13-15
7、2D&3DPassive field type diagram.....	16-18
8、Matching circuit.....	19
9、Environmental treatment.....	19
III. Project drawing	20

www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. has the materials provided by the proprietary technology, and these proprietary materials shall be strictly confidential and are not allowed to be disclosed to anyone or the company without the prior written consent of Shenzhen Daxian Technology Co., Ltd.


I project description

Customer Name:	Unimax
Complete machine type:	MIFI
Antenna band:	WCDMA B2/4/5 LTE B2/4/5/7/12/13/25/26/38/41(2496-2690)/42/66/71
Antenna form:	FPC
Feeding form:	welding
Number of feeders:	/
Hardware version:	/

II Main antenna

1 Specifications

This report mainly provides the router antenna L13 Test status of various electrical and structural performance parameters. The following picture shows the antenna picture of the display design.

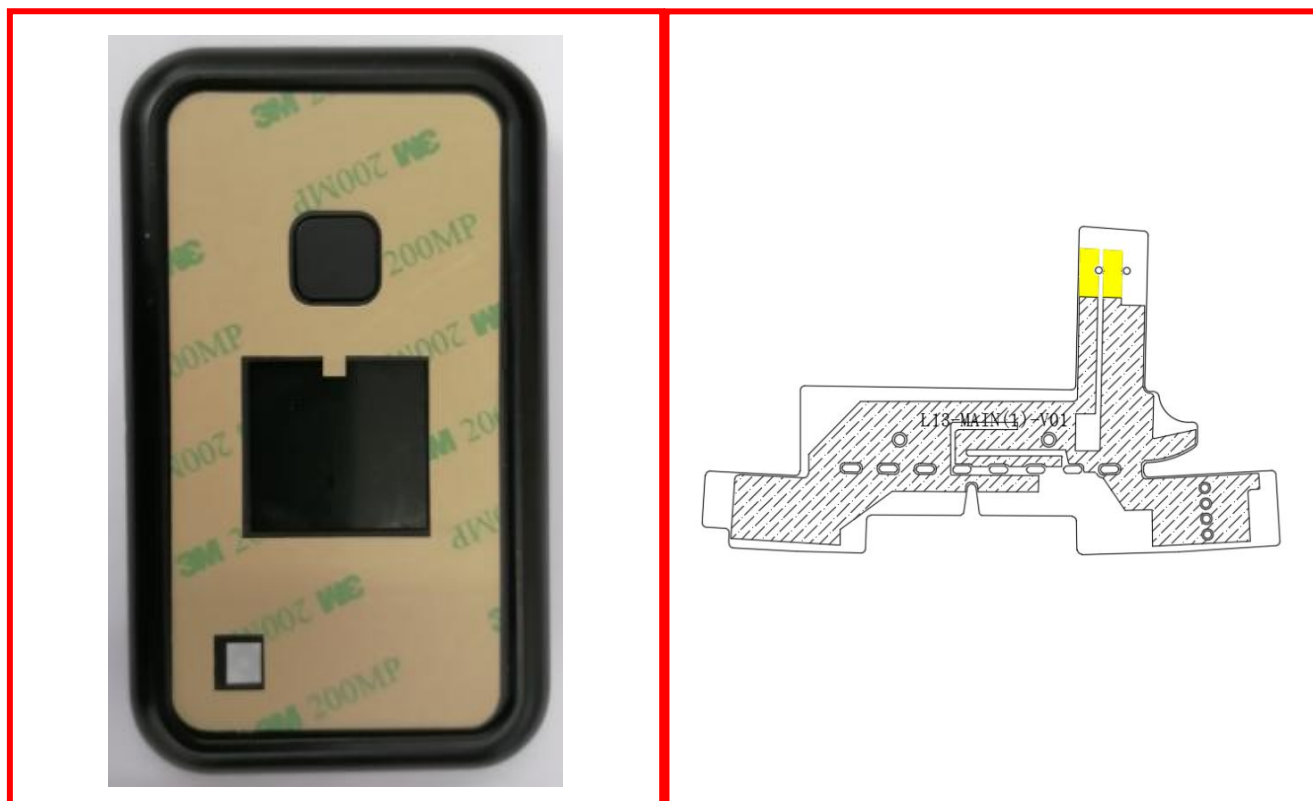

Appearance diagram of the whole machine and the antenna appearance diagram

www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. has the materials provided by the proprietary technology, and these proprietary materials shall be strictly confidential and are not allowed to be disclosed to anyone or the company without the prior written consent of Shenzhen Daxian Technology Co., Ltd.

1.1 Electrical specifications and standards

1.1.1 Electric performance index

Antenna operating frequency band is in:

WCDMA:824MHz~891MHz,1710MHz~2155MHz,1852MHz~1987MHz;LTE:1850MHz~1990MHz,1710MHz~2155MHz,824MHz~894MHz,777MHz~756MHz,1710MHz~2200MHz,2500MHz~2690MHz,699MHz~746MHz,1850MHz~1995MHz,814MHz~894MHz,2570MHz~2620MHz,2496MHz~2690MHz,3400MHz~3600MHz,663MHz~652MHz。The following table is the index of the electrical performance of the explicit design and mass production antenna.

WCDMA -band B 2				
band	band (MHz)	VSWR	band (MHz)	VSWR
	The transmit TX		The receiving end RX	
W -B 2	1852~1907	≤ 4	1932~1987	≤ 4
WCDMA -band B 4				
band	band (MHz)	VSWR	band (MHz)	VSWR
	The transmit TX		The receiving end RX	
W -B 4	1710~1755	≤ 4	2110~2155	≤ 4
WCDMA-band B 5				
band	band (MHz)	VSWR	band (MHz)	VSWR
	The transmitter TX		The receiving end RX	
W -B 5	824~846	≤ 4	871~891	≤ 4
LTE -band B 2				
band	band (MHz)	VSWR	band (MHz)	VSWR
	The transmit TX		The receiving end RX	
LTE -B 2	1850~1910	≤ 4	1930~1990	≤ 4
LTE -band B 4				
band	band (MHz)	VSWR	band (MHz)	VSWR
	The transmit TX		The receiving end RX	
LTE -B 4	1710~1755	≤ 4	2110~2155	≤ 4
LTE -band B 5				
band	band (MHz)	VSWR	band (MHz)	VSWR
	The transmitter TX		The receiving end RX	
LTE -B 5	824~849	≤ 4	869~894	≤ 4

www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. has the materials provided by the proprietary technology, and these proprietary materials shall be strictly confidential and are not allowed to be disclosed to anyone or the company without the prior written consent of Shenzhen Daxian Technology Co., Ltd.

LTE -band B 7				
band	band (MHz)	VSWR	band (MHz)	VSWR
	The transmit TX		The receiving end RX	
LTE -B 7	2500~2570	≤ 4	2620~2690	≤ 4
LTE -band B 12				
band	band (MHz)	VSWR	band (MHz)	VSWR
	The transmitter TX		The receiving end RX	
LTE -B 12	699~716	≤ 4	729~746	≤ 4
LTE -band B 25				
band	band (MHz)	VSWR	band (MHz)	VSWR
	The transmitter TX		The receiving end RX	
LTE -B 25	1850~1915	≤ 4	1930~1995	≤ 4
LTE -band B 26				
band	band (MHz)	VSWR	band (MHz)	VSWR
	The transmitter TX		The receiving end RX	
LTE -B 26	814~849	≤ 4	859~894	≤ 4
LTE -band B 38				
band	band (MHz)	VSWR	band (MHz)	VSWR
	The transmitter TX		The receiving end RX	
LTE -B 38	2570~2620	≤ 4	2570~2620	≤ 4
LTE -band B 41				
band	band (MHz)	VSWR	band (MHz)	VSWR
	The transmitter TX		The receiving end RX	
LTE -B 41	2496~2690	≤ 4	2496~2690	≤ 4
LTE -band B 42				
band	band (MHz)	VSWR	band (MHz)	VSWR
	The transmitter TX		The receiving end RX	
LTE -B 42	3400~3600	≤ 4	3400~3600	≤ 4
LTE -band B 41				
band	band (MHz)	VSWR	band (MHz)	VSWR
	The transmitter TX		The receiving end RX	
LTE -B 71	663~698	≤ 4	617~652	≤ 4

[www.Topant².com.cn](http://www.Topant.com.cn)
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. has the materials provided by the proprietary technology, and these proprietary materials shall be strictly confidential and are not allowed to be disclosed to anyone or the company without the prior written consent of Shenzhen Daxian Technology Co., Ltd.

1.2 Antenna composition

The antenna is mainly composed of FPC.

2、 The Equipment of Active Test

Satimo 3D Chamber $6 \times 4 \times 4$ (m)

Agilent 8960 E 5515c

Network analyzer-R&S ZVL



graph 2

[www.Topant³.com.cn](http://www.Topant.com.cn)
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. has the materials provided by the proprietary technology, and these proprietary materials shall be strictly confidential and are not allowed to be disclosed to anyone or the company without the prior written consent of Shenzhen Daxian Technology Co., Ltd.

3 Test

3.1 Standing Wave (VSWR) test

3.1.1 3. Test connection: The sequential connection of the VSWR test device is: R & S ZVL network analyzer test line test and treatment

Measured (attached)

3.2 Gain and efficiency, power (TRP), sensitivity (TIS) testing

3.2.1 Test Site:

Large display microwave dark chamber. The test frequency range was 400MHz-6GHz, the static area range was 50cm circumference, and the reflectivity was less than-50 dB.

3.2.2 Test instrument:

R & S ZVL Network Analyzer, Agilent8960 E5515C, Standard Speaker Antenna, French SATIMO-SG24SYSTEM System, Printer, etc.

3.2.3 Test data: In the microwave dark room, the test power and sensitivity-related values are shown in the following table:

OTA active test data:

BAND	CH	TRP	TIS
FDD-B2	18600	20.95	
	18900	20.08	
	19200	19.37	-98.28
FDD-B4	20050	19.15	
	20175	20.78	
	20350	20.9	-94.87
FDD-B5	20450	21.18	
	20525	20.85	
	20600	20.61	-92.91
FDD-B13	23230	19.99	
	23230	19.55	
	23230	19.31	-92.8
TDD-B66	66486	19.04	
	66786	20.24	
	67086	21.13	-95.36

www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. has the materials provided by the proprietary technology, and these proprietary materials shall be strictly confidential and are not allowed to be disclosed to anyone or the company without the prior written consent of Shenzhen Daxian Technology Co., Ltd.

OTA Passive Efficiency & Gain-Main antenna-WCDMA

W-B2

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
1820	40.39	-3.94	2.83
1830	39.54	-4.03	2.83
1840	38.12	-4.19	2.71
1850	36.9	-4.33	2.74
1860	38.32	-4.17	3
1870	39.19	-4.07	3.22
1880	36.92	-4.33	3.05
1890	35.98	-4.44	2.97
1900	37.47	-4.26	3.11
1910	39.14	-4.07	3.17
1920	38.52	-4.14	3.05
1930	36.45	-4.38	2.7
1940	38.75	-4.12	3
1950	40.05	-3.97	3.01
1960	38.67	-4.13	2.73
1970	38.11	-4.19	2.42
1980	38.93	-4.1	2.27
1990	40.11	-3.97	2.17
2000	39.24	-4.06	1.77

W-B5

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
820	63.71	-1.96	0.1
830	65.45	-1.84	0.3
840	61.21	-2.13	0.05
850	58.95	-2.3	-0.09
860	53.51	-2.72	-0.55
870	47.83	-3.2	-1.21
880	40.93	-3.88	-2.16
890	36.9	-4.33	-2.11
900	33.47	-4.75	-1.68

W-B4

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
1700	46.69	-3.31	2.19
1710	44.51	-3.52	2.21
1720	41.01	-3.87	2.4
1730	40.51	-3.92	2.58
1740	40.98	-3.87	3.04
1750	39.37	-4.05	3.03
1760	38.31	-4.17	3.03
1770	39.15	-4.07	3.12
1780	41.81	-3.79	3.25
1790	40.67	-3.91	3.12
1800	40.17	-3.96	2.96
1810	39.7	-4.01	2.95
1820	40.39	-3.94	2.83
1830	39.54	-4.03	2.83
1840	38.12	-4.19	2.71
1850	36.9	-4.33	2.74
1860	38.32	-4.17	3
1870	39.19	-4.07	3.22
1880	36.92	-4.33	3.05
1890	35.98	-4.44	2.97
1900	37.47	-4.26	3.11
1910	39.14	-4.07	3.17
1920	38.52	-4.14	3.05
1930	36.45	-4.38	2.7
1940	38.75	-4.12	3
1950	40.05	-3.97	3.01
1960	38.67	-4.13	2.73
1970	38.11	-4.19	2.42
1980	38.93	-4.1	2.27
1990	40.11	-3.97	2.17
2000	39.24	-4.06	1.77
2010	37.47	-4.26	1.08
2020	38.88	-4.1	0.64
2030	41.15	-3.86	0.56
2040	43.3	-3.63	0.53
2050	44.95	-3.47	0.67
2060	45.86	-3.39	0.67
2070	46.13	-3.36	0.88
2080	45.85	-3.39	0.93
2090	43.96	-3.57	0.89
2100	42.59	-3.71	0.77
2110	41.41	-3.83	0.56
2120	41.16	-3.85	0.49
2130	40.65	-3.91	0.3
2140	38.65	-4.13	0.17
2150	38.92	-4.1	0.2
2160	39.1	-4.08	0.29
2170	37.74	-4.23	0.4
2180	38.42	-4.15	0.55

www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. has the materials provided by the proprietary technology, and these proprietary materials shall be strictly confidential and are not allowed to be disclosed to anyone or the company without the prior written consent of Shenzhen Daxian Technology Co., Ltd.

OTA Passive Efficiency & Gain-Main antenna-LTE

B2,B4,B5,B7,B25,B26,B38,B41

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
820	49.71	-3.04	-0.7
830	45.71	-3.4	-0.35
840	45.41	-3.43	-0.34
850	44.86	-3.48	-1.04
860	43.21	-3.64	-1.85
870	41.29	-3.84	-1.8
880	36.9	-4.33	-2.11
890	33.47	-4.75	-1.68

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
2500	53.2	-2.74	1.77
2510	52.74	-2.78	1.68
2520	52.5	-2.8	1.49
2530	50.66	-2.95	1.3
2540	49.4	-3.06	1.23
2550	49.45	-3.06	1.24
2560	50.26	-2.99	1.3
2570	51.02	-2.92	1.44
2580	53.41	-2.72	1.59
2590	55.83	-2.53	1.79
2600	56.08	-2.51	1.85
2610	59.21	-2.28	2.02
2620	59.87	-2.23	2.19
2630	59.45	-2.26	2.18
2640	57.63	-2.39	2.27
2650	57.95	-2.37	2.27
2660	57.08	-2.44	2.38
2670	52.92	-2.76	2.33
2680	53.64	-2.71	2.41
2690	55.56	-2.55	2.67
2700	56.4	-2.49	2.74

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
1700	46.69	-3.31	2.19
1710	44.51	-3.52	2.21
1720	41.01	-3.87	2.4
1730	40.51	-3.92	2.58
1740	40.98	-3.87	3.04
1750	39.37	-4.05	3.03
1760	38.31	-4.17	3.03
1770	39.15	-4.07	3.12
1780	41.81	-3.79	3.25
1790	40.67	-3.91	3.12
1800	40.17	-3.96	2.96
1810	39.7	-4.01	2.95
1820	40.39	-3.94	2.83
1830	39.54	-4.03	2.83
1840	38.12	-4.19	2.71
1850	36.9	-4.33	2.74
1860	38.32	-4.17	3
1870	39.19	-4.07	3.22
1880	36.92	-4.33	3.05
1890	35.98	-4.44	2.97
1900	37.47	-4.26	3.11
1910	39.14	-4.07	3.17
1920	38.52	-4.14	3.05
1930	36.45	-4.38	2.7
1940	38.75	-4.12	3
1950	40.05	-3.97	3.01
1960	38.67	-4.13	2.73
1970	38.11	-4.19	2.42
1980	38.93	-4.1	2.27
1990	40.11	-3.97	2.17
2100	42.59	-3.71	0.77
2110	41.41	-3.83	0.56
2120	41.16	-3.85	0.49
2130	40.65	-3.91	0.3
2140	38.65	-4.13	0.17
2150	38.92	-4.1	0.2
2160	39.1	-4.08	0.29
2170	37.74	-4.23	0.4
2180	38.42	-4.15	0.55
2190	40.15	-3.96	0.77
2200	42.84	-3.68	1.17

www.Topant.com.cn

Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. has the materials provided by the proprietary technology, and these proprietary materials shall be strictly confidential and are not allowed to be disclosed to anyone or the company without the prior written consent of Shenzhen Daxian Technology Co., Ltd.

OTA Passive Efficiency & Gain-Main antenna-LTE

B12

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
690	19.3	-7.14	-4.89
700	20.34	-6.92	-4.84
710	22.74	-6.43	-4.59
720	26.03	-5.84	-3.76
730	28.15	-5.5	-3.48
740	29.07	-5.37	-3.49
750	30.26	-5.19	-3.45

B13

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
740	34.3	-4.65	-2.98
750	35.74	-4.47	-2.87
760	35.68	-4.48	-3.18
770	39.95	-3.99	-2.48
780	41.74	-3.79	-2.34
790	44.49	-3.52	-1.65

B26

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
810	58.28	-2.34	-0.27
820	63.71	-1.96	0.1
830	65.45	-1.84	0.3
840	61.21	-2.13	0.05
850	58.95	-2.3	-0.09
860	53.51	-2.72	-0.55
870	47.83	-3.2	-1.21
880	40.93	-3.88	-2.16
890	36.9	-4.33	-2.11
900	33.47	-4.75	-1.68

B71

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
620	10.25	-9.89	-7.86
630	10.28	-9.88	-7.81
640	11.3	-9.47	-5.62
650	14.81	-8.29	-4.98
660	16.84	-7.74	-4.59
670	17.89	-7.47	-4.7
680	21.09	-6.76	-4.27
690	24.23	-6.16	-4.04
700	26.18	-5.82	-3.69

4. Conclusion:

This antenna is designed on the basis of customer-provided prototype. Electrical parameters and structural performance have met the technical requirements. Please confirm!


www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. has the materials provided by the proprietary technology, and these proprietary materials shall be strictly confidential and are not allowed to be disclosed to anyone or the company without the prior written consent of Shenzhen Daxian Technology Co., Ltd.


5. Attachment chart

5.1 Parameters of Return Loss and VSWR and impedance diagram- -main antenna

RF1:B5/Medium high frequency

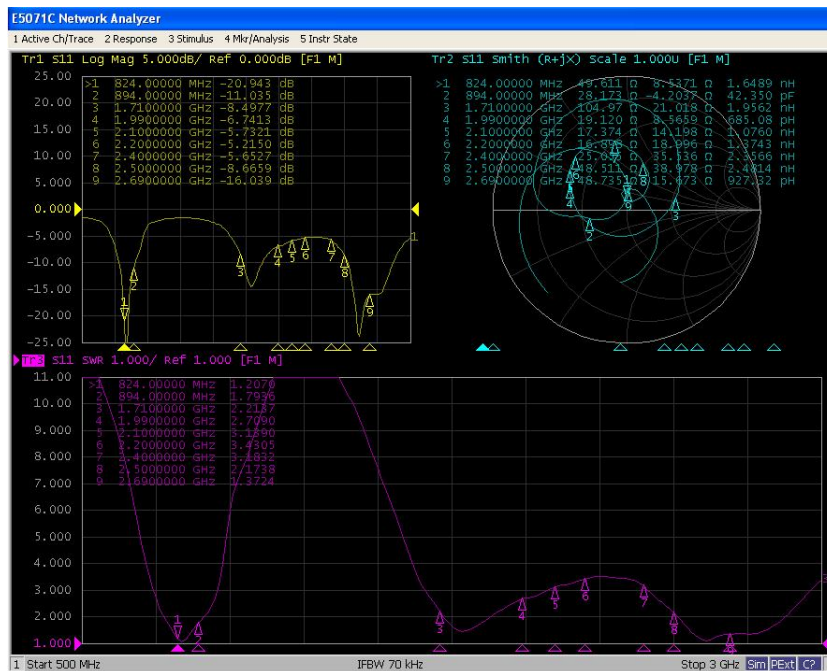

RF2:B13

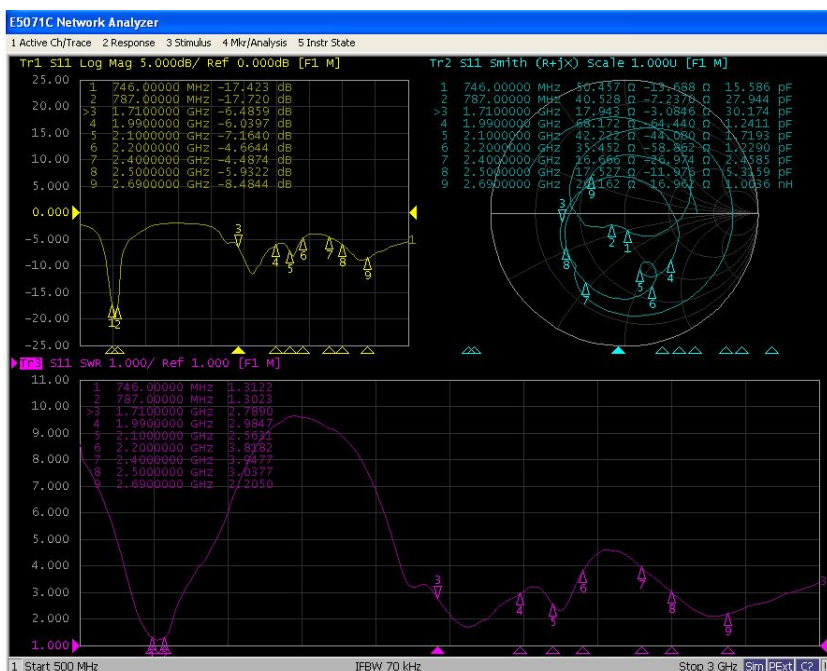


www.Topant.com.cn
Confidentiality requirements


Shenzhen Daxian Technology Co., Ltd. has the materials provided by the proprietary technology, and these proprietary materials shall be strictly confidential and are not allowed to be disclosed to anyone or the company without the prior written consent of Shenzhen Daxian Technology Co., Ltd.

6. Field pattern diagram


B5-TRP

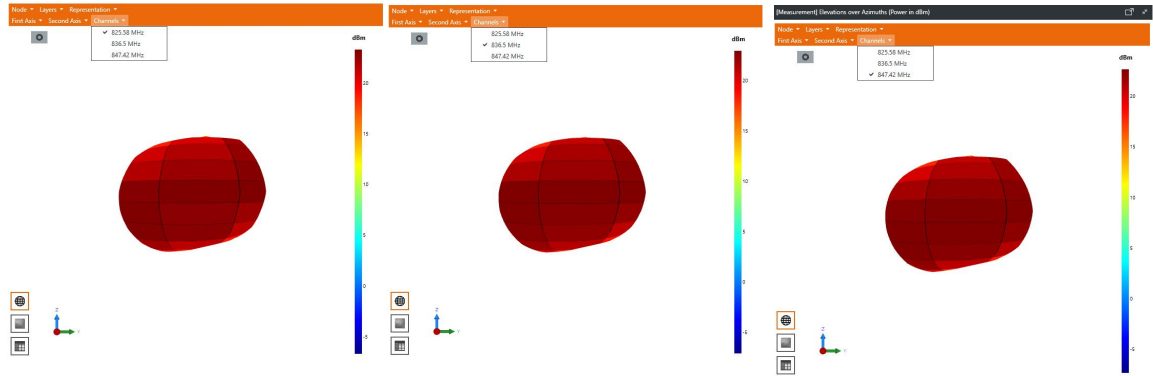


B5-TIS

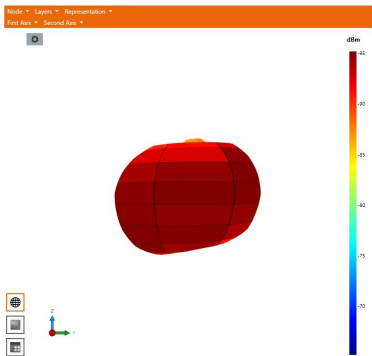

B13-TRP

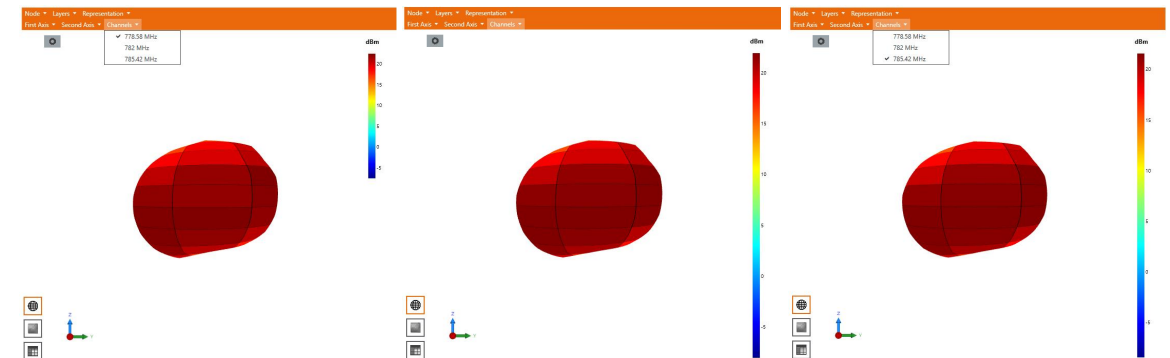

B13-TIS

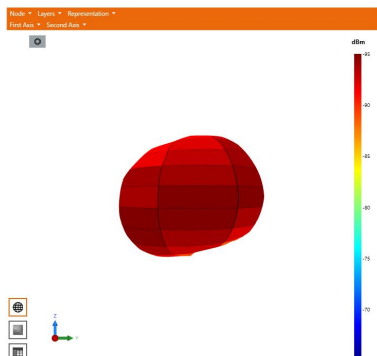


www.Topant.com.cn
Confidentiality requirements


Shenzhen Daxian Technology Co., Ltd. has the materials provided by the proprietary technology, and these proprietary materials shall be strictly confidential and are not allowed to be disclosed to anyone or the company without the prior written consent of Shenzhen Daxian Technology Co., Ltd.

6.1 Field pattern diagram


B2-TRP

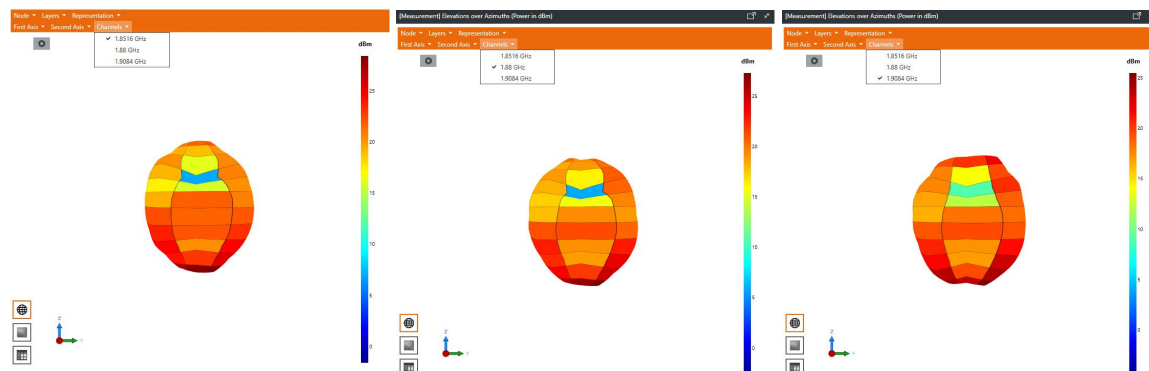


B2-TIS

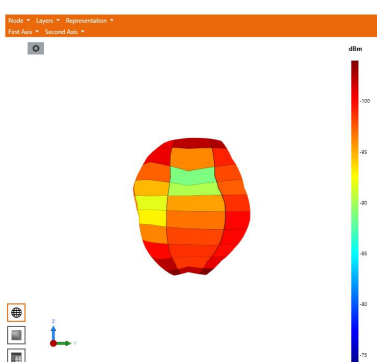

B4-TRP

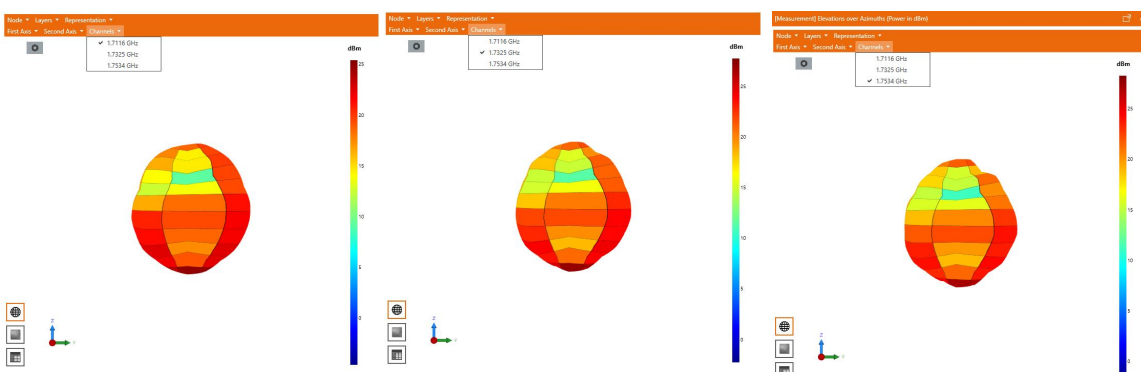

B4-TIS

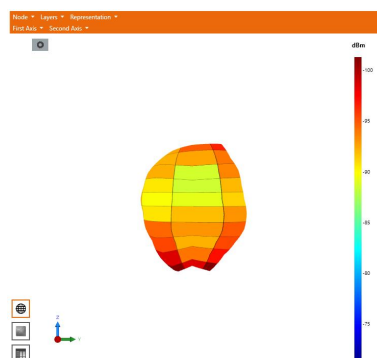


www.Topant.com.cn
Confidentiality requirements


Shenzhen Daxian Technology Co., Ltd. has the materials provided by the proprietary technology, and these proprietary materials shall be strictly confidential and are not allowed to be disclosed to anyone or the company without the prior written consent of Shenzhen Daxian Technology Co., Ltd.

6.1.1 Field pattern diagram

B66-TRP

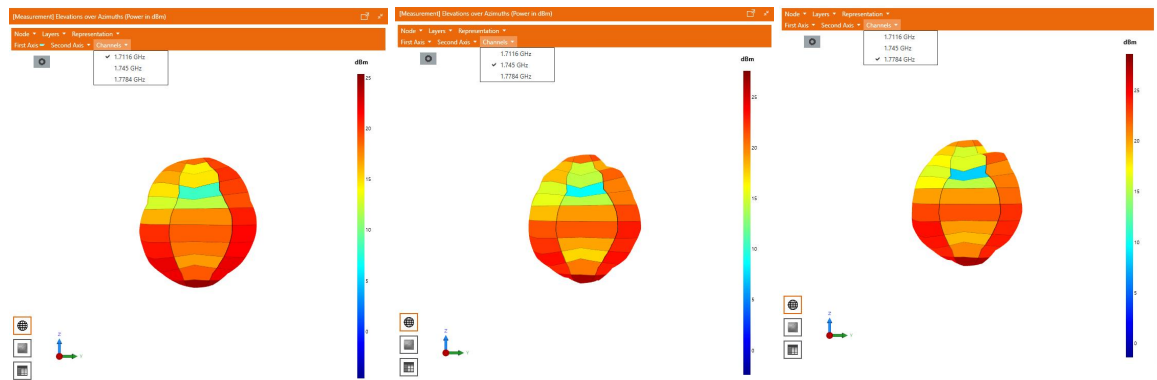

B66-TIS

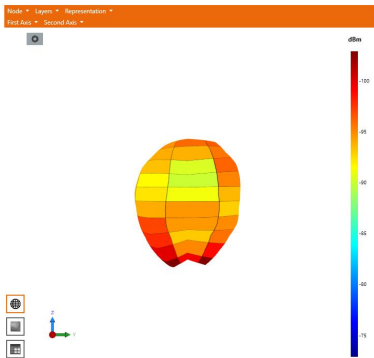


www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. has the materials provided by the proprietary technology, and these proprietary materials shall be strictly confidential and are not allowed to be disclosed to anyone or the company without the prior written consent of Shenzhen Daxian Technology Co., Ltd.


7.2D&3DPassive field type diagram-WCDMA

W-B2


1850.000MHz




1880.000MHz



1900.000MHz




1980.000MHz




W-B4


1710.000MHz




1730.000MHz



1750.000MHz




2150.000MHz




W-B5


830.000MHz




840.000MHz



850.000MHz



890.000MHz




www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. has the materials provided by the proprietary technology, and these proprietary materials shall be strictly confidential and are not allowed to be disclosed to anyone or the company without the prior written consent of Shenzhen Daxian Technology Co., Ltd.


8.2D&3DPassive field type diagram-LTE

B5


820.000MHz



860.000MHz




890.000MHz




Medium high frequency


1700.000MHz



2300.000MHz




2690.000MHz




B12


700.000MHz



730.000MHz




750.000MHz




www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. has the materials provided by the proprietary technology, and these proprietary materials shall be strictly confidential and are not allowed to be disclosed to anyone or the company without the prior written consent of Shenzhen Daxian Technology Co., Ltd.


B13

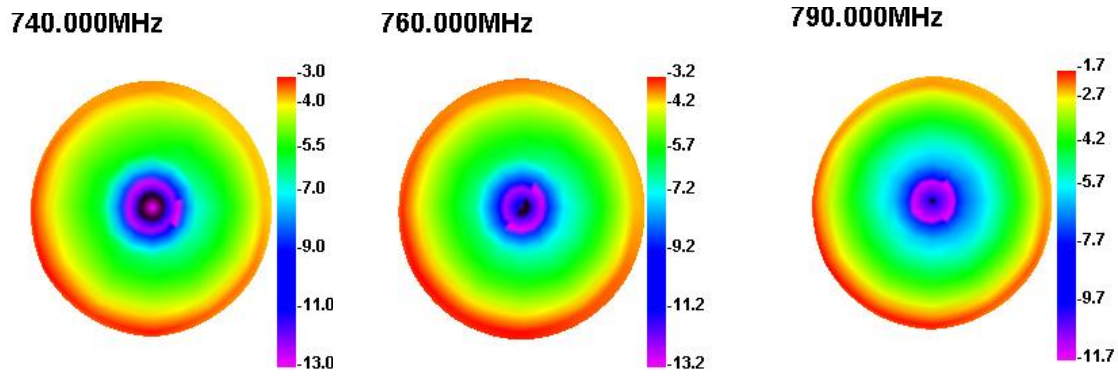

B26

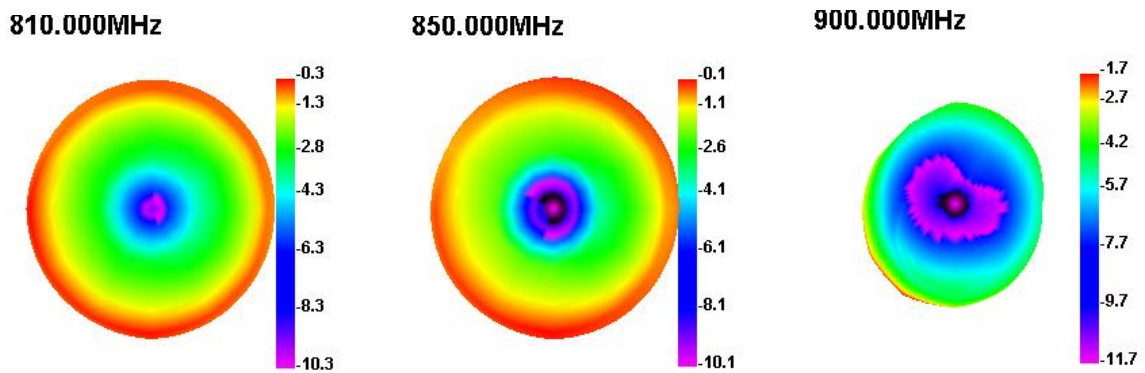


B71

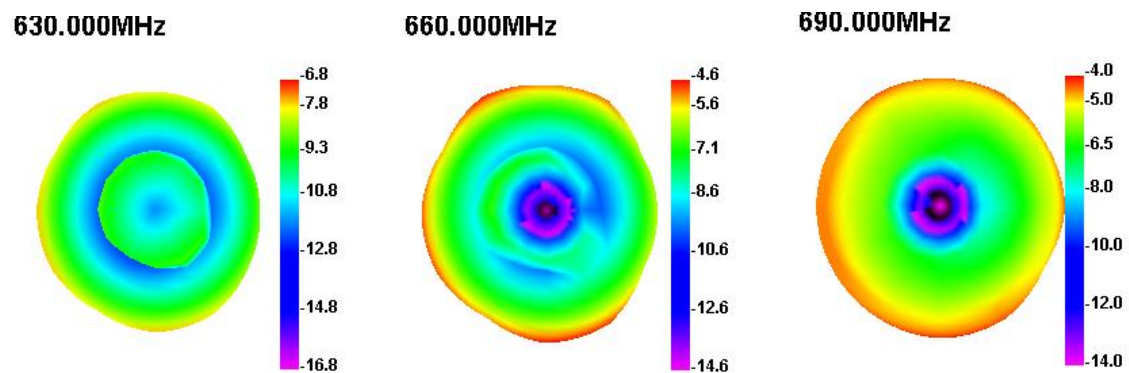

www.Topant.com.cn
Confidentiality requirements


Shenzhen Daxian Technology Co., Ltd. has the materials provided by the proprietary technology, and these proprietary materials shall be strictly confidential and are not allowed to be disclosed to anyone or the company without the prior written consent of Shenzhen Daxian Technology Co., Ltd.

9. Matching circuit

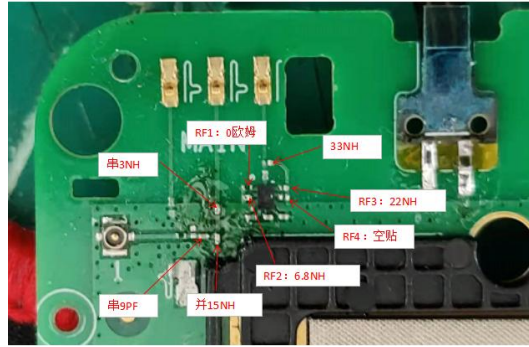

主天线开关逻辑			
Element	Number	value	Band
RF1		0欧姆	LTE B2/4/5/41/66 WCDMA 2/4/5
RF2		6.8NH	LTE B13
RF3		22NH	LTE B12
RF4		空贴	LTE B71

10. Environmental treatment

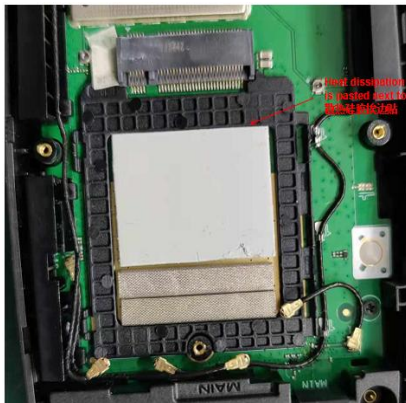

The coaxial line here interferes with the shell structure, and the bone position on the shell needs to be cut off.
此处同轴线与壳料结构干涉，壳料上的骨位需要剪掉。



The width of the conductive cloth must be increased, or it will affect the IF TIS. At present, two conductive sponges are pasted to increase the grounding width.

导电布的宽度必须加大，否则对中频 TIS 有影响。目前是贴了两条导电海绵增加接地宽度。

The module should be grounded with the main board shield, otherwise it will have a great impact on the low-frequency TIS. Current conductive cloth size: 23mm * 58mm.

模块要跟主板屏蔽罩接地，否则对低频 TIS 影响很大。目前的导电布尺寸：23mm*58mm。

The coaxial line here interferes with the shell material structure, and the bone position on the shell material needs to be reduced. (The coaxial line here is bent to avoid B48 receiving coaxial line being too close to the antenna).
此处同轴线与壳料结构干涉，壳料上的骨位需要减掉。（此处同轴线折弯，避免 B48 接收同轴线离天线太近）。

www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. has the materials provided by the proprietary technology, and these proprietary materials shall be strictly confidential and are not allowed to be disclosed to anyone or the company without the prior written consent of Shenzhen Daxian Technology Co., Ltd.

