

# **FCC TEST REPORT**

**Test report  
On Behalf of  
Shenzhen Zhanjie Wenda Electronics Co., Ltd  
For  
Bluetooth Earphone  
Model No.: Y100, Y880, Y550, Y660, Y990, Y770, S770, F10,  
F437, F439, M1, M2, R948, BS460, BS470, BS480, BS490,  
BS500, BS510, BS520  
FCC ID: 2AM56-Y100**

**Prepared for :** Shenzhen Zhanjie Wenda Electronics Co., Ltd  
No.201,East Building,Baer Road, Bantian High-Tech Industrial,  
Longgang,Shenzhen,China

**Prepared By :** Laboratory of Shenzhen United Testing Technology Co., Ltd  
Room 316-319, Block B, Honghualing Industrial Park of the Fifth Zone, Taoyuan  
Street, Nanshan District, Shenzhen, Guangdong, China

**Date of Test:** Jun. 20, 2017 ~ Jun. 27, 2017  
**Date of Report:** Jun. 27, 2017  
**Report Number:** UNI170620061-E

## TEST RESULT CERTIFICATION

**Applicant's name** ..... : Shenzhen Zhanjie Wenda Electronics Co., Ltd  
**Address** ..... : No.201,East Building,Baer Road, Bantian High-Tech Industrial,  
Longgang,Shenzhen,China  
**Manufacture's Name**..... : Shenzhen Zhanjie Wenda Electronics Co., Ltd  
**Address** ..... : No.201,East Building,Baer Road, Bantian High-Tech Industrial,  
Longgang,Shenzhen,China  
**Product description**  
**Trade Mark:** N/A  
**Product name** ..... : Bluetooth Earphone  
**Model and/or type reference** : Y100, Y880, Y550, Y660, Y990, Y770, S770, F10, F437, F439,  
M1, M2, R948, BS460, BS470, BS480, BS490,  
BS500, BS510, BS520  
**Standards** ..... : FCC Rules and Regulations Part 15 Subpart C Section 15.249  
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the **Laboratory of Shenzhen United Testing Technology Co., Ltd** is acknowledged as copyright owner and source of the material. **Laboratory of Shenzhen United Testing Technology Co., Ltd** takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Date of Test** ..... :  
**Date (s) of performance of tests** ..... : Jun. 20, 2017 ~ Jun. 27, 2017  
**Date of Issue**..... : Jun. 27, 2017  
**Test Result**..... : **Pass**

Testing Engineer :



(Eric Xie)

Technical Manager :



(Dora Qin)

Authorized Signatory :



(Kait Chen)

| <b>Table of Contents</b>                | <b>Page</b> |
|-----------------------------------------|-------------|
| 1 . TEST SUMMARY                        | 4           |
| 2 . GENERAL INFORMATION                 | 5           |
| 2.1 GENERAL DESCRIPTION OF EUT          | 5           |
| 2.2 Operation of EUT during testing     | 6           |
| 2.3 DESCRIPTION OF TEST SETUP           | 6           |
| 2.4 MEASUREMENT INSTRUMENTS LIST        | 7           |
| 3 . CONDUCTED EMISSIONS TEST            | 8           |
| 3.1 Conducted Power Line Emission Limit | 8           |
| 3.2 Test Setup                          | 8           |
| 3.3 Test Procedure                      | 8           |
| 3.4 Test Result                         | 8           |
| 4 RADIATED EMISSION TEST                | 11          |
| 4.1 Radiation Limit                     | 11          |
| 4.2 Test Setup                          | 11          |
| 4.3 Test Procedure                      | 12          |
| 4.4 Test Result                         | 12          |
| 5 BAND EDGE                             | 18          |
| 5.1 Limits                              | 18          |
| 5.2 Test Procedure                      | 18          |
| 5.3 Test Result                         | 18          |
| 6 OCCUPIED BANDWIDTH MEASUREMENT        | 20          |
| 6.1 Test Setup                          | 20          |
| 6.2 Test Procedure                      | 20          |
| 6.3 Measurement Equipment Used          | 20          |
| 6.4 Test Result                         | 20          |
| 7 ANTENNA REQUIREMENT                   | 22          |
| 8 PHOTOGRAPH OF TEST                    | 23          |
| 8.1 Radiated Emission                   | 23          |

## 1. TEST SUMMARY

### 1.1 TEST PROCEDURES AND RESULTS

| DESCRIPTION OF TEST            | RESULT    |
|--------------------------------|-----------|
| CONDUCTED EMISSIONS TEST       | COMPLIANT |
| RADIATED EMISSION TEST         | COMPLIANT |
| BAND EDGE                      | COMPLIANT |
| OCCUPIED BANDWIDTH MEASUREMENT | COMPLIANT |
| ANTENNA REQUIREMENT            | COMPLIANT |

### 1.2 TEST FACILITY

Test Firm : QTC Certification & Testing Co., Ltd.  
Certificated by FCC, Registration No.: 588523  
Address 2nd Floor,B1 Building,Fengyeyuan Industrial Plant, Liuxian 2st. Road,  
Xin'an Street, Bao'an District, Shenzhen, China

### 1.3 MEASUREMENT UNCERTAINTY

|                                                       |               |
|-------------------------------------------------------|---------------|
| Measurement Uncertainty                               |               |
| Conducted Emission Expanded Uncertainty               | = 2.23dB, k=2 |
| Radiated emission expanded uncertainty(9kHz-30MHz)    | = 3.08dB, k=2 |
| Radiated emission expanded uncertainty(30MHz-1000MHz) | = 4.42dB, k=2 |
| Radiated emission expanded uncertainty(Above 1GHz)    | = 4.06dB, k=2 |

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

|                        |                                                                                                                    |
|------------------------|--------------------------------------------------------------------------------------------------------------------|
| Equipment              | Bluetooth Earphone                                                                                                 |
| Model Name             | Y100                                                                                                               |
| Serial No              | Y880, Y550, Y660, Y990, Y770, S770, F10, F437, F439, M1, M2, R948, BS460, BS470, BS480, BS490, BS500, BS510, BS520 |
| Model Difference       | All models are identical except model names.                                                                       |
| FCC ID                 | 2AM56-Y100                                                                                                         |
| Antenna Type           | PCB Antenna                                                                                                        |
| Antenna Gain           | 0 dBi                                                                                                              |
| BT Operation frequency | 2402-2480MHz                                                                                                       |
| Number of Channels     | 79CH                                                                                                               |
| Modulation Type        | GFSK                                                                                                               |
| Power Source           | N/A                                                                                                                |
| Power Rating           | DC3.7V From Battery or DC5V 1A form Adapter with AC 120V/60Hz                                                      |

### 2.1.1 Carrier Frequency of Channels

| Channel List |                 |         |                 |         |                 |
|--------------|-----------------|---------|-----------------|---------|-----------------|
| Channel      | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 00           | 2402            | 27      | 2429            | 54      | 2456            |
| 01           | 2403            | 28      | 2430            | 55      | 2457            |
| 02           | 2404            | 29      | 2431            | 56      | 2458            |
| 03           | 2405            | 30      | 2432            | 57      | 2459            |
| 04           | 2406            | 31      | 2433            | 58      | 2460            |
| 05           | 2407            | 32      | 2434            | 59      | 2461            |
| 06           | 2408            | 33      | 2435            | 60      | 2462            |
| 07           | 2409            | 34      | 2436            | 61      | 2463            |
| 08           | 2410            | 35      | 2437            | 62      | 2464            |
| 09           | 2411            | 36      | 2438            | 63      | 2465            |
| 10           | 2412            | 37      | 2439            | 64      | 2466            |
| 11           | 2413            | 38      | 2440            | 65      | 2467            |
| 12           | 2414            | 39      | 2441            | 66      | 2468            |
| 13           | 2415            | 40      | 2442            | 67      | 2469            |
| 14           | 2416            | 41      | 2443            | 68      | 2470            |
| 15           | 2417            | 42      | 2444            | 69      | 2471            |
| 16           | 2418            | 43      | 2445            | 70      | 2472            |
| 17           | 2419            | 44      | 2446            | 71      | 2473            |
| 18           | 2420            | 45      | 2447            | 72      | 2474            |
| 19           | 2421            | 46      | 2448            | 73      | 2475            |
| 20           | 2422            | 47      | 2449            | 74      | 2476            |
| 21           | 2423            | 48      | 2450            | 75      | 2477            |
| 22           | 2424            | 49      | 2451            | 76      | 2478            |
| 23           | 2425            | 50      | 2452            | 77      | 2479            |
| 24           | 2426            | 51      | 2453            | 78      | 2480            |
| 25           | 2427            | 52      | 2454            |         |                 |
| 26           | 2428            | 53      | 2455            |         |                 |

### 2.2 Operation of EUT during testing

Operating Mode

The mode is used: **Transmitting mode**

Low Channel: 2402MHz

Middle Channel: 2441MHz

High Channel: 2480MHz

### 2.3 DESCRIPTION OF TEST SETUP

Operation of EUT during conducted testing:



Operation of EUT during Radiation and Above1GHz Radiation testing:



## 2.4 MEASUREMENT INSTRUMENTS LIST

| Item | Equipment                | Manufacturer         | Model No. | Serial No.    | Cal Date      | Due Date      |
|------|--------------------------|----------------------|-----------|---------------|---------------|---------------|
| 1.   | EMI Receiver             | Rohde & Schwarz      | ESCI      | 100627        | Feb. 18, 2017 | Feb. 17, 2018 |
| 2.   | LISN                     | SchwarzBeck          | NSLK 8126 | 8126377       | Feb. 18, 2017 | Feb. 17, 2018 |
| 3.   | RF Switching Unit        | Compliance Direction | RSU-M2    | 38303         | Feb. 18, 2017 | 1 Year        |
| 4.   | EMI Test Software ES-K1  | Rohde & Schwarz      | N/A       | N/A           | N/A           | N/A           |
| 5.   | EMI Test Receiver        | Rohde & Schwarz      | ESCI      | 100627        | Feb. 18, 2017 | Feb. 17, 2018 |
| 6.   | Trilog Broadband Antenna | Schwarzbeck          | VULB9163  | VULB 9163-289 | Feb. 18, 2017 | Feb. 17, 2018 |
| 7.   | Pre-amplifier            | Compliance Direction | PAP-0203  | 22008         | Feb. 18, 2017 | Feb. 17, 2018 |
| 8.   | EMI Test Software EZ-EMC | SHURPLE              | N/A       | N/A           | N/A           | N/A           |
| 9.   | EMI Receiver             | Rohde & Schwarz      | ESCI      | 100627        | Feb. 18, 2017 | Feb. 17, 2018 |
| 10.  | LISN                     | SchwarzBeck          | NSLK 8126 | 8126377       | Feb. 18, 2017 | Feb. 17, 2018 |
| 11.  | RF Switching Unit        | Compliance Direction | RSU-M2    | 38303         | Feb. 18, 2017 | Feb. 17, 2018 |
| 12.  | EMI Test Software ES-K1  | Rohde & Schwarz      | N/A       | N/A           | N/A           | N/A           |
| 13.  | EMI Receiver             | Rohde & Schwarz      | ESCI      | 100627        | Feb. 18, 2017 | Feb. 17, 2018 |
| 14.  | EMI Receiver             | Rohde & Schwarz      | ESCI      | 100627        | Feb. 18, 2017 | Feb. 17, 2018 |
| 15.  | LISN                     | SchwarzBeck          | NSLK 8126 | 8126377       | Feb. 18, 2017 | Feb. 17, 2018 |
| 16.  | RF Switching Unit        | Compliance Direction | RSU-M2    | 38303         | Feb. 18, 2017 | Feb. 17, 2018 |
| 17.  | EMI Test Software ES-K1  | Rohde & Schwarz      | N/A       | N/A           | N/A           | N/A           |
| 18.  | Power Meter              | R&S                  | NRVD      | SEL0069       | Feb. 18, 2017 | Feb. 17, 2018 |
| 19.  | Power Sensor             | R&S                  | URV5-Z2   | SEL0071       | Feb. 18, 2017 | Feb. 17, 2018 |
| 20.  | Power Sensor             | R&S                  | URV5-Z2   | SEL0072       | Feb. 18, 2017 | Feb. 17, 2018 |
| 21.  | Software EMC32           | R&S                  | EMC32-S   | SEL0082       | N/A           | N/A           |
| 22.  | Log-periodic Antenna     | Amplifier Reasearch  | APT1.580  | SEL0073       | Feb. 18, 2017 | Feb. 17, 2018 |
| 23.  | Loop Antenna             | Schwarz beck         | FMZB 1516 | 9773          | Feb. 18, 2017 | Feb. 17, 2018 |
| 24.  | Broadband Antenna        | Schwarz beck         | VULB9163  | 9163-333      | Feb. 18, 2017 | Feb. 17, 2018 |
| 25.  | Horn Antenna             | ETS                  | 3117      | 00086197      | Feb. 18, 2017 | Feb. 17, 2018 |
| 26.  | Horn Antenna             | Schwarzbeck          | BBHA9170  | BBHA9170582   | Feb. 18, 2017 | Feb. 17, 2018 |
| 27.  | Antenna Tripod           | Amplifier Reasearch  | TP1000A   | SEL0074       | Feb. 18, 2017 | Feb. 17, 2018 |
| 28.  | High Gain Horn Antenna   | Amplifier Reasearch  | AT4002A   | SEL0075       | Feb. 18, 2017 | Feb. 17, 2018 |
| 29.  | Spectrum analyzer        | Agilent              | N9020A    | MY499110048   | Feb. 18, 2017 | Feb. 17, 2018 |
| 30.  | Spectrum analyzer        | Agilent              | E4407B    | MY46184326    | Feb. 18, 2017 | Feb. 17, 2018 |
| 31.  | Spectrum analyzer        | R&S                  | FSP30     | 836079/035    | Feb. 18, 2017 | Feb. 17, 2018 |

### 3. CONDUCTED EMISSIONS TEST

#### 3.1 Conducted Power Line Emission Limit


For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following

| Frequency (MHz) | Maximum RF Line Voltage (dBμV) |      |         |        |
|-----------------|--------------------------------|------|---------|--------|
|                 | CLASS A                        |      | CLASS B |        |
|                 | Q.P.                           | Ave. | Q.P.    | Ave.   |
| 0.15 - 0.50     | 79                             | 66   | 66-56*  | 56-46* |
| 0.50 - 5.00     | 73                             | 60   | 56      | 46     |
| 5.00 - 30.0     | 73                             | 60   | 60      | 50     |

\* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

#### 3.2 Test Setup

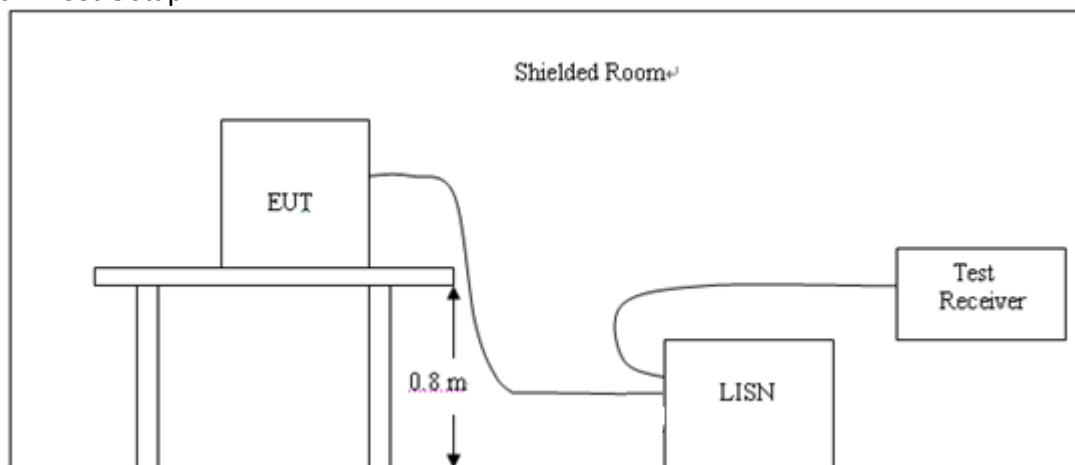

#### 3.3 Test Procedure


- 1, The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.1 meters is used and is placed on the ground plane as per ANSI C63.10.
- 2, Support equipment, if needed, was placed as per ANSI C63.10.
- 3, All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4, If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5, All support equipments received AC power from a second LISN, if any.
- 6, The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7, Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.

#### 3.4 Test Result

PASS


All the test modes completed for test.

Test Specification: Line

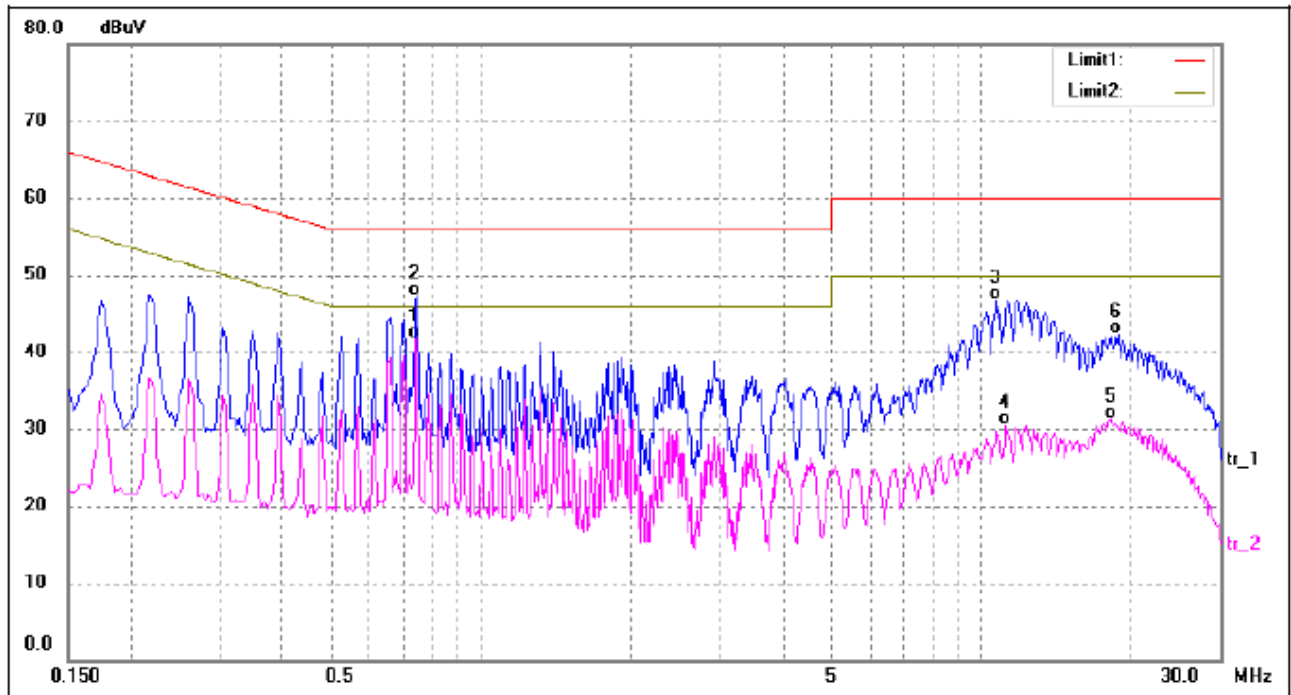

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | Result<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|-------------------|------------------|-----------------|----------------|----------|
| 1*  | 0.7420             | 31.92             | 9.78              | 41.70            | 46.00           | -4.30          | AVG      |
| 2   | 0.7460             | 37.50             | 9.78              | 47.28            | 56.00           | -8.72          | QP       |
| 3   | 10.7300            | 37.21             | 9.53              | 46.74            | 60.00           | -13.26         | QP       |
| 4   | 11.1900            | 21.01             | 9.54              | 30.55            | 50.00           | -19.45         | AVG      |
| 5   | 18.0460            | 21.67             | 9.65              | 31.32            | 50.00           | -18.68         | AVG      |
| 6   | 18.7500            | 32.55             | 9.66              | 42.21            | 60.00           | -17.79         | QP       |

## Test Specification: Neutral

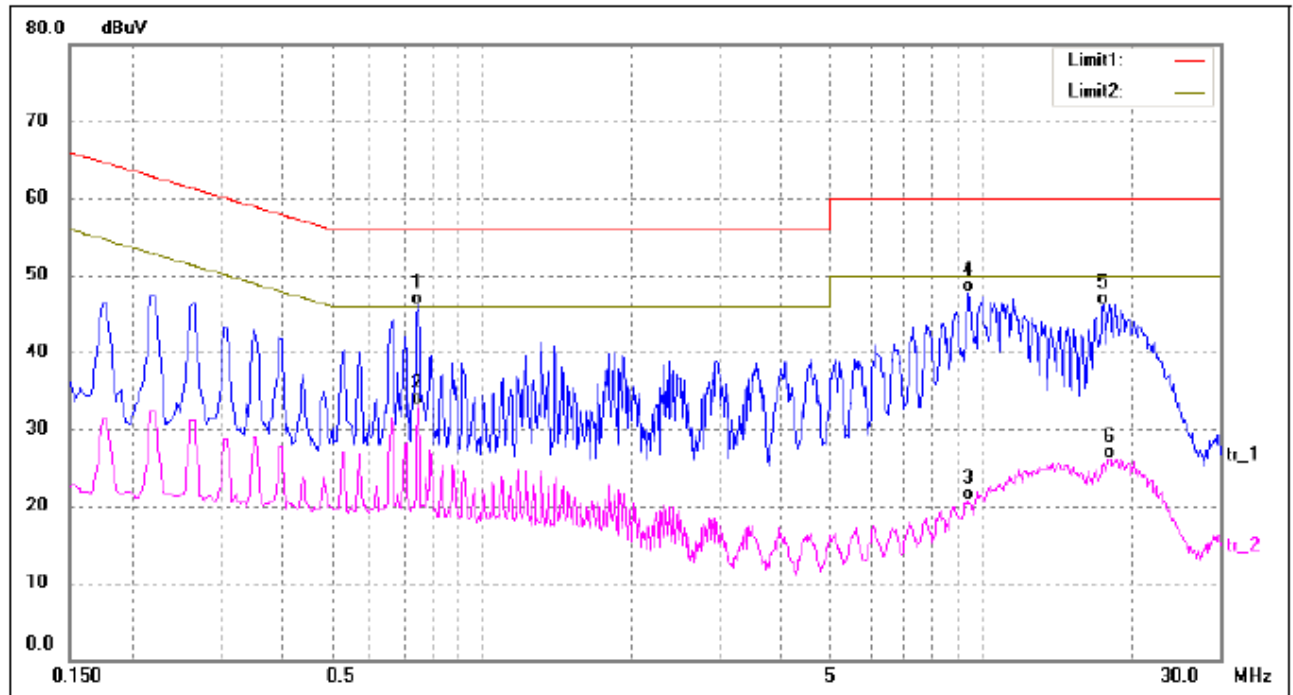

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | Result<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|-------------------|------------------|-----------------|----------------|----------|
| 1*  | 0.7460             | 36.40             | 9.78              | 46.18            | 56.00           | -9.82          | QP       |
| 2   | 0.7460             | 23.27             | 9.78              | 33.05            | 46.00           | -12.95         | AVG      |
| 3   | 9.3540             | 11.15             | 9.54              | 20.69            | 50.00           | -29.31         | AVG      |
| 4   | 9.4300             | 38.18             | 9.54              | 47.72            | 60.00           | -12.28         | QP       |
| 5   | 17.5260            | 36.52             | 9.65              | 46.17            | 60.00           | -13.83         | QP       |
| 6   | 18.0180            | 16.49             | 9.65              | 26.14            | 50.00           | -23.86         | AVG      |

## 4 RADIATED EMISSION TEST

### 4.1 Radiation Limit


For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

| Frequency (MHz) | Distance (Meters) | Radiated (dBμV/m)                          | Radiated (μV/m)       |
|-----------------|-------------------|--------------------------------------------|-----------------------|
| 0.009-0.49      | 3                 | $20\log(2400/F(\text{KHz}))+40\log(300/3)$ | $2400/F(\text{KHz})$  |
| 0.49-1.705      | 3                 | $20\log(24000/F(\text{KHz}))+40\log(30/3)$ | $24000/F(\text{KHz})$ |
| 1.705-30        | 3                 | $20\log(30)+40\log(30/3)$                  | 30                    |
| 30-88           | 3                 | 40.0                                       | 100                   |
| 88-216          | 3                 | 43.5                                       | 150                   |
| 216-960         | 3                 | 46.0                                       | 200                   |
| Above 960       | 3                 | 54.0                                       | 500                   |


For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

### 4.2 Test Setup


#### (1) Radiated Emission Test-Up Frequency Below 30MHz

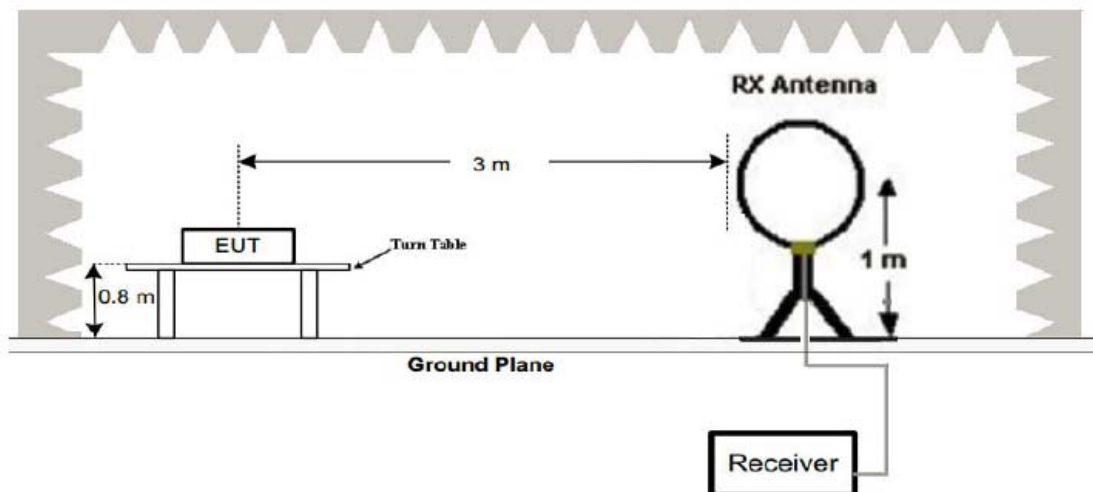

#### (2) Radiated Emission Test-Up Frequency 30MHz~1GHz

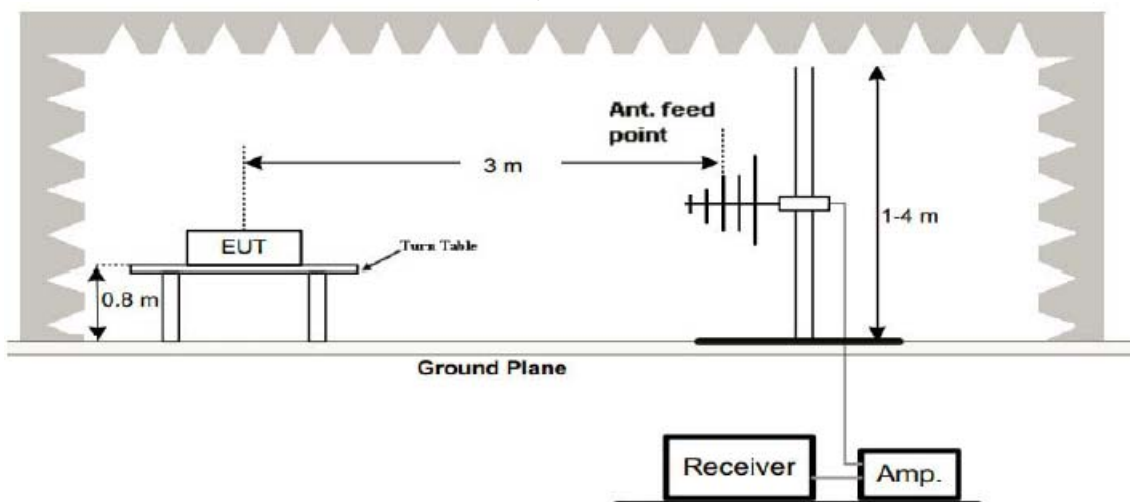

## (3) Radiated Emission Test-Up Frequency Above 1GHz

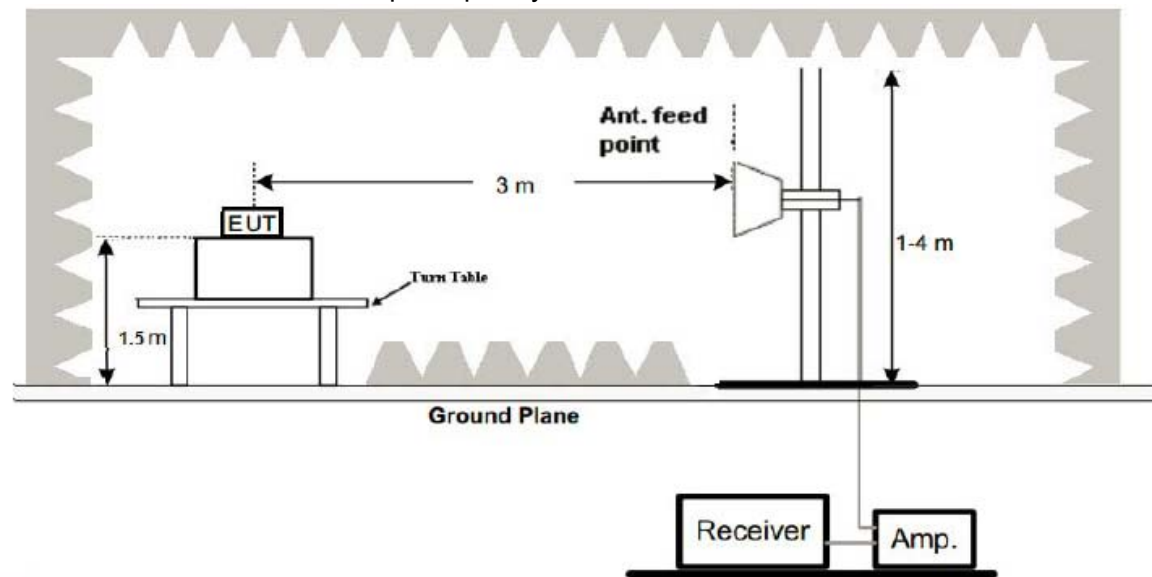

## 4.3 Test Procedure

1. Below 1GHz measurement the EUT is placed on turntable which is 0.1m above ground plane. And above 1GHz measurement EUT was placed on low permittivity and low tangent turn table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The test frequency range from 9KHz to 25GHz per FCC PART 15.33(a).

## Note:


For battery operated equipment, the equipment tests shall be performed using a new battery.

## 4.4 Test Result

## PASS


All the test modes completed for test. The worst case of Radiated Emission is CH 2402; the test data of this mode was reported.

Below 1GHz Test Results:  
Antenna polarity: H

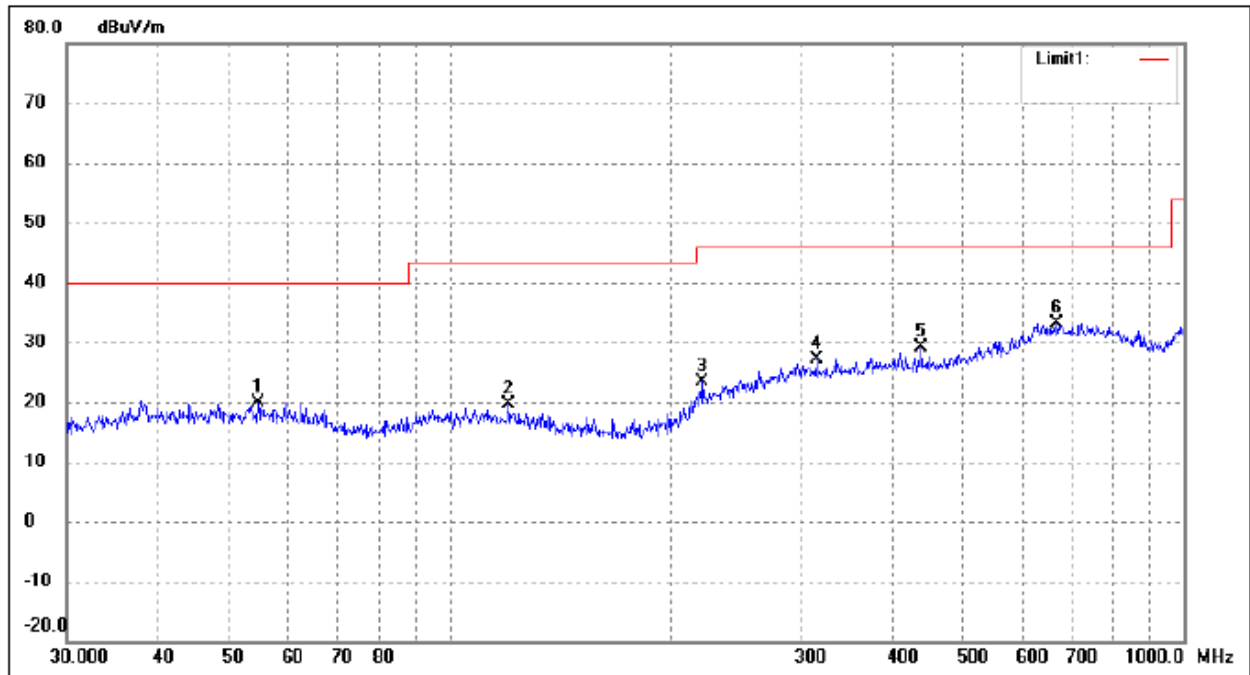

| No. | Frequency<br>(MHz) | Reading<br>(dBuV/m) | Correct<br>dB/m | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Degree<br>( ) | Height<br>(cm) | Remark |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|---------------|----------------|--------|
| 1   | 54.6429            | 14.84               | 5.04            | 19.88              | 40.00             | -20.12         | 134           | 100            | peak   |
| 2   | 119.8556           | 14.84               | 4.82            | 19.66              | 43.50             | -23.84         | 172           | 100            | peak   |
| 3   | 220.6171           | 15.79               | 7.71            | 23.50              | 46.00             | -22.50         | 114           | 100            | peak   |
| 4   | 315.4808           | 15.24               | 11.95           | 27.19              | 46.00             | -18.81         | 144           | 100            | peak   |
| 5   | 438.6554           | 16.77               | 12.46           | 29.23              | 46.00             | -16.77         | 357           | 100            | peak   |
| 6   | 670.4893           | 15.02               | 18.16           | 33.18              | 46.00             | -12.82         | 94            | 100            | peak   |

Antenna polarity: V

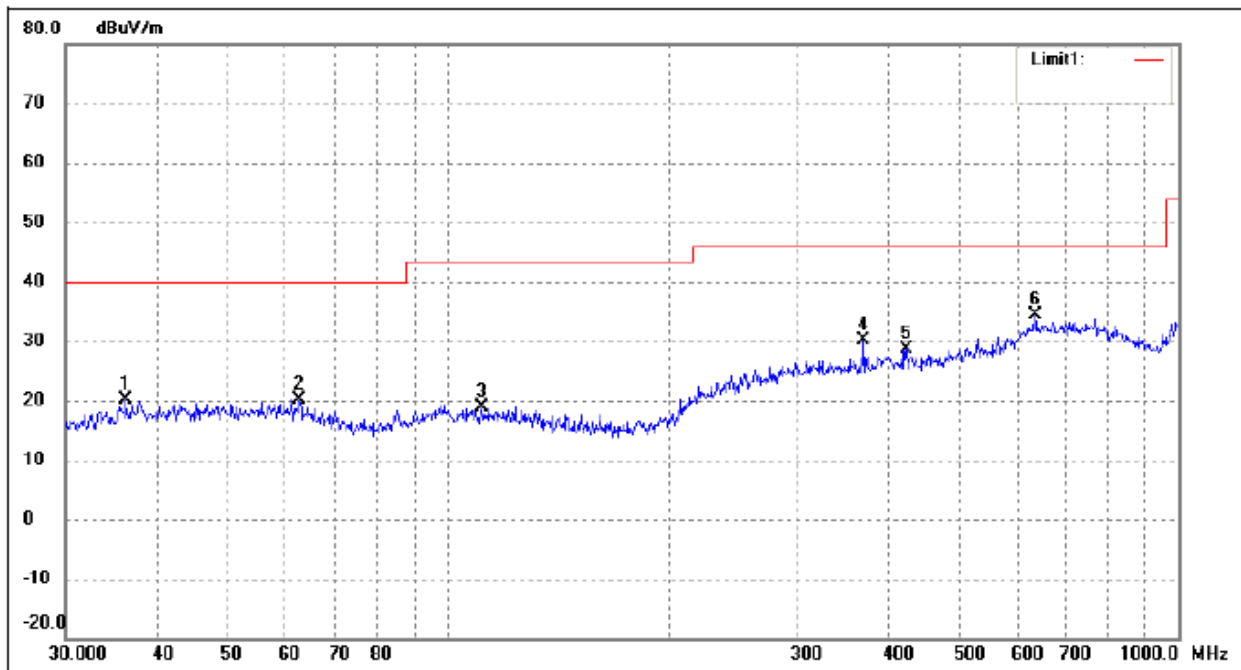

| No. | Frequency<br>(MHz) | Reading<br>(dBuV/m) | Correct<br>dB/m | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Degree<br>( ) | Height<br>(cm) | Remark |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|---------------|----------------|--------|
| 1   | 36.2541            | 15.65               | 4.38            | 20.03              | 40.00             | -19.97         | 72            | 100            | peak   |
| 2   | 62.6507            | 15.59               | 4.49            | 20.08              | 40.00             | -19.92         | 146           | 100            | peak   |
| 3   | 111.3468           | 14.00               | 4.87            | 18.87              | 43.50             | -24.63         | 114           | 100            | peak   |
| 4   | 370.7023           | 18.21               | 11.84           | 30.05              | 46.00             | -15.95         | 121           | 100            | peak   |
| 5   | 423.5403           | 16.76               | 11.99           | 28.75              | 46.00             | -17.25         | 101           | 100            | peak   |
| 6   | 636.1340           | 16.39               | 17.93           | 34.32              | 46.00             | -11.68         | 300           | 100            | peak   |

## Remark:

- (1) Measuring frequencies from 9 KHz to the 1 GHz, Radiated emission test from 9KHz to 30MHz was verified, and no any emission was found except system noise floor.
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.

## Above 1 GHz Test Results:

CH Low (2402MHz)  
Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2402      | 112.69        | -5.84  | 106.85         | 114      | -7.15  | peak          |
| 2402      | 85.17         | -5.84  | 79.33          | 94       | -14.67 | AVG           |
| 4804      | 61.83         | -3.64  | 58.19          | 74       | -15.81 | peak          |
| 4804      | 46.35         | -3.64  | 42.71          | 54       | -11.29 | AVG           |
| 7206      | 55.91         | -0.95  | 54.96          | 74       | -19.04 | peak          |
| 7206      | 40.42         | -0.95  | 39.47          | 54       | -14.53 | AVG           |
| ---       | ---           | ---    | ---            | ---      | ---    | ---           |
| ---       | ---           | ---    | ---            | ---      | ---    | ---           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

## Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2402      | 112.18        | -5.84  | 106.34         | 114      | -7.66  | peak          |
| 2402      | 81.54         | -5.84  | 75.7           | 94       | -18.3  | AVG           |
| 4804      | 55.82         | -3.64  | 52.18          | 74       | -21.82 | peak          |
| 4804      | 44.06         | -3.64  | 40.42          | 54       | -13.58 | AVG           |
| 7206      | 56.37         | -0.95  | 55.42          | 74       | -18.58 | peak          |
| 7206      | 40.11         | -0.95  | 39.16          | 54       | -14.84 | AVG           |
| ---       | ---           | ---    | ---            | ---      | ---    | ---           |
| ---       | ---           | ---    | ---            | ---      | ---    | ---           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

CH Middle (2441MHz)

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2441      | 111.08        | -5.71  | 105.37         | 114      | -8.63  | peak          |
| 2441      | 85.43         | -5.71  | 79.72          | 94       | -14.28 | AVG           |
| 4882      | 55.76         | -3.51  | 52.25          | 74       | -21.75 | peak          |
| 4882      | 45.91         | -3.51  | 42.4           | 54       | -11.6  | AVG           |
| 7323      | 55.02         | -0.82  | 54.2           | 74       | -19.8  | peak          |
| 7323      | 39.81         | -0.82  | 38.99          | 54       | -15.01 | AVG           |
| ---       | ---           | ---    | ---            | ---      | ---    | ---           |
| ---       | ---           | ---    | ---            | ---      | ---    | ---           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2441      | 109.57        | -5.71  | 103.86         | 114      | -10.14 | peak          |
| 2441      | 86.12         | -5.71  | 80.41          | 94       | -13.59 | AVG           |
| 4882      | 56.39         | -3.51  | 52.88          | 74       | -21.12 | peak          |
| 4882      | 44.01         | -3.51  | 40.5           | 54       | -13.5  | AVG           |
| 7323      | 51.64         | -0.82  | 50.82          | 74       | -23.18 | peak          |
| 7323      | 38.26         | -0.82  | 37.44          | 54       | -16.56 | AVG           |
| ---       | ---           | ---    | ---            | ---      | ---    | ---           |
| ---       | ---           | ---    | ---            | ---      | ---    | ---           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

CH High (2480MHz)

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2480      | 108.14        | -5.65  | 102.49         | 114      | -11.51 | peak          |
| 2480      | 84.33         | -5.65  | 78.68          | 94       | -15.32 | AVG           |
| 4960      | 55.16         | -3.43  | 51.73          | 74       | -22.27 | peak          |
| 4960      | 45.84         | -3.43  | 42.41          | 54       | -11.59 | AVG           |
| 7440      | 55.02         | -0.75  | 54.27          | 74       | -19.73 | peak          |
| 7440      | 38.45         | -0.75  | 37.7           | 54       | -16.3  | AVG           |
| ---       | ---           | ---    | ---            | ---      | ---    | ---           |
| ---       | ---           | ---    | ---            | ---      | ---    | ---           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2480      | 107.21        | -5.65  | 101.56         | 114      | -12.44 | peak          |
| 2480      | 85.47         | -5.65  | 79.82          | 94       | -14.18 | AVG           |
| 4960      | 52.14         | -3.43  | 48.71          | 74       | -25.29 | peak          |
| 4960      | 42.68         | -3.43  | 39.25          | 54       | -14.75 | AVG           |
| 7440      | 52.29         | -0.75  | 51.54          | 74       | -22.46 | peak          |
| 7440      | 38.11         | -0.75  | 37.36          | 54       | -16.64 | AVG           |
| ---       | ---           | ---    | ---            | ---      | ---    | ---           |
| ---       | ---           | ---    | ---            | ---      | ---    | ---           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

## 5 BAND EDGE

### 5.1 Limits

FCC PART 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.


### 5.2 Test Procedure

The band edge compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW to 100KHz and VBM to 300KHz to measure the peak field strength and set RBW to 1MHz and VBW to 10Hz to measure the average radiated field strength. The conducted RF band edge was measured by using a spectrum analyzer. Set span wide enough to capture the highest in-band emission and the emission at the band edge. Set RBW to 100 KHz and VBW to 300 KHz, to measure the conducted peak band edge.

### 5.3 Test Result

**PASS**


Radiated Band Edge Test:  
Operation Mode: TX CH Low (2402MHz)  
Horizontal (Worst case)

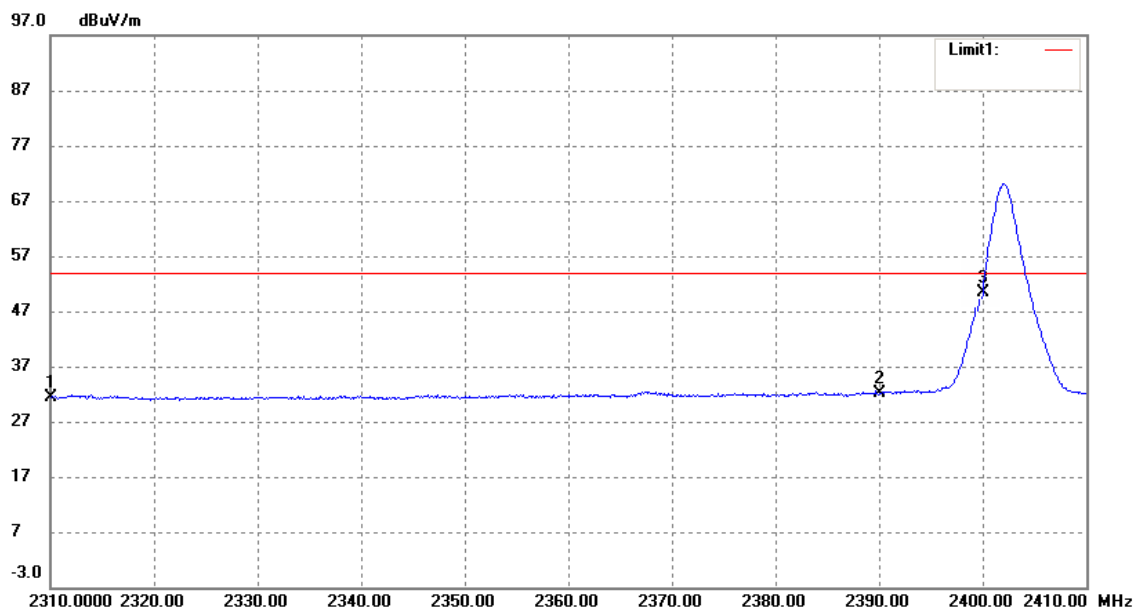

| No. | Frequency<br>(MHz) | Reading<br>(dBuV/m) | Correct<br>Factor(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark           |
|-----|--------------------|---------------------|-----------------------|--------------------|-------------------|----------------|------------------|
| 1   | 2310.000           | 35.14               | -3.80                 | 31.34              | 54.00             | -22.66         | Average Detector |
|     | 2310.000           | 47.63               | -3.80                 | 43.83              | 74.00             | -30.17         | Peak Detector    |
| 2   | 2390.000           | 35.09               | -3.00                 | 32.09              | 54.00             | -21.91         | Average Detector |
|     | 2390.000           | 51.77               | -3.00                 | 48.77              | 74.00             | -25.23         | Peak Detector    |
| 3   | 2400.000           | 53.94               | -2.81                 | 51.13              | 54.00             | -2.87          | Average Detector |
|     | 2400.000           | 73.25               | -2.81                 | 70.44              | 74.00             | -3.56          | Average Detector |

Operation Mode: TX CH High (2480MHz)

Horizontal (Worst case)

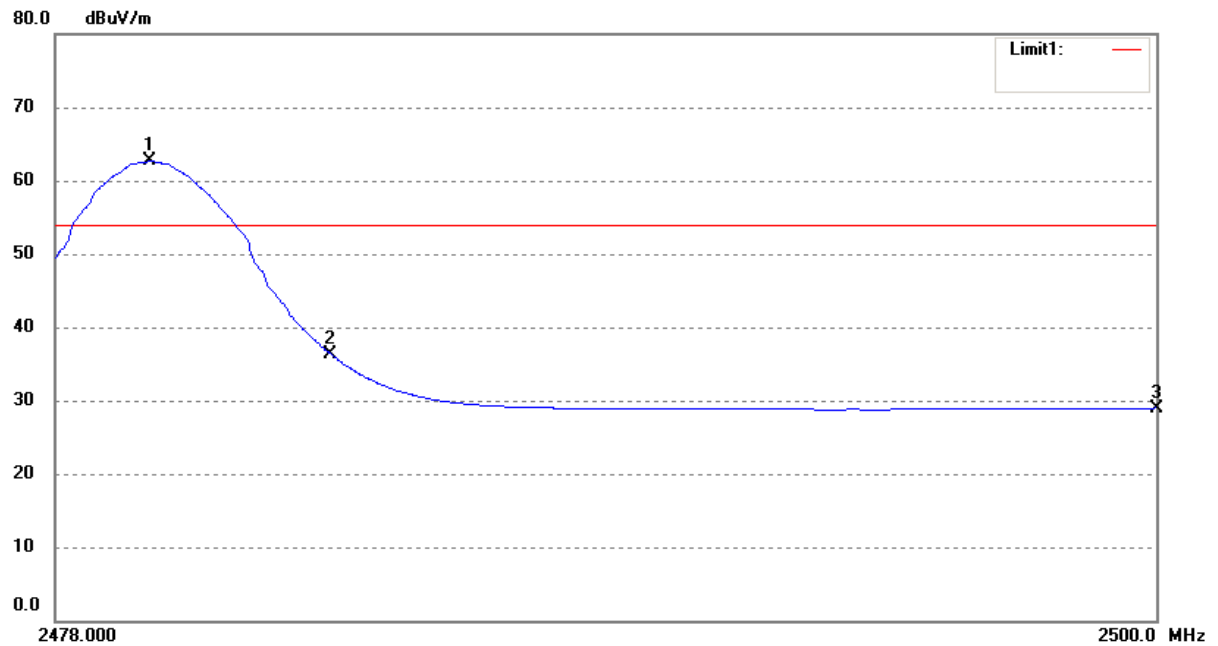

| No. | Frequency<br>(MHz) | Reading<br>(dBuV/m) | Correct<br>dB/m | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark           |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|------------------|
| 1   | 2479.884           | 66.00               | -3.25           | 62.75              | /                 | /              | Average Detector |
|     | 2479.972           | 79.93               | -3.25           | 76.68              | /                 | /              | Peak Detector    |
| 2   | 2483.500           | 39.54               | -3.25           | 36.29              | 54.00             | -17.71         | Average Detector |
|     | 2483.500           | 48.84               | -3.25           | 45.59              | 74.00             | -28.41         | Peak Detector    |
| 3   | 2500.000           | 32.20               | -3.20           | 29.00              | 54.00             | -25.00         | Average Detector |
|     | 2500.000           | 45.59               | -3.20           | 42.39              | 74.00             | -31.61         | Peak Detector    |

## 6 OCCUPIED BANDWIDTH MEASUREMENT

### 6.1 Test Setup

Same as Radiated Emission Measurement

### 6.2 Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as normal operation.
3. Based on FCC Part15 C Section 15.249(a): RBW= 100KHz. VBW= 300 KHz, Span=3MHz.
4. The useful radiated emission from the EUT was detected by the spectrum analyser with peak detector.

### 6.3 Measurement Equipment Used


Same as Radiated Emission Measurement

### 6.4 Test Result


**PASS**

| Frequency | 20dB Bandwidth<br>(MHz) | Result      |
|-----------|-------------------------|-------------|
| 2402 MHz  | 1.160                   | <b>PASS</b> |
| 2441 MHz  | 1.162                   | <b>PASS</b> |
| 2480 MHz  | 1.163                   | <b>PASS</b> |


CH: 2402MHz

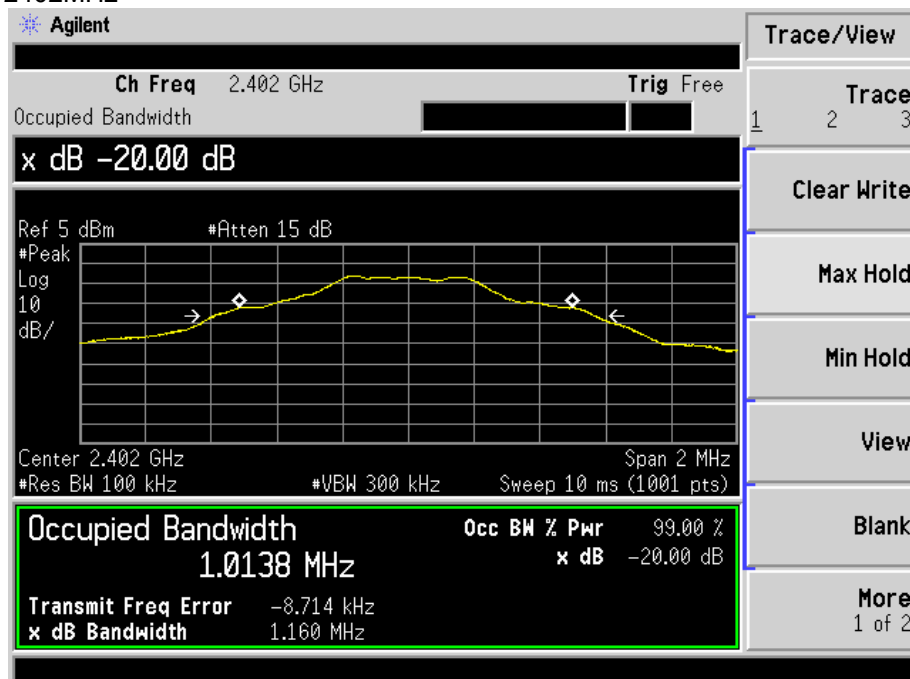

CH: 2441MHz

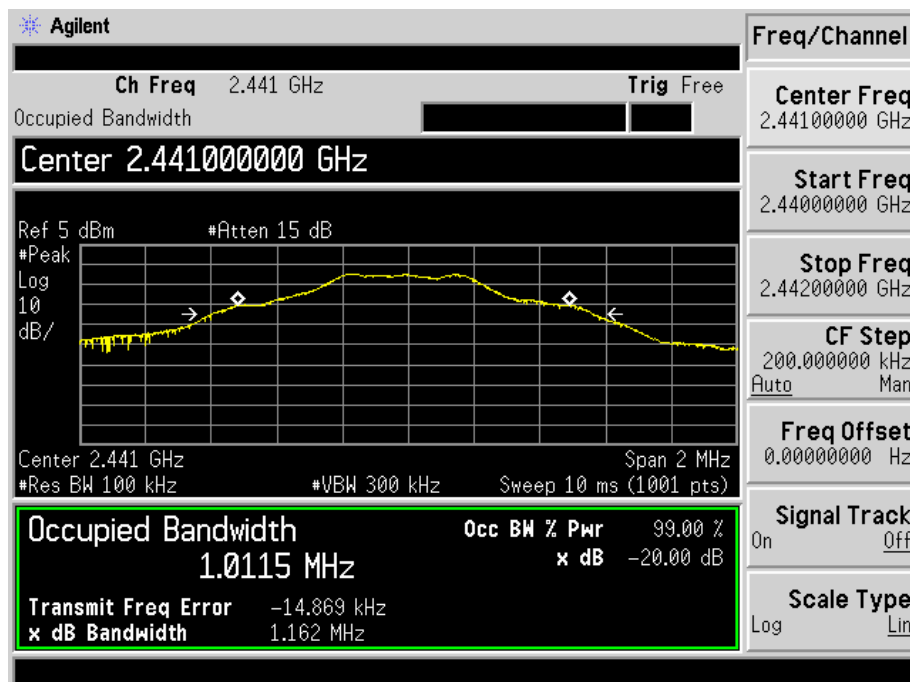

CH: 2480MHz

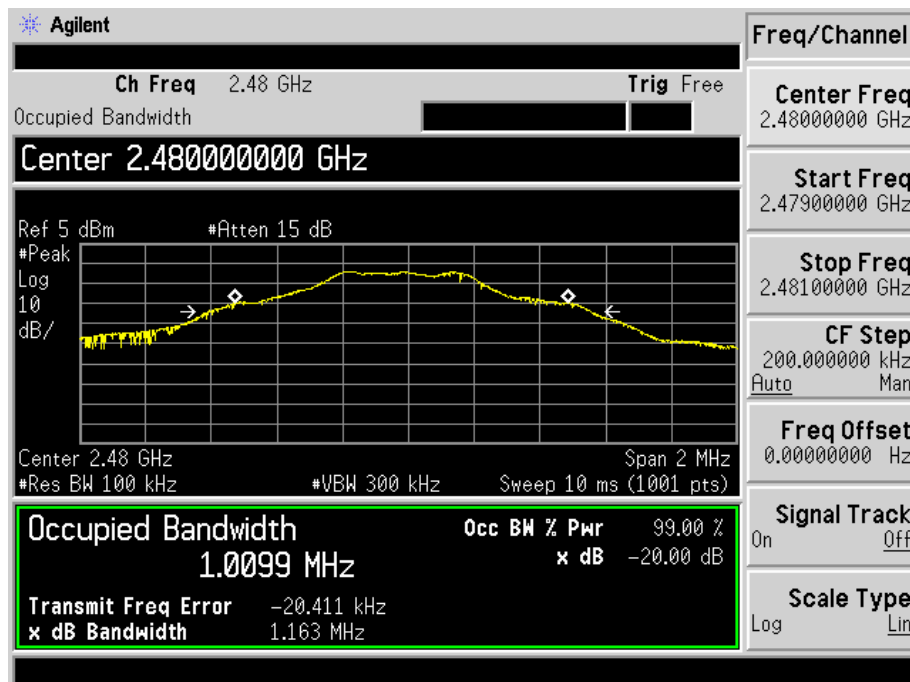

## 7 ANTENNA REQUIREMENT

### Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.249, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


### Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### Antenna Connected Construction

The antenna used in this product is a PCB Antenna, The directional gains of antenna used for transmitting is 0dBi.

### ANTENNA

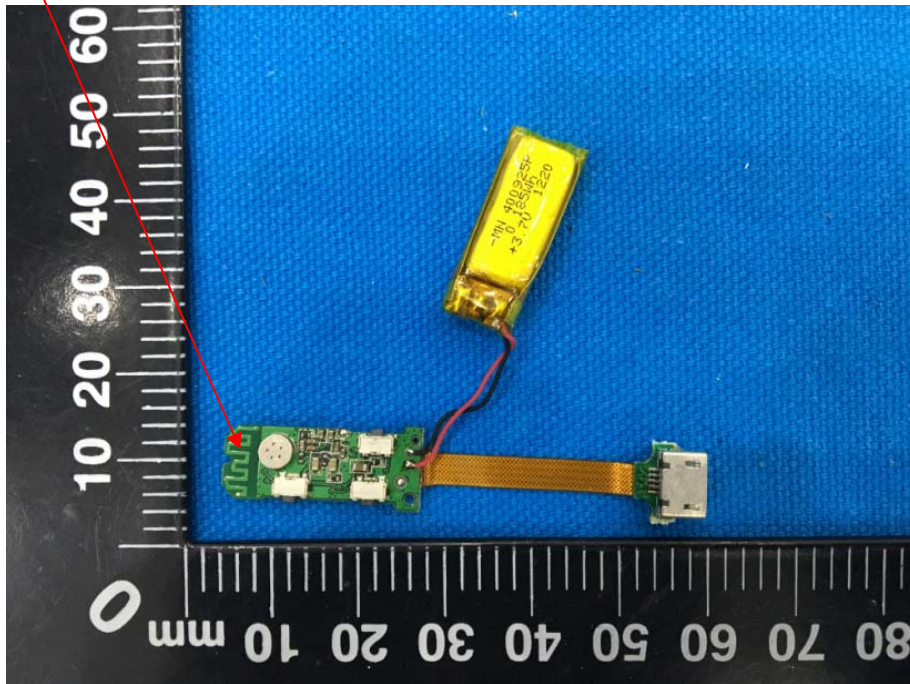

## 8 PHOTOGRAPH OF TEST

### 8.1 Radiated Emission



## 8.2 Conducted Emission

