

Test Plot 1#: GSM 850 High Body Front**DUT: 4G Body Worn Camera; Type: F2S-A; Serial: 2UKH-1**

Communication System: Generic GPRS-3 slots (0); Frequency: 848.8 MHz; Duty Cycle: 1:2.66
 Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 41.396$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.68, 6.68, 6.68) @848.8 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.11 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.40 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.843 W/kg

Maximum value of SAR (measured) = 1.26 W/kg

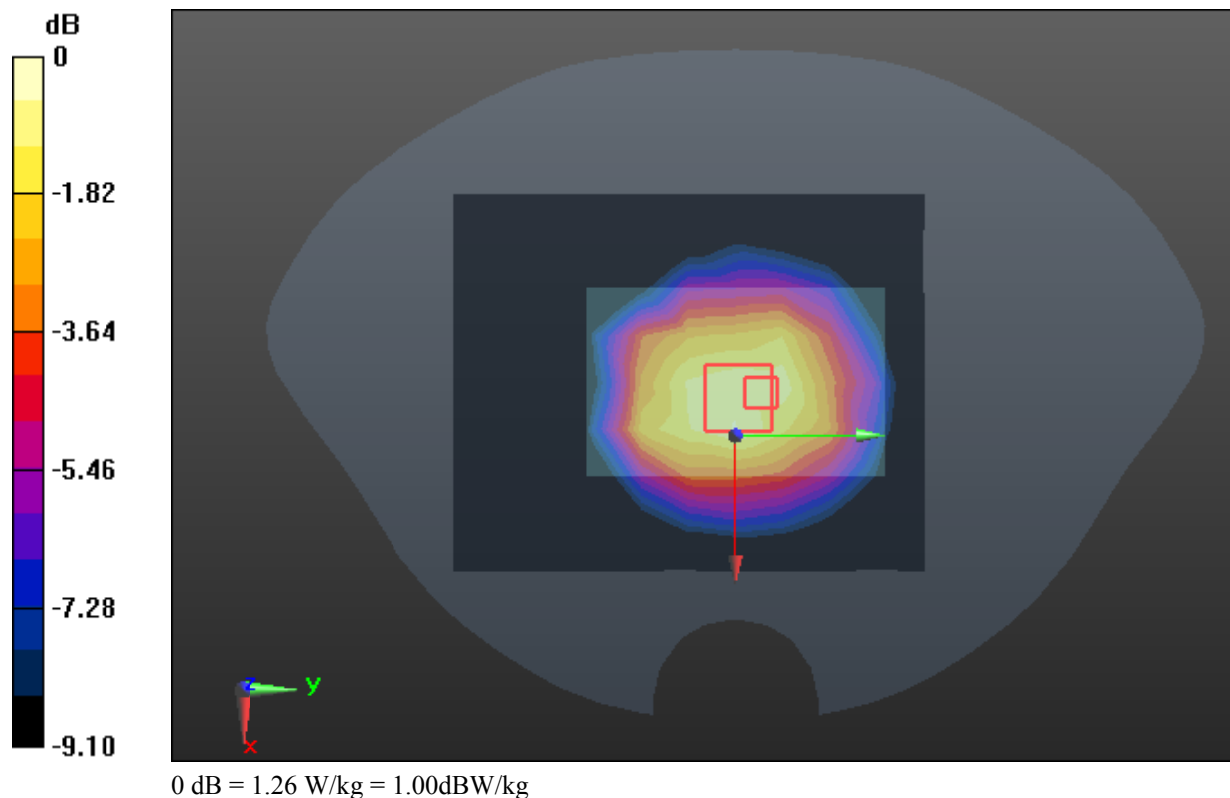

Test Plot 2#: GSM 850 Mid Limb Front**DUT: 4G Body Worn Camera; Type: F2S-A; Serial: 2UKH-1**

Communication System: Generic GPRS-3 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.66
 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 41.563$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.68, 6.68, 6.68) @836.6 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.77 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 43.34 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.03 W/kg

SAR(1 g) = 1.64 W/kg; SAR(10 g) = 1.26 W/kg

Maximum value of SAR (measured) = 1.77 W/kg

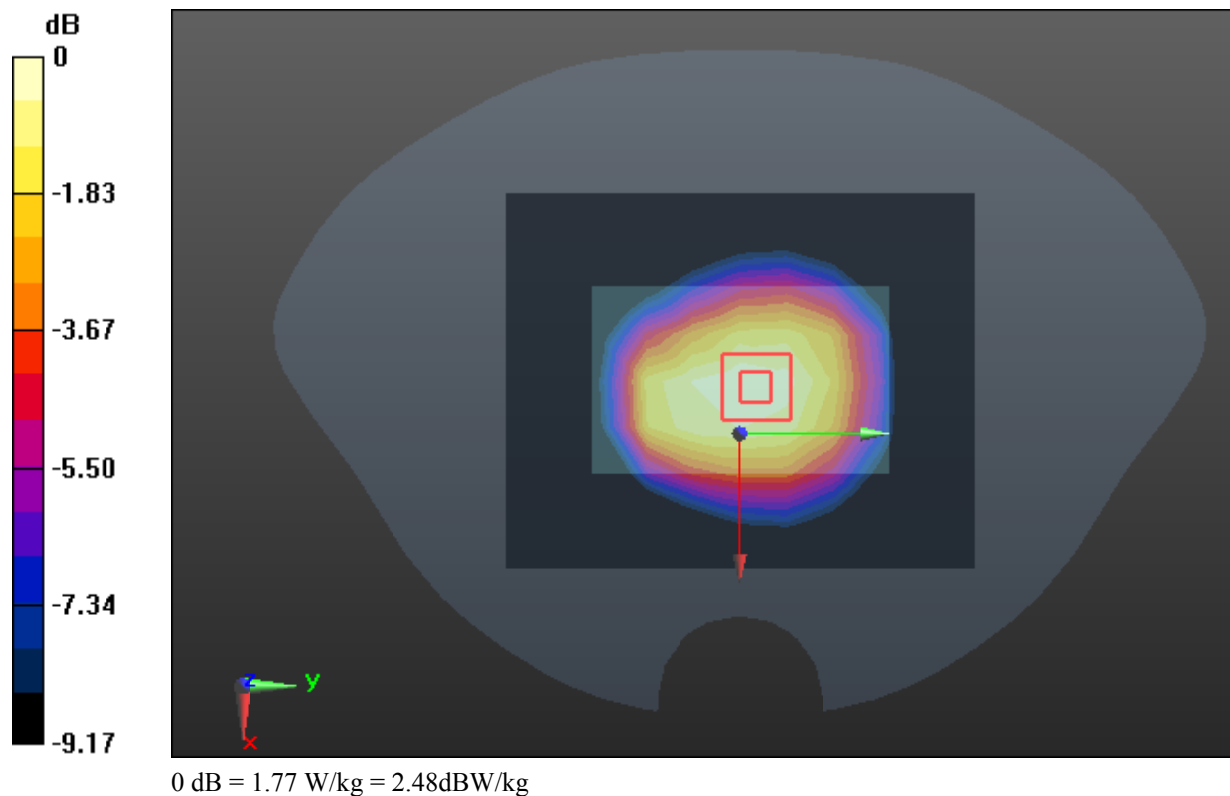

Test Plot 3#: PCS 1900 Mid Body Front**DUT: 4G Body Worn Camera; Type: F2S-A; Serial: 2UKH-1**

Communication System: Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.366$ S/m; $\epsilon_r = 39.105$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.24, 5.24, 5.24) @1880 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.635 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.32 V/m; Power Drift = 0.17dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.737 W/kg; SAR(10 g) = 0.402 W/kg

Maximum value of SAR (measured) = 0.893 W/kg

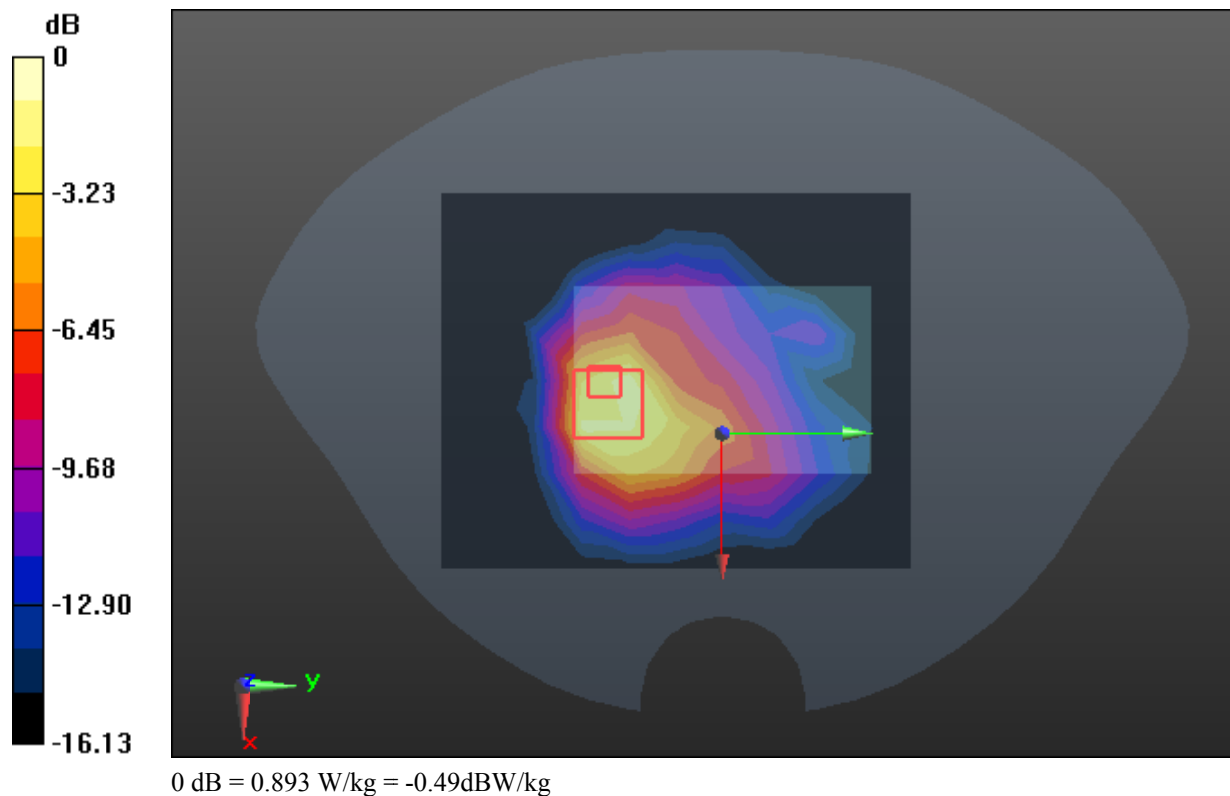

Test Plot 4#: PCS 1900 Mid Limb Bottom**DUT: 4G Body Worn Camera; Type: F2S-A; Serial: 2UKH-1**

Communication System: Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.366$ S/m; $\epsilon_r = 39.105$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.24, 5.24, 5.24) @1880 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 3.58 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 42.38 V/m; Power Drift = 0.13dB

Peak SAR (extrapolated) = 8.07 W/kg

SAR(1 g) = 4.49 W/kg; SAR(10 g) = 2.13 W/kg

Maximum value of SAR (measured) = 5.73 W/kg

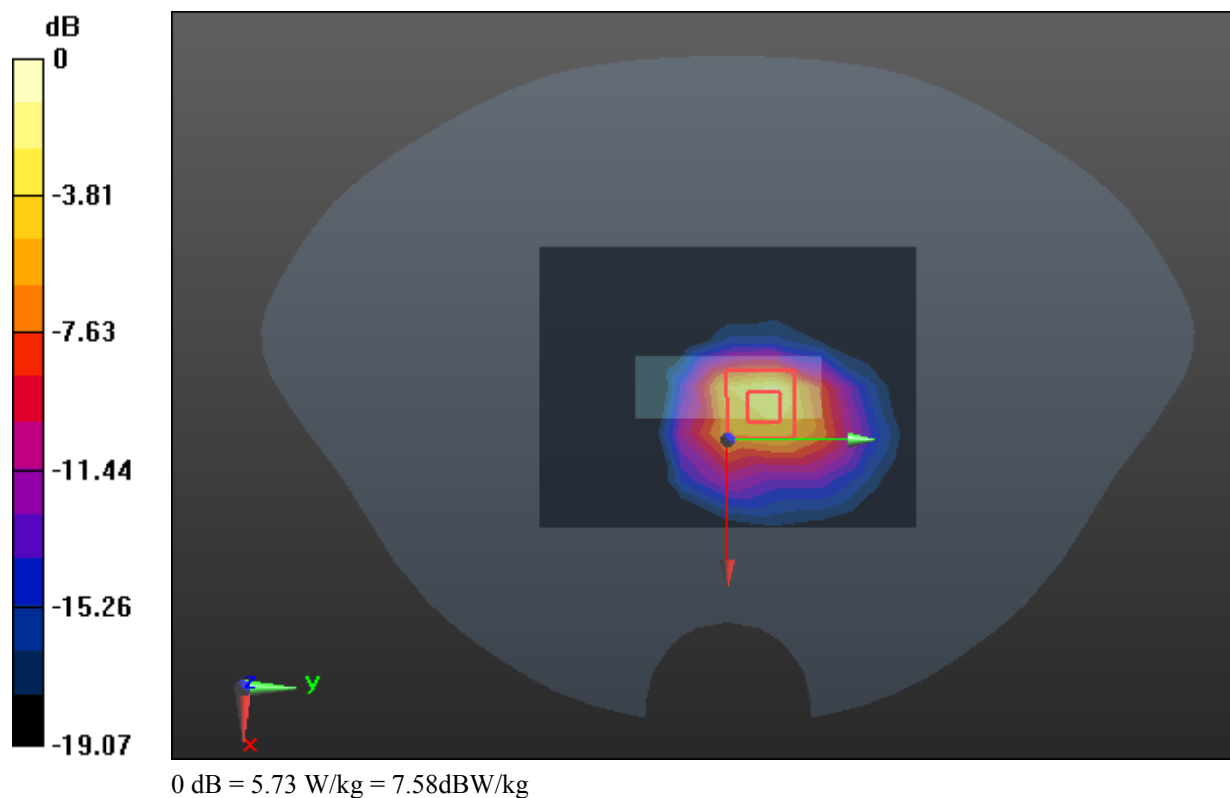

Test Plot 5#: WCDMA Band 2 Mid Body Front**DUT: 4G Body Worn Camera; Type: F2S-A; Serial: 2UKH-1**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.366$ S/m; $\epsilon_r = 39.105$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.24, 5.24, 5.24) @1880 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x11x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.597 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.63 V/m; Power Drift = 0.10dB

Peak SAR (extrapolated) = 0.910 W/kg

SAR(1 g) = 0.588 W/kg; SAR(10 g) = 0.354 W/kg

Maximum value of SAR (measured) = 0.706 W/kg

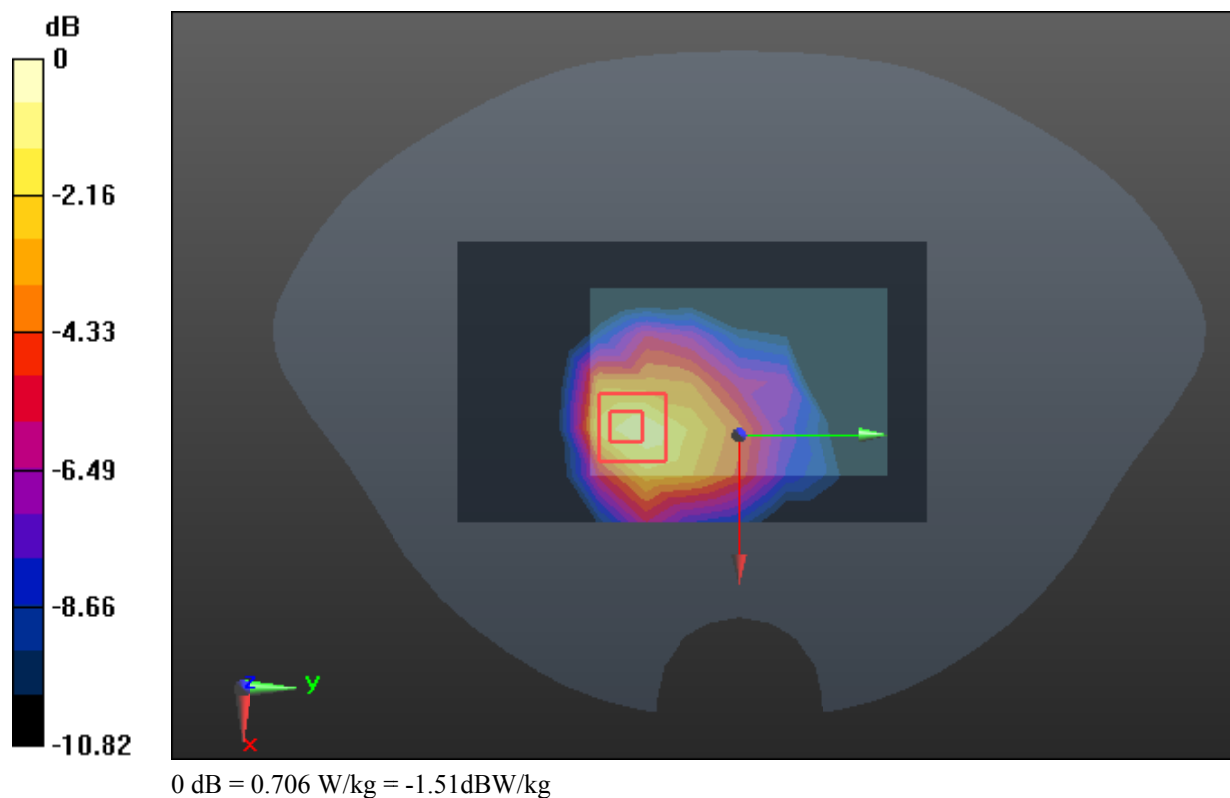

Test Plot 6#: WCDMA Band 2 High Limb Bottom**DUT: 4G Body Worn Camera; Type: F2S-A; Serial: 2UKH-1**

Communication System: WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.389$ S/m; $\epsilon_r = 38.979$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.24, 5.24, 5.24) @1907.6 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 6.35 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 59.34 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 9.78 W/kg

SAR(1 g) = 5.39 W/kg; SAR(10 g) = 2.53 W/kg

Maximum value of SAR (measured) = 7.18 W/kg

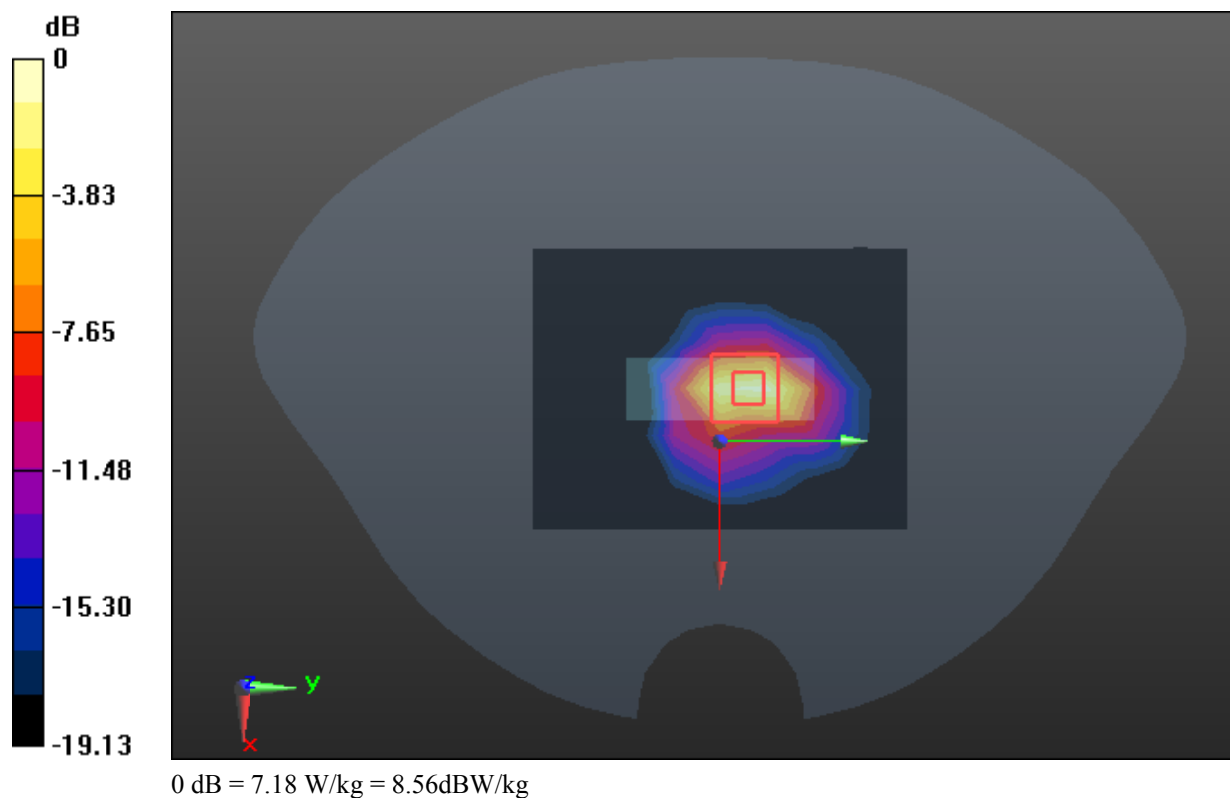

Test Plot 7#: WCDMA Band 5 Mid Body Front**DUT: 4G Body Worn Camera; Type: F2S-A; Serial: 2UKH-1**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 41.563$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.68, 6.68, 6.68) @836.6 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.388 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.94 V/m; Power Drift = 0.03dB

Peak SAR (extrapolated) = 0.446 W/kg

SAR(1 g) = 0.353 W/kg; SAR(10 g) = 0.271 W/kg

Maximum value of SAR (measured) = 0.382 W/kg

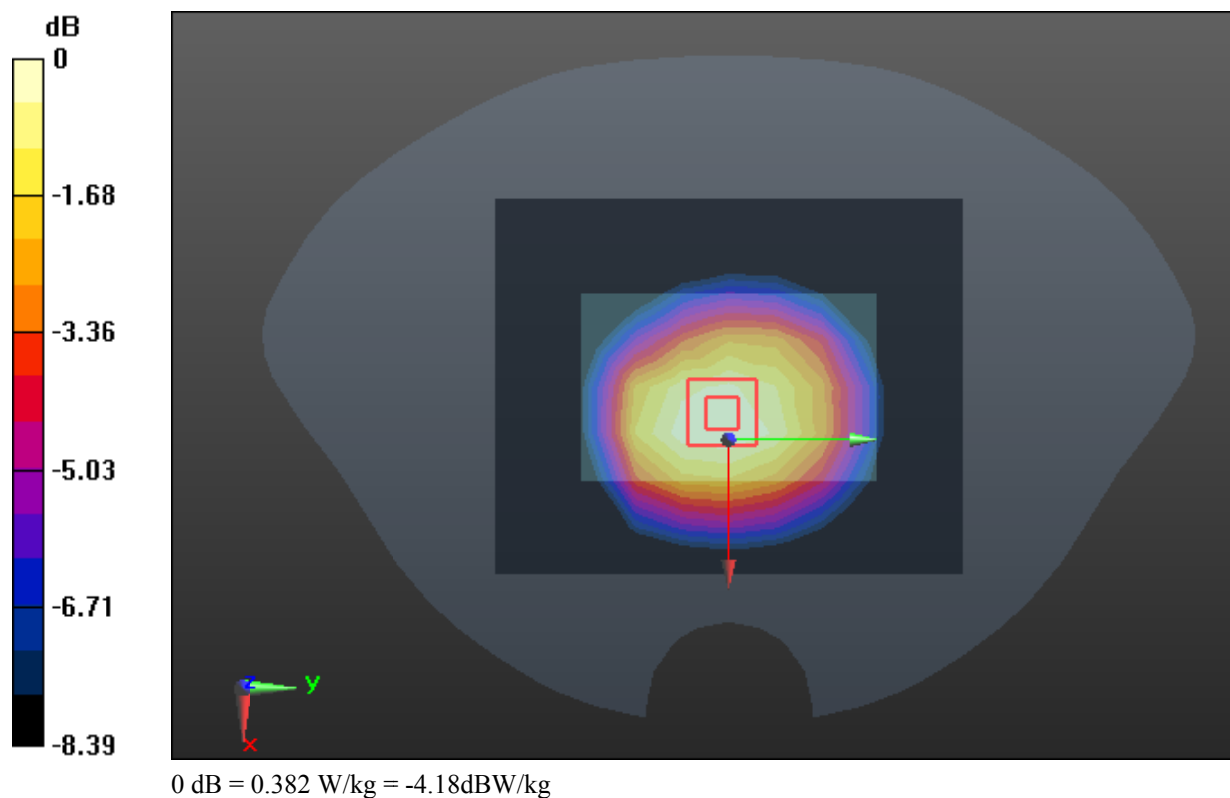

Test Plot 8#: WCDMA Band 5 Mid Limb Front**DUT: 4G Body Worn Camera; Type: F2S-A; Serial: 2UKH-1**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 41.563$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.68, 6.68, 6.68) @836.6 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x11x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.850 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.06 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.968 W/kg

SAR(1 g) = 0.774 W/kg; SAR(10 g) = 0.588 W/kg

Maximum value of SAR (measured) = 0.843 W/kg

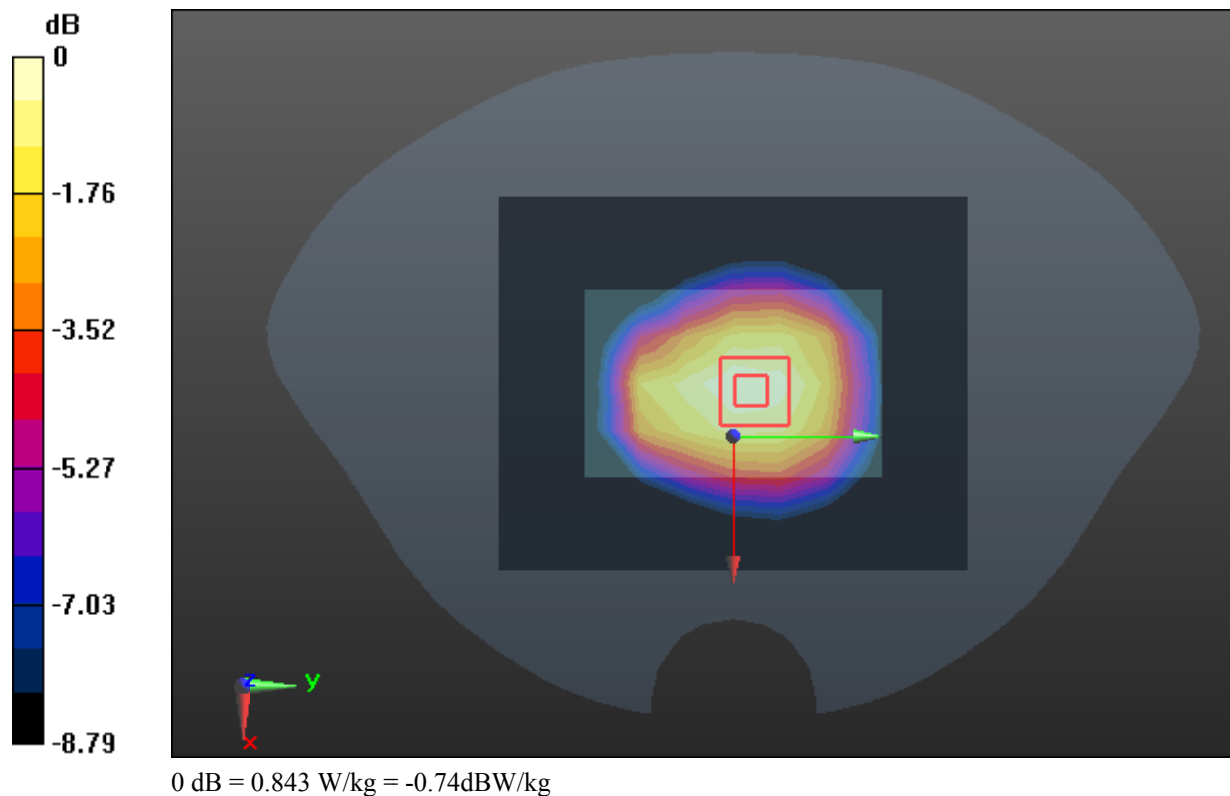

Test Plot 9#: LTE Band 2 1RB Mid Body Back**DUT: 4G Body Worn Camera; Type: F2S-A; Serial: 2UKH-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.366$ S/m; $\epsilon_r = 39.105$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.24, 5.24, 5.24) @1880 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.815 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.03 V/m; Power Drift = 0.04dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.720 W/kg; SAR(10 g) = 0.469 W/kg

Maximum value of SAR (measured) = 0.833 W/kg

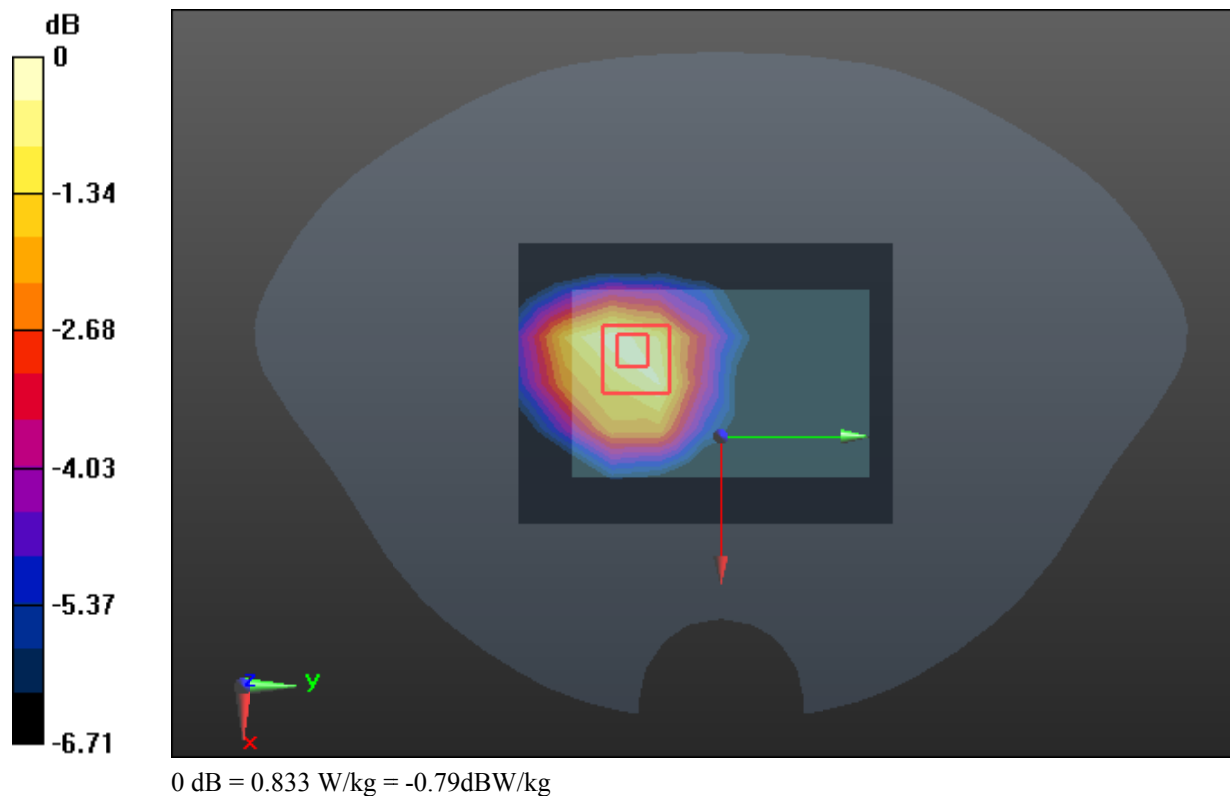

Test Plot 10#: LTE Band 2 1RB Mid Limb Back**DUT: 4G Body Worn Camera; Type: F2S-A; Serial: 2UKH-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.366$ S/m; $\epsilon_r = 39.105$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.24, 5.24, 5.24) @1880 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 3.09 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.21 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 5.06 W/kg

SAR(1 g) = 2.93 W/kg; SAR(10 g) = 1.67 W/kg

Maximum value of SAR (measured) = 3.69 W/kg

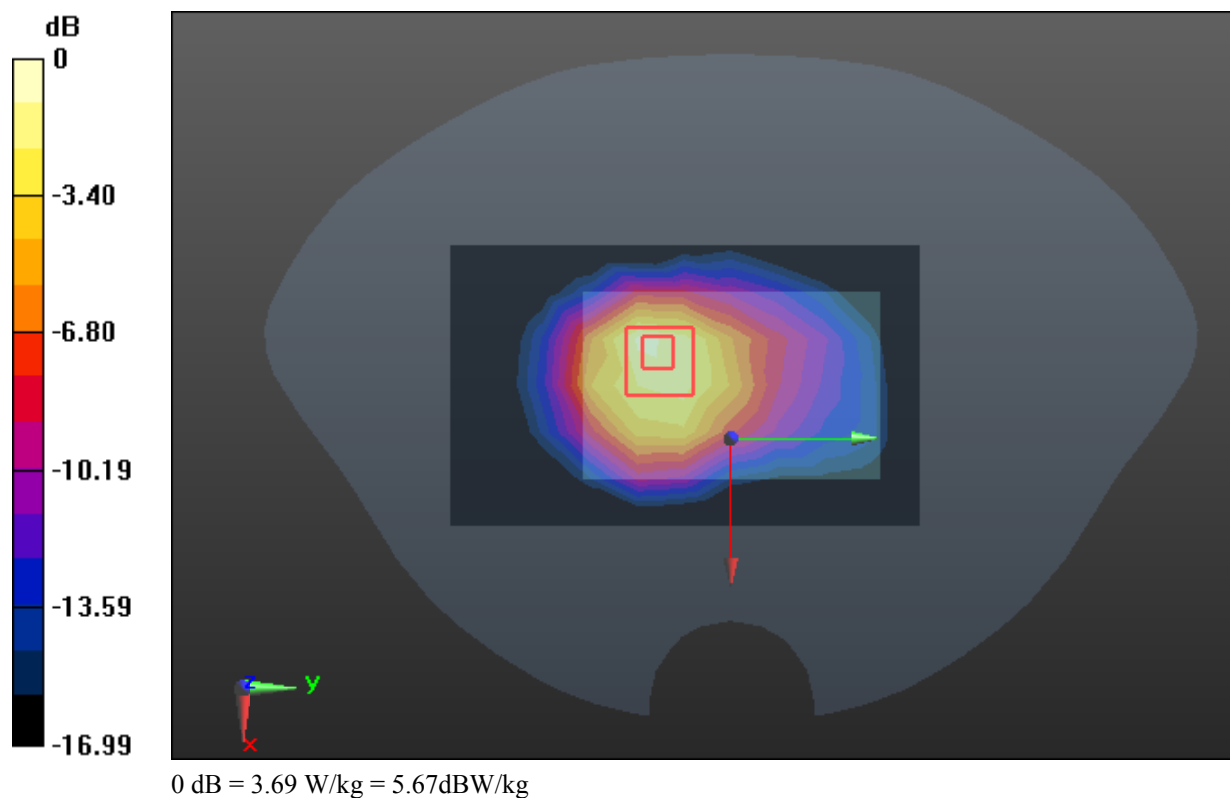

Test Plot 11#: LTE Band 4 50%RB Mid Body Front**DUT: 4G Body Worn Camera; Type: F2S-A; Serial: 2UKH-1**

Communication System: Generic FDD-LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.377$ S/m; $\epsilon_r = 39.237$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.53, 5.53, 5.53) @1732.5 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.750 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.16 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.785 W/kg; SAR(10 g) = 0.490 W/kg

Maximum value of SAR (measured) = 0.923 W/kg

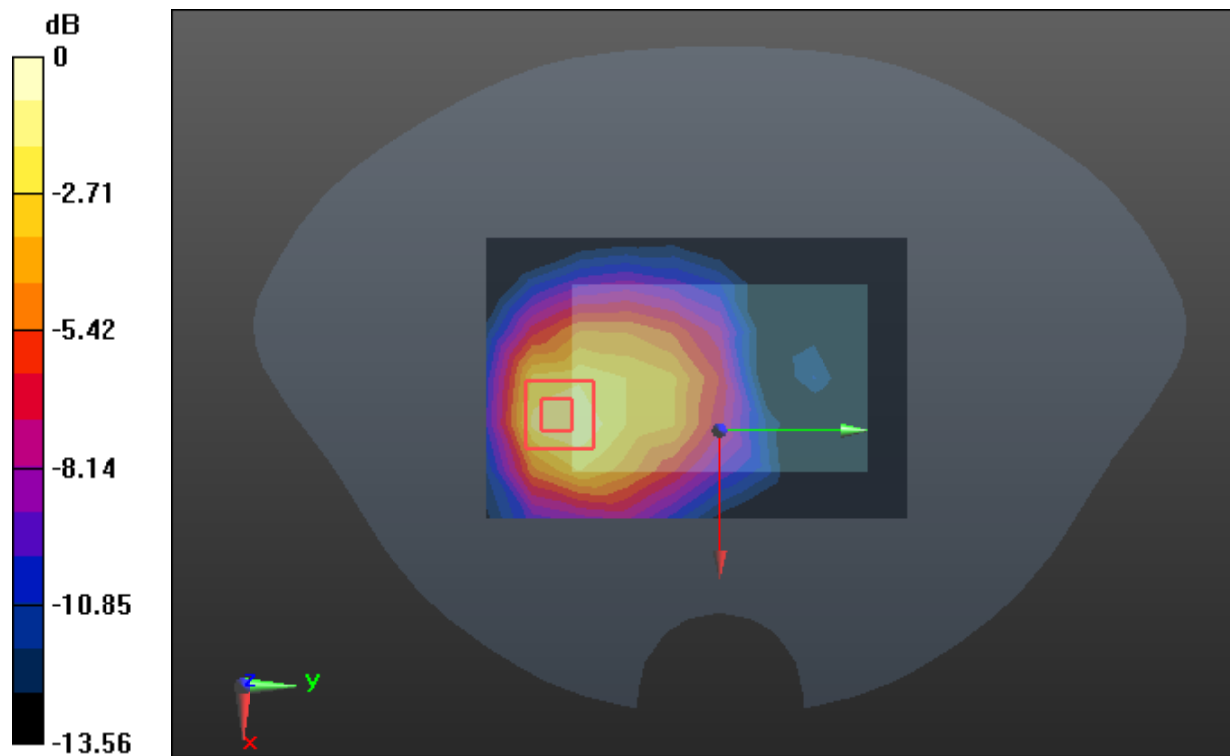

0 dB = 0.923 W/kg = -0.35dBW/kg

Test Plot 12#: LTE Band 4 1RB Mid Limb Bottom**DUT: 4G Body Worn Camera; Type: F2S-A; Serial: 2UKH-1**

Communication System: Generic FDD-LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.377$ S/m; $\epsilon_r = 39.237$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.53, 5.53, 5.53) @1732.5 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 3.83 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.67 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 5.94 W/kg

SAR(1 g) = 3.24 W/kg; SAR(10 g) = 1.56 W/kg

Maximum value of SAR (measured) = 4.37 W/kg

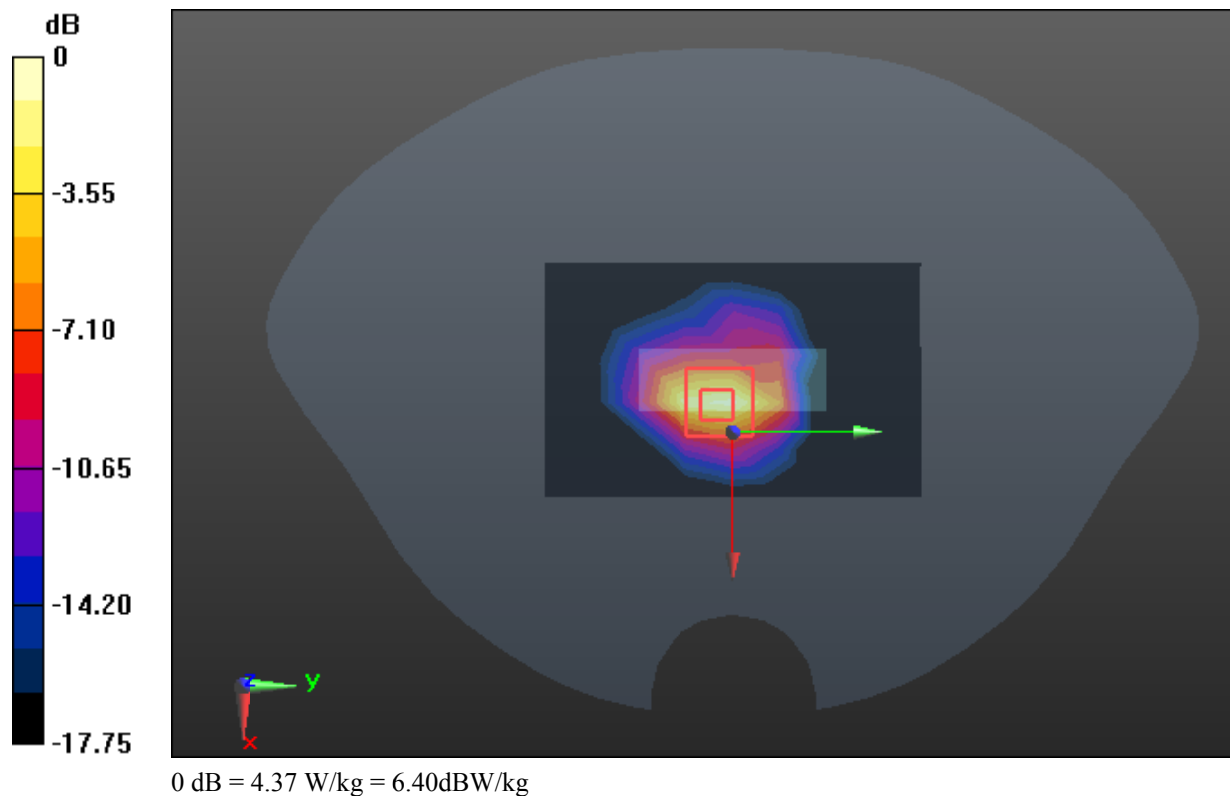

Test Plot 13#: LTE Band 5 50%RB Mid Body Front**DUT: 4G Body Worn Camera; Type: F2S-A; Serial: 2UKH-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 41.564$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.68, 6.68, 6.68) @836.5 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.481 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.87 V/m; Power Drift = 0.05dB

Peak SAR (extrapolated) = 0.563 W/kg

SAR(1 g) = 0.463 W/kg; SAR(10 g) = 0.353 W/kg

Maximum value of SAR (measured) = 0.503 W/kg

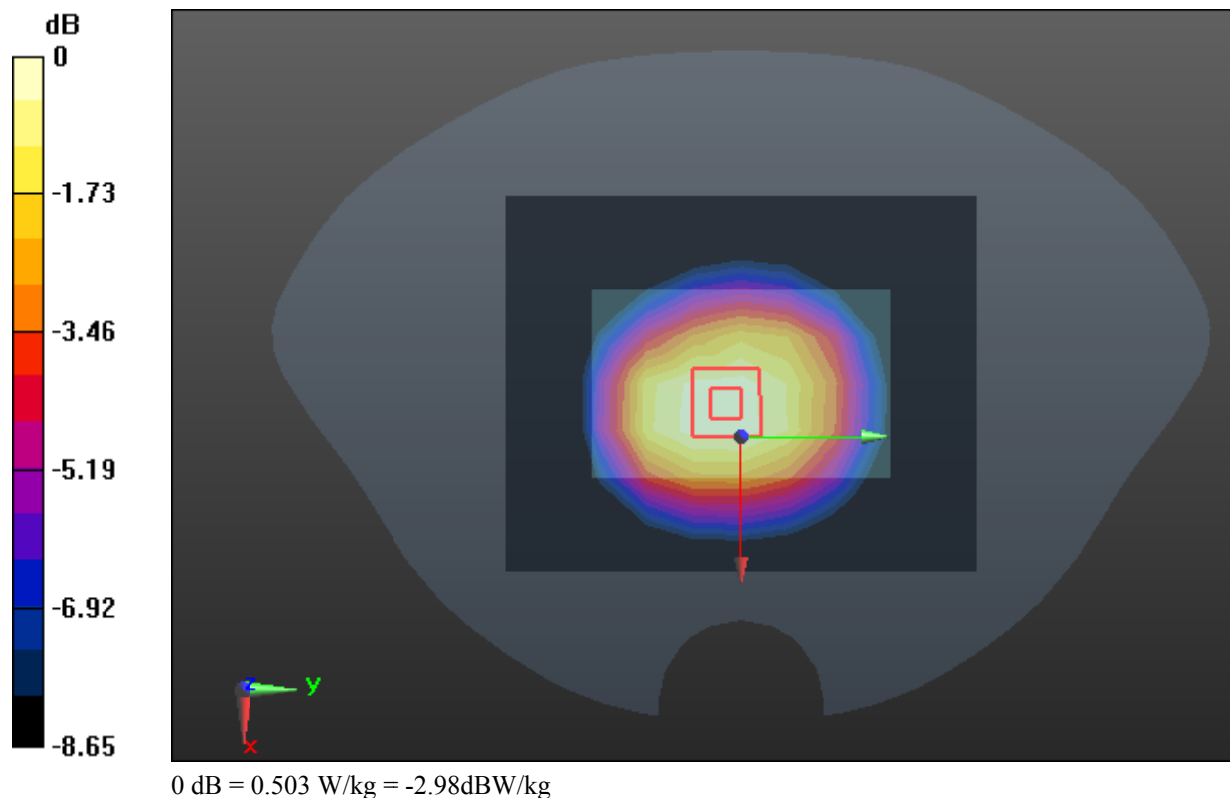

Test Plot 14#: LTE Band 5 50%RB Mid Limb Front**DUT: 4G Body Worn Camera; Type: F2S-A; Serial: 2UKH-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 41.564$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.68, 6.68, 6.68) @836.5 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.600 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.80 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.738 W/kg

SAR(1 g) = 0.582 W/kg; SAR(10 g) = 0.438 W/kg

Maximum value of SAR (measured) = 0.644 W/kg

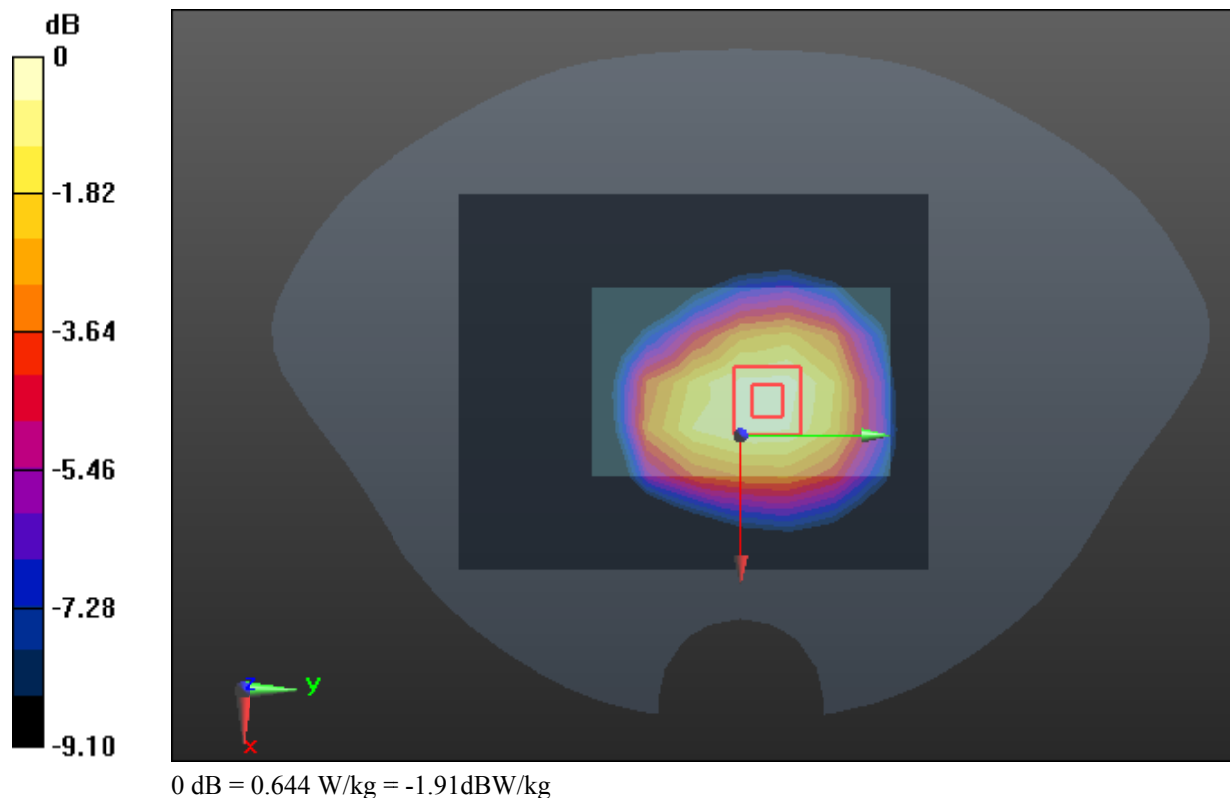

Test Plot 15#: LTE Band 7 50%RB Mid Body Front**DUT: 4G Body Worn Camera; Type: F2S-A; Serial: 2UKH-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.969$ S/m; $\epsilon_r = 40.173$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(4.83, 4.83, 4.83) @2535 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.709 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.681 V/m; Power Drift = 0.15dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.598 W/kg; SAR(10 g) = 0.300 W/kg

Maximum value of SAR (measured) = 0.751 W/kg

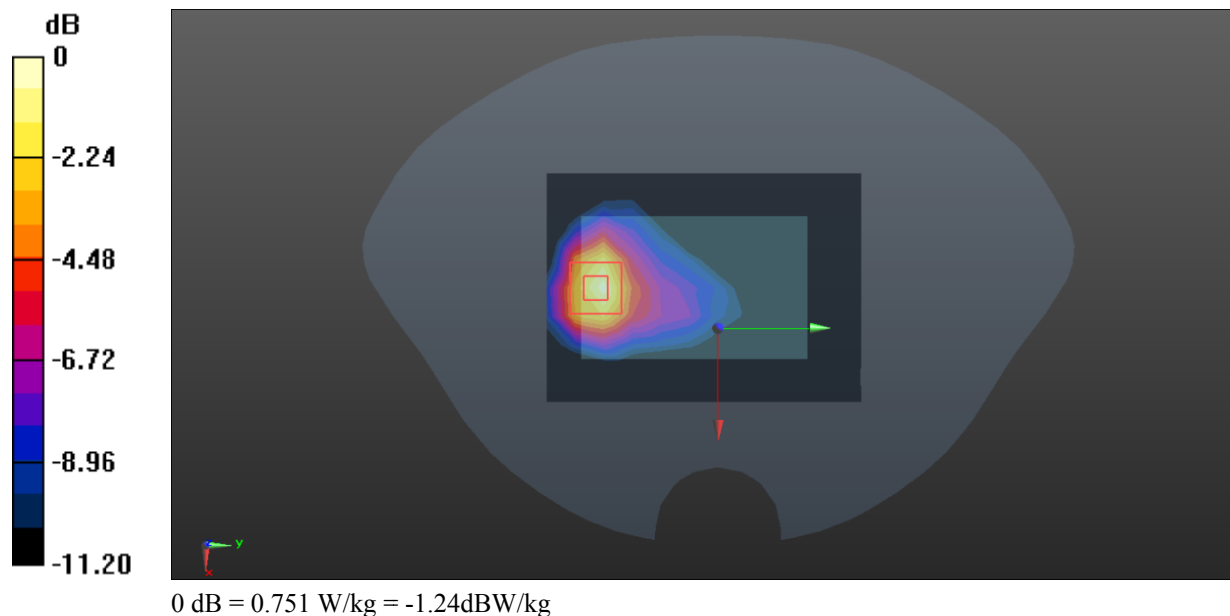

Test Plot 16#: LTE Band 7 50%RB Mid Limb Front**DUT: 4G Body Worn Camera; Type: F2S-A; Serial: 2UKH-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.969$ S/m; $\epsilon_r = 40.173$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(4.83, 4.83, 4.83) @2535 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 3.44 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.18 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 7.32 W/kg

SAR(1 g) = 3.51 W/kg; SAR(10 g) = 1.57 W/kg

Maximum value of SAR (measured) = 4.87 W/kg

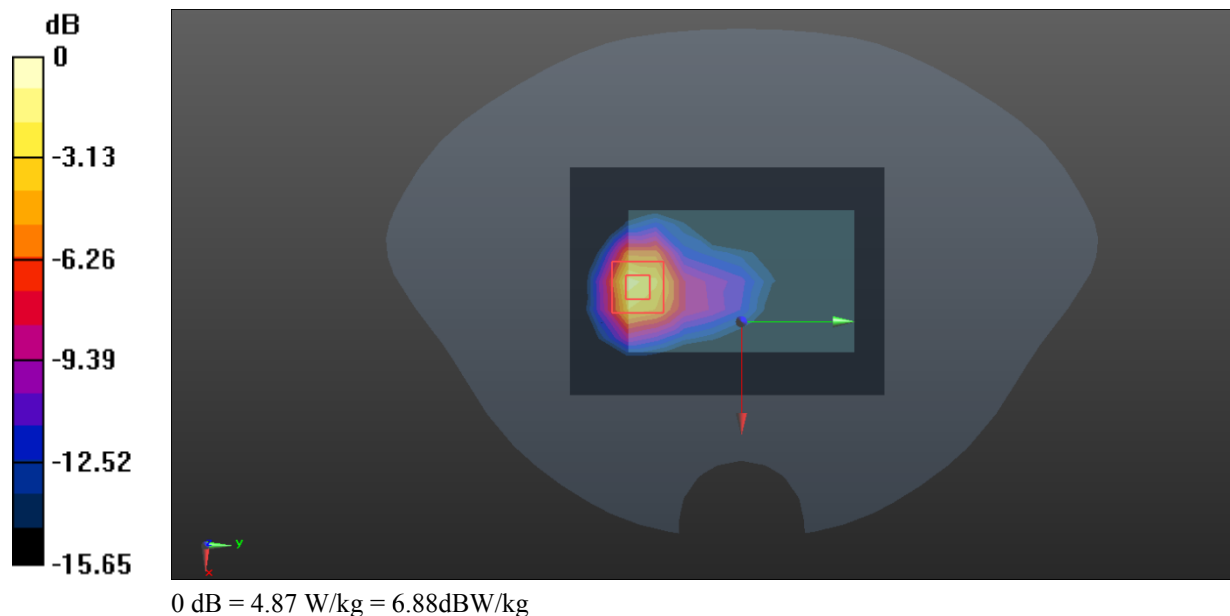

Test Plot 17#: LTE Band 41 1RB Mid Body Front**DUT: 4G Body Worn Camera; Type: F2S-A; Serial: 2UKH-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
 Medium parameters used: $f = 2593$ MHz; $\sigma = 2.016$ S/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(4.66, 4.66, 4.66) @2593 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x13x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.646 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.252 V/m; Power Drift = 0.15dB

Peak SAR (extrapolated) = 0.972 W/kg

SAR(1 g) = 0.507 W/kg; SAR(10 g) = 0.265 W/kg

Maximum value of SAR (measured) = 0.636 W/kg

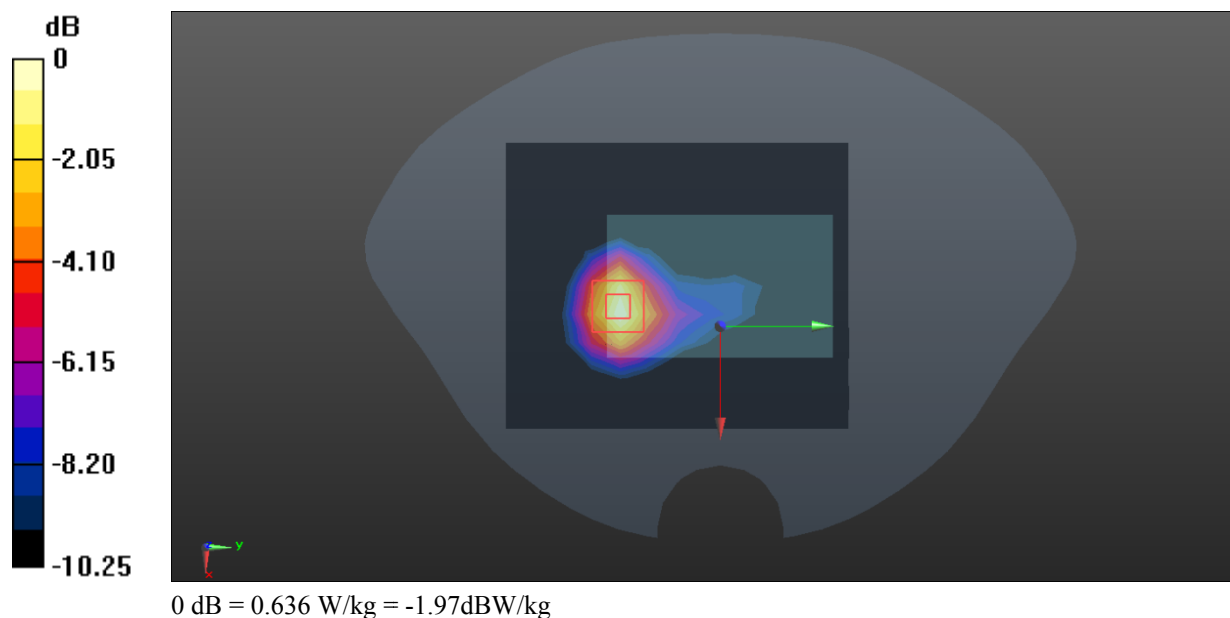

Test Plot 18#: LTE Band 41 1RB Mid Limb Bottom**DUT: 4G Body Worn Camera; Type: F2S-A; Serial: 2UKH-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
 Medium parameters used: $f = 2593$ MHz; $\sigma = 2.016$ S/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(4.66, 4.66, 4.66) @2593 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 6.16 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 53.55 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 12.1 W/kg

SAR(1 g) = 5.33 W/kg; SAR(10 g) = 2.05 W/kg

Maximum value of SAR (measured) = 7.35 W/kg

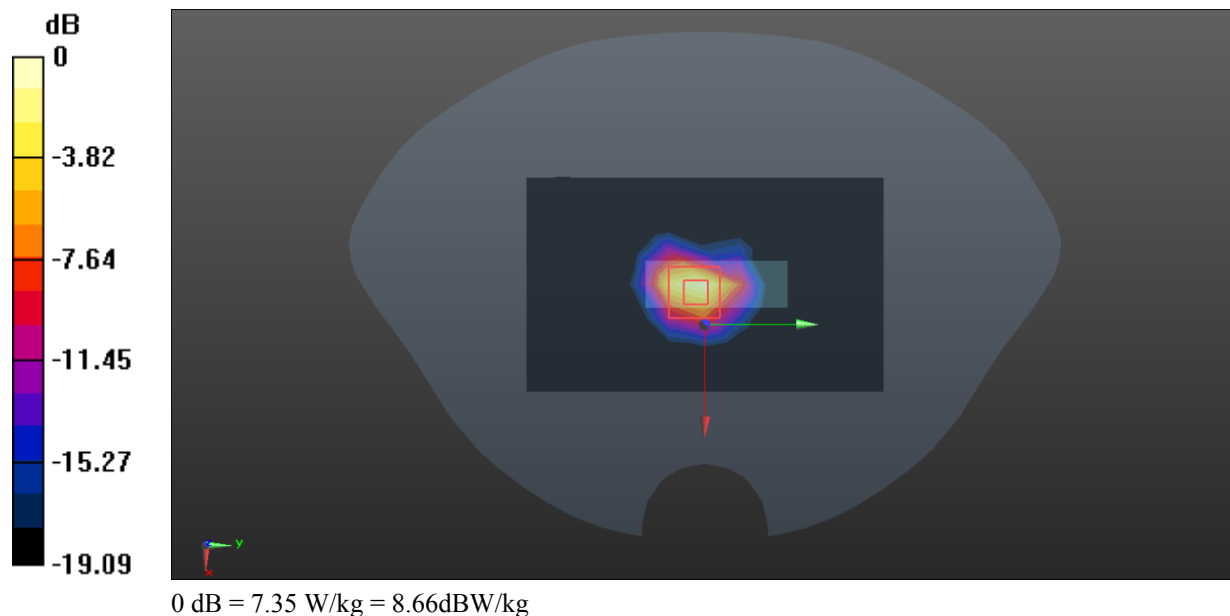

Test Plot 19#: WIFI 2.4G Mid Body Front**DUT: 4G Body Worn Camera; Type: F2S-A; Serial: 2UKH-1**

Communication System: 802.11b (0); Frequency: 2437 MHz; Duty Cycle: 1:1.01
 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.841$ S/m; $\epsilon_r = 40.519$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(4.83, 4.83, 4.83) @2437 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.301 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.292 V/m; Power Drift = 0.02dB

Peak SAR (extrapolated) = 0.405 W/kg

SAR(1 g) = 0.227 W/kg; SAR(10 g) = 0.112 W/kg

Maximum value of SAR (measured) = 0.297 W/kg

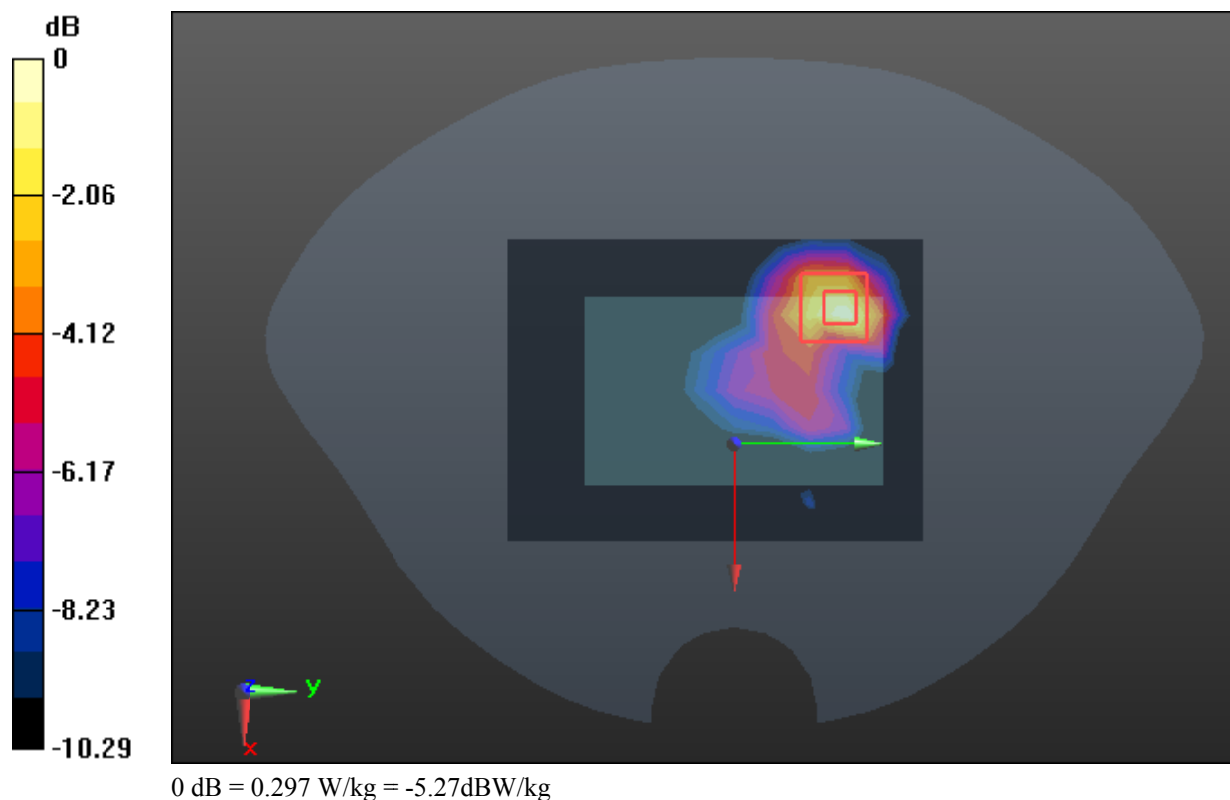

Test Plot 20#: WIFI 2.4G Mid Limb Top**DUT: 4G Body Worn Camera; Type: F2S-A; Serial: 2UKH-1**

Communication System: 802.11b (0); Frequency: 2437 MHz; Duty Cycle: 1:1.01
 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.841$ S/m; $\epsilon_r = 40.519$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(4.83, 4.83, 4.83) @2437 MHz; Calibrated: 2024/10/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.43 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.97 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 2.57 W/kg

SAR(1 g) = 0.969 W/kg; SAR(10 g) = 0.378 W/kg

Maximum value of SAR (measured) = 1.41 W/kg

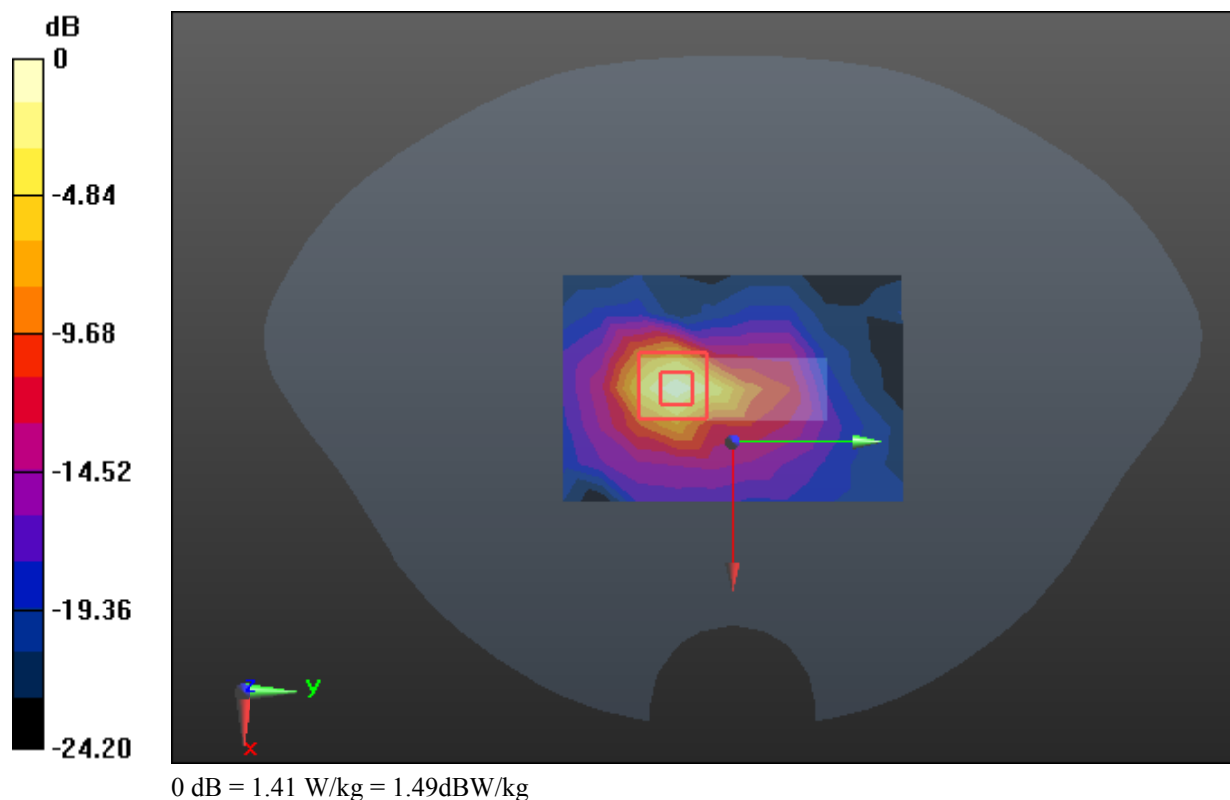

Test Plot 21#: WIFI 5.3G Mid Body Front**DUT: 4G Body Worn Camera; Type: F2S-A; Serial: 2UKH-1**

Communication System: 802.11a (0); Frequency: 5280 MHz; Duty Cycle: 1:1.033
 Medium parameters used: $f = 5280$ MHz; $\sigma = 4.629$ S/m; $\epsilon_r = 35.505$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.43, 5.43, 5.43) @5280 MHz; Calibrated: 2024/3/4
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.218 W/kg


Zoom Scan (8x8x12) /Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.013 V/m; Power Drift = 0.16dB

Peak SAR (extrapolated) = 0.355 W/kg

SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.037 W/kg

Maximum value of SAR (measured) = 0.220 W/kg

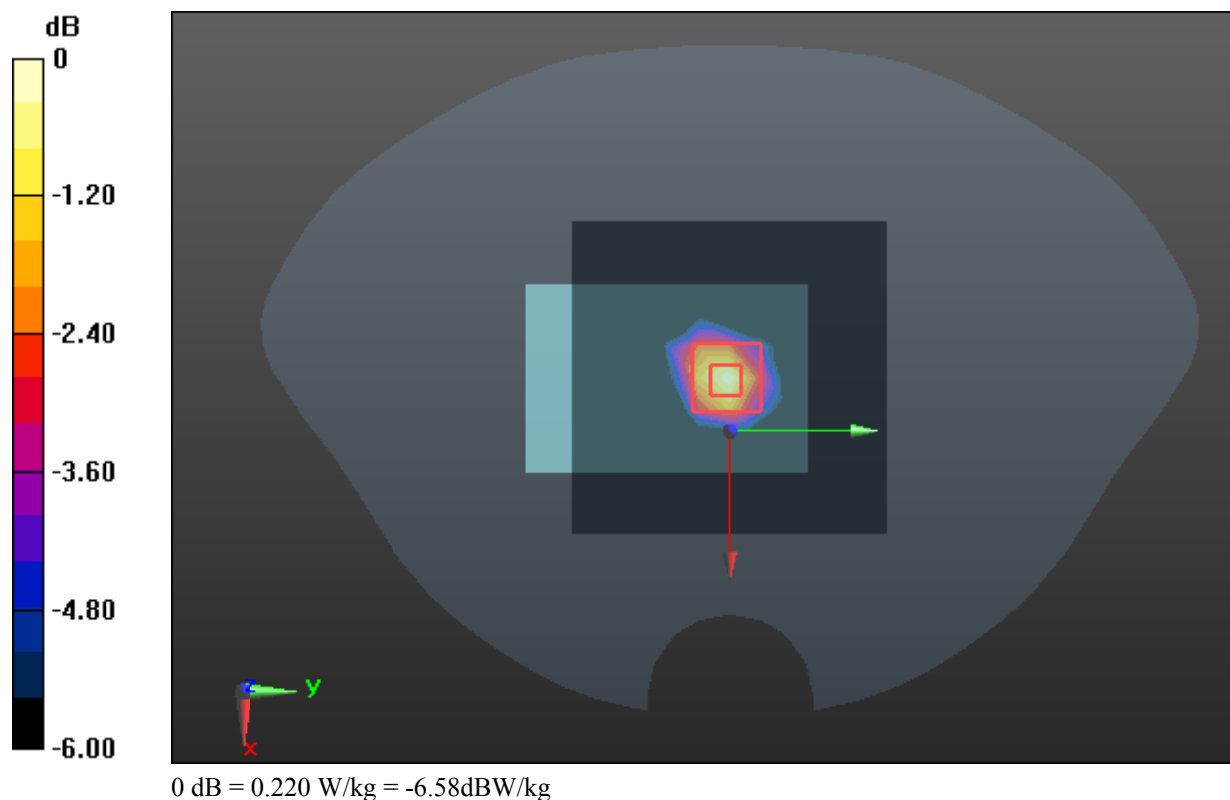

Test Plot 22#: WIFI 5.3G Mid Limb Top**DUT: 4G Body Worn Camera; Type: F2S-A; Serial: 2UKH-1**

Communication System: 802.11a (0); Frequency: 5280 MHz; Duty Cycle: 1:1.033
 Medium parameters used: $f = 5280$ MHz; $\sigma = 4.629$ S/m; $\epsilon_r = 35.505$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.43, 5.43, 5.43) @5280 MHz; Calibrated: 2024/3/4
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x13x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.61 W/kg


Zoom Scan (8x8x12) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 18.19 V/m; Power Drift = 0.06dB

Peak SAR (extrapolated) = 5.57 W/kg

SAR(1 g) = 0.957 W/kg; SAR(10 g) = 0.187 W/kg

Maximum value of SAR (measured) = 2.77 W/kg

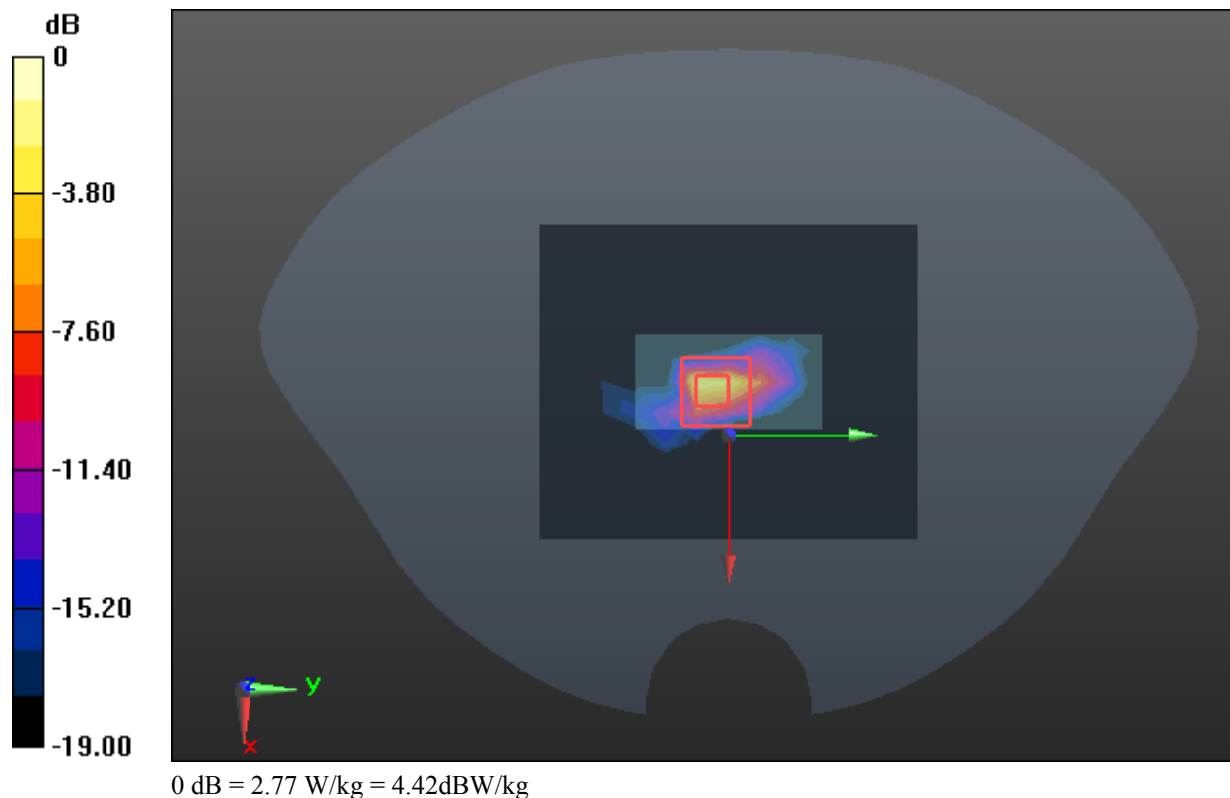

Test Plot 23#: WIFI 5.6G Low Body Front**DUT: 4G Body Worn Camera; Type: F2S-A; Serial: 2UKH-1**

Communication System: 802.11a (0); Frequency: 5500 MHz; Duty Cycle: 1:1.033
 Medium parameters used: $f = 5500$ MHz; $\sigma = 4.887$ S/m; $\epsilon_r = 34.994$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.71, 4.71, 4.71) @5500 MHz; Calibrated: 2024/3/4
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (13x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0567 W/kg


Zoom Scan (8x8x12) /Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.2880 V/m; Power Drift = 0.00dB

Peak SAR (extrapolated) = 0.959 W/kg

SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0882 W/kg

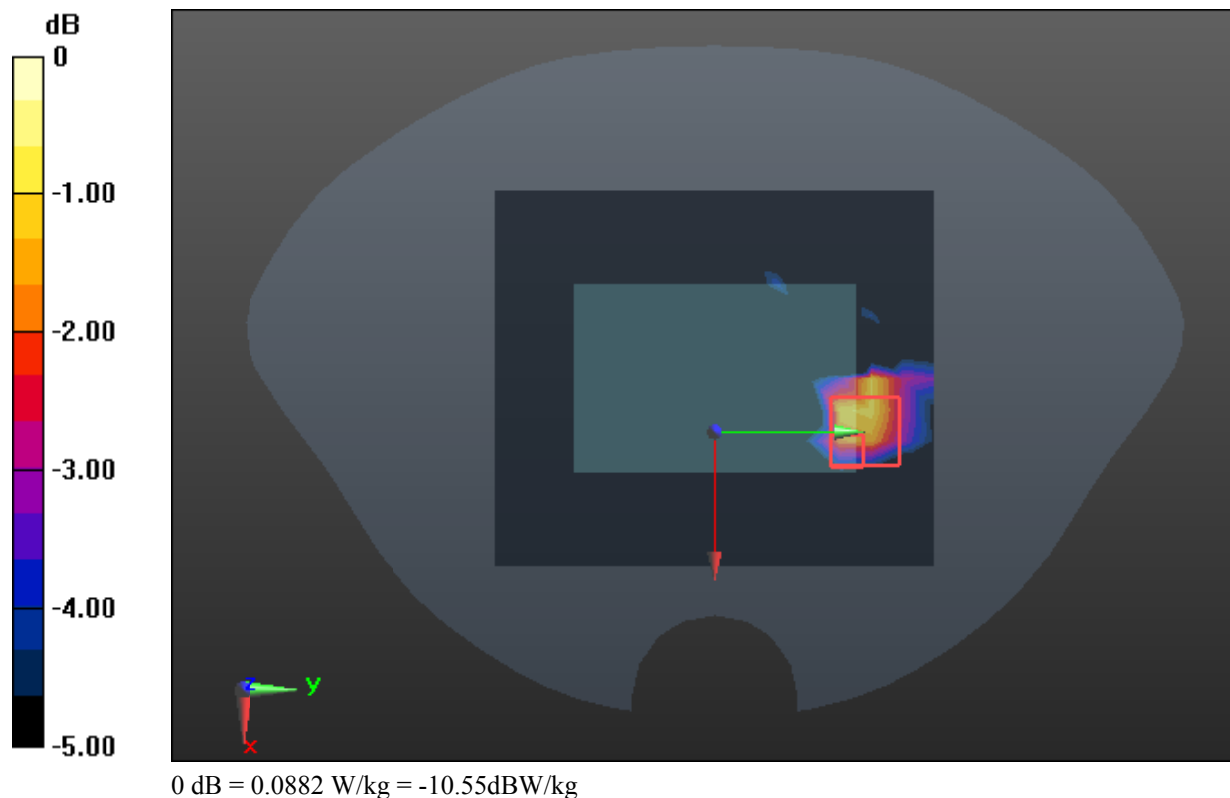

Test Plot 24#: WIFI 5.6G Low Limb Top**DUT: 4G Body Worn Camera; Type: F2S-A; Serial: 2UKH-1**

Communication System: 802.11a (0); Frequency: 5500 MHz; Duty Cycle: 1:1.033
 Medium parameters used: $f = 5500$ MHz; $\sigma = 4.887$ S/m; $\epsilon_r = 34.994$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.71, 4.71, 4.71) @5500 MHz; Calibrated: 2024/3/4
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 3.17 W/kg


Zoom Scan (8x8x12) /Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 16.09 V/m; Power Drift = 0.19dB

Peak SAR (extrapolated) = 6.19 W/kg

SAR(1 g) = 0.948 W/kg; SAR(10 g) = 0.203 W/kg

Maximum value of SAR (measured) = 2.79 W/kg

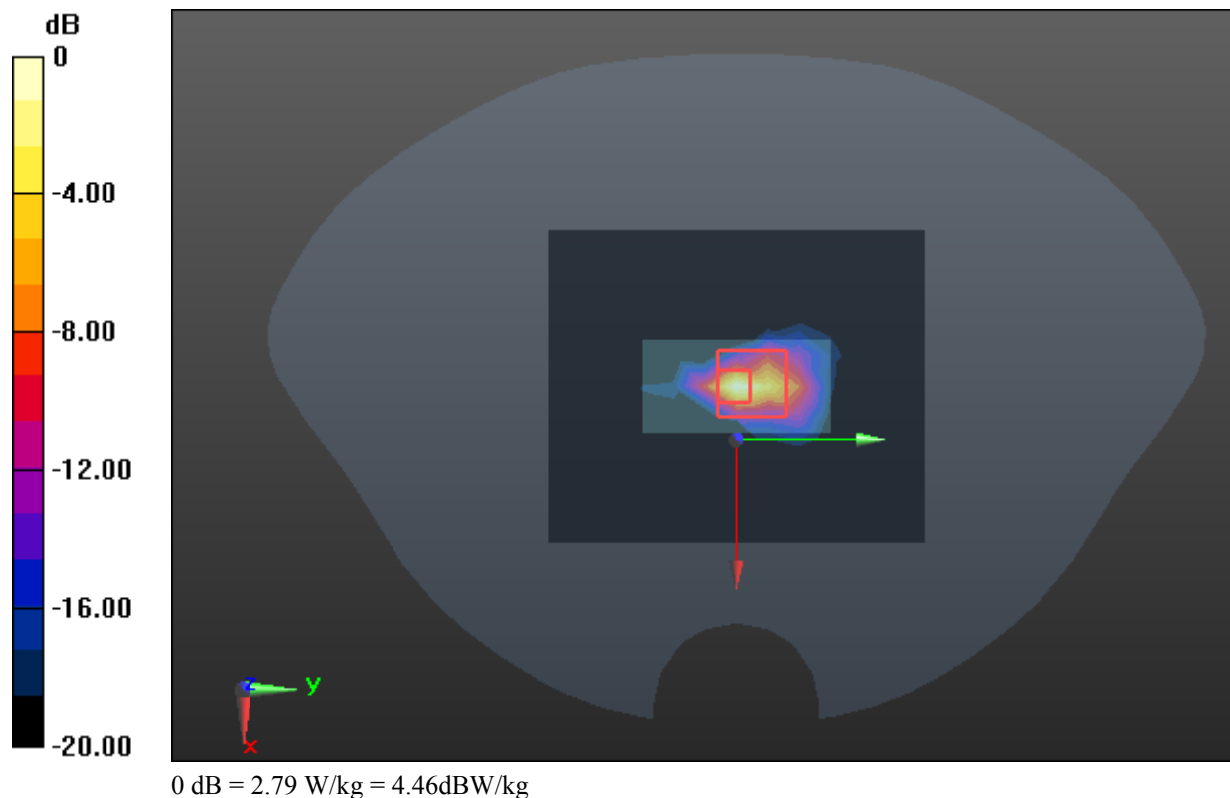

Test Plot 25#: WIFI 5.8G High Body Front**DUT: 4G Body Worn Camera; Type: F2S-A; Serial: 2UKH-1**

Communication System: 802.11a (0); Frequency: 5825 MHz; Duty Cycle: 1:1.033
 Medium parameters used: $f = 5825$ MHz; $\sigma = 5.317$ S/m; $\epsilon_r = 34.377$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.84, 4.84, 4.84) @5825 MHz; Calibrated: 2024/3/4
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.228 W/kg


Zoom Scan (8x8x12) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.279 V/m; Power Drift = 0.18dB

Peak SAR (extrapolated) = 0.534 W/kg

SAR(1 g) = 0.157 W/kg; SAR(10 g) = 0.112 W/kg

Maximum value of SAR (measured) = 0.245 W/kg

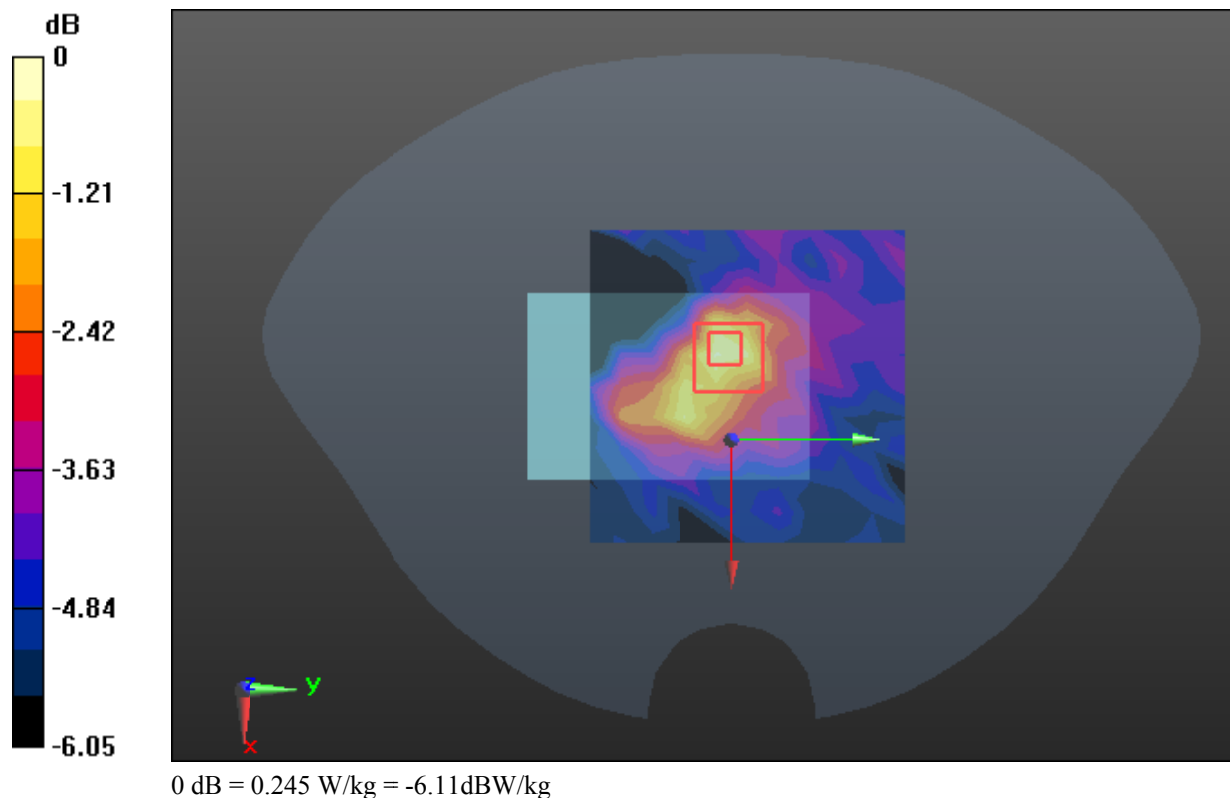

Test Plot 26#: WIFI 5.8G High Limb Top**DUT: 4G Body Worn Camera; Type: F2S-A; Serial: 2UKH-1**

Communication System: 802.11a (0); Frequency: 5825 MHz; Duty Cycle: 1:1.033
 Medium parameters used: $f = 5825$ MHz; $\sigma = 5.317$ S/m; $\epsilon_r = 34.377$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.84, 4.84, 4.84) @5825 MHz; Calibrated: 2024/3/4
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x12x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.00 W/kg

Zoom Scan (8x8x12) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 13.30 V/m; Power Drift = 0.16dB

Peak SAR (extrapolated) = 7.32 W/kg

SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.276 W/kg

Maximum value of SAR (measured) = 3.28 W/kg

