



TEST REPORT

Report Reference No...... : **TRE1708017604** R/C.....: 29420
FCC ID..... : **2AM6Q-W1450**
Applicant's name..... : **GRUPO SOLONE SA DE CV**
Address..... : AV. LOMAS DE SOTELO NO. 1112 PB,COL. LOMA HERMOSA,DEL. MIGUEL HIDALGO,CIUDAD DE MEXICO.
Manufacturer..... : GUANGDONG ENOK COMMUNICATION CO.,LTD
Address..... : 139&137Lixiang road ,Songmushan Dalang town, Dongguan,Guangdong China
Test item description : **Smart Phone**
Trade Mark : SOLONE
Model/Type reference..... : W1450
Listed Model(s) : -
Standard : **FCC CFR Title 47 Part 15 Subpart C Section 15.247**
Date of receipt of test sample..... : Aug.25, 2017
Date of testing..... : Aug.26, 2017 - Sep.07, 2017
Date of issue..... : Sep.08, 2017
Result..... : **PASS**

Compiled by
(Position+Printed name+Signature): File administrators Candy Liu

Candy Liu

Supervised by
(Position+Printed name+Signature): Project Engineer Lion Cai

Lion Cai

Approved by
(Position+Printed name+Signature): RF Manager Hans Hu

Hans Hu

Testing Laboratory Name : **Shenzhen Huatongwei International Inspection Co., Ltd.**

Address..... : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

<u>1.</u>	<u>TEST STANDARDS AND REPORT VERSION</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Report version	3
<u>2.</u>	<u>TEST DESCRIPTION</u>	<u>4</u>
<u>3.</u>	<u>SUMMARY</u>	<u>5</u>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Operation state	6
3.4.	EUT configuration	6
3.5.	Modifications	6
<u>4.</u>	<u>TEST ENVIRONMENT</u>	<u>7</u>
4.1.	Address of the test laboratory	7
4.2.	Test Facility	7
4.3.	Environmental conditions	8
4.4.	Statement of the measurement uncertainty	8
4.5.	Equipments Used during the Test	9
<u>5.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>10</u>
5.1.	Antenna requirement	10
5.2.	Conducted Emissions (AC Main)	11
5.3.	Conducted Peak Output Power	14
5.4.	20 dB Bandwidth	18
5.5.	Carrier Frequencies Separation	22
5.6.	Hopping Channel Number	24
5.7.	Dwell Time	26
5.8.	Pseudorandom Frequency Hopping Sequence	30
5.9.	Restricted band (radiated)	31
5.10.	Band edge and Spurious Emissions (conducted)	35
5.11.	Spurious Emissions (radiated)	55
<u>6.</u>	<u>TEST SETUP PHOTOS</u>	<u>59</u>
<u>7.</u>	<u>EXTERANAL AND INTERNAL PHOTOS</u>	<u>60</u>

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

1.2. Report version

Version No.	Date of issue	Description
00	Sep.08, 2017	Original

2. TEST DESCRIPTION

Test Item	Section in CFR 47	Result	Test Engineer
Antenna Requirement	15.203/15.247 (c)	Pass	William Wang
AC Power Line Conducted Emissions	15.207	Pass	William Wang
Conducted Peak Output Power	15.247 (b)(1)	Pass	William Wang
20 dB Bandwidth	15.247 (a)(1)	Pass	William Wang
Carrier Frequencies Separation	15.247 (a)(1)	Pass	William Wang
Hopping Channel Number	15.247 (a)(1)	Pass	William Wang
Dwell Time	15.247 (a)(1)	Pass	William Wang
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)&TCB Exclusion List (7 July 2002)	Pass	William Wang
Restricted band	15.247(d)/15.205	Pass	William Wang
Radiated Emissions	15.247(d)/15.209	Pass	William Wang

Note: The measurement uncertainty is not included in the test result.

3. SUMMARY

3.1. Client Information

Applicant:	GRUPO SOLONE SA DE CV
Address:	AV. LOMAS DE SOTELO NO. 1112 PB,COL. LOMA HERMOSA, DEL. MIGUEL HIDALGO,CIUDAD DE MEXICO.
Manufacturer:	GUANGDONG ENOK COMMUNICATION CO.,LTD
Address:	139&137Lixiang road ,Songmushan Dalang town,Dongguan, Guangdong China

3.2. Product Description

Name of EUT:	Smart Phone
Trade Mark:	SOLONE
Model No.:	W1450
Listed Model(s):	-
IMEI:	911524550220641
Power supply:	DC 3.8V From exchange battery
Adapter information:	Input: 100-240Va.c., 50/60Hz, 0.2A Output: 5Vd.c., 1A
Hardware version:	Ver.A
Software version:	M1701W1450V001
Bluetooth	
Version:	Supported BT4.0+EDR
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	PIFA Antenna
Antenna gain:	2.9 dBi

3.3. Operation state

➤ Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

Channel	Frequency (MHz)
00	2402
01	2403
:	:
39	2441
:	:
77	2479
78	2480

➤ TEST MODE

For RF test items:
The engineering test program was provided and enabled to make EUT continuous transmit
For AC power line conducted emissions:
The EUT was set to connect with the Bluetooth instrument under large package sizes transmission.
For Radiated suprious emissions test item:
The EUT in each of three orthogonal axis emissions had been tested ,but only the worst case (X axis) data recorded in the report.

3.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

/	Manufacturer:	/
	Model No.:	/
/	Manufacturer:	/
	Model No.:	/

3.5. Modifications

No modifications were implemented to meet testing criteria.

4. TEST ENVIRONMENT

4.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

4.2. Test Facility

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 762235

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files.

IC-Registration No.:5377B-1

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No.: 5377B-1.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors in calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd. quality system according to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Here after the best measurement capability for Shenzhen Huatongwei International Inspection Co., Ltd. is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emissions 9kHz~40GHz	1.60 dB	(1)
Radiated spurious emissions 9kHz~40GHz	2.20 dB	(1)
Conducted Emissions 9kHz~30MHz	3.39 dB	(1)
Radiated Emissions 30~1000MHz	4.24 dB	(1)
Radiated Emissions 1~18GHz	5.16 dB	(1)
Radiated Emissions 18~40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

4.5. Equipments Used during the Test

Conducted Emissions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Artificial Mains	Rohde&Schwarz	ESH2-Z5	100028	2016/11/13
2	EMI Test Receiver	Rohde&Schwarz	ESCI3	100038	2016/11/13
3	Pulse Limiter	Rohde&Schwarz	ESHSZ2	100044	2016/11/13
4	EMI Test Software	Rohde&Schwarz	ES-K1 V1.71	-	-

Radiated Emissions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI test receiver	Rohde&Schwarz	ESI 26	100009	2016/11/13
2	Loop Antenna	Rohde&Schwarz	HFH2-Z2	100020	2016/11/13
3	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	538	2016/11/13
4	Horn antenna	ShwarzBeck	9120D	1011	2016/11/13
5	Horn Antenna	SCHWARZBECK	BBHA9170	25841	2016/11/13
6	Amplifier	Sonoma	310N	E009-13	2016/11/13
7	JS Amplifier	Rohde&Schwarz	JS4-00101800-28-5A	F201504	2016/11/13
8	Amplifier	Compliance Direction systems	PAP1-4060	120	2016/11/13
9	High pass filter	Compliance Direction systems	BSU-6	34202	2016/11/13
10	EMI test Software	Rohde&Schwarz	ESK1	-	-
11	EMI test Software	Audix	E3	-	-
12	TURNTABLE	MATURO	TT2.0	-	-
13	ANTENNA MAST	MATURO	TAM-4.0-P	-	-

RF Conducted methods					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Spectrum Analyzer	Rohde&Schwarz	FSP	1164.4391.40	2016/11/13
2	MXA Signal Analyzer	Agilent Technologies	N9020A	MY5050187	2016/11/13

The Cal.Interval was one year.

5. TEST CONDITIONS AND RESULTS

5.1. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

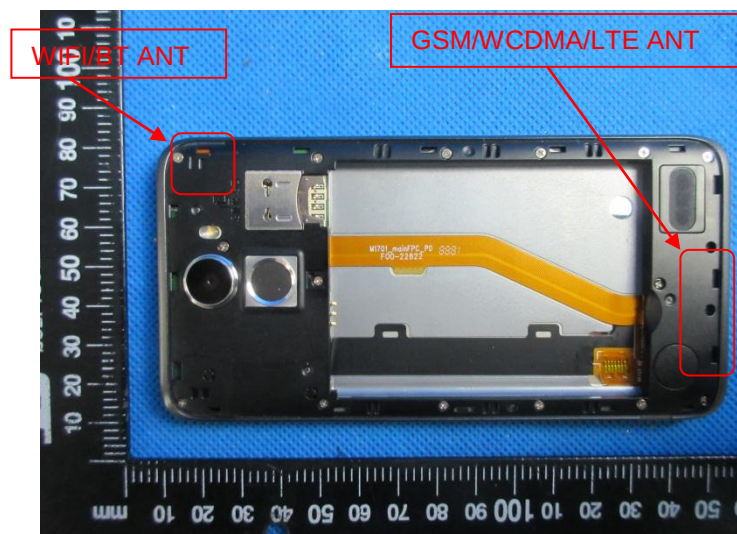
FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Test Result:

☒ **Passed** ☐ **Not Applicable**

The directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.



5.2. Conducted Emissions (AC Main)

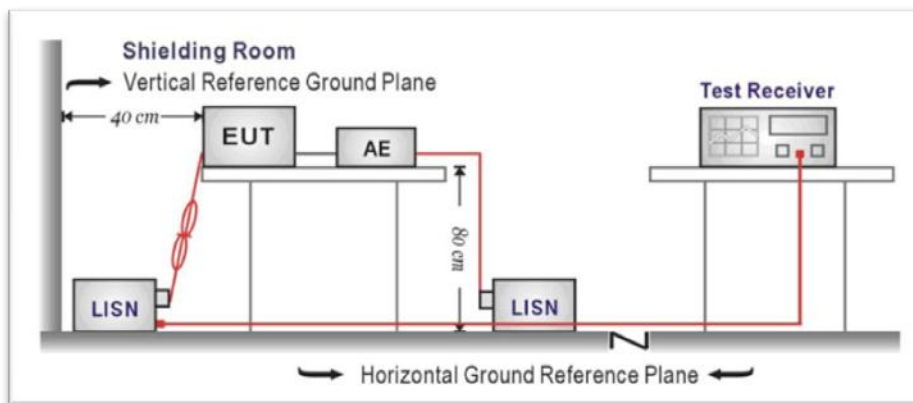
LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION



TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS

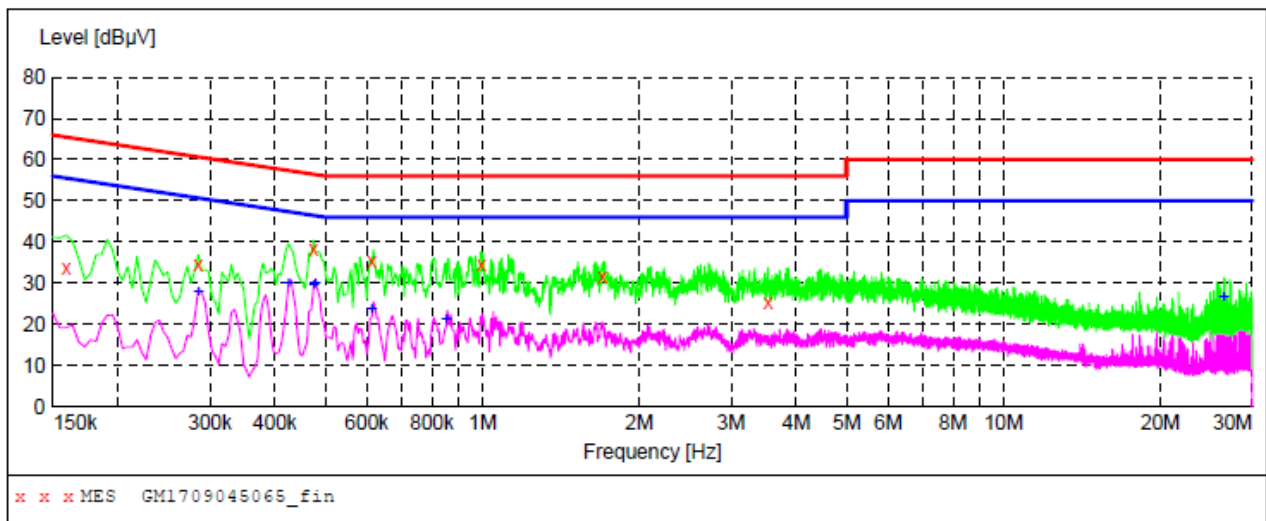
☒ Passed ☐ Not Applicable

Note:

- 1) Transd= Cable lose + Pulse Limiter Factor + Artificial Mains Factor
- 2) Margin= Limit - Level

Test Line:

L

**MEASUREMENT RESULT: "GM1709045065_fin"**

9/4/2017 7:22PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.159000	33.60	10.4	66	31.9	QP	L1	GND
0.285000	34.40	10.2	61	26.3	QP	L1	GND
0.474000	38.10	10.2	56	18.3	QP	L1	GND
0.613500	35.40	10.2	56	20.6	QP	L1	GND
0.996000	34.50	10.2	56	21.5	QP	L1	GND
1.702500	31.60	10.2	56	24.4	QP	L1	GND
3.538500	25.30	10.3	56	30.7	QP	L1	GND

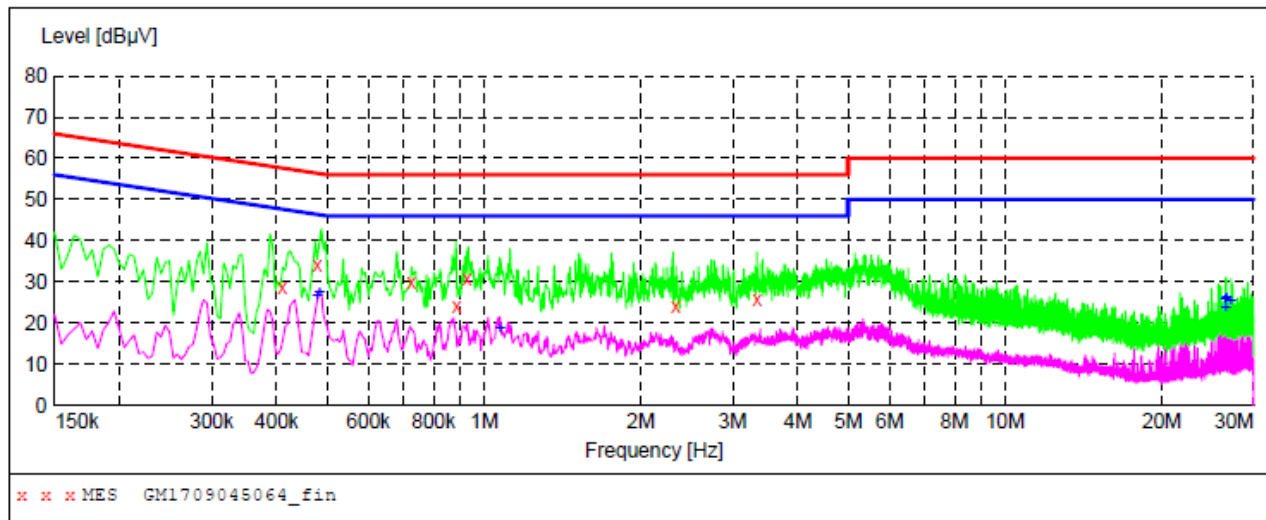
MEASUREMENT RESULT: "GM1709045065_fin2"

9/4/2017 7:22PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.285000	27.70	10.2	51	23.0	AV	L1	GND
0.424500	29.90	10.2	47	17.5	AV	L1	GND
0.474000	29.40	10.2	46	17.0	AV	L1	GND
0.478500	29.90	10.2	46	16.5	AV	L1	GND
0.613500	23.50	10.2	46	22.5	AV	L1	GND
0.852000	21.10	10.1	46	24.9	AV	L1	GND
26.484000	26.70	10.7	50	23.3	AV	L1	GND

Test Line:

N

**MEASUREMENT RESULT: "GM1709045064_fin"**

9/4/2017 7:18PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.411000	28.60	10.2	58	29.0	QP	N	GND
0.478500	34.10	10.2	56	22.3	QP	N	GND
0.726000	30.10	10.2	56	25.9	QP	N	GND
0.888000	24.20	10.1	56	31.8	QP	N	GND
0.928500	30.80	10.2	56	25.2	QP	N	GND
2.332500	24.20	10.2	56	31.8	QP	N	GND
3.345000	25.70	10.3	56	30.3	QP	N	GND

MEASUREMENT RESULT: "GM1709045064_fin2"

9/4/2017 7:18PM

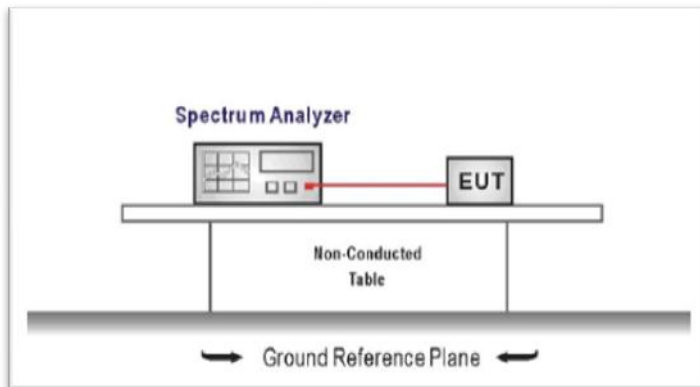
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.478500	26.60	10.2	46	19.8	AV	N	GND
0.483000	27.60	10.2	46	18.7	AV	N	GND
1.072500	18.80	10.2	46	27.2	AV	N	GND
26.484000	25.60	10.7	50	24.4	AV	N	GND
26.547000	23.80	10.7	50	26.2	AV	N	GND
26.605500	26.00	10.7	50	24.0	AV	N	GND
27.154500	25.30	10.7	50	24.7	AV	N	GND

5.3. Conducted Peak Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

TEST CONFIGURATION



TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the pathloss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
 Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 RBW $\geq$ the 20 dB bandwidth of the emission being measured, VBW $\geq$ RBW
 Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

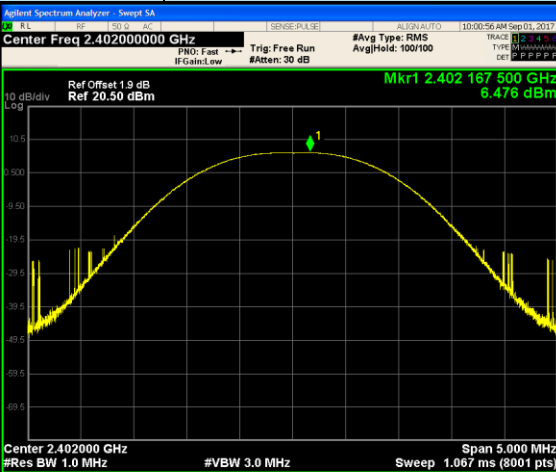
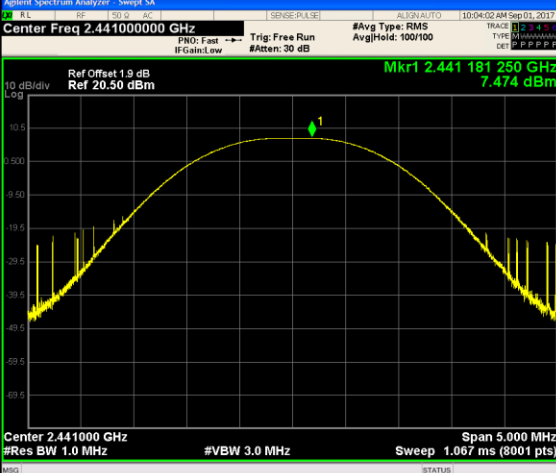
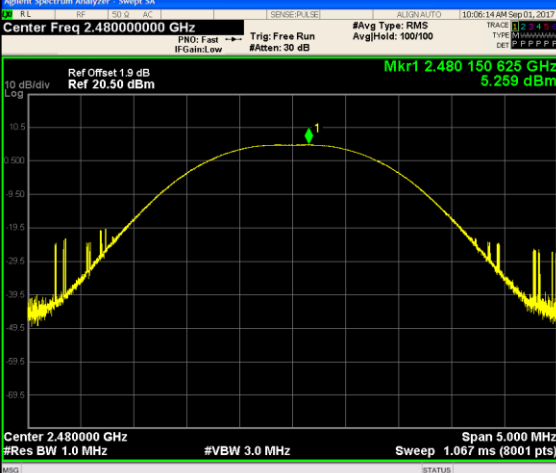
TEST MODE:

Please refer to the clause 3.3

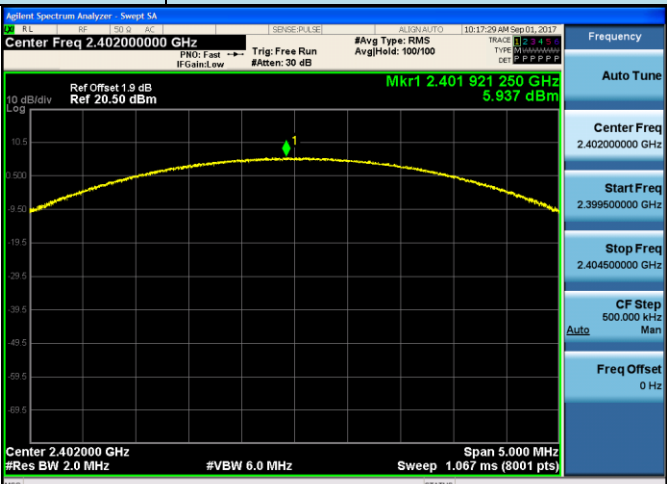
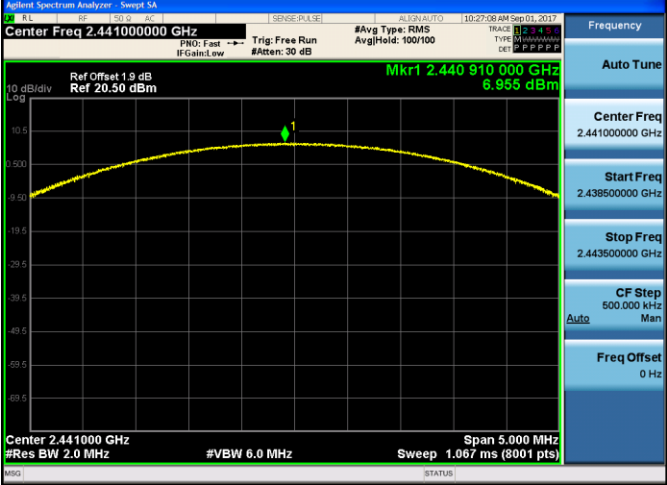
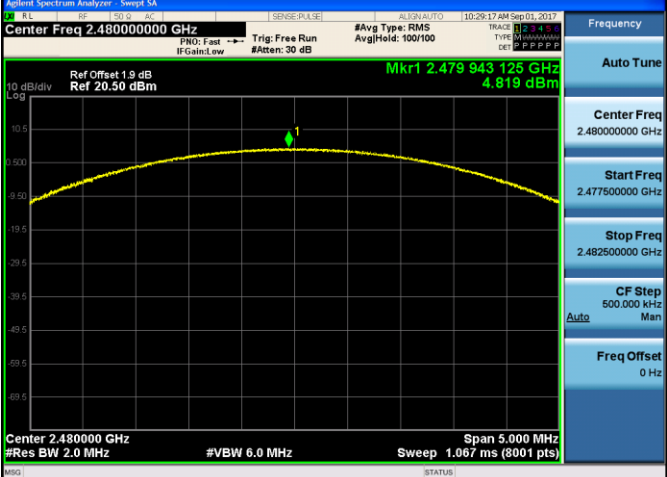
TEST RESULTS

☒ Passed ☐ Not Applicable

Modulation type	Channel	Output power (dBm)	Limit (dBm)	Result
GFSK	00	6.476	≤ 30.00	Pass
	39	7.474		
	78	5.259		
$\pi/4$ DQPSK	00	5.699	≤ 21.00	Pass
	39	6.869		
	78	4.622		
8DPSK	00	5.937	≤ 21.00	Pass
	39	6.955		
	78	4.819		

Modulation Type:		GFSK	
CH00			Frequency Auto Tune Center Freq 2.402000000 GHz Start Freq 2.399500000 GHz Stop Freq 2.404500000 GHz CF Step 500.000 kHz Man Freq Offset 0 Hz
CH39			Frequency Auto Tune Center Freq 2.441000000 GHz Start Freq 2.438500000 GHz Stop Freq 2.443500000 GHz CF Step 500.000 kHz Man Freq Offset 0 Hz
CH78			Frequency Auto Tune Center Freq 2.480000000 GHz Start Freq 2.477500000 GHz Stop Freq 2.482500000 GHz CF Step 500.000 kHz Man Freq Offset 0 Hz

Modulation Type:		$\pi/4$ DQPSK
CH00		
CH39		
CH78		

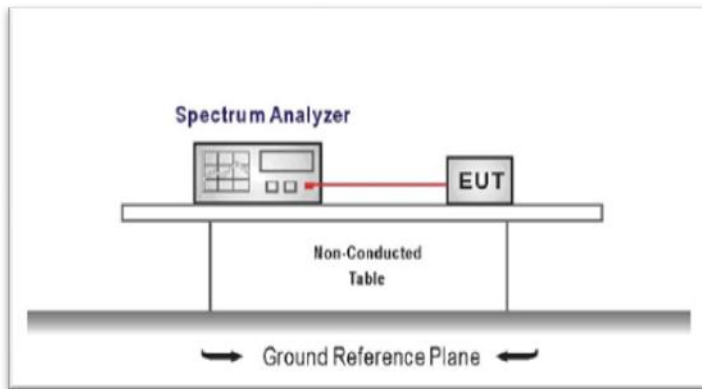
Modulation Type:		8DPSK
CH00		
CH39		
CH78		

5.4. 20 dB Bandwidth

LIMIT

N/A

TEST CONFIGURATION



TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
 Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
 RBW $\geq$ 1% of the 20 dB bandwidth, VBW $\geq$ RBW
 Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

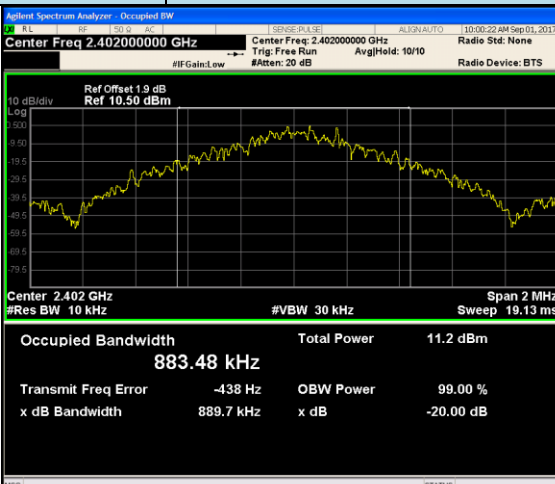
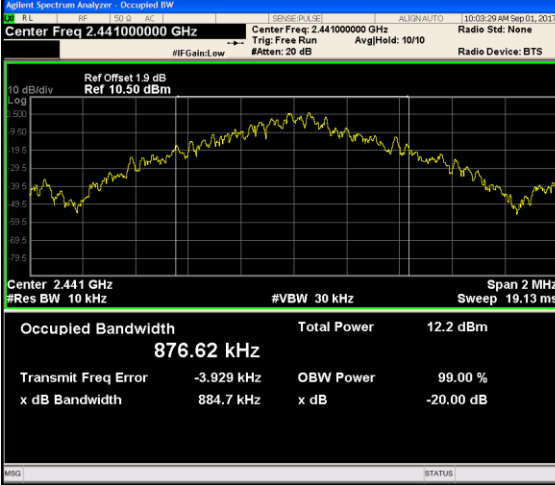
TEST MODE:

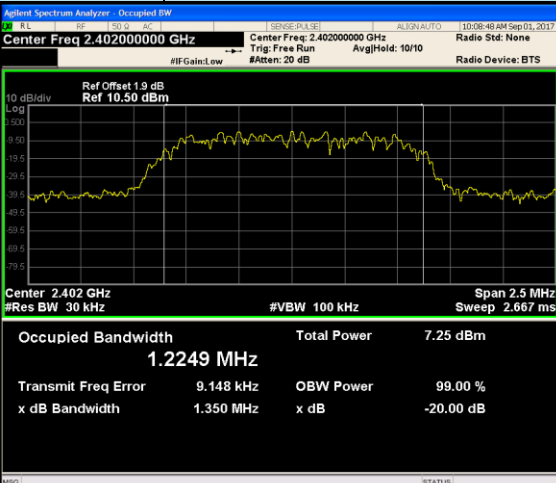
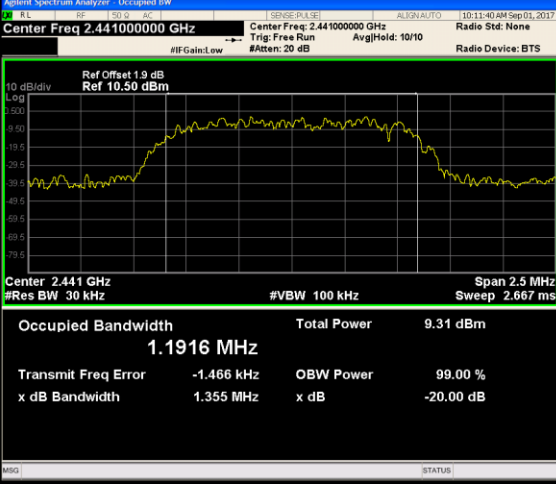
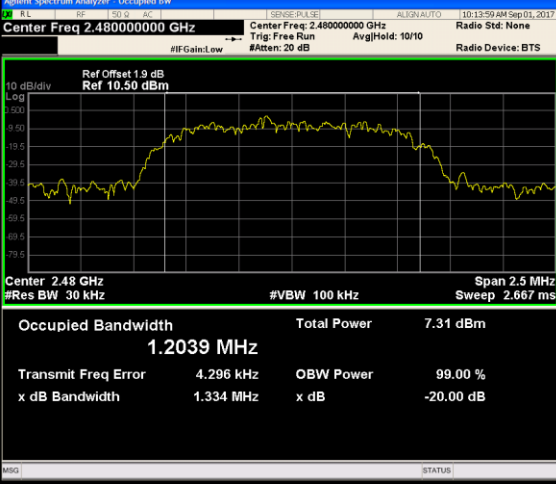
Please refer to the clause 3.3

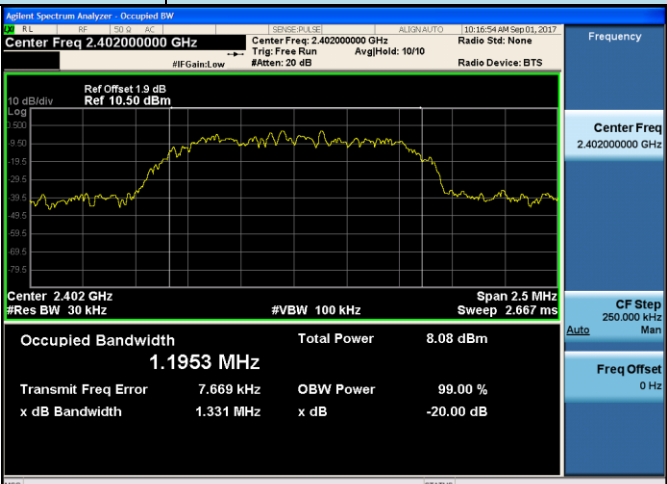
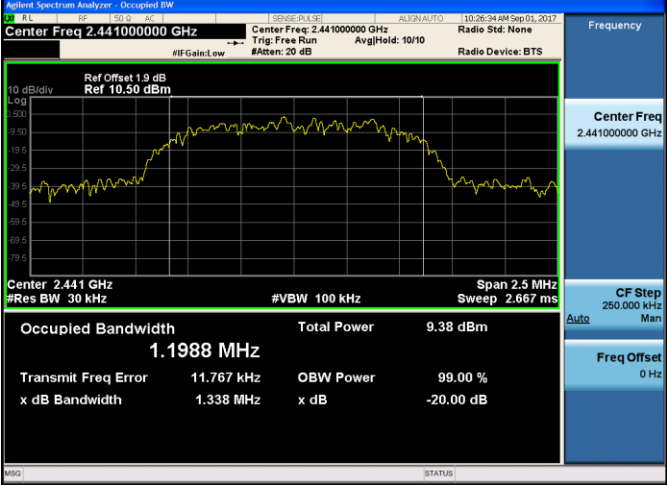
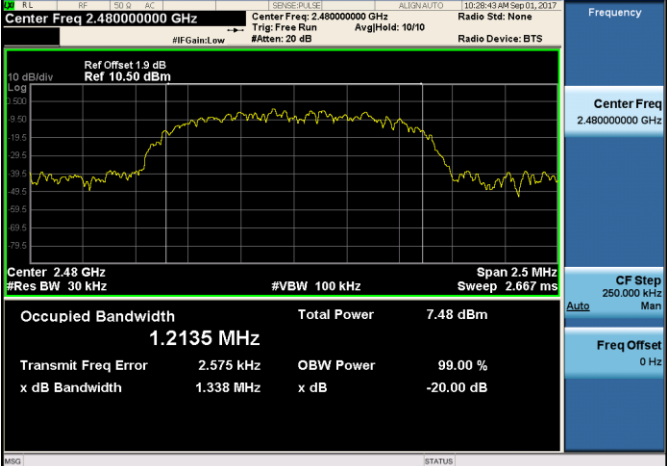
TEST RESULTS

☒ Passed ☐ Not Applicable

Modulation type	Channel	20 dB Bandwidth (MHz)	Limit (MHz)	Result
GFSK	00	0.890	-	Pass
	39	0.885		
	78	0.929		
$\pi/4$ DQPSK	00	1.350	-	Pass
	39	1.355		
	78	1.334		
8DPSK	00	1.331	-	Pass
	39	1.338		
	78	1.338		

Modulation Type:		GFSK
CH00	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.402000000 GHz Ref Offset 1.9 dB Ref 10.50 dBm Center 2.402 GHz #Res BW 10 kHz Occupied Bandwidth 883.48 kHz Total Power 11.2 dBm Transmit Freq Error -438 Hz OBW Power 99.00 % x dB Bandwidth 889.7 kHz x dB -20.00 dB	
CH39	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.441000000 GHz Ref Offset 1.9 dB Ref 10.50 dBm Center 2.441 GHz #Res BW 10 kHz Occupied Bandwidth 876.62 kHz Total Power 12.2 dBm Transmit Freq Error -3.929 kHz OBW Power 99.00 % x dB Bandwidth 884.7 kHz x dB -20.00 dB	
CH78	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.480000000 GHz Ref Offset 1.9 dB Ref 10.50 dBm Center 2.48 GHz #Res BW 10 kHz Occupied Bandwidth 902.38 kHz Total Power 9.76 dBm Transmit Freq Error 3.838 kHz OBW Power 99.00 % x dB Bandwidth 928.6 kHz x dB -20.00 dB	

Modulation Type:		$\pi/4$ DQPSK
CH00		Frequency Center Freq 2.40200000 GHz CF Step 250.000 kHz Freq Offset 0 Hz
CH39		Frequency Center Freq 2.441000000 GHz CF Step 250.000 kHz Freq Offset 0 Hz
CH78		Frequency Center Freq 2.480000000 GHz CF Step 250.000 kHz Freq Offset 0 Hz

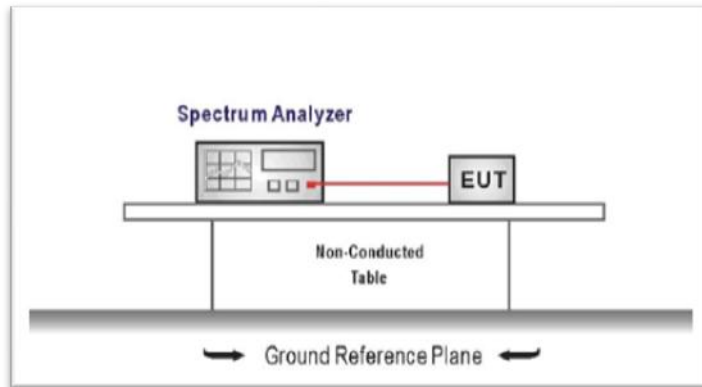
Modulation Type:		8DPSK
CH00		
CH39		
CH78		

5.5. Carrier Frequencies Separation

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25 kHz or the $2/3 \times 20$ dB bandwidth of the hopping channel, whichever is greater.

TEST CONFIGURATION



TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels
RBW $\geq 1\%$ of the span, VBW $\geq$ RBW
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable

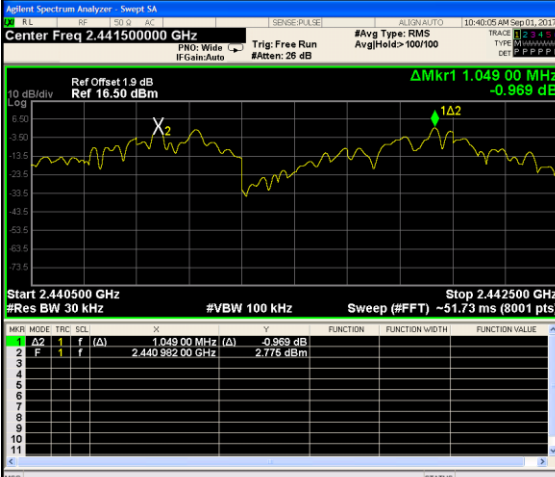
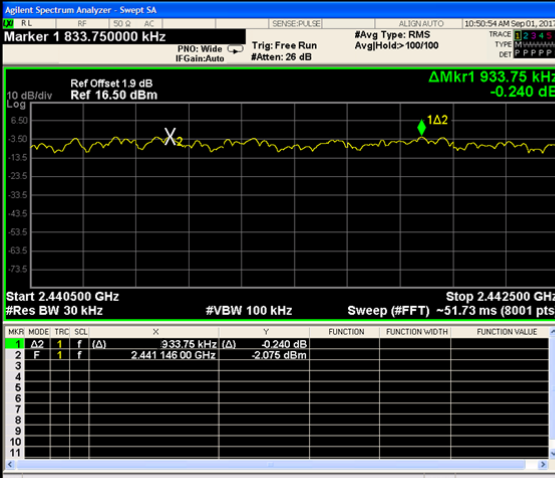
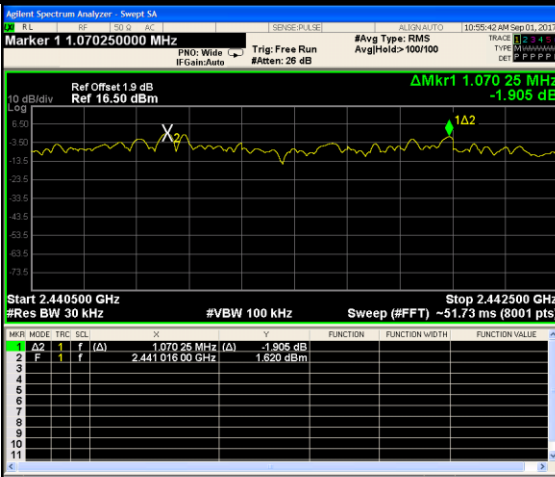
Modulation type	Channel	Carrier Frequencies Separation (MHz)	Limit (MHz) *	Result
GFSK	39	1.049	≥ 0.929	Pass
$\pi/4$ DQPSK	39	0.934	≥ 0.903	Pass
8DPSK	39	1.070	≥ 0.892	Pass

Note:

*: GFSK limit = The maximum 20 dB Bandwidth for GFSK modulation on the section 5.4.

$\pi/4$ DQPSK limit = $2/3 \times$ The maximum 20 dB Bandwidth for $\pi/4$ DQPSK modulation on the section 5.4.

8DPSK limit = $2/3 \times$ The maximum 20 dB Bandwidth for 8DPSK modulation on the section 5.4

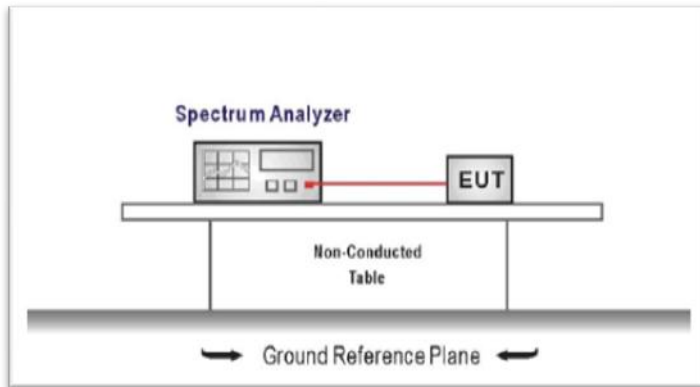
GFSK	 <table data-bbox="676 501 1233 658"><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SQ</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>A2</td><td>1</td><td>f</td><td>(Δ)</td><td>1.049 00 MHz (Δ)</td><td>-0.969 dB</td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.440 982 00 GHz</td><td>2.775 dBm</td><td></td><td></td></tr></table>	MKR	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(Δ)	1.049 00 MHz (Δ)	-0.969 dB			2	F	1	f		2.440 982 00 GHz	2.775 dBm			Frequency Auto Tune Center Freq 2.441500000 GHz Start Freq 2.440500000 GHz Stop Freq 2.442500000 GHz CF Step 200.000 kHz Freq Offset 0 Hz
MKR	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	A2	1	f	(Δ)	1.049 00 MHz (Δ)	-0.969 dB																							
2	F	1	f		2.440 982 00 GHz	2.775 dBm																							
$\pi/4$ DQPSK	 <table data-bbox="676 994 1233 1151"><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SQ</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>A2</td><td>1</td><td>f</td><td>(Δ)</td><td>933.75 kHz (Δ)</td><td>-0.240 dB</td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.441 145 00 GHz</td><td>-2.075 dBm</td><td></td><td></td></tr></table>	MKR	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(Δ)	933.75 kHz (Δ)	-0.240 dB			2	F	1	f		2.441 145 00 GHz	-2.075 dBm			Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2
MKR	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	A2	1	f	(Δ)	933.75 kHz (Δ)	-0.240 dB																							
2	F	1	f		2.441 145 00 GHz	-2.075 dBm																							
8DPSK	 <table data-bbox="676 1487 1233 1644"><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SQ</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>A2</td><td>1</td><td>f</td><td>(Δ)</td><td>1.070 25 MHz (Δ)</td><td>-1.905 dB</td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.441 016 00 GHz</td><td>1.620 dBm</td><td></td><td></td></tr></table>	MKR	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(Δ)	1.070 25 MHz (Δ)	-1.905 dB			2	F	1	f		2.441 016 00 GHz	1.620 dBm			Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2
MKR	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	A2	1	f	(Δ)	1.070 25 MHz (Δ)	-1.905 dB																							
2	F	1	f		2.441 016 00 GHz	1.620 dBm																							

5.6. Hopping Channel Number

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1): Frequency hopping systems in the 2400–2483.5 MHz band shall use at least **15** channels.

TEST CONFIGURATION



TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = the frequency band of operation
RBW $\geq$ 1% of the span, VBW $\geq$ RBW
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

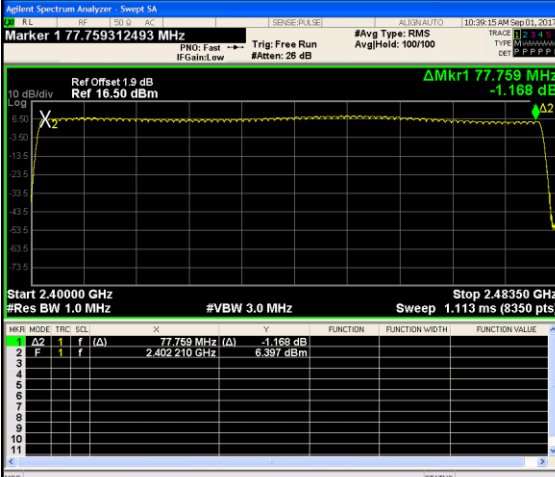
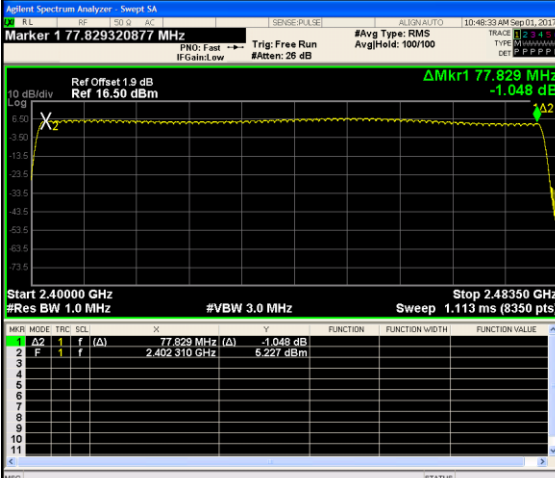
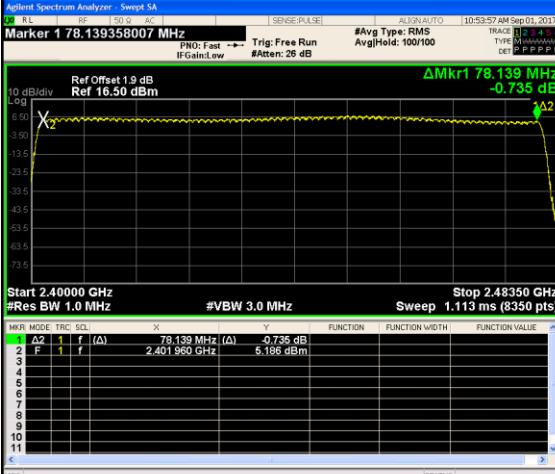
TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable

Modulation type	Channel number	Limit	Result
GFSK	79	≥ 15.00	Pass
$\pi/4$ DQPSK	79		
8DPSK	79		

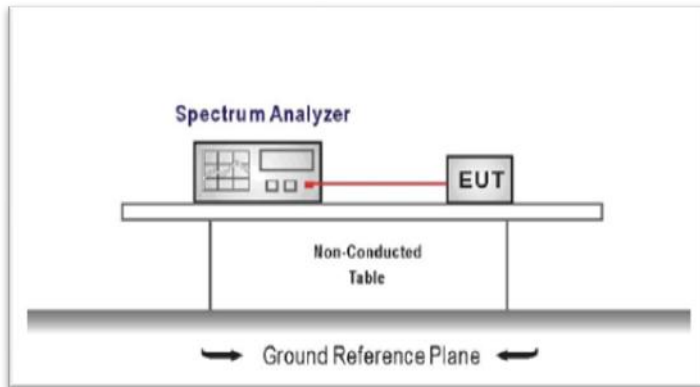
GFSK	 <table data-bbox="676 501 1233 658"><tr><th>PKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>A2</td><td>1</td><td>f</td><td>(Δ)</td><td>77.759 MHz (Δ)</td><td>-1.168 dB</td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.402 210 GHz</td><td>6.397 dBm</td><td></td><td></td></tr></table>	PKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(Δ)	77.759 MHz (Δ)	-1.168 dB			2	F	1	f		2.402 210 GHz	6.397 dBm			Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2
PKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	A2	1	f	(Δ)	77.759 MHz (Δ)	-1.168 dB																							
2	F	1	f		2.402 210 GHz	6.397 dBm																							
$\pi/4$ DQPSK	 <table data-bbox="676 994 1233 1151"><tr><th>PKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>A2</td><td>1</td><td>f</td><td>(Δ)</td><td>77.829 MHz (Δ)</td><td>-1.048 dB</td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.402 310 GHz</td><td>5.227 dBm</td><td></td><td></td></tr></table>	PKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(Δ)	77.829 MHz (Δ)	-1.048 dB			2	F	1	f		2.402 310 GHz	5.227 dBm			Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2
PKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	A2	1	f	(Δ)	77.829 MHz (Δ)	-1.048 dB																							
2	F	1	f		2.402 310 GHz	5.227 dBm																							
8DPSK	 <table data-bbox="676 1487 1233 1641"><tr><th>PKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>A2</td><td>1</td><td>f</td><td>(Δ)</td><td>78.139 MHz (Δ)</td><td>-0.735 dB</td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.401 950 GHz</td><td>5.168 dBm</td><td></td><td></td></tr></table>	PKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(Δ)	78.139 MHz (Δ)	-0.735 dB			2	F	1	f		2.401 950 GHz	5.168 dBm			Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2
PKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	A2	1	f	(Δ)	78.139 MHz (Δ)	-0.735 dB																							
2	F	1	f		2.401 950 GHz	5.168 dBm																							

5.7. Dwell Time

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):The average time of occupancy on any channel shall not be greater than 0.4 seconds within a pe-riod of 0.4 seconds multiplied by the number of hopping channels employed.

TEST CONFIGURATION



TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = zero span, centered on a hopping channel, RBW= 1 MHz, VBW ≥ RBW
Sweep = as necessary to capture the entire dwell time per hopping channel,
Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

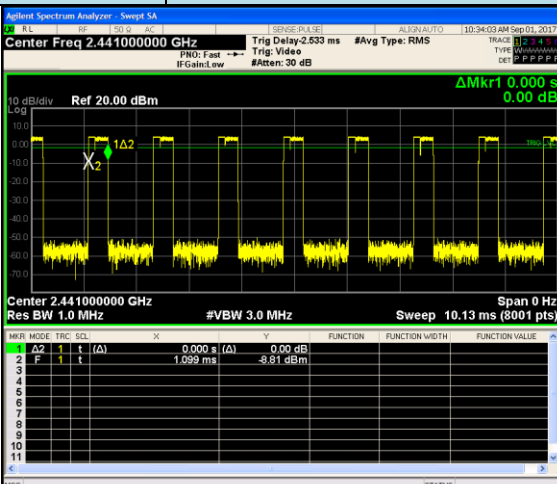
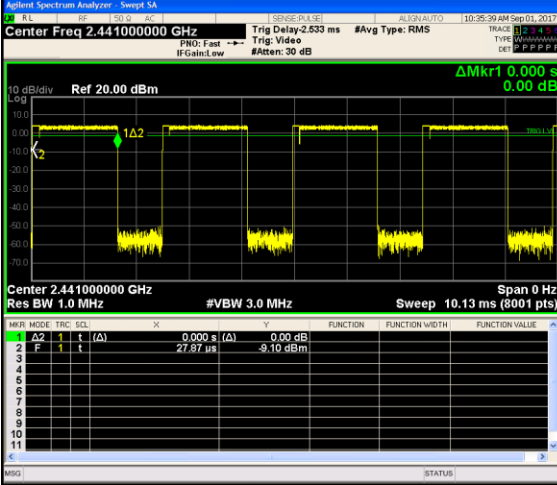
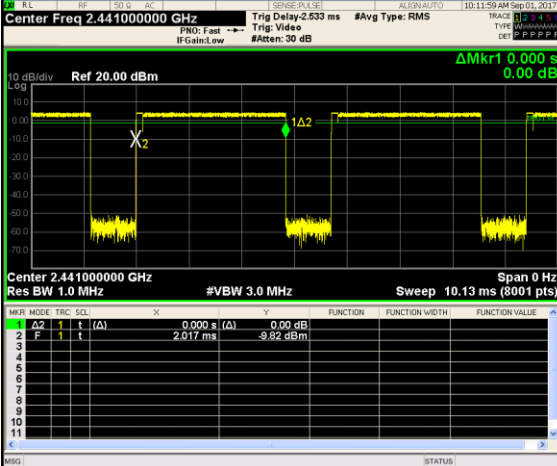
☒ Passed ☐ Not Applicable

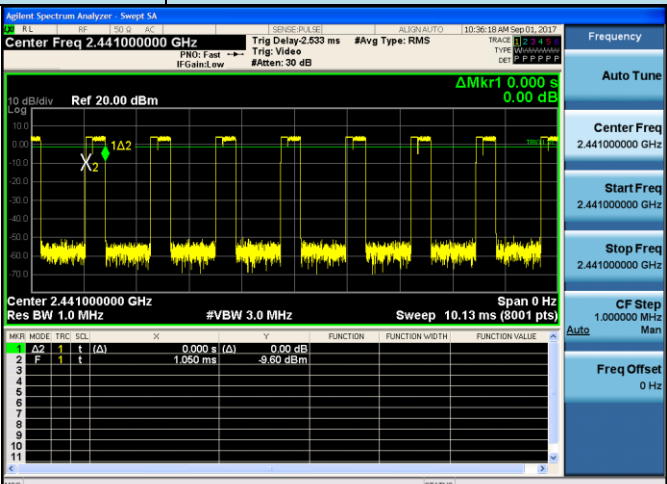
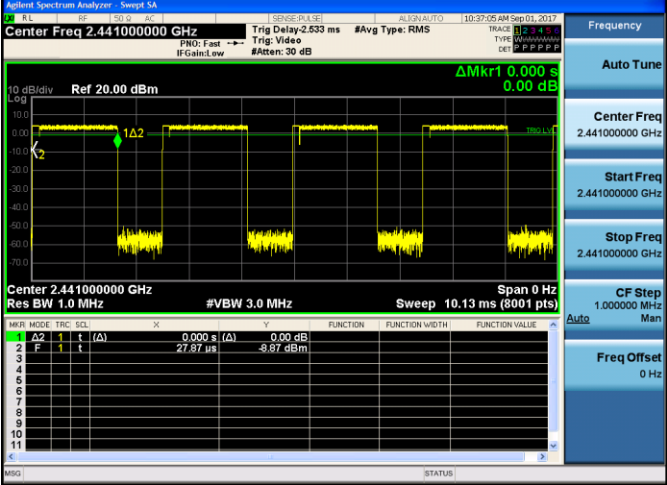
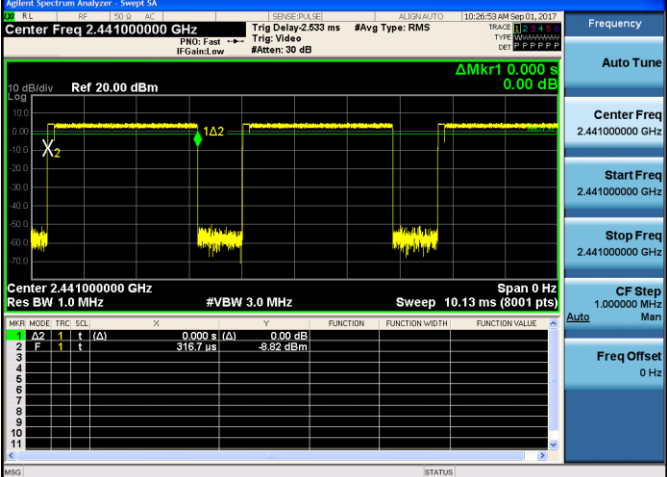
Modulation type	Channel	Dwell time (Second)	Limit (Second)	Result
GFSK	DH1	0.118	≤ 0.40	Pass
	DH3	0.261		
	DH5	0.307		
π/4DQPSK	2DH1	0.122	≤ 0.40	Pass
	2DH3	0.261		
	2DH5	0.307		
8DPSK	3DH1	0.122	≤ 0.40	Pass
	3DH3	0.261		
	3DH5	0.307		

Note:

1. We have tested all mode at high,middle and low channel,and recoreded worst case at middle channel.
2. Dwell time=Pulse time (ms) × (1600 ÷ 2 ÷ 79) ×31.6 Second for DH1, 2DH1, 3DH1
Dwell time=Pulse time (ms) × (1600 ÷ 4 ÷ 79) ×31.6 Second for DH3, 2DH3, 3DH3
Dwell time=Pulse time (ms) × (1600 ÷ 6 ÷ 79) ×31.6 Second for DH5, 2DH5, 3DH5

Modulation Type:		GFSK
DH1		
DH3		
DH5		

Modulation Type:		$\pi/4$ DQPSK																																									
2DH1	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>Δ2</td><td>1</td><td>t</td><td>(Δ)</td><td>0.000 s</td><td>(Δ)</td><td>0.00 dB</td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>t</td><td>(Δ)</td><td>1.099 ms</td><td></td><td>-8.81 dBm</td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	t	(Δ)	0.000 s	(Δ)	0.00 dB		2	F	1	t	(Δ)	1.099 ms		-8.81 dBm		<table><tr><td>Frequency</td><td>Auto Tune</td></tr><tr><td>Center Freq</td><td>2.441000000 GHz</td></tr><tr><td>Start Freq</td><td>2.441000000 GHz</td></tr><tr><td>Stop Freq</td><td>2.441000000 GHz</td></tr><tr><td>CF Step</td><td>1.000000 MHz</td></tr><tr><td>Auto</td><td>Man</td></tr><tr><td>Freq Offset</td><td>0 Hz</td></tr></table>	Frequency	Auto Tune	Center Freq	2.441000000 GHz	Start Freq	2.441000000 GHz	Stop Freq	2.441000000 GHz	CF Step	1.000000 MHz	Auto	Man	Freq Offset	0 Hz
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																			
1	Δ2	1	t	(Δ)	0.000 s	(Δ)	0.00 dB																																				
2	F	1	t	(Δ)	1.099 ms		-8.81 dBm																																				
Frequency	Auto Tune																																										
Center Freq	2.441000000 GHz																																										
Start Freq	2.441000000 GHz																																										
Stop Freq	2.441000000 GHz																																										
CF Step	1.000000 MHz																																										
Auto	Man																																										
Freq Offset	0 Hz																																										
2DH3	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>Δ2</td><td>1</td><td>t</td><td>(Δ)</td><td>0.000 s</td><td>(Δ)</td><td>0.00 dB</td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>t</td><td>(Δ)</td><td>27.87 μs</td><td></td><td>-9.10 dBm</td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	t	(Δ)	0.000 s	(Δ)	0.00 dB		2	F	1	t	(Δ)	27.87 μs		-9.10 dBm		<table><tr><td>Frequency</td><td>Auto Tune</td></tr><tr><td>Center Freq</td><td>2.441000000 GHz</td></tr><tr><td>Start Freq</td><td>2.441000000 GHz</td></tr><tr><td>Stop Freq</td><td>2.441000000 GHz</td></tr><tr><td>CF Step</td><td>1.000000 MHz</td></tr><tr><td>Auto</td><td>Man</td></tr><tr><td>Freq Offset</td><td>0 Hz</td></tr></table>	Frequency	Auto Tune	Center Freq	2.441000000 GHz	Start Freq	2.441000000 GHz	Stop Freq	2.441000000 GHz	CF Step	1.000000 MHz	Auto	Man	Freq Offset	0 Hz
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																			
1	Δ2	1	t	(Δ)	0.000 s	(Δ)	0.00 dB																																				
2	F	1	t	(Δ)	27.87 μs		-9.10 dBm																																				
Frequency	Auto Tune																																										
Center Freq	2.441000000 GHz																																										
Start Freq	2.441000000 GHz																																										
Stop Freq	2.441000000 GHz																																										
CF Step	1.000000 MHz																																										
Auto	Man																																										
Freq Offset	0 Hz																																										
2DH5	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>Δ2</td><td>1</td><td>t</td><td>(Δ)</td><td>0.000 s</td><td>(Δ)</td><td>0.00 dB</td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>t</td><td>(Δ)</td><td>2.017 ms</td><td></td><td>-9.82 dBm</td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	t	(Δ)	0.000 s	(Δ)	0.00 dB		2	F	1	t	(Δ)	2.017 ms		-9.82 dBm		<table><tr><td>Frequency</td><td>Auto Tune</td></tr><tr><td>Center Freq</td><td>2.441000000 GHz</td></tr><tr><td>Start Freq</td><td>2.441000000 GHz</td></tr><tr><td>Stop Freq</td><td>2.441000000 GHz</td></tr><tr><td>CF Step</td><td>1.000000 MHz</td></tr><tr><td>Auto</td><td>Man</td></tr><tr><td>Freq Offset</td><td>0 Hz</td></tr></table>	Frequency	Auto Tune	Center Freq	2.441000000 GHz	Start Freq	2.441000000 GHz	Stop Freq	2.441000000 GHz	CF Step	1.000000 MHz	Auto	Man	Freq Offset	0 Hz
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																			
1	Δ2	1	t	(Δ)	0.000 s	(Δ)	0.00 dB																																				
2	F	1	t	(Δ)	2.017 ms		-9.82 dBm																																				
Frequency	Auto Tune																																										
Center Freq	2.441000000 GHz																																										
Start Freq	2.441000000 GHz																																										
Stop Freq	2.441000000 GHz																																										
CF Step	1.000000 MHz																																										
Auto	Man																																										
Freq Offset	0 Hz																																										

Modulation Type:		8DPSK
3DH1		
3DH3		
3DH5		

5.8. Pseudorandom Frequency Hopping Sequence

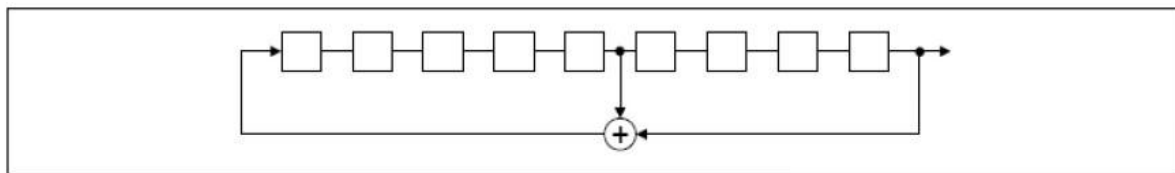
LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

TEST RESULTS

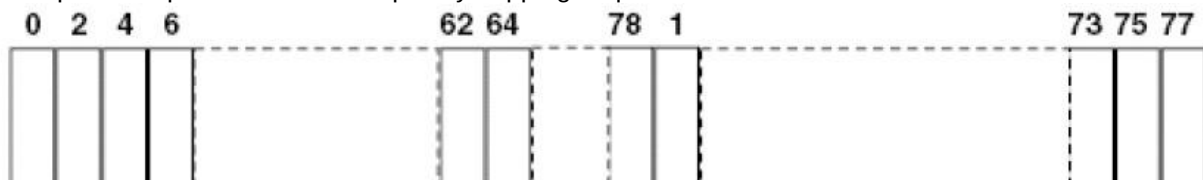
The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

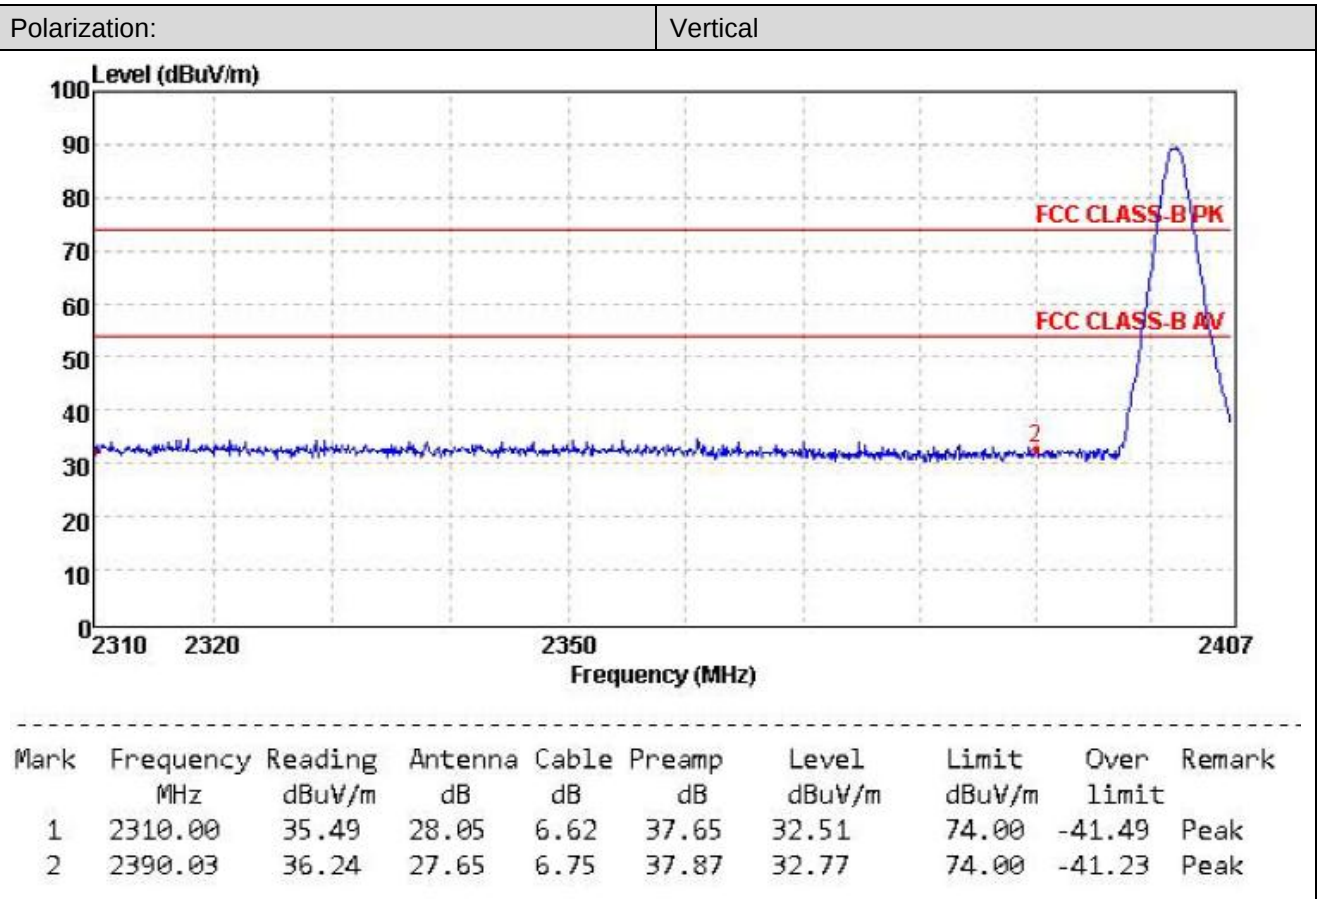
An example of pseudorandom frequency hopping sequence as follows:

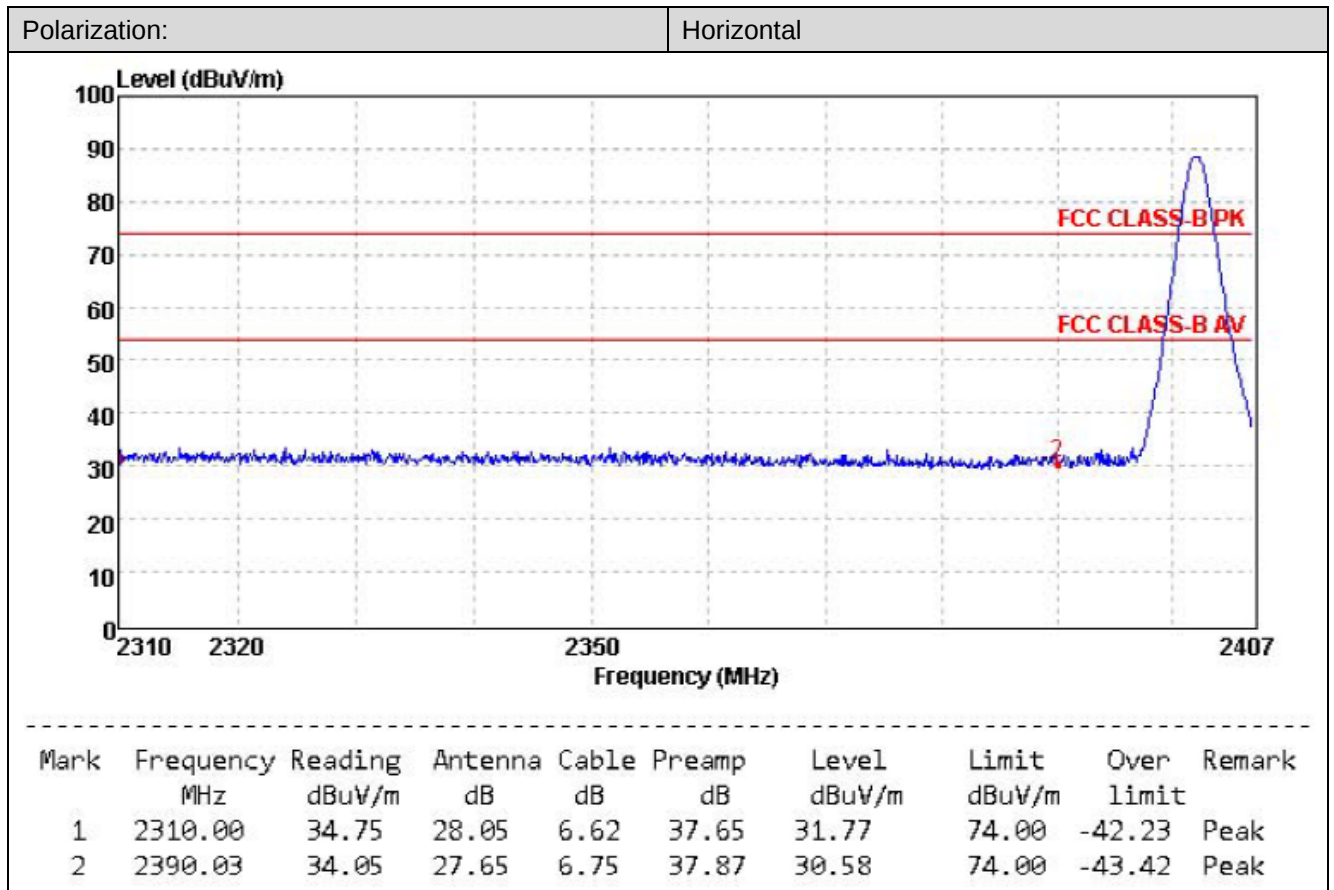


Each frequency used equally one the average by each transmitter.

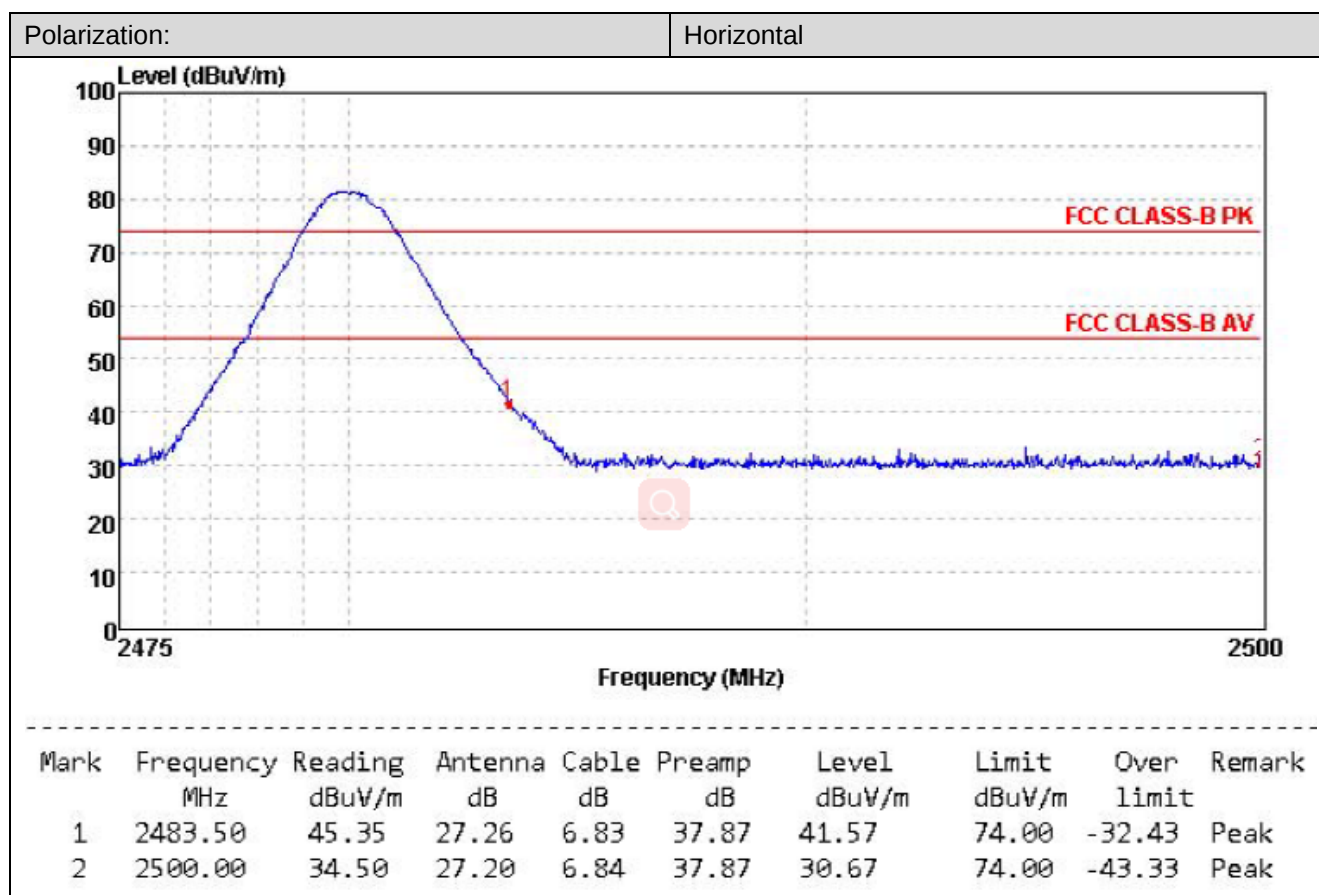
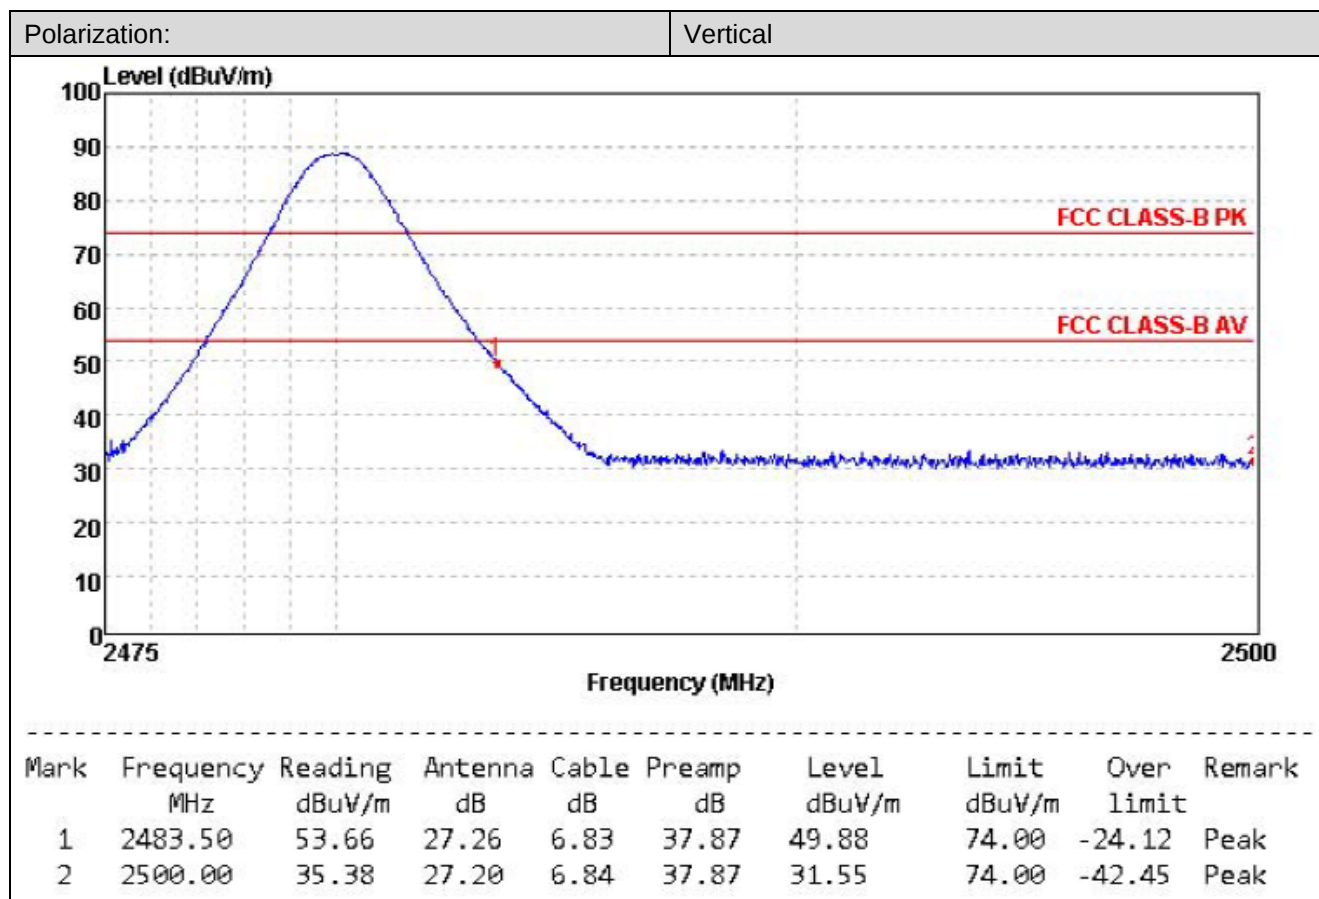
The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

CH00									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2310.00	34.75	28.05	6.62	37.65	31.77	74.00	-42.23	Horizontal	Peak
2390.03	34.05	27.65	6.75	37.87	30.58	74.00	-43.42	Horizontal	Peak
2310.00	35.49	28.05	6.62	37.65	32.51	74.00	-41.49	Vertical	Peak
2390.03	36.24	27.65	6.75	37.87	32.77	74.00	-41.23	Vertical	Peak





CH78									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2483.50	45.35	27.26	6.83	37.87	41.57	74.00	-32.43	Horizontal	Peak
2500.00	34.50	27.20	6.84	37.87	30.67	74.00	-43.33	Horizontal	Peak
2483.50	53.66	27.26	6.83	37.87	49.88	74.00	-24.12	Vertical	Peak
2500.00	35.38	27.20	6.84	37.87	31.55	74.00	-42.45	Vertical	Peak

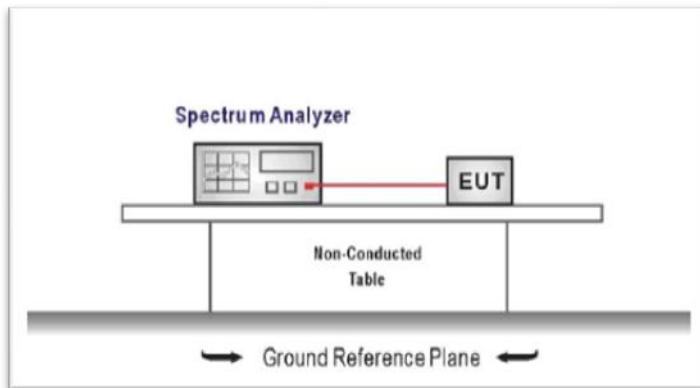


5.10. Band edge and Spurious Emissions (conducted)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

TEST CONFIGURATION



TEST PROCEDURE

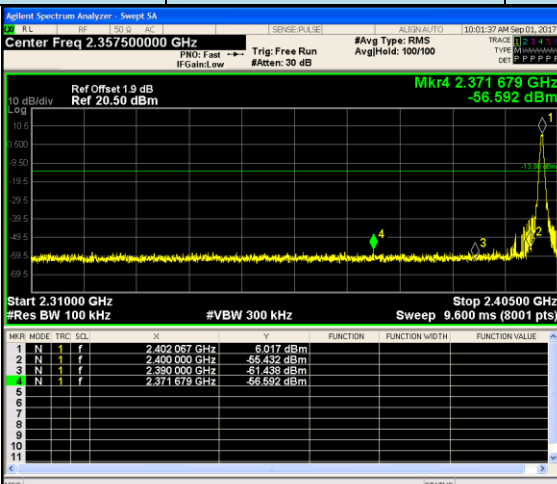
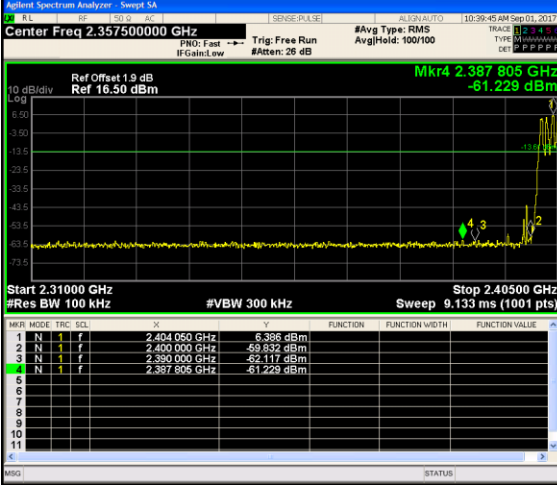
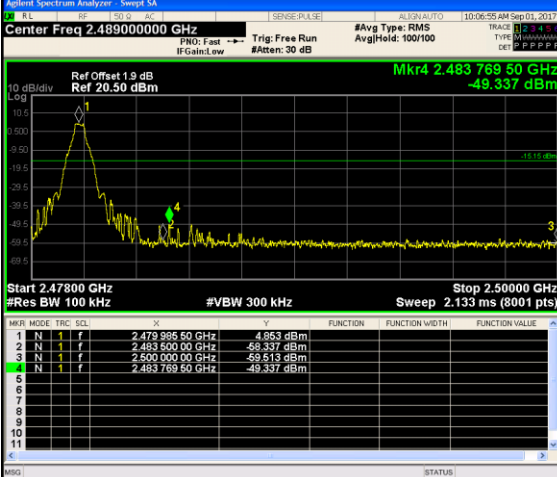
1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
RBW = 100 kHz, VBW $\geq$ RBW
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:

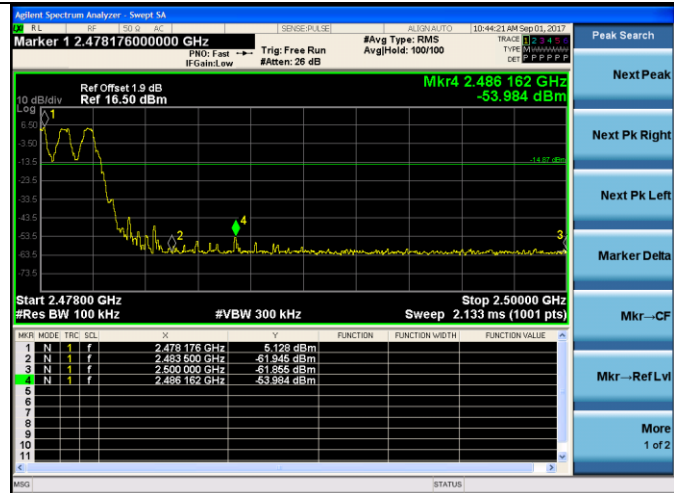
Please refer to the clause 3.3

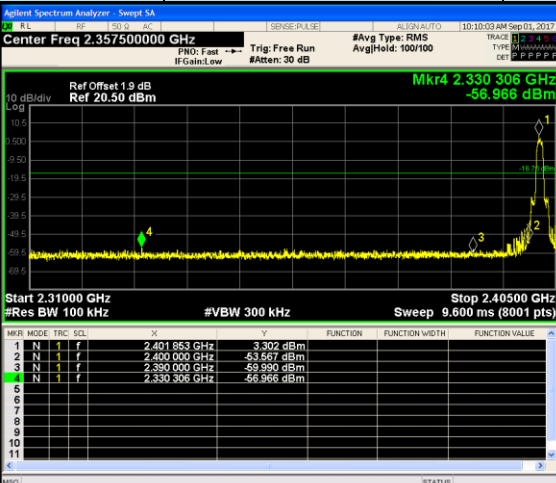
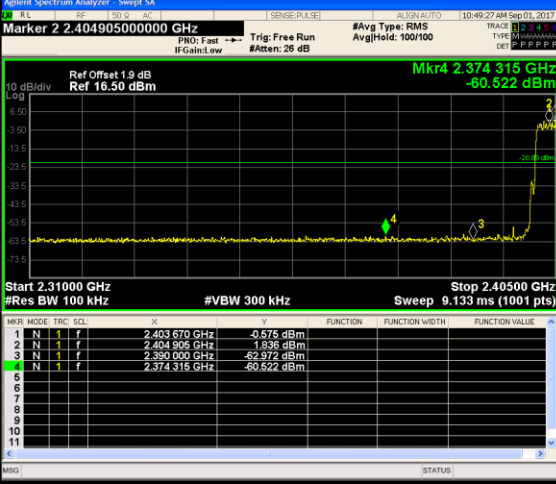
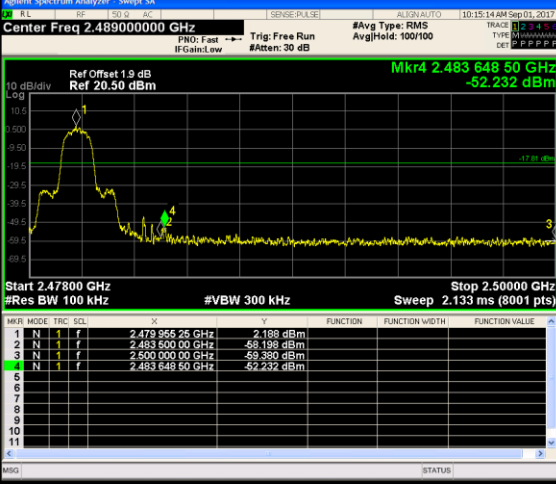
TEST RESULTS

☒ Passed ☐ Not Applicable

Test Item:	Band edge	Modulation type:	GFSK																																													
CH00 No hopping mode	<table><thead><tr><th>Mkr</th><th>Mode</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.402 087 GHz</td><td>6.017 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 GHz</td><td>-65.432 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 000 GHz</td><td>-61.438 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.371 679 GHz</td><td>-56.592 dBm</td><td></td><td></td><td></td></tr></tbody></table>			Mkr	Mode	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 087 GHz	6.017 dBm				2	N	1	f	2.400 000 GHz	-65.432 dBm				3	N	1	f	2.390 000 GHz	-61.438 dBm				4	N	1	f	2.371 679 GHz	-56.592 dBm			
Mkr	Mode	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																								
1	N	1	f	2.402 087 GHz	6.017 dBm																																											
2	N	1	f	2.400 000 GHz	-65.432 dBm																																											
3	N	1	f	2.390 000 GHz	-61.438 dBm																																											
4	N	1	f	2.371 679 GHz	-56.592 dBm																																											
CH00 Hopping mode	<table><thead><tr><th>Mkr</th><th>Mode</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.402 087 GHz</td><td>6.017 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 GHz</td><td>-65.432 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 000 GHz</td><td>-61.438 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.387 805 GHz</td><td>-61.229 dBm</td><td></td><td></td><td></td></tr></tbody></table>			Mkr	Mode	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 087 GHz	6.017 dBm				2	N	1	f	2.400 000 GHz	-65.432 dBm				3	N	1	f	2.390 000 GHz	-61.438 dBm				4	N	1	f	2.387 805 GHz	-61.229 dBm			
Mkr	Mode	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																								
1	N	1	f	2.402 087 GHz	6.017 dBm																																											
2	N	1	f	2.400 000 GHz	-65.432 dBm																																											
3	N	1	f	2.390 000 GHz	-61.438 dBm																																											
4	N	1	f	2.387 805 GHz	-61.229 dBm																																											
CH78 No hopping mode	<table><thead><tr><th>Mkr</th><th>Mode</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.478 985 50 GHz</td><td>4.863 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 800 00 GHz</td><td>-68.337 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 000 00 GHz</td><td>-69.513 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.483 769 50 GHz</td><td>-49.337 dBm</td><td></td><td></td><td></td></tr></tbody></table>			Mkr	Mode	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.478 985 50 GHz	4.863 dBm				2	N	1	f	2.483 800 00 GHz	-68.337 dBm				3	N	1	f	2.500 000 00 GHz	-69.513 dBm				4	N	1	f	2.483 769 50 GHz	-49.337 dBm			
Mkr	Mode	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																								
1	N	1	f	2.478 985 50 GHz	4.863 dBm																																											
2	N	1	f	2.483 800 00 GHz	-68.337 dBm																																											
3	N	1	f	2.500 000 00 GHz	-69.513 dBm																																											
4	N	1	f	2.483 769 50 GHz	-49.337 dBm																																											

CH78
Hopping mode



Test Item:	Band edge	Modulation type:	$\pi/4$ DQPSK
CH00 No hopping mode			
CH00 Hopping mode			
CH78 No hopping mode			

CH78
Hopping mode

