

FCC Test Report

Application Purpose : Original grant

Applicant Name: : Grupo Solone

FCC ID : 2AM6QSUNS5501

Equipment Type : Mobile phone

Model Name : Sun_S5501

Report Number : FCC17070749A-RF

Standard(S) : FCC Part 22H&24E

Date Of Receipt : June 20, 2017

Date Of Issue : July 10, 2017

Test By : 

(Dekun Liu)

Reviewed By : 

(Sol Qin)

Authorized by : 

(Michal Ling)

Prepared by : **QTC Certification & Testing Co., Ltd.**
2nd Floor,BI Building,Fengyeyuan Industrial Plant,, Liuxian
2st. Road, Xin'an Street, Bao'an District,,Shenzhen,518000
Registration Number: 588523

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	July 10, 2017	Valid	Original Report

TABLE OF CONTENTS

1	CERTIFICATION.....	4
	EUT INFORMATION	5
2	TEST DESCRIPTION	7
2.1	TEST FACILITY	7
2.2	EUT SYSTEM CONFIGURATION	7
2.3	DESCRIPTION OF TEST CHANNELS AND TEST MODES.....	8
2.4	EQUIPMENT MODIFICATIONS.....	9
3	SUMMARY OF TEST REQUIREMENTS AND RESULTS.....	10
4	EFFECTIVE (ISOTROPIC) RADIATED POWER.....	12
5	SPURIOUS EMISSION (CONDUCTED AND RADIATED)	19
5.1	MEASUREMENT RESULT (PRE-MEASUREMENT).....	19
5.1.1	CONDUCTED METHOD	21
5.1.1	RADIATED METHOD.....	35
6	FREQUENCY STABILITY	41
6.1	MEASUREMENT RESULT (WORST)	42
7	OCCUPIED BANDWIDTH& EMISSION BANDWIDTH	46
7.1	MEASUREMENT RESULT	48
7.2	TEST PLOT(S).....	51
8	BAND EDGE.....	64
8.1	MEASUREMENT RESULT	65
8.1	TEST PLOT(S).....	66
9	EUT TEST PHOTO.....	70
10	EUT PHOTO	72

1 CERTIFICATION

Test Model	Sun_S5501
Applicant	Grupo Solone
Address	Av Lomas de Sotelo 1112.Miguel Hidalgo.Ciudad de Mexico
Manufacturer	Grupo Solone
Address	Av Lomas de Sotelo 1112.Miguel Hidalgo.Ciudad de Mexico
Equipment Type	Mobile phone
Brand Name	SOLONE
Hardware version:	V5501_1_50
Software version:	SOLONE_SUN_S5501_SW_V08
Series Model	N/A
Difference description	N/A
Deviation	None
Condition of Test Sample	Normal

We hereby certify that:

All measurement facilities used to collect the measurement data are located at QTC Certification & Testing Co., Ltd.

Registration Number: 588523

The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C 63.4:2014 and TIA/EIA 603(2010). The sample tested as described in this report is in compliance with the FCC Rules Part 22H and 24E.

The test results of this report relate only to the tested sample identified in this report.

EUT INFORMATION

Table 2.1.1 General Information

Equipment Type:	Mobile phone
Hardware version:	SOLONE_SUN_S5501_SW_V08
Software version:	V5501_1_50
Frequency Bands:	☒ GSM 850 ☒ PCS 1900 (U.S. Bands) UTRA Bands: ☒ UTRA Band 2 ☐ UTRA Band 4 ☒ UTRA Band 5
Antenna Type:	Internal Antenna
Antenna gain:	PCS 1900: 1dBi GSM850: 1dBi UTRA Band 2: 1dBi UTRA Band 5: 1dBi
Battery information:	Li-Polymer Battery : Sun_S5501 Voltage: 3.8V Capacity: 2800mAh Limited Charge Voltage: 4.2V
Adapter Information:	Adapter: Sun_S5501 Input: AC 100-240V 50/60Hz 0.15A Output: DC 5.0V  1000mA
Card(S):	Card 1: E-UTRA Card Slot Card 2: GSM Card Slot
Max power:	See Table 2.1.2
Extreme Vol. Limits:	DC 3.45V to 4.35V (Normal: DC 3.8V)
Extreme Temp. Tolerance	-10°C to +55°C

Note 1: The High Voltage DC 4.35V and Low Voltage DC 3.45V were declared by manufacturer, The EUT couldn't be operating normally with higher or lower voltage.

Table 2.1.2 The Basic Technical Specification for Working BAND(S).

OPERATION BAND(S)	Power Class	Mod.	Max Average (dBm)	Max Peak Power (dBm)
GSM850	Class 4	GMSK	32.92	33.18
DCS1900	Class 1	GMSK	30.21	30.52
UTRA BAND 2	Class 3	QPSK	21.58	22.24
UTRA BAND 5	Class 3	QPSK	22.42	23.38

2 TEST DESCRIPTION

2.1 Test Facility

The test site used to collect the radiated data is located at:

QTC Certification & Testing Co., Ltd.

Registration Number: 588523

2.2 EUT System Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

Fig. 3.2-1 Configuration of EUT System



Table 3.2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	Mobile phone	Sun_S5501	2AM6QSUNS5501	EUT

***Note: All the accessories have been used during the test. The following “EUT” in setup diagram means EUT system.

2.3 Description Of Test Channels And Test Modes

Test channels:

GSM 850			
Test Channel	BW(MHz)	UL Channel	Frequency(MHz)
Low Range	0.2	128	824.2
Mid Range	0.2	190	836.6
High Range	0.2	251	848.8

PCS 1900			
Test Channel	BW(MHz)	UL Channel	Frequency(MHz)
Low Range	0.2	512	1850.2
Mid Range	0.2	661	1880
High Range	0.2	810	1909.8

URTA BAND 2			
Test Channel	BW(MHz)	UL Channel	Frequency(MHz)
Low Range	5	9262	1852.4
Mid Range	5	9400	1880
High Range	5	9538	1907.6

URTA BAND 5			
Test Channel	BW(MHz)	UL Channel	Frequency(MHz)
Low Range	5	4132	826.4
Mid Range	5	4182	836.4
High Range	5	4233	846.6

Note 1: both QPSK&16QAM modulation has been measured;

Note 2: The worst condition was recorded in the test report if no other modes test data.

2.4 Equipment Modifications

Not available for this EUT intended for grant.

3 SUMMARY OF TEST REQUIREMENTS AND RESULTS

BAND 2(PCS 1900/ UTRA Band 2):

Test Item	FCC Rule No.	Requirements	Judgement
Effective (Isotropic) Radiated Power	§2.1046, §24.232(c)	EIRP $\leq$ 2W(33dBm)	Pass
Bandwidth	§2.1049 §24.238(a)	OBW: No limit. EBW: No limit.	Pass
Band Edges	§2.1051, §24.238(a)	-13dBm	Pass
Spurious Emission at Antenna Terminals	§2.1051, §24.238(a)	-13dBm	Pass
Field Strength of Spurious Radiation	§2.1053, §24.238(a)	-13dBm	Pass
Frequency Stability	§2.1055, §24.235	the fundamental emission stays within the authorized frequency block.	Pass
Peak to average ratio	§24.232(d)	<13dB	Pass

BAND 5(GSM850/ UTRA Band 5):

Test Item	FCC Rule No.	Requirements	Judgement
Effective (Isotropic) Radiated Power	§2.1046, §2.913(a)	EIRP $\leq$ 7W(38.5dBm)	Pass
Occupied Bandwidth	§2.1049	OBW: No limit.	Pass
Emission Bandwidth	22.917(b)	EBW: No limit.	Pass
Band Edges Compliance	§2.1051, §22.917(a)(b)	KDB 971 168 D02 971168 D02 Misc OOB License Digital Systems v01 &27.53(m) for detail the limit is upon different OBW	Pass
Spurious Emission at Antenna Terminals	§2.1051, §22.917	-13dBm	Pass
Field Strength of Spurious Radiation	§2.1053, §22.917	-13dBm	Pass
Frequency Stability	§2.1055, §22.355	the fundamental emissions stay within the authorized bands of operation. (2.5ppm)	Pass

MEASUREMENT INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	Calibration Date	Calibration Due.
EMI Test Receiver	R&S	ESCI	100005	08/19/2016	08/18/2017
LISN	AFJ	LS16	16010222119	08/19/2016	08/18/2017
LISN(EUT)	Mestec	AN3016	04/10040	08/19/2016	08/18/2017
Universal Radio Communication Tester	R&S	CMU 200	1100.0008.02	08/19/2016	08/18/2017
Coaxial cable	Megalon	LMR400	N/A	08/12/2016	08/11/2017
GPIO cable	Megalon	GPIO	N/A	08/12/2016	08/11/2017
Spectrum Analyzer	R&S	FSU	100114	08/19/2016	08/18/2017
Pre Amplifier	H.P.	HP8447E	2945A02715	10/13/2016	10/12/2017
Pre-Amplifier	CDSI	PAP-1G18-38	--	10/13/2016	10/12/2017
Loop Antenna	R&S	HFH2-Z2	100296	10/13/2016	10/12/2017
Bi-log Antenna	SUNOL Sciences	JB3	A021907	09/13/2016	09/12/2017
9*6*6 Anechoic	--	--	--	08/21/2016	08/20/2017
Horn Antenna	COMPLIANCE ENGINEERING	CE18000	--	09/13/2016	09/12/2017
Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-631	08/23/2016	08/22/2017
Power meter	Anritsu	ML2487A	6K00003613	08/23/2016	08/22/2017
Power meter	Anritsu	MA2491A	32263	08/23/2016	08/22/2017
Cable	TIME MICROWAVE	LMR-400	N-TYPE04	04/24/2017	04/23/2018
System-Controller	CCS	N/A	N/A	N.C.R	N.C.R
Turn Table	CCS	N/A	N/A	N.C.R	N.C.R
Antenna Tower	CCS	N/A	N/A	N.C.R	N.C.R
RF cable	Murata	MXHQ87WA3000	-	08/21/2016	08/20/2017
Loop Antenna	EMCO	6502	00042960	08/22/2016	08/21/2017
Wideband Radio Communication Tester	R&S	CMW 500	103974	08/19/2016	08/18/2017
Horn Antenna	SCHWARZBECK	BBHA 9170	1123	08/19/2016	08/18/2017
H & T Chamber	Guangzhou gongwen	GDJS-500-40	0329	08/19/2016	08/18/2017

4 EFFECTIVE (ISOTROPIC) RADIATED POWER

Test limit:

According to §22.913, The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to §24.232, Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §27.50 (d), Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

See section 3.

Test procedure:

1. The setup of EUT is according with per TIA/EIA Standard 603 D:2010 or KDB971168 D01 v02r02.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.
5. $ERP/EIRP = P_{Meas} + GT - LC$

where:

ERP/EIRP = effective or equivalent radiated power

P_{Meas} = measured transmitter output power from SG

GT = gain of the substitution antenna

LC = cable loss between SG and substitution antenna.

GSM850 BAND:							
Mode		Frequency (MHz)	Peak Power	Avg.Burst Power	PAR	Duty cycle Factor(dB)	Frame Power(dBm)
GSM850		824.2	33.18	32.92	0.26	-9	23.92
		836.6	33.12	32.88	0.24	-9	23.88
		848.8	33.10	32.86	0.24	-9	23.86
GPRS850	1 Tx Slots	824.2	33.10	32.21	0.89	-9.03	23.18
		836.6	32.89	32.13	0.76	-9.03	23.10
		848.8	33.11	32.15	0.96	-9.03	23.12
	2 Tx Slots	824.2	32.28	31.57	0.71	-6.02	25.55
		836.6	32.23	31.59	0.64	-6.02	25.57
		848.8	32.44	31.58	0.86	-6.02	25.56
	3 Tx Slots	824.2	31.18	30.38	0.80	-4.26	26.12
		836.6	31.16	30.36	0.80	-4.26	26.10
		848.8	31.12	30.35	0.77	-4.26	26.09
	4 Tx Slots	824.2	30.18	29.89	0.29	-3.01	26.88
		836.6	30.24	29.86	0.38	-3.01	26.85
		848.8	30.29	29.88	0.41	-3.01	26.87
EPRS850	1 Tx Slots	824.2	29.62	29.05	0.57	-9.03	20.02
		836.6	29.55	29.02	0.53	-9.03	19.99
		848.8	29.30	29.03	0.27	-9.03	20.00
	2 Tx Slots	824.2	28.61	28.33	0.28	-6.02	22.31
		836.6	28.82	28.36	0.46	-6.02	22.34
		848.8	28.88	28.31	0.57	-6.02	22.29
	3 Tx Slots	824.2	27.73	27.26	0.47	-4.26	23.00
		836.6	27.82	27.22	0.60	-4.26	22.96
		848.8	27.95	27.23	0.72	-4.26	22.97
	4 Tx Slots	824.2	27.11	26.68	0.43	-3.01	23.67
		836.6	27.16	26.53	0.63	-3.01	23.52
		848.8	27.24	26.55	0.69	-3.01	23.54
Tine average factor = 1 uplink, 10*log(1/8)= -9.03dB, 2 uolink, 10*log(2/8)= -6.02dB, 3 uolink, 10*log(3/8)= -4.26dB, 4 uolink, 10*log(4/8)= -3.01dB							

PCS1900 BAND:

Mode		Frequency (MHz)	Peak Power	Avg.Burst Power	PAR	Duty cycle Factor(dB)	Frame Power(dBm)
GSM1900		1850.2	30.38	30.15	0.23	-9	21.15
		1880	30.52	30.21	0.31	-9	21.21
		1909.8	30.42	30.13	0.29	-9	21.13
GPRS1900	1 Tx Slots	1850.2	30.16	29.65	0.51	-9.03	20.62
		1880	30.10	29.62	0.48	-9.03	20.59
		1909.8	30.18	29.66	0.52	-9.03	20.63
	2 Tx Slots	1850.2	29.16	27.86	1.30	-6.02	21.84
		1880	29.22	28.92	0.30	-6.02	22.90
		1909.8	29.18	28.88	0.30	-6.02	22.86
	3 Tx Slots	1850.2	28.12	27.28	0.84	-4.26	23.02
		1880	28.11	27.36	0.75	-4.26	23.10
		1909.8	28.14	27.32	0.82	-4.26	23.06
	4 Tx Slots	1850.2	27.13	26.88	0.25	-3.01	23.87
		1880	27.18	26.96	0.22	-3.01	23.95
		1909.8	27.16	26.93	0.23	-3.01	23.92
EGPRS1900	1 Tx Slots	1850.2	28.27	27.95	0.32	-9.03	18.92
		1880	28.32	27.98	0.34	-9.03	18.95
		1909.8	28.09	27.96	0.13	-9.03	18.93
	2 Tx Slots	1850.2	27.12	27.05	0.07	-6.02	21.03
		1880	27.22	27.08	0.14	-6.02	21.06
		1909.8	27.21	27.07	0.14	-6.02	21.05
	3 Tx Slots	1850.2	26.22	26.10	0.12	-4.26	21.84
		1880	26.17	26.12	0.05	-4.26	21.86
		1909.8	26.12	26.11	0.01	-4.26	21.85
	4 Tx Slots	1850.2	26.08	25.35	0.73	-3.01	22.34
		1880	26.21	25.32	0.89	-3.01	22.31
		1909.8	26.07	25.33	0.74	-3.01	22.32

Tine average factor = 1 uplink, $10 \cdot \log(1/8) = -9.03\text{dB}$, 2 uolink, $10 \cdot \log(2/8) = -6.02\text{dB}$,
 3 uolink, $10 \cdot \log(3/8) = -4.26\text{dB}$, 4 uolink, $10 \cdot \log(4/8) = -3.01\text{dB}$

**UTRA BANDS:
BAND 2:**

Mode		Frequency (MHz)	Peak Power	Avg.Burst Power	PAPR (dB)
RMC 12.2K		1852.4	22.23	21.58	0.65
		1880	22.24	21.52	0.72
		1907.6	22.12	21.56	0.56
HSDPA	Sub-test 1	1852.4	22.12	21.21	0.91
		1880	22.21	21.41	0.80
		1907.6	22.28	21.30	0.98
	Sub-test 2	1852.4	22.19	21.19	1.00
		1880	21.14	20.52	0.62
		1907.6	21.21	20.62	0.59
	Sub-test 3	1852.4	21.88	21.10	0.78
		1880	21.84	20.25	1.59
		1907.6	21.79	20.11	1.68
	Sub-test 4	1852.4	21.46	20.02	1.44
		1880	21.38	20.02	1.36
		1907.6	21.51	20.32	1.19
HSUPA	Sub-test 1	1852.4	21.94	21.32	0.62
		1880	21.74	20.75	0.99
		1907.6	21.54	20.42	1.12
	Sub-test 2	1852.4	21.87	21.02	0.85
		1880	21.68	20.45	1.23
		1907.6	21.74	20.10	1.64
	Sub-test 3	1852.4	21.59	21.15	0.44
		1880	21.41	20.23	1.18
		1907.6	21.28	20.20	1.08
	Sub-test 4	1852.4	21.11	20.52	0.59
		1880	21.13	20.15	0.98
		1907.6	21.26	20.11	1.15
	Sub-test 5	1852.4	21.22	20.95	0.27
		1880	21.37	20.15	1.22
		1907.6	21.66	20.11	1.55

BAND 5:

Mode		Frequency (MHz)	Peak Power	Avg. Burst Power	PAPR (dB)
RMC 12.2K		826.4	23.38	22.40	0.98
		836.4	23.26	22.42	0.84
		846.6	23.15	22.35	0.80
HSDPA	Sub-test 1	826.4	23.12	22.12	1.00
		836.4	23.01	22.23	0.78
		846.6	23.21	22.28	0.93
	Sub-test 2	826.4	22.28	21.52	0.76
		836.4	22.28	21.51	0.77
		846.6	22.22	21.32	0.90
	Sub-test 3	826.4	22.23	21.32	0.91
		836.4	22.34	21.35	0.99
		846.6	22.22	21.48	0.74
	Sub-test 4	826.4	21.24	20.54	0.70
		836.4	21.42	20.55	0.87
		846.6	21.15	20.62	0.53
HSUPA	Sub-test 1	826.4	21.83	20.72	1.11
		836.4	21.66	20.60	1.06
		846.6	21.41	20.83	0.58
	Sub-test 2	826.4	22.63	21.58	1.05
		836.4	22.45	21.82	0.63
		846.6	22.42	21.32	1.10
	Sub-test 3	826.4	22.24	21.31	0.93
		836.4	22.18	21.33	0.85
		846.6	22.42	21.22	1.20
	Sub-test 4	826.4	22.23	21.53	0.70
		836.4	22.24	21.26	0.98
		846.6	22.35	21.82	0.53
	Sub-test 5	826.4	22.14	21.28	0.86
		836.4	22.18	21.16	1.02
		846.6	22.38	21.28	1.10

Radiation power test

Note: Record the condition when max power has been detector for radiated method.(X axis)

Radiated Power (ERP) for GSM 850 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. ERP	
GSM850	824.2	32.41	Horizontal	Pass
	836.6	32.38	Horizontal	Pass
	848.8	32.34	Horizontal	Pass

Radiated Power (ERP) for EGPRS 850 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. ERP	
EGPRS850	824.2	27.31	Horizontal	Pass
	836.6	27.22	Horizontal	Pass
	848.8	27.18	Horizontal	Pass

Radiated Power (E.I.R.P) for PCS 1900 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
GSM 1900	1850.2	29.33	Horizontal	Pass
	1880.0	29.21	Horizontal	Pass
	1909.8	29.25	Horizontal	Pass

Radiated Power (E.I.R.P) for PCS 1900 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
EGPRS 1900	1850.2	25.19	Horizontal	Pass
	1880.0	25.26	Horizontal	Pass
	1909.8	25.18	Horizontal	Pass

Radiated Power (E.I.R.P) for UTRA Band 2				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
UTRA Band 2	1852.4	22.34	Horizontal	Pass
	1880	22.48	Horizontal	Pass
	1907.6	22.55	Horizontal	Pass

Radiated Power (ERP) for UTRA Band 5				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max.ERP	
UTRA Band 5	826.4	22.33	Horizontal	Pass
	836.4	22.44	Horizontal	Pass
	846.6	22.12	Horizontal	Pass

5 SPURIOUS EMISSION (Conducted and Radiated)

5.1 Measurement Result (Pre-measurement)

GSM850:

Test Channel	BW(MHz)	UL Channel	Frequency(MHz)	Judgment
Low Range	0.2	128	824.2	Pass
Middle Range	0.2	190	836.6	Pass
High Range	0.2	251	848.8	Pass

PCS 1900:

Test Channel	BW(MHz)	UL Channel	Frequency(MHz)	Judgment
Low Range	0.2	512	1850.2	Pass
Middle Range	0.2	661	1880.0	Pass
High Range	0.2	810	1909.8	Pass

UTRA BANDS**BAND 2:**

Test Channel	BW(MHz)	UL Channel	Frequency(MHz)	Judgment
Low Range	5	9262	1852.4	Pass
Middle Range	5	9400	1880.0	Pass
High Range	5	9538	1907.6	Pass

BAND 5:

Test Channel	BW(MHz)	UL Channel	Frequency(MHz)	Judgment
Low Range	5	4132	826.4	Pass
Middle Range	5	4182	836.4	Pass
High Range	5	4233	846.6	Pass

Test Plot(s)

5.1.1 Conducted method

Test limit:


The spurious (unwanted) emission limits specified in the individual FCC rule parts applicable to licensed digital transmitters (typically referred to under the heading 'emission limits') normally apply to any and all emissions that are present outside of the authorized frequency band/block and apply to emissions in both the out-of-band and spurious domains. In some rule parts, the unwanted emission limits are specified by an emission mask that defines the applicable limit as a function of the frequency range relative to the authorized frequency block.

Typically, unwanted emissions are required by the licensed rule parts to be attenuated below the transmitter power by a factor of at least $X + 10\log(P)$ dB, where P represents the transmitter power expressed in watts and X is a specified scalar value (e.g., 43). This specification can be interpreted in one of two equivalent ways. First, the required attenuation can be construed to be relative to the mean carrier power, with the resultant of the equation $X + 10\log(P)$ being expressed in dBc (dB relative to the maximum carrier power). Alternatively, the specification can be interpreted as an absolute limit when the specified attenuation is actually subtracted from the maximum permissible transmitter power [i.e., $10\log(P) - \{X + 10\log(P)\}$], resulting in an absolute level of $-X$ dBW [or $(-X + 30)$ dBm]. See section 4.


Test procedure:

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz below 1 GHz and 1 MHz above 1 GHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonics.


Conducted Emission Test-Up:

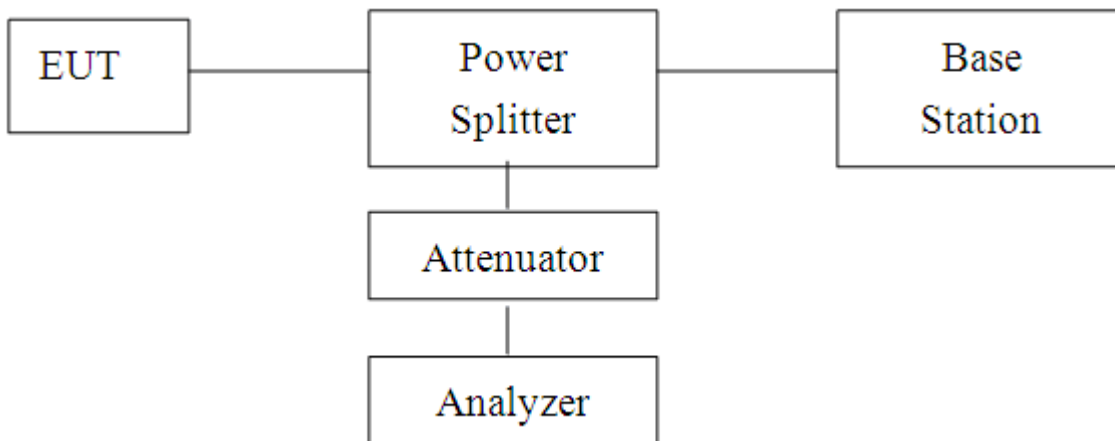


CONDUCTED EMISSION IN GSM850 BAND
Conducted Emission Transmitting Mode CH 128 30MHz – 1GHz

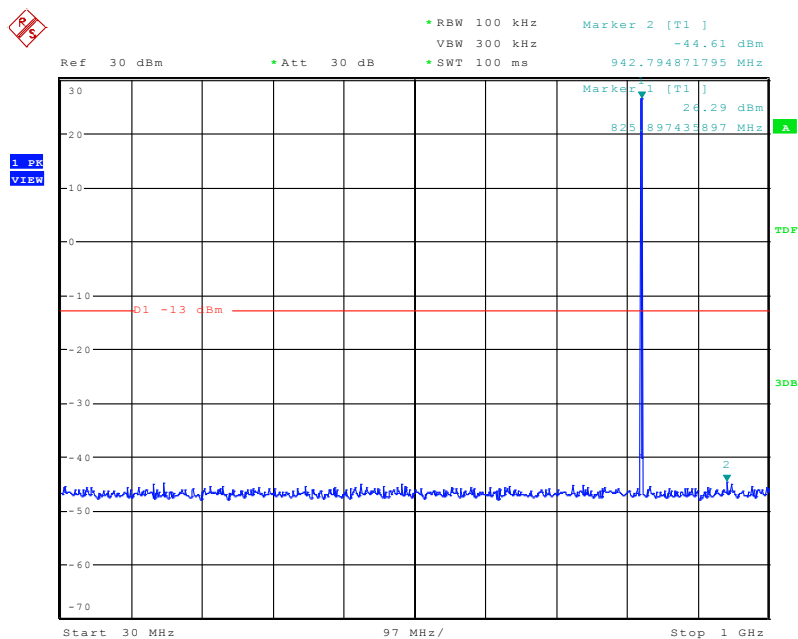


Conducted Emission Transmitting Mode CH 128 1GHz – 9GHz

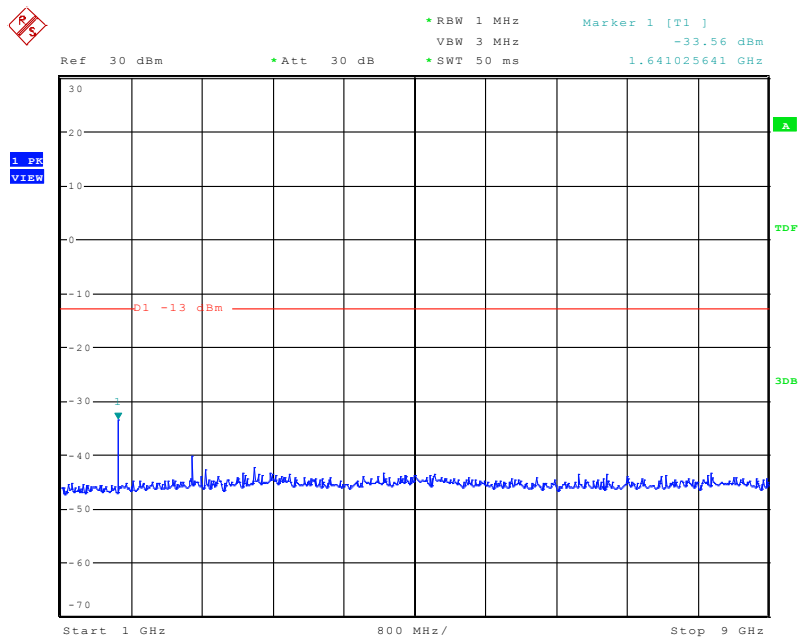


Conducted Emission Transmitting Mode CH 190 30MHz – 1GHz

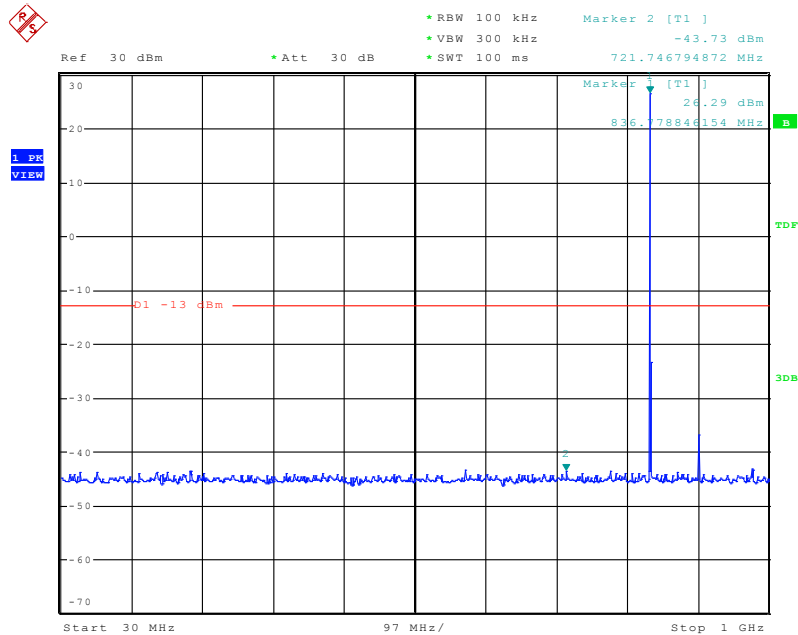


Conducted Emission Transmitting Mode CH 190 1GHz – 9GHz

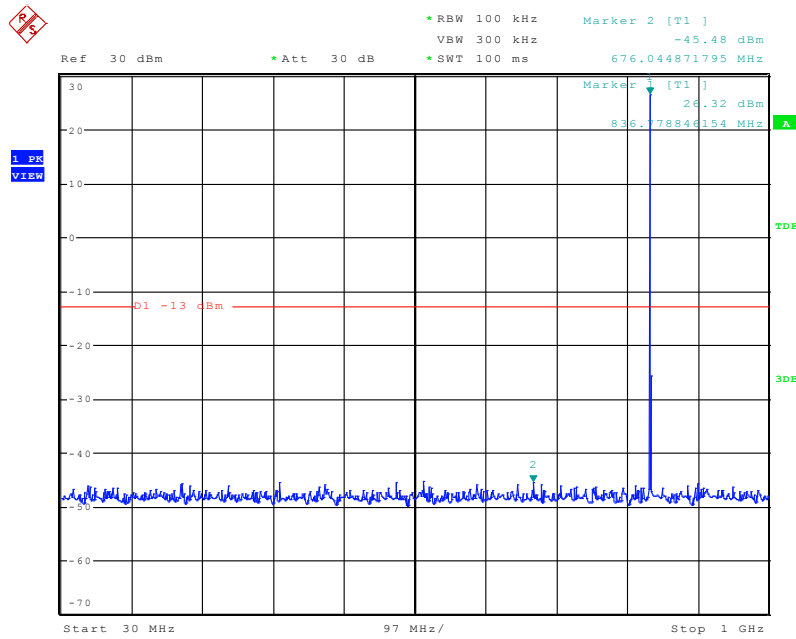

Conducted Emission Transmitting Mode CH 251 30MHz – 1GHz

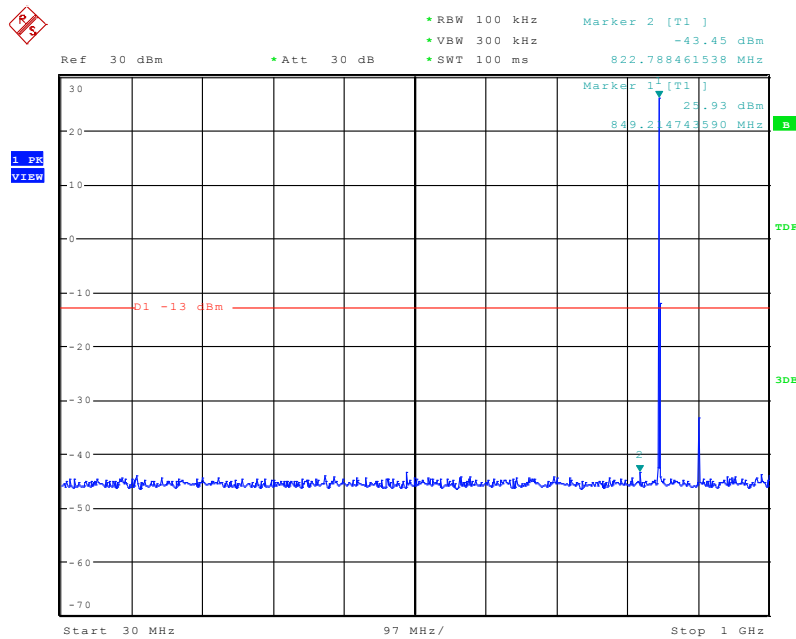


Conducted Emission Transmitting Mode CH 251 1GHz – 9GHz

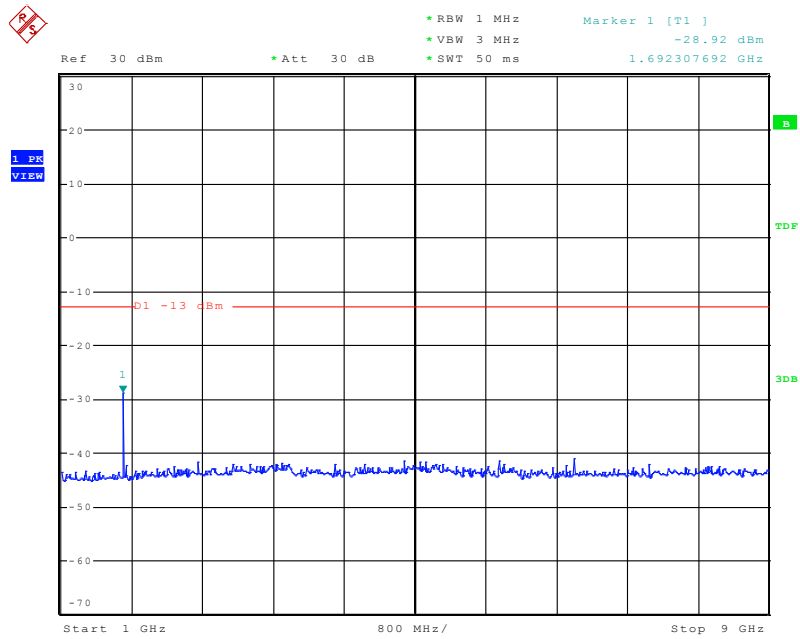


CONDUCTED EMISSION IN PCS1900 BAND


Conducted Emission Transmitting Mode CH 512 30MHz – 1GHz

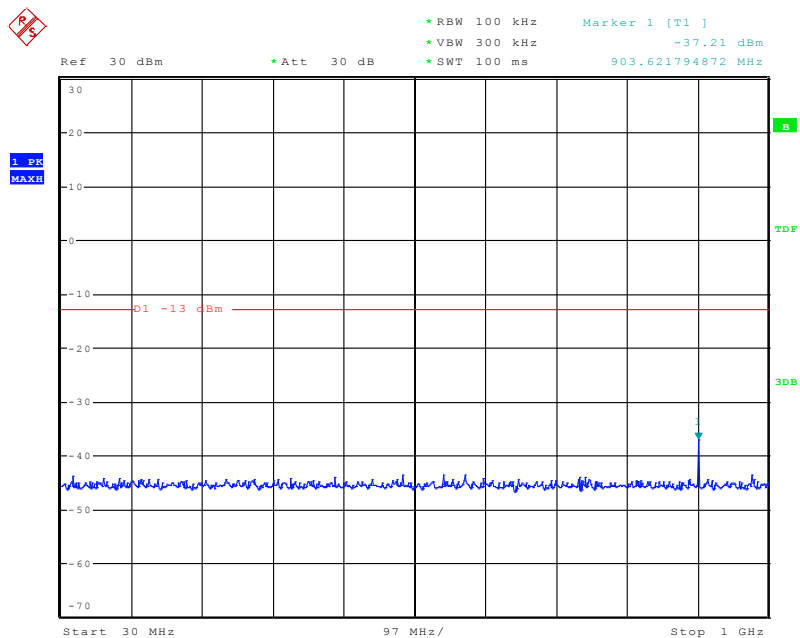


Conducted Emission Transmitting Mode CH 512 1GHz – 20GHz

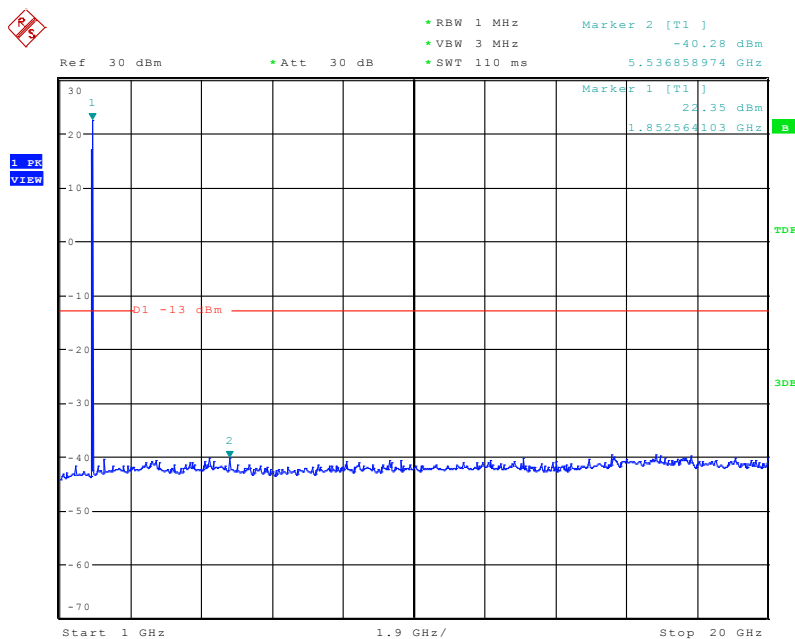


Conducted Emission Transmitting Mode CH 661 30MHz – 1GHz

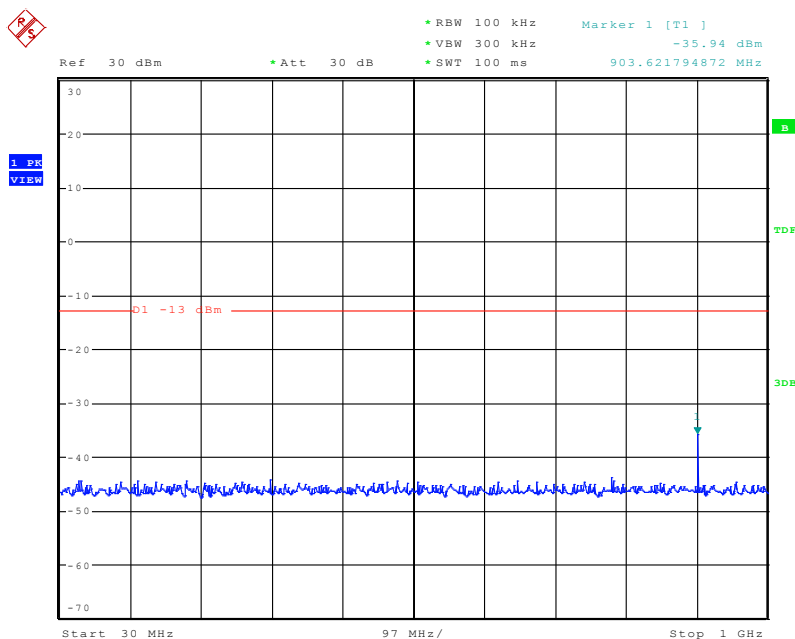


Conducted Emission Transmitting Mode CH 661 1GHz – 20GHz

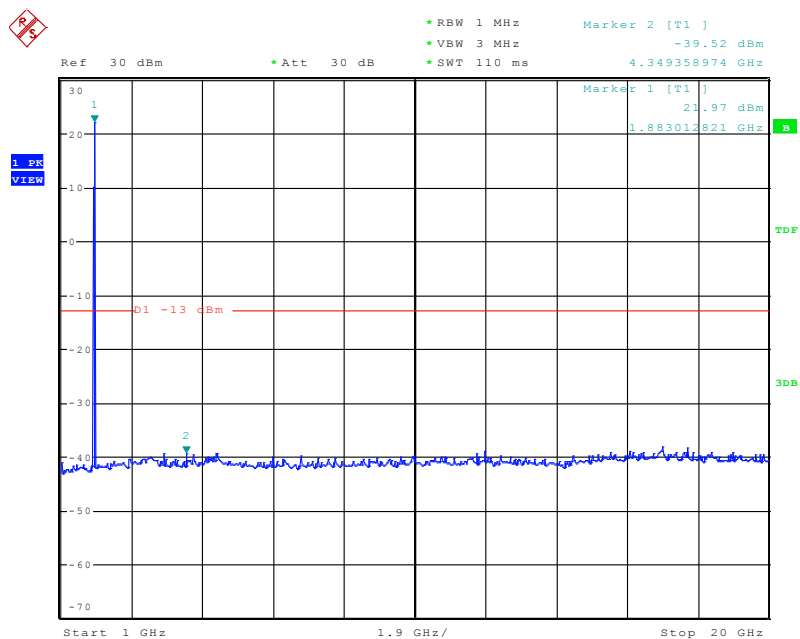

Conducted Emission Transmitting Mode CH 810 30MHz – 1GHz

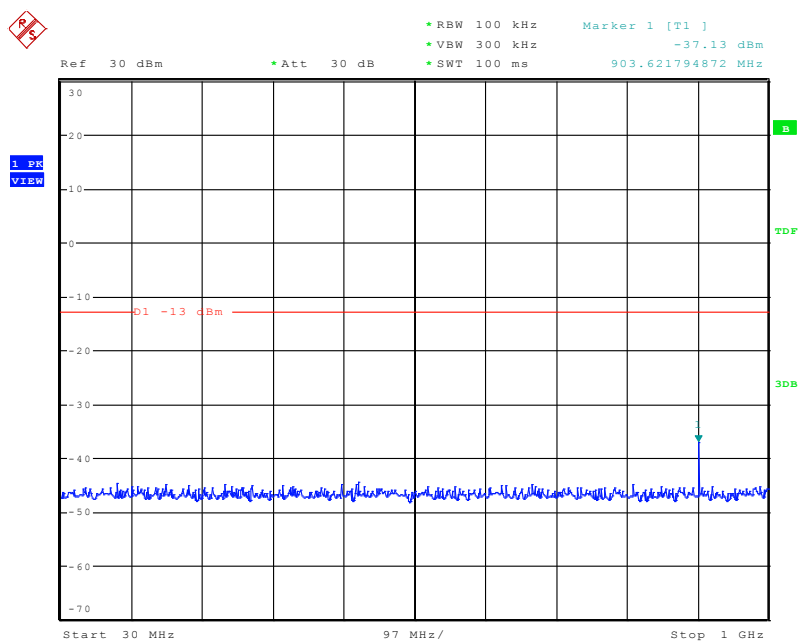


Conducted Emission Transmitting Mode CH 810 1GHz – 20GHz

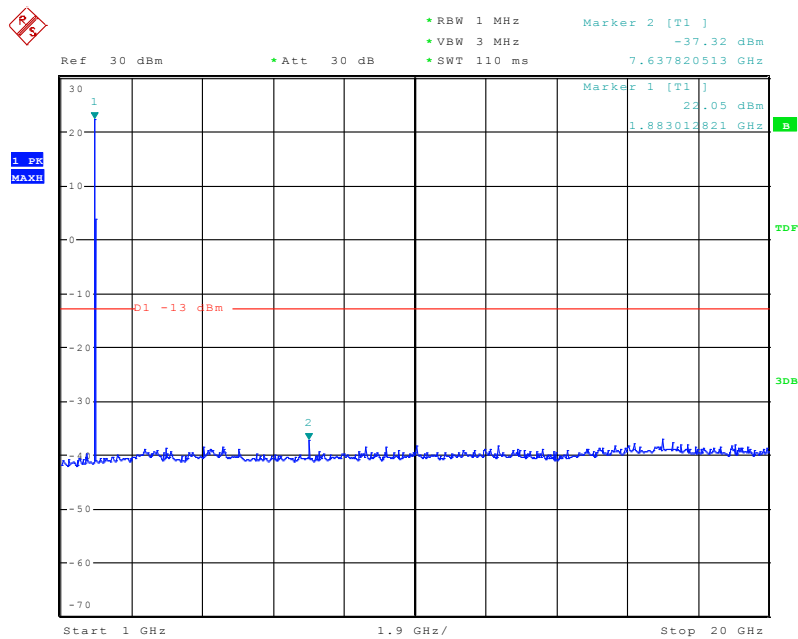


CONDUCTED EMISSION IN WCDMA Band II


Conducted Emission Transmitting Mode CH 9262 30MHz – 1GHz

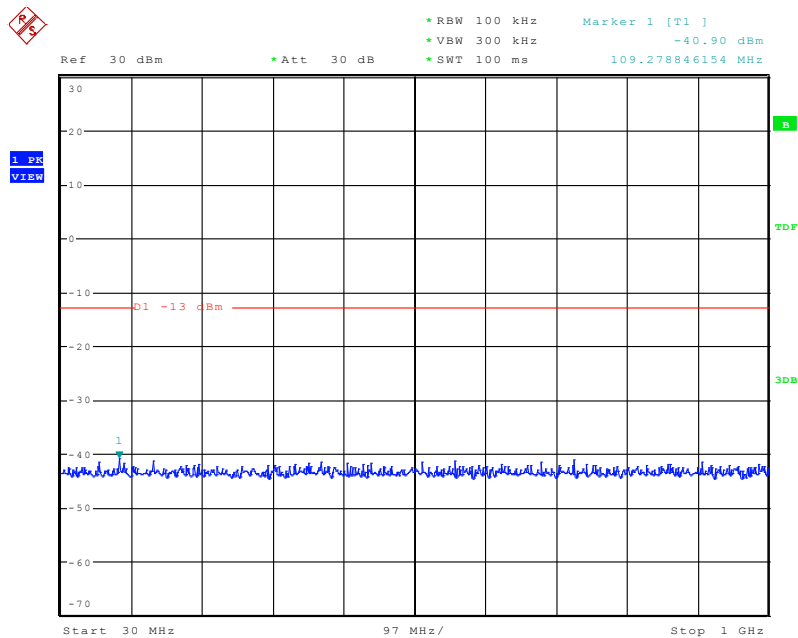


Conducted Emission Transmitting Mode CH 9262 1GHz – 20GHz

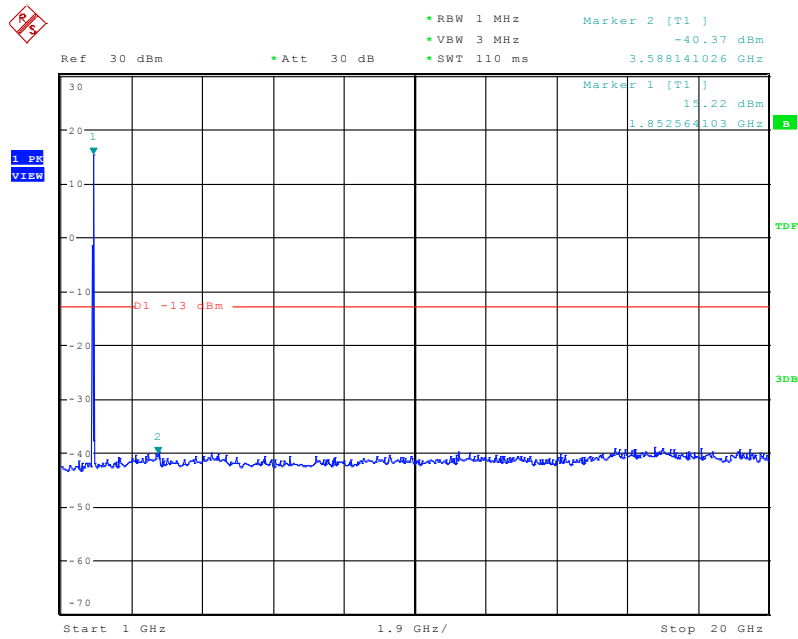


Conducted Emission Transmitting Mode CH 9400 30MHz – 1GHz

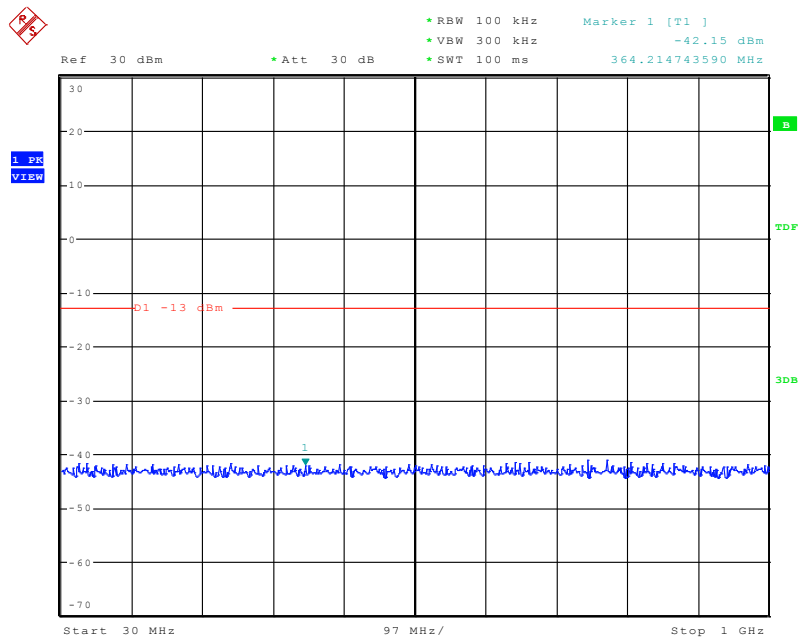


Conducted Emission Transmitting Mode CH 9400 1GHz – 20GHz

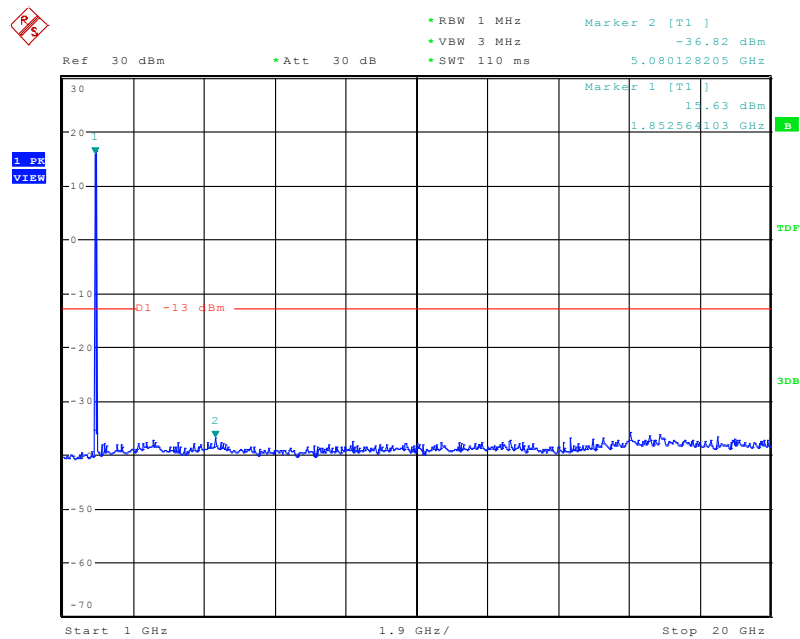

Conducted Emission Transmitting Mode CH 9538 30MHz – 1GHz

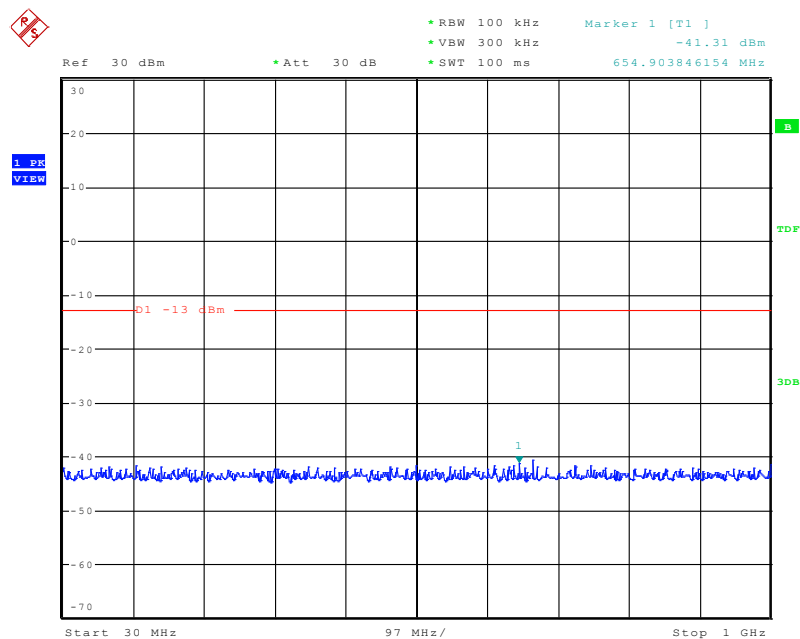


Conducted Emission Transmitting Mode CH 9538 1GHz – 20GHz

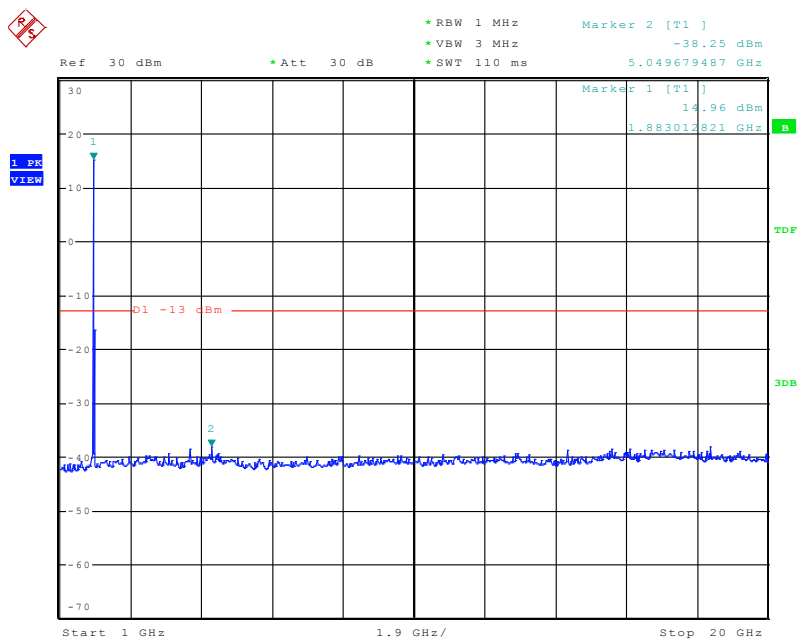


CONDUCTED EMISSION IN WCDMA Band V


Conducted Emission Transmitting Mode CH 4132 30MHz – 1GHz

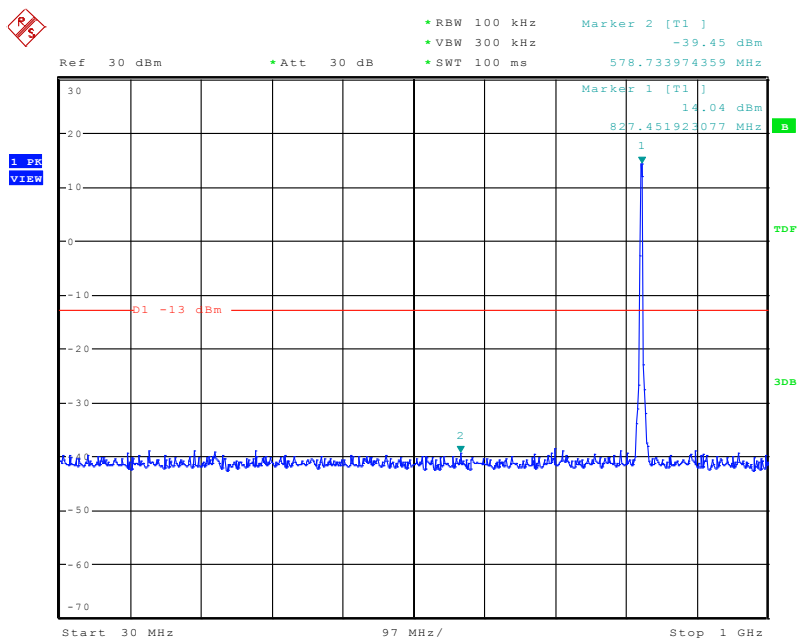


Conducted Emission Transmitting Mode CH 4132 1GHz – 9GHz

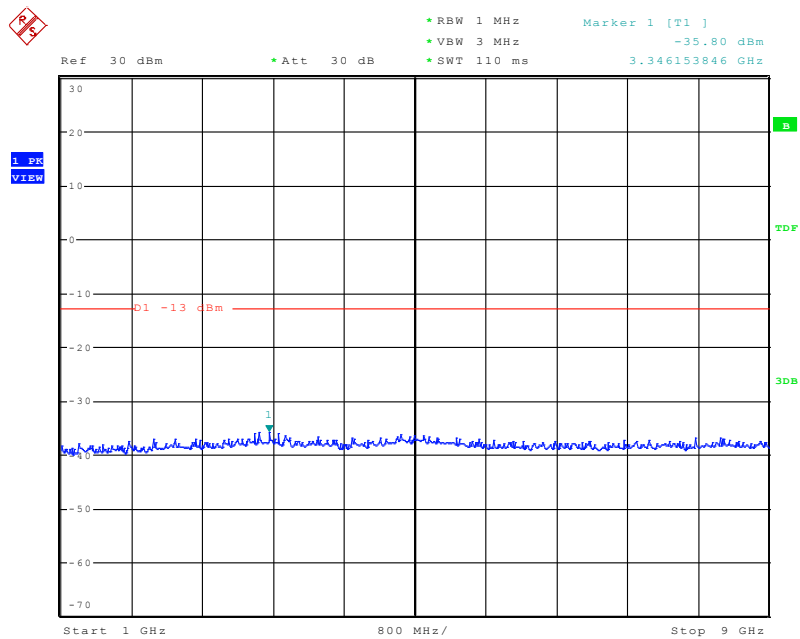


Conducted Emission Transmitting Mode CH 4182 30MHz – 1GHz

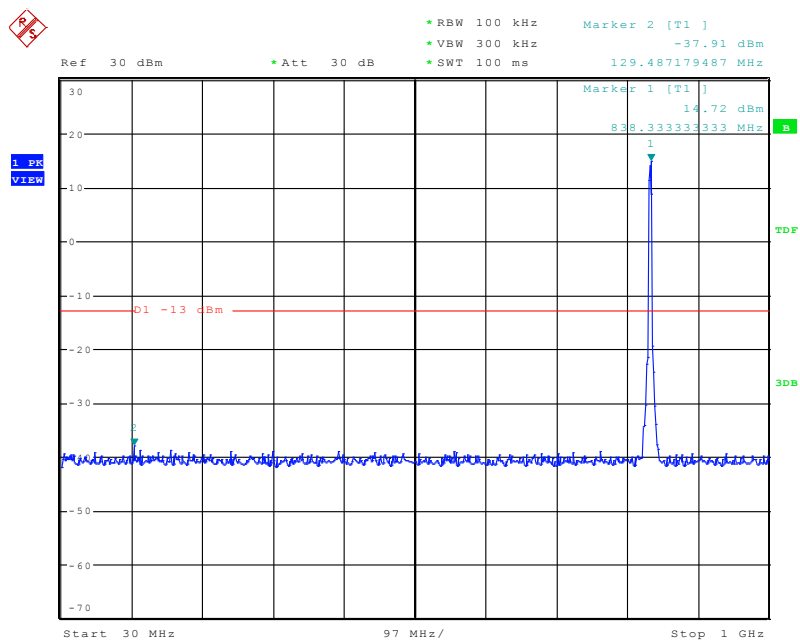


Conducted Emission Transmitting Mode CH 4182 1GHz – 9GHz

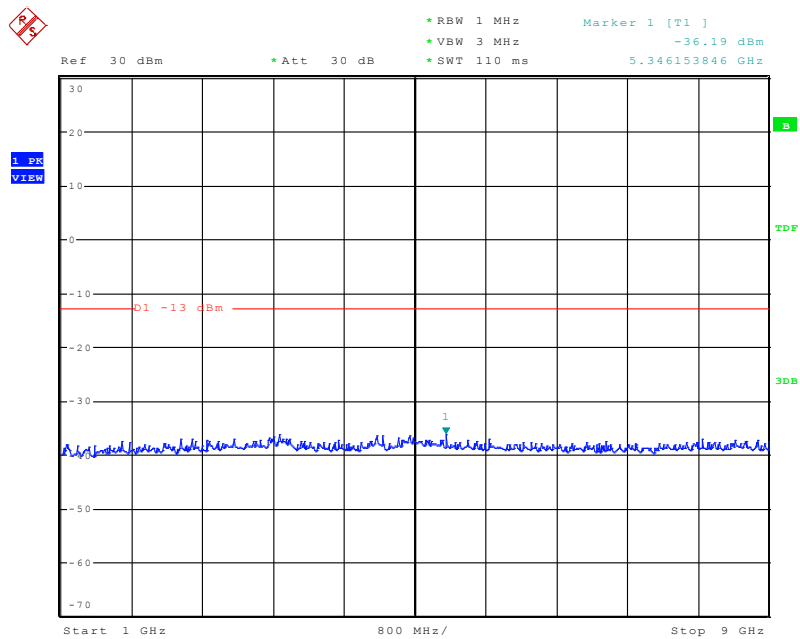

Conducted Emission Transmitting Mode CH 4233 30MHz – 1GHz

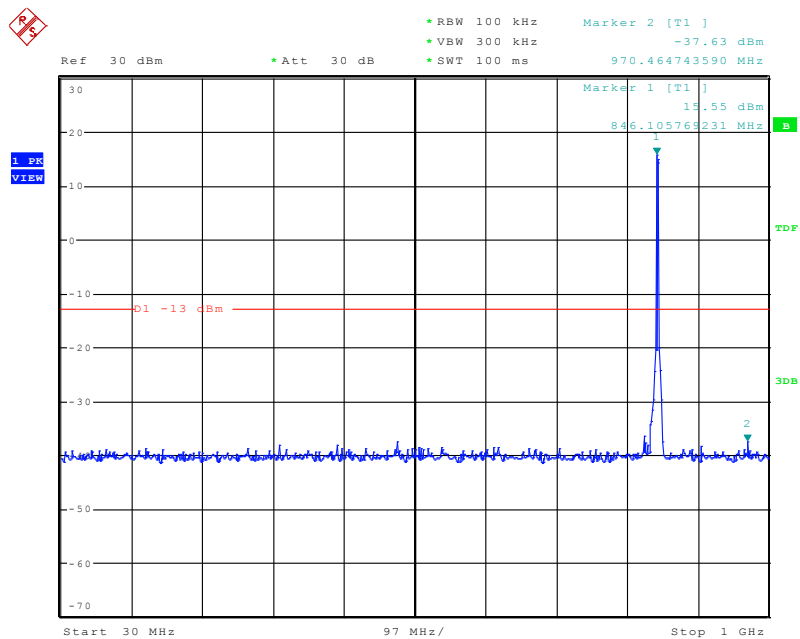

Conducted Emission Transmitting Mode CH 4233 1GHz – 9GHz

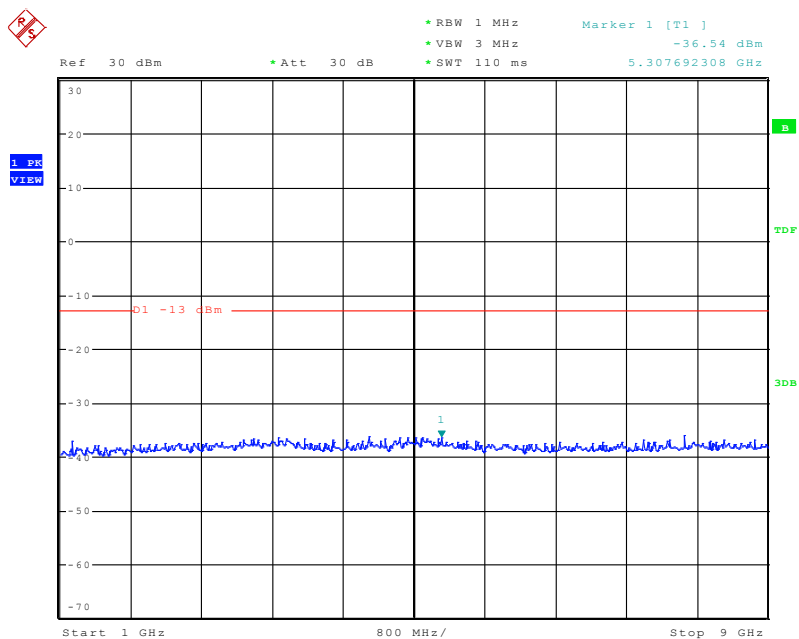

5.1.1 Radiated method

Test limit:

The spurious (unwanted) emission limits specified in the individual FCC rule parts applicable to licensed digital transmitters (typically referred to under the heading 'emission limits') normally apply to any and all emissions that are present outside of the authorized frequency band/block and apply to emissions in both the out-of-band and spurious domains. In some rule parts, the unwanted emission limits are specified by an emission mask that defines the applicable limit as a function of the frequency range relative to the authorized frequency block.


Typically, unwanted emissions are required by the licensed rule parts to be attenuated below the transmitter power by a factor of at least $X + 10\log(P)$ dB, where P represents the transmitter power expressed in watts and X is a specified scalar value (e.g., 43). This specification can be interpreted in one of two equivalent ways. First, the required attenuation can be construed to be relative to the mean carrier power, with the resultant of the equation $X + 10\log(P)$ being expressed in dBc (dB relative to the maximum carrier power). Alternatively, the specification can be interpreted as an absolute limit when the specified attenuation is actually subtracted from the maximum permissible transmitter power [i.e., $10\log(P) - \{X + 10\log(P)\}$], resulting in an absolute level of $-X$ dBW [or $(-X + 30)$ dBm]. See section 4.

Test procedure:


The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site. The resolution bandwidth of the spectrum analyzer was set at 100 kHz below 1 GHz and 1 MHz above 1 GHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonics.

Test setup:

(A) Radiated Emission Test-Up Frequency 30MHz~1GHz

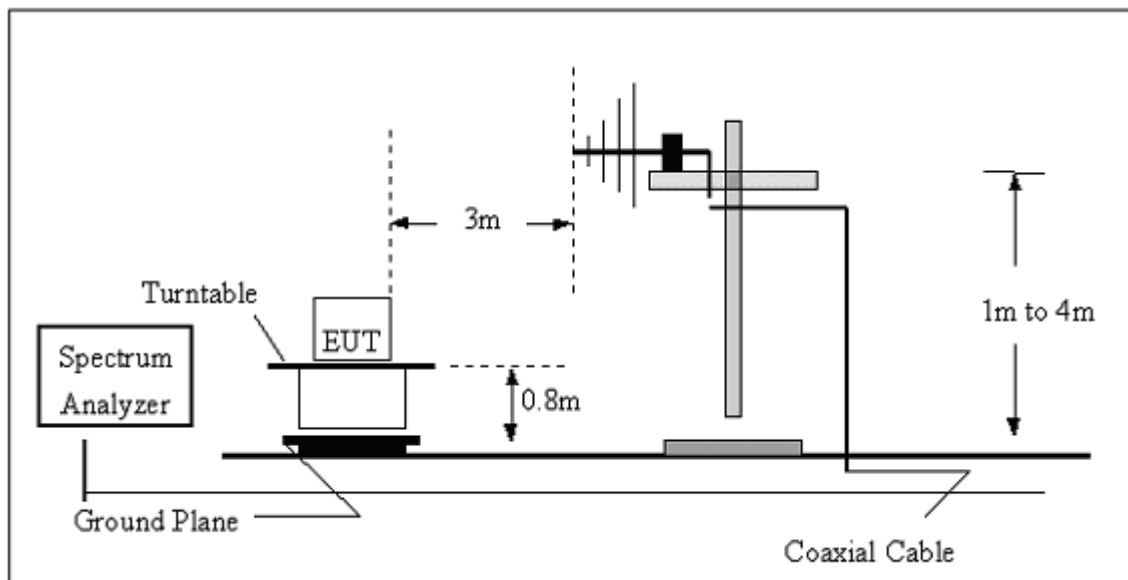

(B) Radiated Emission Test-Up Frequency Above 1GHz

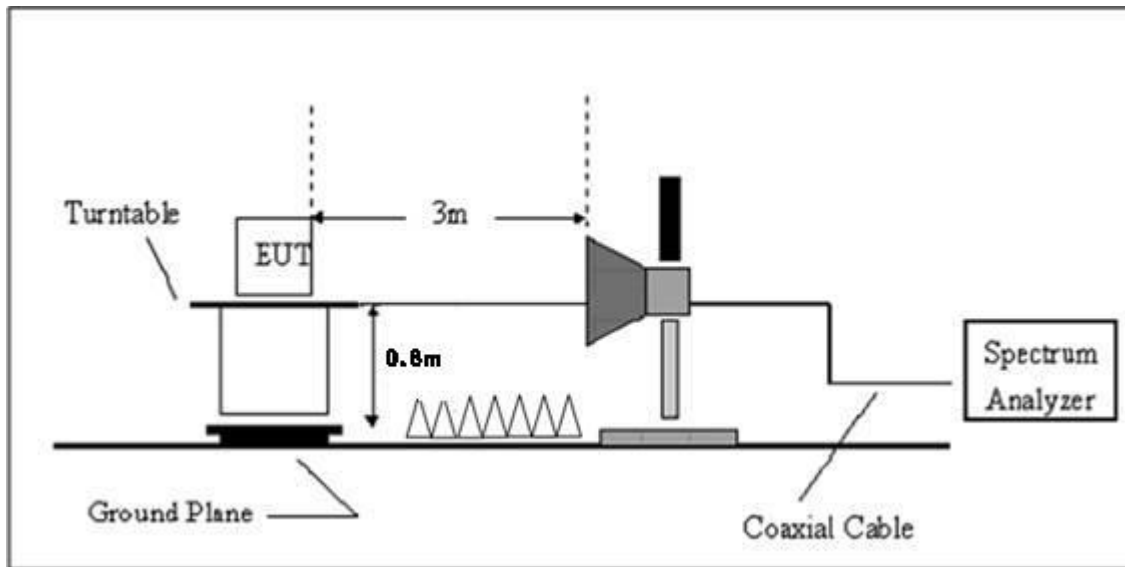**Note:**

1, Below 30MHz no Spurious found.

2, UE is positioned at 3 axis at the pre-scan stage, and only the measurement of the worst case (bandwidth: 20MHz / Full RB / QPSK) is reported in this part.

List of final test modes:**GSM850:**

Mode	UL Channel	Frequency	Judgement
1	128	824.2	Pass
2	190	836.6	Pass
3	251	848.8	Pass

PCS1900

Mode	UL Channel	Frequency	Judgement
1	512	1850.2	Pass
2	661	1880	Pass
3	810	1909.8	Pass

UTRA BANDS**BAND 2:**

Mode	UL Channel	Frequency	Judgement
1	9262	1852.4	Pass
2	9400	1880	Pass
3	9538	1907.6	Pass

BAND 5:

Mode	UL Channel	Frequency	Judgement
1	4132	826.4	Pass
2	4182	836.4	Pass
3	4233	846.6	Pass

Test record:

GSM850:

Mode 1					
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Polarity
1648.4	-34.88	-4.99	-29.89	-13	Horizontal
1648.4	-31.51	-2.45	-29.06	-13	Vertical
2472.6	-33.95	3.61	-37.56	-13	Horizontal
2472.6	-34.44	2.82	-37.26	-13	Vertical

Mode 2					
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Polarity
1673.2	-34.21	-4.99	-29.22	-13	Horizontal
1673.2	-26.59	-2.45	-24.14	-13	Vertical
2509.8	-29.97	3.61	-33.58	-13	Horizontal
2509.8	-26.79	2.82	-29.61	-13	Vertical

Mode 3					
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Polarity
1697.6	-32.14	-4.99	-27.15	-13	Horizontal
1697.6	-32.09	-2.45	-29.64	-13	Vertical
2546.4	-32.23	3.61	-35.84	-13	Horizontal
2546.4	-34.02	2.82	-36.84	-13	Vertical

PCS1900:

Mode 1					
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Polarity
3700.4	-33.27	-3.21	-30.06	-13	Horizontal
3700.4	-28.20	0.34	-28.54	-13	Vertical
5550.6	-34.47	3.95	-38.42	-13	Horizontal
5550.6	-33.48	-2.26	-31.22	-13	Vertical

Mode 2					
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Polarity
3760	-32.37	-3.21	-29.16	-13	Horizontal
3760	-25.18	0.34	-25.52	-13	Vertical
5640	-32.57	3.95	-36.52	-13	Horizontal
5640	-30.28	-2.26	-28.02	-13	Vertical

Mode 3					
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Polarity
3819.6	-27.84	-3.21	-24.63	-13	Horizontal
3819.6	-25.43	0.34	-25.77	-13	Vertical
5729.4	-30.08	3.95	-34.03	-13	Horizontal
5729.4	-27.14	-2.26	-24.88	-13	Vertical

UTRA BANDS**BAND 2:**

Mode 1					
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Polarity
3704.8	-63.05	10.27	-52.78	-13	Horizontal
3704.8	-62.75	10.58	-52.17	-13	Vertical
5557.2	-64.02	12.45	-51.58	-13	Horizontal
5557.2	-65.27	12.46	-52.81	-13	Vertical

Mode 2					
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Polarity
3760	-62.55	10.82	-51.72	-13	Horizontal
3760	-62.88	10.93	-51.95	-13	Vertical
5640	-63.98	11.87	-52.11	-13	Horizontal
5640	-65.16	11.99	-53.17	-13	Vertical

Mode 3					
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Polarity
3815.2	-62.32	10.91	-51.41	-13	Horizontal
3815.2	-63.02	10.27	-52.74	-13	Vertical
5722.8	-63.78	12.35	-51.43	-13	Horizontal
5722.8	-64.84	11.86	-52.98	-13	Vertical

BAND 5:

Mode 1					
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Polarity
1652.8	-62.98	10.89	-52.09	-13	Horizontal
1652.8	-62.89	10.47	-52.42	-13	Vertical
2479.2	-64.19	11.50	-52.69	-13	Horizontal
2479.2	-64.85	11.65	-53.21	-13	Vertical

Mode 2					
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Polarity
1672.8	-62.92	10.54	-52.38	-13	Horizontal
1672.8	-62.88	10.55	-52.33	-13	Vertical
2509.2	-64.36	12.40	-51.95	-13	Horizontal
2509.2	-64.99	11.73	-53.25	-13	Vertical

Mode 3					
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Polarity
1693.2	-62.51	10.28	-52.23	-13	Horizontal
1693.2	-63.21	10.97	-52.24	-13	Vertical
2539.8	-64.05	12.22	-51.83	-13	Horizontal
2539.8	-65.37	12.23	-53.14	-13	Vertical

6 FREQUENCY STABILITY


Test limit:

The frequency stability of the transmitter shall be measured while varying the ambient temperatures and supply voltages over the ranges specified in §2.1055. The specific frequency stability limits are provided in the relevant rules section(s). see section 4.

Test procedure:

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

Test setup:

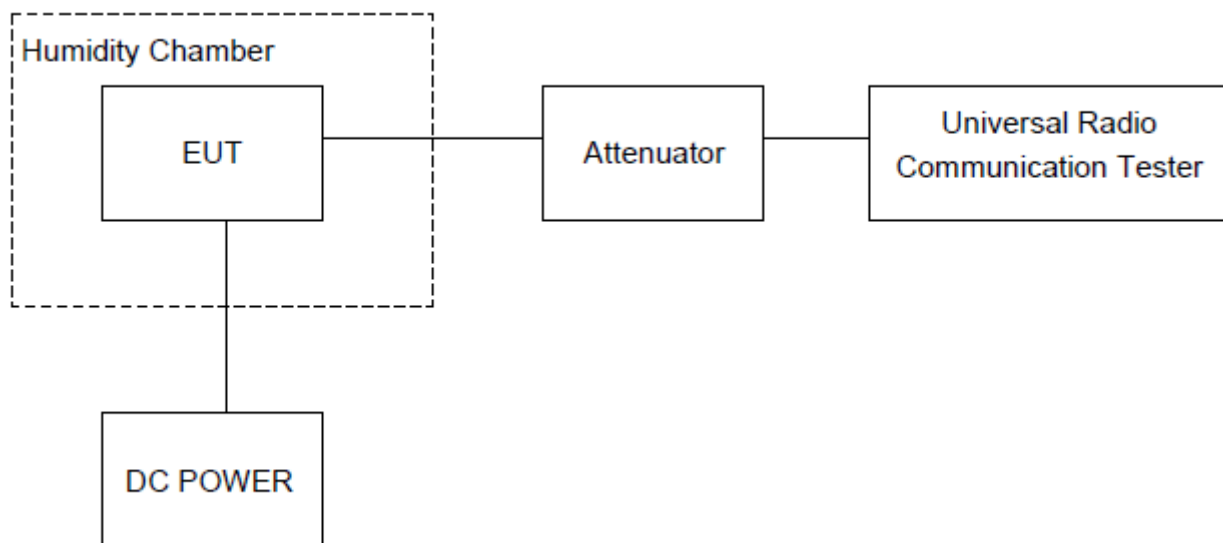

6.1 Measurement Result (Worst)

Frequency Error against Voltage for GSM 850 band (Mid channel)

Voltage(V)	Frequency error(Hz)	Frequency error (ppm)
3.45	37	0.044
3.8	39	0.046
4.2	39	0.047

Frequency Error against Temperature for GSM 850 band (Mid channel)

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	40	0.047
0	28	0.034
10	31	0.038
20	40	0.047
30	35	0.041
40	37	0.044
50	35	0.042

Frequency Error against Voltage for PCS 1900 band (Mid channel)

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.45	35	0.019
3.8	34	0.018
4.2	35	0.019

Frequency Error against Temperature for PCS 1900 band (Mid channel)

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	29	0.016
0	40	0.021
10	32	0.017
20	33	0.018
30	32	0.017
40	34	0.018
50	39	0.021

Frequency Error against Voltage for GPRS 850 band (Mid channel)

Voltage(V)	Frequency error(Hz)	Frequency error (ppm)
3.45	40	0.048
3.8	33	0.039
4.2	36	0.043

Frequency Error against Temperature for GPRS 850 band (Mid channel)

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	36	0.043
0	38	0.045
10	34	0.041
20	31	0.037
30	29	0.035
40	38	0.045
50	41	0.049

Frequency Error against Voltage for GPRS 1900 band (Mid channel)

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.45	32	0.017
3.8	30	0.016
4.2	34	0.018

Frequency Error against Temperature for GPRS 1900 band (Mid channel)

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	35	0.019
0	29	0.015
10	35	0.019
20	41	0.022
30	38	0.020
40	35	0.019
50	31	0.017

Frequency Error against Voltage for EGPRS 850 band (Mid channel)

Voltage(V)	Frequency error(Hz)	Frequency error (ppm)
3.45	37	0.045
3.8	32	0.039
4.2	35	0.042

Frequency Error against Temperature for EGPRS 850 band (Mid channel)

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	40	0.047
0	38	0.045
10	34	0.041
20	28	0.034
30	31	0.038
40	35	0.042
50	30	0.036

Frequency Error against Voltage for EGPRS 1900 band (Mid channel)

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.45	35	0.019
3.8	36	0.019
4.2	29	0.016

Frequency Error against Temperature for EGPRS 1900 band (Mid channel)

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	32	0.017
0	39	0.021
10	37	0.019
20	41	0.022
30	34	0.018
40	35	0.019
50	31	0.017

UTRA BANDS**Frequency Error against Voltage for WCDMA BAND 2 (Mid channel)**

Voltage(V)	Frequency error(Hz)	Frequency error (ppm)
3.45	34	0.018
3.8	33	0.018
4.35	31	0.016

Frequency Error against Temperature for WCDMA BAND 2 (Mid channel)

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	30	0.016
0	30	0.016
10	29	0.015
20	40	0.021
30	40	0.022
40	30	0.016
50	31	0.017

Frequency Error against Voltage for WCDMA BAND 5 (Mid channel)

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.45	35	0.041
3.8	41	0.049
4.35	40	0.048

Frequency Error against Temperature for WCDMA BAND 5 (Mid channel)

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	36	0.043
0	39	0.047
10	30	0.036
20	34	0.040
30	34	0.041
40	39	0.047
50	31	0.037

7 OCCUPIED BANDWIDTH& Emission Bandwidth

Test limit:

The occupied bandwidth (OBW), that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission, shall be measured when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at the discretion of the user. [i]2.1049(h)]

Many of the individual rule parts specify a relative OBW in lieu of the 99% OBW. In such cases, the OBW is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated by at least X dB below the transmitter power, where the value of X is typically specified as 26.

The relative OBW must be measured and reported when it is specified in the applicable rule part; otherwise, the 99% OBW shall be measured and reported. The test report shall specify which OBW is reported.

A spectrum/signal analyzer or other instrument providing a spectral display is recommended for these measurements and the video bandwidth shall be set to a value at least three times greater than the IF/resolution bandwidth to avoid any amplitude smoothing. Video filtering shall not be used during occupied bandwidth tests.

The OBW shall be measured for all operating conditions that will affect the bandwidth results (e.g. variable modulations, coding, or channel bandwidth settings). See section 4.

Test procedure:

Occupied bandwidth – relative measurement procedure

The reference value is the highest level of the spectral envelope of the modulated signal.


- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
- b) The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to prevent the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least $10\log(\text{OBW} / \text{RBW})$ below the reference level.
- d) NOTE—Steps a) through c) may require iteration to adjust within the specified tolerances.
- e) The dynamic range of the spectrum analyzer at the selected RBW shall be at least 10 dB below the target “-X dB down” requirement (i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 36 dB below the reference value).
- f) Set the detection mode to peak, and the trace mode to max hold.
- g) Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- h) Determine the “-X dB down amplitude” as equal to (Reference Value – X). Alternatively, this calculation can be performed by the analyzer by using the marker-delta function.
- i) Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step g). If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
- j) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display. The frequency and amplitude axes and scale shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

Occupied bandwidth – power bandwidth (99%) measurement procedure

The following procedure shall be used for measuring (99 %) power bandwidth

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least $10\log(\text{OBW} / \text{RBW})$ below the reference level.
- d) NOTE—Steps a) through c) may require iteration to adjust within the specified tolerances.
- e) Set the detection mode to peak, and the trace mode to max hold..
- f) Use the 99 % power bandwidth function of the spectrum analyzer (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99 % power bandwidth function, the trace data points are to be recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99 % power bandwidth is the difference between these two frequencies.
- h) The OBW shall be reported by providing plot(s) of the measuring instrument display. The frequency and amplitude axes and scale shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

Test setup:

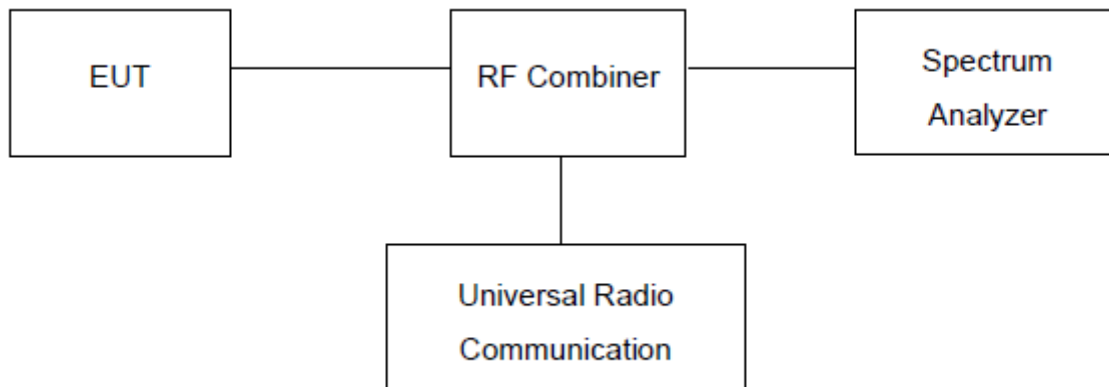

7.1 Measurement Result

GSM850:

Frequency	OBW(99%)	26dB BW
824.2	248.40KHz	310.26KHz
836.6	246.79KHz	318.91KHz
848.8	245.19KHz	312.82KHz

PCS1900:

Frequency	OBW(99%)	26dB BW
1850.2	248.40KHz	312.18KHz
1880	246.79KHz	312.82KHz
1909.8	250.00KHz	313.46KHz

GPRS850:

Frequency	OBW(99%)	26dB BW
824.2	246.79KHz	316.68KHz
836.6	246.79KHz	311.86KHz
848.8	241.99KHz	318.27KHz

GPRS 1900:

Frequency	OBW(99%)	26dB BW
1850.2	246.79KHz	308.01KHz
1880	245.19KHz	323.08KHz
1909.8	241.99KHz	314.42KHz

EGPRS 850:

Frequency	OBW(99%)	26dB BW
824.2	241.99KHz	282.05KHz
836.6	245.19KHz	318.27KHz
848.8	246.79KHz	311.86KHz

EGPRS 1900:

Frequency	OBW(99%)	26dB BW
1850.2	246.79KHz	311.86KHz
1880	246.79KHz	317.63KHz
1909.8	246.79KHz	317.03KHz

UTRA BANDS**BAND 2:**


Frequency	OBW(99%)	26dB BW
1852.4	4.167MHz	4.706MHz
1880	4.167MHz	4.712MHz
1907.6	4.167MHz	4.776MHz

BAND 5:


Frequency	OBW(99%)	26dB BW
826.4	4.151MHz	4.705MHz
836.4	4.183MHz	4.728MHz
846.6	4.151MHz	4.696MHz

7.2 Test Plot(s)


Occupied Bandwidth (99% and -26dBc) GSM 850 BAND CH 128

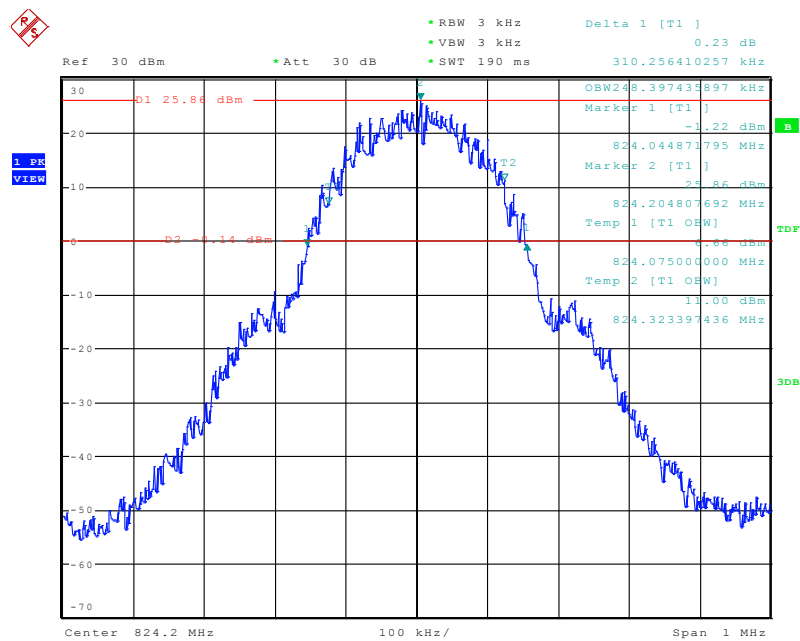


Occupied Bandwidth (99% and -26dBc) GSM 850 BAND CH 190

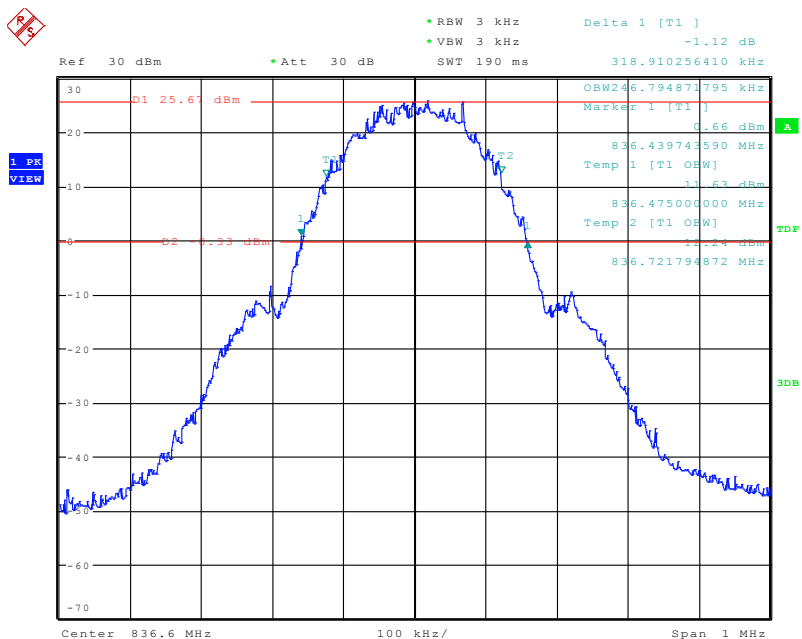


Occupied Bandwidth (99% and -26dBc) GSM 850 BAND CH 251

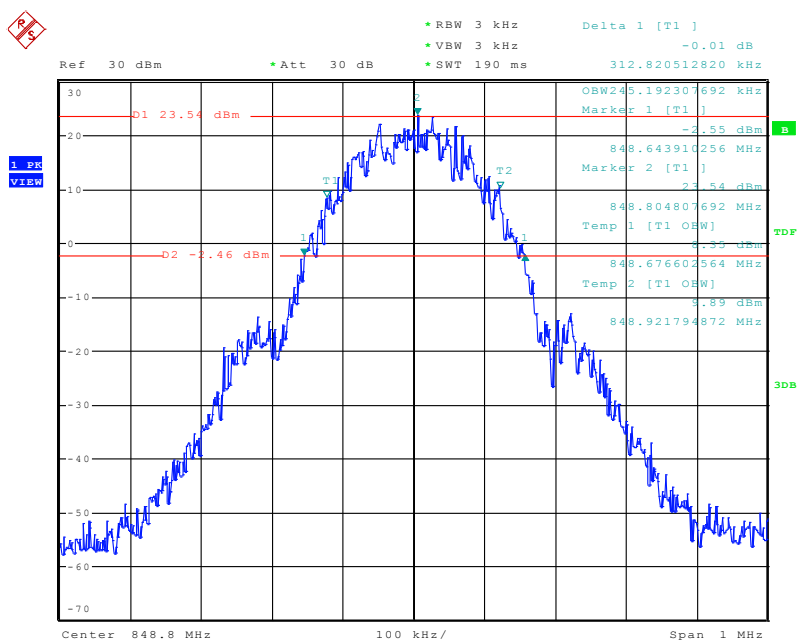


Occupied Bandwidth (99% and -26dBc) GSM 1900 BAND CH 512

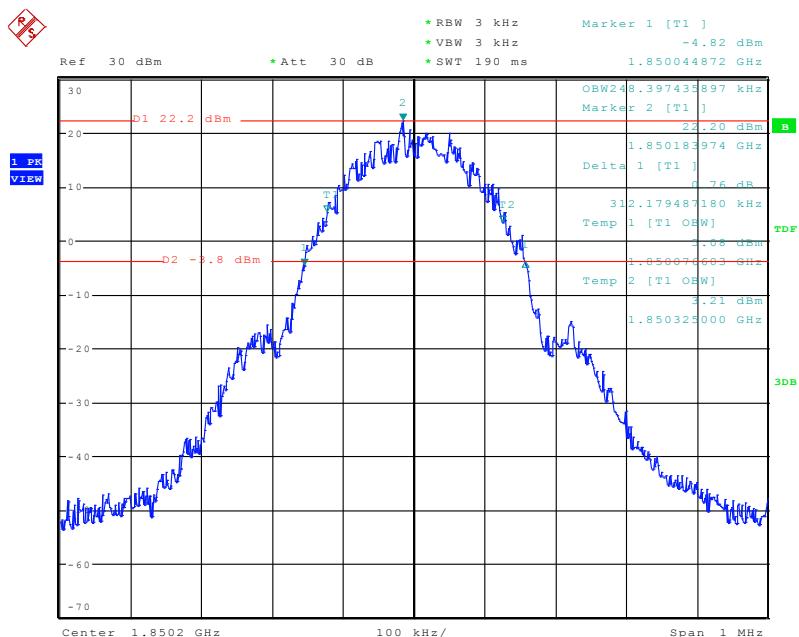


Occupied Bandwidth (99% and -26dBc) PCS 1900 BAND CH 661

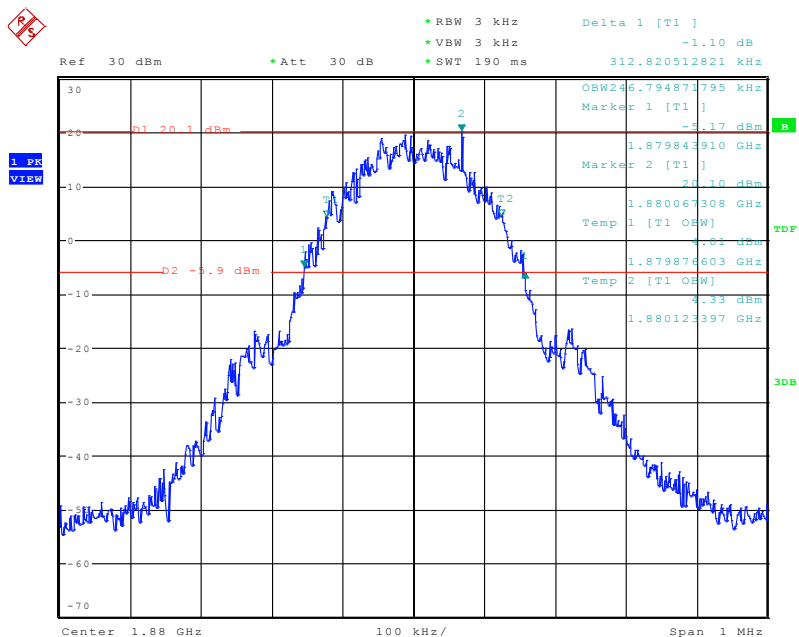


Occupied Bandwidth (99% and -26dBc) PCS 1900 BAND CH 810

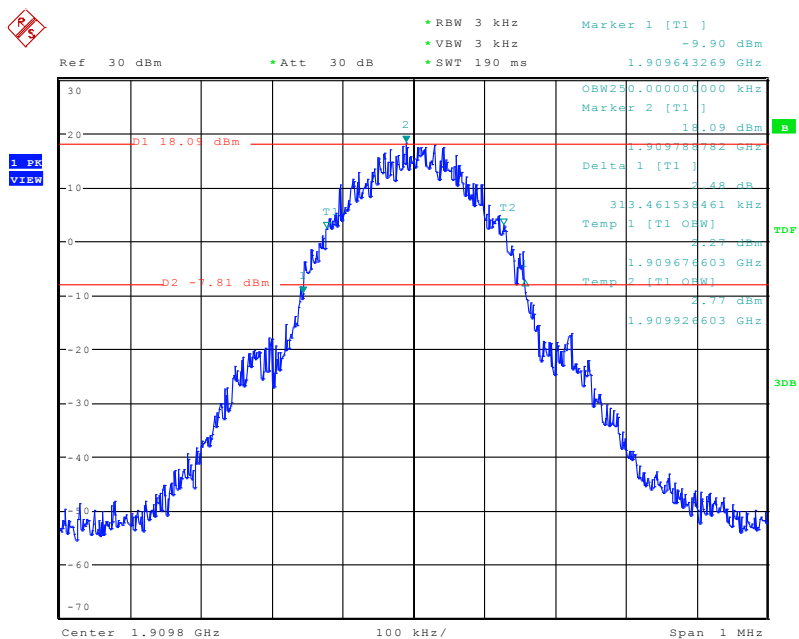


Occupied Bandwidth (99% and -26dBc) GPRS 850 BAND CH 128

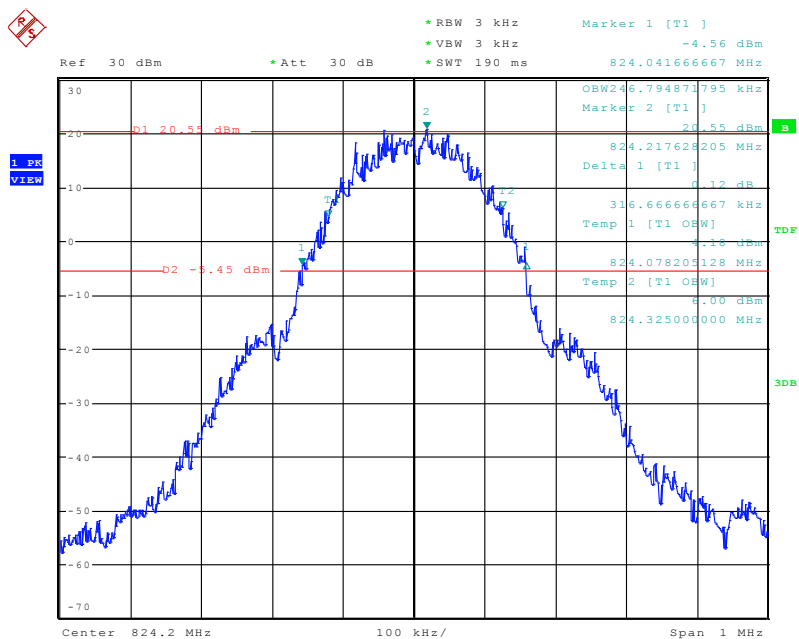


Occupied Bandwidth (99% and -26dBc) GPRS 850 BAND CH 190

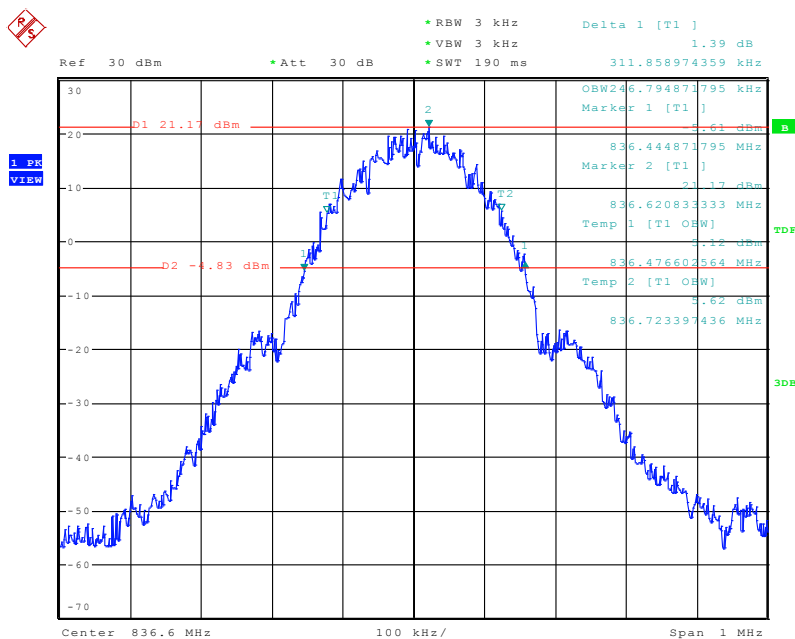


Occupied Bandwidth (99% and -26dBc) GPRS 850 BAND CH 251

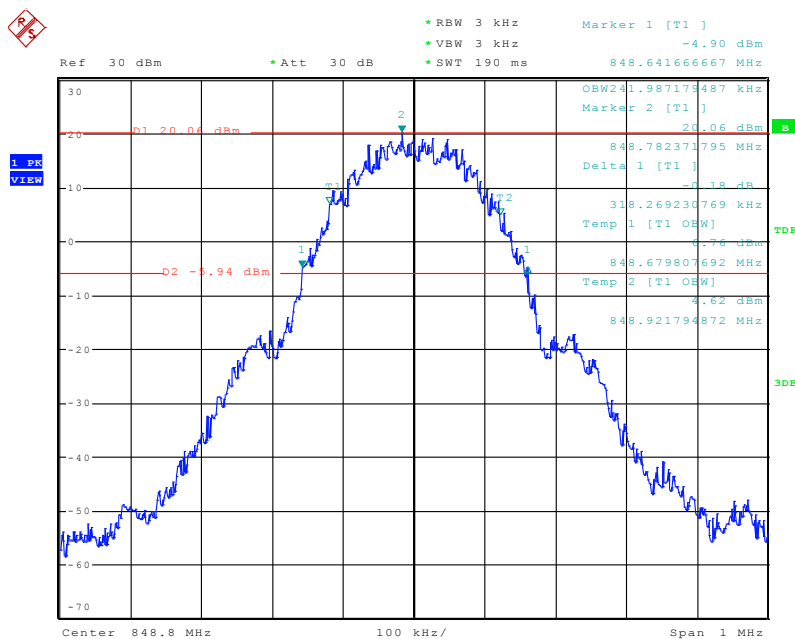


Occupied Bandwidth (99% and -26dBc) GPRS 1900 BAND CH 512

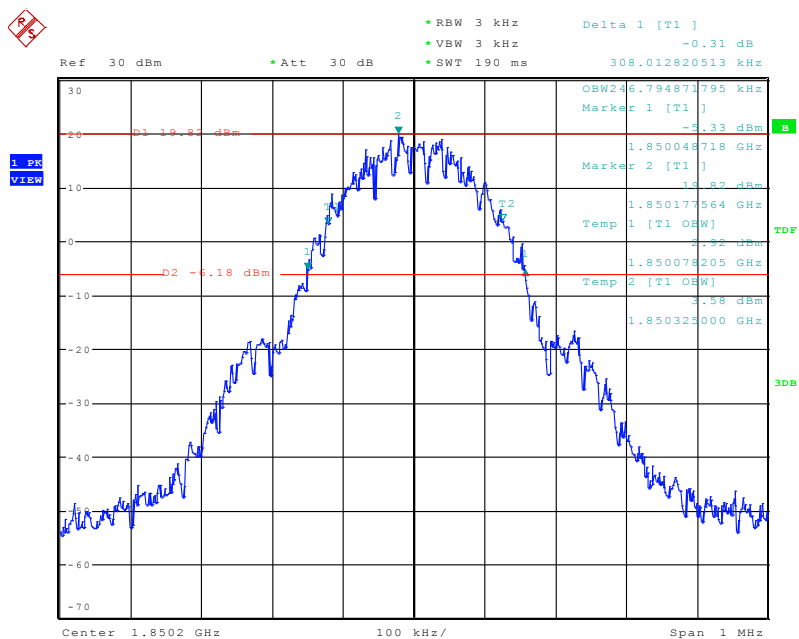


Occupied Bandwidth (99% and -26dBc) GPRS 1900 BAND CH 661

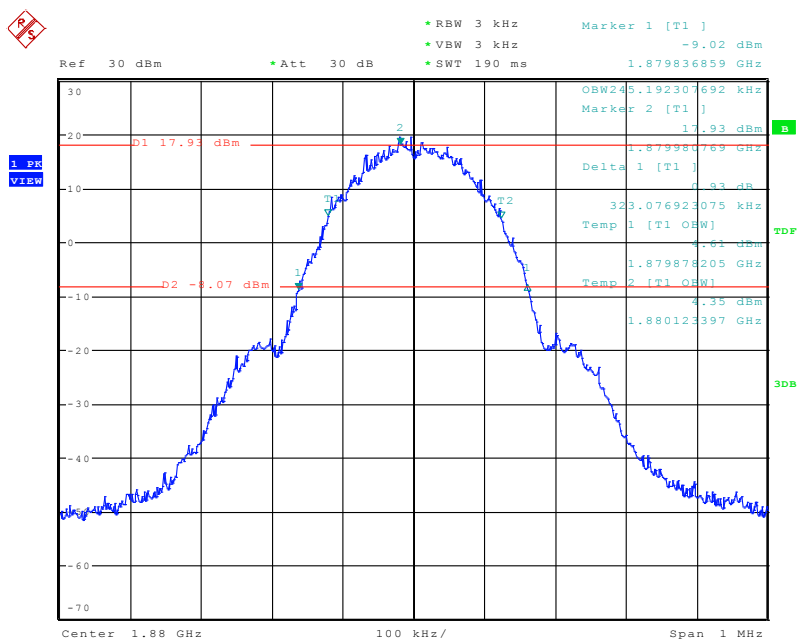


Occupied Bandwidth (99% and -26dBc) GPRS 1900 BAND CH 810

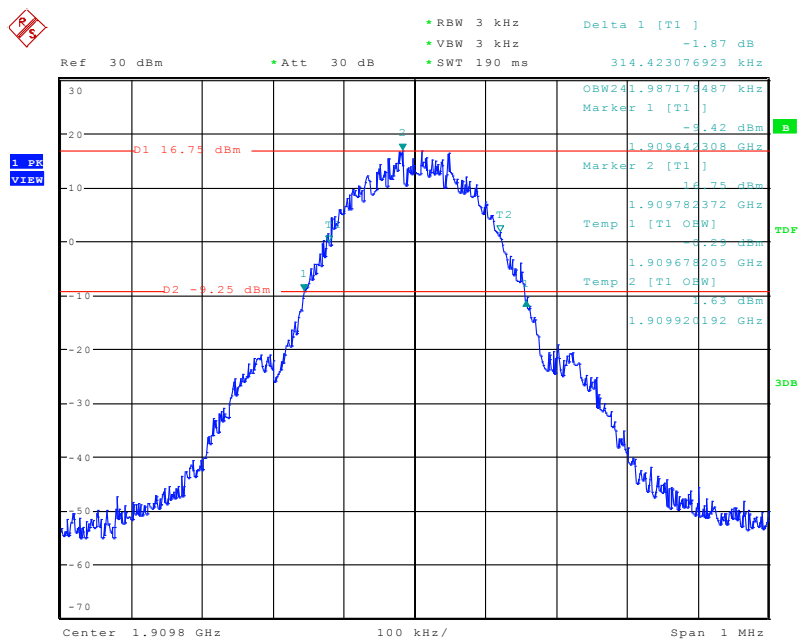


Occupied Bandwidth (99% and -26dBc) EGPRS 850 BAND CH 128

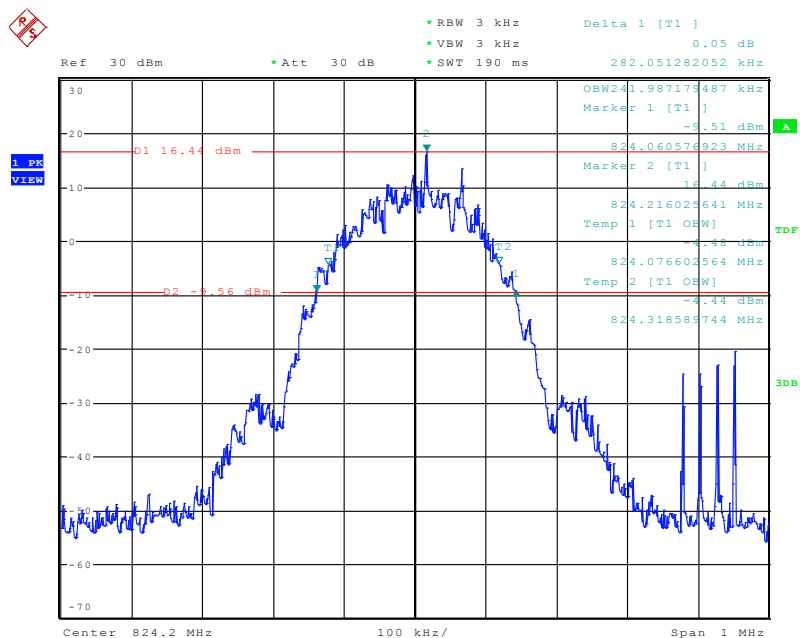


Occupied Bandwidth (99% and -26dBc) EGPRS 850 BAND CH 190

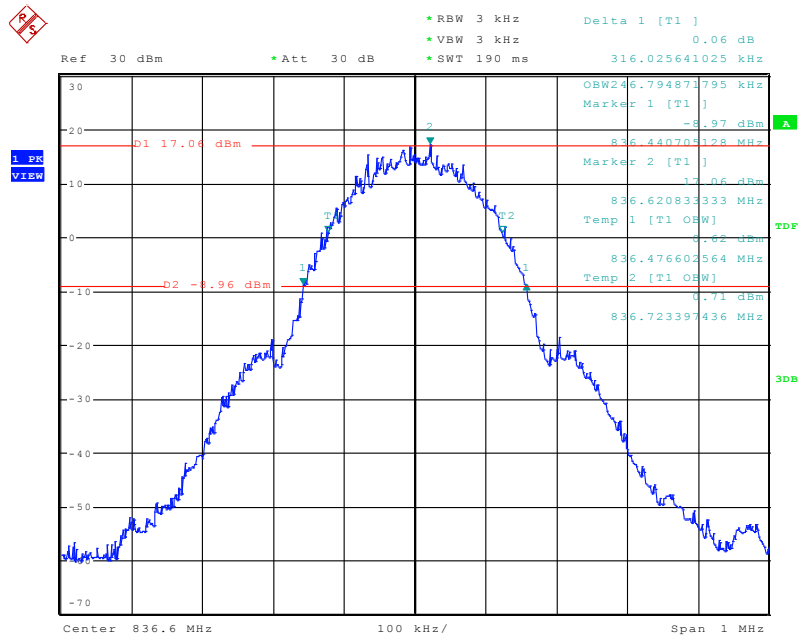


Occupied Bandwidth (99% and -26dBc) EGPRS 850 BAND CH 251

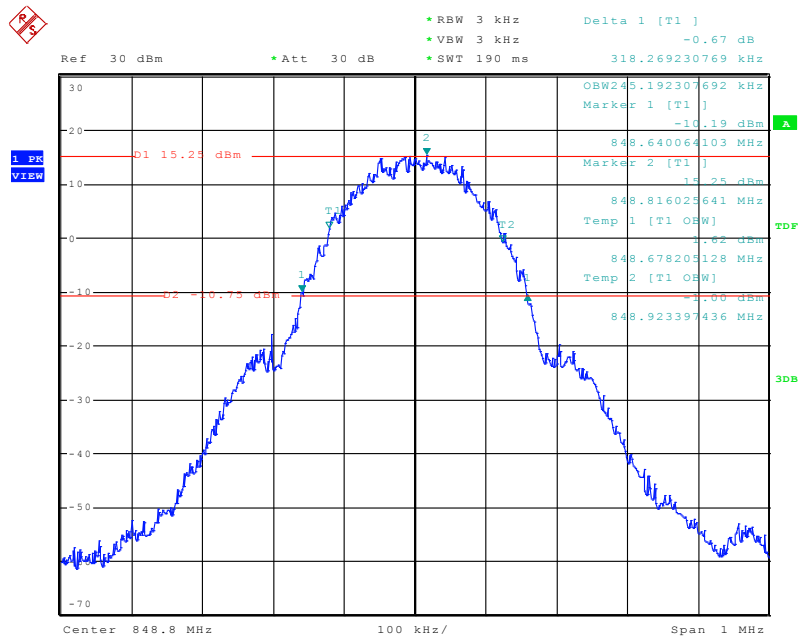


Occupied Bandwidth (99% and -26dBc) EGPRS 1900 BAND CH 512

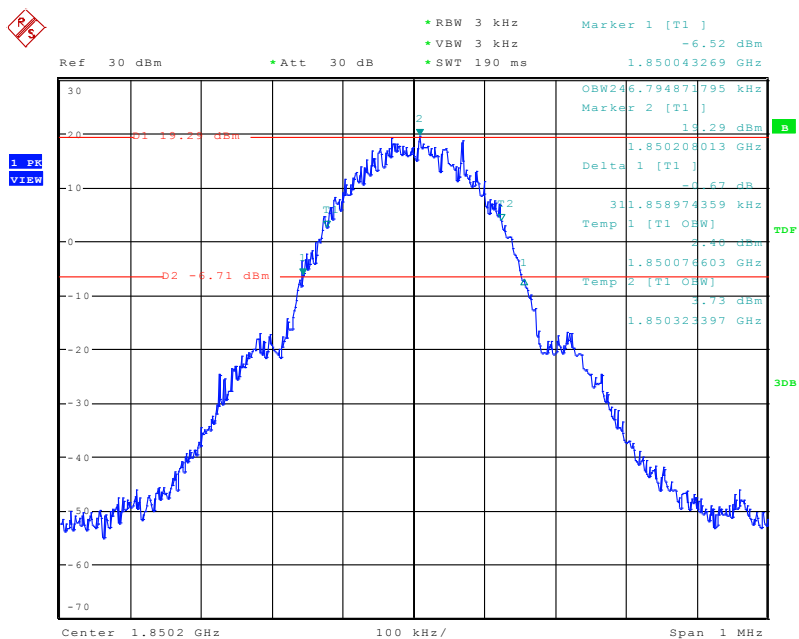

Occupied Bandwidth (99% and -26dBc) EGPRS 1900 BAND CH 661

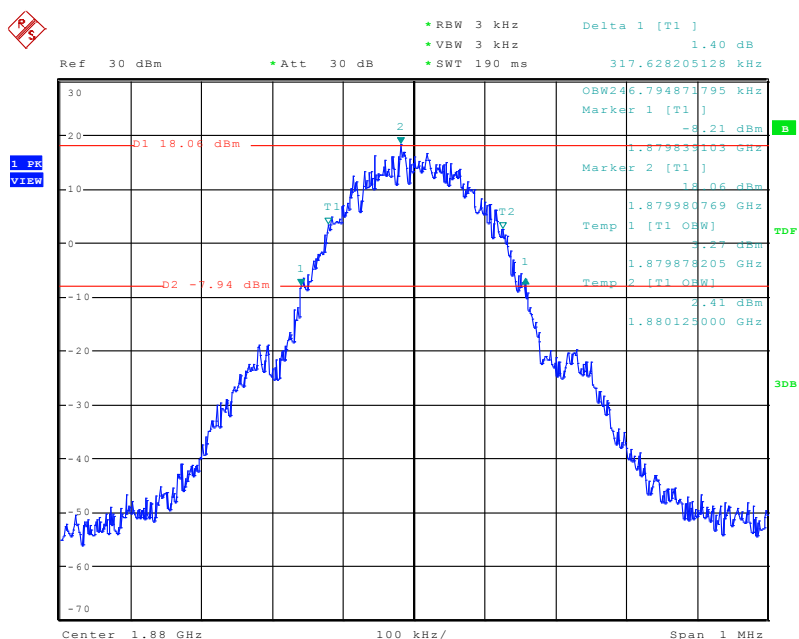


Occupied Bandwidth (99% and -26dBc) EGPRS 1900 BAND CH 810

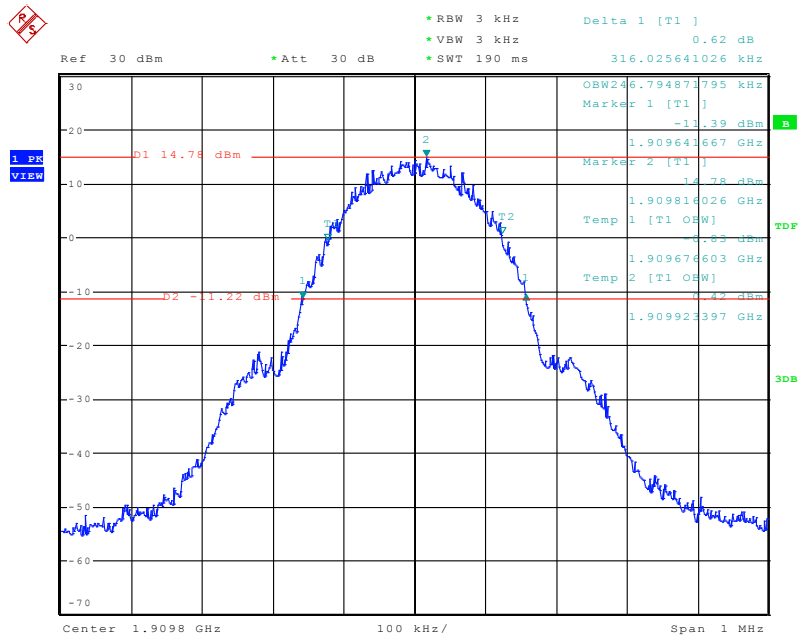


UTRA BANDS


Occupied Bandwidth (99% and -26dBc) WCDMA BAND II CH 9262

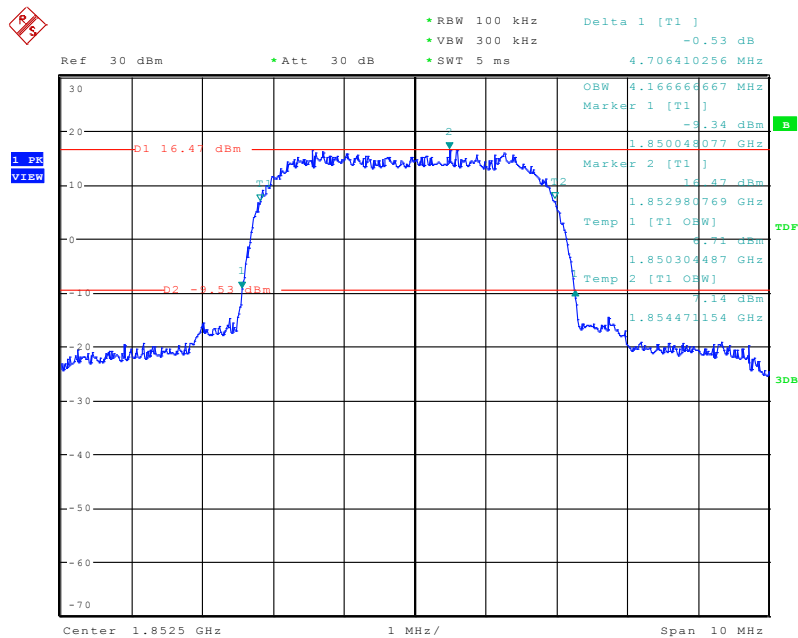


Occupied Bandwidth (99%and-26dBc) WCDMA BAND II CH 9400

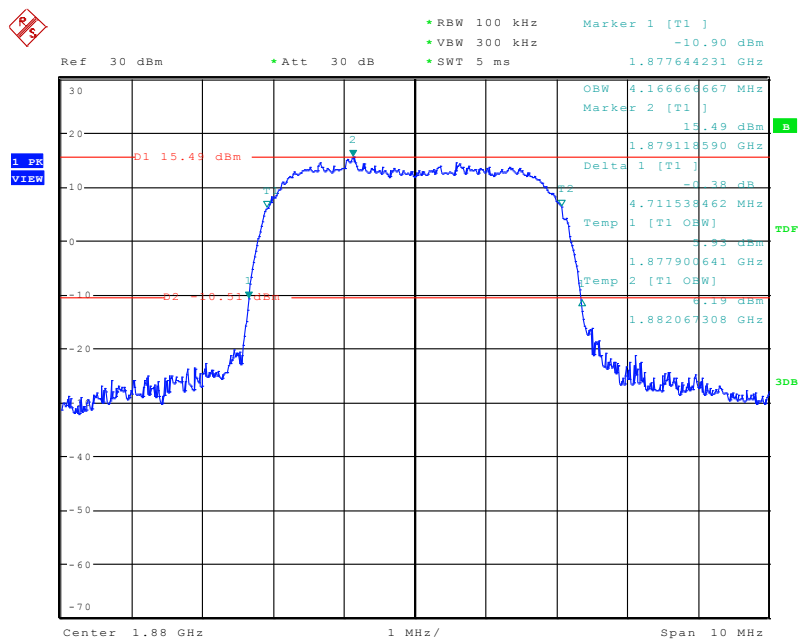


Occupied Bandwidth (99%and-26dBc) WCDMA BAND II CH 9538

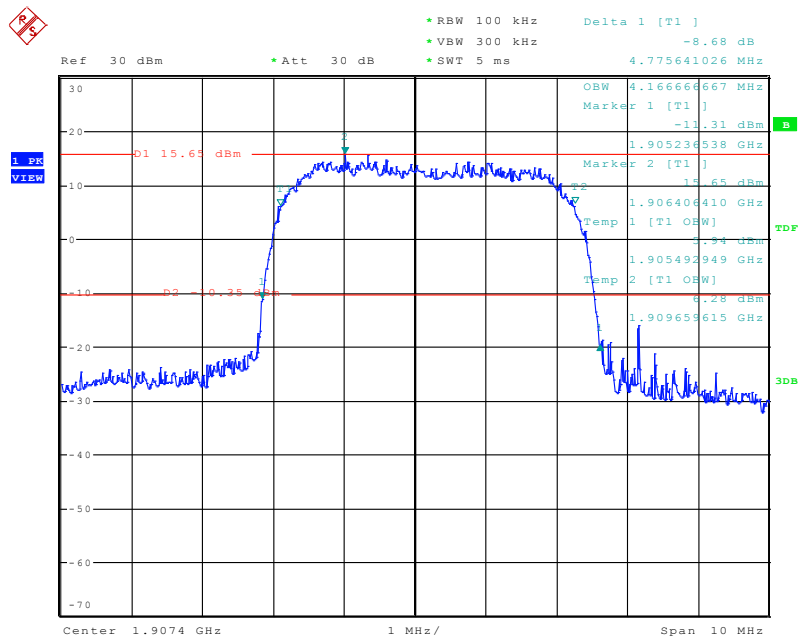


Occupied Bandwidth (99%and-26dBc) WCDMA BAND V CH 4132

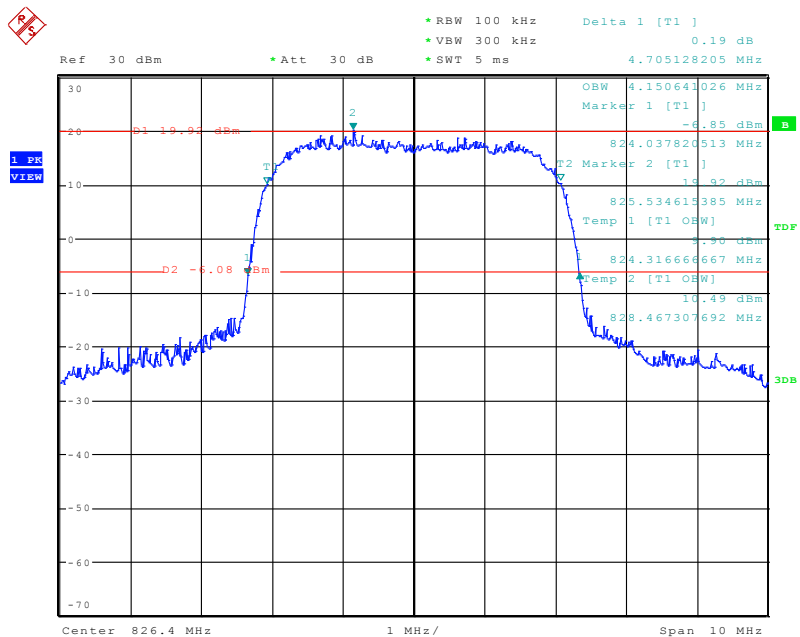

Occupied Bandwidth (99%and-26dBc) WCDMA BAND V CH 4182

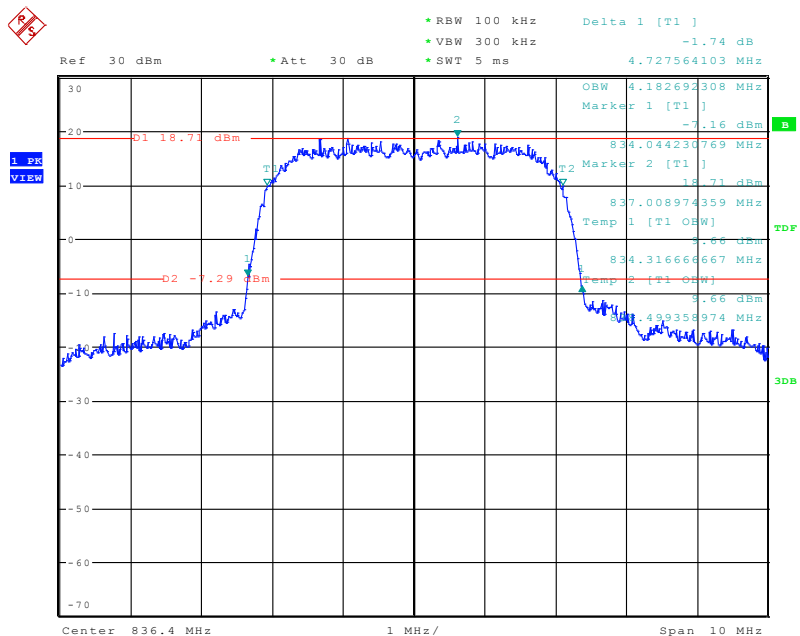

Occupied Bandwidth (99%and-26dBc) WCDMA BAND V CH 4233

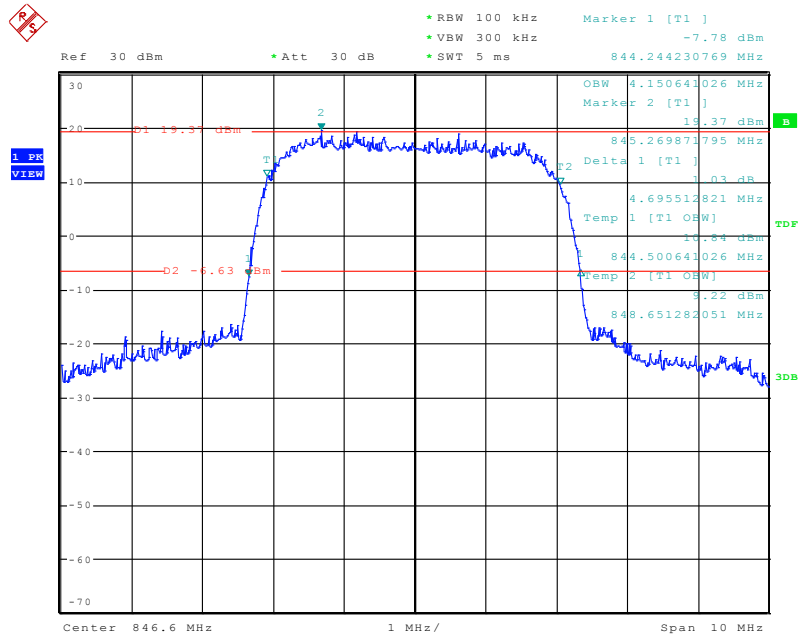

8 BAND EDGE


Test Limit:

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in §2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified. See section 4.

Test procedure:

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Test setup:

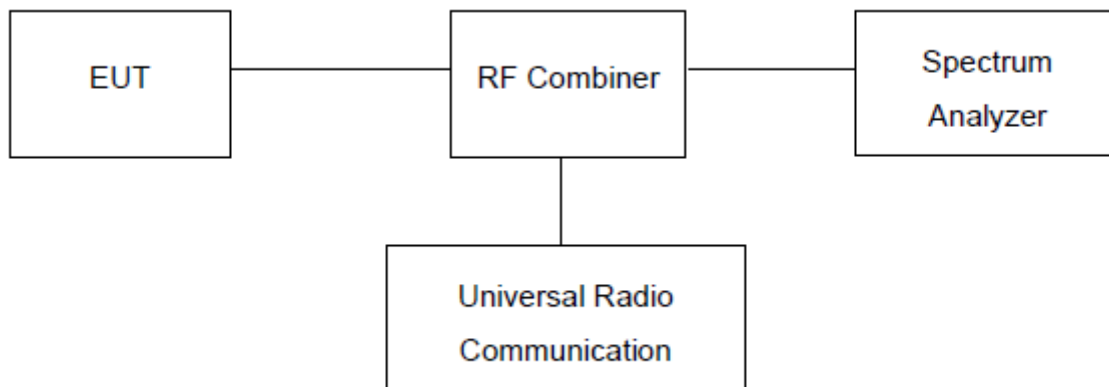

8.1 Measurement Result

GSM850:

Test Channel	BW(MHz)	UL Channel	Frequency(MHz)	Judgement
Low Range	0.2	128	824.2	Pass
High Range	0.2	251	848.8	Pass

PCS 1900:

Test Channel	BW(MHz)	UL Channel	Frequency(MHz)	Judgement
Low Range	0.2	512	1850.2	Pass
High Range	0.2	810	1909.8	Pass

UTRA BANDS

BAND 2:


Test Channel	BW(MHz)	UL Channel	Frequency(MHz)	Judgement
Low Range	5	9263	1852.4	Pass
High Range	5	9537	1907.6	Pass

BAND 5:


Test Channel	BW(MHz)	UL Channel	Frequency(MHz)	Judgement
Low Range	5	4132	826.4	Pass
High Range	5	4233	846.6	Pass

8.1 Test Plot(s)


Low Band Edge GSM 850 BAND CH 128

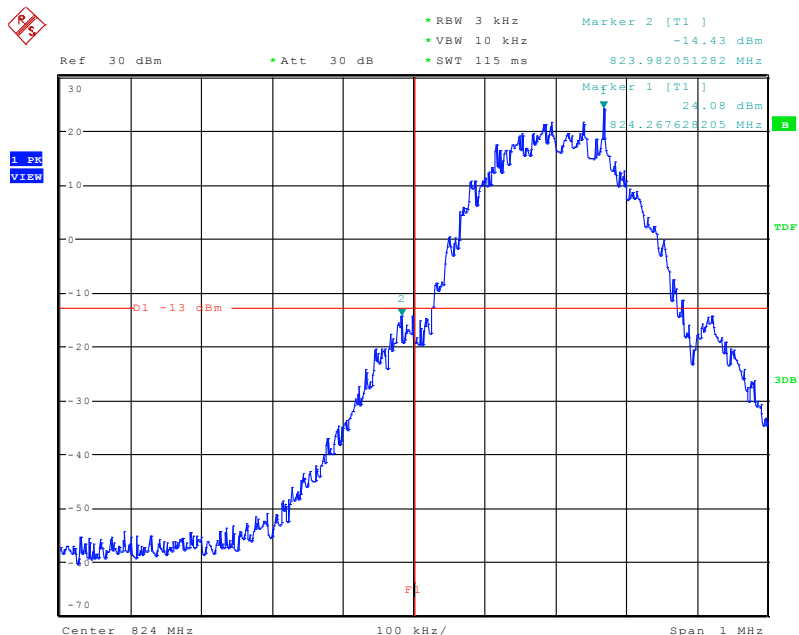


High Band Edge GSM 850 BAND CH 251

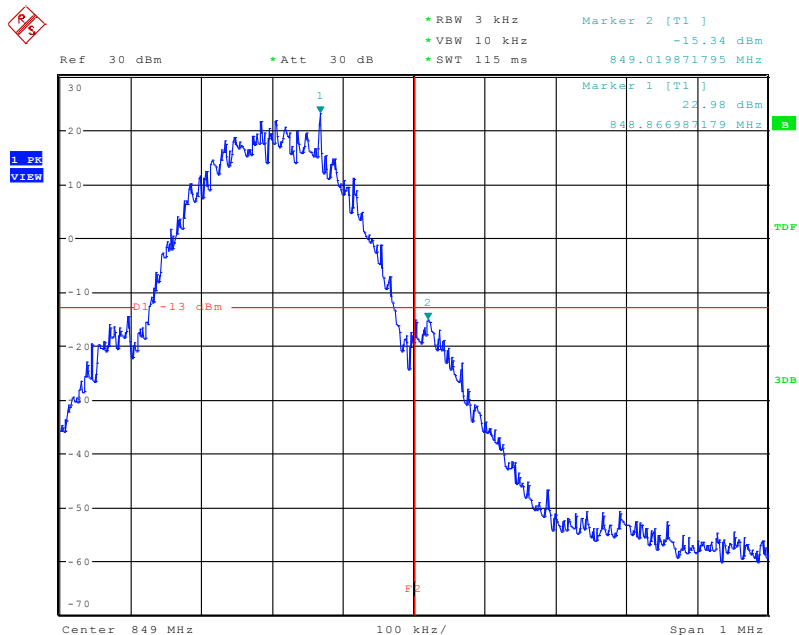


Low Band Edge PCS 1900 BAND CH 512

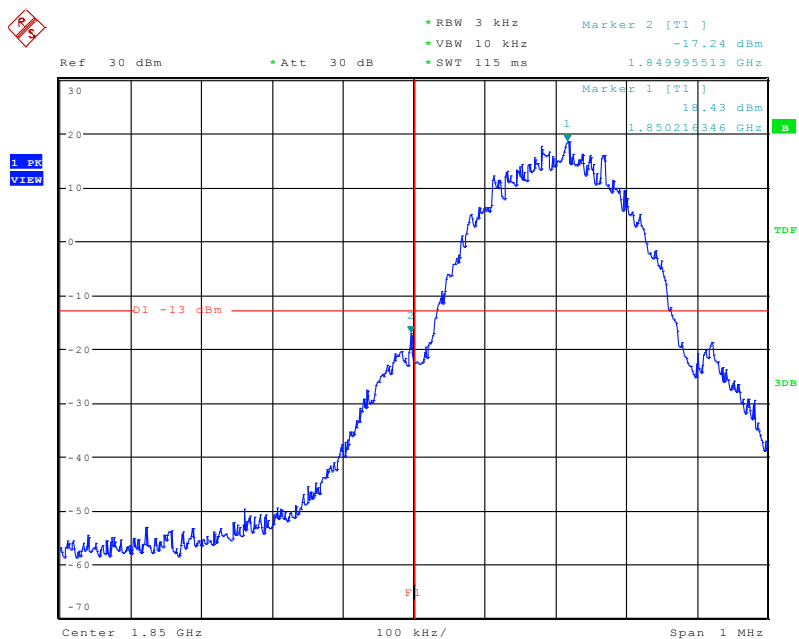


High Band Edge PCS 1900 BAND CH 810

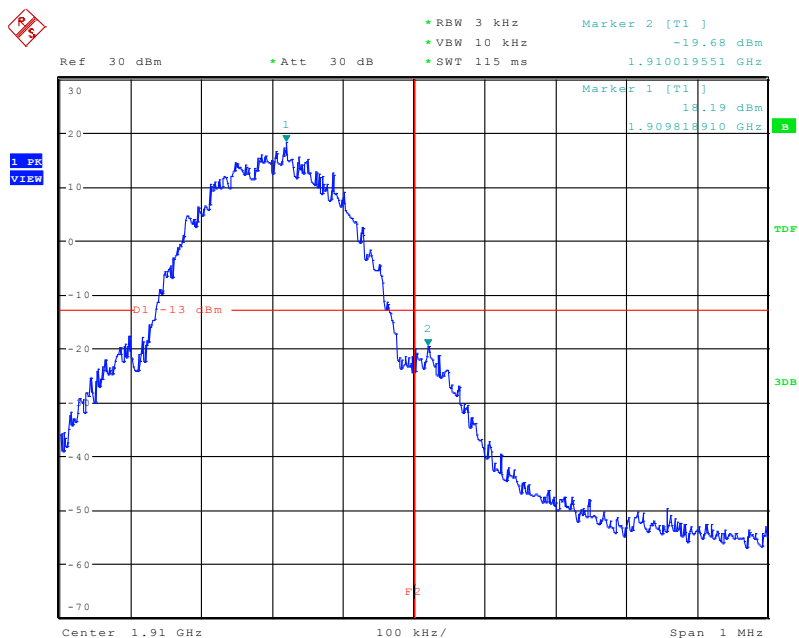


Low Band Edge WCDMA BAND II CH 9263

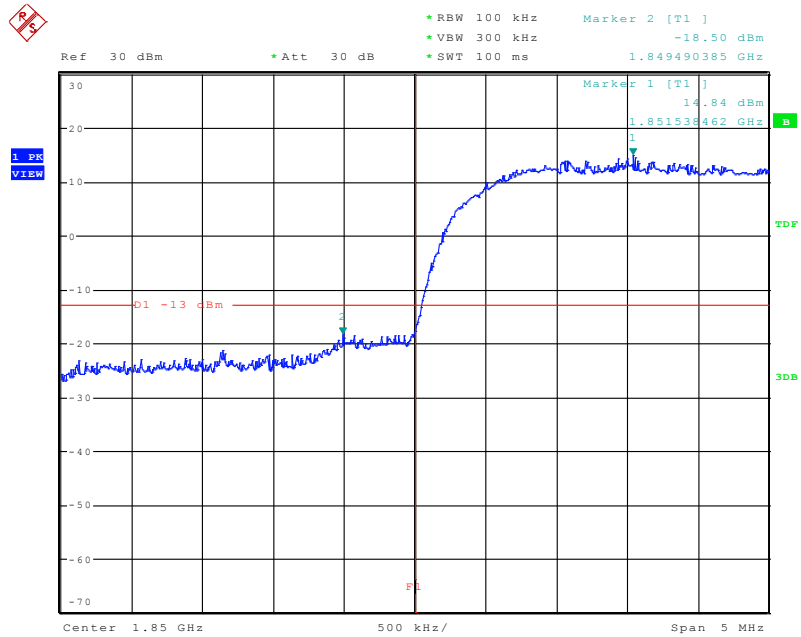


High Band Edge WCDMA BAND II CH 9537

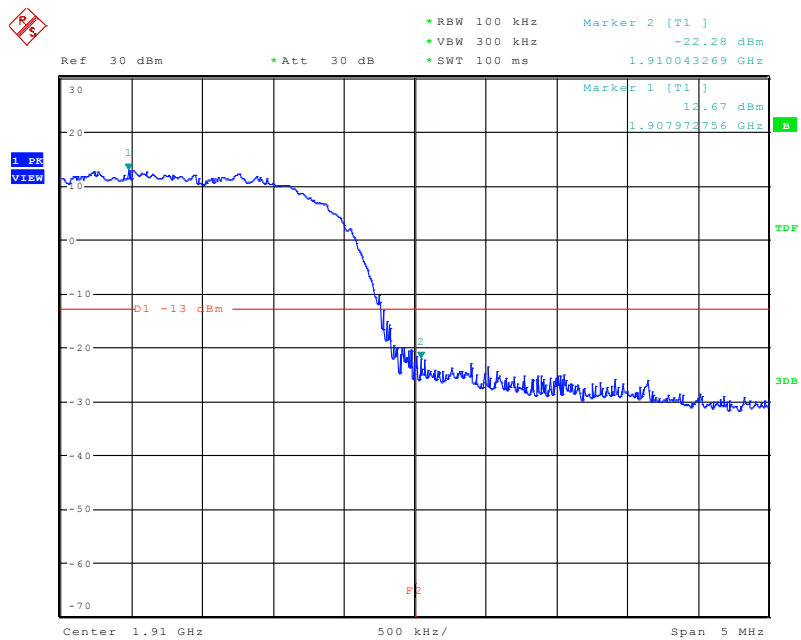

Low Band Edge WCDMA BAND V CH 4132

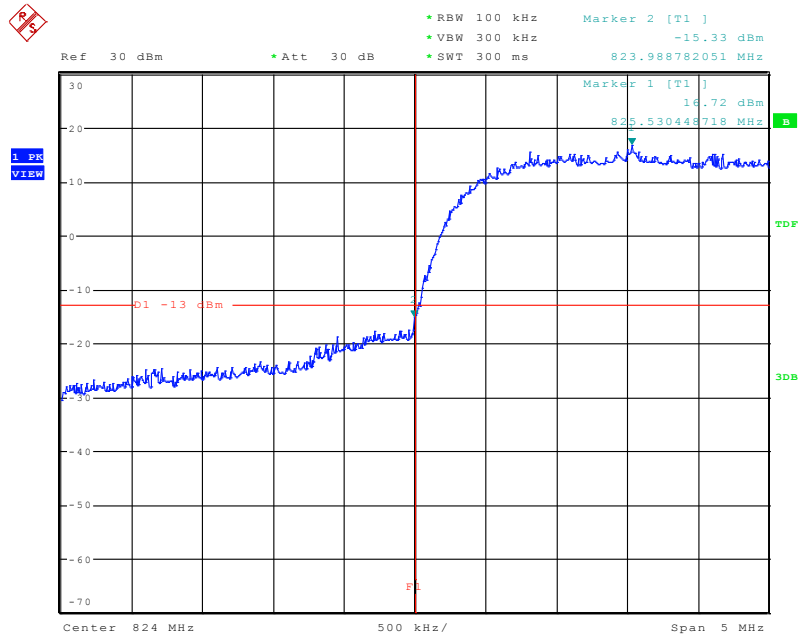


High Band Edge WCDMA BAND V CH 4233

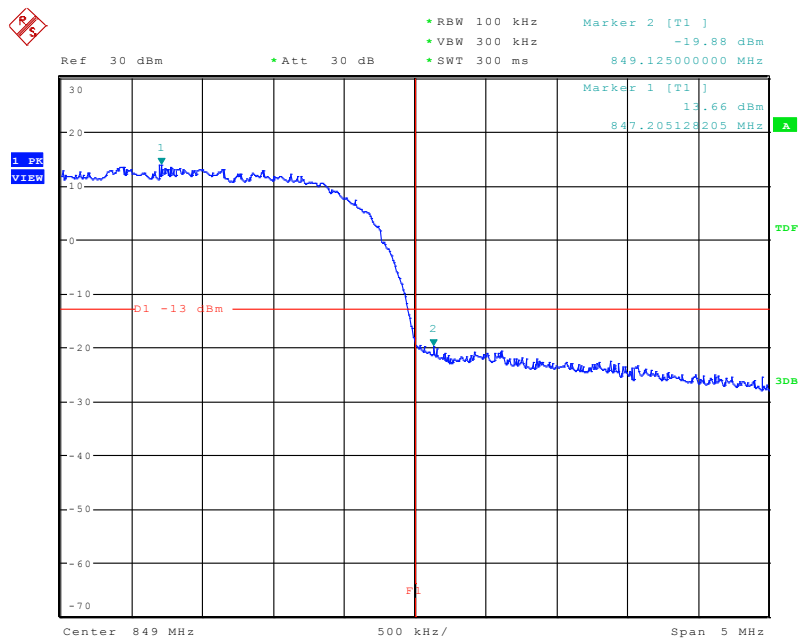


9 EUT TEST PHOTO

RADIATED EMISSION TEST

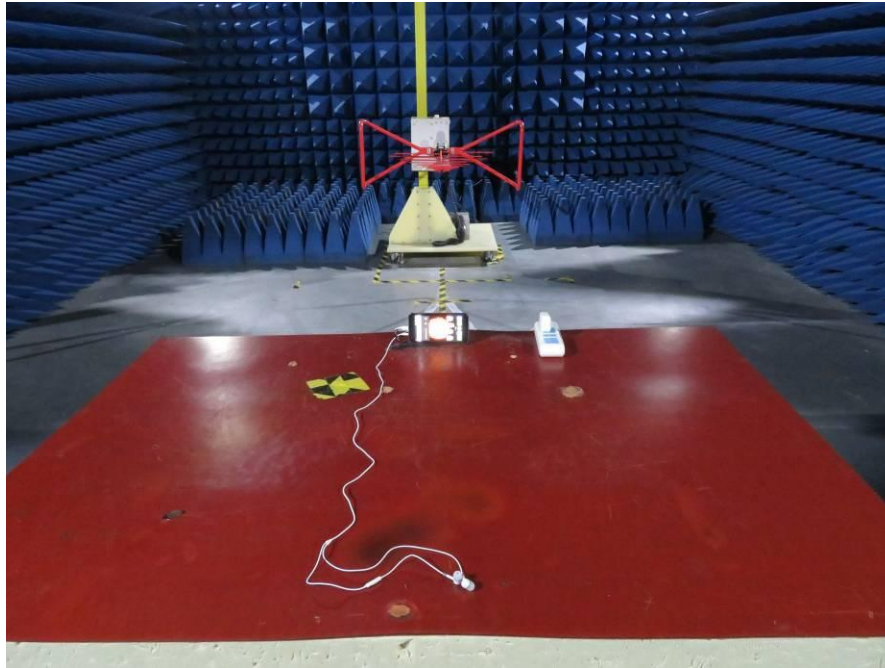

RADIATED EMISSION TEST

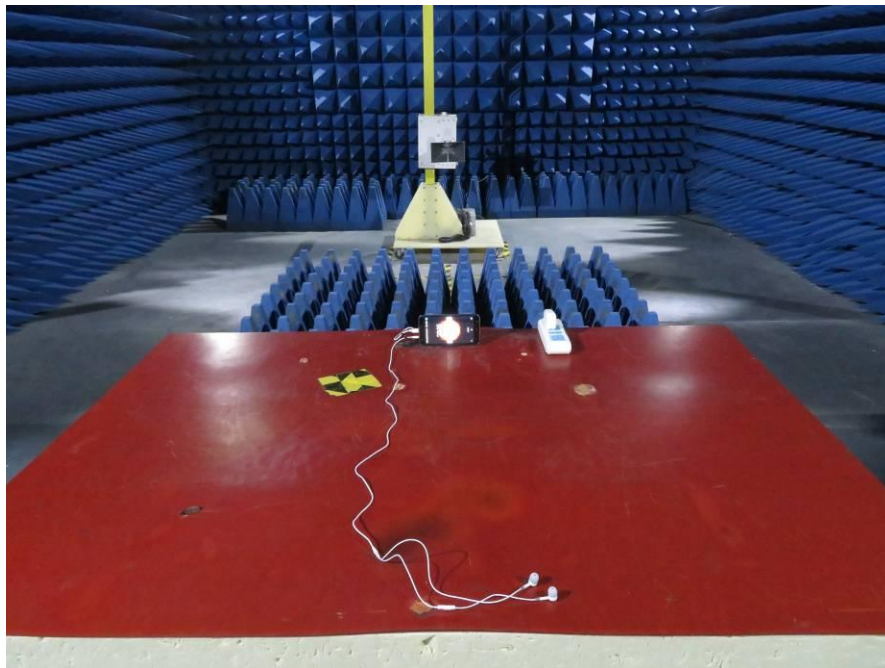

RF TEST



10 EUT PHOTO

Appearance photograph of EUT



Appearance photograph of EUT



Appearance photograph of EUT



Appearance photograph of EUT



Appearance photograph of EUT



Appearance photograph of EUT



Appearance photograph of EUT



Internal photograph of EUT



Internal photograph of EUT




Internal photograph of EUT




Internal photograph of EUT




Internal photograph of EUT

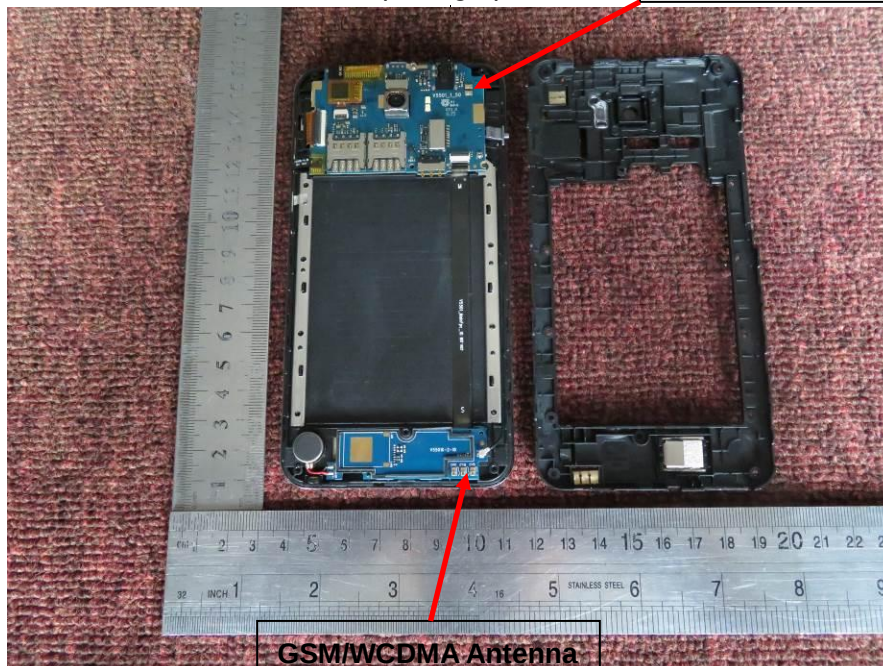BT/WiFi Antenna**GSM/WCDMA Antenna**


Internal photograph of EUT

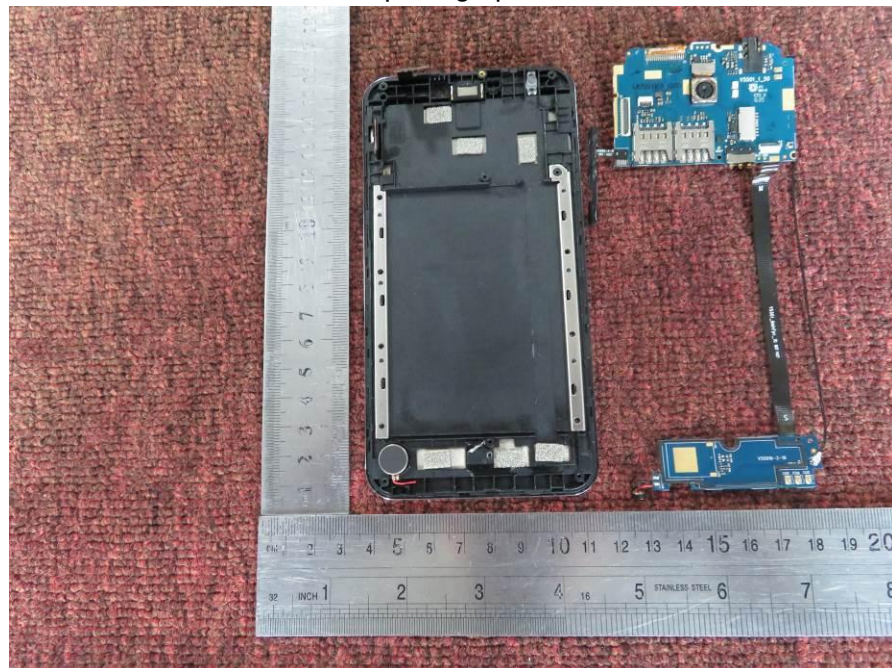


Internal photograph of EUT

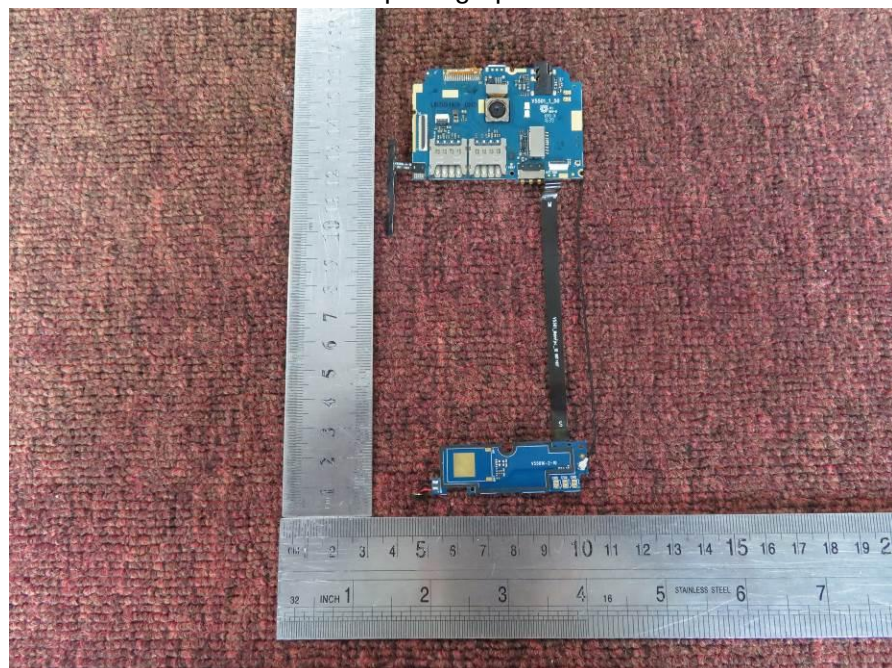

Internal photograph of EUT

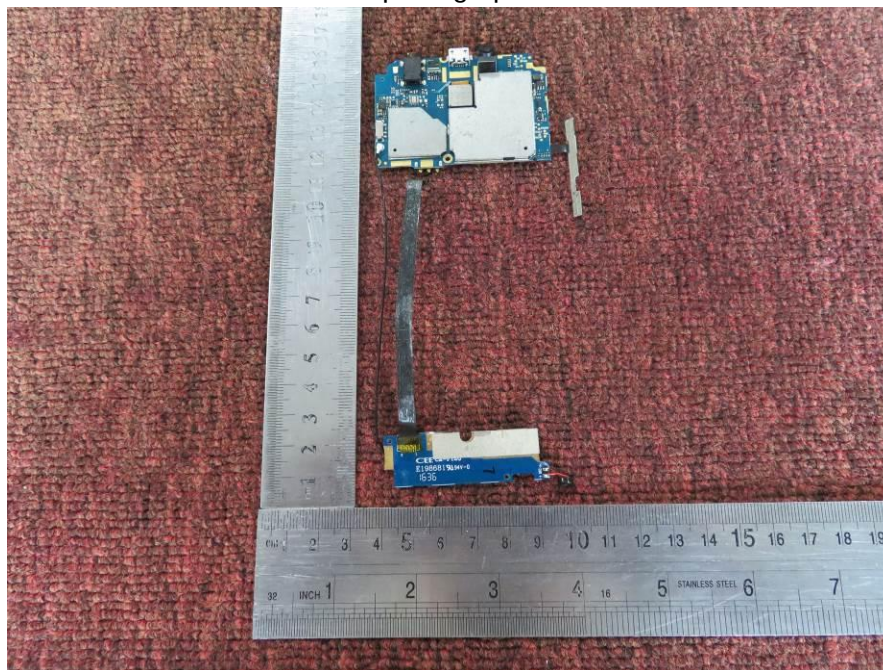


Internal photograph of EUT

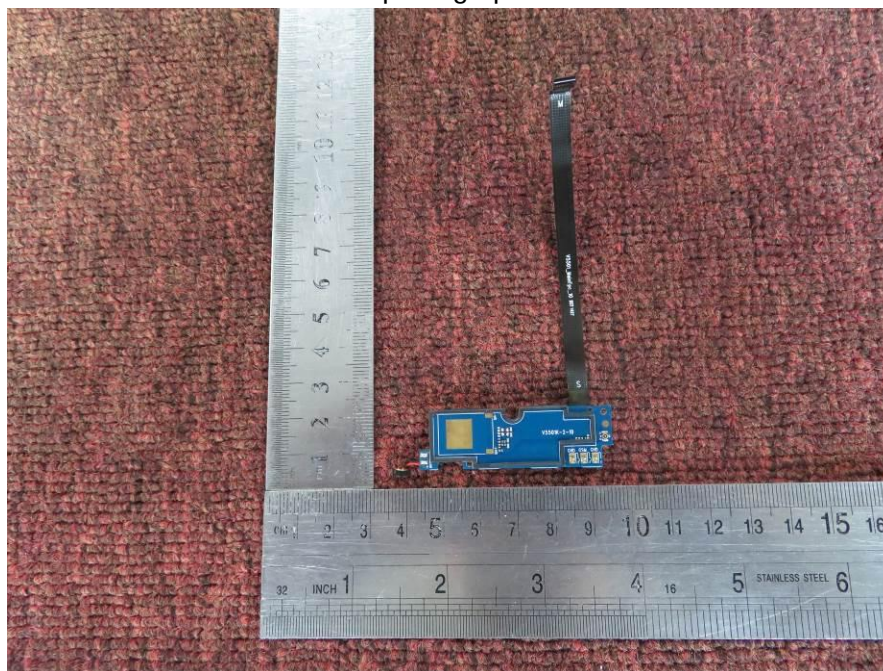


Internal photograph of EUT




Internal photograph of EUT

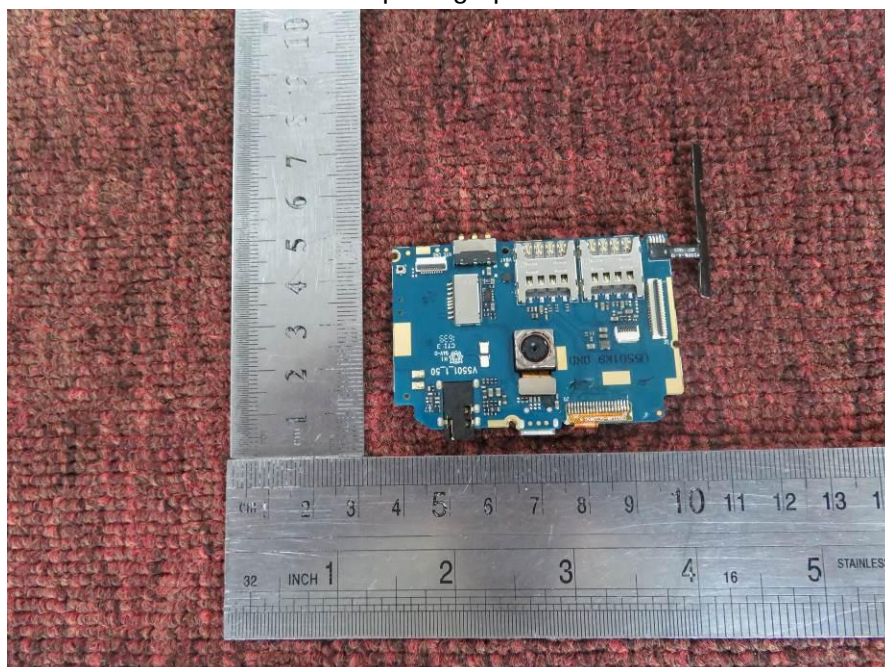

Internal photograph of EUT

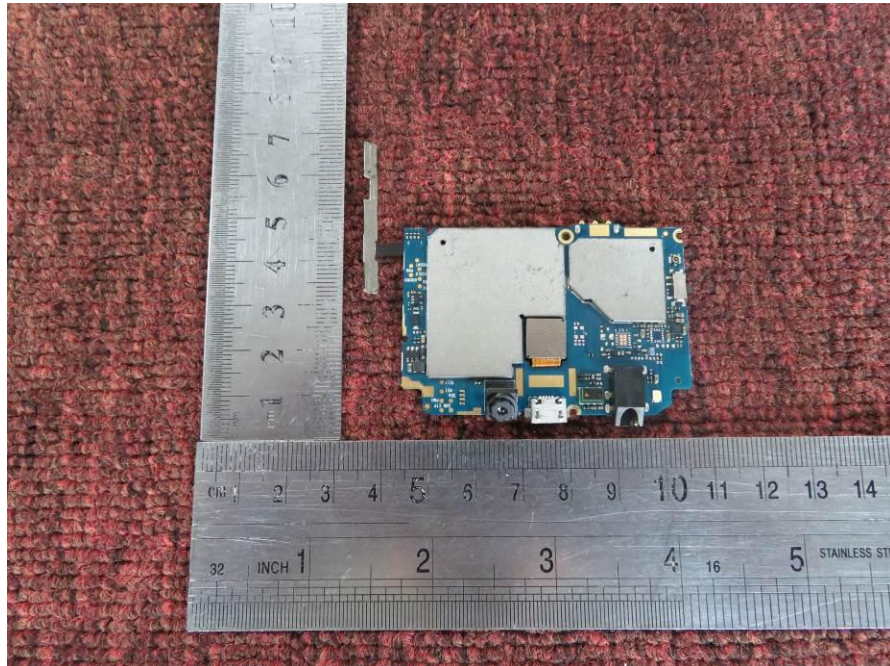

Internal photograph of EUT

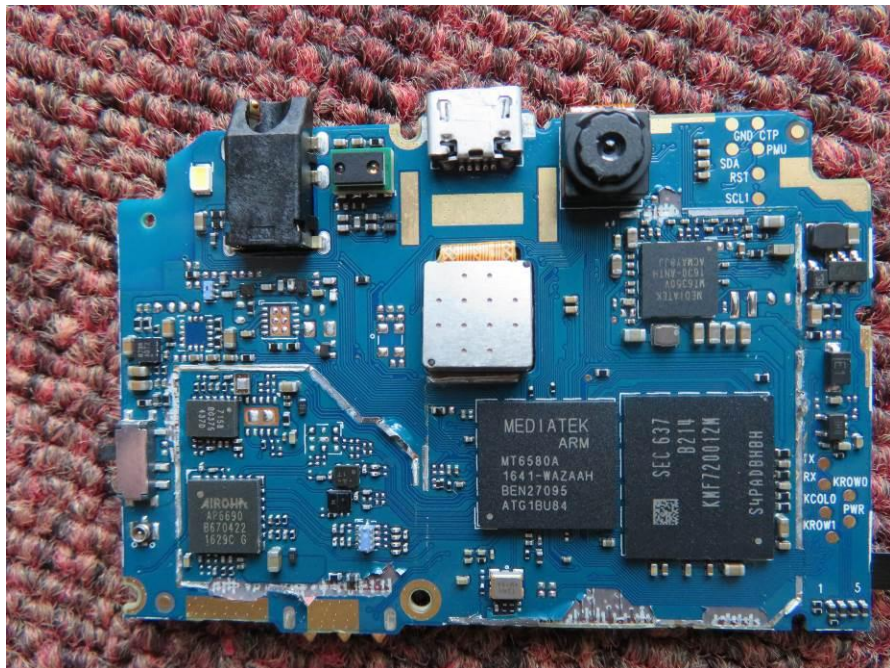

---END OF REPORT---