

FCC PART 15.247

## TEST REPORT

For

**Sino Electron Co., Ltd Zhejiang**

369# XinJiang Rd., Xinqian Street, Huangyan Taizhou, Zhejiang, China

**FCC ID: 2AM6T-COLORFOX-X1**

|                                                                                                                                                                                                                                                      |                                         |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|
| <b>Report Type:</b><br>Original Report                                                                                                                                                                                                               | <b>Product Type:</b><br>Smart Projector |
| <b>Test Engineer:</b> Ada Yu <i>Ada Yu</i>                                                                                                                                                                                                           |                                         |
| <b>Report Number:</b> RKSA170728001-00A                                                                                                                                                                                                              |                                         |
| <b>Report Date:</b> 2017-10-25                                                                                                                                                                                                                       |                                         |
| <b>Reviewed By:</b>                                                                                                                                                                                                                                  | Oscar Ye <i>Oscar Ye</i><br>RF Leader   |
| <b>Prepared By:</b><br>Bay Area Compliance Laboratories Corp. (Kunshan)<br>No.248 Chenghu Road, Kunshan, Jiangsu province, China<br>Tel: +86-0512-86175000<br>Fax: +86-0512-88934268<br><a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a> |                                         |

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## **TABLE OF CONTENTS**

|                                                                                      |           |
|--------------------------------------------------------------------------------------|-----------|
| <b>GENERAL INFORMATION.....</b>                                                      | <b>4</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....                             | 4         |
| OBJECTIVE .....                                                                      | 4         |
| RELATED SUBMITTAL(S)/GRANT(S).....                                                   | 4         |
| TEST METHODOLOGY .....                                                               | 4         |
| MEASUREMENT UNCERTAINTY .....                                                        | 5         |
| TEST FACILITY .....                                                                  | 5         |
| <b>SYSTEM TEST CONFIGURATION.....</b>                                                | <b>6</b>  |
| DESCRIPTION OF TEST CONFIGURATION .....                                              | 6         |
| EQUIPMENT MODIFICATIONS .....                                                        | 7         |
| EUT EXERCISE SOFTWARE .....                                                          | 7         |
| SUPPORT EQUIPMENT LIST AND DETAILS .....                                             | 9         |
| EXTERNAL I/O CABLE.....                                                              | 9         |
| BLOCK DIAGRAM OF TEST SETUP .....                                                    | 10        |
| <b>SUMMARY OF TEST RESULTS .....</b>                                                 | <b>12</b> |
| <b>TEST EQUIPMENT LIST .....</b>                                                     | <b>13</b> |
| <b>FCC§15.247 (i), §1.1310&amp; §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE).....</b> | <b>14</b> |
| APPLICABLE STANDARD .....                                                            | 14        |
| <b>FCC §15.203 - ANTENNA REQUIREMENT.....</b>                                        | <b>16</b> |
| APPLICABLE STANDARD .....                                                            | 16        |
| ANTENNA CONNECTOR CONSTRUCTION .....                                                 | 16        |
| <b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....</b>                           | <b>17</b> |
| APPLICABLE STANDARD .....                                                            | 17        |
| EUT SETUP.....                                                                       | 17        |
| EMI TEST RECEIVER SETUP.....                                                         | 17        |
| TEST PROCEDURE .....                                                                 | 17        |
| CORRECTED FACTOR & MARGIN CALCULATION .....                                          | 18        |
| TEST RESULTS SUMMARY .....                                                           | 18        |
| TEST DATA .....                                                                      | 18        |
| <b>FCC §15.209, §15.205 &amp; §15.247(d) - SPURIOUS EMISSIONS.....</b>               | <b>23</b> |
| APPLICABLE STANDARD .....                                                            | 23        |
| EUT SETUP .....                                                                      | 23        |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....                                    | 24        |
| TEST PROCEDURE .....                                                                 | 24        |
| CORRECTED AMPLITUDE & MARGIN CALCULATION .....                                       | 24        |
| TEST RESULTS SUMMARY .....                                                           | 24        |
| TEST DATA .....                                                                      | 25        |
| <b>FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....</b>                             | <b>38</b> |
| APPLICABLE STANDARD .....                                                            | 38        |
| TEST PROCEDURE .....                                                                 | 38        |
| TEST DATA .....                                                                      | 38        |
| <b>FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....</b>                      | <b>46</b> |

|                                                                       |           |
|-----------------------------------------------------------------------|-----------|
| APPLICABLE STANDARD .....                                             | 46        |
| TEST PROCEDURE .....                                                  | 46        |
| TEST DATA .....                                                       | 46        |
| <b>FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....</b> | <b>48</b> |
| APPLICABLE STANDARD .....                                             | 48        |
| TEST PROCEDURE .....                                                  | 48        |
| TEST DATA .....                                                       | 48        |
| <b>FCC §15.247(e) - POWER SPECTRAL DENSITY .....</b>                  | <b>53</b> |
| APPLICABLE STANDARD .....                                             | 53        |
| TEST PROCEDURE .....                                                  | 53        |
| TEST DATA .....                                                       | 53        |

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

|              |                                                      |
|--------------|------------------------------------------------------|
| Applicant    | Sino Electron Co., Ltd Zhejiang                      |
| Tested Model | COLORFOX X1                                          |
| Product Type | Smart Projector                                      |
| Dimension    | 155mm(L) × 155 mm(W) × 220 mm(H)                     |
| Power Supply | DC 15.12V from battery or DC 19V charging by adapter |

#### Adapter Information:

Model: FSP090-DIECN2

Input: AC100-240 V 50/60Hz 1.5A

Output: 19V, 4.74A

*\*All measurement and test data in this report was gathered from production sample serial number: 20170728001. (Assigned by the BACL. The EUT supplied by the applicant was received on 2017-07-28)*

### Objective

This report is prepared on behalf of Sino Electron Co., Ltd Zhejiang in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

N/A

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB558074 D01 DTS Meas Guidance v04.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

**Measurement Uncertainty**

| Item                               |            | Uncertainty |
|------------------------------------|------------|-------------|
| AC Power Lines Conducted Emissions |            | 3.19 dB     |
| RF conducted test with spectrum    |            | 0.9dB       |
| RF Output Power with Power meter   |            | 0.5dB       |
| Radiated emission                  | 30MHz~1GHz | 6.11dB      |
|                                    | 1GHz~6GHz  | 4.45dB      |
|                                    | 6GHz~18GHz | 5.23dB      |
| Occupied Bandwidth                 |            | 0.5kHz      |
| Temperature                        |            | 1.0°C       |
| Humidity                           |            | 6%          |

**Test Facility**

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road,Kunshan,Jiangsu province,China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

Channel list for 802.11b, 802.11g and 802.11n-HT20 mode:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 1       | 2412            | 8       | 2447            |
| 2       | 2417            | 9       | 2452            |
| 3       | 2422            | 10      | 2457            |
| 4       | 2427            | 11      | 2462            |
| 5       | 2432            | /       | /               |
| 6       | 2437            | /       | /               |
| 7       | 2442            | /       | /               |

EUT was tested with Channel 1, 6 and 11.

Channel list for BLE mode:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 0       | 2402            | 20      | 2442            |
| 1       | 2404            | ...     | ...             |
| ...     | ...             | ...     | ...             |
| ...     | ...             | ...     | ...             |
| ...     | ...             | 38      | 2478            |
| 19      | 2440            | 39      | 2480            |

EUT was tested with channel 0, 19 and 39.

## Equipment Modifications

No modification was made to the EUT tested.

## EUT Exercise Software


RF test tool: Ampak RFTesTool

Pre-scan with all the data rates, the below data rates are the worst case for Wi-Fi test.

| Mode         | Data rate | Power level |
|--------------|-----------|-------------|
| 802.11b      | 1 Mbps    | 19          |
| 802.11g      | 6 Mbps    | 20          |
| 802.11n-HT20 | MCS0      | 20          |
| BLE          | /         | 12          |

## Duty Cycle:

### 802.11b Mode Middle Channel

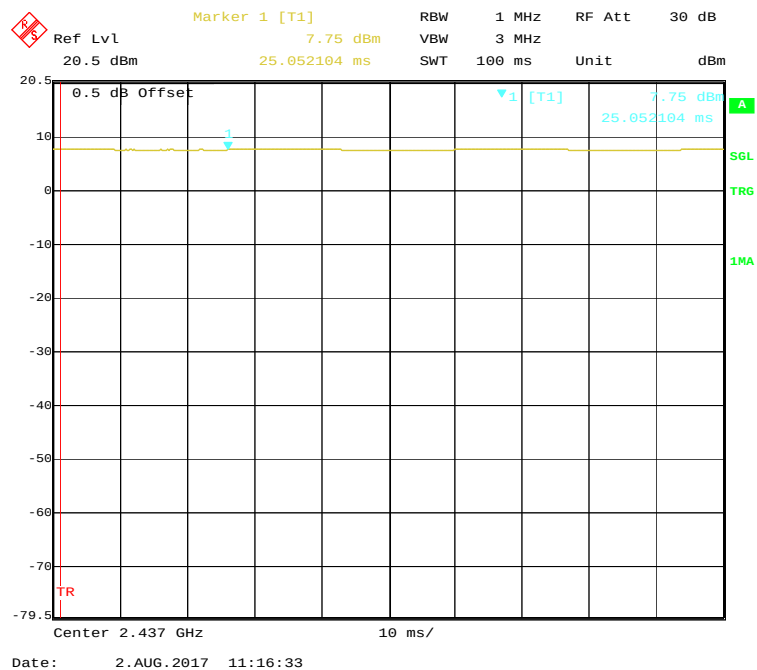

Ref Lvl 20.5 dBm RBW 1 MHz RF Att 30 dB  
 VBW 3 MHz  
 SWT 100 ms Unit dBm

Marker 1 [T1] 10.55 dBm  
 80.162325 ms

0.5 dB Offset

▼1 [T1] 180.162325 ms

10.55 dBm

TR

Center 2.437 GHz 10 ms/

Date: 2.AUG.2017 12:48:39

Marker 1 [T1]

RBW 1 MHz RF Att 30 dB

Ref Lvl 9.94 dBm

VBW 3 MHz

20.5 dBm 18.438878 ms

SWT 100 ms Unit dBm

0.5 dB Offset

▼1 [T1]

9.94 dBm


18.438878 ms

TR

Center 2.437 GHz 10 ms/

Date: 2.AUG.2017 14:48:36

## BLE Mode Middle Channel

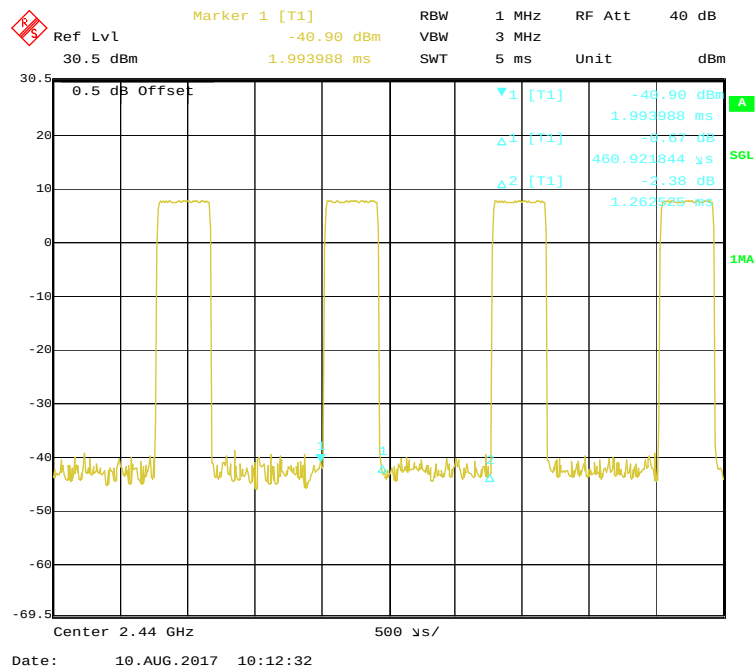

| Band         | Duty Cycle (%) | T(us) | 1/T(kHz) | VBW Setting | 10log(1/x) |
|--------------|----------------|-------|----------|-------------|------------|
| 802.11b      | 100            | /     | /        | 10Hz        | 0          |
| 802.11g      | 100            | /     | /        | 10Hz        | 0          |
| 802.11n-HT20 | 100            | /     | /        | 10Hz        | 0          |
| BLE          | 36.50          | 461   | 2.17     | 3kHz        | 4.38       |

**Note:** “x” means “duty cycle”.

## Support Equipment List and Details


| Manufacturer | Description | Model | Serial Number |
|--------------|-------------|-------|---------------|
| DELL         | Notebook    | GX620 | D65874152     |

## External I/O Cable


| Cable Description | Length (m) | From Port | To       |
|-------------------|------------|-----------|----------|
| USB Cable         | 0.8        | EUT       | Notebook |

## Block Diagram of Test Setup


For Conducted Emissions:

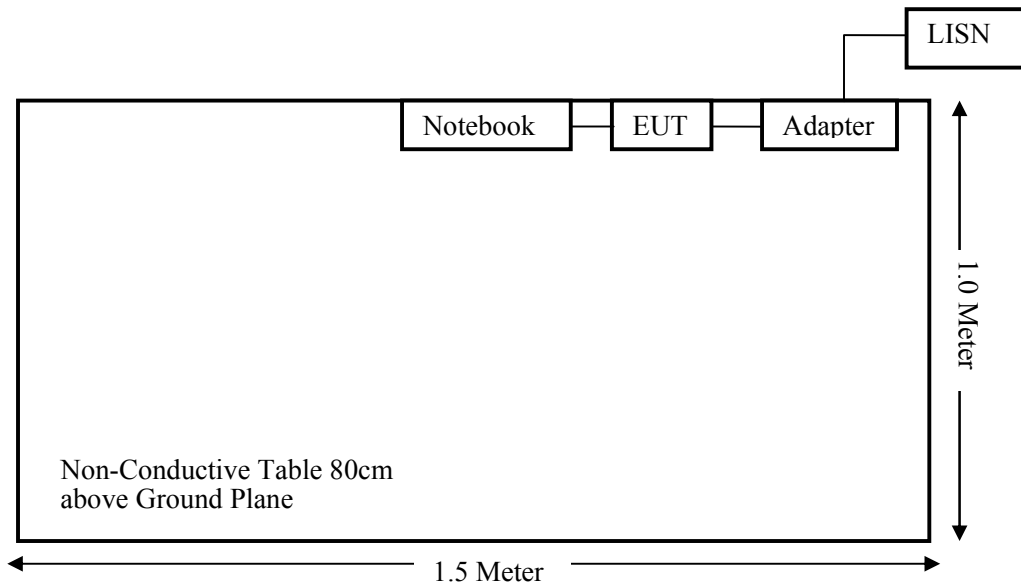

For Radiated Emissions (Below 1GHz):

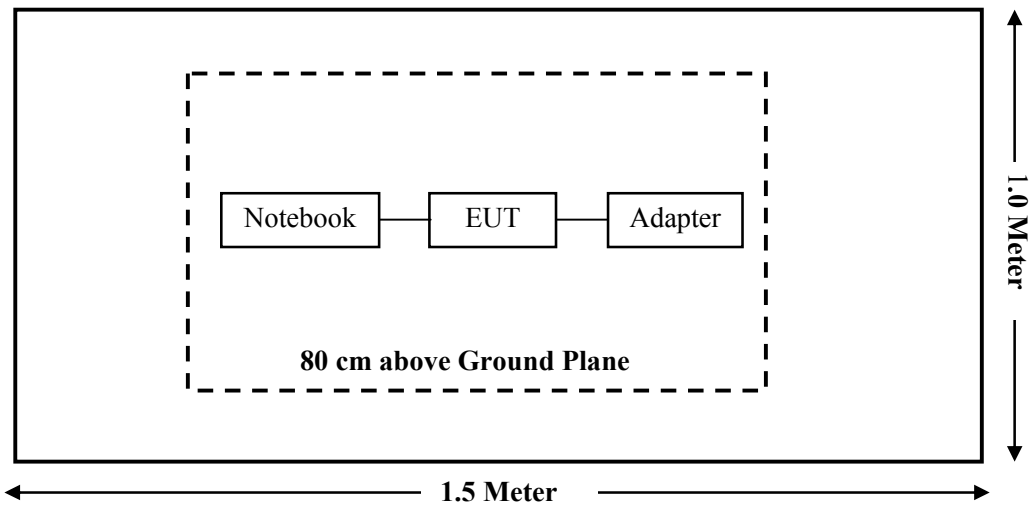

For Radiated Emissions (Above 1GHz):

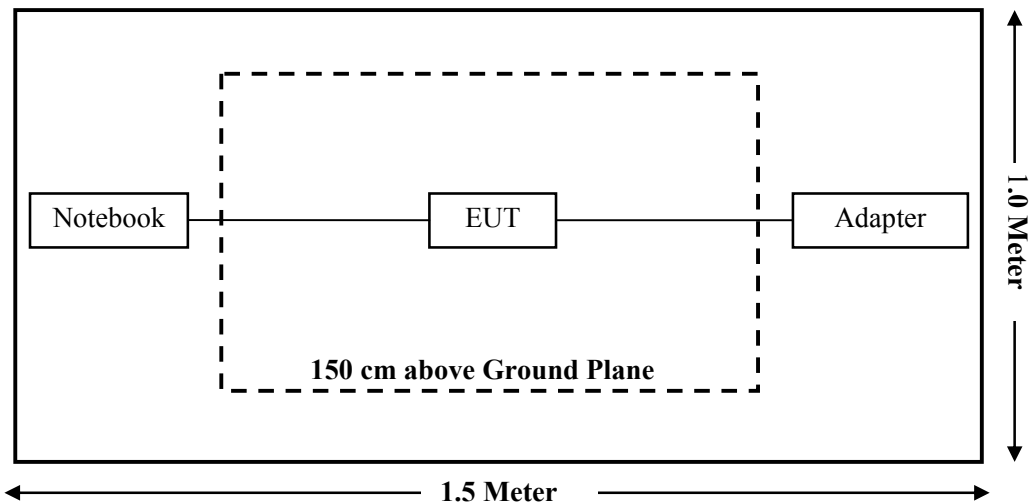

**SUMMARY OF TEST RESULTS**

| <b>FCC Rules</b>                         | <b>Description of Test</b>               | <b>Result</b> |
|------------------------------------------|------------------------------------------|---------------|
| §15.247 (i), §1.1307 (b) (1)&<br>§2.1091 | Maximum Permissible Exposure (MPE)       | Compliance    |
| §15.203                                  | Antenna Requirement                      | Compliance    |
| §15.207 (a)                              | AC Line Conducted Emissions              | Compliance    |
| §15.247(d)                               | Spurious Emissions at Antenna Port       | Compliance    |
| §15.205, §15.209,<br>§15.247(d)          | Spurious Emissions                       | Compliance    |
| §15.247 (a)(2)                           | 6 dB Emission Bandwidth                  | Compliance    |
| §15.247(b)(3)                            | Maximum Conducted Output Power           | Compliance    |
| §15.247(d)                               | 100 kHz Bandwidth of Frequency Band Edge | Compliance    |
| §15.247(e)                               | Power Spectral Density                   | Compliance    |

**TEST EQUIPMENT LIST**

| Manufacturer                   | Description        | Model           | Serial Number | Calibration Date | Calibration Due Date |
|--------------------------------|--------------------|-----------------|---------------|------------------|----------------------|
| <b>Radiated Emission Test</b>  |                    |                 |               |                  |                      |
| Rohde & Schwarz                | EMI Test Receiver  | ESCI            | 100195        | 2016-11-25       | 2017-11-24           |
| Rohde & Schwarz                | Signal Analyzer    | FSIQ26          | 100048        | 2016-11-25       | 2017-11-24           |
| Sunol Sciences                 | Broadband Antenna  | JB3             | A090314-2     | 2016-01-09       | 2019-01-08           |
| ETS                            | Horn Antenna       | 3115            | 6229          | 2016-01-11       | 2019-01-10           |
| ETS-LINDGREN                   | Horn Antenna       | 3116            | 00084159      | 2016-10-18       | 2019-10-17           |
| Sonoma Instrument              | Pre-amplifier      | 330             | 171377        | 2016-12-12       | 2017-12-11           |
| Narda                          | Pre-amplifier      | AFS42-00101800  | 2001270       | 2016-12-12       | 2017-12-11           |
| Heatsink Required              | Amplifier          | QLW-18405536-J0 | 15964001009   | 2016-12-12       | 2017-12-11           |
| R&S                            | Auto test Software | EMC32           | 100361        | /                | /                    |
| Haojintech                     | Coaxial Cable      | Cable-1         | 001           | 2016-12-12       | 2017-12-11           |
| Haojintech                     | Coaxial Cable      | Cable-2         | 002           | 2016-12-12       | 2017-12-11           |
| Haojintech                     | Coaxial Cable      | Cable-3         | 003           | 2016-12-12       | 2017-12-11           |
| MICRO-COAX                     | Coaxial Cable      | Cable-4         | 004           | 2016-12-12       | 2017-12-11           |
| MICRO-COAX                     | Coaxial Cable      | Cable-5         | 005           | 2016-12-12       | 2017-12-11           |
| <b>RF Conducted Test</b>       |                    |                 |               |                  |                      |
| Rohde & Schwarz                | Signal Analyzer    | FSIQ26          | 836131/009    | 2016-09-21       | 2017-09-20           |
| Agilent                        | Power Meter        | N1912A          | MY5000492     | 2016-11-18       | 2017-11-17           |
| Agilent                        | Power Sensor       | N1921A          | MY54210024    | 2016-11-18       | 2017-11-17           |
| Sino                           | RF Cable           | /               | /             | 2017-08-02       | 2018-08-01           |
| <b>Conducted Emission Test</b> |                    |                 |               |                  |                      |
| Rohde & Schwarz                | EMI Test Receiver  | ESCI            | 100195        | 2016-11-25       | 2017-11-24           |
| Rohde & Schwarz                | LISN               | ESH3-Z5         | 862770/011    | 2016-10-10       | 2017-10-09           |
| ROHDE&SCHWARZ                  | LISN               | ENV216          | 3560655016    | 2016-11-25       | 2017-11-24           |
| Rohde & Schwarz                | CE Test Software   | EMC 32          | 100357        | /                | /                    |
| MICRO-COAX                     | Coaxial Cable      | Cable-6         | 006           | 2016-09-08       | 2017-09-07           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## **FCC§15.247 (i), §1.1310& §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)**

### **Applicable Standard**

According to subpart 15.247(i)and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

| <b>(B) Limits for General Population/Uncontrolled Exposure</b> |                                      |                                      |                                          |                                 |
|----------------------------------------------------------------|--------------------------------------|--------------------------------------|------------------------------------------|---------------------------------|
| <b>Frequency Range (MHz)</b>                                   | <b>Electric Field Strength (V/m)</b> | <b>Magnetic Field Strength (A/m)</b> | <b>Power Density (mW/cm<sup>2</sup>)</b> | <b>Averaging Time (minutes)</b> |
| 0.3-1.34                                                       | 614                                  | 1.63                                 | *(100)                                   | 30                              |
| 1.34-30                                                        | 824/f                                | 2.19/f                               | *(180/f <sup>2</sup> )                   | 30                              |
| 30-300                                                         | 27.5                                 | 0.073                                | 0.2                                      | 30                              |
| 300-1500                                                       | /                                    |                                      | f/1500                                   | 30                              |
| 1500-100,000                                                   | /                                    |                                      | 1.0                                      | 30                              |

f = frequency in MHz; \* = Plane-wave equivalent power density;  
According to §1.1310 and §2.1091 RF exposure is calculated.

### **Calculated Formulary:**

Predication of MPE limit at a given distance

$S = PG/4 \pi R^2$  = power density (in appropriate units, e.g. mW/cm<sup>2</sup>);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

**Calculated Data:**

| Mode         | Frequency Range | Antenna Gain |           | Target Output Power |        | Evaluation Distance | Power Density         | MPE Limit             |
|--------------|-----------------|--------------|-----------|---------------------|--------|---------------------|-----------------------|-----------------------|
|              | (MHz)           | (dBi)        | (numeric) | (dBm)               | (mW)   | (cm)                | (mW/cm <sup>2</sup> ) | (mW/cm <sup>2</sup> ) |
| 802.11b      | 2412~2462       | 2.00         | 1.58      | 17.00               | 50.12  | 20                  | 0.0158                | 1.0                   |
| 802.11g      |                 | 2.00         | 1.58      | 21.00               | 125.89 | 20                  | 0.0397                | 1.0                   |
| 802.11n-HT20 |                 | 2.00         | 1.58      | 20.00               | 100.00 | 20                  | 0.0315                | 1.0                   |
| BLE          | 2402-2480       | 2.00         | 1.58      | 12.00               | 15.85  | 20                  | 0.0050                | 1.0                   |

**Note:**

1. For the above target output power are all declared by the manufacturer.
2. The EUT has the BT, 2.4GHz Wi-Fi functions, they can transmitting simultaneously. According to KDB 447498 D01 General RF Exposure Guidance v06 and test data, the BT and 802.11g mode for 2.4G Wi-Fi are the worst case, their sum of MPE ratio is 0.0447, which is less than 1.0, so the collocation exposure exclusion applies.

**Result:** The device meet FCC MPE at 20 cm distance.

---

## **FCC §15.203 - ANTENNA REQUIREMENT**

---

### **Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
  - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **Antenna Connector Construction**

The EUT has an integrated antenna arrangement for Wi-Fi & BLE, which the antenna gain is 2 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


**Result:** Compliance.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC§15.207

### EUT Setup

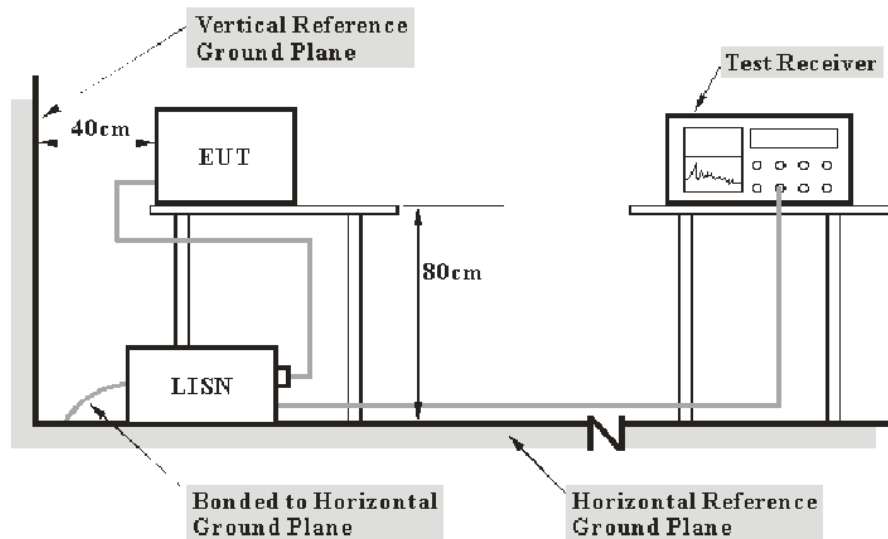

Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range  | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz  |

### Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

### Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

### Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

### Test Data

#### Environmental Conditions


|                           |          |
|---------------------------|----------|
| <b>Temperature:</b>       | 23.1 °C  |
| <b>Relative Humidity:</b> | 55 %     |
| <b>ATM Pressure:</b>      | 101.1kPa |

*The testing was performed by Ada Yu on 2017-08-07.*

*EUT operation mode: Transmitting*

**Wi-Fi Mode:****AC 120V/60 Hz, Line**


Full Spectrum

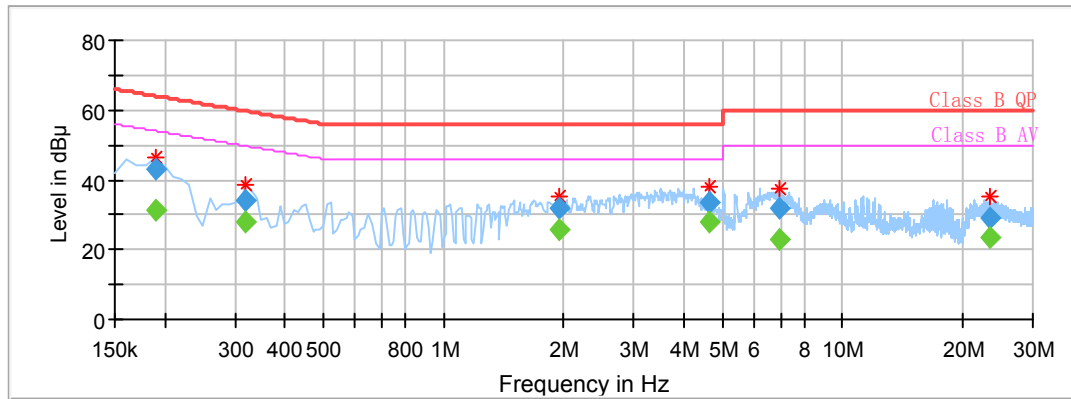

| Frequency (MHz) | QuasiPeak (dBμV) | Average (dB μ V) | Bandwidth (kHz) | Line | Limit (dBμV) | Margin (dB) | Corr. (dB) | Comment    |
|-----------------|------------------|------------------|-----------------|------|--------------|-------------|------------|------------|
| 0.190000        | ---              | 31.36            | 9.000           | L1   | 54.04        | 22.68       | 10.2       | Compliance |
| 0.190000        | 43.18            | ---              | 9.000           | L1   | 64.04        | 20.86       | 10.2       | Compliance |
| 0.320000        | ---              | 27.95            | 9.000           | L1   | 49.71        | 21.76       | 10.1       | Compliance |
| 0.320000        | 33.86            | ---              | 9.000           | L1   | 59.71        | 25.85       | 10.1       | Compliance |
| 1.940000        | ---              | 25.71            | 9.000           | L1   | 46.00        | 20.29       | 9.9        | Compliance |
| 1.940000        | 32.07            | ---              | 9.000           | L1   | 56.00        | 23.93       | 9.9        | Compliance |
| 4.650000        | ---              | 28.00            | 9.000           | L1   | 46.00        | 18.00       | 9.9        | Compliance |
| 4.650000        | 33.56            | ---              | 9.000           | L1   | 56.00        | 22.44       | 9.9        | Compliance |
| 6.970000        | ---              | 22.85            | 9.000           | L1   | 50.00        | 27.15       | 10.0       | Compliance |
| 6.970000        | 31.67            | ---              | 9.000           | L1   | 60.00        | 28.33       | 10.0       | Compliance |
| 23.460000       | ---              | 23.47            | 9.000           | L1   | 50.00        | 26.53       | 10.2       | Compliance |
| 23.460000       | 28.85            | ---              | 9.000           | L1   | 60.00        | 31.15       | 10.2       | Compliance |

**AC 120V/60 Hz, Neutral**


Full Spectrum

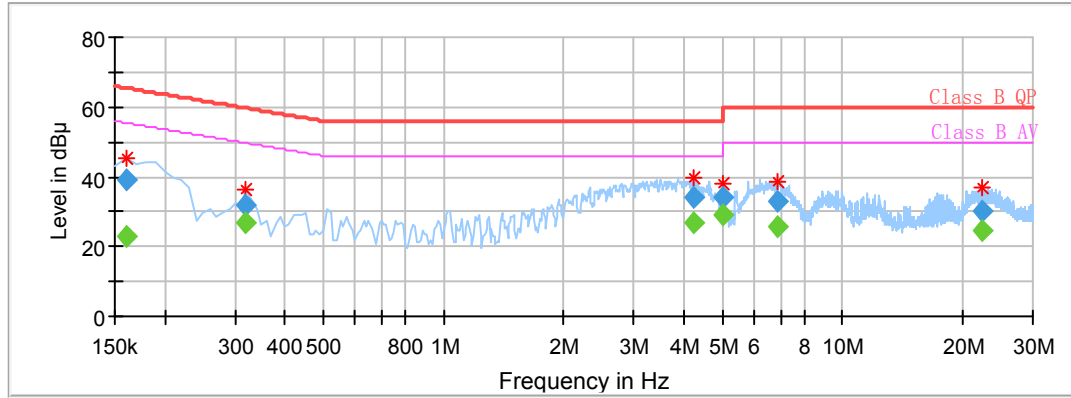

| Frequency (MHz) | QuasiPeak (dBμV) | Average (dB μ V) | Bandwidth (kHz) | Line | Limit (dBμV) | Margin (dB) | Corr. (dB) | Comment    |
|-----------------|------------------|------------------|-----------------|------|--------------|-------------|------------|------------|
| 0.160000        | ---              | 22.97            | 9.000           | N    | 55.46        | 32.49       | 10.1       | Compliance |
| 0.160000        | 38.89            | ---              | 9.000           | N    | 65.46        | 26.57       | 10.1       | Compliance |
| 0.320000        | ---              | 26.76            | 9.000           | N    | 49.71        | 22.95       | 10.1       | Compliance |
| 0.320000        | 31.99            | ---              | 9.000           | N    | 59.71        | 27.72       | 10.1       | Compliance |
| 4.260000        | ---              | 26.75            | 9.000           | N    | 46.00        | 19.25       | 9.9        | Compliance |
| 4.260000        | 34.17            | ---              | 9.000           | N    | 56.00        | 21.83       | 9.9        | Compliance |
| 5.040000        | ---              | 29.13            | 9.000           | N    | 50.00        | 20.87       | 9.9        | Compliance |
| 5.040000        | 34.40            | ---              | 9.000           | N    | 60.00        | 25.60       | 9.9        | Compliance |
| 6.910000        | ---              | 25.84            | 9.000           | N    | 50.00        | 24.16       | 9.9        | Compliance |
| 6.910000        | 33.14            | ---              | 9.000           | N    | 60.00        | 26.86       | 9.9        | Compliance |
| 22.320000       | ---              | 24.66            | 9.000           | N    | 50.00        | 25.34       | 10.2       | Compliance |
| 22.320000       | 30.14            | ---              | 9.000           | N    | 60.00        | 29.86       | 10.2       | Compliance |

**BLE Mode:****AC 120V/60 Hz, Line**


Full Spectrum

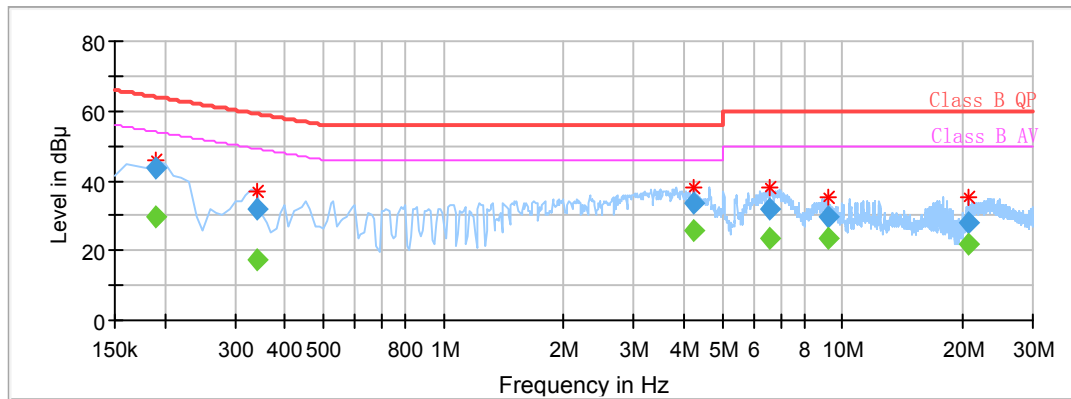

| Frequency (MHz) | QuasiPeak (dBμV) | Average (dB μ V) | Bandwidth (kHz) | Line | Limit (dBμV) | Margin (dB) | Corr. (dB) | Comment    |
|-----------------|------------------|------------------|-----------------|------|--------------|-------------|------------|------------|
| 0.190000        | ---              | 29.60            | 9.000           | L1   | 54.04        | 24.44       | 10.2       | Compliance |
| 0.190000        | 43.58            | ---              | 9.000           | L1   | 64.04        | 20.46       | 10.2       | Compliance |
| 0.340000        | ---              | 17.17            | 9.000           | L1   | 49.20        | 32.03       | 10.1       | Compliance |
| 0.340000        | 31.98            | ---              | 9.000           | L1   | 59.20        | 27.22       | 10.1       | Compliance |
| 4.240000        | ---              | 25.80            | 9.000           | L1   | 46.00        | 20.20       | 9.9        | Compliance |
| 4.240000        | 33.30            | ---              | 9.000           | L1   | 56.00        | 22.70       | 9.9        | Compliance |
| 6.580000        | ---              | 23.70            | 9.000           | L1   | 50.00        | 26.30       | 10.0       | Compliance |
| 6.580000        | 32.10            | ---              | 9.000           | L1   | 60.00        | 27.90       | 10.0       | Compliance |
| 9.240000        | ---              | 23.49            | 9.000           | L1   | 50.00        | 26.51       | 10.0       | Compliance |
| 9.240000        | 29.87            | ---              | 9.000           | L1   | 60.00        | 30.13       | 10.0       | Compliance |
| 20.780000       | ---              | 21.84            | 9.000           | L1   | 50.00        | 28.16       | 10.2       | Compliance |
| 20.780000       | 28.08            | ---              | 9.000           | L1   | 60.00        | 31.92       | 10.2       | Compliance |

**AC 120V/60 Hz, Neutral**

Full Spectrum

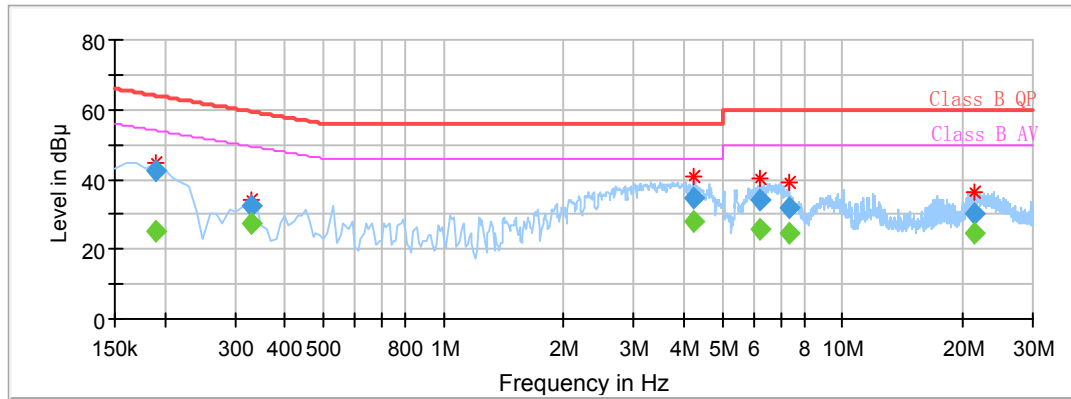

| Frequency (MHz) | QuasiPeak (dBμV) | Average (dB μ V) | Bandwidth (kHz) | Line | Limit (dBμV) | Margin (dB) | Corr. (dB) | Comment    |
|-----------------|------------------|------------------|-----------------|------|--------------|-------------|------------|------------|
| 0.190000        | ---              | 25.03            | 9.000           | N    | 54.04        | 29.01       | 10.1       | Compliance |
| 0.190000        | 42.37            | ---              | 9.000           | N    | 64.04        | 21.67       | 10.1       | Compliance |
| 0.330000        | ---              | 27.38            | 9.000           | N    | 49.45        | 22.07       | 10.1       | Compliance |
| 0.330000        | 32.47            | ---              | 9.000           | N    | 59.45        | 26.98       | 10.1       | Compliance |
| 4.260000        | ---              | 27.78            | 9.000           | N    | 46.00        | 18.22       | 9.9        | Compliance |
| 4.260000        | 34.84            | ---              | 9.000           | N    | 56.00        | 21.16       | 9.9        | Compliance |
| 6.200000        | ---              | 25.93            | 9.000           | N    | 50.00        | 24.07       | 9.9        | Compliance |
| 6.200000        | 34.40            | ---              | 9.000           | N    | 60.00        | 25.60       | 9.9        | Compliance |
| 7.360000        | ---              | 24.63            | 9.000           | N    | 50.00        | 25.37       | 9.9        | Compliance |
| 7.360000        | 31.98            | ---              | 9.000           | N    | 60.00        | 28.02       | 9.9        | Compliance |
| 21.330000       | ---              | 24.75            | 9.000           | N    | 50.00        | 25.25       | 10.2       | Compliance |
| 21.330000       | 30.47            | ---              | 9.000           | N    | 60.00        | 29.53       | 10.2       | Compliance |

**Note:**


- 1) Corr.=LISN VDF (Voltage Division Factor) + Cable Loss
- 2) Corrected Amplitude = Reading + Corr.
- 3) Margin = Limit –Corrected Amplitude

**FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS****Applicable Standard**


FCC §15.247 (d); §15.209; §15.205;

**EUT Setup**

**Below 1 GHz:**

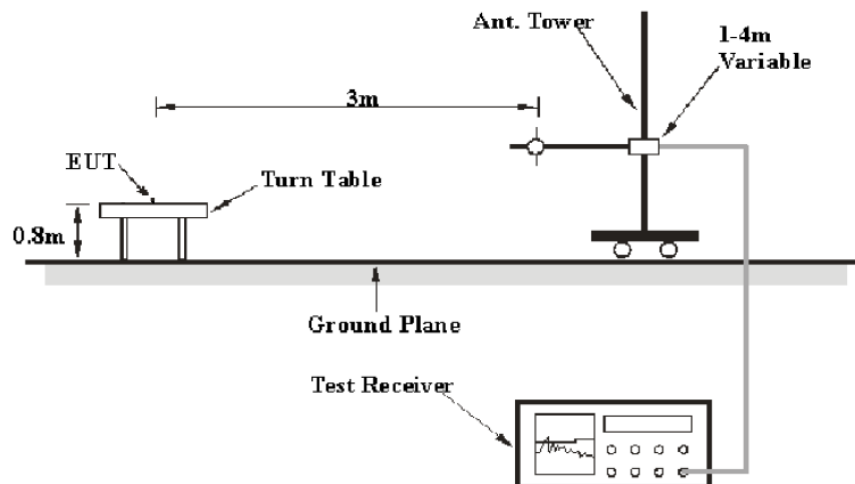

**Above 1GHz:**

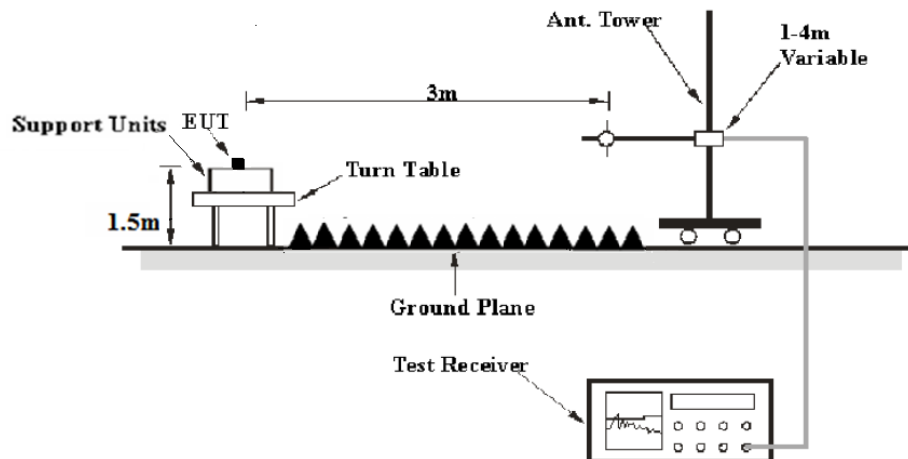

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

## EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| Frequency Range   | RBW     | Video B/W | IF B/W  | Detector |
|-------------------|---------|-----------|---------|----------|
| 30 MHz – 1000 MHz | 120 kHz | 300 kHz   | 120 kHz | QP       |

| Frequency Range | Item     | RBW  | Video B/W | Duty cycle | Detector |
|-----------------|----------|------|-----------|------------|----------|
| 1GHz – 25GHz    | PK Value | 1MHz | 3 MHz     | Any        | PK       |
|                 |          | 1MHz | 10 Hz     | >98%       | PK       |
|                 | AV Value | 1MHz | 1/T       | <98%       |          |

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak detection mode for frequencies above 1 GHz.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

**Test Data****Environmental Conditions**

|                           |          |
|---------------------------|----------|
| <b>Temperature:</b>       | 24.1 °C  |
| <b>Relative Humidity:</b> | 54 %     |
| <b>ATM Pressure:</b>      | 101.2kPa |

The testing was performed by Ada Yu on 2017-08-02&2017-08-07.

EUT operation mode: Transmitting (Scan with X-Axis, Y-Axis and Z-Axis position, the worst case was recorded)

**30MHz-25GHz****802.11b Mode:**

| Frequency<br>(MHz)     | Receiver          |                              | Turntable<br>Degree | Rx Antenna     |                | Corrected<br>Factor<br>(dB) | Corrected<br>Amplitude<br>(dBμV/m) | FCC Part<br>15.247/205/209 |                |
|------------------------|-------------------|------------------------------|---------------------|----------------|----------------|-----------------------------|------------------------------------|----------------------------|----------------|
|                        | Reading<br>(dBμV) | Detector<br>(PK/QP<br>/Ave.) |                     | Height<br>(cm) | Polar<br>(H/V) |                             |                                    | Limit<br>(dBμV/m)          | Margin<br>(dB) |
| Low Channel (2412 MHz) |                   |                              |                     |                |                |                             |                                    |                            |                |
| 208.84                 | 41.73             | QP                           | 226                 | 165            | H              | -1.40                       | 40.33                              | 43.5                       | 3.17           |
| 2412.00                | 106.20            | PK                           | 126                 | 222            | V              | -4.13                       | 102.07                             | /                          | /              |
| 2412.00                | 100.73            | Ave                          | 126                 | 222            | V              | -4.13                       | 96.60                              | /                          | /              |
| 2412.00                | 111.48            | PK                           | 102                 | 223            | H              | -4.13                       | 107.35                             | /                          | /              |
| 2412.00                | 105.44            | Ave                          | 102                 | 223            | H              | -4.13                       | 101.31                             | /                          | /              |
| 2390.00                | 48.52             | PK                           | 86                  | 163            | H              | -4.19                       | 44.33                              | 74                         | 29.67          |
| 2390.00                | 40.13             | Ave                          | 86                  | 163            | H              | -4.19                       | 35.94                              | 54                         | 18.06          |
| 3917.51                | 43.26             | PK                           | 291                 | 239            | V              | 1.98                        | 45.24                              | 74                         | 28.76          |
| 3917.51                | 34.15             | Ave                          | 291                 | 239            | V              | 1.98                        | 36.13                              | 54                         | 17.87          |
| 1735.23                | 44.58             | PK                           | 257                 | 136            | V              | -6.54                       | 38.04                              | 74                         | 35.96          |
| 1735.23                | 36.72             | Ave                          | 257                 | 136            | V              | -6.54                       | 30.18                              | 54                         | 23.82          |
| 4824.00                | 36.98             | PK                           | 57                  | 132            | H              | 4.19                        | 41.17                              | 74                         | 32.83          |
| 4824.00                | 29.73             | Ave                          | 57                  | 132            | H              | 4.19                        | 33.92                              | 54                         | 20.08          |
| 7236.00                | 29.16             | PK                           | 262                 | 218            | H              | 11.50                       | 40.66                              | 74                         | 33.34          |
| 7236.00                | 19.51             | Ave                          | 262                 | 218            | H              | 11.50                       | 31.01                              | 54                         | 22.99          |

| Frequency<br>(MHz)        | Receiver          |                              | Turntable<br>Degree | Rx Antenna     |                | Corrected<br>Factor<br>(dB) | Corrected<br>Amplitude<br>(dBµV/m) | FCC Part<br>15.247/205/209 |                |
|---------------------------|-------------------|------------------------------|---------------------|----------------|----------------|-----------------------------|------------------------------------|----------------------------|----------------|
|                           | Reading<br>(dBµV) | Detector<br>(PK/QP/<br>Ave.) |                     | Height<br>(cm) | Polar<br>(H/V) |                             |                                    | Limit<br>(dBµV/m)          | Margin<br>(dB) |
| Middle Channel (2437 MHz) |                   |                              |                     |                |                |                             |                                    |                            |                |
| 208.84                    | 40.98             | QP                           | 148                 | 197            | H              | -1.40                       | 39.58                              | 43.5                       | 3.92           |
| 2437.00                   | 106.13            | PK                           | 182                 | 198            | V              | -4.07                       | 102.06                             | /                          | /              |
| 2437.00                   | 100.72            | Ave                          | 182                 | 198            | V              | -4.07                       | 96.65                              | /                          | /              |
| 2437.00                   | 111.50            | PK                           | 243                 | 128            | H              | -4.07                       | 107.43                             | /                          | /              |
| 2437.00                   | 105.38            | Ave                          | 243                 | 128            | H              | -4.07                       | 101.31                             | /                          | /              |
| 1365.79                   | 43.26             | PK                           | 164                 | 176            | H              | -8.73                       | 34.53                              | 74                         | 39.47          |
| 1365.79                   | 33.56             | Ave                          | 164                 | 176            | H              | -8.73                       | 24.83                              | 54                         | 29.17          |
| 3725.61                   | 44.17             | PK                           | 339                 | 122            | V              | 1.22                        | 45.39                              | 74                         | 28.61          |
| 3725.61                   | 34.28             | Ave                          | 339                 | 122            | V              | 1.22                        | 35.50                              | 54                         | 18.50          |
| 4874.00                   | 39.16             | PK                           | 233                 | 169            | H              | 4.32                        | 43.48                              | 74                         | 30.52          |
| 4874.00                   | 29.07             | Ave                          | 233                 | 169            | H              | 4.32                        | 33.39                              | 54                         | 20.61          |
| 6198.35                   | 43.21             | PK                           | 45                  | 140            | V              | 7.92                        | 51.13                              | 74                         | 22.87          |
| 6198.35                   | 33.62             | Ave                          | 45                  | 140            | V              | 7.92                        | 41.54                              | 54                         | 12.46          |
| 7311.00                   | 29.10             | PK                           | 181                 | 156            | H              | 11.62                       | 40.72                              | 74                         | 33.28          |
| 7311.00                   | 19.49             | Ave                          | 181                 | 156            | H              | 11.62                       | 31.11                              | 54                         | 22.89          |

| Frequency<br>(MHz)      | Receiver          |                              | Turntable<br>Degree | Rx Antenna     |                | Corrected<br>Factor<br>(dB) | Corrected<br>Amplitude<br>(dBμV/m) | FCC Part<br>15.247/205/209 |                |
|-------------------------|-------------------|------------------------------|---------------------|----------------|----------------|-----------------------------|------------------------------------|----------------------------|----------------|
|                         | Reading<br>(dBμV) | Detector<br>(PK/QP/<br>Ave.) |                     | Height<br>(cm) | Polar<br>(H/V) |                             |                                    | Limit<br>(dBμV/m)          | Margin<br>(dB) |
| High Channel (2462 MHz) |                   |                              |                     |                |                |                             |                                    |                            |                |
| 208.84                  | 41.56             | QP                           | 134                 | 229            | H              | -1.40                       | 40.16                              | 43.5                       | 3.34           |
| 2462.00                 | 106.14            | PK                           | 157                 | 179            | V              | -4.00                       | 102.14                             | /                          | /              |
| 2462.00                 | 100.79            | Ave                          | 157                 | 179            | V              | -4.00                       | 96.79                              | /                          | /              |
| 2462.00                 | 111.44            | PK                           | 347                 | 154            | H              | -4.00                       | 107.44                             | /                          | /              |
| 2462.00                 | 105.47            | Ave                          | 347                 | 154            | H              | -4.00                       | 101.47                             | /                          | /              |
| 2483.50                 | 44.59             | PK                           | 324                 | 158            | H              | -3.94                       | 40.65                              | 74                         | 33.35          |
| 2483.50                 | 38.27             | Ave                          | 324                 | 158            | H              | -3.94                       | 34.33                              | 54                         | 19.67          |
| 1735.21                 | 43.15             | PK                           | 301                 | 166            | V              | -6.54                       | 36.61                              | 74                         | 37.39          |
| 1735.21                 | 36.73             | Ave                          | 301                 | 166            | V              | -6.54                       | 30.19                              | 54                         | 23.81          |
| 4924.00                 | 40.18             | PK                           | 70                  | 122            | H              | 4.45                        | 44.63                              | 74                         | 29.37          |
| 4924.00                 | 29.48             | Ave                          | 70                  | 122            | H              | 4.45                        | 33.93                              | 54                         | 20.07          |
| 6410.29                 | 43.15             | PK                           | 342                 | 184            | H              | 8.87                        | 52.02                              | 74                         | 21.98          |
| 6410.29                 | 38.55             | Ave                          | 342                 | 184            | H              | 8.87                        | 47.42                              | 54                         | 6.58           |
| 7386.00                 | 29.18             | PK                           | 199                 | 139            | H              | 11.74                       | 40.92                              | 74                         | 33.08          |
| 7386.00                 | 19.47             | Ave                          | 199                 | 139            | H              | 11.74                       | 31.21                              | 54                         | 22.79          |

**802.11g Mode:**

| Frequency<br>(MHz)     | Receiver          |                              | Turntable<br>Degree | Rx Antenna     |                | Corrected<br>Factor<br>(dB) | Corrected<br>Amplitude<br>(dBµV/m) | FCC Part<br>15.247/205/209 |                |
|------------------------|-------------------|------------------------------|---------------------|----------------|----------------|-----------------------------|------------------------------------|----------------------------|----------------|
|                        | Reading<br>(dBµV) | Detector<br>(PK/QP/<br>Ave.) |                     | Height<br>(cm) | Polar<br>(H/V) |                             |                                    | Limit<br>(dBµV/m)          | Margin<br>(dB) |
| Low Channel (2412 MHz) |                   |                              |                     |                |                |                             |                                    |                            |                |
| 216.37                 | 31.53             | QP                           | 337                 | 159            | H              | -1.40                       | 30.13                              | 46                         | 15.87          |
| 2412.00                | 106.78            | PK                           | 206                 | 223            | V              | -4.13                       | 102.65                             | /                          | /              |
| 2412.00                | 101.14            | Ave                          | 206                 | 223            | V              | -4.13                       | 97.01                              | /                          | /              |
| 2412.00                | 112.02            | PK                           | 180                 | 178            | H              | -4.13                       | 107.89                             | /                          | /              |
| 2412.00                | 105.89            | Ave                          | 180                 | 178            | H              | -4.13                       | 101.76                             | /                          | /              |
| 2390.00                | 48.57             | PK                           | 195                 | 101            | H              | -4.19                       | 44.38                              | 74                         | 29.62          |
| 2390.00                | 40.15             | Ave                          | 195                 | 101            | H              | -4.19                       | 35.96                              | 54                         | 18.04          |
| 3621.08                | 43.29             | PK                           | 40                  | 161            | V              | 0.80                        | 44.09                              | 74                         | 29.91          |
| 3621.08                | 34.08             | Ave                          | 40                  | 161            | V              | 0.80                        | 34.88                              | 54                         | 19.12          |
| 1604.24                | 44.64             | PK                           | 33                  | 213            | V              | -7.19                       | 37.45                              | 74                         | 36.55          |
| 1604.24                | 36.81             | Ave                          | 33                  | 213            | V              | -7.19                       | 29.62                              | 54                         | 24.38          |
| 4824.00                | 36.93             | PK                           | 152                 | 244            | H              | 4.19                        | 41.12                              | 74                         | 32.88          |
| 4824.00                | 29.72             | Ave                          | 152                 | 244            | H              | 4.19                        | 33.91                              | 54                         | 20.09          |
| 7236.00                | 29.11             | PK                           | 11                  | 208            | H              | 11.50                       | 40.61                              | 74                         | 33.39          |
| 7236.00                | 19.49             | Ave                          | 11                  | 208            | H              | 11.50                       | 30.99                              | 54                         | 23.01          |

| Frequency<br>(MHz)        | Receiver          |                              | Turntable<br>Degree | Rx Antenna     |                | Corrected<br>Factor<br>(dB) | Corrected<br>Amplitude<br>(dBμV/m) | FCC Part<br>15.247/205/209 |                |
|---------------------------|-------------------|------------------------------|---------------------|----------------|----------------|-----------------------------|------------------------------------|----------------------------|----------------|
|                           | Reading<br>(dBμV) | Detector<br>(PK/QP/<br>Ave.) |                     | Height<br>(cm) | Polar<br>(H/V) |                             |                                    | Limit<br>(dBμV/m)          | Margin<br>(dB) |
| Middle Channel (2437 MHz) |                   |                              |                     |                |                |                             |                                    |                            |                |
| 216.37                    | 31.53             | QP                           | 25                  | 142            | H              | -1.40                       | 30.13                              | 46                         | 15.87          |
| 2437.00                   | 107.15            | PK                           | 27                  | 216            | V              | -4.07                       | 103.08                             | /                          | /              |
| 2437.00                   | 101.60            | Ave                          | 27                  | 216            | V              | -4.07                       | 97.53                              | /                          | /              |
| 2437.00                   | 112.34            | PK                           | 134                 | 137            | H              | -4.07                       | 108.27                             | /                          | /              |
| 2437.00                   | 106.35            | Ave                          | 134                 | 137            | H              | -4.07                       | 102.28                             | /                          | /              |
| 1604.24                   | 43.23             | PK                           | 86                  | 189            | H              | -7.19                       | 36.04                              | 74                         | 37.96          |
| 1604.24                   | 33.53             | Ave                          | 86                  | 189            | H              | -7.19                       | 26.34                              | 54                         | 27.66          |
| 3211.56                   | 44.11             | PK                           | 315                 | 159            | V              | -0.48                       | 43.63                              | 74                         | 30.37          |
| 3211.56                   | 34.28             | Ave                          | 315                 | 159            | V              | -0.48                       | 33.80                              | 54                         | 20.20          |
| 4874.00                   | 39.13             | PK                           | 295                 | 135            | H              | 4.32                        | 43.45                              | 74                         | 30.55          |
| 4874.00                   | 28.99             | Ave                          | 295                 | 135            | H              | 4.32                        | 33.31                              | 54                         | 20.69          |
| 6451.33                   | 43.30             | PK                           | 54                  | 245            | V              | 9.06                        | 52.36                              | 74                         | 21.64          |
| 6451.33                   | 33.55             | Ave                          | 54                  | 245            | V              | 9.06                        | 42.61                              | 54                         | 11.39          |
| 7311.00                   | 29.10             | PK                           | 119                 | 128            | H              | 11.62                       | 40.72                              | 74                         | 33.28          |
| 7311.00                   | 19.61             | Ave                          | 119                 | 128            | H              | 11.62                       | 31.23                              | 54                         | 22.77          |

| Frequency<br>(MHz)      | Receiver          |                              | Turntable<br>Degree | Rx Antenna     |                | Corrected<br>Factor<br>(dB) | Corrected<br>Amplitude<br>(dBµV/m) | FCC Part<br>15.247/205/209 |                |
|-------------------------|-------------------|------------------------------|---------------------|----------------|----------------|-----------------------------|------------------------------------|----------------------------|----------------|
|                         | Reading<br>(dBµV) | Detector<br>(PK/QP/<br>Ave.) |                     | Height<br>(cm) | Polar<br>(H/V) |                             |                                    | Limit<br>(dBµV/m)          | Margin<br>(dB) |
| High Channel (2462 MHz) |                   |                              |                     |                |                |                             |                                    |                            |                |
| 216.37                  | 31.52             | QP                           | 119                 | 248            | H              | -1.40                       | 30.12                              | 46                         | 15.88          |
| 2462.00                 | 107.35            | PK                           | 70                  | 220            | V              | -4.00                       | 103.35                             | /                          | /              |
| 2462.00                 | 101.98            | Ave                          | 70                  | 220            | V              | -4.00                       | 97.98                              | /                          | /              |
| 2462.00                 | 112.71            | PK                           | 271                 | 196            | H              | -4.00                       | 108.71                             | /                          | /              |
| 2462.00                 | 106.53            | Ave                          | 271                 | 196            | H              | -4.00                       | 102.53                             | /                          | /              |
| 2483.50                 | 44.56             | PK                           | 210                 | 211            | H              | -3.94                       | 40.62                              | 74                         | 33.38          |
| 2483.50                 | 38.25             | Ave                          | 210                 | 211            | H              | -3.94                       | 34.31                              | 54                         | 19.69          |
| 1604.24                 | 43.24             | PK                           | 193                 | 212            | V              | -7.19                       | 36.05                              | 74                         | 37.95          |
| 1604.24                 | 36.75             | Ave                          | 193                 | 212            | V              | -7.19                       | 29.56                              | 54                         | 24.44          |
| 4924.00                 | 40.24             | PK                           | 161                 | 199            | H              | 4.45                        | 44.69                              | 74                         | 29.31          |
| 4924.00                 | 29.57             | Ave                          | 161                 | 199            | H              | 4.45                        | 34.02                              | 54                         | 19.98          |
| 6451.33                 | 43.17             | PK                           | 347                 | 128            | V              | 9.06                        | 52.23                              | 74                         | 21.77          |
| 6451.33                 | 38.56             | Ave                          | 347                 | 128            | V              | 9.06                        | 47.62                              | 54                         | 6.38           |
| 7386.00                 | 28.99             | PK                           | 353                 | 210            | H              | 11.74                       | 40.73                              | 74                         | 33.27          |
| 7386.00                 | 19.34             | Ave                          | 353                 | 210            | H              | 11.74                       | 31.08                              | 54                         | 22.92          |

**802.11n-HT20 Mode:**

| Frequency<br>(MHz)     | Receiver          |                              | Turntable<br>Degree | Rx Antenna     |                | Corrected<br>Factor<br>(dB) | Corrected<br>Amplitude<br>(dBµV/m) | FCC Part<br>15.247/205/209 |                |
|------------------------|-------------------|------------------------------|---------------------|----------------|----------------|-----------------------------|------------------------------------|----------------------------|----------------|
|                        | Reading<br>(dBµV) | Detector<br>(PK/QP/<br>Ave.) |                     | Height<br>(cm) | Polar<br>(H/V) |                             |                                    | Limit<br>(dBµV/m)          | Margin<br>(dB) |
| Low Channel (2412 MHz) |                   |                              |                     |                |                |                             |                                    |                            |                |
| 216.37                 | 34.25             | QP                           | 67                  | 128            | H              | -1.40                       | 32.85                              | 46                         | 13.15          |
| 2412.00                | 104.71            | PK                           | 234                 | 177            | V              | -4.13                       | 100.58                             | /                          | /              |
| 2412.00                | 99.22             | Ave                          | 234                 | 177            | V              | -4.13                       | 95.09                              | /                          | /              |
| 2412.00                | 110.05            | PK                           | 255                 | 199            | H              | -4.13                       | 105.92                             | /                          | /              |
| 2412.00                | 103.95            | Ave                          | 255                 | 199            | H              | -4.13                       | 99.82                              | /                          | /              |
| 2390.00                | 48.48             | PK                           | 193                 | 176            | H              | -4.19                       | 44.29                              | 74                         | 29.71          |
| 2390.00                | 40.07             | Ave                          | 193                 | 176            | H              | -4.19                       | 35.88                              | 54                         | 18.12          |
| 2400.00                | 43.20             | PK                           | 239                 | 176            | H              | 1.48                        | 44.68                              | 74                         | 29.32          |
| 2400.00                | 34.18             | Ave                          | 239                 | 176            | H              | 1.48                        | 35.66                              | 54                         | 18.34          |
| 1604.24                | 44.56             | PK                           | 120                 | 175            | V              | -7.19                       | 37.37                              | 74                         | 36.63          |
| 1604.24                | 36.64             | Ave                          | 120                 | 175            | V              | -7.19                       | 29.45                              | 54                         | 24.55          |
| 4824.00                | 36.90             | PK                           | 231                 | 234            | H              | 4.19                        | 41.09                              | 74                         | 32.91          |
| 4824.00                | 29.80             | Ave                          | 231                 | 234            | H              | 4.19                        | 33.99                              | 54                         | 20.01          |
| 7236.00                | 29.21             | PK                           | 224                 | 216            | H              | 11.50                       | 40.71                              | 74                         | 33.29          |
| 7236.00                | 19.60             | Ave                          | 224                 | 216            | H              | 11.50                       | 31.10                              | 54                         | 22.90          |

| Frequency<br>(MHz)        | Receiver          |                              | Turntable<br>Degree | Rx Antenna     |                | Corrected<br>Factor<br>(dB) | Corrected<br>Amplitude<br>(dBμV/m) | FCC Part<br>15.247/205/209 |                |
|---------------------------|-------------------|------------------------------|---------------------|----------------|----------------|-----------------------------|------------------------------------|----------------------------|----------------|
|                           | Reading<br>(dBμV) | Detector<br>(PK/QP/<br>Ave.) |                     | Height<br>(cm) | Polar<br>(H/V) |                             |                                    | Limit<br>(dBμV/m)          | Margin<br>(dB) |
| Middle Channel (2437 MHz) |                   |                              |                     |                |                |                             |                                    |                            |                |
| 216.37                    | 33.67             | QP                           | 128                 | 100            | H              | -1.40                       | 32.27                              | 46                         | 13.73          |
| 2437.00                   | 105.31            | PK                           | 338                 | 216            | V              | -4.07                       | 101.24                             | /                          | /              |
| 2437.00                   | 99.83             | Ave                          | 338                 | 216            | V              | -4.07                       | 95.76                              | /                          | /              |
| 2437.00                   | 110.63            | PK                           | 169                 | 223            | H              | -4.07                       | 106.56                             | /                          | /              |
| 2437.00                   | 104.54            | Ave                          | 169                 | 223            | H              | -4.07                       | 100.47                             | /                          | /              |
| 1604.24                   | 43.21             | PK                           | 325                 | 160            | H              | -7.19                       | 36.02                              | 74                         | 37.98          |
| 1604.24                   | 33.59             | Ave                          | 325                 | 160            | H              | -7.19                       | 26.40                              | 54                         | 27.60          |
| 3211.56                   | 44.15             | PK                           | 276                 | 132            | V              | 0.80                        | 44.95                              | 74                         | 29.05          |
| 3211.56                   | 34.21             | Ave                          | 276                 | 132            | V              | 0.80                        | 35.01                              | 54                         | 18.99          |
| 4874.00                   | 39.08             | PK                           | 293                 | 123            | H              | 4.32                        | 43.40                              | 74                         | 30.60          |
| 4874.00                   | 29.15             | Ave                          | 293                 | 123            | H              | 4.32                        | 33.47                              | 54                         | 20.53          |
| 6451.33                   | 43.29             | PK                           | 208                 | 109            | V              | 9.06                        | 52.35                              | 74                         | 21.65          |
| 6451.33                   | 33.63             | Ave                          | 208                 | 109            | V              | 9.06                        | 42.69                              | 54                         | 11.31          |
| 7311.00                   | 29.07             | PK                           | 112                 | 194            | H              | 11.62                       | 40.69                              | 74                         | 33.31          |
| 7311.00                   | 19.43             | Ave                          | 112                 | 194            | H              | 11.62                       | 31.05                              | 54                         | 22.95          |

| Frequency<br>(MHz)      | Receiver          |                              | Turntable<br>Degree | Rx Antenna     |                | Corrected<br>Factor<br>(dB) | Corrected<br>Amplitude<br>(dBµV/m) | FCC Part<br>15.247/205/209 |                |
|-------------------------|-------------------|------------------------------|---------------------|----------------|----------------|-----------------------------|------------------------------------|----------------------------|----------------|
|                         | Reading<br>(dBµV) | Detector<br>(PK/QP/<br>Ave.) |                     | Height<br>(cm) | Polar<br>(H/V) |                             |                                    | Limit<br>(dBµV/m)          | Margin<br>(dB) |
| High Channel (2462 MHz) |                   |                              |                     |                |                |                             |                                    |                            |                |
| 216.37                  | 33.88             | QP                           | 263                 | 160            | H              | -1.40                       | 32.48                              | 46                         | 13.52          |
| 2462.00                 | 105.85            | PK                           | 173                 | 174            | V              | -4.00                       | 101.85                             | /                          | /              |
| 2462.00                 | 100.46            | Ave                          | 173                 | 174            | V              | -4.00                       | 96.46                              | /                          | /              |
| 2462.00                 | 111.27            | PK                           | 24                  | 100            | H              | -4.00                       | 107.27                             | /                          | /              |
| 2462.00                 | 105.26            | Ave                          | 24                  | 100            | H              | -4.00                       | 101.26                             | /                          | /              |
| 2483.50                 | 44.68             | PK                           | 352                 | 211            | H              | -3.94                       | 40.74                              | 74                         | 33.26          |
| 2483.50                 | 38.35             | Ave                          | 352                 | 211            | H              | -3.94                       | 34.41                              | 54                         | 19.59          |
| 1604.24                 | 43.15             | PK                           | 249                 | 167            | V              | -7.19                       | 35.96                              | 74                         | 38.04          |
| 1604.24                 | 36.79             | Ave                          | 249                 | 167            | V              | -7.19                       | 29.60                              | 54                         | 24.40          |
| 4924.00                 | 40.10             | PK                           | 248                 | 139            | H              | 4.45                        | 44.55                              | 74                         | 29.45          |
| 4924.00                 | 29.40             | Ave                          | 248                 | 139            | H              | 4.45                        | 33.85                              | 54                         | 20.15          |
| 6451.33                 | 43.06             | PK                           | 235                 | 228            | H              | 9.06                        | 52.12                              | 74                         | 21.88          |
| 6451.33                 | 38.58             | Ave                          | 235                 | 228            | H              | 9.06                        | 47.64                              | 54                         | 6.36           |
| 7386.00                 | 29.22             | PK                           | 215                 | 240            | H              | 11.74                       | 40.96                              | 74                         | 33.04          |
| 7386.00                 | 19.50             | Ave                          | 215                 | 240            | H              | 11.74                       | 31.24                              | 54                         | 22.76          |

**BLE Mode:**

| Frequency<br>(MHz)     | Receiver          |                              | Turntable<br>Degree | Rx Antenna     |                | Corrected<br>Factor<br>(dB) | Corrected<br>Amplitude<br>(dBµV/m) | FCC Part<br>15.247/205/209 |                |
|------------------------|-------------------|------------------------------|---------------------|----------------|----------------|-----------------------------|------------------------------------|----------------------------|----------------|
|                        | Reading<br>(dBµV) | Detector<br>(PK/QP/<br>Ave.) |                     | Height<br>(cm) | Polar<br>(H/V) |                             |                                    | Limit<br>(dBµV/m)          | Margin<br>(dB) |
| Low Channel (2402 MHz) |                   |                              |                     |                |                |                             |                                    |                            |                |
| 282.71                 | 40.46             | QP                           | 85                  | 184            | V              | 1.17                        | 41.63                              | 46                         | 4.37           |
| 2402.00                | 106.64            | PK                           | 30                  | 234            | V              | -4.16                       | 102.48                             | /                          | /              |
| 2402.00                | 100.26            | Ave                          | 30                  | 234            | V              | -4.16                       | 96.10                              | /                          | /              |
| 2402.00                | 113.20            | PK                           | 124                 | 198            | H              | -4.16                       | 109.04                             | /                          | /              |
| 2402.00                | 107.76            | Ave                          | 124                 | 198            | H              | -4.16                       | 103.60                             | /                          | /              |
| 2390.00                | 49.59             | PK                           | 313                 | 101            | H              | -4.19                       | 45.40                              | 74                         | 28.60          |
| 2390.00                | 41.37             | Ave                          | 313                 | 101            | H              | -4.19                       | 37.18                              | 54                         | 16.82          |
| 1689.18                | 44.15             | PK                           | 225                 | 102            | H              | -6.77                       | 37.38                              | 74                         | 36.62          |
| 1689.18                | 36.24             | Ave                          | 225                 | 102            | H              | -6.77                       | 29.47                              | 54                         | 24.53          |
| 3210.23                | 43.58             | PK                           | 332                 | 134            | V              | -0.48                       | 43.10                              | 74                         | 30.90          |
| 3210.23                | 34.81             | Ave                          | 332                 | 134            | V              | -0.48                       | 34.33                              | 54                         | 19.67          |
| 4804.00                | 43.28             | PK                           | 292                 | 116            | H              | 4.13                        | 47.41                              | 74                         | 26.59          |
| 4804.00                | 34.19             | Ave                          | 292                 | 116            | H              | 4.13                        | 38.32                              | 54                         | 15.68          |
| 7206.00                | 28.61             | PK                           | 6                   | 217            | H              | 11.45                       | 40.06                              | 74                         | 33.94          |
| 7206.00                | 18.34             | Ave                          | 6                   | 217            | H              | 11.45                       | 29.79                              | 54                         | 24.21          |

| Frequency<br>(MHz)        | Receiver          |                              | Turntable<br>Degree | Rx Antenna     |                | Corrected<br>Factor<br>(dB) | Corrected<br>Amplitude<br>(dBµV/m) | FCC Part<br>15.247/205/209 |                |
|---------------------------|-------------------|------------------------------|---------------------|----------------|----------------|-----------------------------|------------------------------------|----------------------------|----------------|
|                           | Reading<br>(dBµV) | Detector<br>(PK/QP/<br>Ave.) |                     | Height<br>(cm) | Polar<br>(H/V) |                             |                                    | Limit<br>(dBµV/m)          | Margin<br>(dB) |
| Middle Channel (2440 MHz) |                   |                              |                     |                |                |                             |                                    |                            |                |
| 282.71                    | 39.18             | QP                           | 26                  | 215            | V              | 1.17                        | 40.35                              | 46                         | 5.65           |
| 2440.00                   | 106.72            | PK                           | 351                 | 196            | V              | -4.06                       | 102.66                             | /                          | /              |
| 2440.00                   | 100.23            | Ave                          | 351                 | 196            | V              | -4.06                       | 96.17                              | /                          | /              |
| 2440.00                   | 113.11            | PK                           | 299                 | 140            | H              | -4.06                       | 109.05                             | /                          | /              |
| 2440.00                   | 107.80            | Ave                          | 299                 | 140            | H              | -4.06                       | 103.74                             | /                          | /              |
| 1604.23                   | 44.08             | PK                           | 110                 | 144            | V              | -7.19                       | 36.89                              | 74                         | 37.11          |
| 1604.23                   | 36.33             | Ave                          | 110                 | 144            | V              | -7.19                       | 29.14                              | 54                         | 24.86          |
| 3211.68                   | 43.65             | PK                           | 254                 | 160            | H              | -0.48                       | 43.17                              | 74                         | 30.83          |
| 3211.68                   | 34.74             | Ave                          | 254                 | 160            | H              | -0.48                       | 34.26                              | 54                         | 19.74          |
| 4880.00                   | 43.32             | PK                           | 133                 | 116            | H              | 4.33                        | 47.65                              | 74                         | 26.35          |
| 4880.00                   | 34.15             | Ave                          | 133                 | 116            | H              | 4.33                        | 38.48                              | 54                         | 15.52          |
| 6451.24                   | 43.66             | PK                           | 55                  | 205            | V              | 9.06                        | 52.72                              | 74                         | 21.28          |
| 6451.24                   | 34.77             | Ave                          | 55                  | 205            | V              | 9.06                        | 43.83                              | 54                         | 10.17          |
| 7320.00                   | 28.65             | PK                           | 282                 | 158            | H              | 11.63                       | 40.28                              | 74                         | 33.72          |
| 7320.00                   | 18.37             | Ave                          | 282                 | 158            | H              | 11.63                       | 30.00                              | 54                         | 24.00          |


| Frequency<br>(MHz)     | Receiver          |                              | Turntable<br>Degree | Rx Antenna     |                | Corrected<br>Factor | Corrected<br>Amplitude | FCC Part<br>15.247/205/209 |                |
|------------------------|-------------------|------------------------------|---------------------|----------------|----------------|---------------------|------------------------|----------------------------|----------------|
|                        | Reading<br>(dBμV) | Detector<br>(PK/QP/<br>Ave.) |                     | Height<br>(cm) | Polar<br>(H/V) |                     |                        | Limit<br>(dBμV/m)          | Margin<br>(dB) |
|                        |                   |                              |                     |                |                | (dB)                | (dBμV/m)               |                            |                |
| High Channel (2480MHz) |                   |                              |                     |                |                |                     |                        |                            |                |
| 282.71                 | 40.09             | QP                           | 293                 | 172            | V              | 1.17                | 41.26                  | 46                         | 4.74           |
| 2480.00                | 106.70            | PK                           | 208                 | 198            | V              | -3.95               | 102.75                 | /                          | /              |
| 2480.00                | 100.21            | Ave                          | 208                 | 198            | V              | -3.95               | 96.26                  | /                          | /              |
| 2480.00                | 113.20            | PK                           | 79                  | 201            | H              | -3.95               | 109.25                 | /                          | /              |
| 2480.00                | 107.70            | Ave                          | 79                  | 201            | H              | -3.95               | 103.75                 | /                          | /              |
| 2483.50                | 49.65             | PK                           | 127                 | 133            | H              | -3.94               | 45.71                  | 74                         | 28.29          |
| 2483.50                | 41.44             | Ave                          | 127                 | 133            | H              | -3.94               | 37.50                  | 54                         | 16.50          |
| 1605.22                | 43.39             | PK                           | 90                  | 147            | V              | -7.19               | 36.20                  | 74                         | 37.80          |
| 1605.22                | 34.09             | Ave                          | 90                  | 147            | V              | -7.19               | 26.90                  | 54                         | 27.10          |
| 4960.00                | 43.30             | PK                           | 197                 | 145            | H              | 4.54                | 47.84                  | 74                         | 26.16          |
| 4960.00                | 34.19             | Ave                          | 197                 | 145            | H              | 4.54                | 38.73                  | 54                         | 15.27          |
| 6454.87                | 43.49             | PK                           | 342                 | 247            | V              | 9.08                | 52.57                  | 74                         | 21.43          |
| 6454.87                | 34.17             | Ave                          | 342                 | 247            | V              | 9.08                | 43.25                  | 54                         | 10.75          |
| 7440.00                | 28.71             | PK                           | 151                 | 192            | H              | 11.83               | 40.54                  | 74                         | 33.46          |
| 7440.00                | 18.43             | Ave                          | 151                 | 192            | H              | 11.83               | 30.26                  | 54                         | 23.74          |

**Simultaneous Transmission Mode:**


| Frequency (MHz) | Receiver       |                       | Turntable Degree | Rx Antenna  |             | Corrected Factor (dB) | Corrected Amplitude (dBμV/m) | FCC Part 15.247/205/209 |             |
|-----------------|----------------|-----------------------|------------------|-------------|-------------|-----------------------|------------------------------|-------------------------|-------------|
|                 | Reading (dBμV) | Detector (PK/QP/Ave.) |                  | Height (cm) | Polar (H/V) |                       |                              | Limit (dBμV/m)          | Margin (dB) |
| 282.71          | 40.02          | QP                    | 293              | 172         | V           | 1.17                  | 41.19                        | 46                      | 4.81        |
| 1605.22         | 43.07          | PK                    | 90               | 147         | V           | -7.19                 | 35.88                        | 74                      | 38.12       |
| 1605.22         | 33.44          | Ave                   | 90               | 147         | V           | -7.19                 | 26.25                        | 54                      | 27.75       |
| 6454.87         | 43.4           | PK                    | 342              | 247         | V           | 9.08                  | 52.48                        | 74                      | 21.52       |
| 6454.87         | 33.91          | Ave                   | 342              | 247         | V           | 9.08                  | 42.99                        | 54                      | 11.01       |

# Conducted Spurious Emissions at Antenna Port:


## 802.11b Low Channel

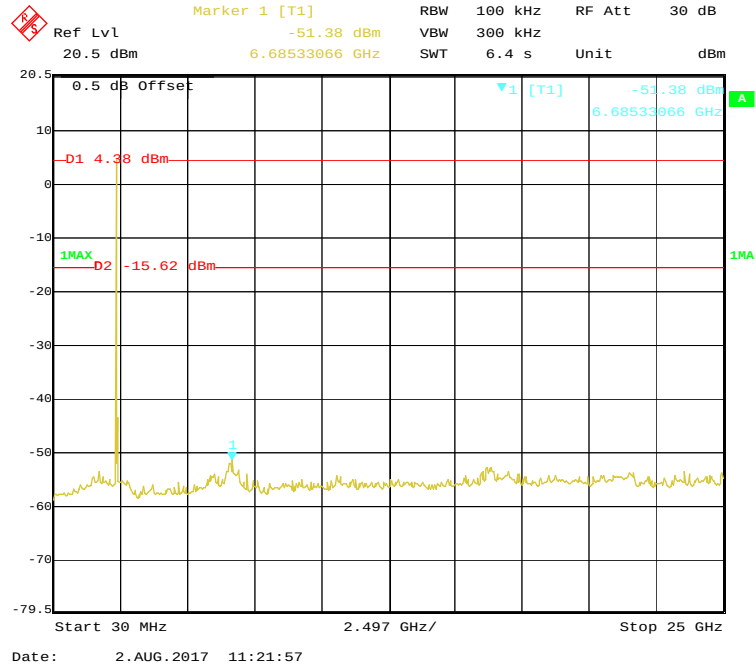


## 802.11b Middle Channel

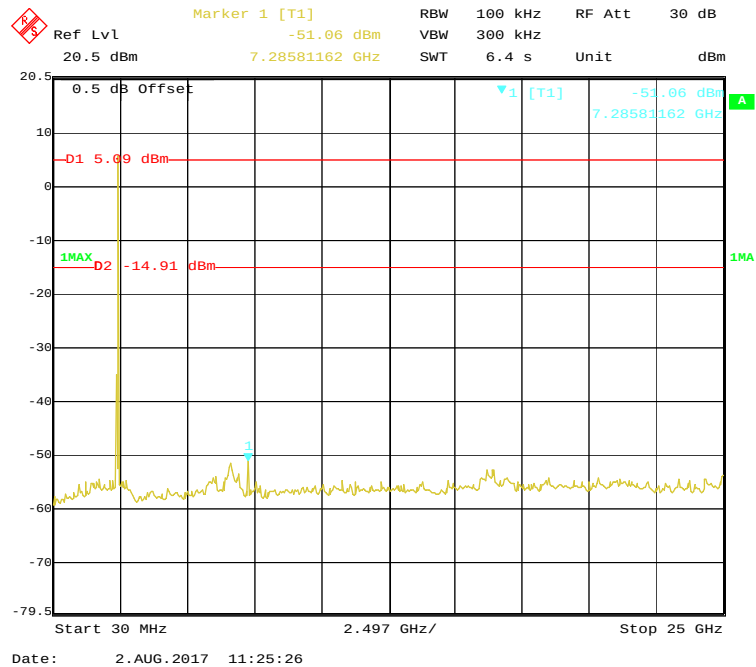


### 802.11b High Channel

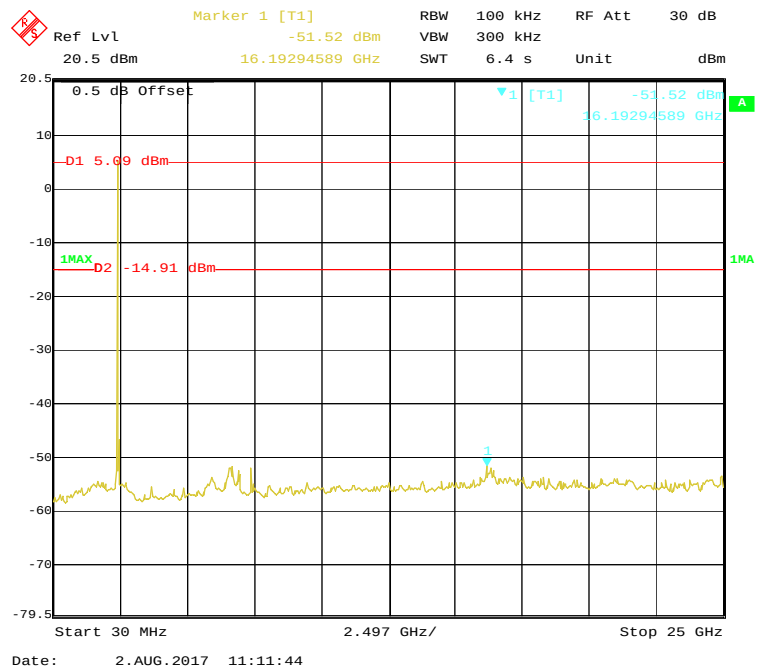


### 802.11g Low Channel

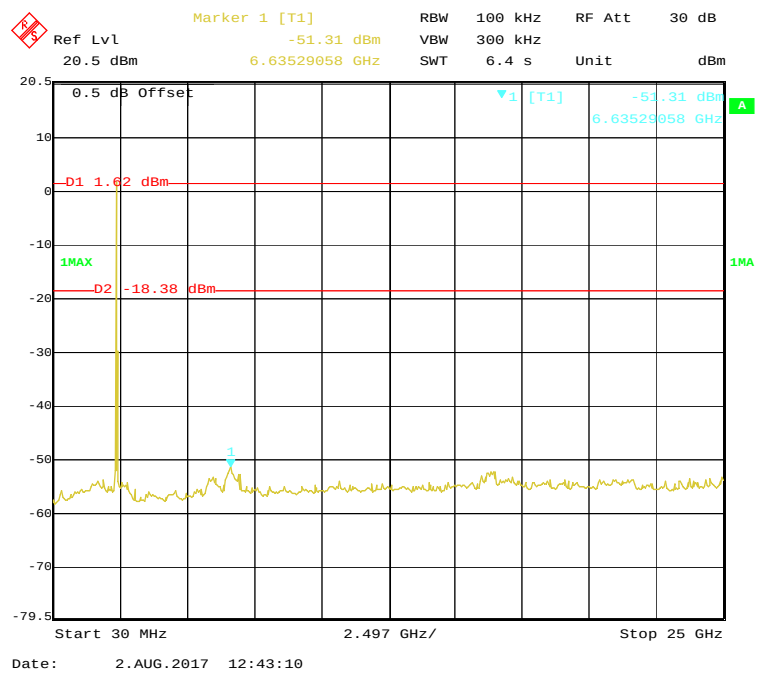


### 802.11g Middle Channel

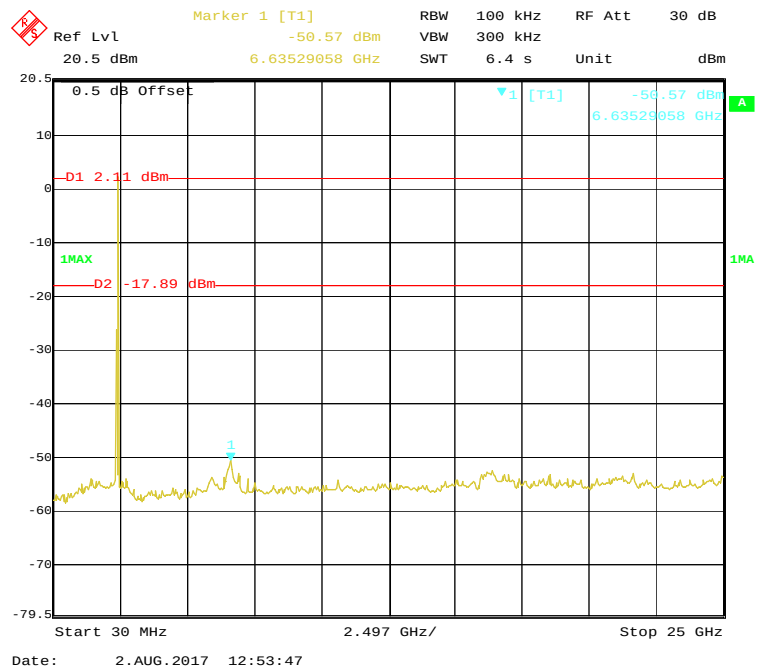


### 802.11g High Channel

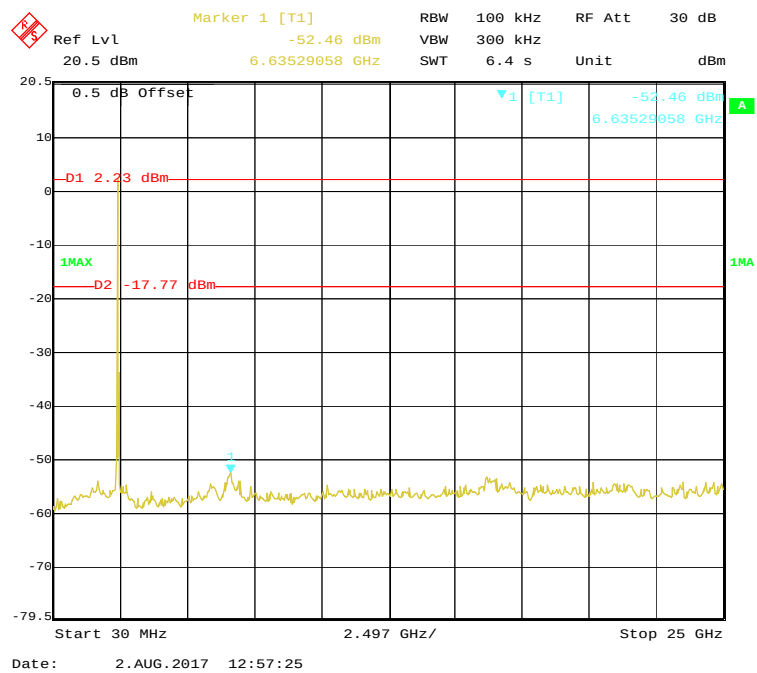


### 802.11n-HT20 Low Channel

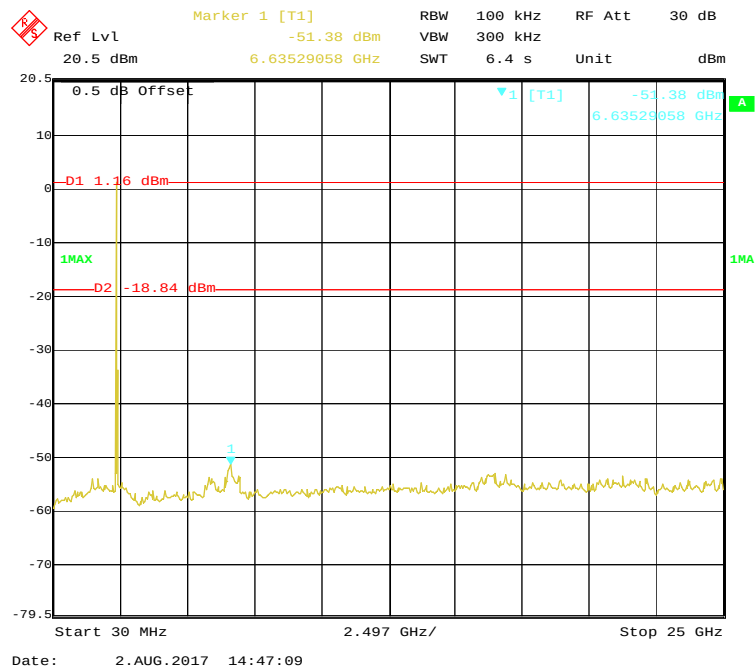


### 802.11n-HT20 Middle Channel

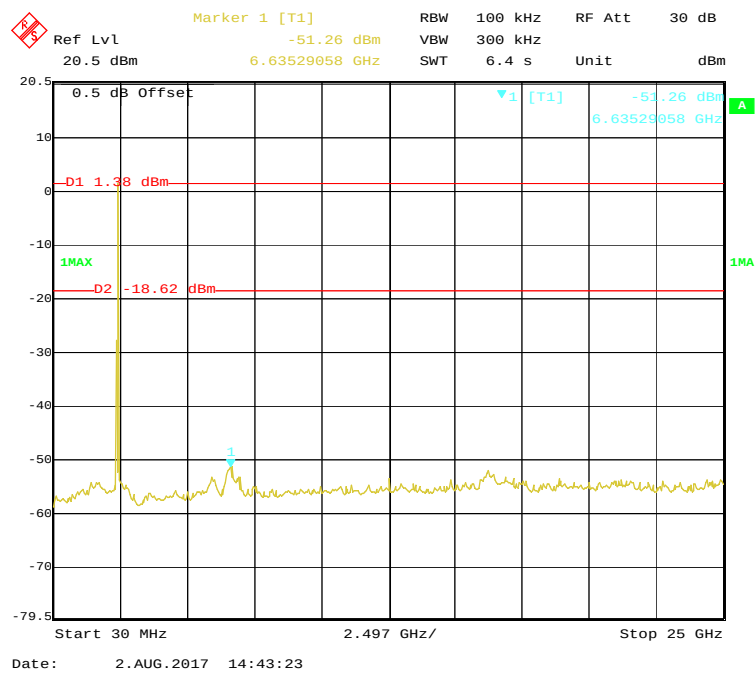


### 802.11n-HT20 High Channel

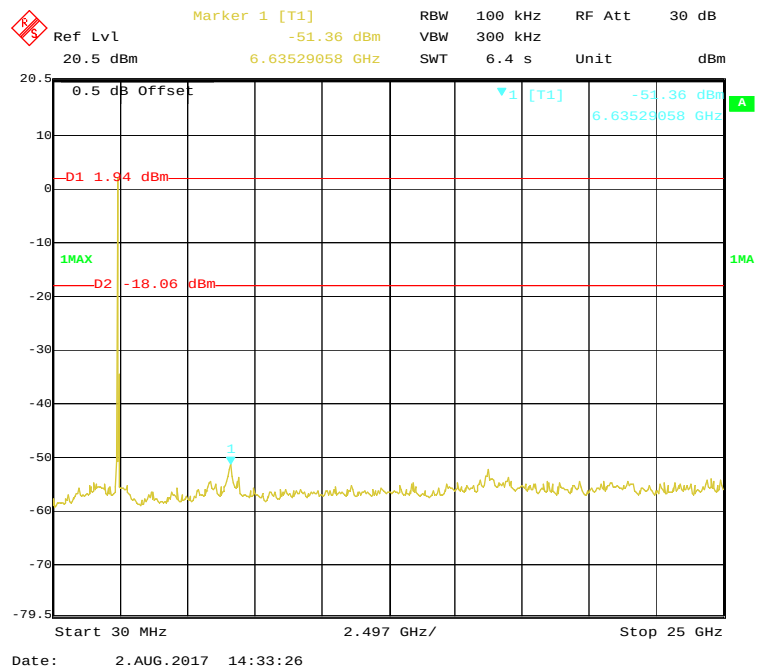


### BLE Mode Low Channel

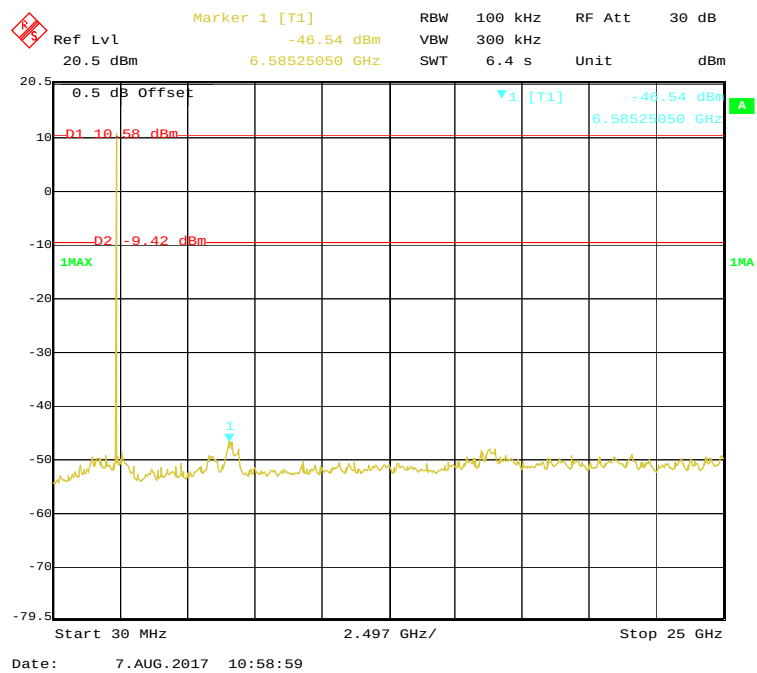

### BLE Mode Middle Channel

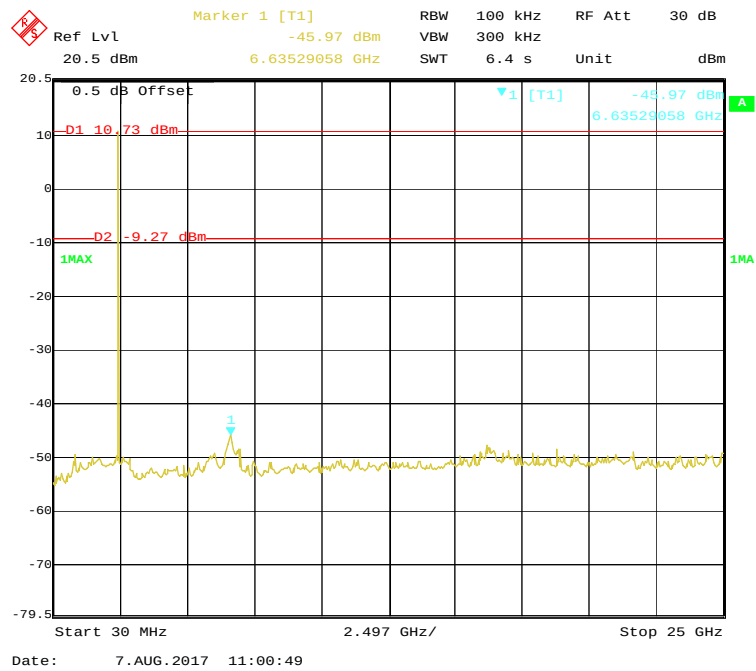

### BLE Mode High Channel

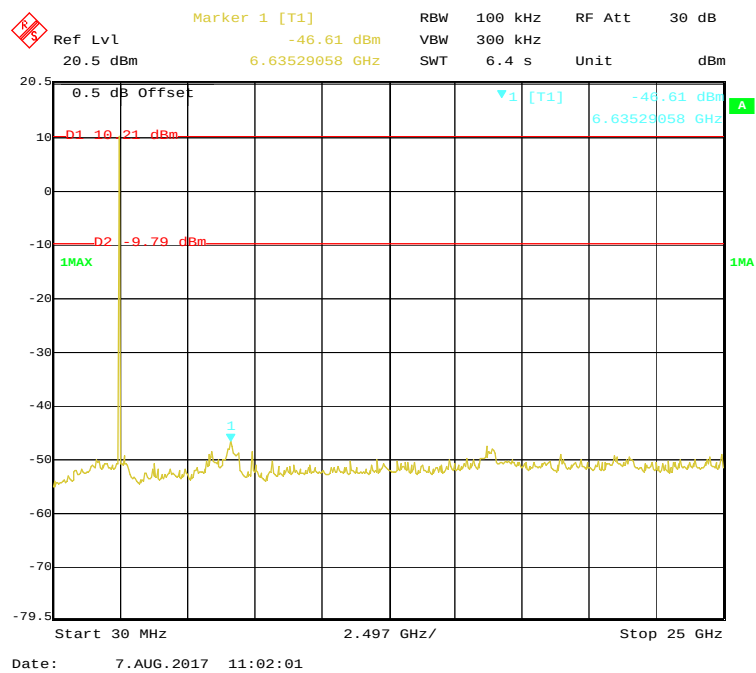


**FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH****Applicable Standard**

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

**Test Procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

**Test Data****Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 24.1 °C   |
| <b>Relative Humidity:</b> | 55 %      |
| <b>ATM Pressure:</b>      | 101.0 kPa |


*The testing was performed by Ada Yu on 2017-08-02 to 2017-08-07.*

*EUT operation mode: Transmitting*


**Test Result:** Pass

| Channel           | Frequency (MHz) | 6 dB Emission Bandwidth (MHz) | Limit (MHz) |
|-------------------|-----------------|-------------------------------|-------------|
| 802.11b mode      |                 |                               |             |
| Low               | 2412            | 9.02                          | $\geq 0.5$  |
| Middle            | 2437            | 9.08                          | $\geq 0.5$  |
| High              | 2462            | 9.02                          | $\geq 0.5$  |
| 802.11g mode      |                 |                               |             |
| Low               | 2412            | 15.75                         | $\geq 0.5$  |
| Middle            | 2437            | 16.05                         | $\geq 0.5$  |
| High              | 2462            | 15.99                         | $\geq 0.5$  |
| 802.11n-HT20 mode |                 |                               |             |
| Low               | 2412            | 17.50                         | $\geq 0.5$  |
| Middle            | 2437            | 17.07                         | $\geq 0.5$  |
| High              | 2462            | 17.25                         | $\geq 0.5$  |
| BLE mode          |                 |                               |             |
| Low               | 2402            | 0.745                         | $\geq 0.5$  |
| Middle            | 2440            | 0.745                         | $\geq 0.5$  |
| High              | 2480            | 0.739                         | $\geq 0.5$  |

### 802.11b, Low Channel

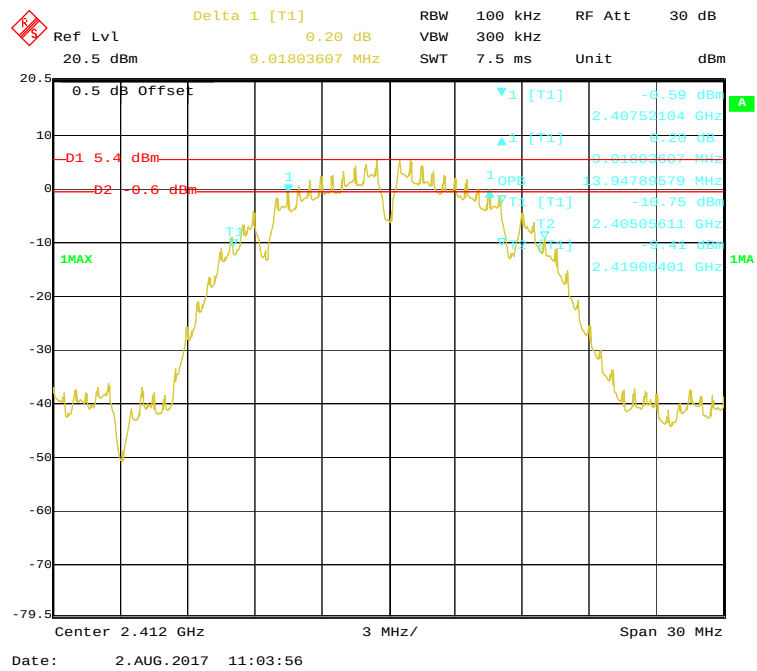

### 802.11b, Middle Channel

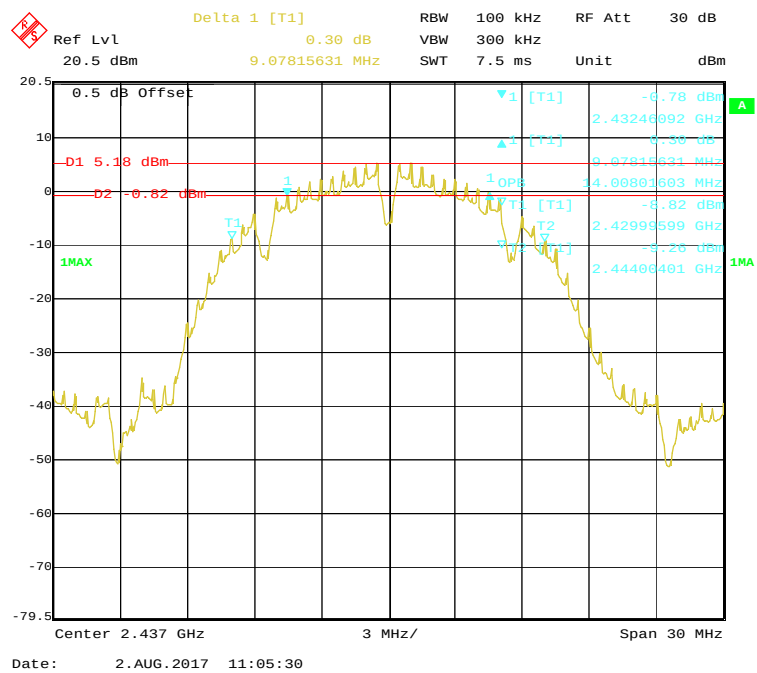

Delta 1 [T1] -0.09 dB  
 RBW 100 kHz RF Att 30 dB  
 VBW 300 kHz  
 SWT 7.5 ms Unit dBm

Ref Lvl 20.5 dBm  
 20.5 dBm  
 0.5 dB Offset  
 -D1 5.15 dBm  
 -D2 -0.85 dBm  
 1MAX  
 1MA

Center 2.462 GHz  
 3 MHz/  
 Span 30 MHz



Date: 2.AUG.2017 11:07:13

Delta 1 [T1]  
 Ref Lvl 0.30 dB  
 20.5 dBm 15.75150301 MHz  
 RBW 100 kHz RF Att 30 dB  
 VBW 300 kHz  
 SWT 7.5 ms Unit dBm


0.5 dB Offset  
 -D1 1.86 dBm  
 -D2 -4.14 dBm  
 1MAX  
 -4.18 dBm  
 2.40415431 GHz  
 0.30 dB  
 15.75150301 MHz  
 -6.88 dBm  
 2.40373347 GHz  
 -7.22 dBm  
 2.42026653 GHz  
 1MA

Center 2.412 GHz 3 MHz/  
 Span 30 MHz


Date: 2.AUG.2017 12:34:12

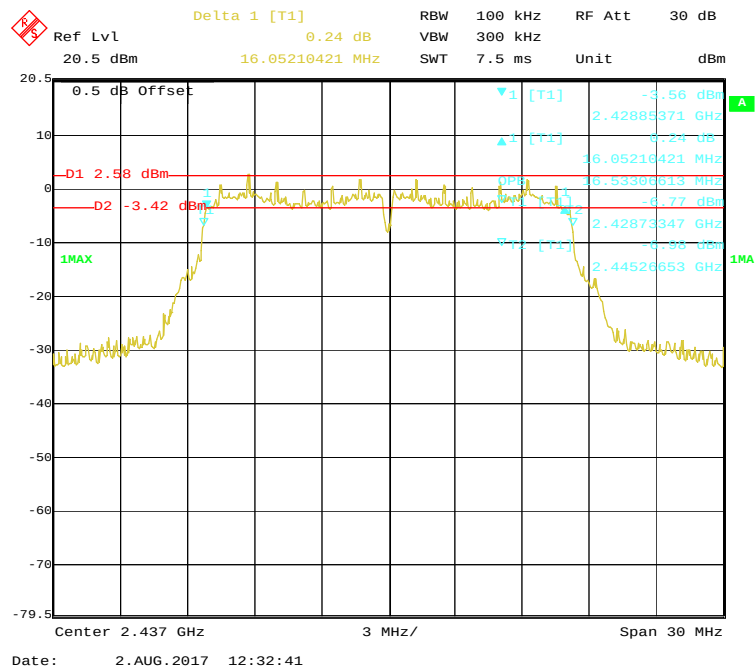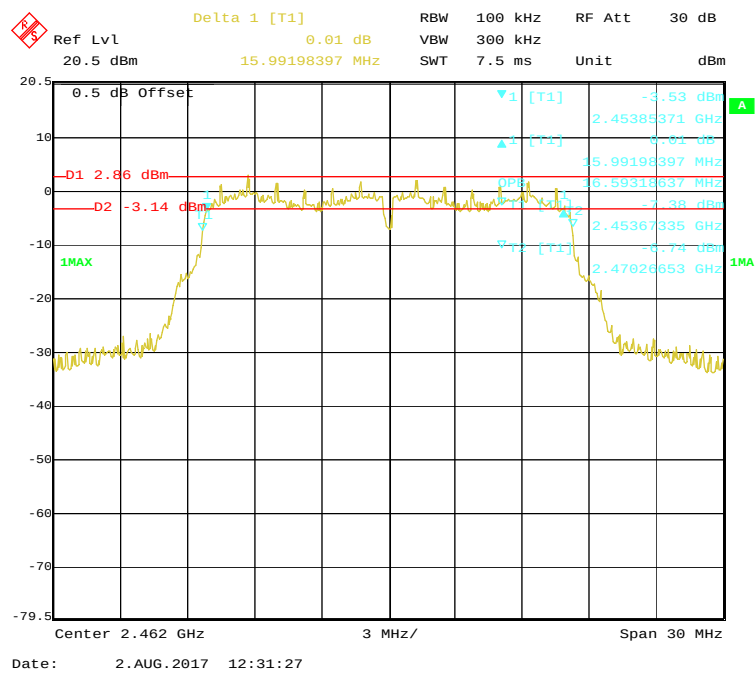**802.11g, Middle Channel****802.11g, High Channel**


### 802.11n-HT20, Low Channel

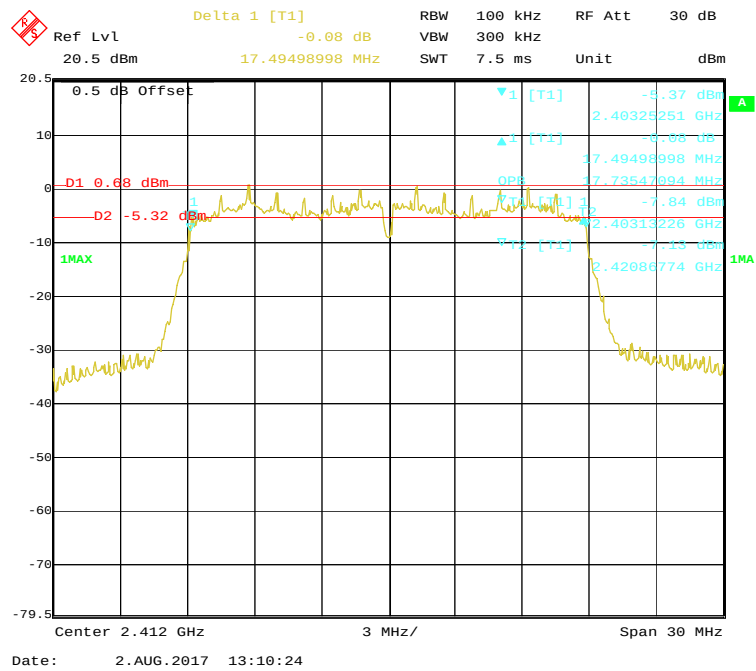


### 802.11n-HT20, Middle Channel

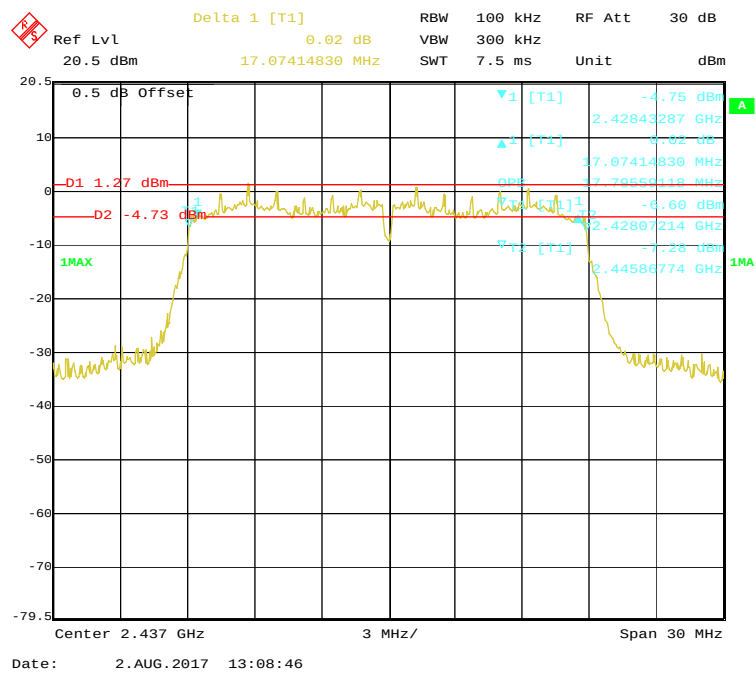


### 802.11n-HT20, High Channel

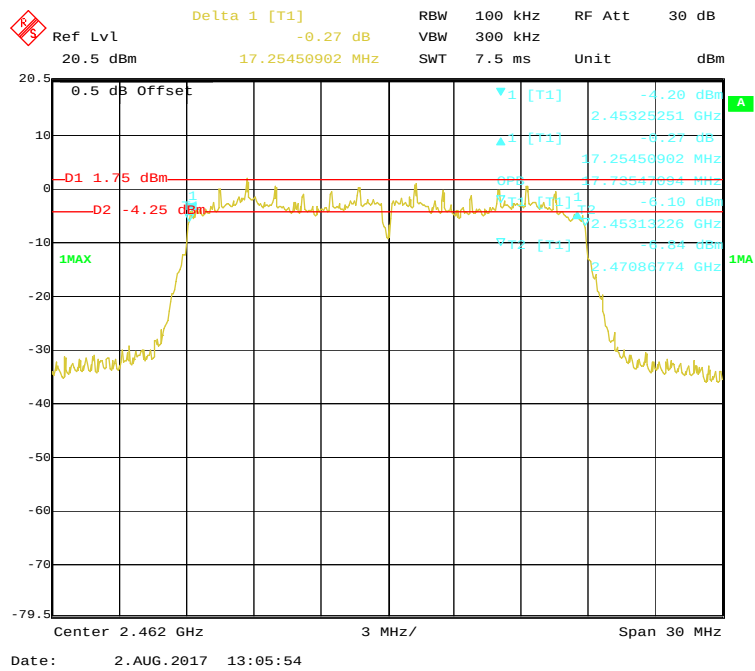


### BLE Mode, Low Channel

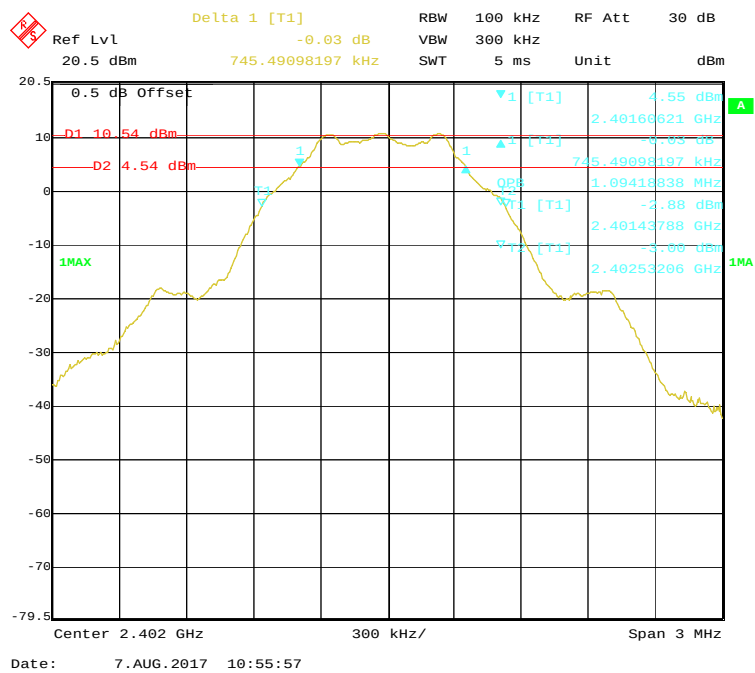

### BLE Mode, Middle Channel

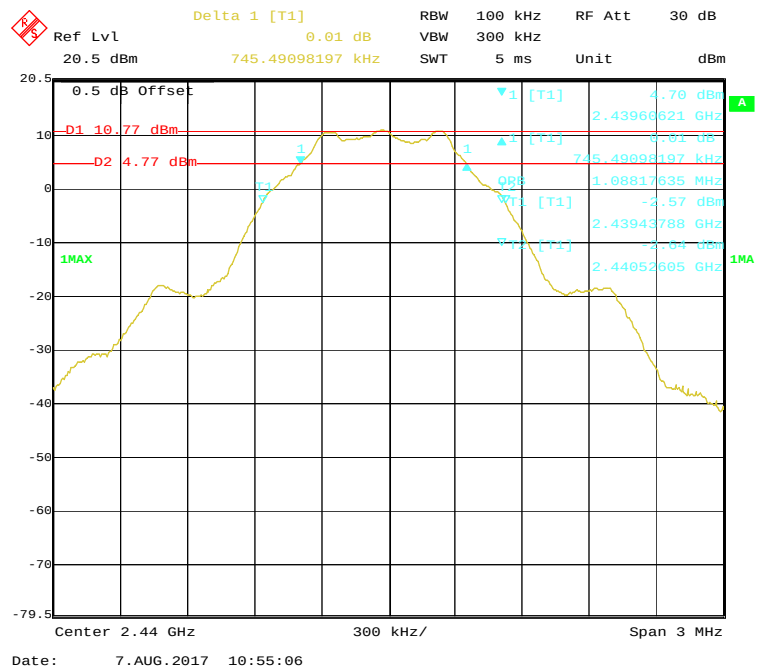

### BLE Mode, High Channel

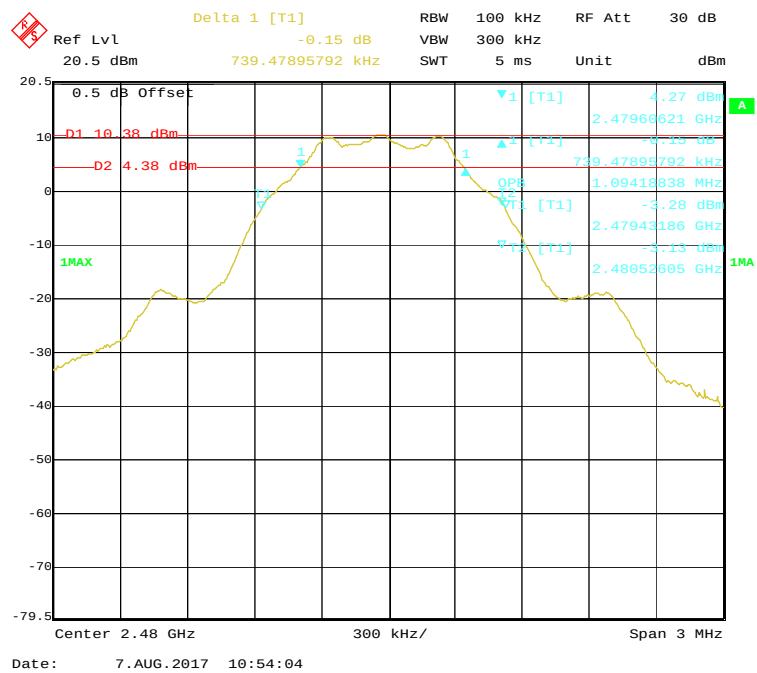


## **FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER**

### **Applicable Standard**

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### **Test Procedure**

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Note: We use signal Analyzer for peak power test and power meter for average power test.

### **Test Data**

#### **Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 23.8℃     |
| <b>Relative Humidity:</b> | 54 %      |
| <b>ATM Pressure:</b>      | 101.2 kPa |

*The testing was performed by Ada Yu on 2017-08-07.*

*EUT operation mode: Transmitting*

| Channel      | Frequency (MHz) | Max Conducted Peak Output Power (dBm) | Limit (dBm) | Result |
|--------------|-----------------|---------------------------------------|-------------|--------|
| 802.11b      |                 |                                       |             |        |
| Low          | 2412            | 16.60                                 | 30          | Pass   |
| Middle       | 2437            | 16.71                                 | 30          | Pass   |
| High         | 2462            | 16.91                                 | 30          | Pass   |
| 802.11g      |                 |                                       |             |        |
| Low          | 2412            | 20.26                                 | 30          | Pass   |
| Middle       | 2437            | 20.64                                 | 30          | Pass   |
| High         | 2462            | 20.78                                 | 30          | Pass   |
| 802.11n-HT20 |                 |                                       |             |        |
| Low          | 2412            | 19.08                                 | 30          | Pass   |
| Middle       | 2437            | 19.54                                 | 30          | Pass   |
| High         | 2462            | 19.68                                 | 30          | Pass   |
| BLE          |                 |                                       |             |        |
| Low          | 2402            | 11.63                                 | 30          | Pass   |
| Middle       | 2440            | 11.82                                 | 30          | Pass   |
| High         | 2480            | 11.58                                 | 30          | Pass   |

**FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE****Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

**Test Procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

**Test Data****Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 24.3 °C   |
| <b>Relative Humidity:</b> | 55 %      |
| <b>ATM Pressure:</b>      | 101.3 kPa |


*The testing was performed by Ada Yu on 2017-08-02&2017-08-07.*

*EUT operation mode: Transmitting*


**Test Result:** *Compliance*

# Band Edge

## 802.11b: Left Side

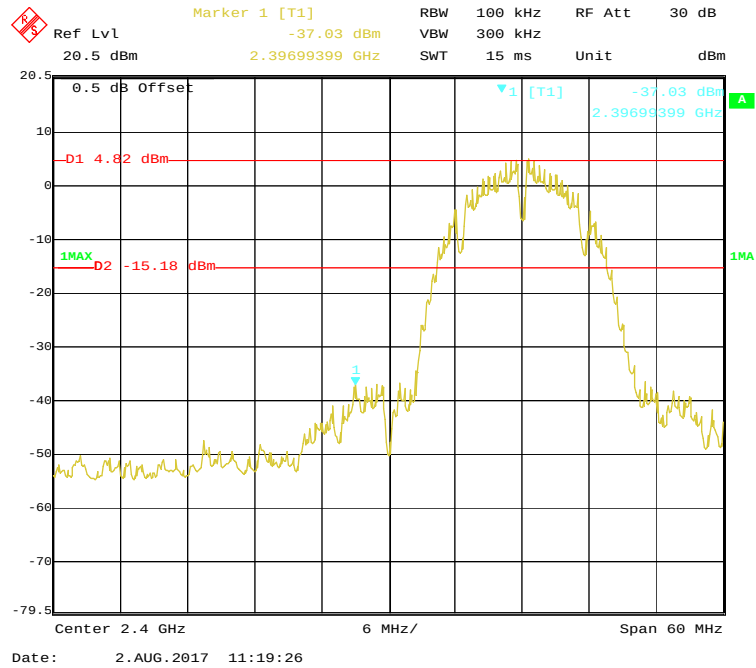

## 802.11b: Right Side

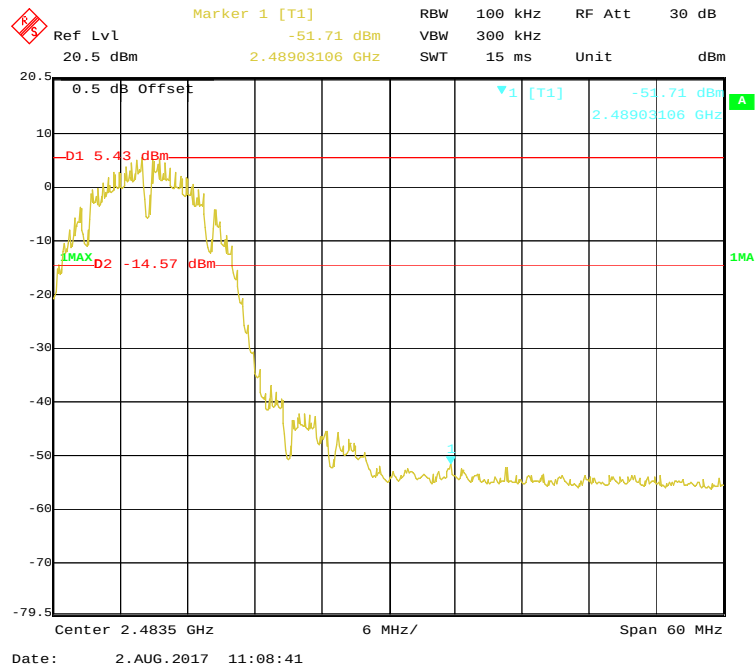

Marker 1 [T1]  
 Ref Lvl -29.60 dBm  
 20.5 dBm 2.40000000 GHz  
 RBW 100 kHz RF Att 30 dB  
 VBW 300 kHz  
 SWT 15 ms Unit dBm

0.5 dB Offset  
 -D1 1.8 dBm  
 1MAX  
 -D2 -18.2 dBm  
 -29.60 dBm  
 2.40000000 GHz  
 1MAX  
 Center 2.4 GHz 6 MHz/ Span 60 MHz

Date: 2.AUG.2017 12:35:16

**Marker 1 [T1]**  
 Ref Lvl -39.02 dBm  
 20.5 dBm 2.4835000 GHz  
 RBW 100 kHz RF Att 30 dB  
 VBW 300 kHz  
 SWT 15 ms Unit dBm

0.5 dB Offset  
 -39.02 dBm  
 2.4835000 GHz  
 -17.05 dBm  
 6 MHz/  
 Span 60 MHz  
 Date: 2.AUG.2017 13:01:11



Ref Lvl 20.5 dBm RBW 100 kHz RF Att 30 dB  
-31.13 dBm VBW 300 kHz  
2.40000000 GHz SWT 15 ms Unit dBm

0.5 dB Offset

Marker 1 [T1] -31.13 dBm 2.40000000 GHz

D1 0.93 dBm

1MAX

D2 -19.07 dBm

1MA

Center 2.4 GHz 6 MHz/ Span 60 MHz

Date: 2.AUG.2017 14:19:22

RBW 100 kHz RF Att 30 dB  
 VBW 300 kHz  
 SWT 15 ms Unit dBm


Ref Lvl 20.5 dBm  
 Marker 1 [T1] -39.79 dBm  
 2.48350000 GHz

0.5 dB Offset  
 D1 2.69 dBm  
 1MAX  
 D2 -17.91 dBm  
 1MA


Center 2.4835 GHz 6 MHz/ Span 60 MHz

Date: 2.AUG.2017 14:20:19

### BLE: Left Side

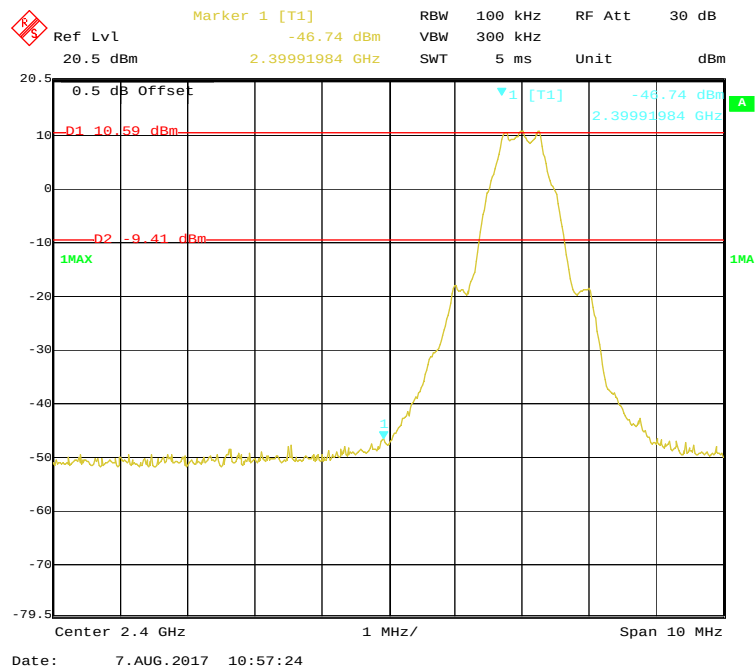

### BLE: Right Side

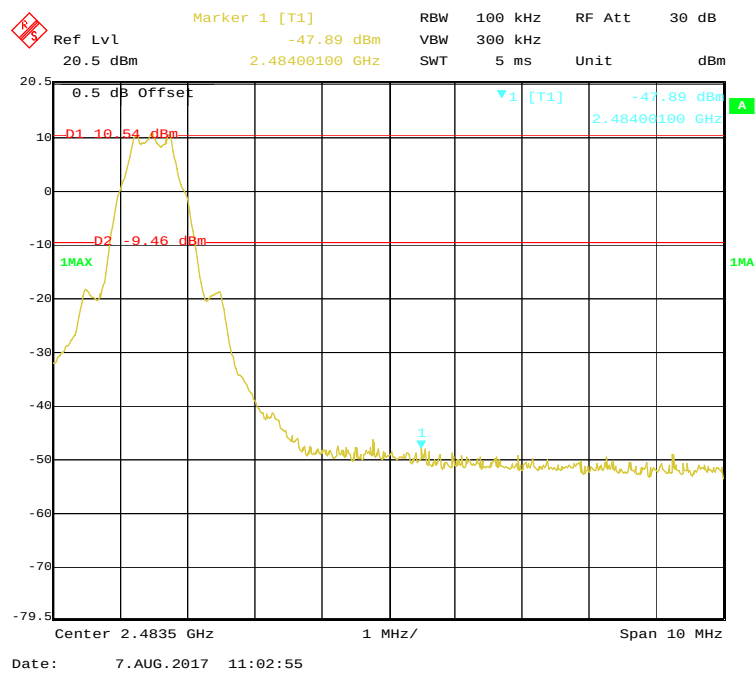

## **FCC §15.247(e) - POWER SPECTRAL DENSITY**

### **Applicable Standard**

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### **Test Procedure**

According to KDB558074 D01 DTS Meas Guidance v04.

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$ .
3. Set the VBW  $\geq 3 \times \text{RBW}$ .
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### **Test Data**

#### **Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 24.1 °C   |
| <b>Relative Humidity:</b> | 54 %      |
| <b>ATM Pressure:</b>      | 101.3 kPa |


*The testing was performed by Ada Yu on 2017-08-02&2017-08-07.*

*EUT operation mode: Transmitting*


**Test Result:** Pass

| Channel           | Frequency (MHz) | PSD (dBm/3kHz) | Limit (dBm/3kHz) |
|-------------------|-----------------|----------------|------------------|
| 802.11b mode      |                 |                |                  |
| Low               | 2412            | -9.57          | $\leq 8$         |
| Middle            | 2437            | -8.90          | $\leq 8$         |
| High              | 2462            | -8.24          | $\leq 8$         |
| 802.11g mode      |                 |                |                  |
| Low               | 2412            | -11.12         | $\leq 8$         |
| Middle            | 2437            | -11.92         | $\leq 8$         |
| High              | 2462            | -11.71         | $\leq 8$         |
| 802.11n-HT20 mode |                 |                |                  |
| Low               | 2412            | -13.64         | $\leq 8$         |
| Middle            | 2437            | -13.21         | $\leq 8$         |
| High              | 2462            | -12.44         | $\leq 8$         |
| BLE mode          |                 |                |                  |
| Low               | 2402            | -2.76          | $\leq 8$         |
| Middle            | 2440            | -2.56          | $\leq 8$         |
| High              | 2480            | -3.03          | $\leq 8$         |


### 802.11b Low Channel

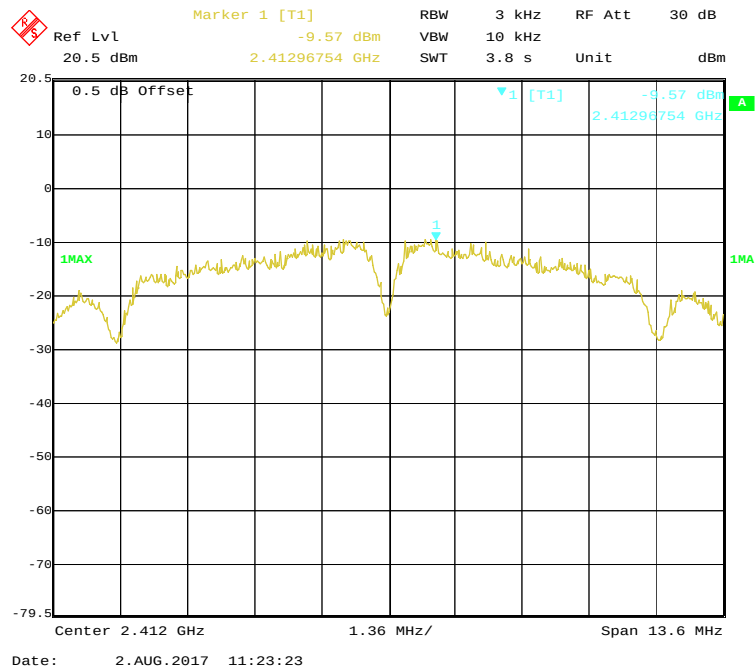


### 802.11b Middle Channel

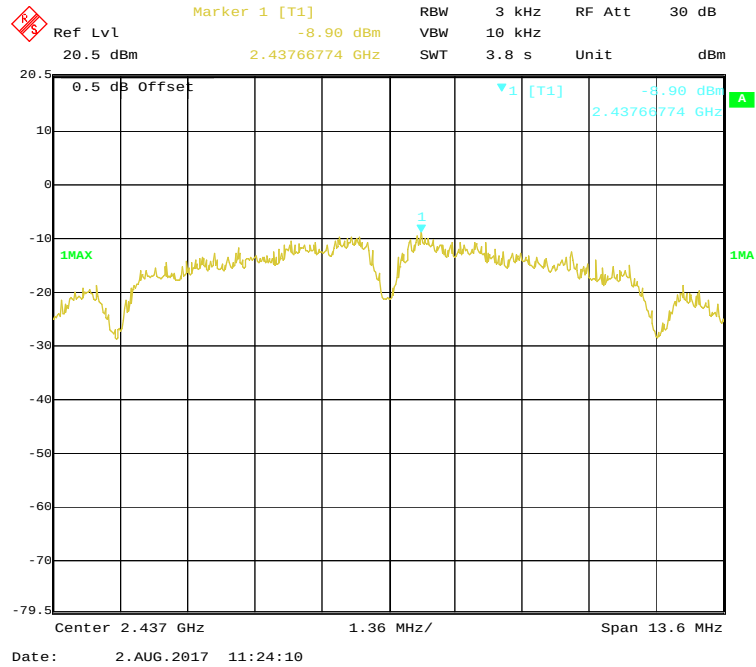


### 802.11b High Channel

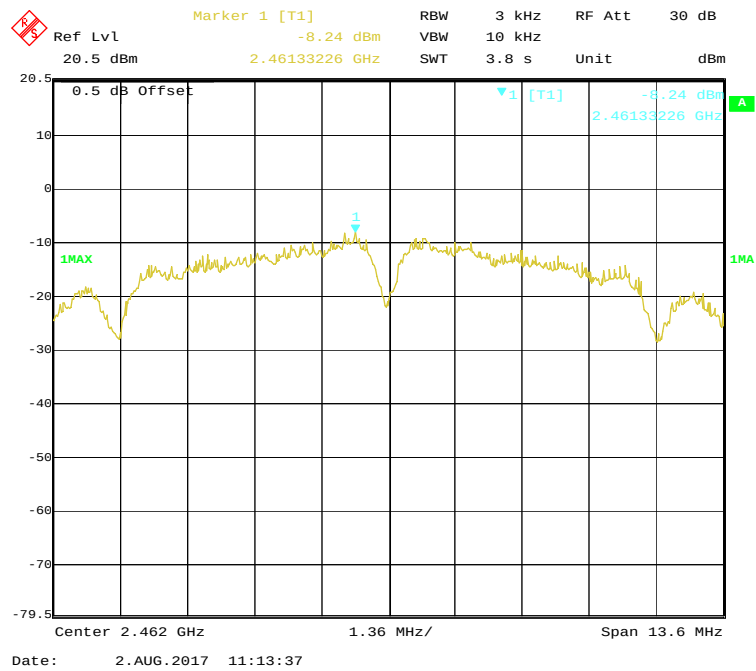


### 802.11g Low Channel

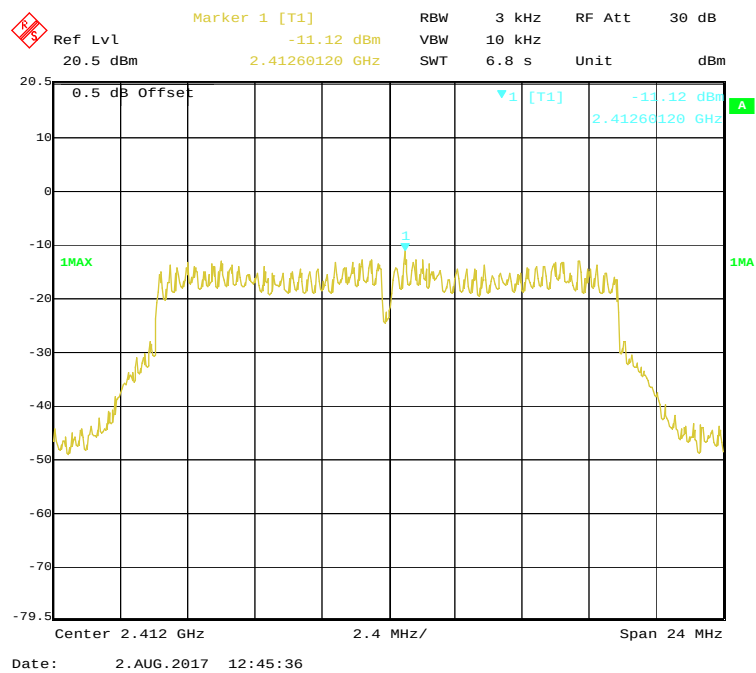


### 802.11g Middle Channel

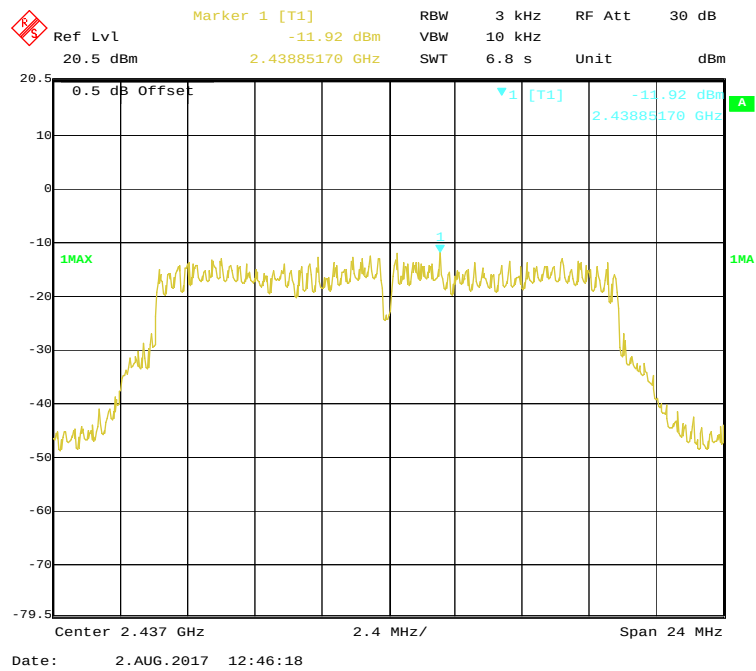


### 802.11g High Channel

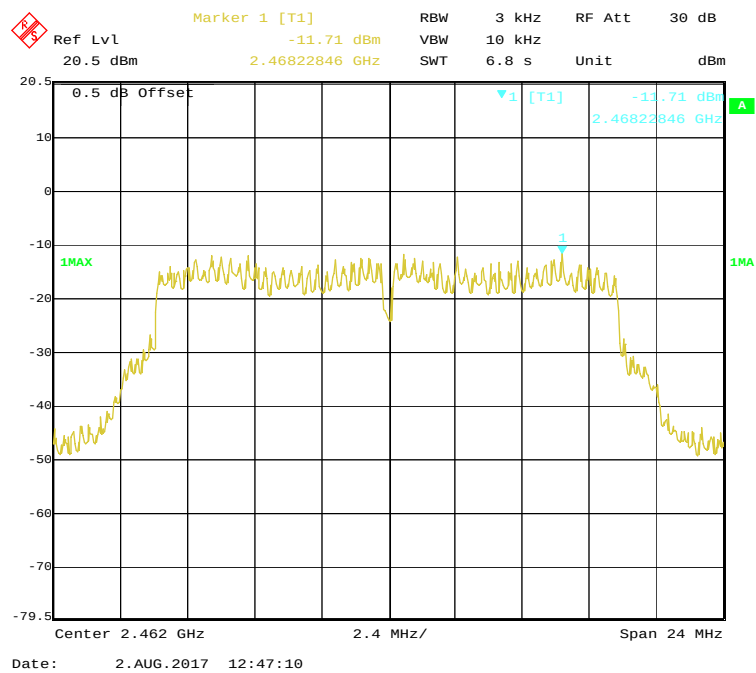

### 802.11n-HT20 Low Channel

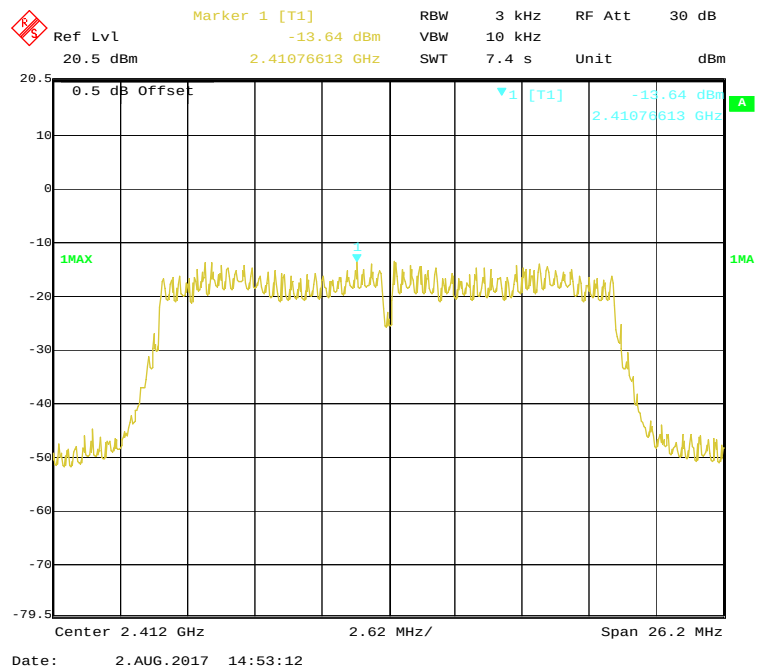

### 802.11n-HT20 Middle Channel

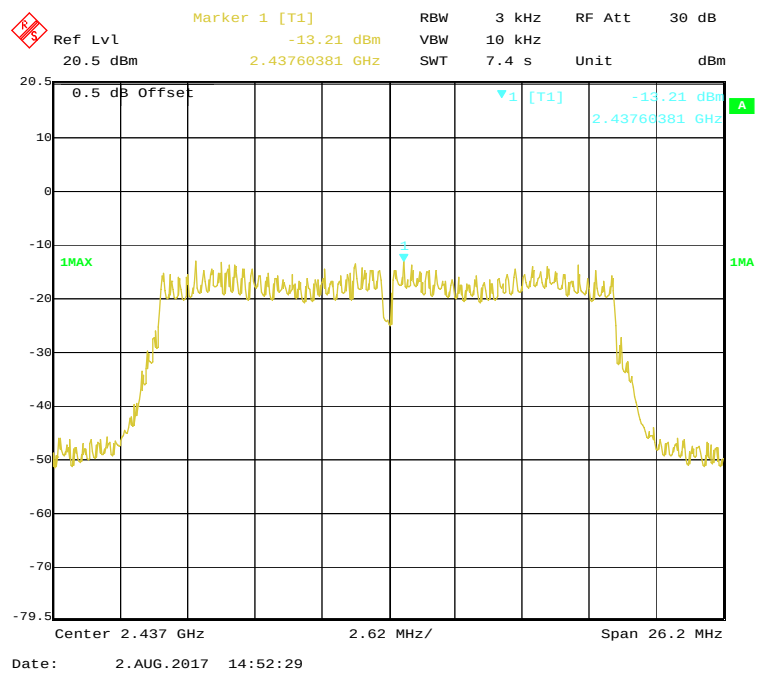

Ref Lvl 20.5 dBm

Marker 1 [T1] -12.44 dBm

RBW 3 kHz RF Att 30 dB

SWT 7.4 s Unit dBm

0.5 dB Offset

1MAX

▼1 [T1] -12.44 dBm

2.46354890 GHz

1MA

Center 2.462 GHz


2.62 MHz/

Span 26.2 MHz


Date: 2.AUG.2017 14:51:47

Ref Lvl 20.5 dBm  
 Marker 1 [T1] -2.76 dBm  
 RBW 3 kHz RF Att 30 dB  
 VBW 10 kHz  
 SWT 310 ms Unit dBm  
 0.5 dB Offset  
 1MAX  
 1MAX  
 Center 2.402 GHz 110 kHz/  
 Span 1.1 MHz  
 Date: 7.AUG.2017 11:06:43

### BLE Mode, Middle Channel

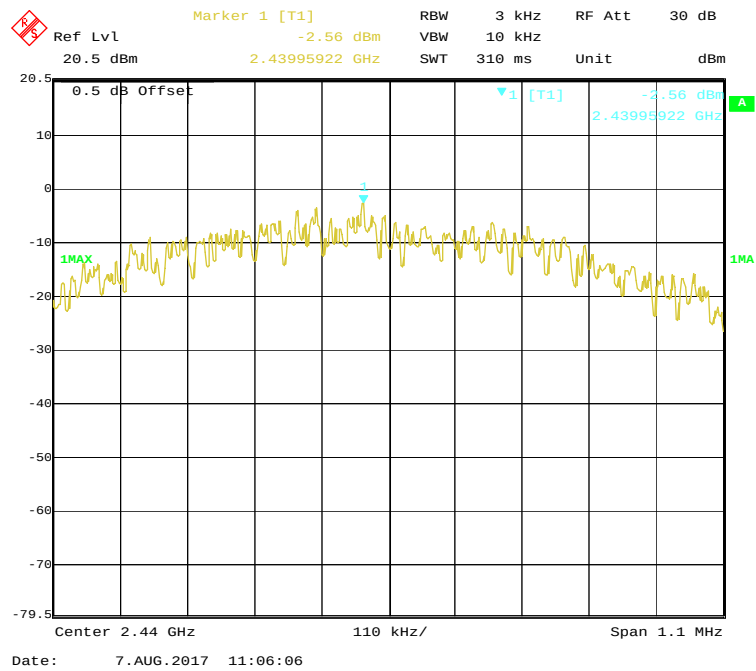

### BLE Mode, High Channel

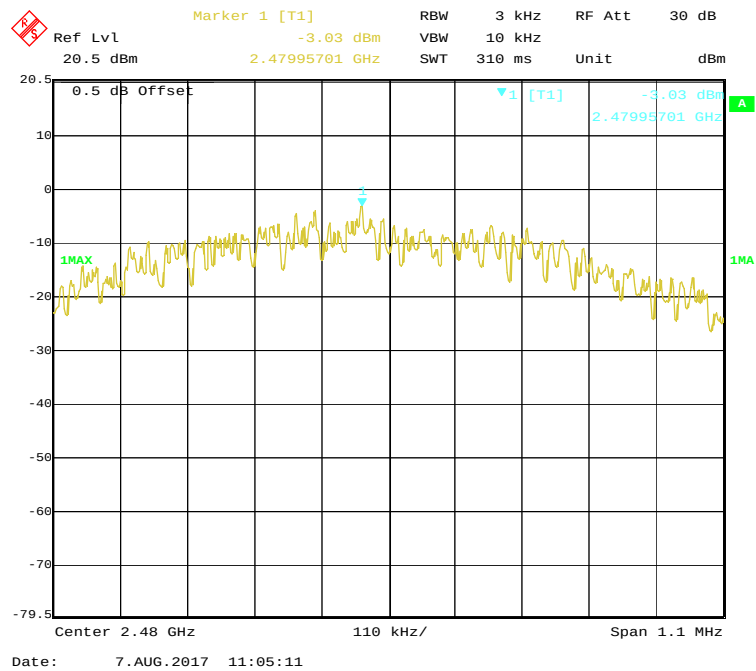

\*\*\*\*\* END OF REPORT \*\*\*\*\*