

APPENDIX B - SAR PLOTS

Test Plot 1#: LTE Band 7 1RB Mid Body Back

DUT: POS Terminal; Type: N750; Serial: 3BFH-1

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.896$ S/m; $\epsilon_r = 40.485$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.5, 7.5, 7.5) @ 2535 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 7 1RB Mid/Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.06 W/kg

Body Back/LTE Band 7 1RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.973 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.721 W/kg; SAR(10 g) = 0.367 W/kg

Smallest distance from peaks to all points 3 dB below = 12.1 mm

Ratio of SAR at M2 to SAR at M1 = 54%

Maximum value of SAR (measured) = 1.13 W/kg

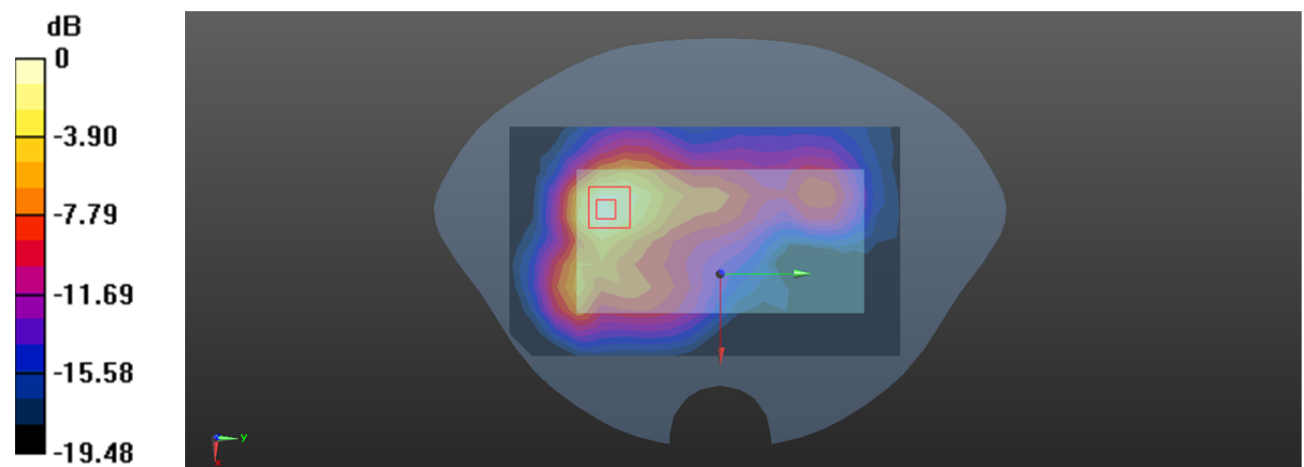

0 dB = 1.13 W/kg = 0.53 dBW/kg

Test Plot 2#: LTE Band 7 1RB Mid Limb Back**DUT: POS Terminal; Type: N750; Serial: 3BFH-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.896$ S/m; $\epsilon_r = 40.485$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.5, 7.5, 7.5) @ 2535 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Limb Back/LTE Band 7 1RB Mid/Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 9.20 W/kg

Limb Back/LTE Band 7 1RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.23 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 12.8 W/kg

SAR(1 g) = 6.02 W/kg; SAR(10 g) = 2.57 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 49.3%

Maximum value of SAR (measured) = 10.4 W/kg

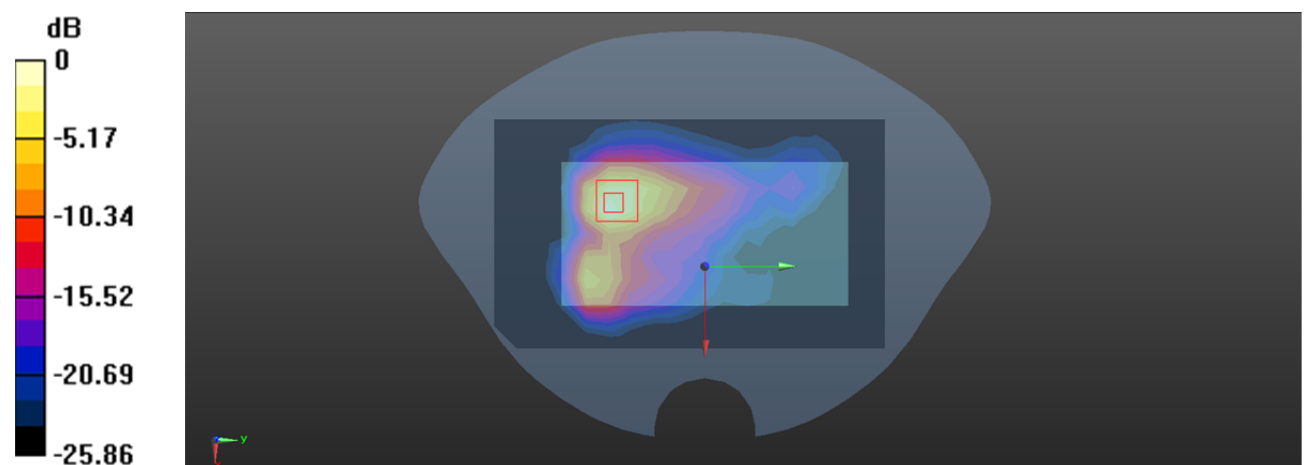

0 dB = 10.4 W/kg = 10.17 dBW/kg

Test Plot 3#: LTE Band 12 1RB Mid Body Left**DUT: POS Terminal; Type: N750; Serial: 3BFH-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 42.103$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.2, 10.2, 10.2) @ 707.5 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Left/LTE Band 12 1RB Mid/Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.553 W/kg

Body Left/LTE Band 12 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.23 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.660 W/kg

SAR(1 g) = 0.450 W/kg; SAR(10 g) = 0.320 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 68.8%

Maximum value of SAR (measured) = 0.583 W/kg

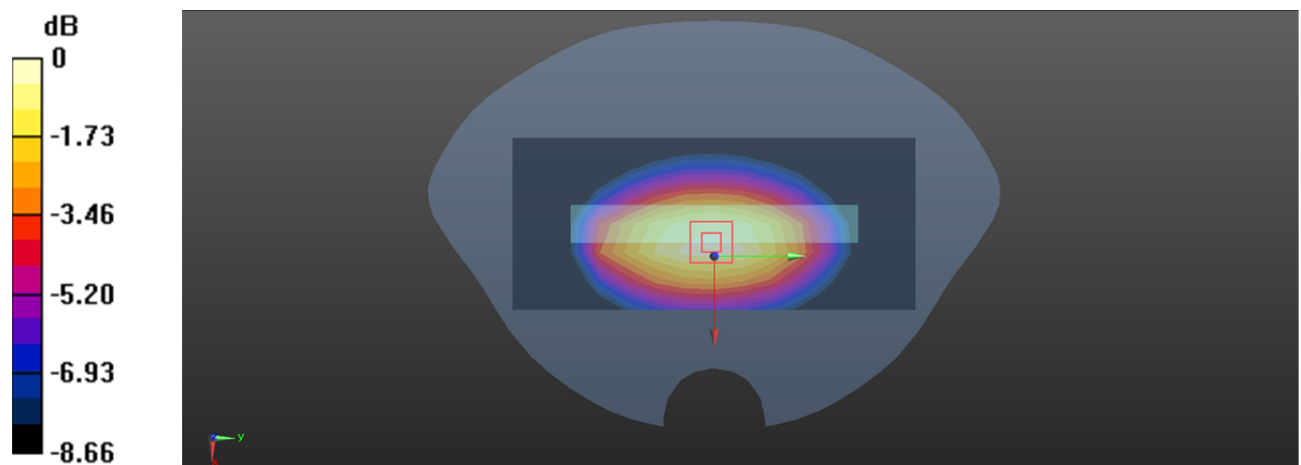

0 dB = 0.583 W/kg = -2.34 dBW/kg

Test Plot 4#: LTE Band 12 1RB Mid Limb Left**DUT: POS Terminal; Type: N750; Serial: 3BFH-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 42.103$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.2, 10.2, 10.2) @ 707.5 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Limb Left/LTE Band 12 1RB Mid/Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 3.62 W/kg

Limb Left/LTE Band 12 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.00 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 4.50 W/kg

SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.484 W/kg

Smallest distance from peaks to all points 3 dB below = 14.8 mm

Ratio of SAR at M2 to SAR at M1 = 63.5%

Maximum value of SAR (measured) = 2.92 W/kg

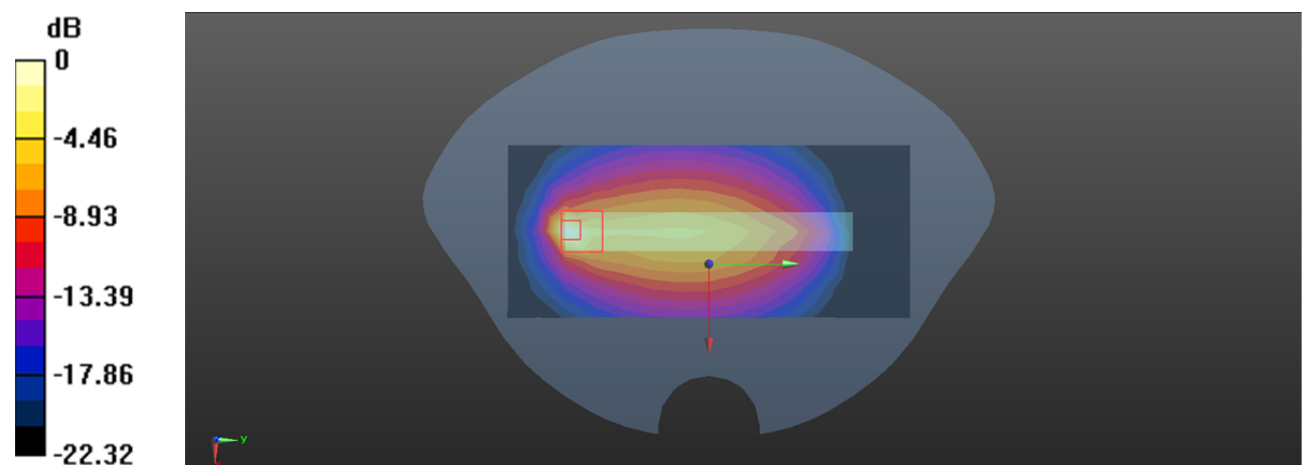

0 dB = 2.92 W/kg = 4.65 dBW/kg

Test Plot 5#: LTE Band 13 1RB Mid Body Left**DUT: POS Terminal; Type: N750; Serial: 3BFH-1**


Communication System: UID 0, Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.915 \text{ S/m}$; $\epsilon_r = 41.684$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.2, 10.2, 10.2) @ 782 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

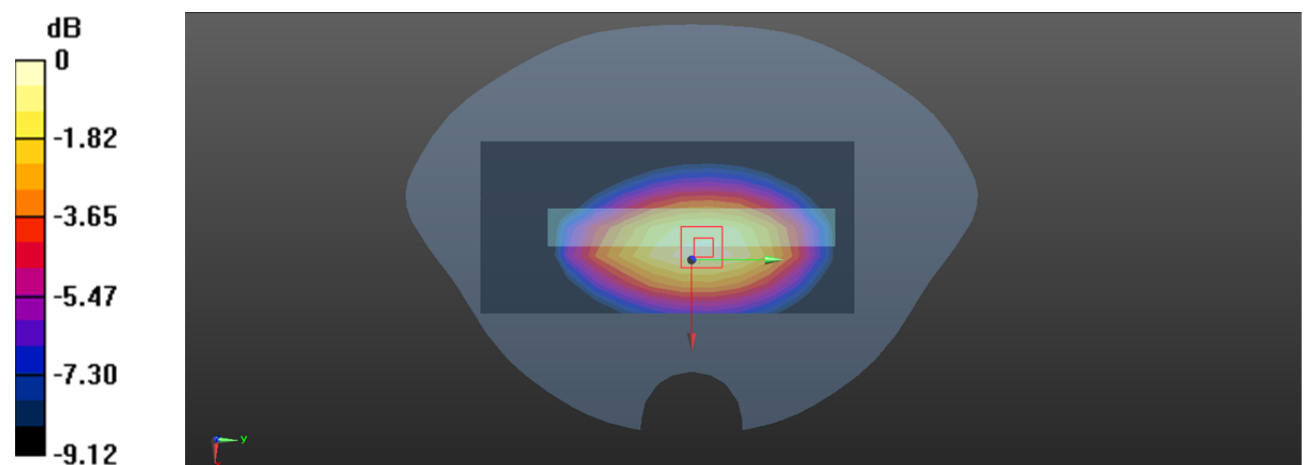Body Left/LTE Band 13 1RB Mid/Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.710 W/kg **Body Left/LTE Band 13 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 23.52 V/m ; Power Drift = 0.20 dB Peak SAR (extrapolated) = 0.842 W/kg **SAR(1 g) = 0.564 W/kg ; SAR(10 g) = 0.396 W/kg** Smallest distance from peaks to all points 3 dB below: Larger than measurement grid ($> 16 \text{ mm}$)Ratio of SAR at M2 to SAR at M1 = 67.3% Maximum value of SAR (measured) = 0.741 W/kg 0 dB = 0.741 W/kg = -1.30 dBW/kg

Test Plot 6#: LTE Band 13 1RB Mid Limb Left**DUT: POS Terminal; Type: N750; Serial: 3BFH-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.915 \text{ S/m}$; $\epsilon_r = 41.684$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.2, 10.2, 10.2) @ 782 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Limb Left/LTE Band 13 1RB Mid/Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.14 W/kg

Limb Left/LTE Band 13 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 31.34 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 2.11 W/kg

SAR(1 g) = 0.713 W/kg; SAR(10 g) = 0.391 W/kg

Smallest distance from peaks to all points 3 dB below = 14.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.1%

Maximum value of SAR (measured) = 1.29 W/kg

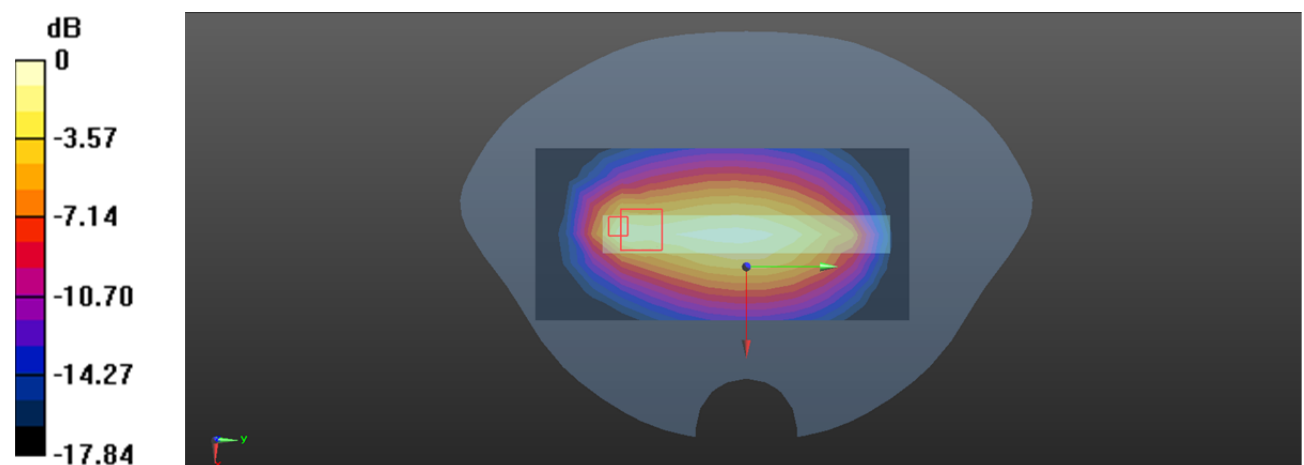

0 dB = 1.29 W/kg = 1.11 dBW/kg

Test Plot 7#: LTE Band 14 1RB Mid Body Left**DUT: POS Terminal; Type: N750; Serial: 3BFH-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 793 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 793$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 41.556$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.2, 10.2, 10.2) @ 793 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Left/LTE Band 14 1RB Mid/Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.601 W/kg

Body Left/LTE Band 14 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.10 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 0.726 W/kg

SAR(1 g) = 0.496 W/kg; SAR(10 g) = 0.353 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 68.9%

Maximum value of SAR (measured) = 0.639 W/kg

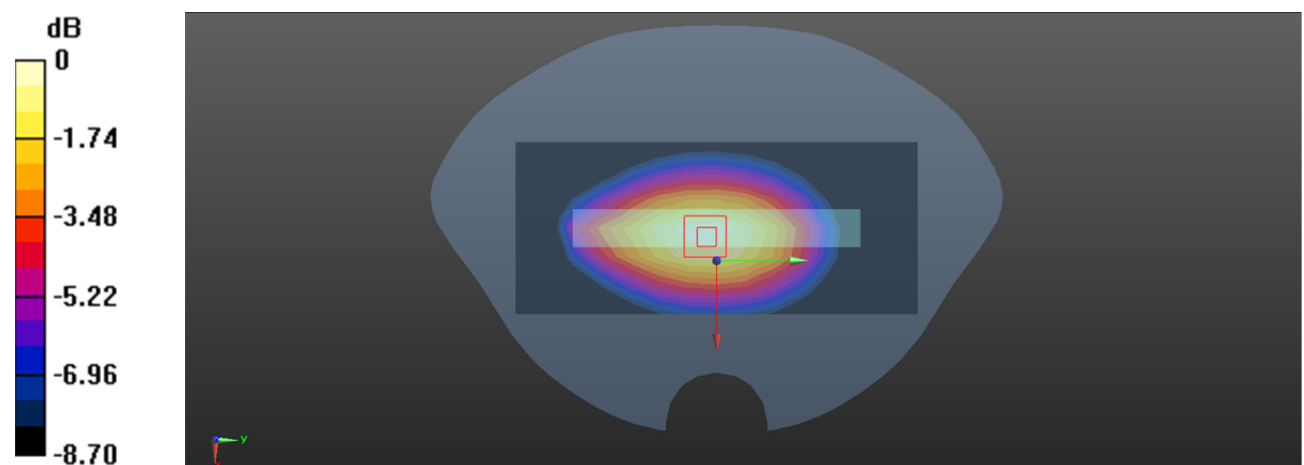

0 dB = 0.639 W/kg = -1.94 dBW/kg

Test Plot 8#: LTE Band 14 1RB Mid Limb Left**DUT: POS Terminal; Type: N750; Serial: 3BFH-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 793 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 793$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 41.556$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.2, 10.2, 10.2) @ 793 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Limb Left/LTE Band 14 1RB Mid/Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.55 W/kg

Limb Left/LTE Band 14 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.62 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 4.49 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.442 W/kg

Smallest distance from peaks to all points 3 dB below = 14.5 mm

Ratio of SAR at M2 to SAR at M1 = 60.6%

Maximum value of SAR (measured) = 2.41 W/kg

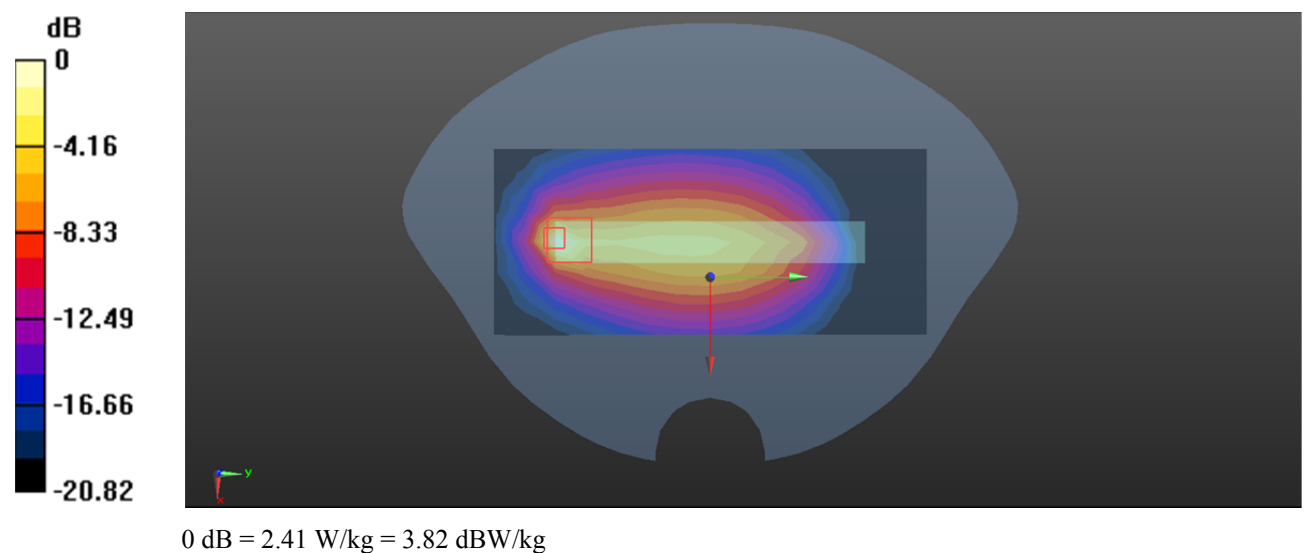

Test Plot 9#: LTE Band 25 1RB Mid Body Back**DUT: POS Terminal; Type: N750; Serial: 3BFH-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 40.06$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.12, 8.12, 8.12) @ 1882.5 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 25 1RB Mid/Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.915 W/kg

Body Back/LTE Band 25 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.80 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.618 W/kg; SAR(10 g) = 0.373 W/kg

Smallest distance from peaks to all points 3 dB below = 13.8 mm

Ratio of SAR at M2 to SAR at M1 = 54.7%

Maximum value of SAR (measured) = 0.894 W/kg

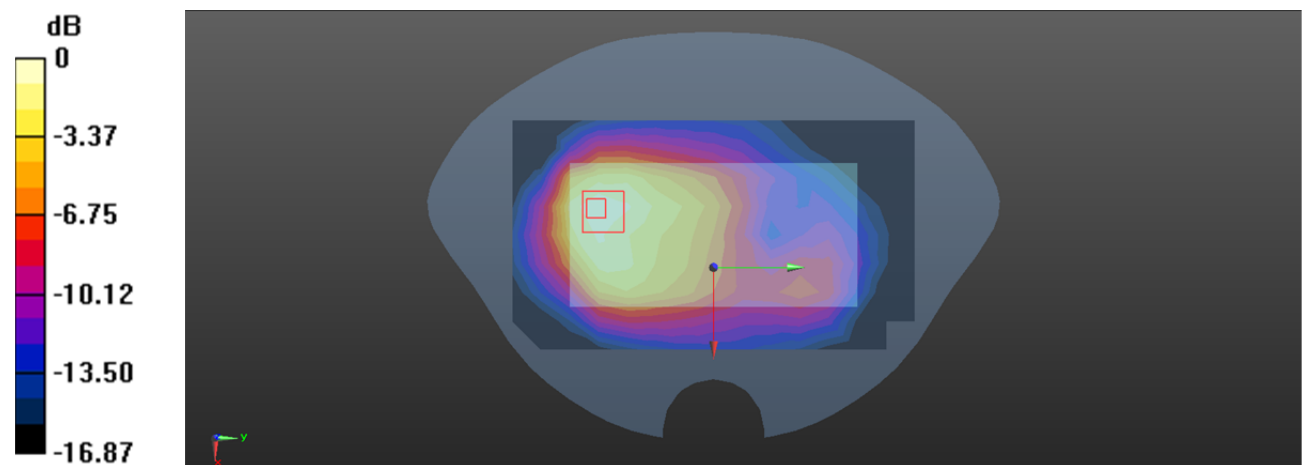

0 dB = 0.894 W/kg = -0.49 dBW/kg

Test Plot 10#: LTE Band 25 1RB Low Limb Back**DUT: POS Terminal; Type: N750; Serial: 3BFH-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 40.141$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.12, 8.12, 8.12) @ 1860 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Limb Back/LTE Band 25 1RB Low/Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 8.94 W/kg

Limb Back/LTE Band 25 1RB Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.43 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 13.7 W/kg

SAR(1 g) = 5.52 W/kg; SAR(10 g) = 2.62 W/kg

Smallest distance from peaks to all points 3 dB below = 16.4 mm

Ratio of SAR at M2 to SAR at M1 = 46%

Maximum value of SAR (measured) = 9.18 W/kg

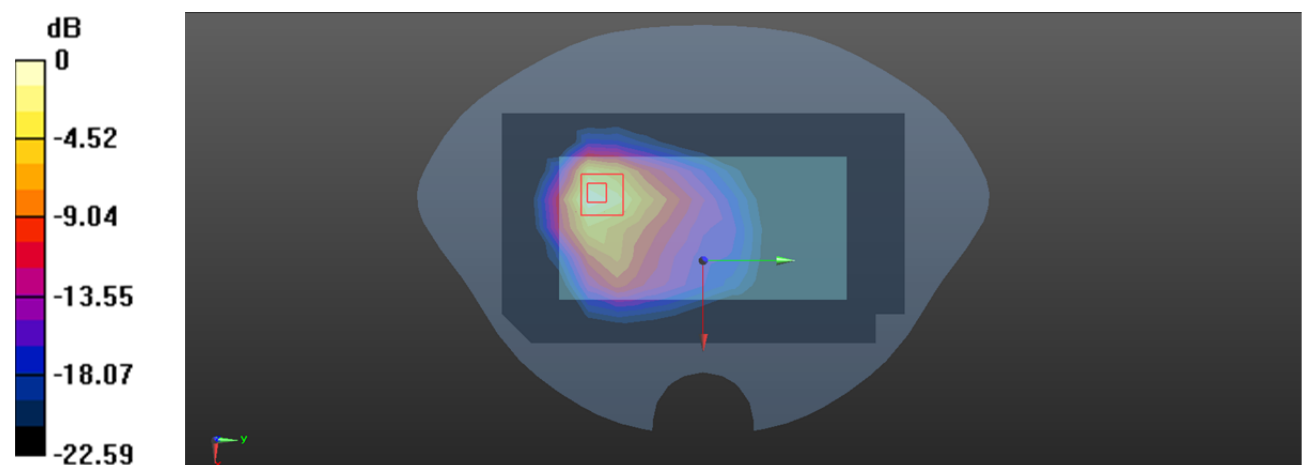

0 dB = 9.18 W/kg = 9.63 dBW/kg

Test Plot 11#: LTE Band 26 1RB Mid Body Left**DUT: POS Terminal; Type: N750; Serial: 3BFH-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 41.454$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.2, 10.2, 10.2) @ 836.5 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Left/LTE Band 26 1RB Mid/Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.457 W/kg

Body Left/LTE Band 26 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.08 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.532 W/kg

SAR(1 g) = 0.360 W/kg; SAR(10 g) = 0.253 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 68%

Maximum value of SAR (measured) = 0.470 W/kg

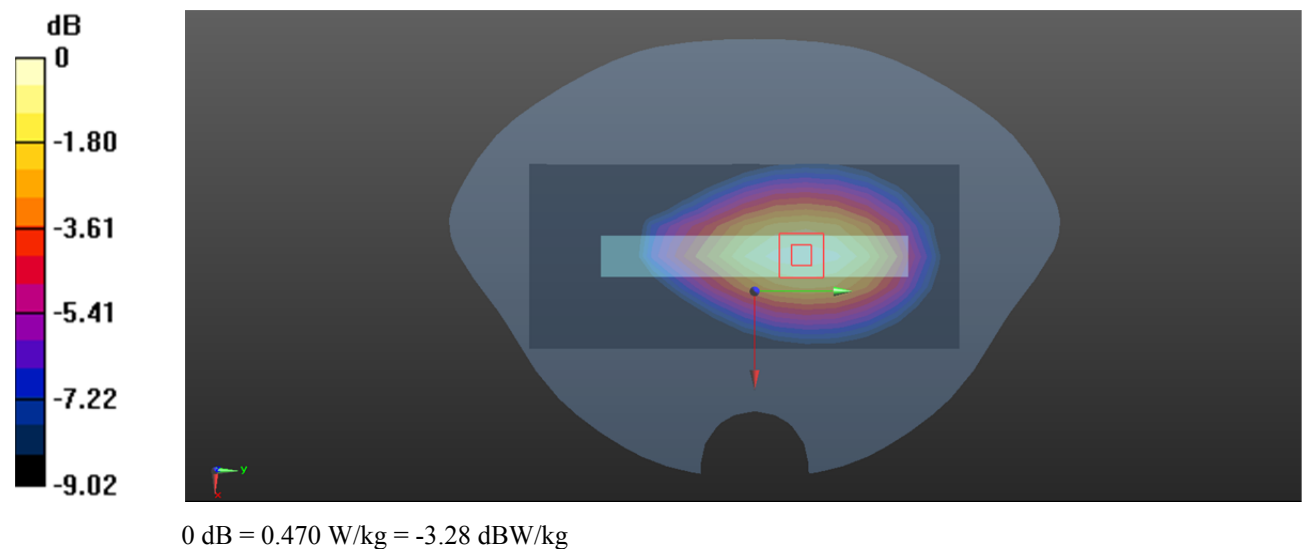

Test Plot 12#: LTE Band 26 1RB Mid Limb Left**DUT: POS Terminal; Type: N750; Serial: 3BFH-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 41.454$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.2, 10.2, 10.2) @ 836.5 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Limb Left/LTE Band 26 1RB Mid/Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.49 W/kg

Limb Left/LTE Band 26 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.84 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 3.19 W/kg

SAR(1 g) = 0.698 W/kg; SAR(10 g) = 0.290 W/kg

Smallest distance from peaks to all points 3 dB below = 14.5 mm

Ratio of SAR at M2 to SAR at M1 = 60.1%

Maximum value of SAR (measured) = 1.93 W/kg

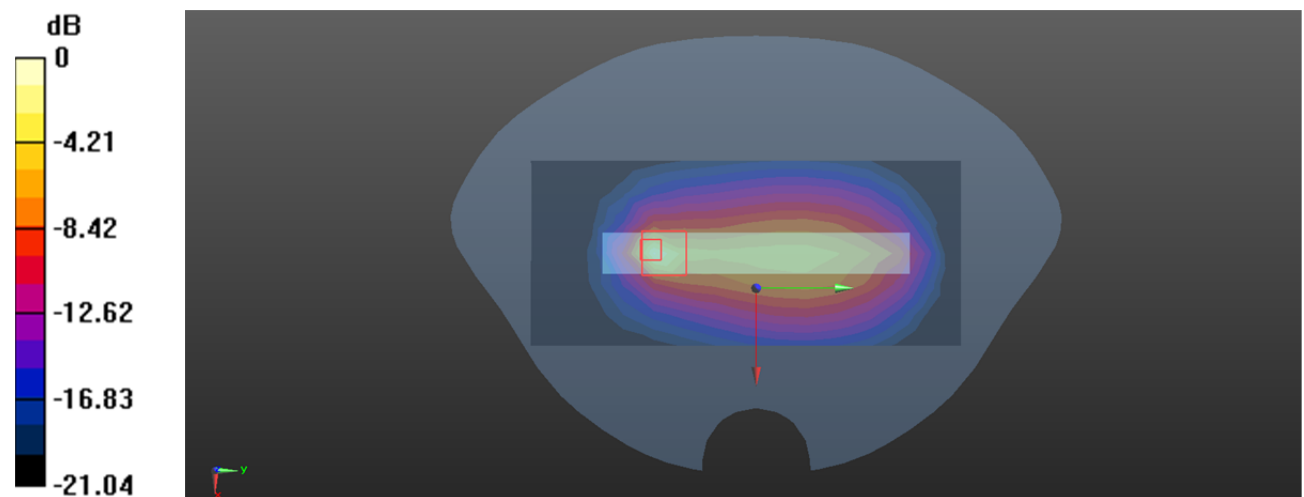

0 dB = 1.93 W/kg = 2.86 dBW/kg

Test Plot 13#: LTE Band 41 1RB Mid Body Back**DUT: POS Terminal; Type: N750; Serial: 3BFH-1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.975$ S/m; $\epsilon_r = 40.072$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.5, 7.5, 7.5) @ 2595 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 41 1RB Mid/Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.570 W/kg

Body Back/LTE Band 41 1RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.864 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 0.800 W/kg

SAR(1 g) = 0.435 W/kg; SAR(10 g) = 0.227 W/kg

Smallest distance from peaks to all points 3 dB below = 12 mm

Ratio of SAR at M2 to SAR at M1 = 54.6%

Maximum value of SAR (measured) = 0.671 W/kg

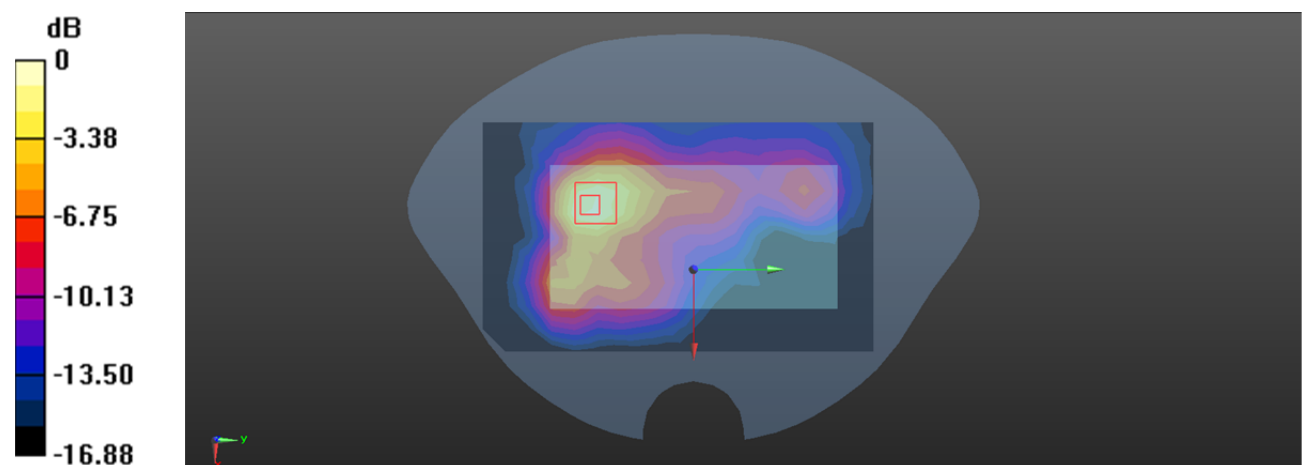

0 dB = 0.671 W/kg = -1.73 dBW/kg

Test Plot 14#: LTE Band 41 1RB Mid Limb Back**DUT: POS Terminal; Type: N750; Serial: 3BFH-1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.975$ S/m; $\epsilon_r = 40.072$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.5, 7.5, 7.5) @ 2595 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Limb Back/LTE Band 41 1RB Mid/Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 4.81 W/kg

Limb Back/LTE Band 41 1RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.711 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 6.43 W/kg

SAR(1 g) = 3.02 W/kg; SAR(10 g) = 1.32 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 47.8%

Maximum value of SAR (measured) = 5.18 W/kg

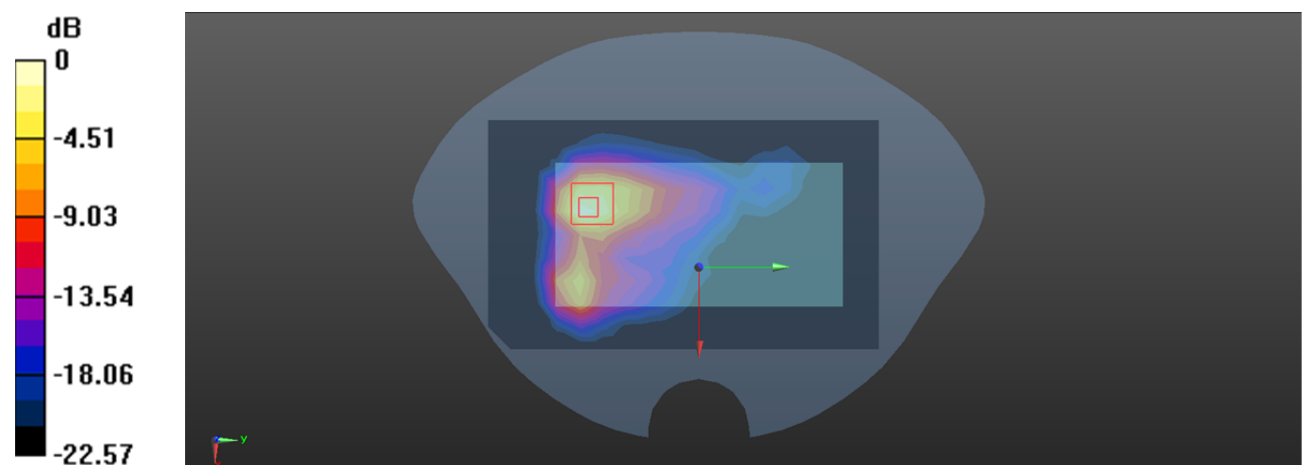

0 dB = 5.18 W/kg = 7.14 dBW/kg

Test Plot 15#: LTE Band 66 1RB Mid Body Back**DUT: POS Terminal; Type: N750; Serial: 3BFH-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.356$ S/m; $\epsilon_r = 39.734$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.45, 8.45, 8.45) @ 1745 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 66 1RB Mid/Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.569 W/kg

Body Back/LTE Band 66 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.462 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.713 W/kg

SAR(1 g) = 0.415 W/kg; SAR(10 g) = 0.266 W/kg

Smallest distance from peaks to all points 3 dB below = 14.8 mm

Ratio of SAR at M2 to SAR at M1 = 58.5%

Maximum value of SAR (measured) = 0.584 W/kg

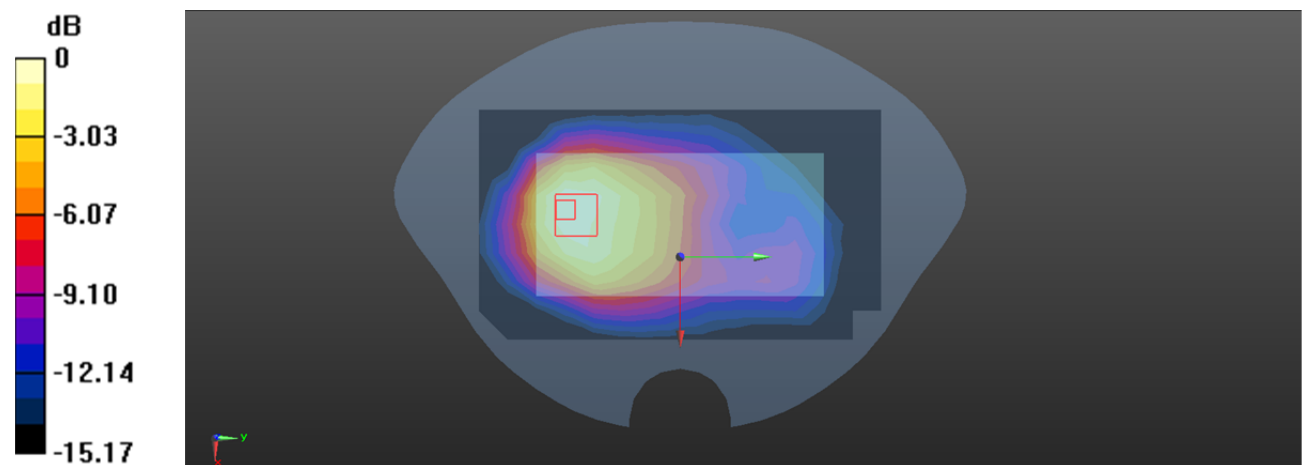

0 dB = 0.584 W/kg = -2.34 dBW/kg

Test Plot 16#: LTE Band 66 1RB High Limb Back**DUT: POS Terminal; Type: N750; Serial: 3BFH-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1770$ MHz; $\sigma = 1.379$ S/m; $\epsilon_r = 39.627$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.45, 8.45, 8.45) @ 1770 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Limb Back/LTE Band 66 1RB High/Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 7.74 W/kg

Limb Back/LTE Band 66 1RB High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.25 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 11.3 W/kg

SAR(1 g) = 4.79 W/kg; SAR(10 g) = 2.32 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 49.2%

Maximum value of SAR (measured) = 7.70 W/kg

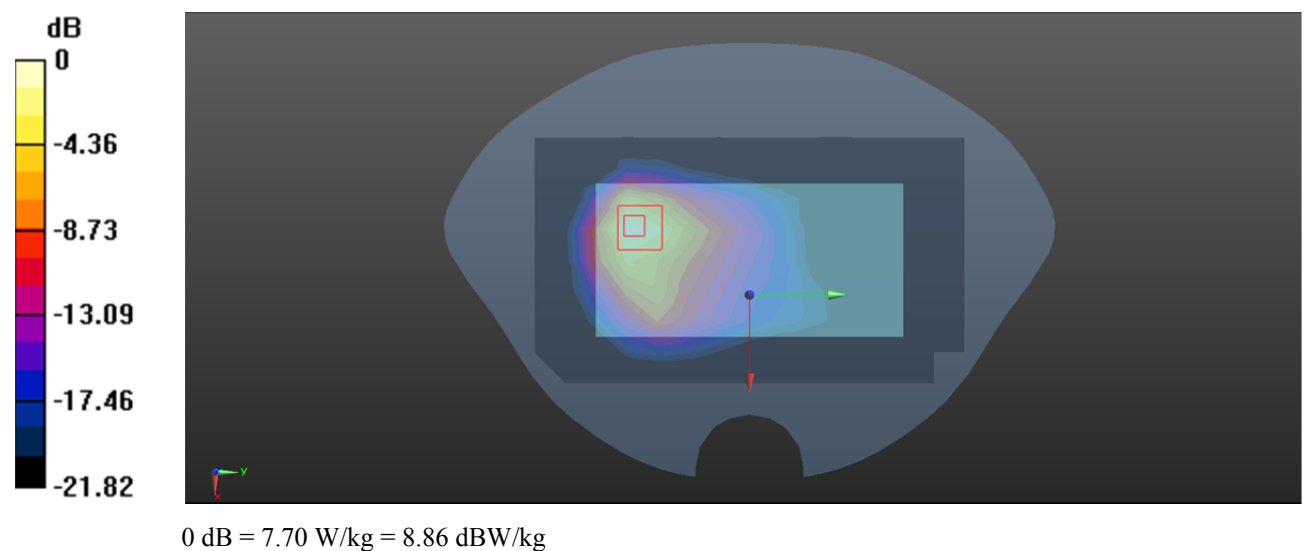

Test Plot 17#: LTE Band 71 1RB High Body Left**DUT: POS Terminal; Type: N750; Serial: 3BFH-1**


Communication System: UID 0, Generic FDD-LTE (0); Frequency: 688 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 688 \text{ MHz}$; $\sigma = 0.893 \text{ S/m}$; $\epsilon_r = 42.375$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.2, 10.2, 10.2) @ 688 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

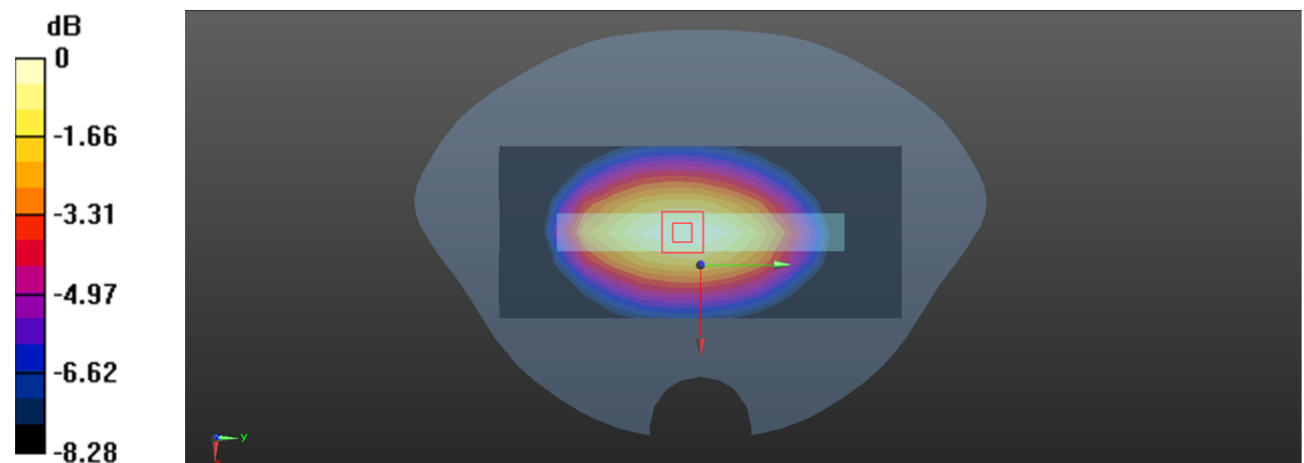Body Left/LTE Band 71 1RB High/Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.431 W/kg **Body Left/LTE Band 71 1RB High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 20.77 V/m ; Power Drift = -0.14 dB Peak SAR (extrapolated) = 0.487 W/kg **SAR(1 g) = 0.336 W/kg ; SAR(10 g) = 0.241 W/kg** Smallest distance from peaks to all points 3 dB below: Larger than measurement grid ($> 16 \text{ mm}$)Ratio of SAR at M2 to SAR at M1 = 69.2% Maximum value of SAR (measured) = 0.431 W/kg 0 dB = 0.431 W/kg = -3.66 dBW/kg

Test Plot 18#: LTE Band 71 1RB High Limb Left**DUT: POS Terminal; Type: N750; Serial: 3BFH-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 688 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 688$ MHz; $\sigma = 0.893$ S/m; $\epsilon_r = 42.375$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.2, 10.2, 10.2) @ 688 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Limb Left/LTE Band 71 1RB High/Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.26 W/kg

Limb Left/LTE Band 71 1RB High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.05 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 3.47 W/kg

SAR(1 g) = 0.796 W/kg; SAR(10 g) = 0.382 W/kg

Smallest distance from peaks to all points 3 dB below = 14.5 mm

Ratio of SAR at M2 to SAR at M1 = 51.7%

Maximum value of SAR (measured) = 2.28 W/kg

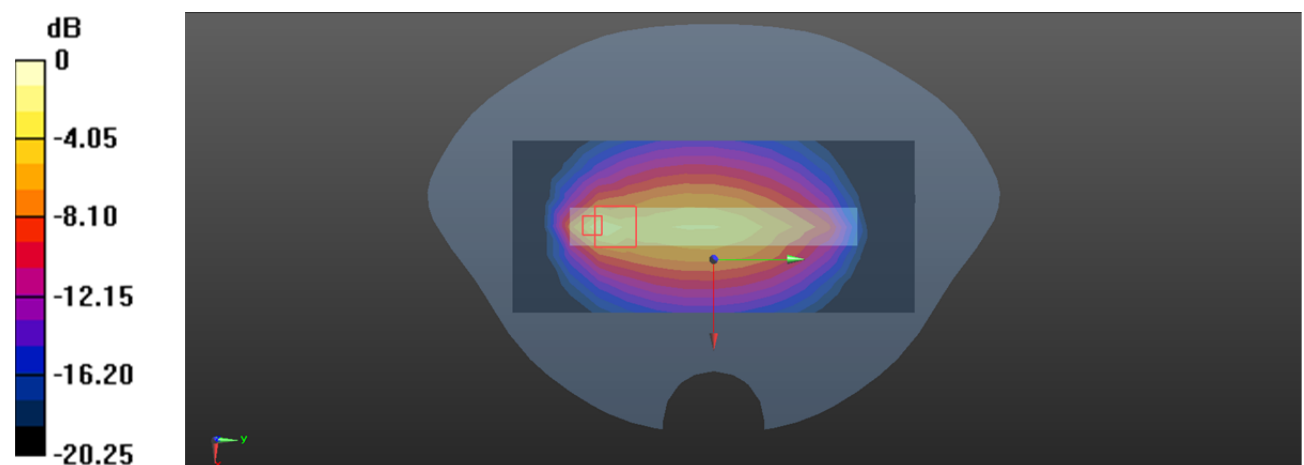

0 dB = 2.28 W/kg = 3.58 dBW/kg

Test Plot 19#: 2.4G WIFI High Body Front**DUT: POS Terminal; Type: N750; Serial: 3BFH-1**

Communication System: UID 0, 802.11b (0); Frequency: 2462 MHz; Duty Cycle: 1:1.01

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.809$ S/m; $\epsilon_r = 40.742$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.68, 7.68, 7.68) @ 2462 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Front/2.4G WIFI High/Area Scan (6x6x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.431 W/kg

Body Front/2.4G WIFI High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.790 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.604 W/kg

SAR(1 g) = 0.321 W/kg; SAR(10 g) = 0.159 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 54.7%

Maximum value of SAR (measured) = 0.500 W/kg

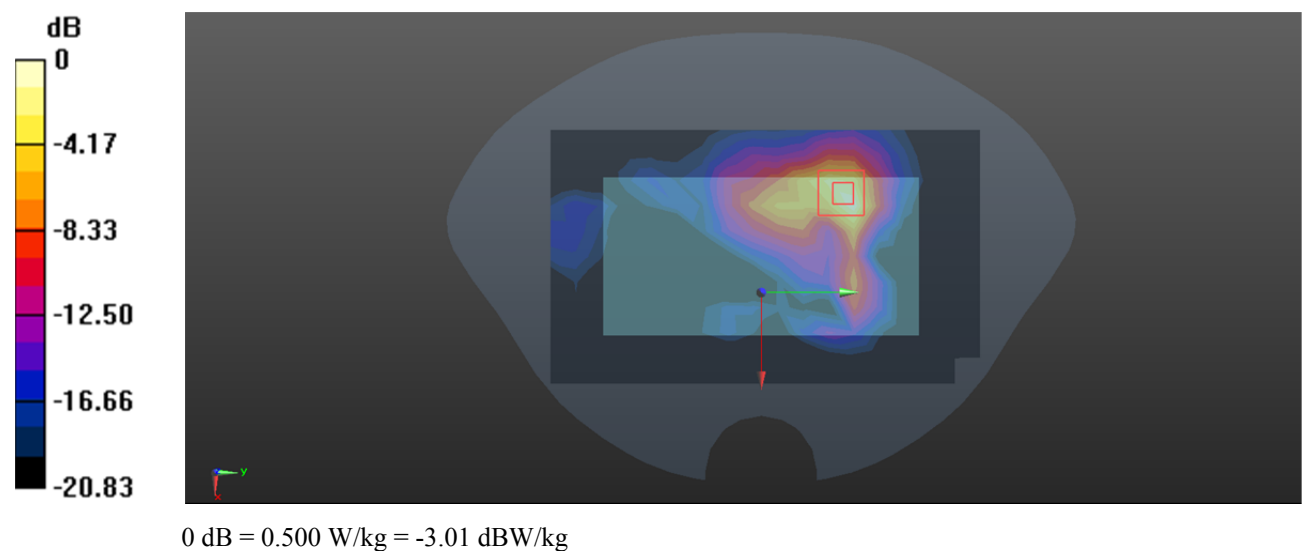

Test Plot 20#: 2.4G WIFI High Limb Front**DUT: POS Terminal; Type: N750; Serial: 3BFH-1**

Communication System: UID 0, 802.11b (0); Frequency: 2462 MHz; Duty Cycle: 1:1.01

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.809$ S/m; $\epsilon_r = 40.742$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.68, 7.68, 7.68) @ 2462 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Limb Front/2.4G WIFI High/Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.85 W/kg

Limb Front/2.4G WIFI High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.242 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 2.74 W/kg

SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.465 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 40.7%

Maximum value of SAR (measured) = 1.94 W/kg

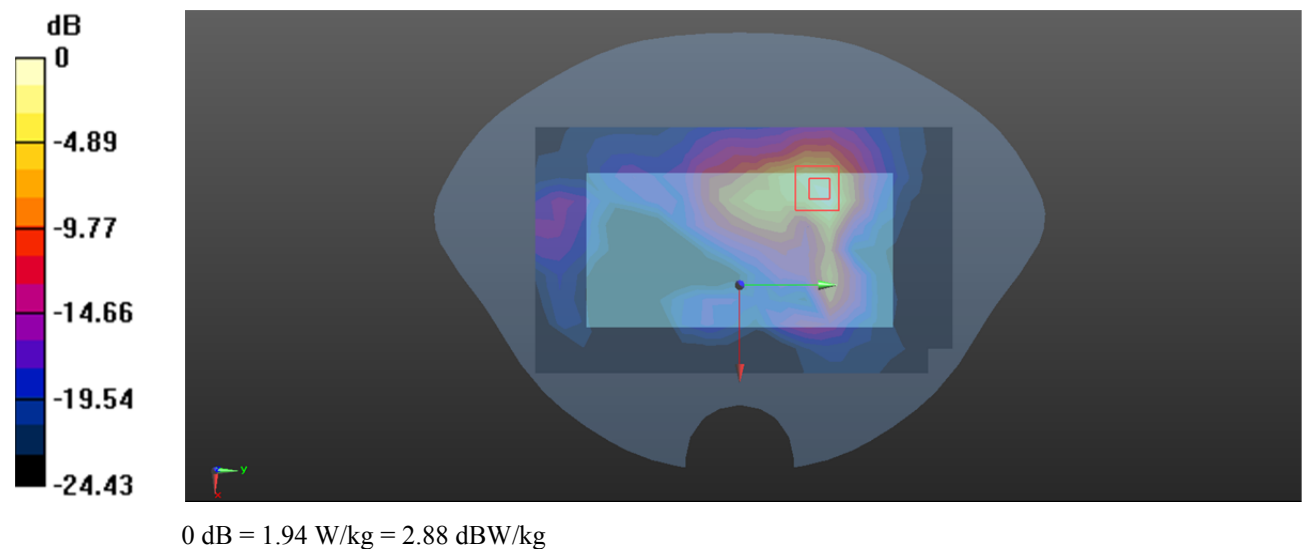

Test Plot 21#: 5.2G WIFI High Body Left**DUT: POS Terminal; Type: N750; Serial: 3BFH-1**

Communication System: UID 0, 802.11ac40 (0); Frequency: 5230 MHz; Duty Cycle: 1:1.04

Medium parameters used: $f = 5230$ MHz; $\sigma = 4.564$ S/m; $\epsilon_r = 36.828$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.5, 5.5, 5.5) @ 5230 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Left/5.2G WIFI High/Area Scan (8x22x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.657 W/kg

Body Left/5.2G WIFI High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.324 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.314 W/kg; SAR(10 g) = 0.119 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 57.7%

Maximum value of SAR (measured) = 0.683 W/kg

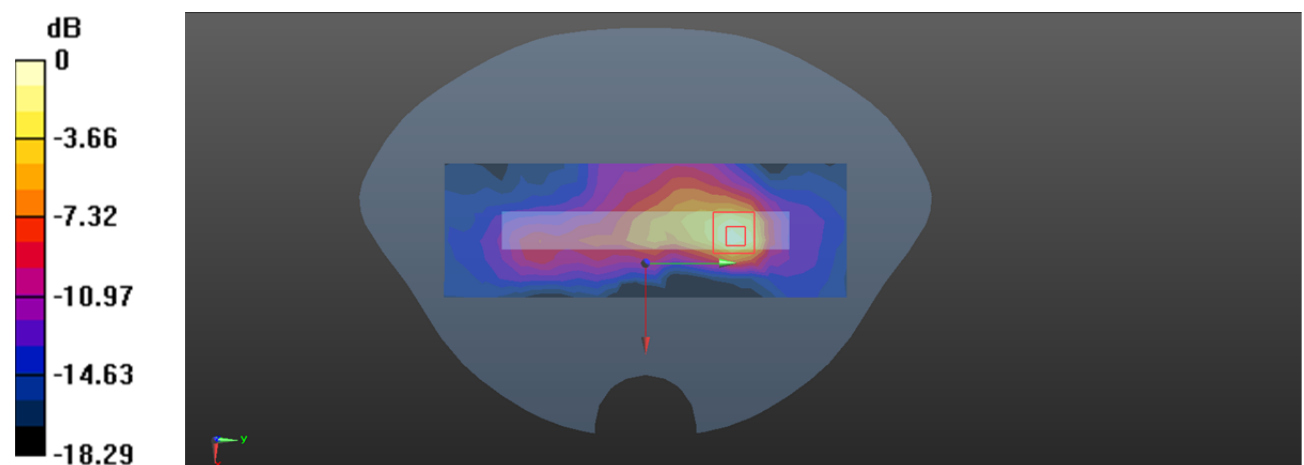

0 dB = 0.683 W/kg = -1.66 dBW/kg

Test Plot 22#: 5.2G WIFI High Limb Left**DUT: POS Terminal; Type: N750; Serial: 3BFH-1**

Communication System: UID 0, 802.11ac40 (0); Frequency: 5230 MHz; Duty Cycle: 1:1.04

Medium parameters used: $f = 5230$ MHz; $\sigma = 4.564$ S/m; $\epsilon_r = 36.828$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.5, 5.5, 5.5) @ 5230 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Limb Left/5.2G WIFI High/Area Scan (8x22x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 7.38 W/kg

Limb Left/5.2G WIFI High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.677 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 16.6 W/kg

SAR(1 g) = 3.3 W/kg; SAR(10 g) = 0.729 W/kg

Smallest distance from peaks to all points 3 dB below = 4.7 mm

Ratio of SAR at M2 to SAR at M1 = 52.6%

Maximum value of SAR (measured) = 8.73 W/kg

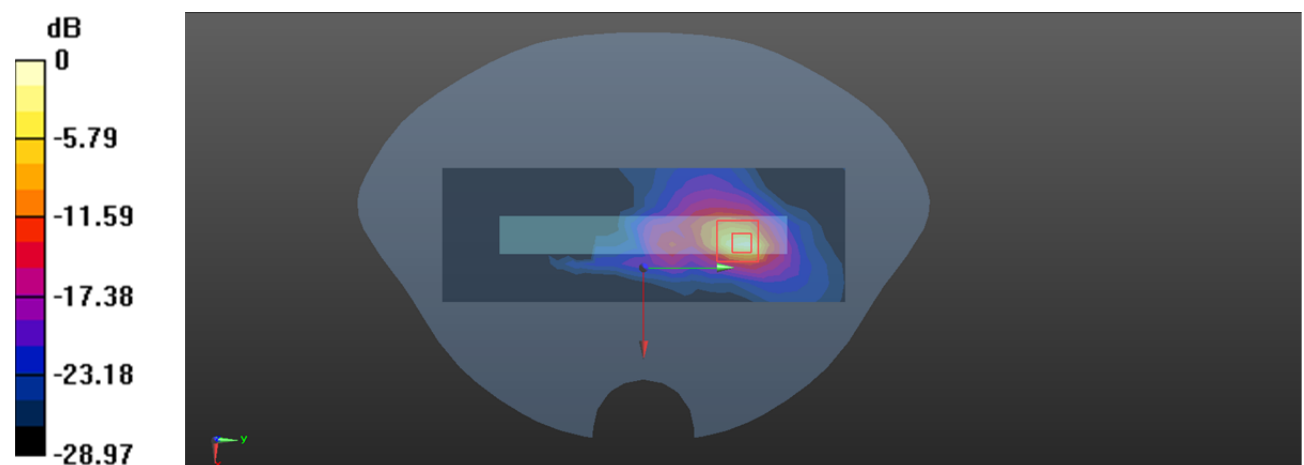

0 dB = 8.73 W/kg = 9.41 dBW/kg

Test Plot 23#: 5.3G WIFI Low Body Left**DUT: POS Terminal; Type: N750; Serial: 3BFH-1**

Communication System: UID 0, 802.11ac40 (0); Frequency: 5270 MHz; Duty Cycle: 1:1.04

Medium parameters used: $f = 5270$ MHz; $\sigma = 4.605$ S/m; $\epsilon_r = 36.662$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.5, 5.5, 5.5) @ 5270 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Left/5.3G WIFI Low/Area Scan (8x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.864 W/kg

Body Left/5.3G WIFI Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.794 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.430 W/kg; SAR(10 g) = 0.147 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 58.8%

Maximum value of SAR (measured) = 0.930 W/kg

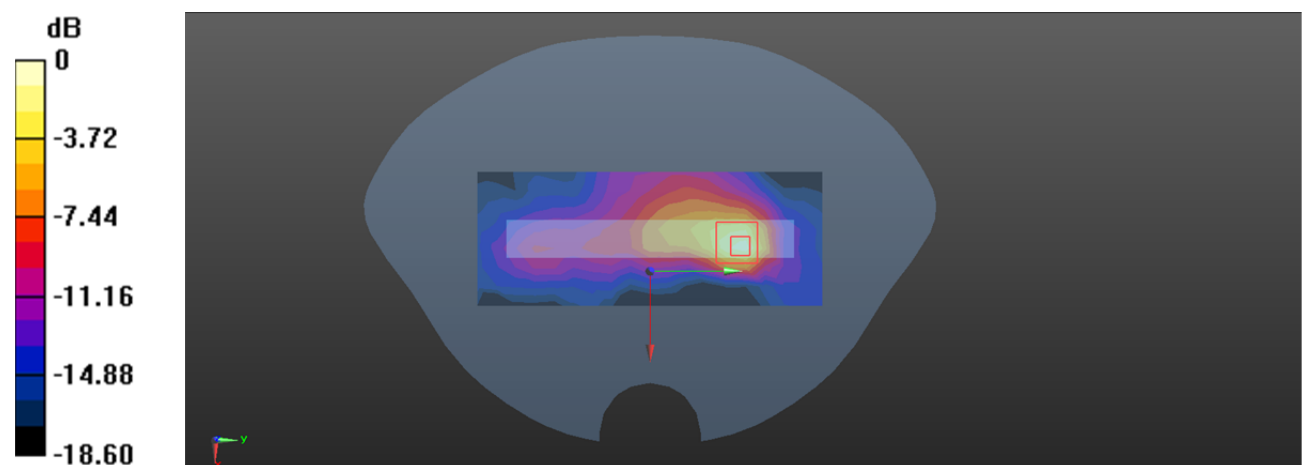

0 dB = 0.930 W/kg = -0.32 dBW/kg

Test Plot 24#: 5.3G WIFI Low Limb Left**DUT: POS Terminal; Type: N750; Serial: 3BFH-1**

Communication System: UID 0, 802.11ac40 (0); Frequency: 5270 MHz; Duty Cycle: 1:1.04

Medium parameters used: $f = 5270$ MHz; $\sigma = 4.605$ S/m; $\epsilon_r = 36.662$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.5, 5.5, 5.5) @ 5270 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Limb Left/5.3G WIFI Low/Area Scan (8x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 6.99 W/kg

Limb Left/5.3G WIFI Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.897 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 17.2 W/kg

SAR(1 g) = 3.18 W/kg; SAR(10 g) = 0.699 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 53.1%

Maximum value of SAR (measured) = 9.38 W/kg

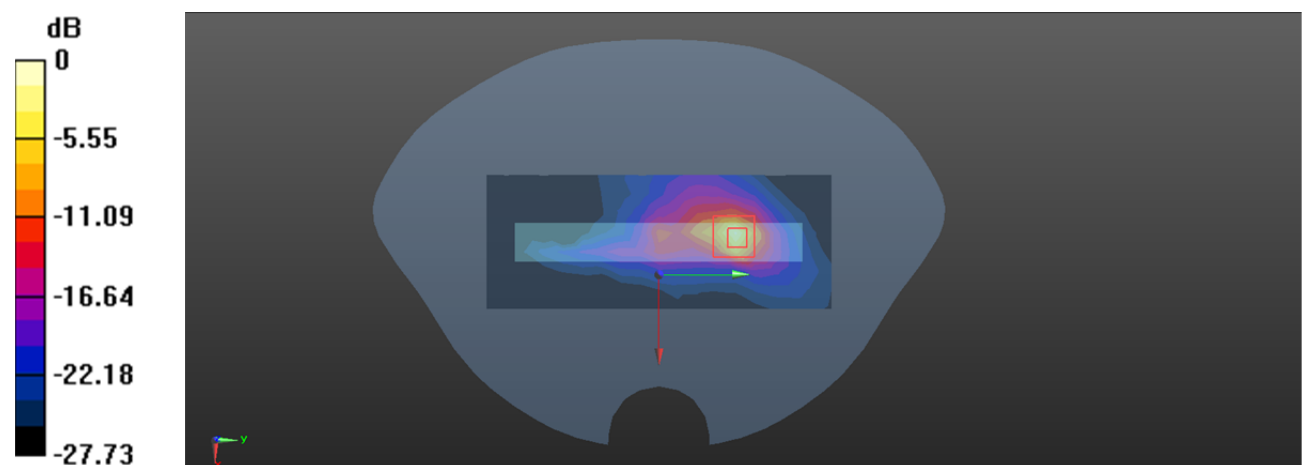

0 dB = 9.38 W/kg = 9.72 dBW/kg

Test Plot 25#: 5.6G WIFI Mid Body Left**DUT: POS Terminal; Type: N750; Serial: 3BFH-1**

Communication System: UID 0, 802.11ac40 (0); Frequency: 5550 MHz; Duty Cycle: 1:1.04

Medium parameters used: $f = 5550$ MHz; $\sigma = 4.952$ S/m; $\epsilon_r = 35.992$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.9, 4.9, 4.9) @ 5550 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Left/5.6G WIFI Mid/Area Scan (8x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.54 W/kg

Body Left/5.6G WIFI Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.414 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 3.08 W/kg

SAR(1 g) = 0.818 W/kg; SAR(10 g) = 0.302 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 53.8%

Maximum value of SAR (measured) = 1.84 W/kg

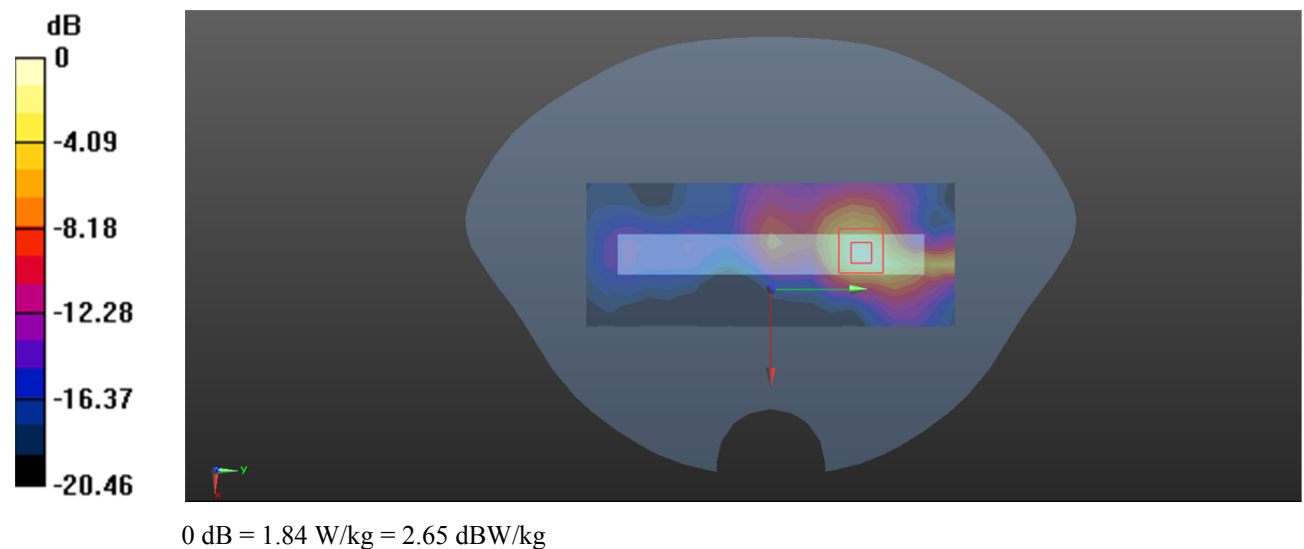

Test Plot 26#: 5.6G WIFI High Limb Left**DUT: POS Terminal; Type: N750; Serial: 3BFH-1**

Communication System: UID 0, 802.11ac40 (0); Frequency: 5670 MHz; Duty Cycle: 1:1.04

Medium parameters used: $f = 5670$ MHz; $\sigma = 5.084$ S/m; $\epsilon_r = 35.724$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.9, 4.9, 4.9) @ 5670 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Limb Left/5.6G WIFI High/Area Scan (8x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 12.4 W/kg

Limb Left/5.6G WIFI High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 11.24 V/m; Power Drift = 0.20 dB


Peak SAR (extrapolated) = 37.0 W/kg

SAR(1 g) = 6.09 W/kg; SAR(10 g) = 1.31 W/kg

Smallest distance from peaks to all points 3 dB below = 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 51.7%

Maximum value of SAR (measured) = 18.4 W/kg

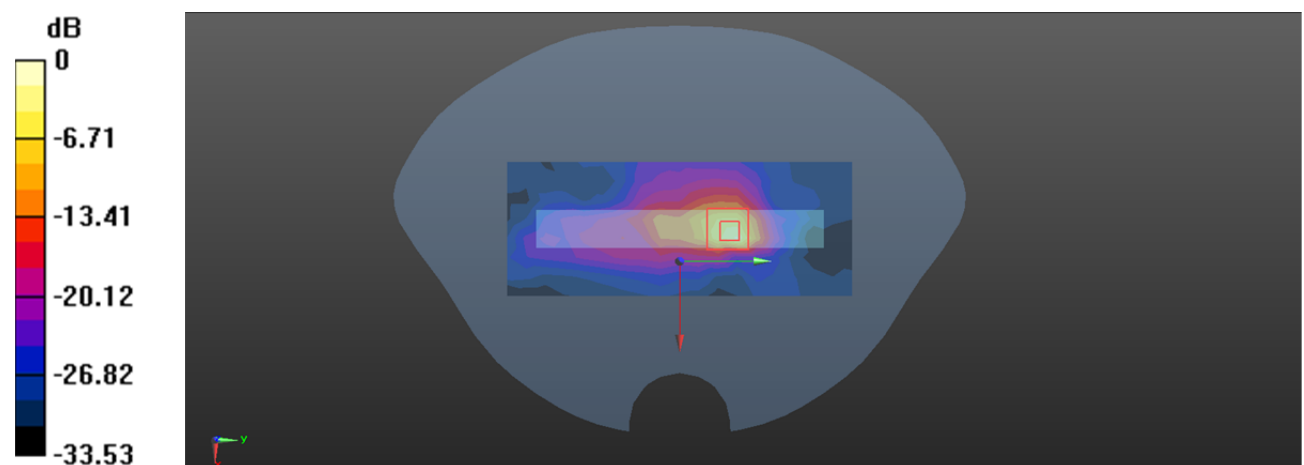

0 dB = 18.4 W/kg = 12.65 dBW/kg

Test Plot 27#: 5.8G WIFI High Body Left**DUT: POS Terminal; Type: N750; Serial: 3BFH-1**

Communication System: UID 0, 802.11ac40 (0); Frequency: 5795 MHz; Duty Cycle: 1:1.04

Medium parameters used: $f = 5795$ MHz; $\sigma = 5.25$ S/m; $\epsilon_r = 35.468$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.02, 5.02, 5.02) @ 5795 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Left/5.8G WIFI High/Area Scan (8x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.86 W/kg

Body Left/5.8G WIFI High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.160 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 3.77 W/kg

SAR(1 g) = 0.917 W/kg; SAR(10 g) = 0.322 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 51.3%

Maximum value of SAR (measured) = 2.14 W/kg

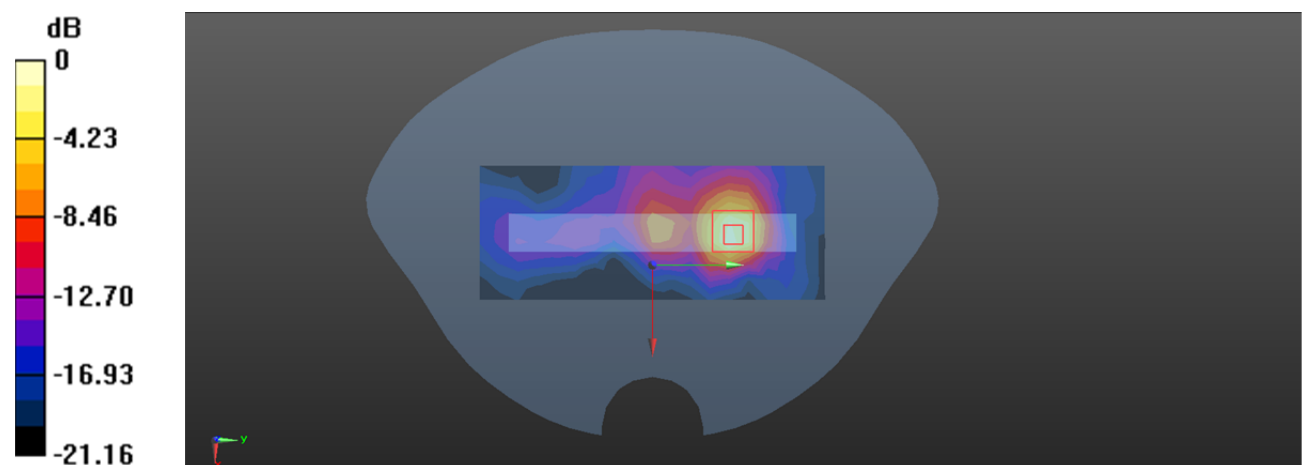

0 dB = 2.14 W/kg = 3.30 dBW/kg

Test Plot 28#: 5.8G WIFI High Limb Left**DUT: POS Terminal; Type: N750; Serial: 3BFH-1**

Communication System: UID 0, 802.11ac40 (0); Frequency: 5795 MHz; Duty Cycle: 1:1.04

Medium parameters used: $f = 5795$ MHz; $\sigma = 5.25$ S/m; $\epsilon_r = 35.468$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.02, 5.02, 5.02) @ 5795 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Limb Left/5.8G WIFI High/Area Scan (8x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 7.38 W/kg

Limb Left/5.8G WIFI High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 8.509 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 32.3 W/kg

SAR(1 g) = 5.33 W/kg; SAR(10 g) = 1.16 W/kg

Smallest distance from peaks to all points 3 dB below = 4.7 mm

Ratio of SAR at M2 to SAR at M1 = 47.5%

Maximum value of SAR (measured) = 14.5 W/kg

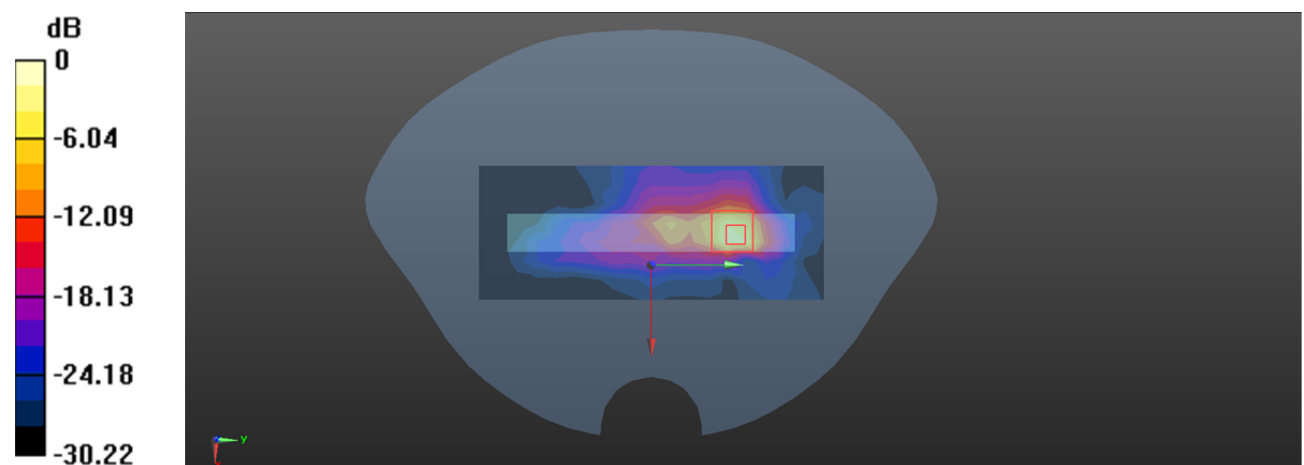

0 dB = 14.5 W/kg = 11.61 dBW/kg

Test Plot 29#: BT High Body Left**DUT: POS Terminal; Type: N750; Serial: 3BFH-1**

Communication System: UID 0, Bluetooth(8DPSK) (0); Frequency: 2480 MHz; Duty Cycle: 1:1.3

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.832$ S/m; $\epsilon_r = 40.679$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.68, 7.68, 7.68) @ 2480 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Left/BT High/Area Scan (7x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0945 W/kg

Body Left/BT High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.507 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.119 W/kg

SAR(1 g) = 0.061 W/kg; SAR(10 g) = 0.039 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 61.4%

Maximum value of SAR (measured) = 0.0916 W/kg

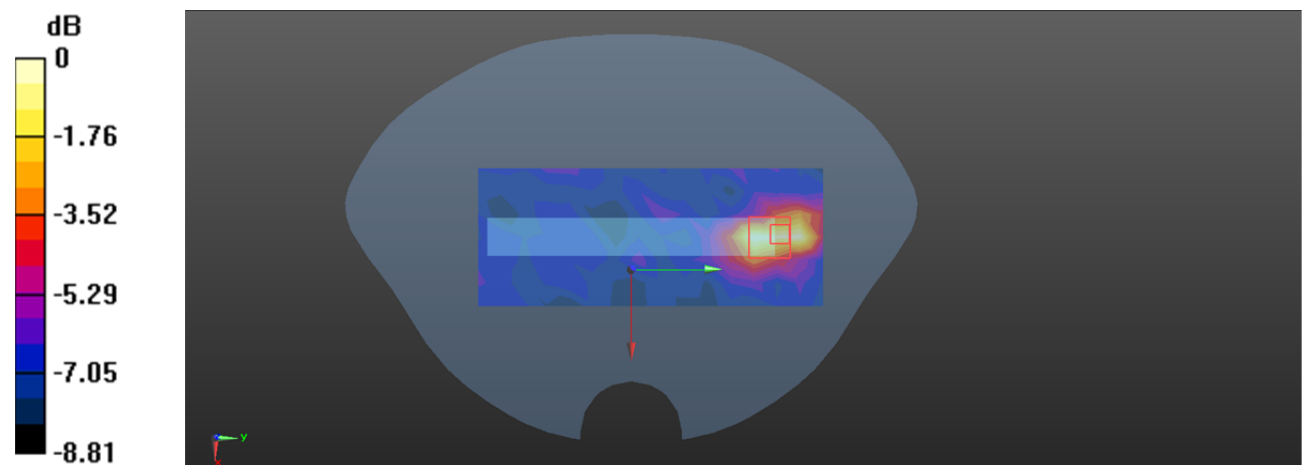

0 dB = 0.0916 W/kg = -10.38 dBW/kg

Test Plot 30#: BT Low Limb Left**DUT: POS Terminal; Type: N750; Serial: 3BFH-1**

Communication System: UID 0, Bluetooth(8DPSK) (0); Frequency: 2402 MHz; Duty Cycle: 1:1.3

Medium parameters used: $f = 2402$ MHz; $\sigma = 1.744$ S/m; $\epsilon_r = 40.939$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.68, 7.68, 7.68) @ 2402 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2025/2/17
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Limb Left/BT Low/Area Scan (7x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.106 W/kg

Limb Left/BT Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.175 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.199 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.029 W/kg

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 37.2%

Maximum value of SAR (measured) = 0.143 W/kg

