

Test Plot 1#: LTE Band 7 1RB High Body Back**DUT: POS Terminal; Type: S30; Serial: 3J9E-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.96$ S/m; $\epsilon_r = 38.426$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.5, 7.5, 7.5) @ 2560 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 7 1RB High/Area Scan (11x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.42 W/kg

Body Back/LTE Band 7 1RB High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.664 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 2.01 W/kg

SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.579 W/kg

Smallest distance from peaks to all points 3 dB below = 11.7 mm

Ratio of SAR at M2 to SAR at M1 = 56.8%

Maximum value of SAR (measured) = 1.41 W/kg

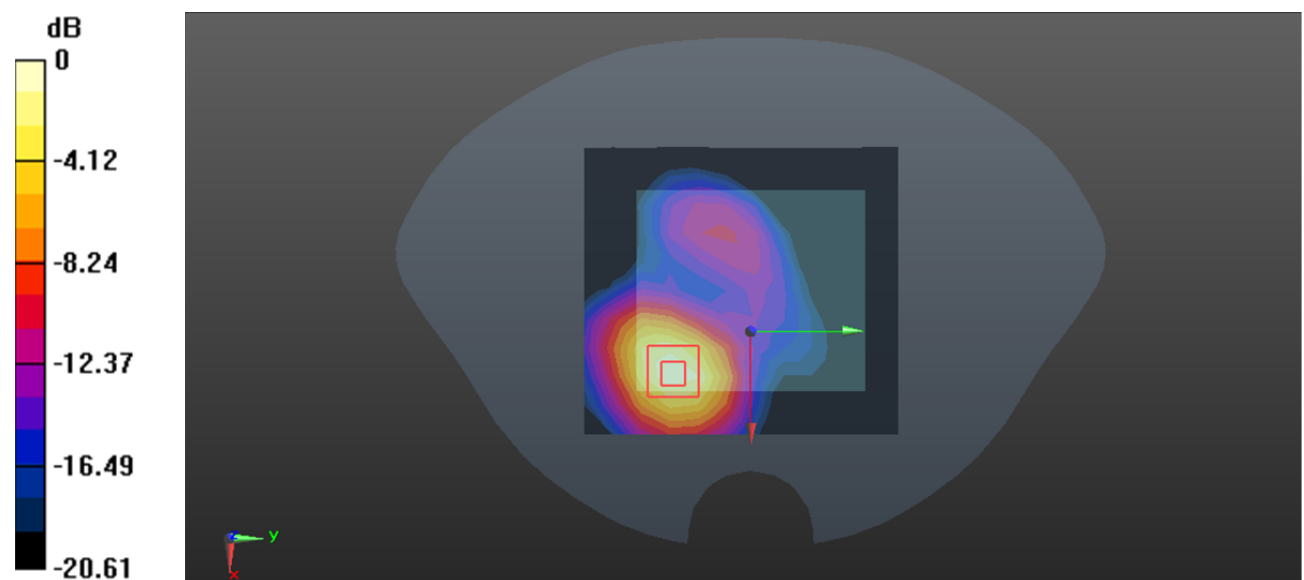

0 dB = 1.41 W/kg = 1.49 dBW/kg

Test Plot 2#: LTE Band 7 100%RB Low Limb Back**DUT: POS Terminal; Type: S30; Serial: 3J9E-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 1.896$ S/m; $\epsilon_r = 38.712$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.5, 7.5, 7.5) @ 2510 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Limb Back/LTE Band 7 100%RB Low/Area Scan (11x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 6.98 W/kg

Limb Back/LTE Band 7 100%RB Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.156 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 11.9 W/kg

SAR(1 g) = 4.94 W/kg; SAR(10 g) = 2.17 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 42%

Maximum value of SAR (measured) = 6.90 W/kg

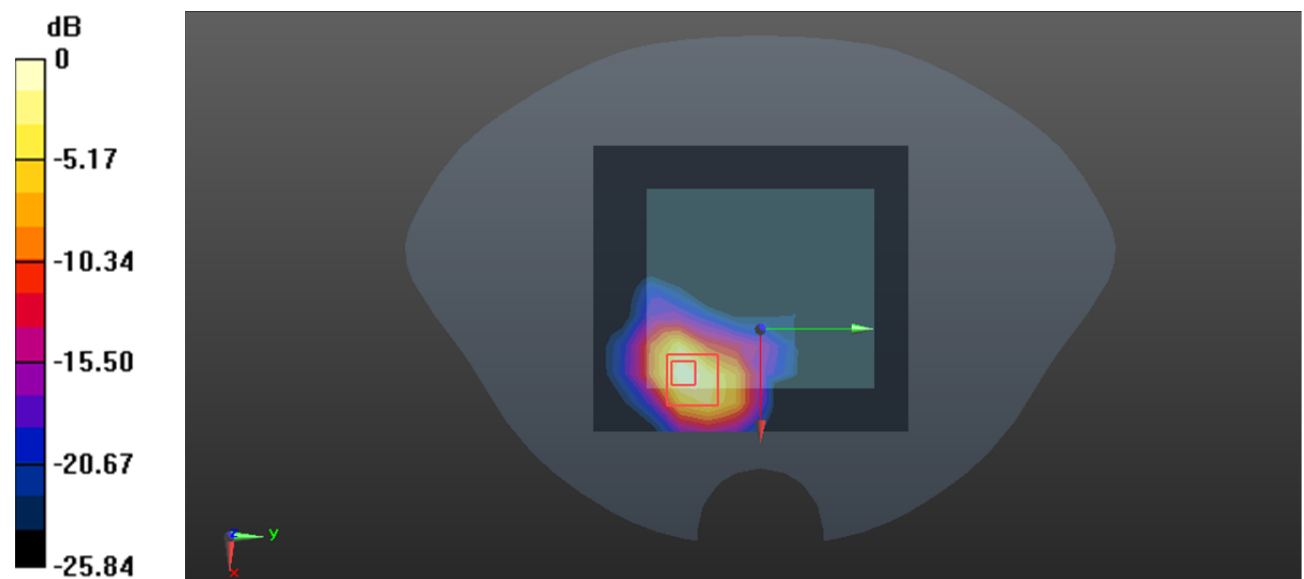

0 dB = 6.90 W/kg = 8.39 dBW/kg

Test Plot 3#: LTE Band 12 1RB Mid Body Back**DUT: POS Terminal; Type: S30; Serial: 3J9E-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.864$ S/m; $\epsilon_r = 42.808$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.2, 10.2, 10.2) @ 707.5 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 12 1RB Mid/Area Scan (9x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.278 W/kg

Body Back/LTE Band 12 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.44 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.382 W/kg

SAR(1 g) = 0.256 W/kg; SAR(10 g) = 0.183 W/kg

Smallest distance from peaks to all points 3 dB below = 20.9 mm

Ratio of SAR at M2 to SAR at M1 = 69.8%

Maximum value of SAR (measured) = 0.291 W/kg

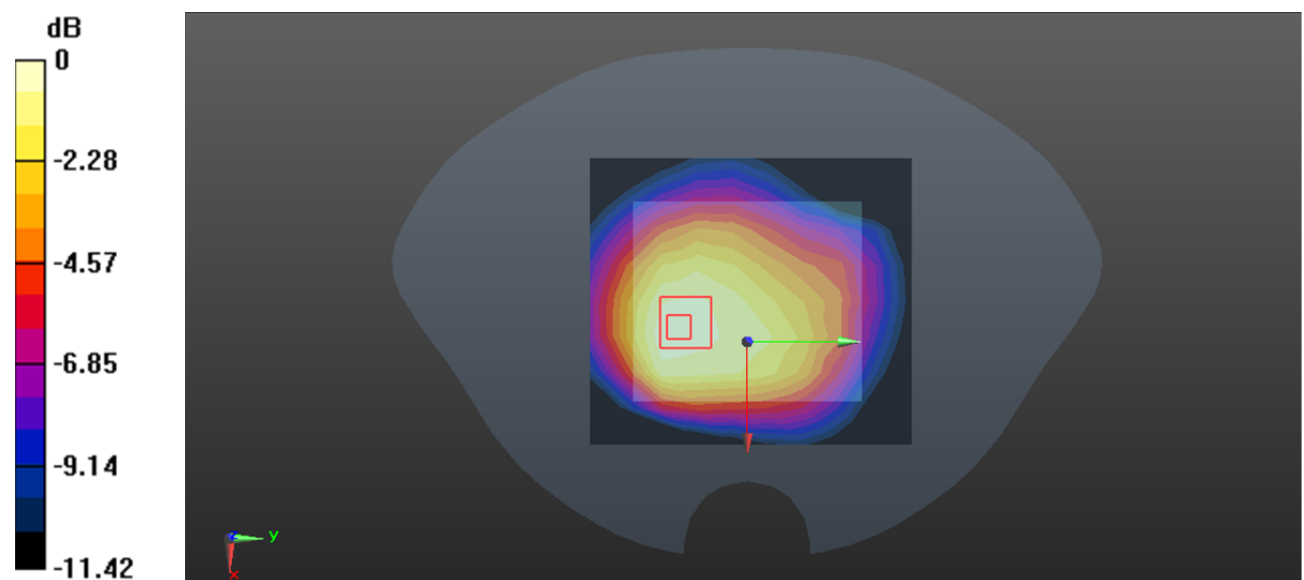

0 dB = 0.291 W/kg = -5.36 dBW/kg

Test Plot 4#: LTE Band 12 1RB Mid Limb Back**DUT: POS Terminal; Type: S30; Serial: 3J9E-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.864$ S/m; $\epsilon_r = 42.808$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.2, 10.2, 10.2) @ 707.5 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Limb Back/LTE Band 12 1RB Mid/Area Scan (9x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.93 W/kg

Limb Back/LTE Band 12 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.09 V/m; Power Drift = 0.20 dB


Peak SAR (extrapolated) = 5.90 W/kg

SAR(1 g) = 2.04 W/kg; SAR(10 g) = 0.936 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 42.7%

Maximum value of SAR (measured) = 2.59 W/kg

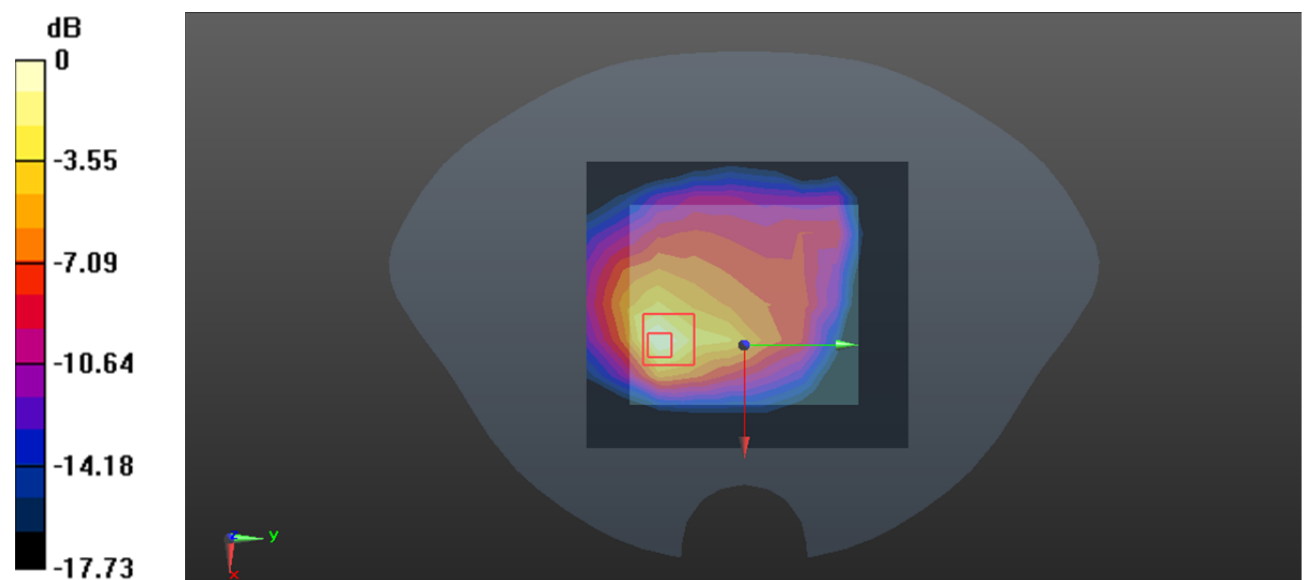

0 dB = 2.59 W/kg = 4.13 dBW/kg

Test Plot 5#: LTE Band 13 1RB Mid Body Bottom**DUT: POS Terminal; Type: S30; Serial: 3J9E-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.874 \text{ S/m}$; $\epsilon_r = 41.34$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.2, 10.2, 10.2) @ 782 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Bottom/LTE Band 13 1RB Mid/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.336 W/kg

Body Bottom/LTE Band 13 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.96 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.455 W/kg

SAR(1 g) = 0.297 W/kg; SAR(10 g) = 0.190 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 66.6%

Maximum value of SAR (measured) = 0.352 W/kg

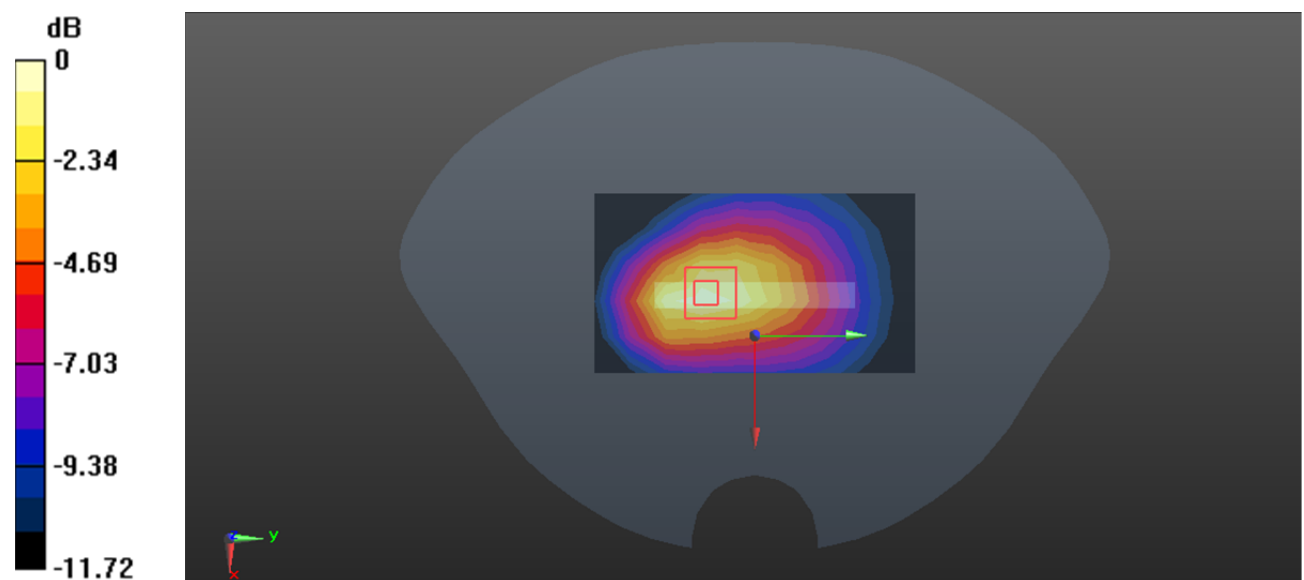

0 dB = 0.352 W/kg = -4.53 dBW/kg

Test Plot 6#: LTE Band 13 1RB Mid Limb Bottom**DUT: POS Terminal; Type: S30; Serial: 3J9E-1**


Communication System: UID 0, Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.874 \text{ S/m}$; $\epsilon_r = 41.34$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.2, 10.2, 10.2) @ 782 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

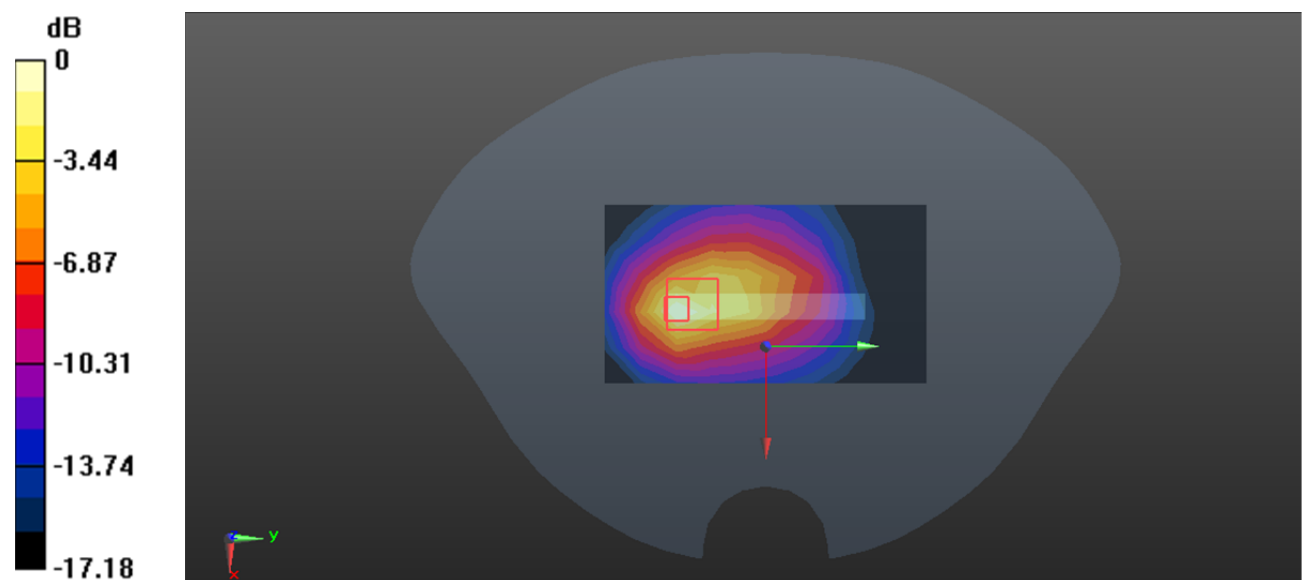Limb Bottom/LTE Band 13 1RB Mid/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 1.87 W/kg **Limb Bottom/LTE Band 13 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 26.68 V/m ; Power Drift = 0.09 dB Peak SAR (extrapolated) = 3.52 W/kg **SAR(1 g) = 1.36 W/kg ; SAR(10 g) = 0.686 W/kg** Smallest distance from peaks to all points 3 dB below = 8.6 mm Ratio of SAR at M2 to SAR at M1 = 48.7% Maximum value of SAR (measured) = 1.73 W/kg 0 dB = $1.73 \text{ W/kg} = 2.38 \text{ dBW/kg}$

Test Plot 7#: LTE Band 14 1RB Mid Body Bottom**DUT: POS Terminal; Type: S30; Serial: 3J9E-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 793 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 793$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 41.123$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.2, 10.2, 10.2) @ 793 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Bottom/LTE Band 14 1RB Mid/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.269 W/kg

Body Bottom/LTE Band 14 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.42 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.373 W/kg

SAR(1 g) = 0.246 W/kg; SAR(10 g) = 0.156 W/kg

Smallest distance from peaks to all points 3 dB below = 15.8 mm

Ratio of SAR at M2 to SAR at M1 = 66.1%

Maximum value of SAR (measured) = 0.293 W/kg

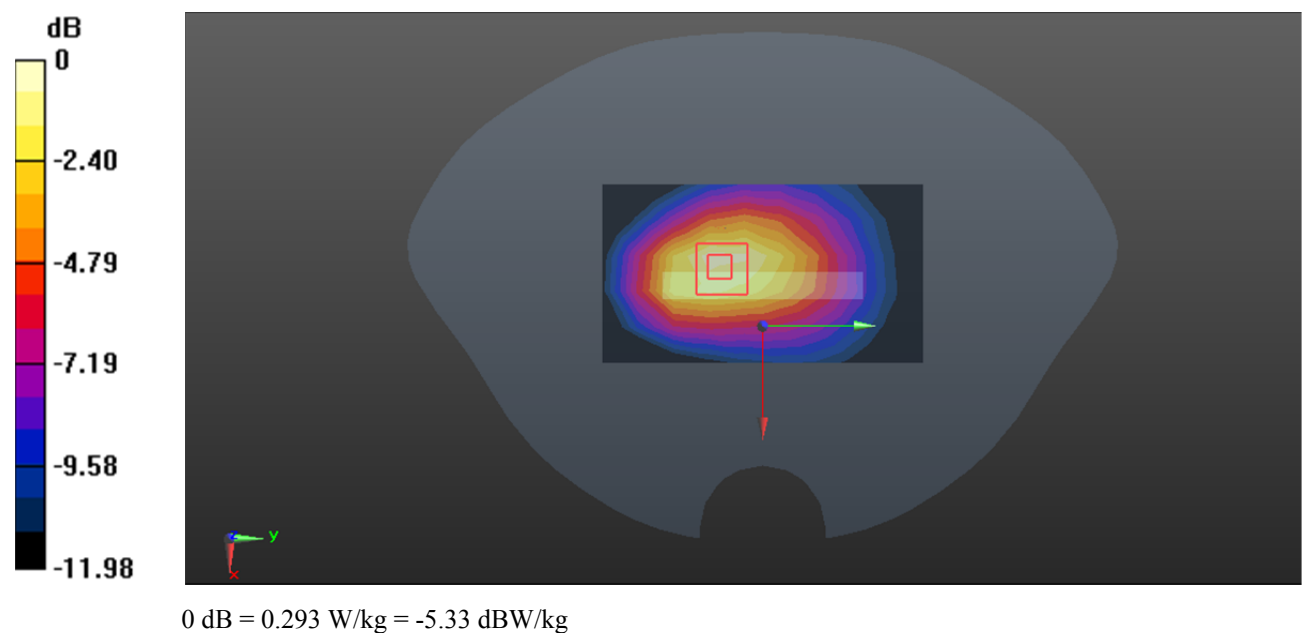

Test Plot 8#: LTE Band 14 1RB Mid Limb Bottom**DUT: POS Terminal; Type: S30; Serial: 3J9E-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 793 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 793$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 41.123$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.2, 10.2, 10.2) @ 793 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Limb Bottom/LTE Band 14 1RB Mid/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.22 W/kg

Limb Bottom/LTE Band 14 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.02 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 2.98 W/kg

SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.615 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 41.9%

Maximum value of SAR (measured) = 1.72 W/kg

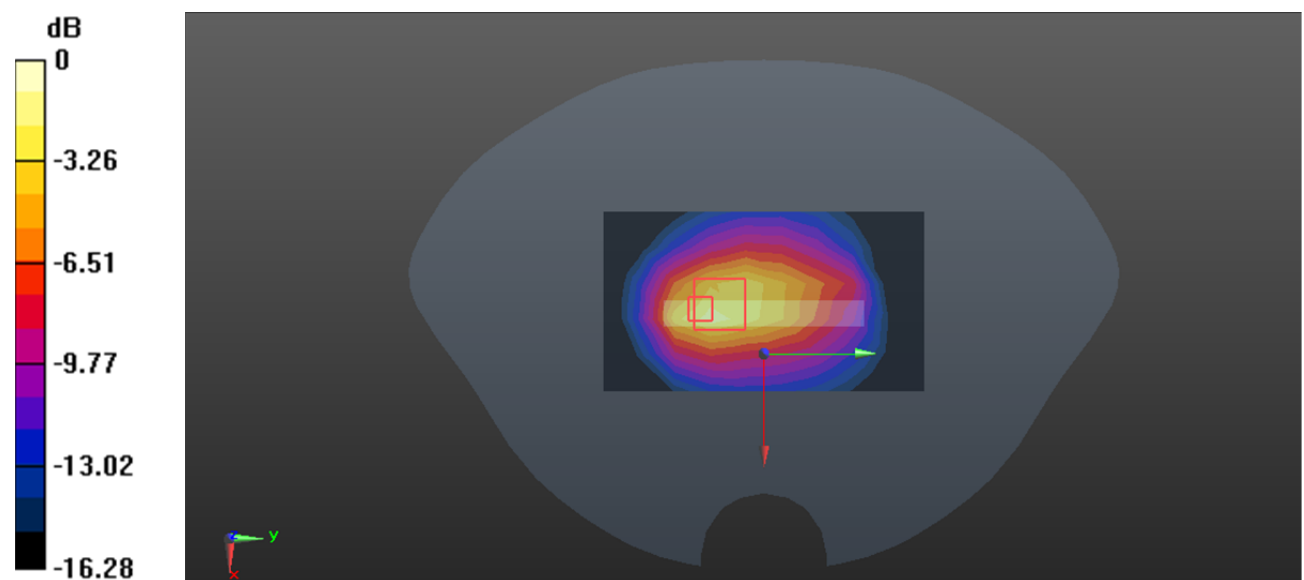

0 dB = 1.72 W/kg = 2.36 dBW/kg

Test Plot 9#: LTE Band 25 1RB Low Body Bottom**DUT: POS Terminal; Type: S30; Serial: 3J9E-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.347$ S/m; $\epsilon_r = 39.656$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.12, 8.12, 8.12) @ 1860 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Bottom/LTE Band 25 1RB Low/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.25 W/kg

Body Bottom/LTE Band 25 1RB Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.56 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 1.69 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.556 W/kg

Smallest distance from peaks to all points 3 dB below = 12.5 mm

Ratio of SAR at M2 to SAR at M1 = 61.7%

Maximum value of SAR (measured) = 1.25 W/kg

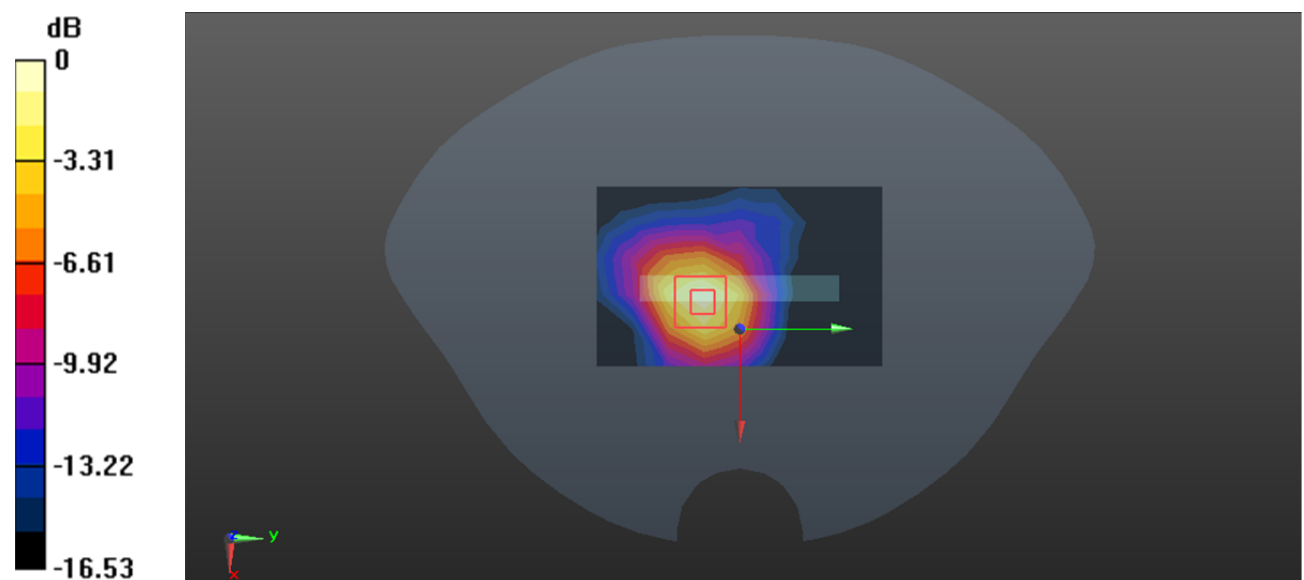

0 dB = 1.25 W/kg = 0.97 dBW/kg

Test Plot 10#: LTE Band 25 1RB Low Limb Bottom**DUT: POS Terminal; Type: S30; Serial: 3J9E-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.347$ S/m; $\epsilon_r = 39.656$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.12, 8.12, 8.12) @ 1860 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Limb Bottom/LTE Band 25 1RB Low/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 7.49 W/kg

Limb Bottom/LTE Band 25 1RB Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 50.56 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 11.7 W/kg

SAR(1 g) = 6.07 W/kg; SAR(10 g) = 2.9 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 53.6%

Maximum value of SAR (measured) = 7.67 W/kg

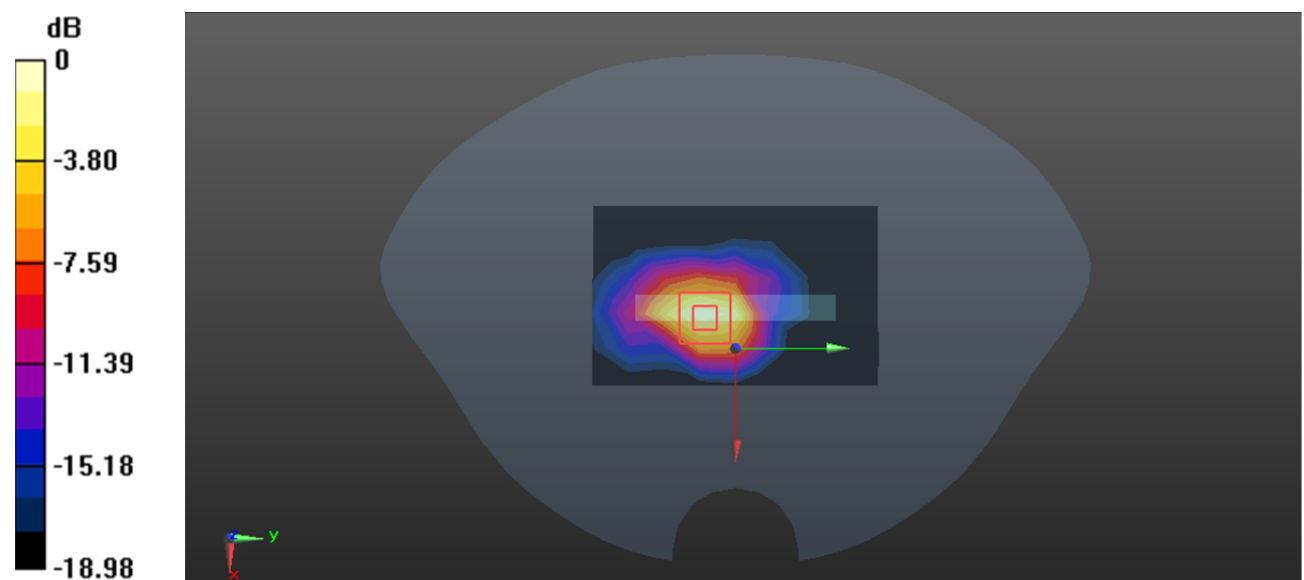

0 dB = 7.67 W/kg = 8.85 dBW/kg

Test Plot 11#: LTE Band 26 1RB Mid Body Bottom**DUT: POS Terminal; Type: S30; Serial: 3J9E-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 40.319$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.2, 10.2, 10.2) @ 836.5 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Bottom/LTE Band 26 1RB Mid/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.377 W/kg

Body Bottom/LTE Band 26 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.84 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.519 W/kg

SAR(1 g) = 0.333 W/kg; SAR(10 g) = 0.205 W/kg

Smallest distance from peaks to all points 3 dB below = 14.4 mm

Ratio of SAR at M2 to SAR at M1 = 64.1%

Maximum value of SAR (measured) = 0.399 W/kg

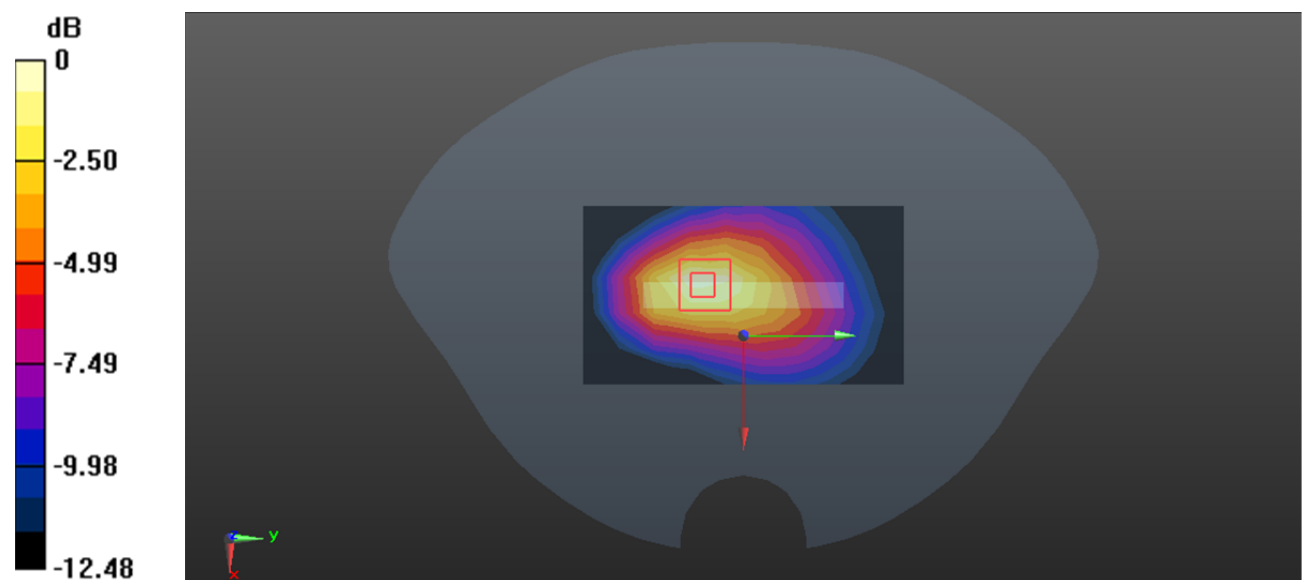

0 dB = 0.399 W/kg = -3.99 dBW/kg

Test Plot 12#: LTE Band 26 1RB Mid Limb Bottom**DUT: POS Terminal; Type: S30; Serial: 3J9E-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 40.319$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.2, 10.2, 10.2) @ 836.5 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Limb Bottom/LTE Band 26 1RB Mid/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.45 W/kg

Limb Bottom/LTE Band 26 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.03 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 2.18 W/kg

SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.584 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 52.9%

Maximum value of SAR (measured) = 1.45 W/kg

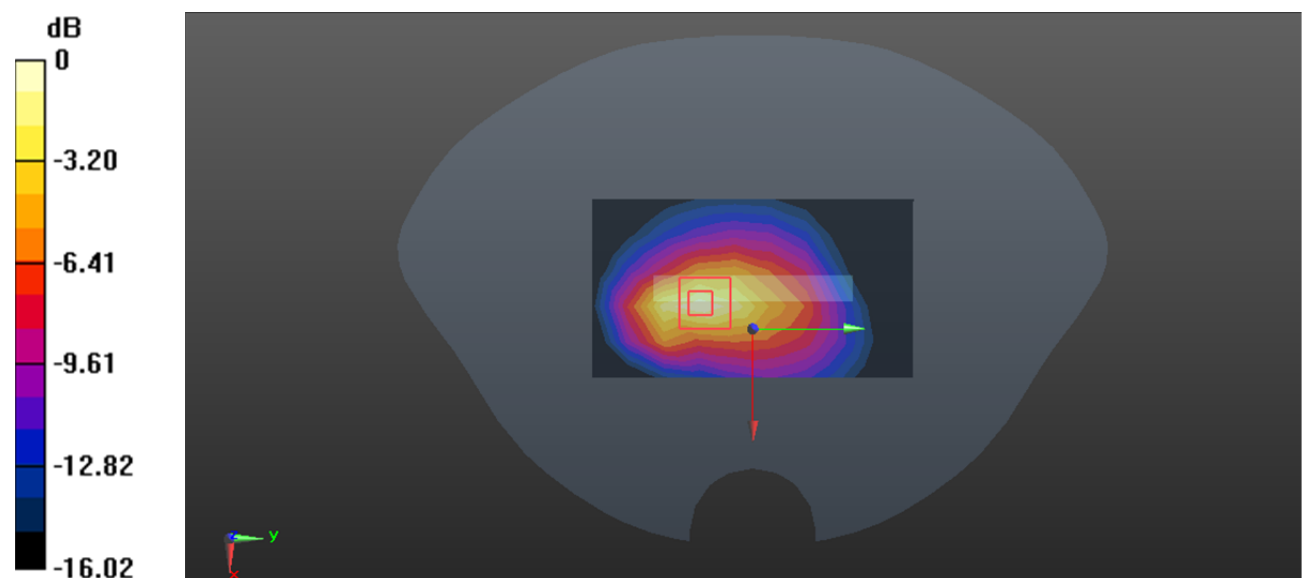

0 dB = 1.45 W/kg = 1.61 dBW/kg

Test Plot 13#: LTE Band 41 1RB 2550MHz Body Left**DUT: POS Terminal; Type: S30; Serial: 3J9E-1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2550 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2550$ MHz; $\sigma = 1.947$ S/m; $\epsilon_r = 38.483$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.5, 7.5, 7.5) @ 2550 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Left/LTE Band 41 1RB 2550MHz/Area Scan (6x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.34 W/kg

Body Left/LTE Band 41 1RB 2550MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.251 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 1.85 W/kg

SAR(1 g) = 0.936 W/kg; SAR(10 g) = 0.434 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 51.7%

Maximum value of SAR (measured) = 1.53 W/kg

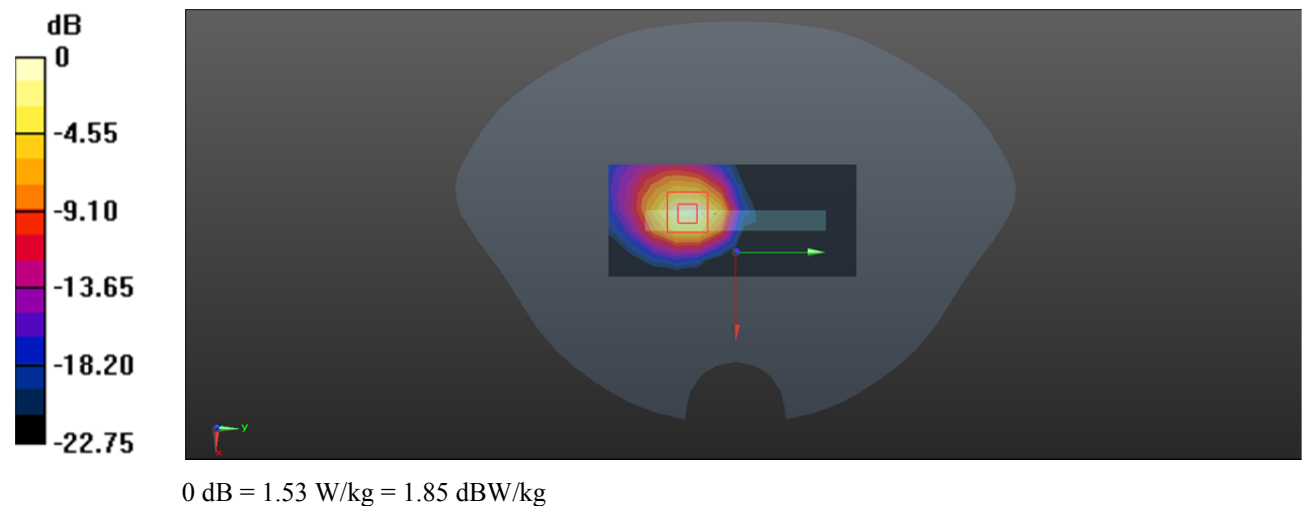

Test Plot 14#: LTE Band 41 1RB Mid Limb Left**DUT: POS Terminal; Type: S30; Serial: 3J9E-1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2593$ MHz; $\sigma = 2.001$ S/m; $\epsilon_r = 38.237$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.5, 7.5, 7.5) @ 2593 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Limb Left/LTE Band 41 1RB Mid/Area Scan (6x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 4.20 W/kg

Limb Left/LTE Band 41 1RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.41 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 8.69 W/kg

SAR(1 g) = 3.95 W/kg; SAR(10 g) = 1.63 W/kg

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 46.8%

Maximum value of SAR (measured) = 5.48 W/kg

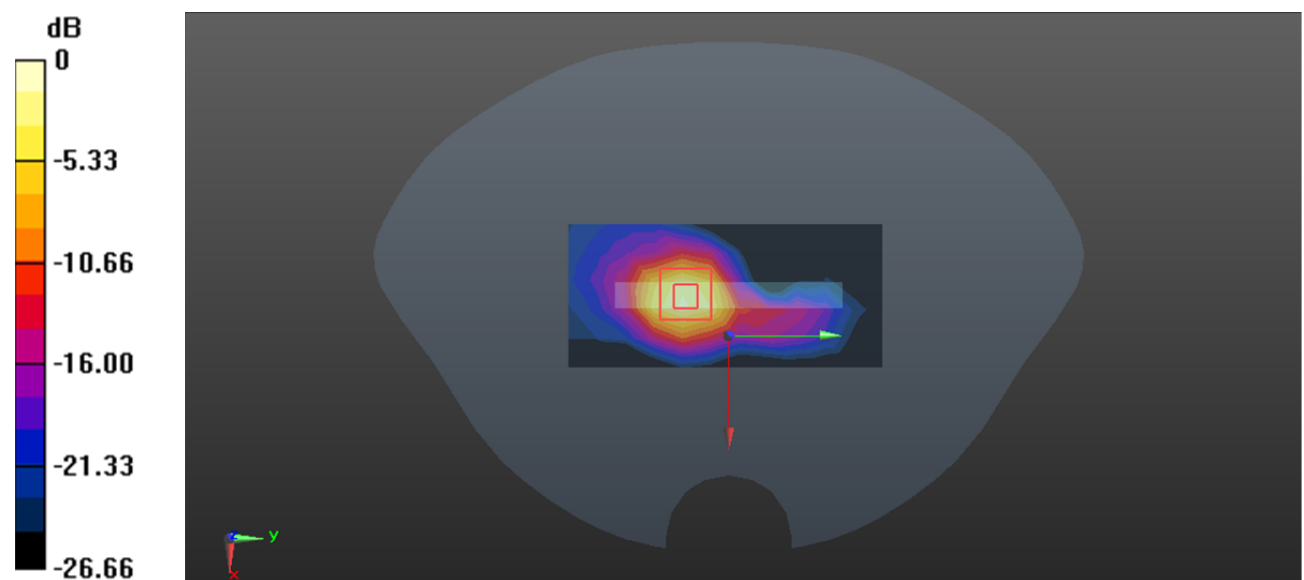

0 dB = 5.48 W/kg = 7.39 dBW/kg

Test Plot 15#: LTE Band 66 1RB Low Body Back**DUT: POS Terminal; Type: S30; Serial: 3J9E-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.329$ S/m; $\epsilon_r = 41.195$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.45, 8.45, 8.45) @ 1720 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 66 1RB Low/Area Scan (9x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.22 W/kg

Body Back/LTE Band 66 1RB Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.05 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.976 W/kg; SAR(10 g) = 0.542 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 60.8%

Maximum value of SAR (measured) = 1.21 W/kg

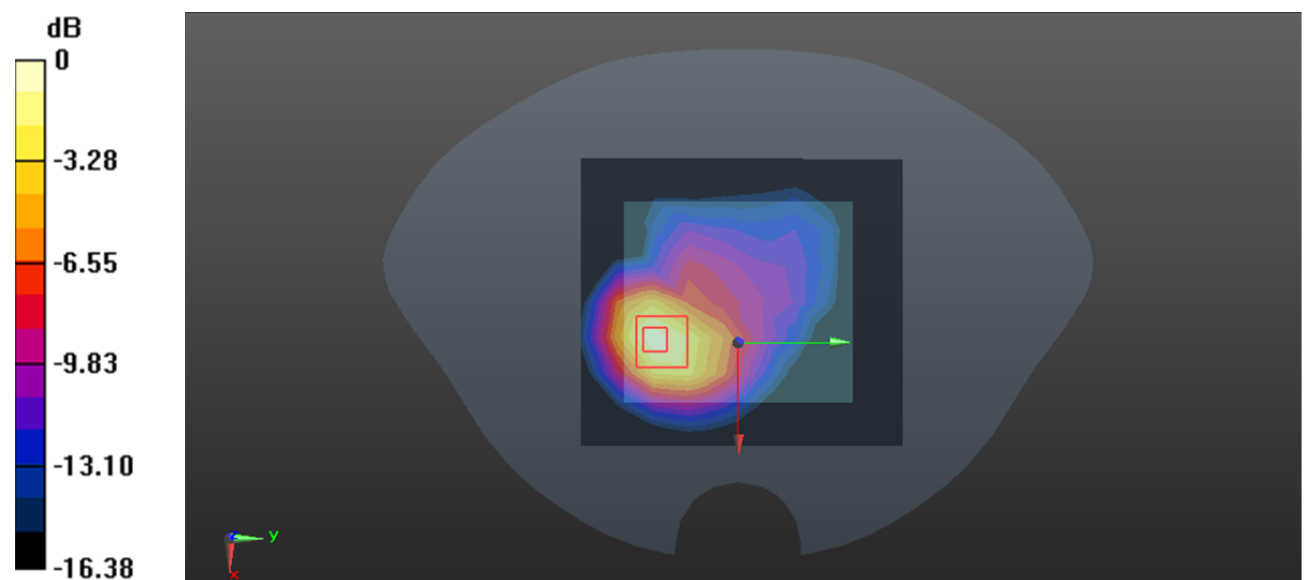

0 dB = 1.21 W/kg = 0.83 dBW/kg

Test Plot 16#: LTE Band 66 1RB High Limb Back**DUT: POS Terminal; Type: S30; Serial: 3J9E-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1770$ MHz; $\sigma = 1.352$ S/m; $\epsilon_r = 41.052$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.45, 8.45, 8.45) @ 1770 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Limb Back/LTE Band 66 1RB High/Area Scan (9x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 7.85 W/kg

Limb Back/LTE Band 66 1RB High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.57 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 15.4 W/kg

SAR(1 g) = 6.81 W/kg; SAR(10 g) = 3.28 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 54.5%

Maximum value of SAR (measured) = 8.68 W/kg

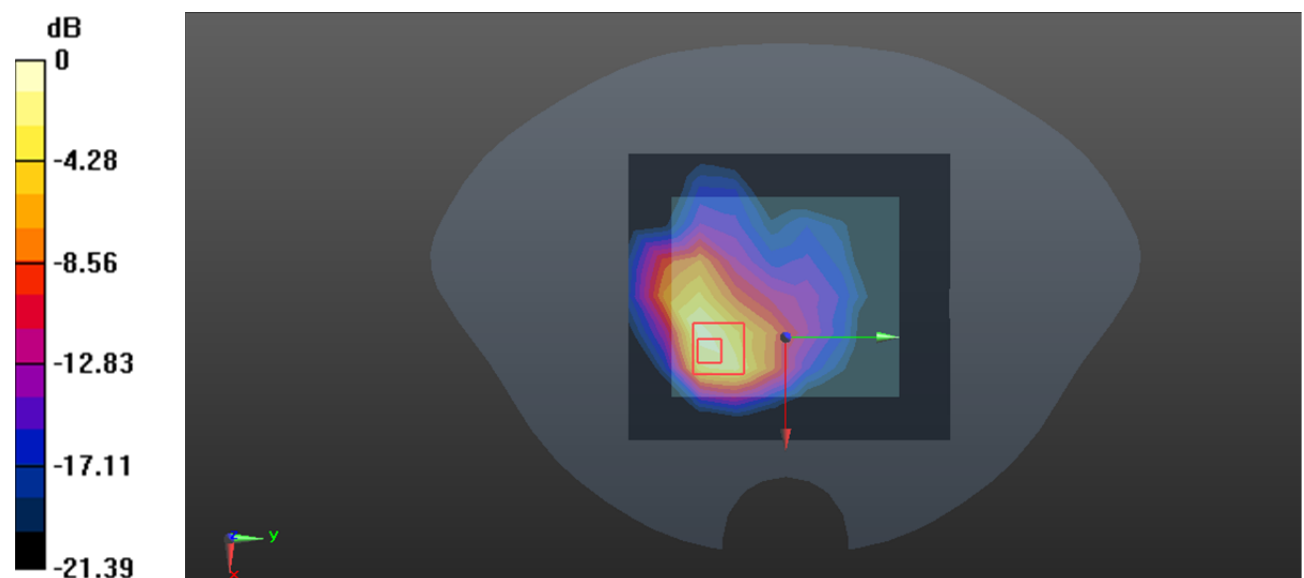

0 dB = 8.68 W/kg = 9.39 dBW/kg

Test Plot 17#: LTE Band 71 1RB High Body Left**DUT: POS Terminal; Type: S30; Serial: 3J9E-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 688 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 688$ MHz; $\sigma = 0.861$ S/m; $\epsilon_r = 43.193$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.2, 10.2, 10.2) @ 688 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Left/LTE Band 71 1RB High/Area Scan (5x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.277 W/kg

Body Left/LTE Band 71 1RB High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.45 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.458 W/kg

SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.157 W/kg

Smallest distance from peaks to all points 3 dB below = 14.7 mm

Ratio of SAR at M2 to SAR at M1 = 57.9%

Maximum value of SAR (measured) = 0.308 W/kg

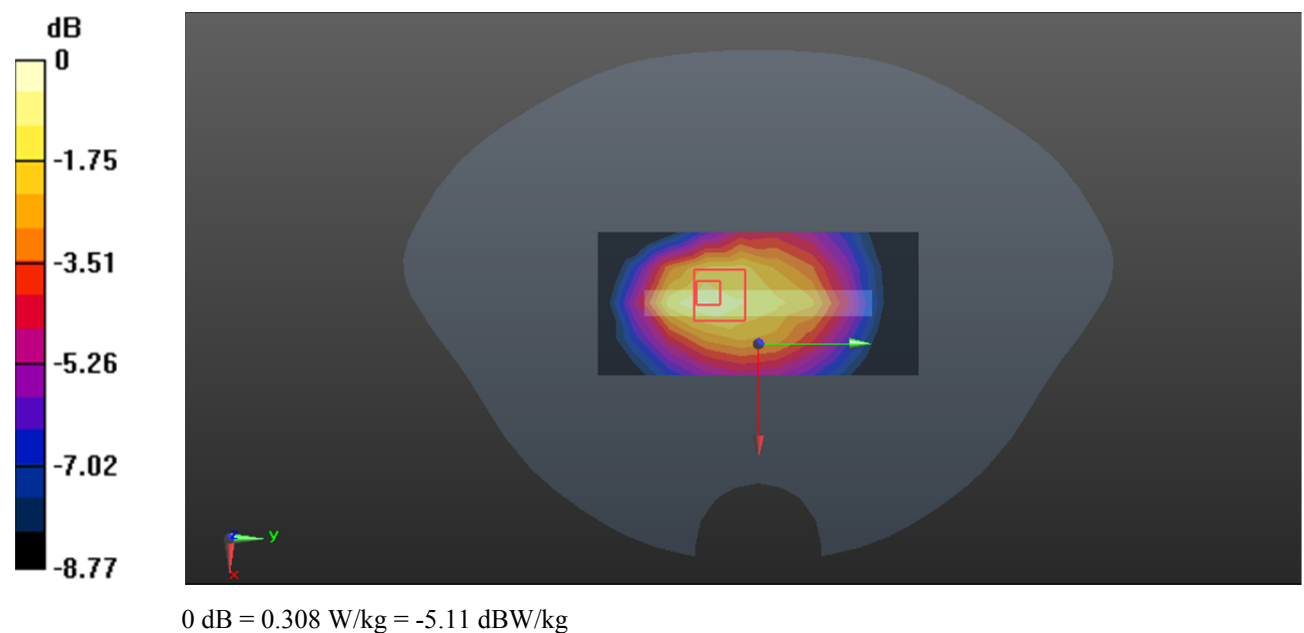

Test Plot 18#: LTE Band 71 1RB Mid Limb Left**DUT: POS Terminal; Type: S30; Serial: 3J9E-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.859$ S/m; $\epsilon_r = 43.341$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(10.2, 10.2, 10.2) @ 680.5 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Limb Left/LTE Band 71 1RB Mid/Area Scan (5x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.89 W/kg

Limb Left/LTE Band 71 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.91 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 6.22 W/kg

SAR(1 g) = 1.99 W/kg; SAR(10 g) = 0.882 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 37.2%

Maximum value of SAR (measured) = 2.85 W/kg

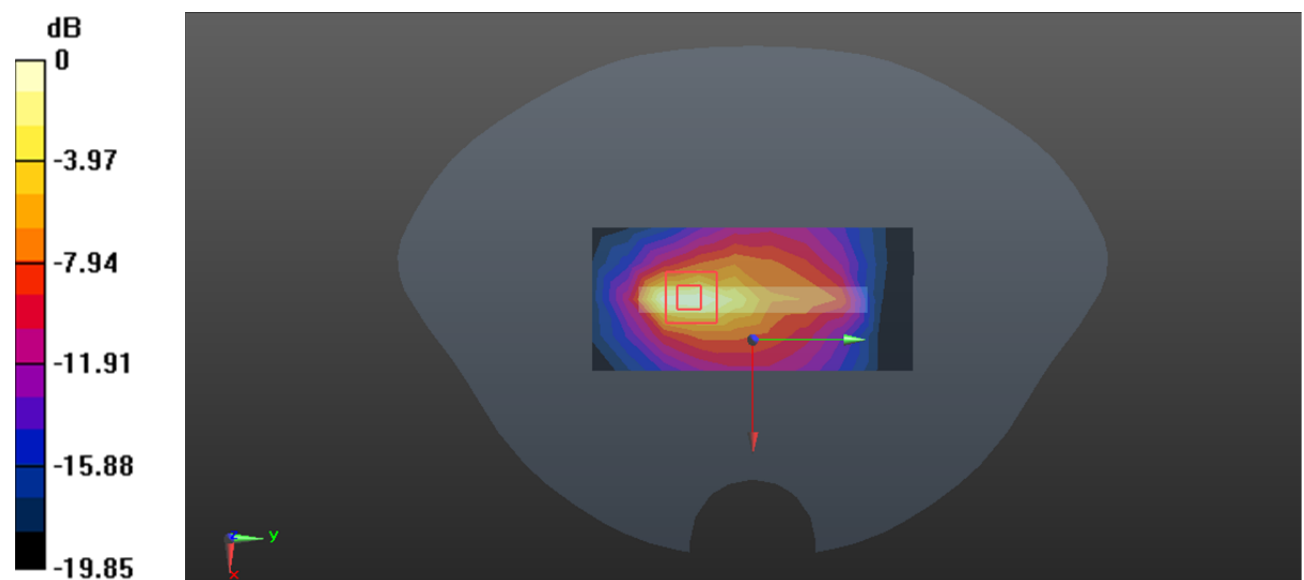

0 dB = 2.85 W/kg = 4.55 dBW/kg

Test Plot 19#: 2.4G WLAN Mid Body Back**DUT: POS Terminal; Type: S30; Serial: 3J9E-1**

Communication System: UID 0, 802.11b (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.785$ S/m; $\epsilon_r = 38.623$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.68, 7.68, 7.68) @ 2437 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/2.4G WLAN Mid/Area Scan (11x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.110 W/kg

Body Back/2.4G WLAN Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.205 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 0.166 W/kg

SAR(1 g) = 0.096 W/kg; SAR(10 g) = 0.054 W/kg

Smallest distance from peaks to all points 3 dB below = 18.5 mm

Ratio of SAR at M2 to SAR at M1 = 57.8%

Maximum value of SAR (measured) = 0.116 W/kg

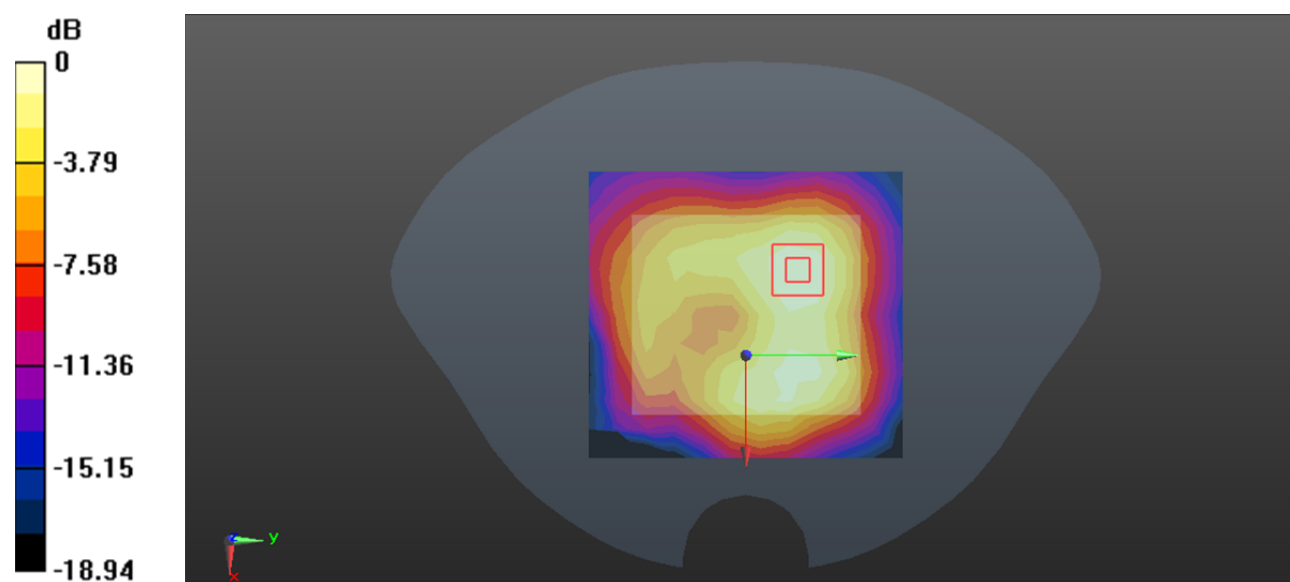

0 dB = 0.116 W/kg = -9.36 dBW/kg

Test Plot 20#: 2.4G WLAN Mid Limb Back**DUT: POS Terminal; Type: S30; Serial: 3J9E-1**

Communication System: UID 0, 802.11b (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.785$ S/m; $\epsilon_r = 38.623$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.68, 7.68, 7.68) @ 2437 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Limb Back/2.4G WLAN Mid/Area Scan (11x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.616 W/kg

Limb Back/2.4G WLAN Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.786 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.588 W/kg; SAR(10 g) = 0.280 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 44.2%

Maximum value of SAR (measured) = 0.780 W/kg

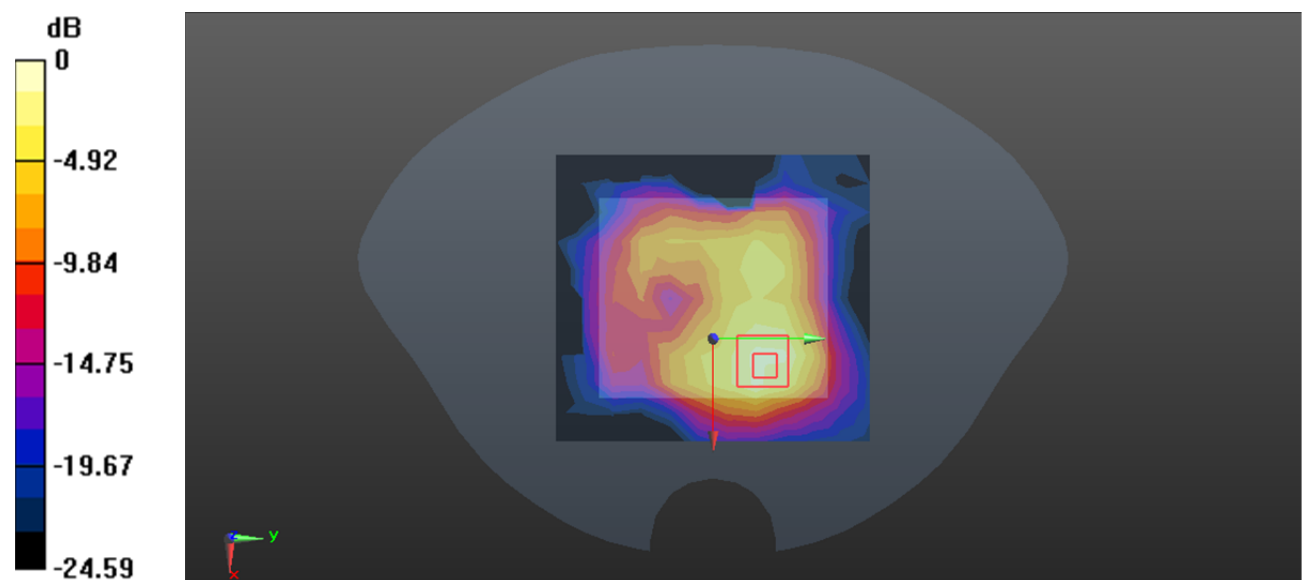

0 dB = 0.780 W/kg = -1.08 dBW/kg

Test Plot 21#: 5.2G WLAN Low Body Top**DUT: POS Terminal; Type: S30; Serial: 3J9E-1**

Communication System: UID 0, 802.11n40 (0); Frequency: 5190 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5190$ MHz; $\sigma = 4.707$ S/m; $\epsilon_r = 35.657$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.5, 5.5, 5.5) @ 5190 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Top/5.2G WLAN Low/Area Scan (8x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.434 W/kg

Body Top/5.2G WLAN Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.6901 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 0.681 W/kg

SAR(1 g) = 0.243 W/kg; SAR(10 g) = 0.105 W/kg

Smallest distance from peaks to all points 3 dB below = 11.5 mm

Ratio of SAR at M2 to SAR at M1 = 62.8%

Maximum value of SAR (measured) = 0.470 W/kg

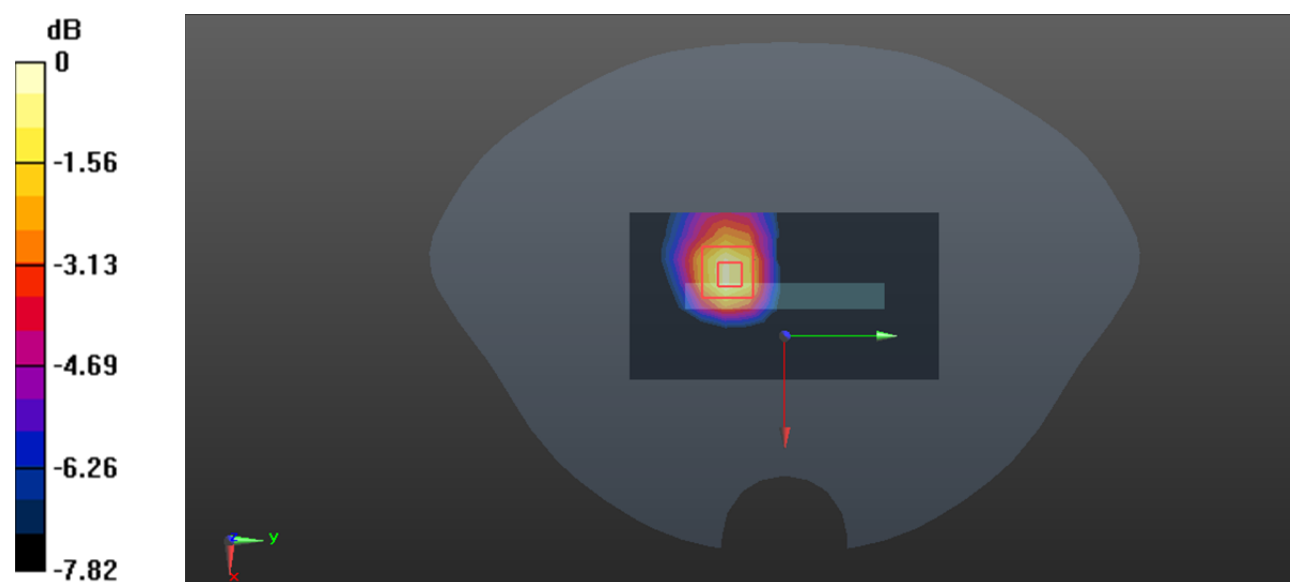

0 dB = 0.470 W/kg = -3.28 dBW/kg

Test Plot 22#: 5.2G WLAN Low Limb Top**DUT: POS Terminal; Type: S30; Serial: 3J9E-1**

Communication System: UID 0, 802.11n40 (0); Frequency: 5190 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5190$ MHz; $\sigma = 4.707$ S/m; $\epsilon_r = 35.657$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.5, 5.5, 5.5) @ 5190 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Limb Top/5.2G WLAN Low/Area Scan (8x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.995 W/kg

Limb Top/5.2G WLAN Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.545 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.544 W/kg; SAR(10 g) = 0.192 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 62.8%

Maximum value of SAR (measured) = 1.10 W/kg

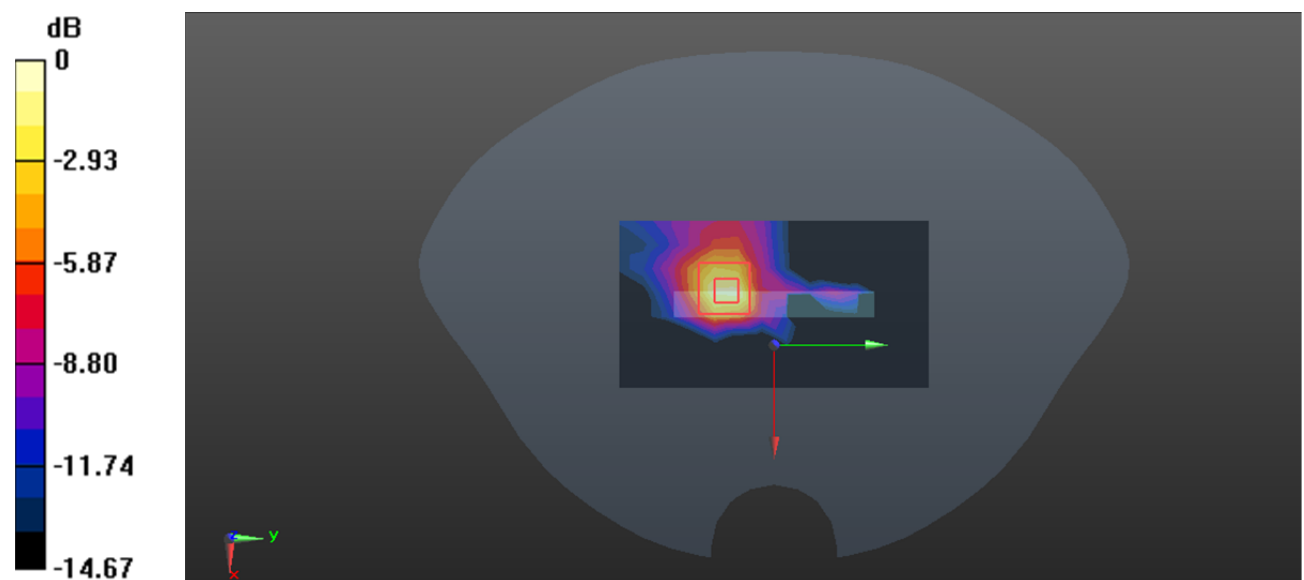

0 dB = 1.10 W/kg = 0.41 dBW/kg

Test Plot 23#: 5.3G WLAN High Body Left**DUT: POS Terminal; Type: S30; Serial: 3J9E-1**

Communication System: UID 0, 802.11a (0); Frequency: 5320 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5320$ MHz; $\sigma = 4.713$ S/m; $\epsilon_r = 35.367$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.5, 5.5, 5.5) @ 5320 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Left/5.3G WLAN High/Area Scan (7x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.532 W/kg

Body Left/5.3G WLAN High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.8210 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 0.887 W/kg

SAR(1 g) = 0.285 W/kg; SAR(10 g) = 0.110 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 59.6%

Maximum value of SAR (measured) = 0.584 W/kg

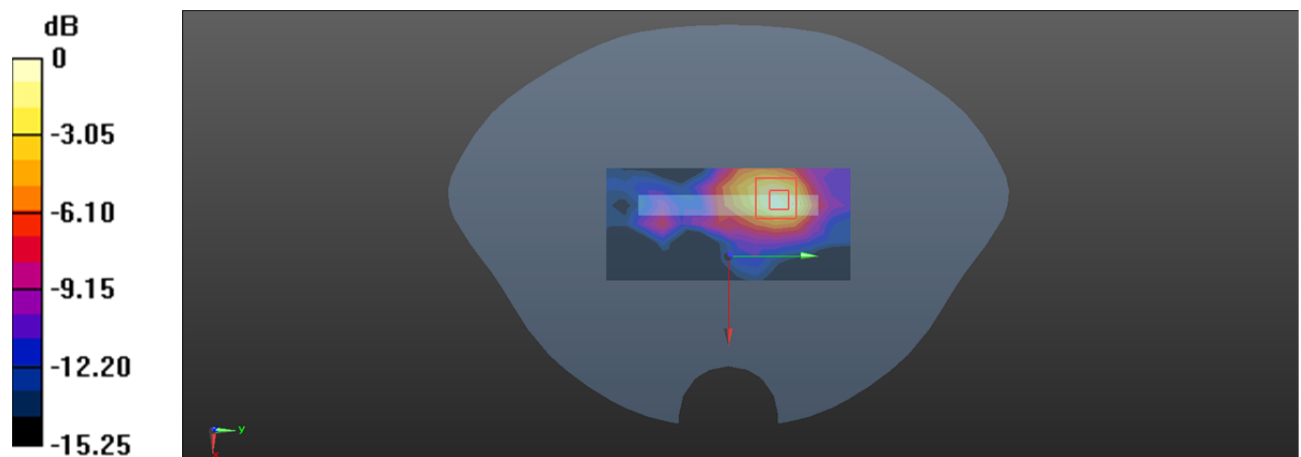

0 dB = 0.584 W/kg = -2.34 dBW/kg

Test Plot 24#: 5.3G WLAN High Limb Left**DUT: POS Terminal; Type: S30; Serial: 3J9E-1**

Communication System: UID 0, 802.11a (0); Frequency: 5320 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5320$ MHz; $\sigma = 4.713$ S/m; $\epsilon_r = 35.367$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.5, 5.5, 5.5) @ 5320 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Limb Left/5.3G WLAN High/Area Scan (7x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.28 W/kg

Limb Left/5.3G WLAN High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.191 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 8.66 W/kg

SAR(1 g) = 1.79 W/kg; SAR(10 g) = 0.420 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 52.4%

Maximum value of SAR (measured) = 5.13 W/kg

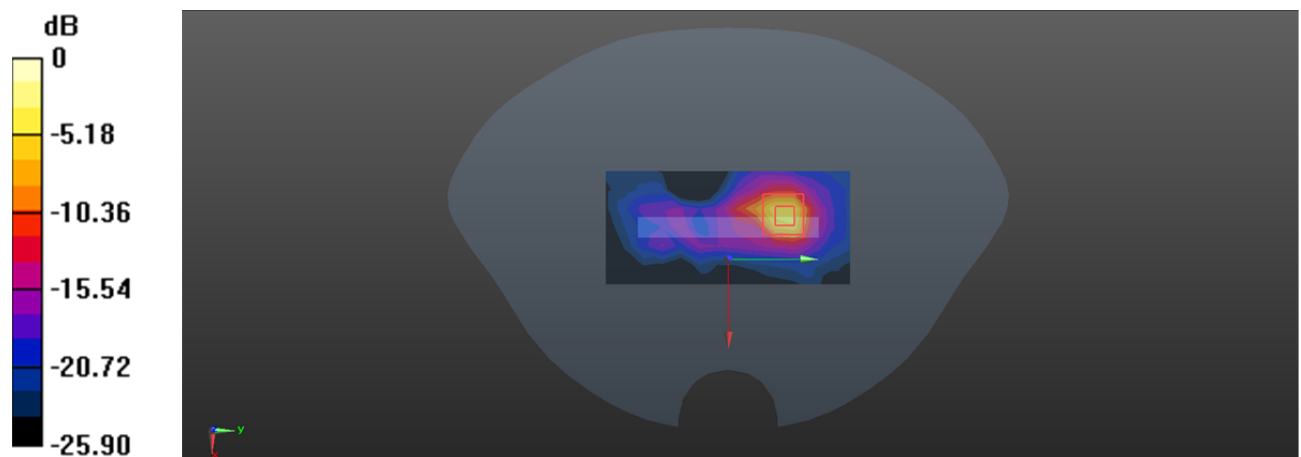

0 dB = 5.13 W/kg = 7.10 dBW/kg

Test Plot 25#: 5.6G WLAN Mid Body Back**DUT: POS Terminal; Type: S30; Serial: 3J9E-1**

Communication System: UID 0, 802.11a (0); Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5580$ MHz; $\sigma = 5$ S/m; $\epsilon_r = 35.715$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.9, 4.9, 4.9) @ 5580 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/5.6G WLAN Mid/Area Scan (13x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.615 W/kg

Body Back/5.6G WLAN Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.7306 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.930 W/kg

SAR(1 g) = 0.313 W/kg; SAR(10 g) = 0.129 W/kg

Smallest distance from peaks to all points 3 dB below = 11.1 mm

Ratio of SAR at M2 to SAR at M1 = 60.6%

Maximum value of SAR (measured) = 0.632 W/kg

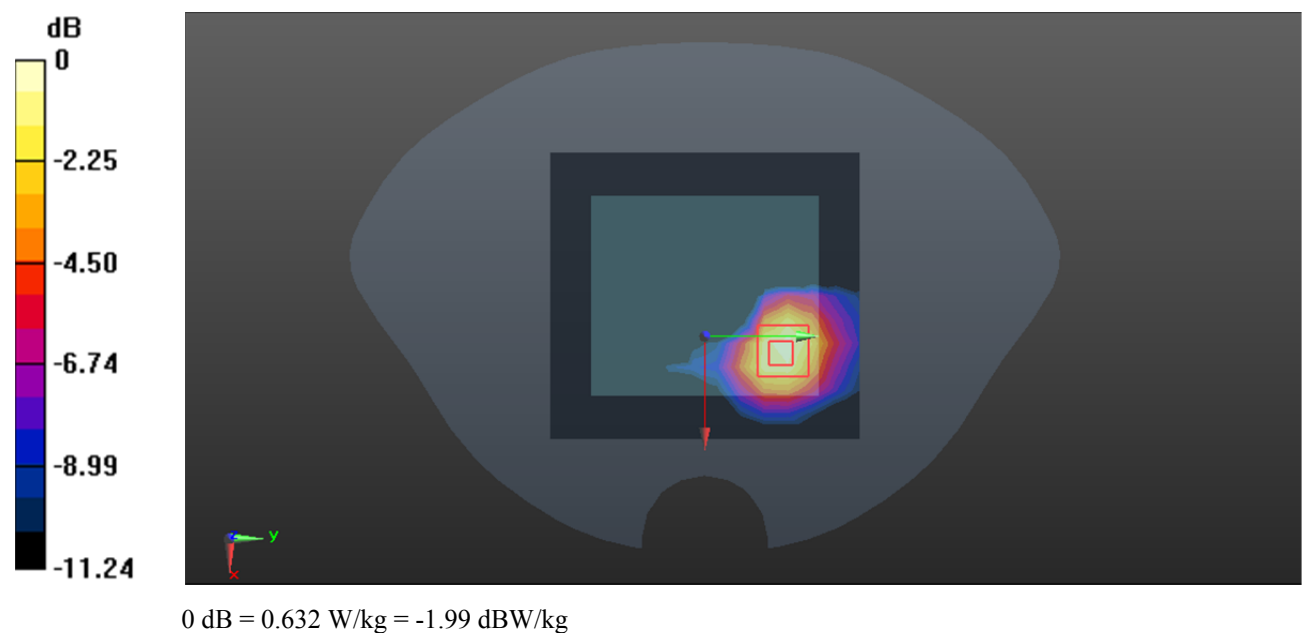

Test Plot 26#: 5.6G WLAN Mid Limb Back**DUT: POS Terminal; Type: S30; Serial: 3J9E-1**

Communication System: UID 0, 802.11a (0); Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5580$ MHz; $\sigma = 5$ S/m; $\epsilon_r = 35.715$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.9, 4.9, 4.9) @ 5580 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Limb Back/5.6G WLAN Mid/Area Scan (13x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.95 W/kg

Limb Back/5.6G WLAN Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.7975 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 3.95 W/kg

SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.371 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 60.2%

Maximum value of SAR (measured) = 2.60 W/kg

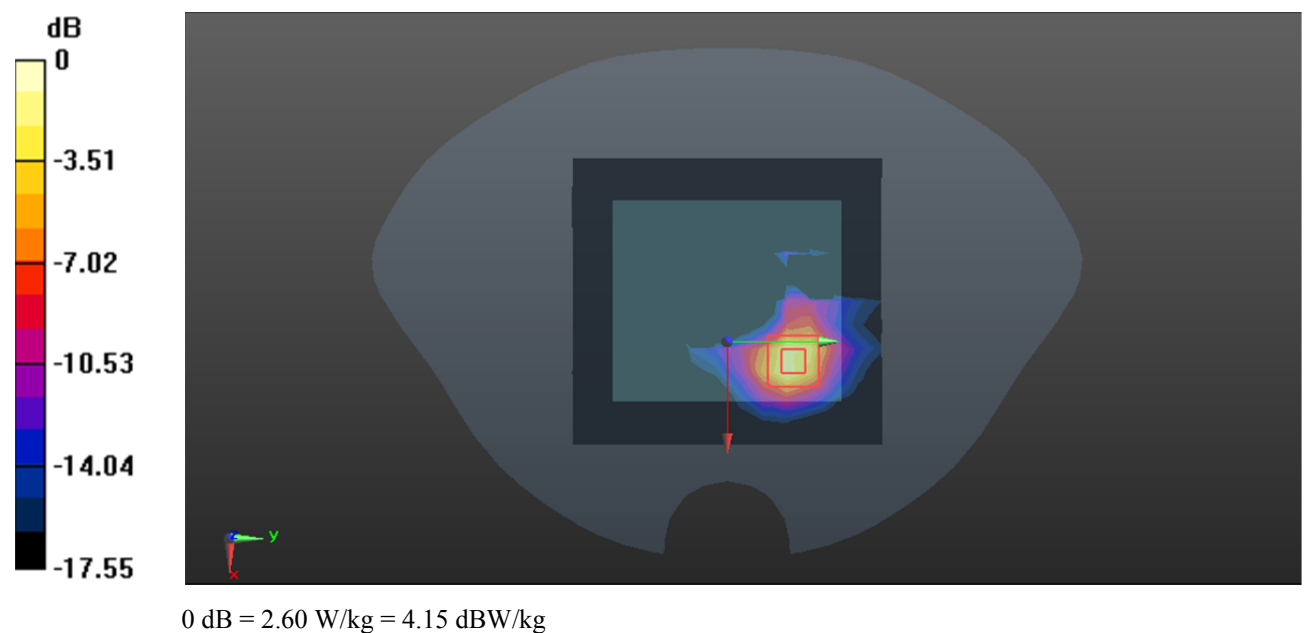

Test Plot 27#: 5.8G WLAN Low Body Back**DUT: POS Terminal; Type: S30; Serial: 3J9E-1**

Communication System: UID 0, 802.11a (0); Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5745$ MHz; $\sigma = 5.209$ S/m; $\epsilon_r = 35.54$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.02, 5.02, 5.02) @ 5745 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/5.8G WLAN Low/Area Scan (13x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.529 W/kg

Body Back/5.8G WLAN Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.7241 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.833 W/kg

SAR(1 g) = 0.262 W/kg; SAR(10 g) = 0.098 W/kg

Smallest distance from peaks to all points 3 dB below = 11.8 mm

Ratio of SAR at M2 to SAR at M1 = 58.4%

Maximum value of SAR (measured) = 0.541 W/kg

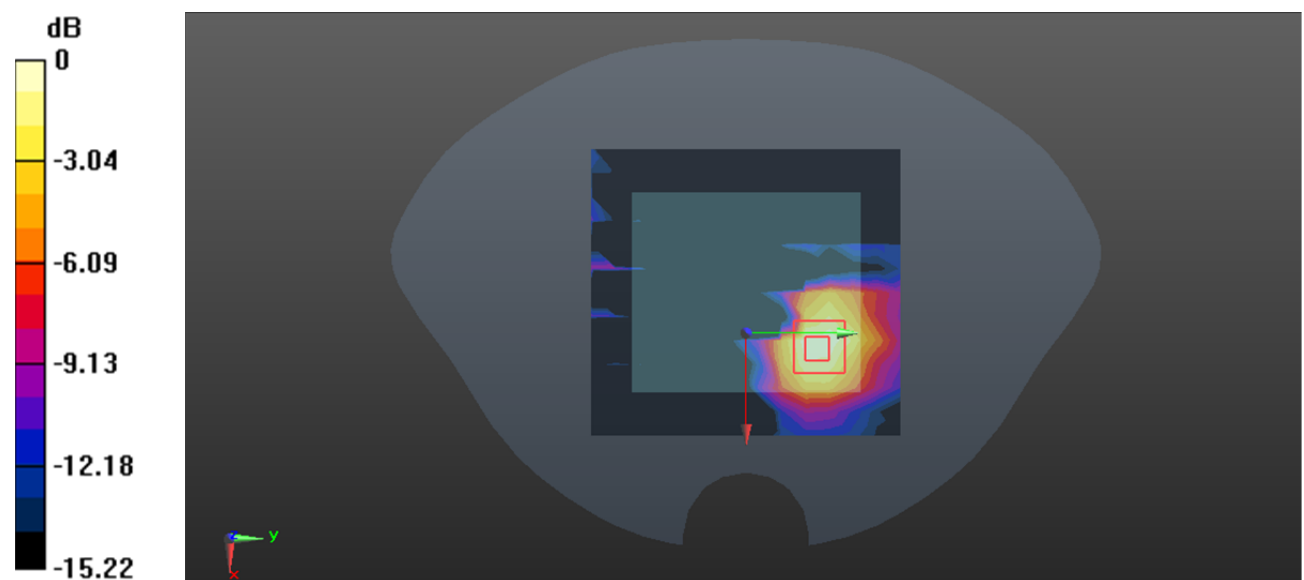

0 dB = 0.541 W/kg = -2.67 dBW/kg

Test Plot 28#: 5.8G WLAN Low Limb Back**DUT: POS Terminal; Type: S30; Serial: 3J9E-1**

Communication System: UID 0, 802.11a (0); Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5745$ MHz; $\sigma = 5.209$ S/m; $\epsilon_r = 35.54$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.02, 5.02, 5.02) @ 5745 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Limb Back/5.8G WLAN Low/Area Scan (13x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.86 W/kg

Limb Back/5.8G WLAN Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.6755 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 3.28 W/kg

SAR(1 g) = 0.940 W/kg; SAR(10 g) = 0.286 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 60.4%

Maximum value of SAR (measured) = 2.06 W/kg

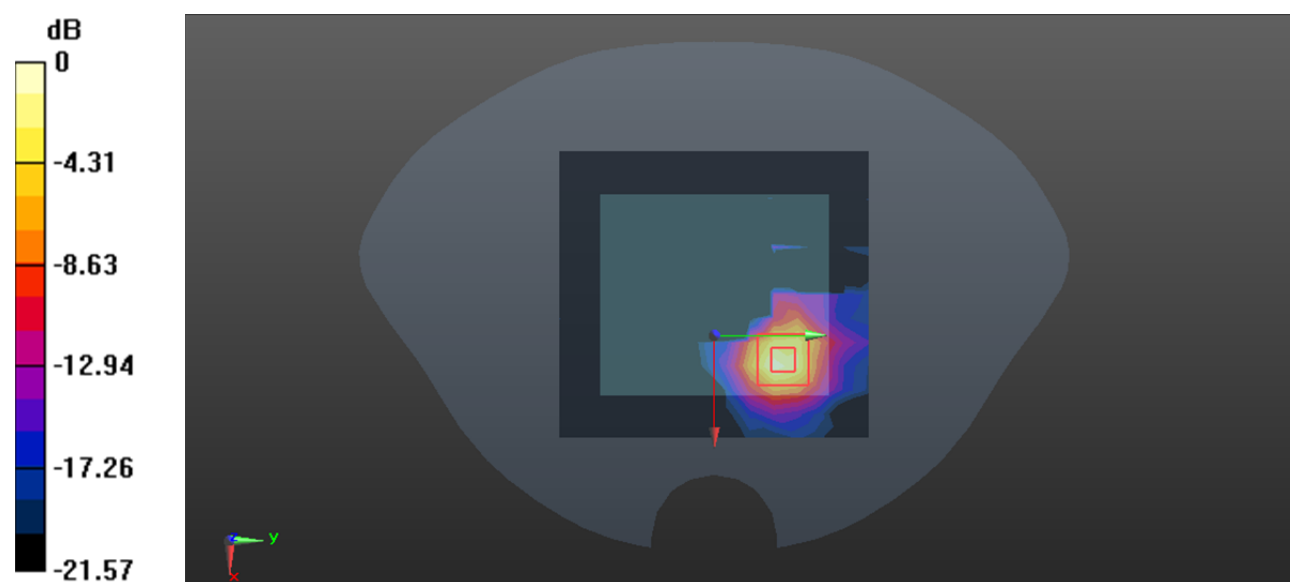

0 dB = 2.06 W/kg = 3.14 dBW/kg

Test Plot 29#: BT Mid Body Left**DUT: POS Terminal; Type: S30; Serial: 3J9E-1**

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2441 MHz;Duty Cycle: 1:1.30

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.793$ S/m; $\epsilon_r = 38.567$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.68, 7.68, 7.68) @ 2441 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Left/BT Mid/Area Scan (6x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.00887 W/kg

Body Left/BT Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.031 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.0190 W/kg

SAR(1 g) = 0.00663 W/kg; SAR(10 g) = 0.00246 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 38.8%

Maximum value of SAR (measured) = 0.00976 W/kg

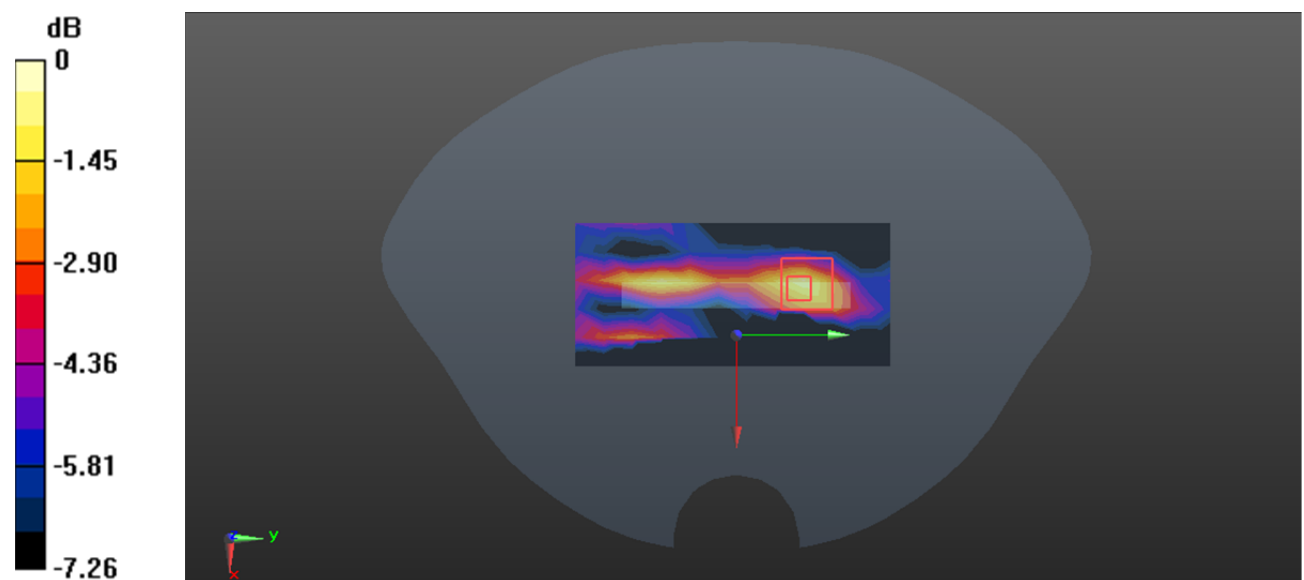

0 dB = 0.00976 W/kg = -20.11 dBW/kg

Test Plot 30#: BT Mid Limb Left**DUT: POS Terminal; Type: S30; Serial: 3J9E-1**

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2441 MHz; Duty Cycle: 1:1.30

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.793$ S/m; $\epsilon_r = 38.567$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.68, 7.68, 7.68) @ 2441 MHz; Calibrated: 2025/5/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Limb Left/BT Mid/Area Scan (6x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0834 W/kg

Limb Left/BT Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.888 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.242 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.025 W/kg

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 33%

Maximum value of SAR (measured) = 0.0962 W/kg

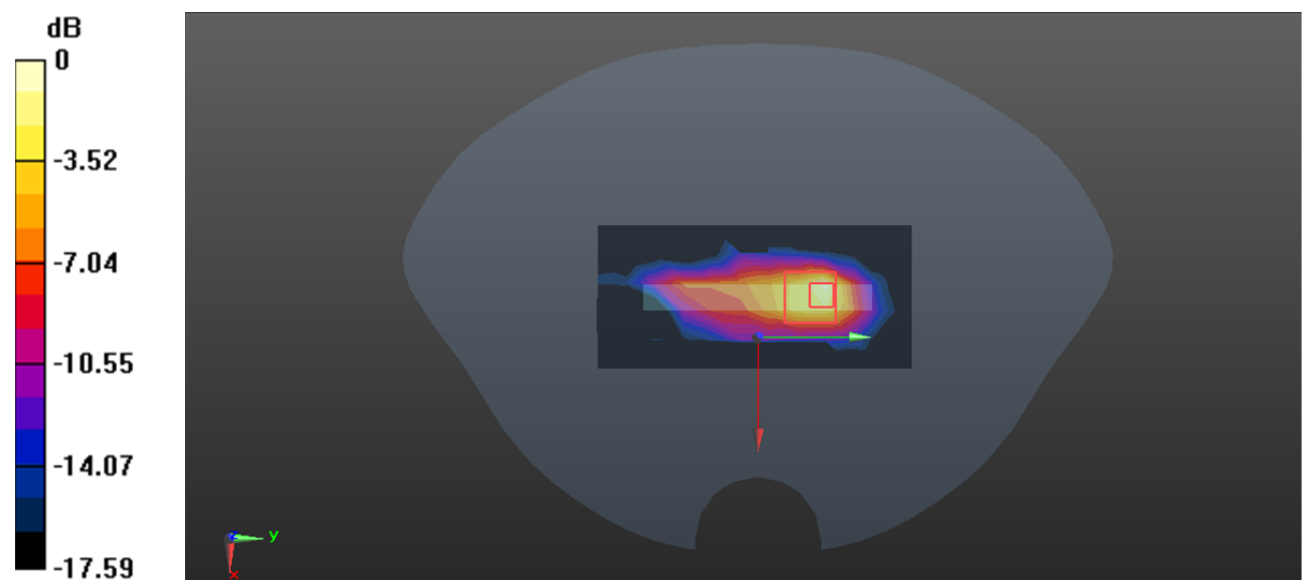

0 dB = 0.0962 W/kg = -10.17 dBW/kg