



FCC PART 15C TEST REPORT FOR CERTIFICATION On Behalf of

AlphaTheta Corporation

ACTIVE MONITOR SPEAKER

Model Number: DM-40D-BT

Additional Model: DM-40D-BT-W



FCC ID: 2AM73-DM40DBT

Applicant:	AlphaTheta Corporation
Address:	6F, Yokohama i-Mark Place, 4-4-5 Minatomirai, Nishi-ku,
	Yokohama Kanagawa, 220-0012 Japan
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
	Tel: 86-769-83081888-808

Report Number:	ESTE-R25111028-1
Date of Test:	Oct. 18, 2025~ Nov. 11, 2025
Date of Report:	Nov. 13, 2025

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. GENERAL INFORMATION.....	4
1.1. Description of Device (EUT).....	4
1.2. Antenna Information	4
2. SUMMARY OF TEST	5
2.1. Summary of test result	5
2.2. Test Facilities.....	6
2.3. Measurement uncertainty	7
2.4. Assistant equipment used for test	7
2.5. Block Diagram	7
2.6. Test mode	8
2.7. Channel List.....	9
2.8. Power Setting of Test Software	9
2.9. Test Equipment.....	10
3. RADIATED SPURIOUS EMISSIONS AND BAND EDGE	11
3.1. Limit.....	11
3.2. Test Setup.....	12
3.3. Spectrum Analyzer Setting.....	13
3.4. Test Procedure	14
3.5. Test Result.....	15
4. AC POWER LINE CONDUCTED EMISSIONS	27
4.1. Limit.....	27
4.2. Test Setup.....	27
4.3. Spectrum Analyzer Setting.....	27
4.4. Test Procedure	27
4.5. Test Result.....	28
5. TEST SETUP PHOTO.....	30
6. EUT PHOTO	32

Applicant:	AlphaTheta Corporation		
Address:	6F, Yokohama i-Mark Place, 4-4-5 Minatomirai, Nishi-ku, Yokohama Kanagawa, 220-0012 Japan		
Manufacturer:	AlphaTheta Corporation		
Address:	6F, Yokohama i-Mark Place, 4-4-5 Minatomirai, Nishi-ku, Yokohama Kanagawa, 220-0012 Japan		
E.U.T:	ACTIVE MONITOR SPEAKER		
Model Number:	DM-40D-BT		
Additional Model:	DM-40D-BT-W Note: Except for the model name and colors, the rest is identical.		
Power Supply:	AC 110-240V, 50/60Hz		
Trade Name:	<i>Pioneer Dj</i>	Serial No.:	-----
Date of Receipt:	Oct. 18, 2025	Date of Test:	Oct. 18, 2025~ Nov. 11, 2025
Test Specification:	FCC Part 15 Subpart C (15.247) ANSI C63.10:2020 FCC KDB 558074 D01 15.247 Meas Guidance v05r02		
Test Result:	The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart C requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.		
Prepared by:		Reviewed by:	
	Ring Yang / Assistant		Seven Wang / Engineer
		Approved by:	
			Iceman Hu / Manager
Other Aspects:	This report base on the previous report with report number: ESTE-R2111028, a new antenna was added, and the adiated spurious emissions, conducted emissions and Band Edge was retested accordingly.		
Abbreviations:	OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested		
This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd. The statement of compliance in this report is based on the limit in the test standard, the measurement uncertainty is not considered.			

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Product Name	:	ACTIVE MONITOR SPEAKER
Model Number	:	DM-40D-BT
Software Version	:	B
Hardware Version	:	B
Operation frequency	:	2402MHz~2480MHz
Number of channel	:	79
Modulation Type	:	BT BDR(1Mbps): GFSK BT EDR(2Mbps): $\pi/4$ -DQPSK BT EDR(3Mbps): 8-DPSK
Sample Type	:	Prototype production
Note: The product information is provided by the manufacturer. The laboratory is not responsible for this data.		

1.2. Antenna Information

Ant No.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	-	2.00001832	FPCB	-	3.34
Note: 1. The antenna gain is declared by the customer and the laboratory is not responsible for the accuracy of the antenna gain. 2. The test results of this report only apply to the sample as received.					

2.SUMMARY OF TEST

2.1.Summary of test result

No.	Description of Test Item	FCC Standard Section	Results
1	Radiated Spurious Emissions and Band Edge	15.205 15.209 15.247(d)	PASS
2	AC Power Line Conducted Emissions	15.207	PASS

Note:“N/A” denotes test is not applicable in this test report.

2.2. Test Facilities

EMC Lab : Accredited by CNAS, CHINA
Registration No.: L5288
This Accreditation is valid until: November 12, 2029

Recognized by FCC, USA
Designation Number: CN1215
This Recognition is valid until: January 31, 2026

Accredited by A2LA, USA
Registration No.: 4366.01
This Accreditation is valid until: January 31, 2026

Recognized by Industry Canada
CAB identifier No.: CN0035
This Recognition is valid until: January 31, 2026

Recognized by VCCI, Japan
Registration No.: C-14103; T-20073; R-13663;
R-20103; G-20097
Date of registration: Apr. 20, 2020
This Recognition is valid until: Apr. 19, 2026

Recognized by TUV Rheinland, Germany
Registration No.: UA 50413872 0001
Date of registration: July 31, 2018

Recognized by Intertek
Registration No.: 2011-RTL-L2-64
Date of registration: November 08, 2018

Name of Firm : EST Technology Co., Ltd.

Site Location : Chilingxiang, Qishantou, Santun, Houjie, Dongguan,
Guangdong, China

2.3.Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	$\pm 3.48\text{dB}$
Uncertainty for spurious emissions test (Below 30MHz)	$\pm 1.62\text{ dB}$
Uncertainty for spurious emissions test (30MHz-1GHz)	$\pm 4.60\text{ dB(Polarize: H)}$
	$\pm 4.68\text{ dB(Polarize: V)}$
Uncertainty for spurious emissions test (1GHz to 25GHz)	$\pm 4.96\text{dB}$

Note: This uncertainty represents an expanded uncertainty expressed at approximately The 95% confidence level using a coverage factor of $k=2$.


2.4.Assistant equipment used for test

Item	Equipment	Brand	Model Name/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.5m	AC Cable

2.5.Block Diagram

For radiated emissions test: EUT was placed on a turntable, which is 0.8 (or 1.5) meters high above ground. The EUT was set into BT test mode by software prior to testing.



(EUT: ACTIVE MONITOR SPEAKER)

2.6. Test mode

Combining all the rates, modulations, and packet types, the Pre-scans had been carried out. The worst case test mode was selected for the final test as listed below.

Test Item	Modulation Type	Operating Mode	Packet Type	Test Channel
Radiated Spurious Emissions(Below 1GHz)	GFSK&8-DPSK & $\pi/4$ -DQPSK	Non Hopping	DH5	Low/Middle/High
Radiated Spurious Emissions(Above 1GHz)	GFSK&8-DPSK & $\pi/4$ -DQPSK	Non Hopping	DH5	Low/Middle/High
Radiated Band Edge	GFSK&8-DPSK & $\pi/4$ -DQPSK	Non Hopping	DH5	Low/High
AC Power Line Conducted Emissions	GFSK&8-DPSK & $\pi/4$ -DQPSK	Non Hopping	DH5	Low/Middle/High

Note: In radiated measurement, the EUT had been pre-scan on the positioned of each 3 axis(X,Y,Z), the worst case was found when positioned on **X-plane**.

2.7.Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	-	-

2.8.Power Setting of Test Software

Software Name	BT FCC Tool V2.24		
Frequency(MHz)	2402	2441	2480
GFSK(1Mbps) Setting	4	4	4
$\pi/4$ -DQPSK (2Mbps) Setting	4	4	4
8-DPSK(3Mbps) Setting	4	4	4

Note: This information is provided by the applicant.

2.9. Test Equipment

For conducted emission test

Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESRP3	EST-E070	LISAI	June 11,25	June 10,26
Artificial Mains Network	Rohde & Schwarz	ENV216	EST-E048	LISAI	June 11,25	June 10,26
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	EST-E078	LISAI	June 11,25	June 10,26
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

For radiated emission test(9kHz-30MHz)

Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 11,25	June 10,26
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	EST-E054	LISAI	June 11,25	June 10,26
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
9kHz-30MHz Cable	N/A	EST-001	N/A	N/A	N/A	N/A

For radiated emissions test (30MHz-1000MHz)

Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 11,25	June 10,26
Bilog Antenna	Teseq	CBL 6111D	EST-E034	LISAI	June 11,25	June 10,26
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
30-1000MHz Cable	N/A	EST-002	N/A	N/A	N/A	N/A

For radiated emission test(Above 1000MHz)

Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Horn Antenna	SCHWARZBECK	BBHA9120D	EST-E144	LISAI	June 11,25	June 10,26
Horn Antenna	Com-Power	AHA-840	EST-E133	LISAI	June 11,25	June 10,26
Low Noise Amplifier	RF	TRLA-010180 G45N	EST-E142	LISAI	June 11,25	June 10,26
Spectrum Analyzer	Rohde & Schwarz	FSV40	EST-E069	LISAI	June 11,25	June 10,26
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
Above 1GHz Cable	N/A	EST-003	N/A	N/A	N/A	N/A

3. RADIATED SPURIOUS EMISSIONS AND BAND EDGE

3.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit


Frequency (MHz)	Field Strength(μ V/m)	Distance(m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:


- (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$.
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

3.2. Test Setup


9kHz~30MHz

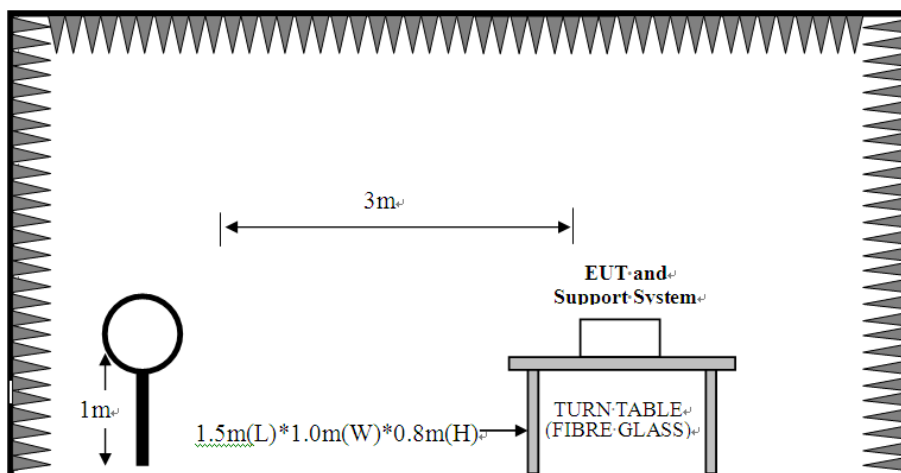

30~1000MHz

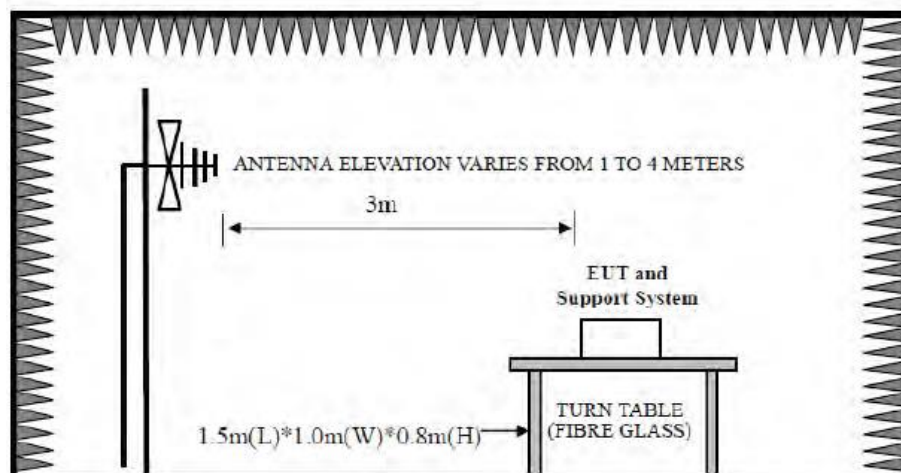

Above 1GHz

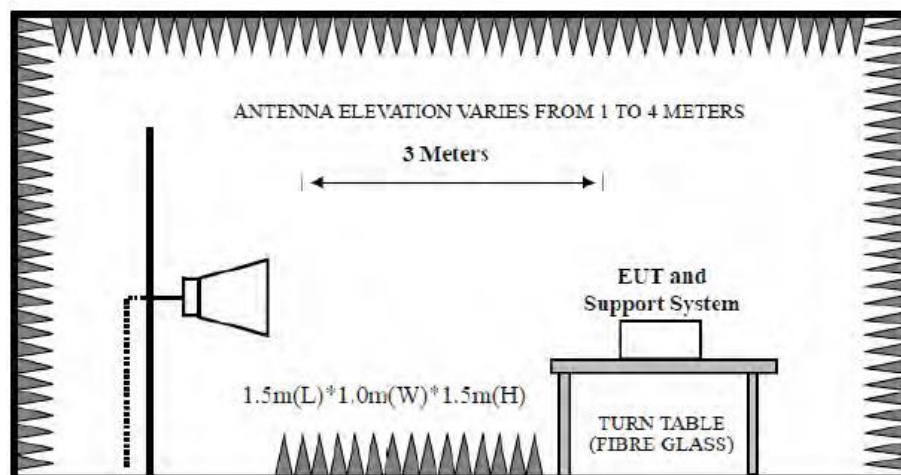

3.3. Spectrum Analyzer Setting

For 9KHz-150KHz

Spectrum Parameters	Setting
RBW	300Hz(for Peak&AVG)/CISPR 200Hz(for QP)
VBW	300Hz(for Peak&AVG)/CISPR 200Hz(for QP)
Start frequency	9KHz
Stop frequency	150KHz
Sweep Time	Auto
Detector	PEAK/QP/AVG
Trace Mode	Max Hold

For 150KHz-30MHz

Spectrum Parameters	Setting
RBW	9KHz
VBW	9KHz
Start frequency	150KHz
Stop frequency	30MHz
Sweep Time	Auto
Detector	QP
Trace Mode	Max Hold

For 30MHz-1GHz

Spectrum Parameters	Setting
RBW	120KHz
VBW	300KHz
Start frequency	30MHz
Stop frequency	1GHz
Sweep Time	Auto
Detector	QP
Trace Mode	Max Hold

For Above 1GHz

Spectrum Parameters	Setting	
RBW	1MHz	
VBW	PEAK Measurement	AVG Measurement
	3MHz	Duty cycle $\geq$ 98%,VBW=10Hz Duty cycle<98%,VBW $\geq$ 1/T
Start frequency	1GHz	
Stop frequency	25GHz	
Sweep Time	Auto	
Detector	PEAK	
Trace Mode	Max Hold	

3.4. Test Procedure

- a. EUT was placed on a turn table, which is 0.8 meter high above ground for below 1GHz test, and which is 1.5 meter high above ground for above 1GHz test.
- b. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower.
- c. Set the EUT transmit continuously with maximum output power.
- d. The turn table can rotate 360 degrees to determine the position of the maximum emission level.
- e. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.
- f. Spectrum analyzer setting parameters in accordance with section 3.3.
- g. Repeat above procedures until all channels and test modes were measured.
- h. Record the results in the test report.

Note:

1. For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.
2. The frequency 2402MHz ,2441MHz and 2480MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.
3. GFSK, $\pi/4$ -DQPSK and 8-DPSK mode all have been tested, only worse case GFSK mode is reported.

3.5. Test Result

Radiated Emissions Below 1GHz


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 49

File: \\EMC-966-5\Test Data2\2025\RF\Z\Zhao Yang\DM-40D-BT.EM6 (50)

Date: 2025-11-10

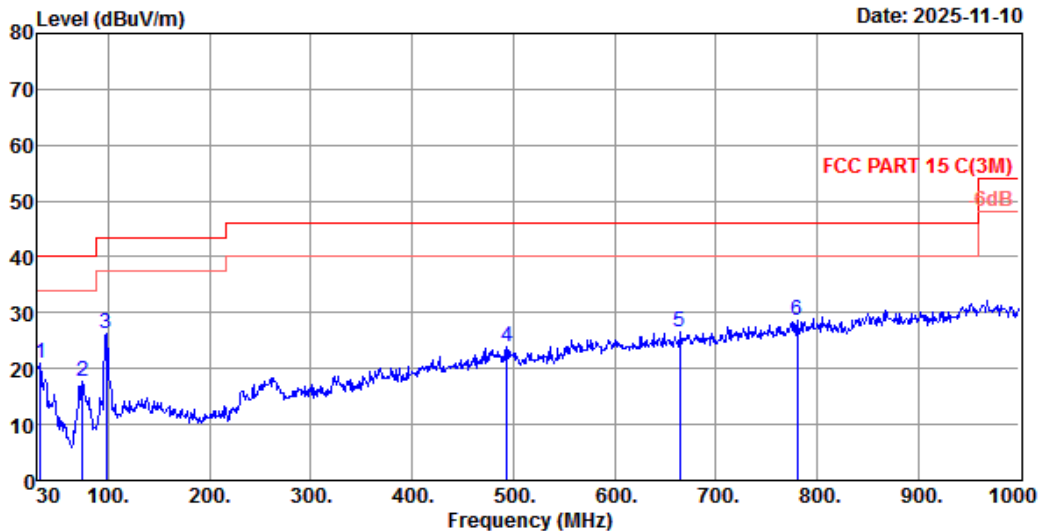


Site no. : 5# 966 Chamber Data no. : 49
Dis. / Ant. : 3m 54681 Ant. pol. : VERTICAL
Limit : FCC PART 15 C(3M)
Env. / Ins. : Temp:21.2°C;Humi:32%;Press:101.1kPa
Engineer : Luke Zhu
EUT : ACTIVE MONITOR SPEAKER
Power : AC 120V/60Hz
M/N : DM-40D-BT
Test Mode : TX Mode
Sample No : EST-251018002-001

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	32.91	18.70	0.97	1.34	21.01	40.00	18.99	QP
2	74.62	6.80	1.48	9.47	17.75	40.00	22.25	QP
3	97.90	11.00	1.71	13.62	26.33	43.50	17.17	QP
4	493.66	17.52	4.03	2.32	23.87	46.00	22.13	QP
5	664.38	20.19	4.73	1.73	26.65	46.00	19.35	QP
6	780.78	21.91	5.18	1.44	28.53	46.00	17.47	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

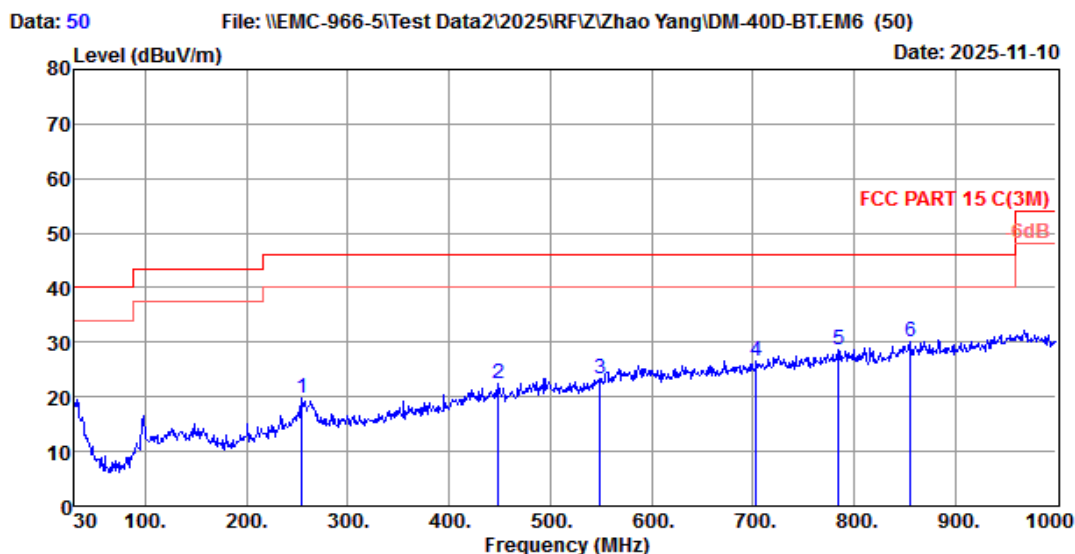

Site no. : 5# 966 Chamber Data no. : 50
Dis. / Ant. : 3m 54681 Ant. pol. : HORIZONTAL
Limit : FCC PART 15 C(3M)
Env. / Ins. : Temp:21.2°C;Humi:32%;Press:101.1kPa
Engineer : Luke Zhu
EUT : ACTIVE MONITOR SPEAKER
Power : AC 120V/60Hz
M/N : DM-40D-BT
Test Mode : TX Mode
Sample No : EST-251018002-001

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	255.04	13.70	2.82	3.21	19.73	46.00	26.27	QP
2	449.04	16.84	3.84	1.68	22.36	46.00	23.64	QP
3	548.95	18.88	4.27	0.30	23.45	46.00	22.55	QP
4	703.18	20.24	4.88	1.51	26.63	46.00	19.37	QP
5	784.66	21.95	5.19	1.44	28.58	46.00	17.42	QP
6	855.47	22.72	5.44	2.02	30.18	46.00	15.82	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

Note:

1. The amplitude of 9KHz to 30MHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.
2. All test mode had been pre-test,only the worst case was reported.

Radiated Emissions Above 1G


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 33

File: \\EMC-966-5\Test Data2\2025\RF\Z\Zhao Yang\DM-40D-BT.EM6 (44)

Date: 2025-11-04

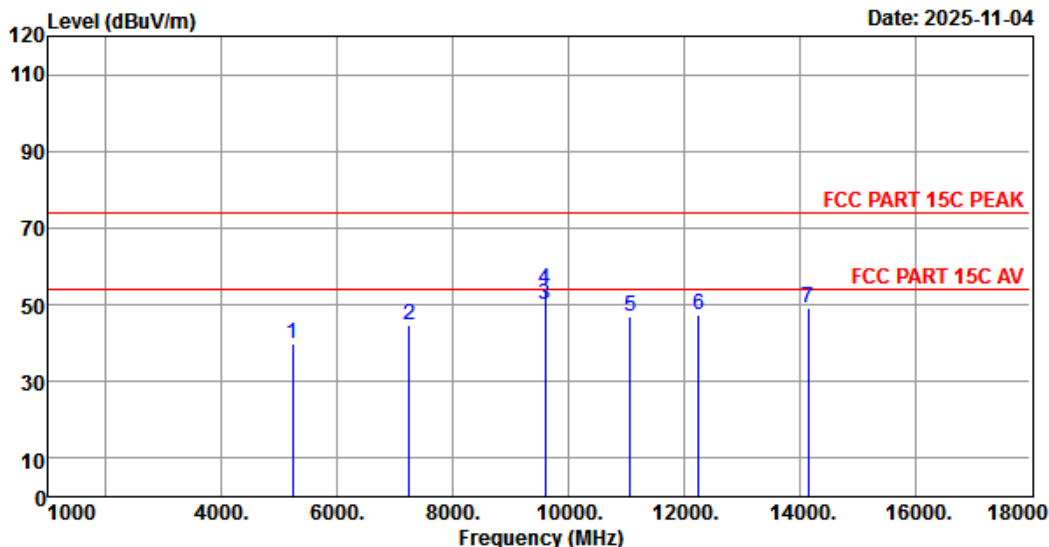

Site no. : 5# 966 Chamber Data no. : 33
Dis. / Ant. : 3m 9120D-1002 1-18G Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:19.5°C;Humi:51%;Press:101.55kPa
Engineer : Aron Zhang
EUT : ACTIVE MONITOR SPEAKER
Power : AC 120V/60Hz
M/N : DM-40D-BT
Test Mode : GFSK TX 2402MHz
Sample No : EST-251018002-001

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5233.00	32.77	5.51	43.25	44.93	39.96	74.00	34.04	Peak
2	7239.00	36.80	6.71	43.35	44.69	44.85	74.00	29.15	Peak
3	9602.00	39.50	7.69	42.82	45.52	49.89	54.00	4.11	Average
4	9602.00	39.50	7.69	42.82	49.64	54.01	74.00	19.99	Peak
5	11064.00	39.45	8.78	41.93	40.55	46.85	74.00	27.15	Peak
6	12254.00	40.15	9.05	40.62	38.61	47.19	74.00	26.81	Peak
7	14158.00	41.70	10.35	40.25	37.36	49.16	74.00	24.84	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 34

File: \\EMC-966-5\Test Data2\2025\RF\Z\Zhao Yang\DM-40D-BT.EM6 (44)

Date: 2025-11-04

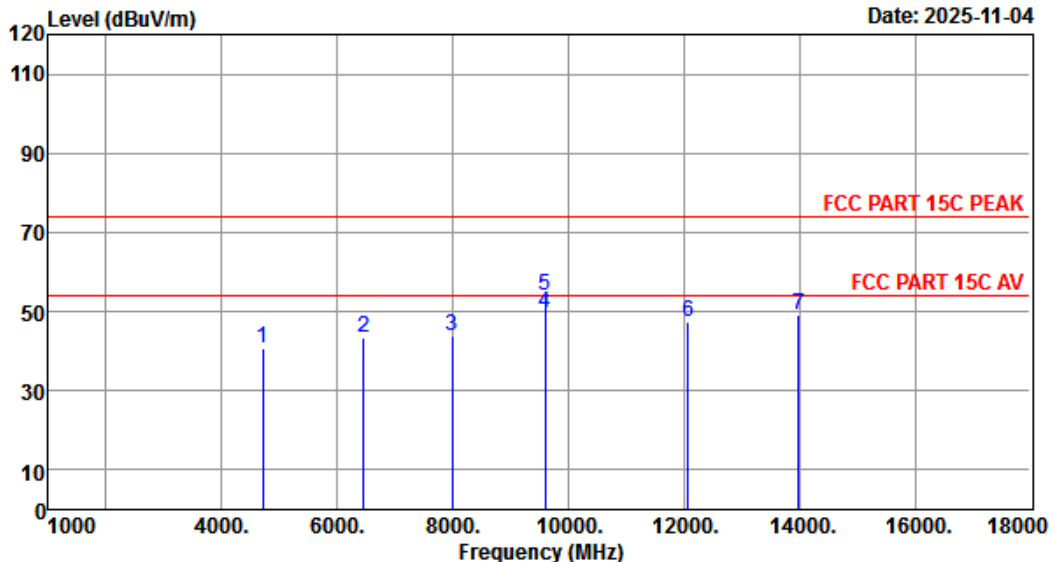

Site no. : site Data no. : 34
Dis. / Ant. : 3m 9120D-1002 1-18G Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:19.5°C;Humi:51%;Press:101.55kPa
Engineer : Aron Zhang
EUT : ACTIVE MONITOR SPEAKER
Power : AC 120V/60Hz
M/N : DM-40D-BT
Test Mode : GFSK TX 2402MHz
Sample No : EST-251018002-001

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4706.00	32.20	5.23	43.26	46.51	40.68	74.00	33.32	Peak
2	6457.00	35.90	6.23	43.40	44.46	43.19	74.00	30.81	Peak
3	7987.00	38.08	6.93	43.20	42.04	43.85	74.00	30.15	Peak
4	9602.00	39.50	7.69	42.82	45.27	49.64	54.00	4.36	Average
5	9602.00	39.50	7.69	42.82	49.82	54.19	74.00	19.81	Peak
6	12067.00	40.11	8.95	40.90	39.01	47.17	74.00	26.83	Peak
7	13988.00	42.07	10.21	39.89	36.69	49.08	74.00	24.92	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 35

File: \\EMC-966-5\Test Data2\2025\RF\Z\Zhao Yang\DM-40D-BT.EM6 (44)

Date: 2025-11-04

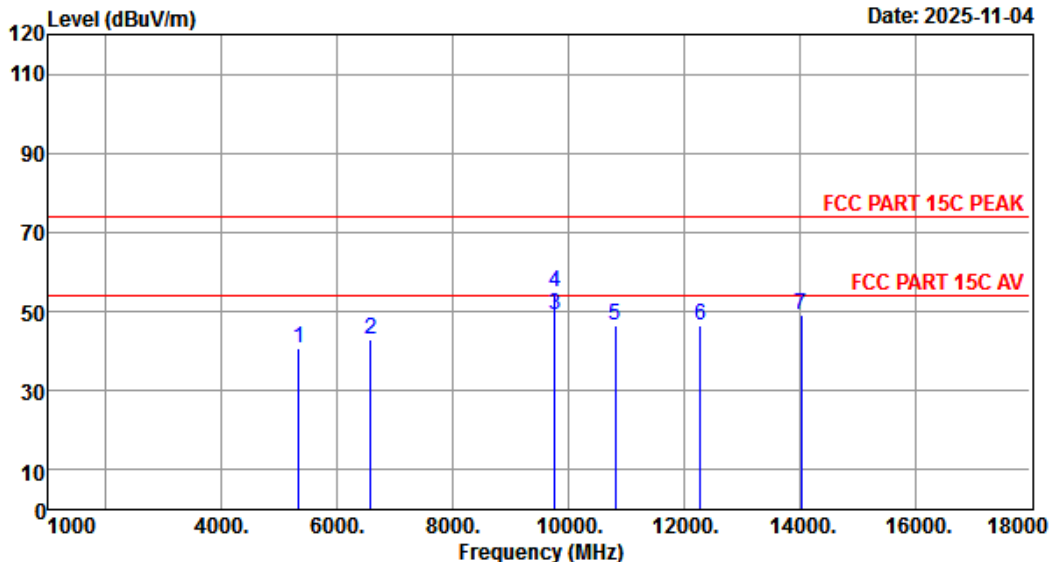

Site no. : 5# 966 Chamber Data no. : 35
Dis. / Ant. : 3m 9120D-1002 1-18G Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:19.5°C;Humi:51%;Press:101.55kPa
Engineer : Aron Zhang
EUT : ACTIVE MONITOR SPEAKER
Power : AC 120V/60Hz
M/N : DM-40D-BT
Test Mode : GFSK TX 2441MHz
Sample No : EST-251018002-001

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5335.00	32.97	5.56	43.27	45.36	40.62	74.00	33.38	Peak
2	6576.00	35.62	6.32	43.40	44.45	42.99	74.00	31.01	Peak
3	9772.00	40.00	7.87	42.77	44.24	49.34	54.00	4.66	Average
4	9772.00	40.00	7.87	42.77	49.78	54.88	74.00	19.12	Peak
5	10809.00	39.44	8.65	42.13	40.56	46.52	74.00	27.48	Peak
6	12288.00	40.16	9.07	40.57	38.01	46.67	74.00	27.33	Peak
7	14039.00	42.01	10.25	39.98	37.03	49.31	74.00	24.69	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 36

File: \\EMC-966-5\Test Data2\2025\RF\Z\Zhao Yang\DM-40D-BT.EM6 (44)

Date: 2025-11-04

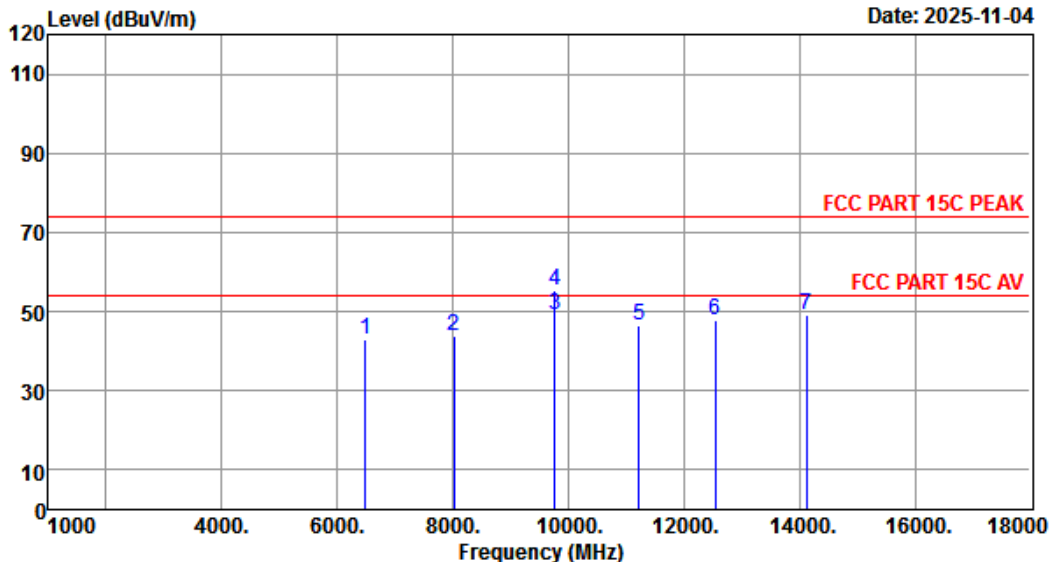

Site no. : 5# 966 Chamber Data no. : 36
Dis. / Ant. : 3m 9120D-1002 1-18G Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:19.5°C;Humi:51%;Press:101.55kPa
Engineer : Aron Zhang
EUT : ACTIVE MONITOR SPEAKER
Power : AC 120V/60Hz
M/N : DM-40D-BT
Test Mode : GFSK TX 2441MHz
Sample No : EST-251018002-001

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	6491.00	36.03	6.25	43.40	44.09	42.97	74.00	31.03	Peak
2	8021.00	38.10	6.94	43.20	42.19	44.03	74.00	29.97	Peak
3	9772.00	40.00	7.87	42.77	44.16	49.26	54.00	4.74	Average
4	9772.00	40.00	7.87	42.77	50.26	55.36	74.00	18.64	Peak
5	11217.00	39.55	8.80	41.78	40.07	46.64	74.00	27.36	Peak
6	12543.00	40.21	9.20	40.19	38.49	47.71	74.00	26.29	Peak
7	14124.00	41.79	10.32	40.17	37.34	49.28	74.00	24.72	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 37

File: \\EMC-966-5\Test Data2\2025\RF\Z\Zhao Yang\DM-40D-BT.EM6 (44)

Date: 2025-11-04

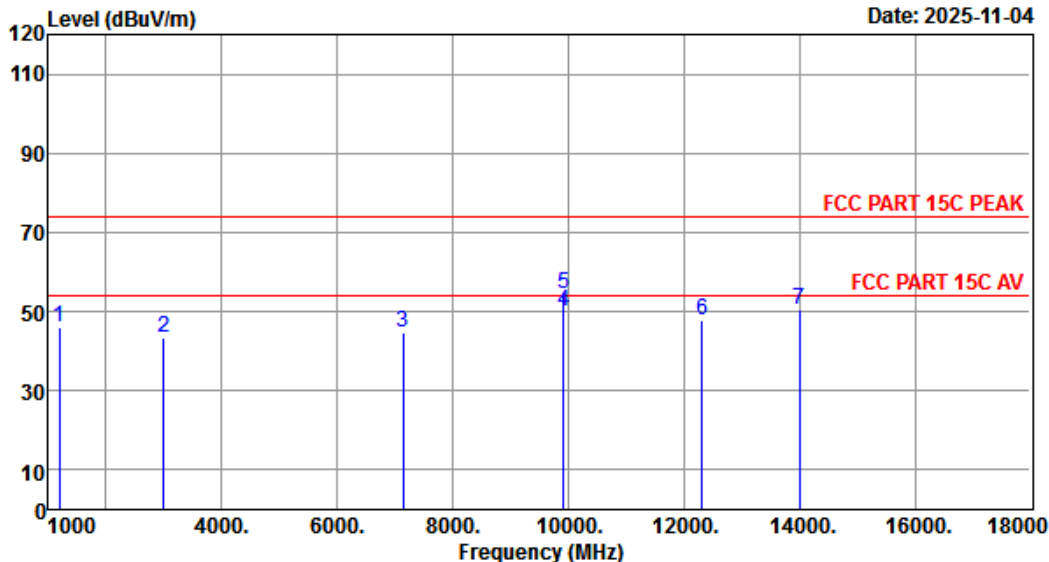


Site no. : 5# 966 Chamber Data no. : 37
Dis. / Ant. : 3m 9120D-1002 1-18G Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:19.5°C;Humi:51%;Press:101.55kPa
Engineer : Aron Zhang
EUT : ACTIVE MONITOR SPEAKER
Power : AC 120V/60Hz
M/N : DM-40D-BT
Test Mode : GFSK TX 2480MHz
Sample No : EST-251018002-001

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1187.00	25.17	2.41	45.66	64.31	46.23	74.00	27.77	Peak
2	2989.00	27.87	4.02	43.42	54.79	43.26	74.00	30.74	Peak
3	7137.00	36.83	6.68	43.37	44.46	44.60	74.00	29.40	Peak
4	9925.00	39.36	8.04	42.72	45.42	50.10	54.00	3.90	Average
5	9925.00	39.36	8.04	42.72	49.83	54.51	74.00	19.49	Peak
6	12322.00	40.16	9.08	40.52	38.93	47.65	74.00	26.35	Peak
7	14005.00	42.10	10.22	39.90	38.20	50.62	74.00	23.38	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

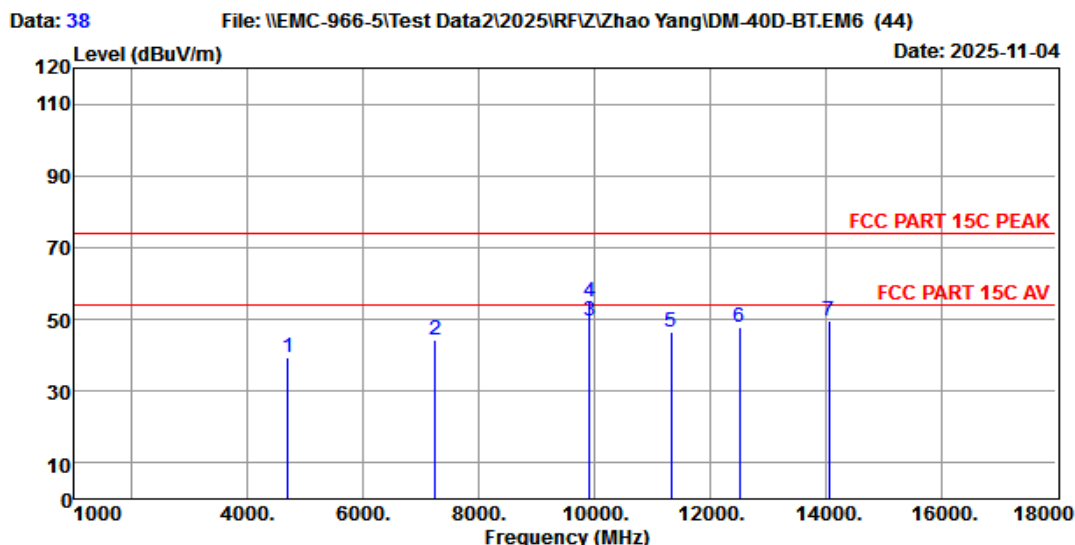

Site no. : 5# 966 Chamber Data no. : 38
Dis. / Ant. : 3m 9120D-1002 1-18G Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:19.5°C;Humi:51%;Press:101.55kPa
Engineer : Aron Zhang
EUT : ACTIVE MONITOR SPEAKER
Power : AC 120V/60Hz
M/N : DM-40D-BT
Test Mode : GFSK TX 2480MHz
Sample No : EST-251018002-001

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4689.00	32.12	5.23	43.26	45.47	39.56	74.00	34.44	Peak
2	7239.00	36.80	6.71	43.35	44.30	44.46	74.00	29.54	Peak
3	9925.00	39.36	8.04	42.72	45.12	49.80	54.00	4.20	Average
4	9925.00	39.36	8.04	42.72	50.15	54.83	74.00	19.17	Peak
5	11336.00	39.64	8.82	41.66	39.64	46.44	74.00	27.56	Peak
6	12509.00	40.20	9.18	40.24	38.49	47.63	74.00	26.37	Peak
7	14056.00	41.97	10.26	40.02	37.32	49.53	74.00	24.47	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

Note:

- The amplitude of 18GHz to 25GHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.
- All test mode had been pre-test, only Low/Middle/High Channel of the worst case modulation mode was reported.

Radiated Band Edge


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 29

File: \\EMC-966-5\Test Data2\2025\RF\Z\Zhao Yang\DM-40D-BT.EM6 (44)

Date: 2025-11-04

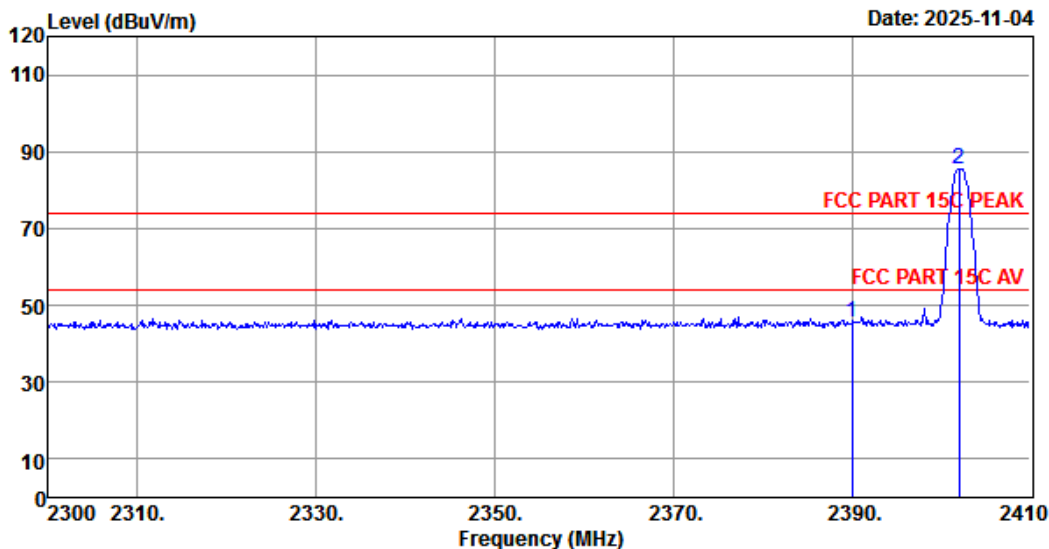

Site no. : 5# 966 Chamber Data no. : 29
Dis. / Ant. : 3m 9120D-1002 1-18G Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:19.5°C;Humi:51%;Press:101.55kPa
Engineer : Aron Zhang
EUT : ACTIVE MONITOR SPEAKER
Power : AC 120V/60Hz
M/N : DM-40D-BT
Test Mode : GFSK TX 2402MHz
Sample No : EST-251018002-001

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.60	3.49	44.13	58.63	45.59	74.00	28.41	Peak
2	2401.97	27.60	3.49	44.13	98.47	85.43	74.00	-11.43	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 30

File: \\EMC-966-5\Test Data2\2025\RF\Z\Zhao Yang\DM-40D-BT.EM6 (44)

Date: 2025-11-04

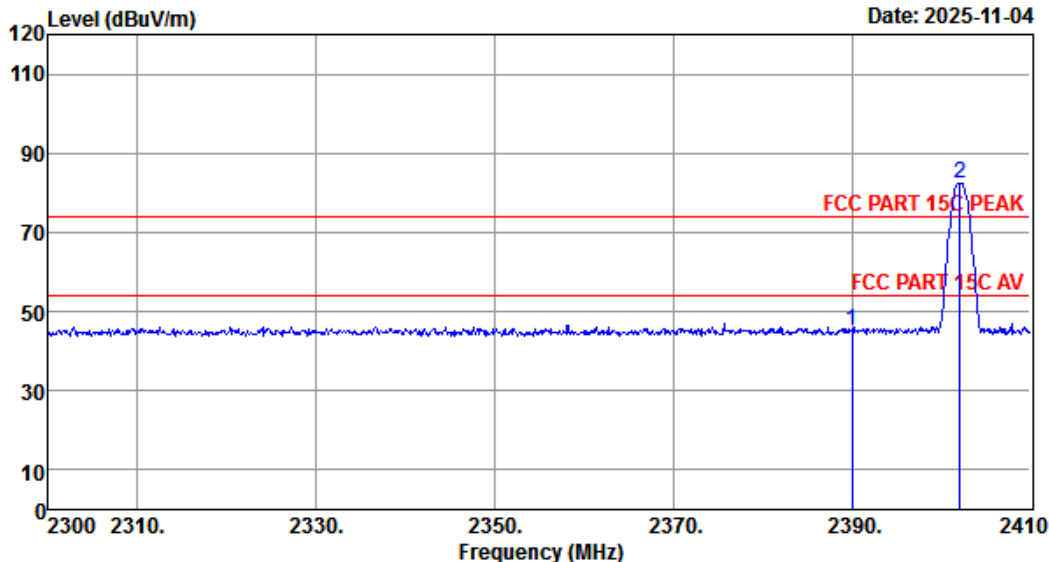

Site no. : 5# 966 Chamber Data no. : 30
Dis. / Ant. : 3m 9120D-1002 1-18G Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:19.5°C;Humi:51%;Press:101.55kPa
Engineer : Aron Zhang
EUT : ACTIVE MONITOR SPEAKER
Power : AC 120V/60Hz
M/N : DM-40D-BT
Test Mode : GFSK TX 2402MHz
Sample No : EST-251018002-001

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.60	3.49	44.13	58.11	45.07	74.00	28.93	Peak
2	2402.08	27.60	3.49	44.13	95.32	82.28	74.00	-8.28	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official
limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 31

File: \\EMC-966-5\Test Data2\2025\RF\Z\Zhao Yang\DM-40D-BT.EM6 (44)

Date: 2025-11-04

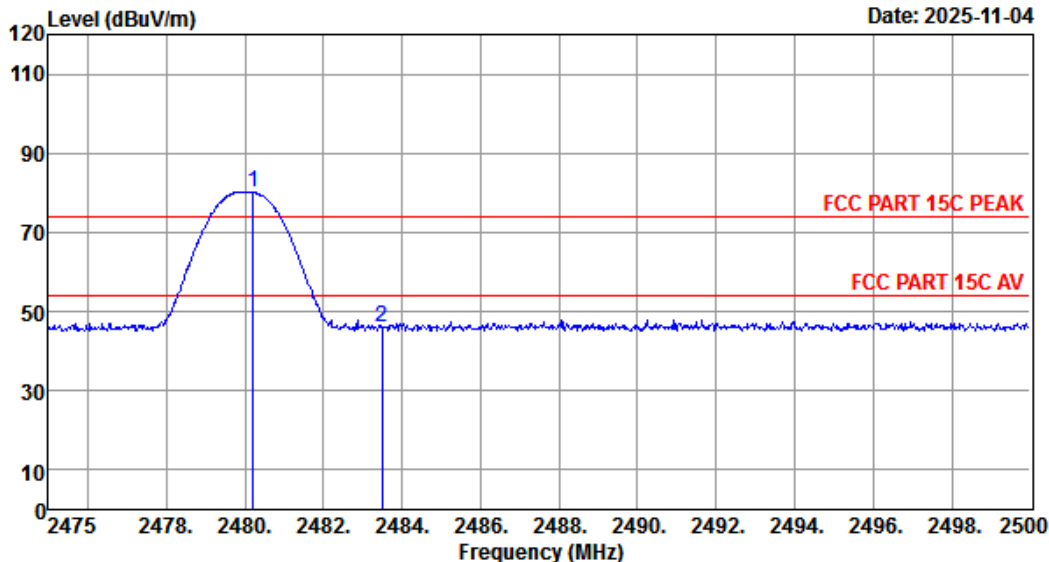

Site no. : 5# 966 Chamber Data no. : 31
Dis. / Ant. : 3m 9120D-1002 1-18G Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:19.5°C;Humi:51%;Press:101.55kPa
Engineer : Aron Zhang
EUT : ACTIVE MONITOR SPEAKER
Power : AC 120V/60Hz
M/N : DM-40D-BT
Test Mode : GFSK TX 2480MHz
Sample No : EST-251018002-001

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.20	27.93	3.57	44.03	92.66	80.13	74.00	-6.13	Peak
2	2483.50	27.93	3.57	44.03	58.38	45.85	74.00	28.15	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official
limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 32

File: \\EMC-966-5\Test Data2\2025\RF\Z\Zhao Yang\DM-40D-BT.EM6 (44)

Date: 2025-11-04

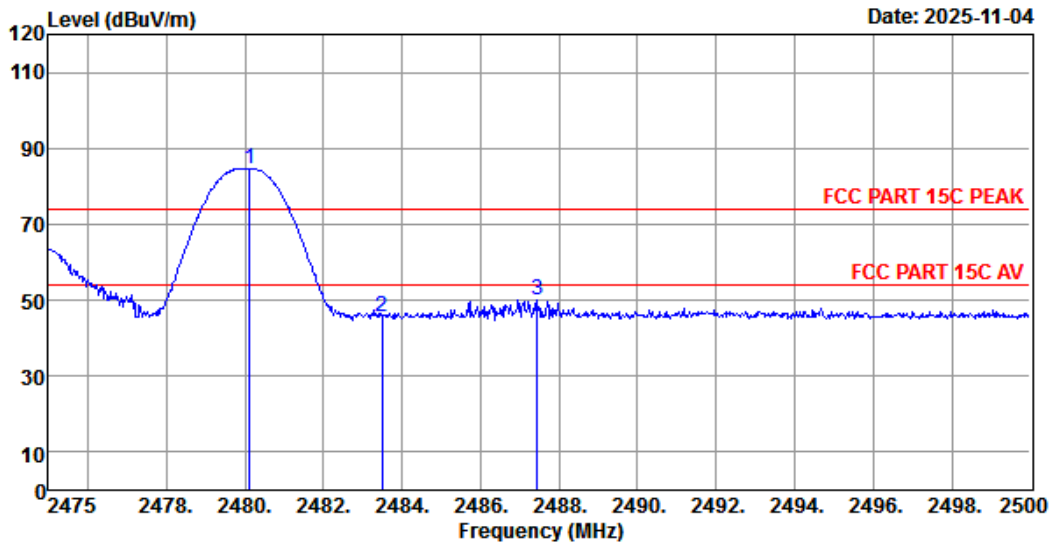

Site no. : 5# 966 Chamber Data no. : 32
Dis. / Ant. : 3m 9120D-1002 1-18G Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:19.5°C;Humi:51%;Press:101.55kPa
Engineer : Aron Zhang
EUT : ACTIVE MONITOR SPEAKER
Power : AC 120V/60Hz
M/N : DM-40D-BT
Test Mode : GFSK TX 2480MHz
Sample No : EST-251018002-001

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.13	27.93	3.57	44.03	97.21	84.68	74.00	-10.68	Peak
2	2483.50	27.93	3.57	44.03	58.34	45.81	74.00	28.19	Peak
3	2487.45	27.93	3.57	44.03	62.54	50.01	74.00	23.99	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

Note: All test mode had been pre-test, only Low/High Channel of the worst case modulation mode was reported.

4.AC POWER LINE CONDUCTED EMISSIONS


4.1. Limit

Frequency			Maximum RF Line Voltage	
			Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz	~	500kHz	66 ~ 56*	56 ~ 46*
500kHz	~	5MHz	56	46
5MHz	~	30MHz	60	50

Note:

1. * Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

4.2. Test Setup

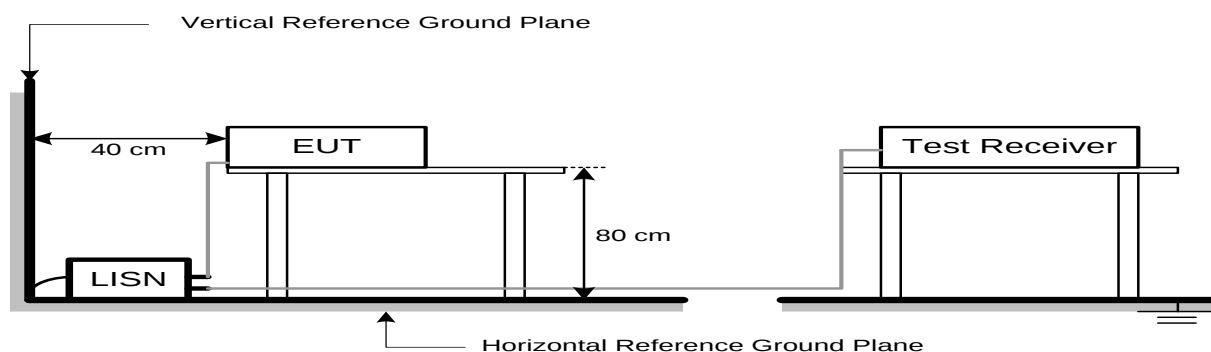

4.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	9KHz
VBW	9KHz
Start frequency	150KHz
Stop frequency	30MHz
Sweep Time	Auto
Detector	QP/AVG
Trace Mode	Max Hold

4.4. Test Procedure

- a. The EUT was placed on a non-metallic table, 80cm above the ground plane.
- b. The EUT Power connected to the power mains through a line impedance stabilization network.
- c. Provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs).
- d. Set the EUT transmit continuously with maximum output power.
- e. Spectrum analyzer setting parameters in accordance with section 4.3.
- f. The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2020 on Conducted Emission Test.
- g. Record the results in the test report.

4.5. Test Result


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 54

File: \\EMC-CE-3\Test Data2\2025\RF\C\Chao Yang.EM6 (60)

Date: 2025-11-08

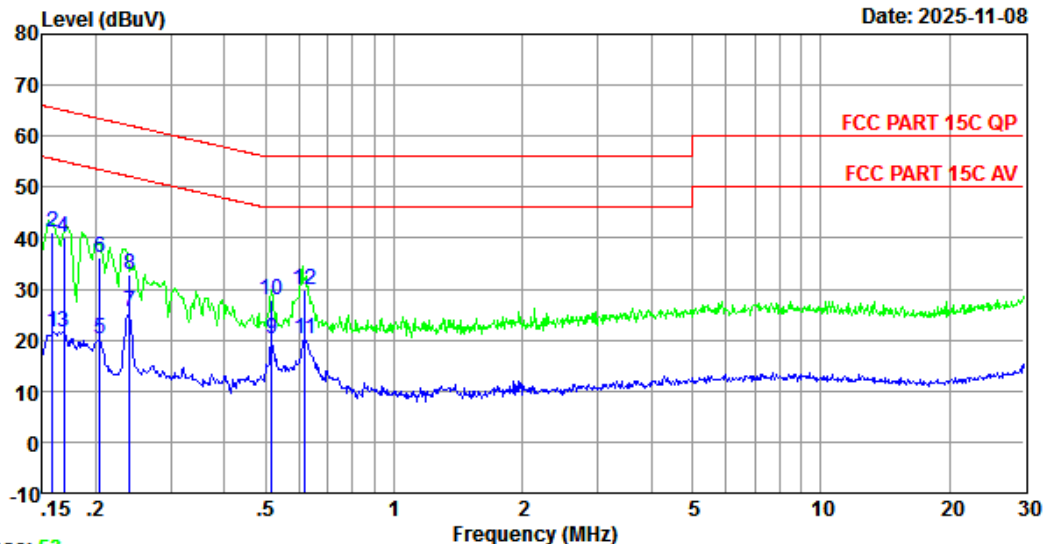

Trace: 53

Site no : 3#CE Shield Room Data no. : 54
Env. / Ins. : Temp:27.1℃;Humi:71%;Press:101.1kPa LINE Phase : LINE
Limit : FCC PART 15C QP
Engineer : Wind Li
EUT : ACTIVE MONITOR SPEAKER
Power : AC 120V/60Hz
M/N : DM-40D-BT
Test Mode : TX Mode
Sample No : EST-251018002-001

	Freq. (MHz)	LISN Factor (db)	Cable Loss (db)	Reading dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.16	9.95	9.84	1.92	21.71	55.56	33.85	Average
2	0.16	9.95	9.84	21.26	41.05	65.56	24.51	QP
3	0.17	9.95	9.84	1.88	21.67	55.03	33.36	Average
4	0.17	9.95	9.84	20.24	40.03	65.03	25.00	QP
5	0.20	9.89	9.84	0.35	20.08	53.45	33.37	Average
6	0.20	9.89	9.84	16.54	36.27	63.45	27.18	QP
7	0.24	9.88	9.84	5.82	25.54	52.08	26.54	Average
8	0.24	9.88	9.84	13.26	32.98	62.08	29.10	QP
9	0.52	9.76	9.84	0.67	20.27	46.00	25.73	Average
10	0.52	9.76	9.84	8.27	27.87	56.00	28.13	QP
11	0.62	9.78	9.84	0.54	20.16	46.00	25.84	Average
12	0.62	9.78	9.84	10.26	29.88	56.00	26.12	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 56

File: \\EMC-CE-3\Test Data2\2025\RFIC\Chao Yang.EM6 (60)

Date: 2025-11-08

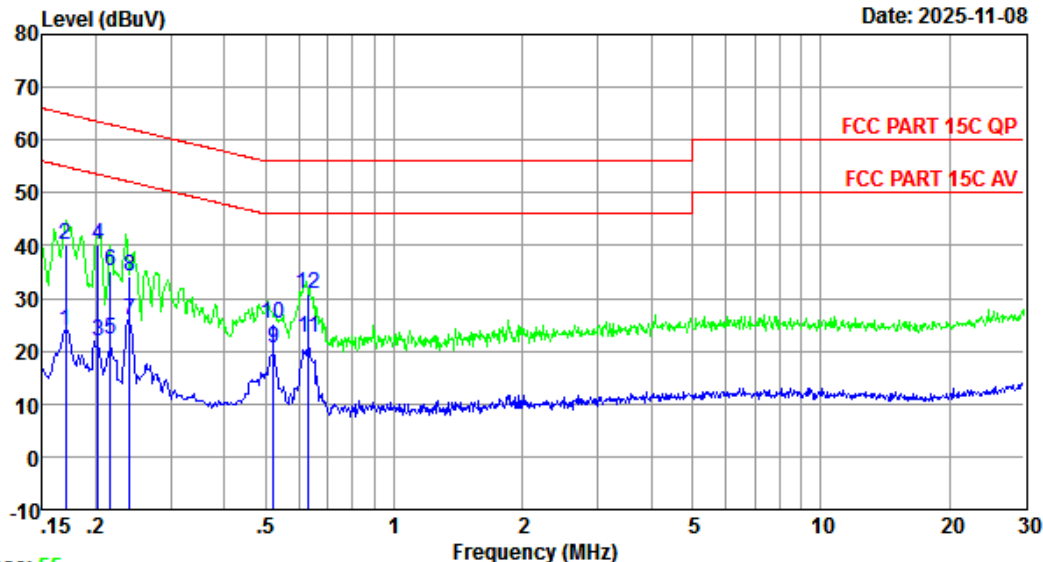

Trace: 55


Site no : 3#CE Shield Room Data no. : 56
Env. / Ins. : Temp:27.1°C;Humi:71%;Press:101.1kPa LINE Phase : NEUTRAL
Limit : FCC PART 15C QP
Engineer : Wind Li
EUT : ACTIVE MONITOR SPEAKER
Power : AC 120V/60Hz
M/N : DM-40D-BT
Test Mode : TX Mode
Sample No : EST-251018002-001

	Freq. (MHz)	LISN Factor (db)	Cable Loss (db)	Reading dBuV	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.17	9.96	9.84	4.17	23.97	54.94	30.97	Average
2	0.17	9.96	9.84	20.26	40.06	64.94	24.88	QP
3	0.20	9.92	9.84	2.22	21.98	53.49	31.51	Average
4	0.20	9.92	9.84	20.26	40.02	63.49	23.47	QP
5	0.22	9.93	9.84	2.29	22.06	52.96	30.90	Average
6	0.22	9.93	9.84	15.27	35.04	62.96	27.92	QP
7	0.24	9.94	9.84	6.24	26.02	52.08	26.06	Average
8	0.24	9.94	9.84	14.27	34.05	62.08	28.03	QP
9	0.52	9.88	9.84	0.83	20.55	46.00	25.45	Average
10	0.52	9.88	9.84	5.52	25.24	56.00	30.76	QP
11	0.63	9.63	9.84	3.04	22.51	46.00	23.49	Average
12	0.63	9.63	9.84	11.26	30.73	56.00	25.27	QP


Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

5. TEST SETUP PHOTO

Conducted Test

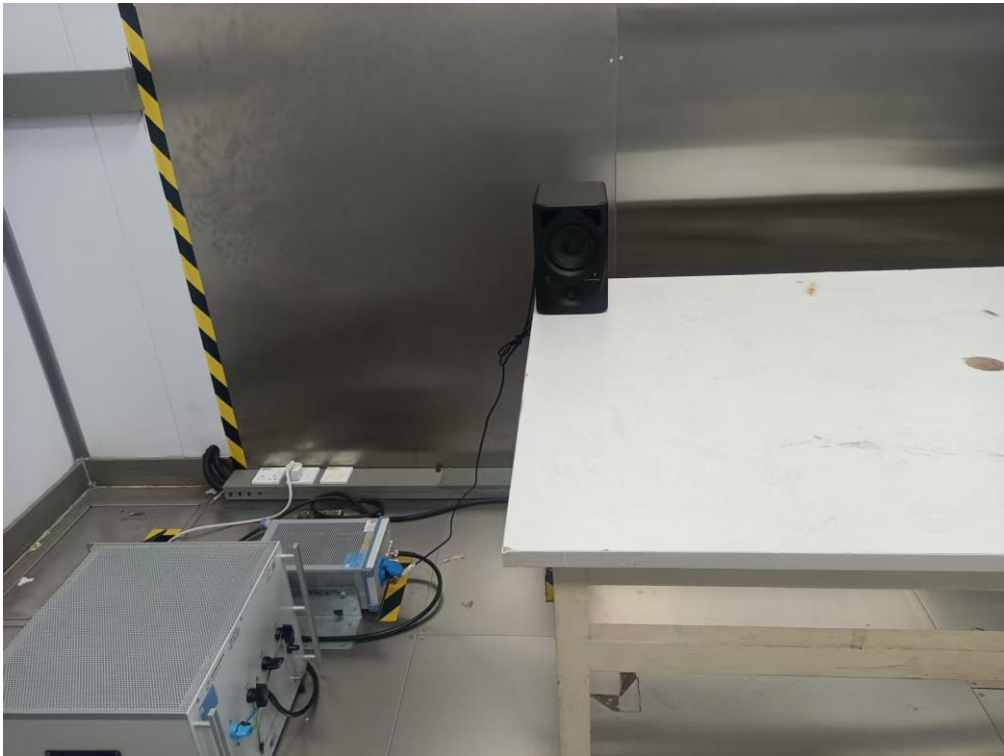

Radiated Test (Below 1GHz)

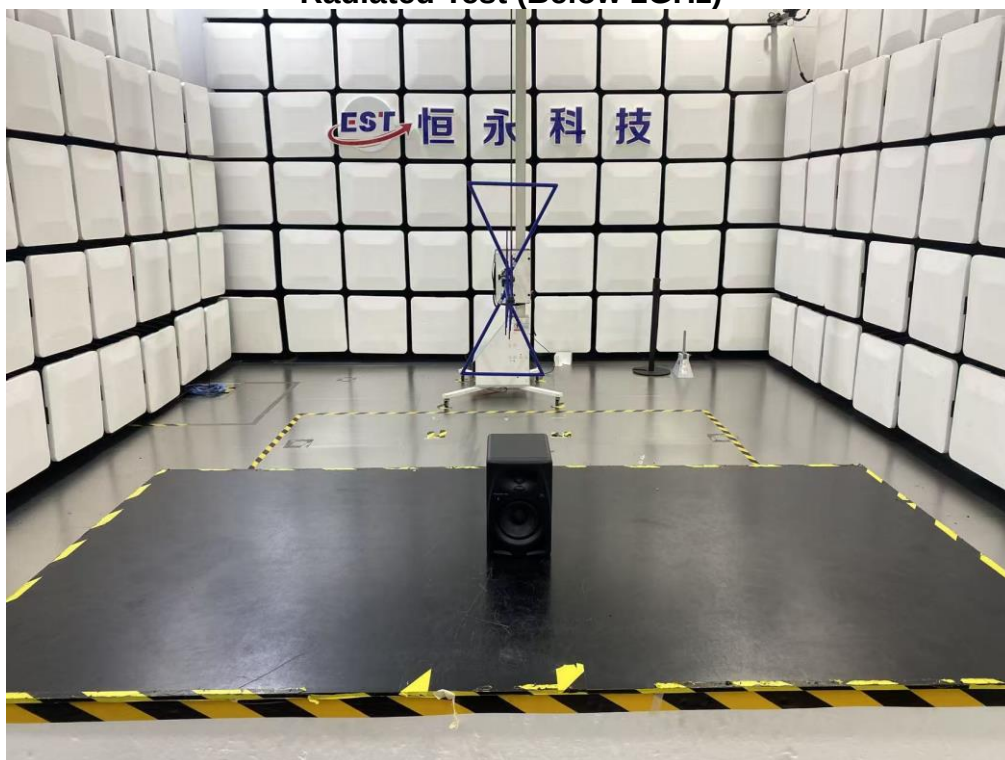

Radiated Test (Above 1GHz)




6.EUT PHOTO



External Photos
M/N: DM-40D-BT-W



External Photos
M/N: DM-40D-BT-W

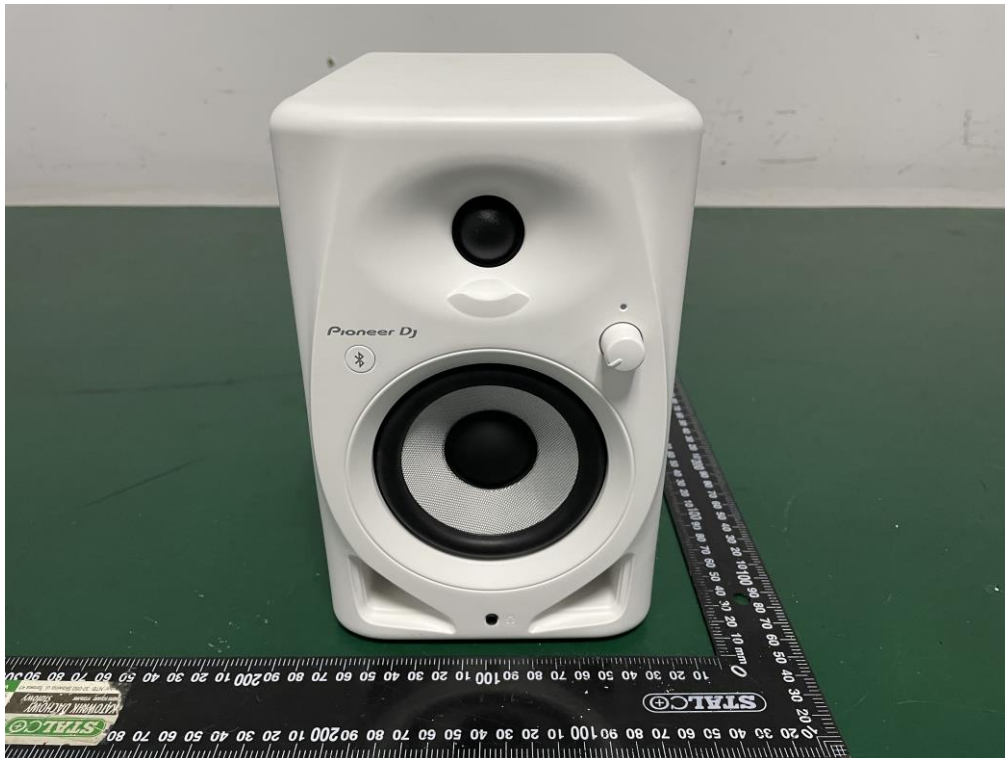

External Photos
M/N: DM-40D-BT-W

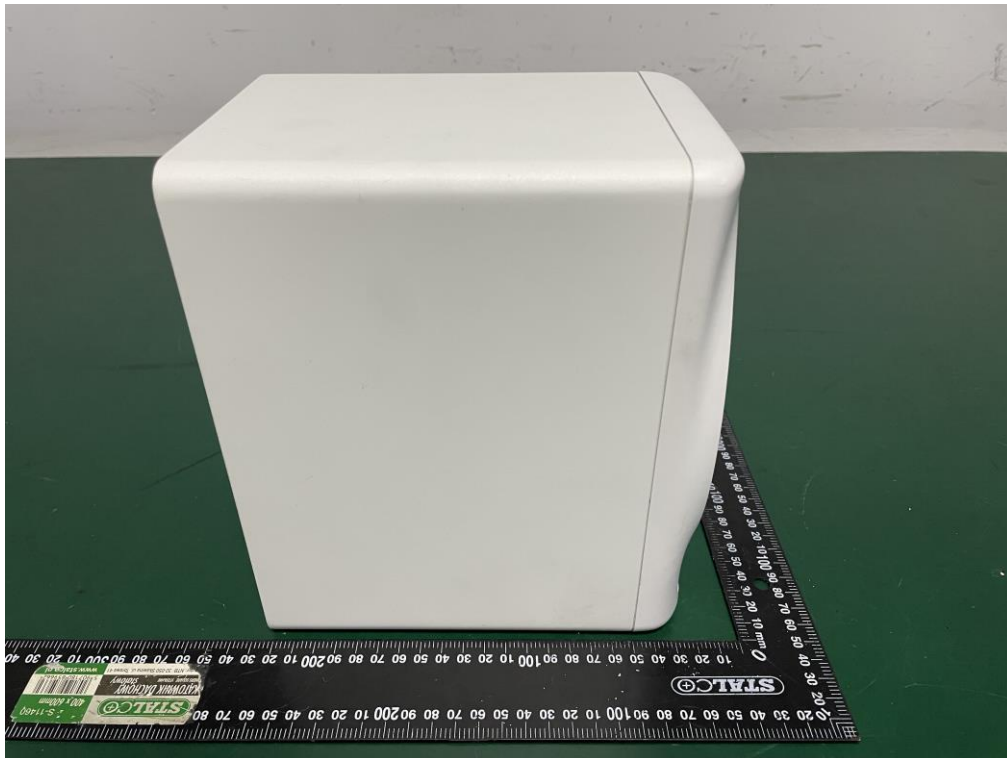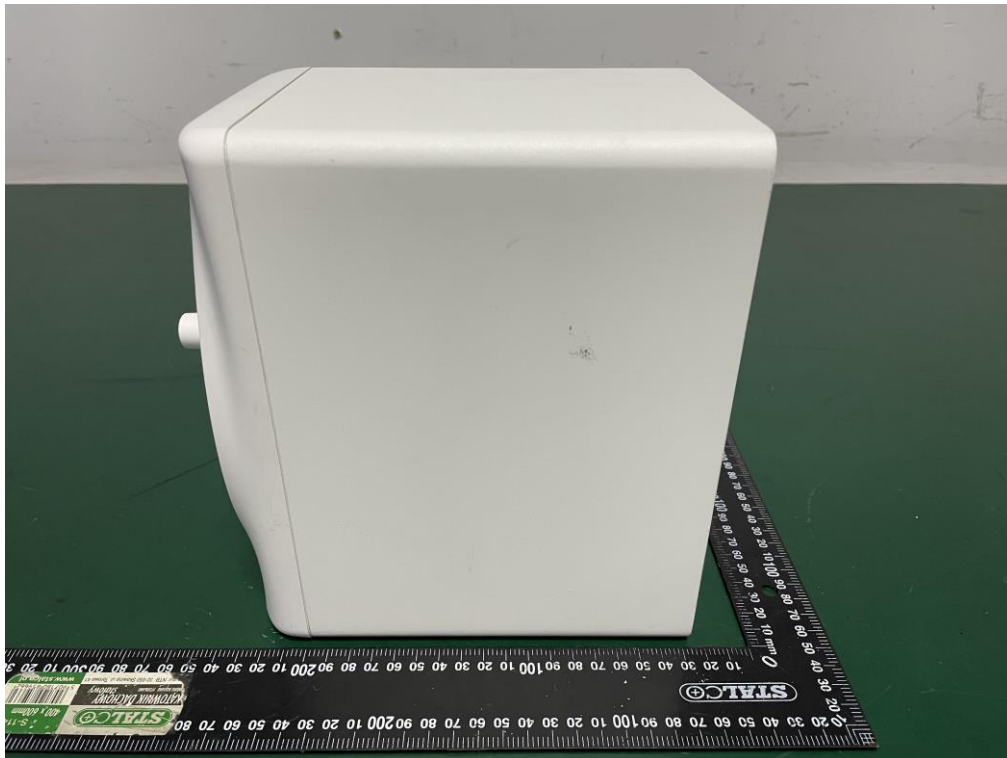

External Photos
M/N: DM-40D-BT-W




External Photos
M/N: DM-40D-BT-W




M/N: DM-40D-BT-W



External Photos
M/N: DM-40D-BT-W

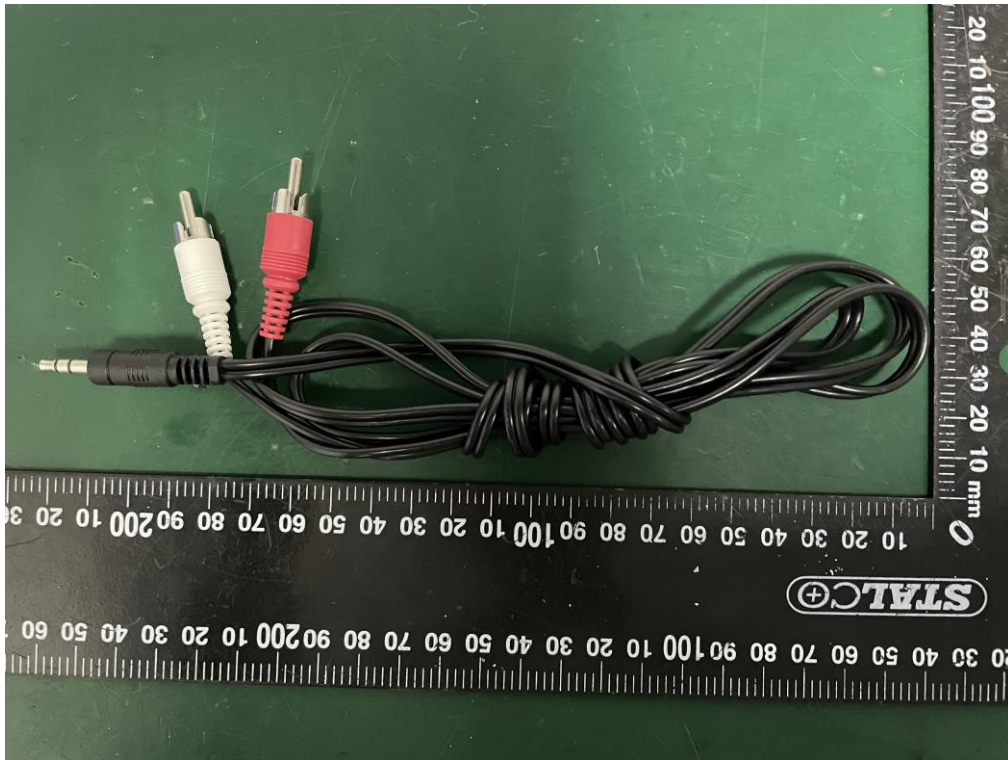

Internal Photos
M/N: DM-40D-BT-W

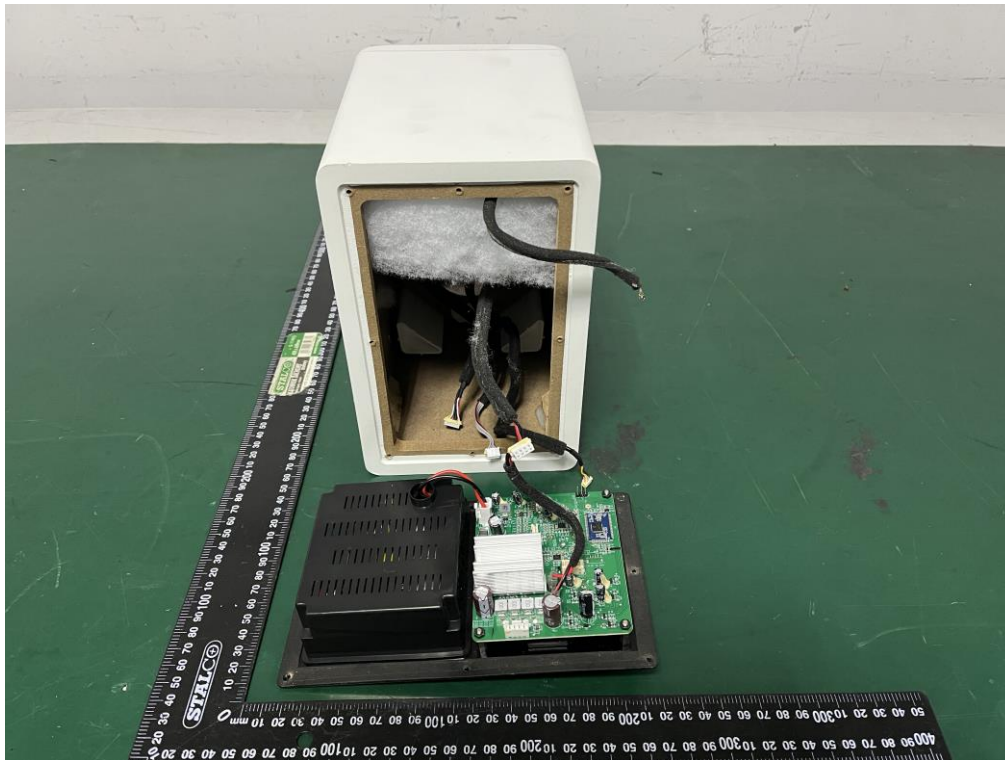



Internal Photos
M/N: DM-40D-BT-W



Internal Photos
M/N: DM-40D-BT-W





Internal Photos
M/N: DM-40D-BT-W

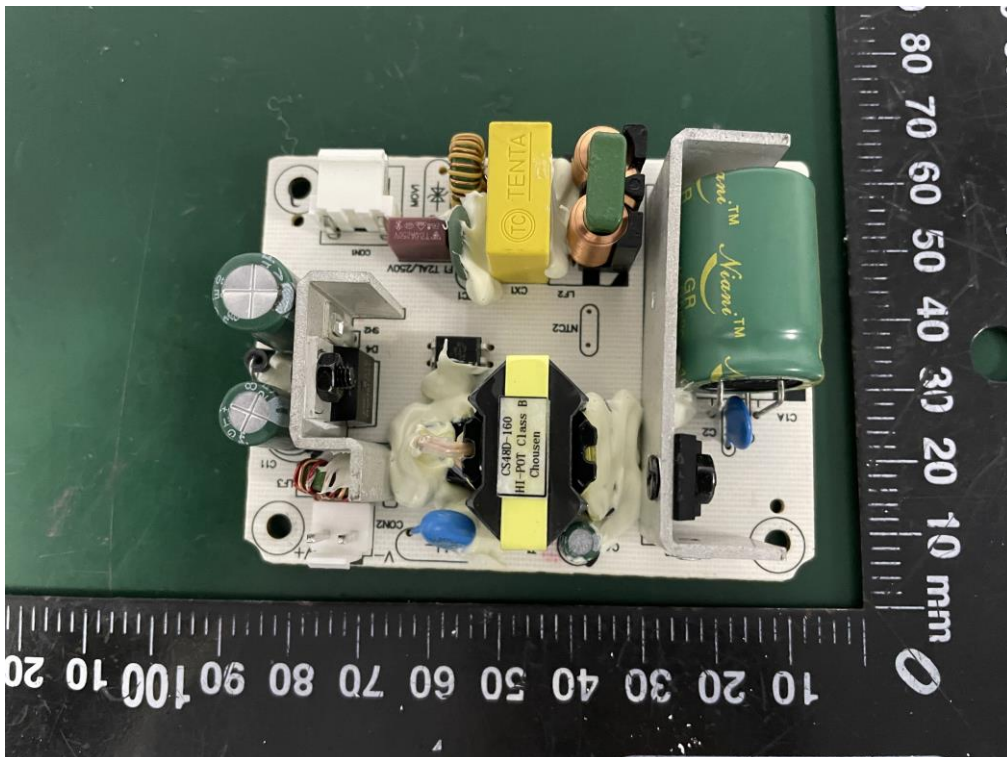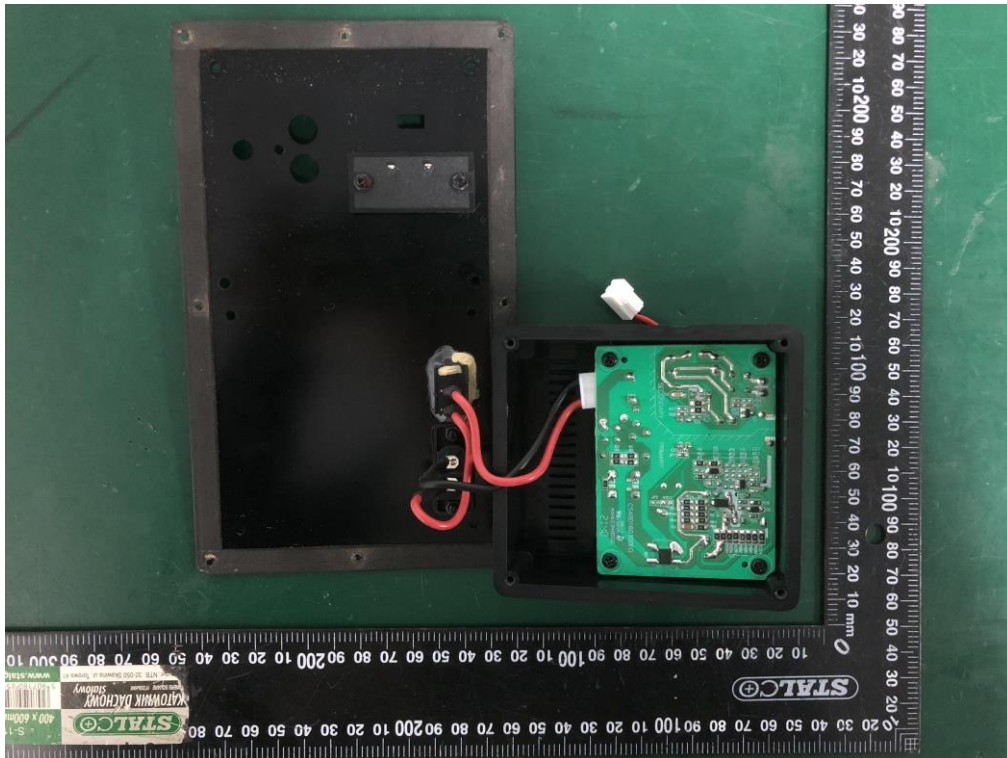


Internal Photos

M/N: DM-40D-BT-W

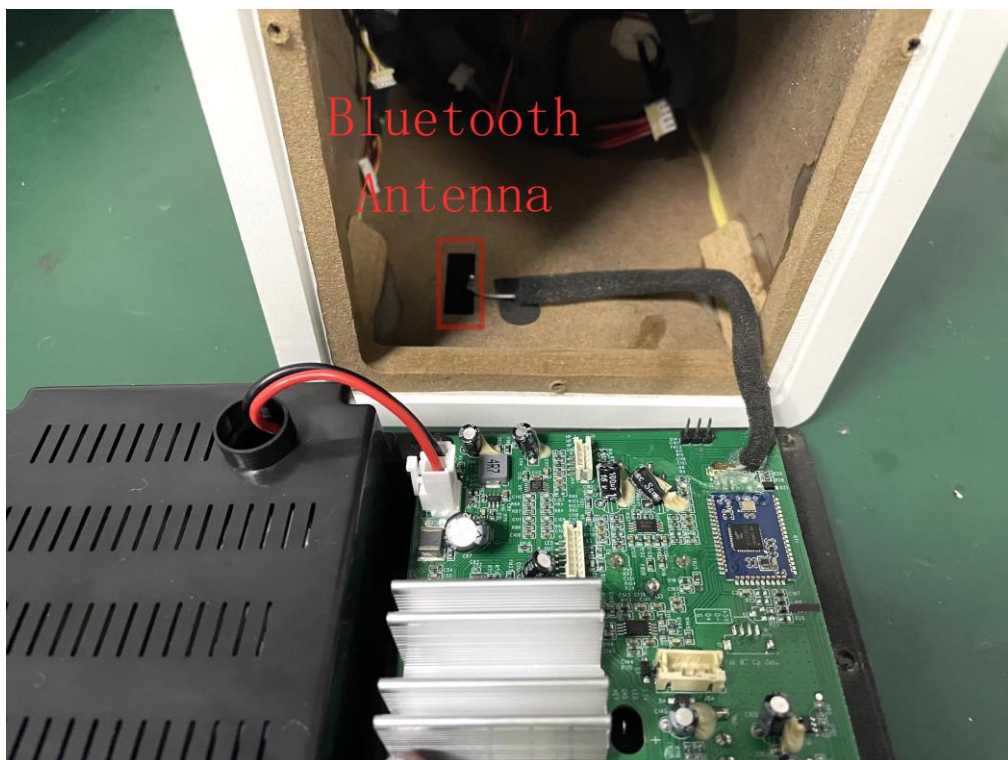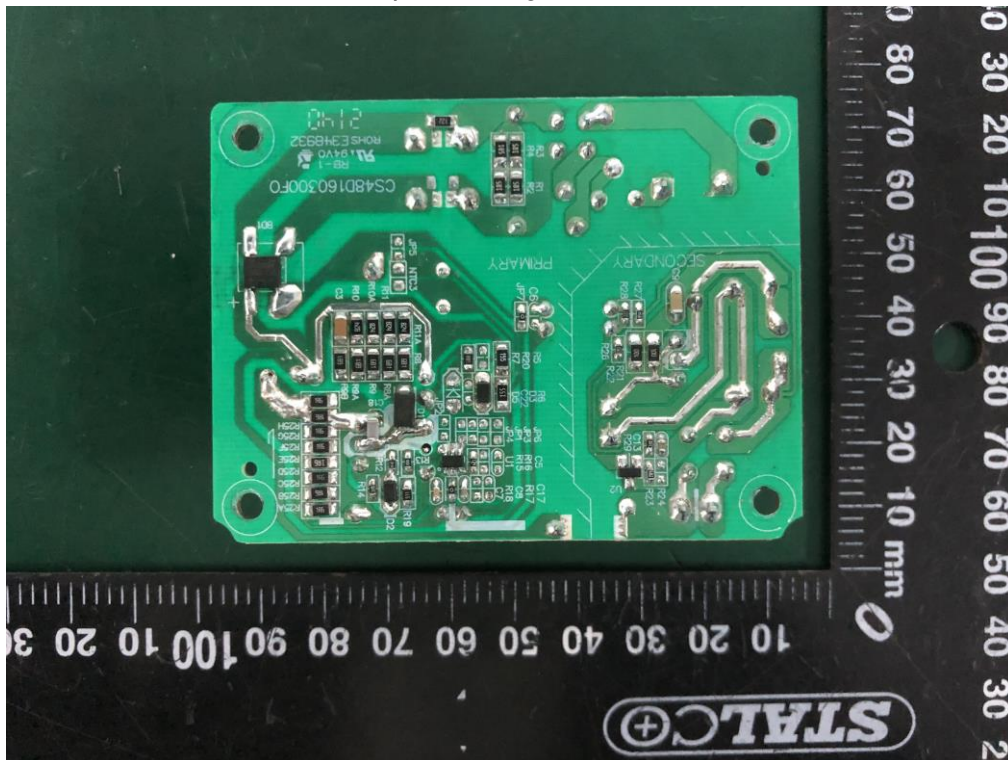

Internal Photos
M/N: DM-40D-BT-W

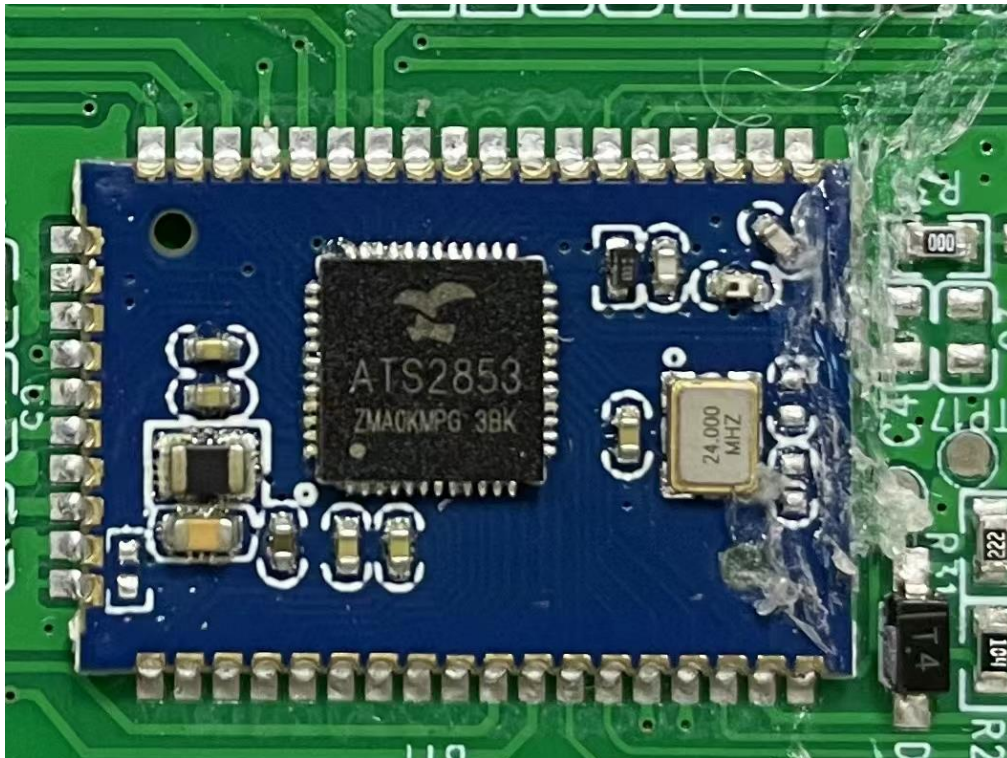

New photographs

External Photos

M/N: DM-40D-BT





External Photos

M/N: DM-40D-BT




External Photos
M/N: DM-40D-BT

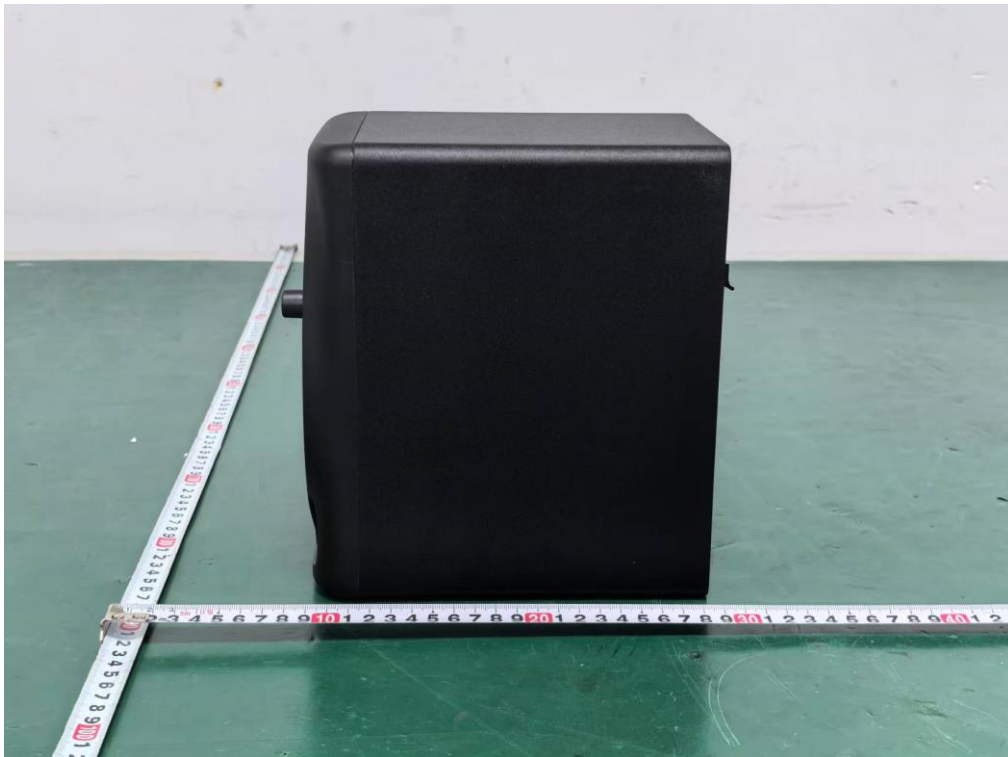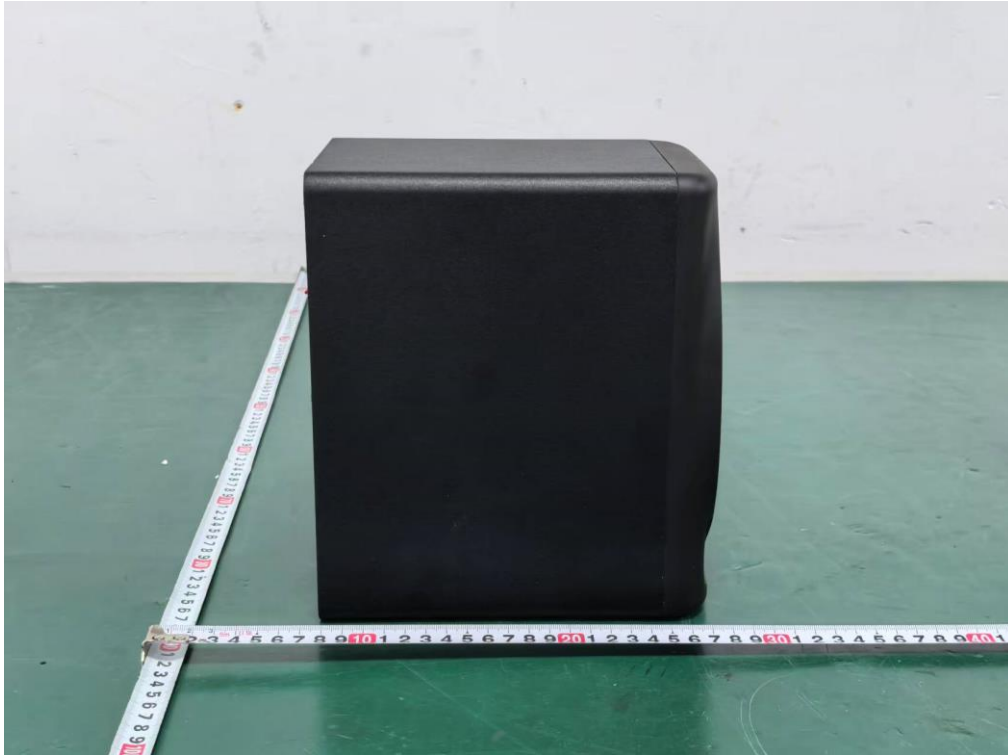



External Photos
M/N: DM-40D-BT




Internal Photos
M/N: DM-40D-BT

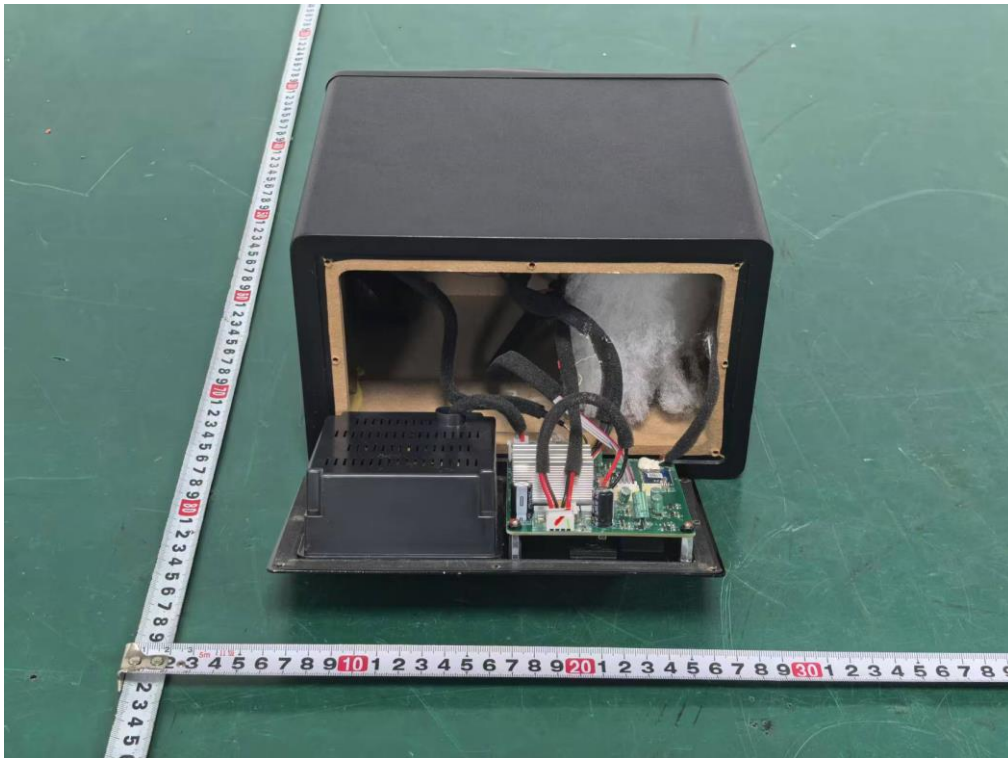

Internal Photos
M/N: DM-40D-BT

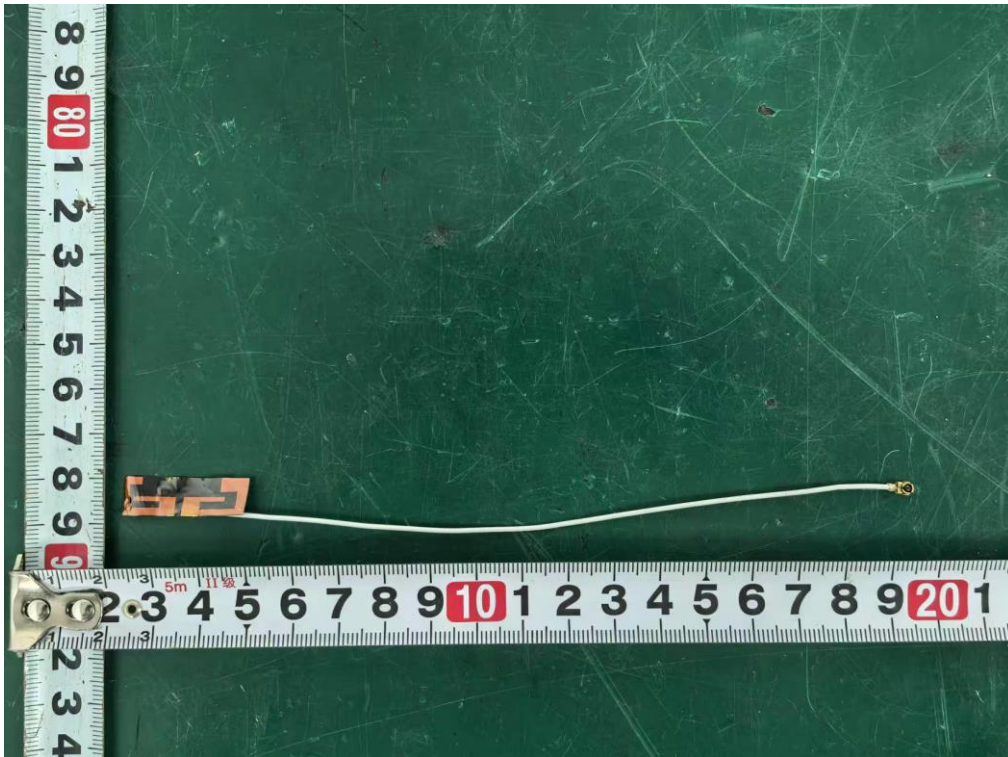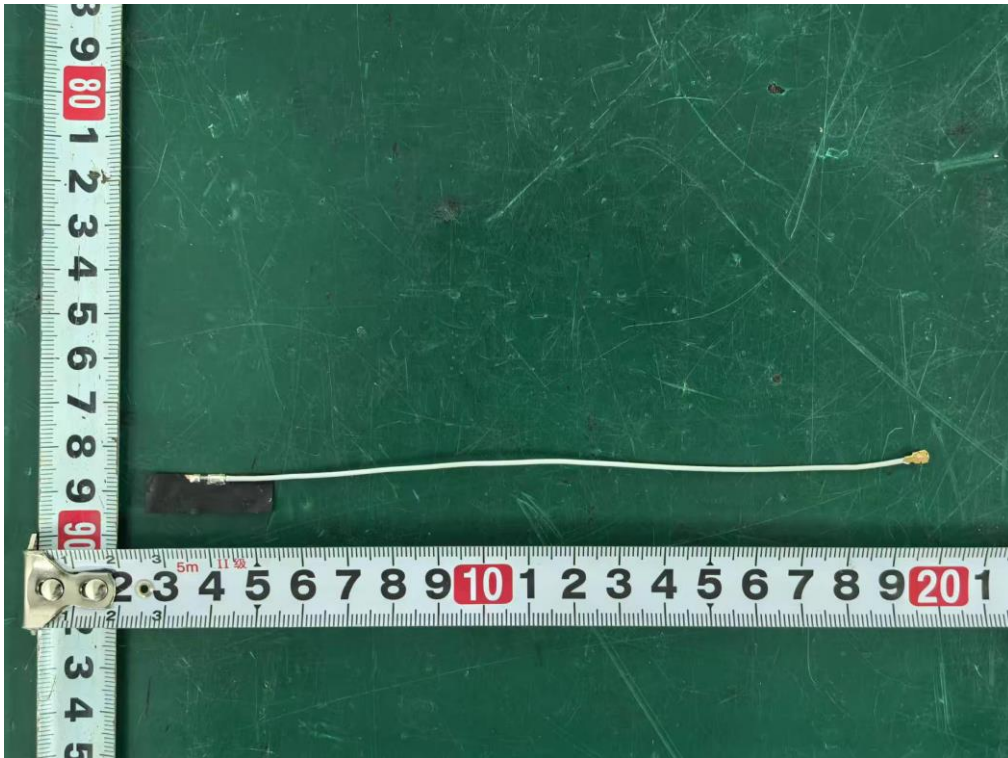

Internal Photos
M/N: DM-40D-BT

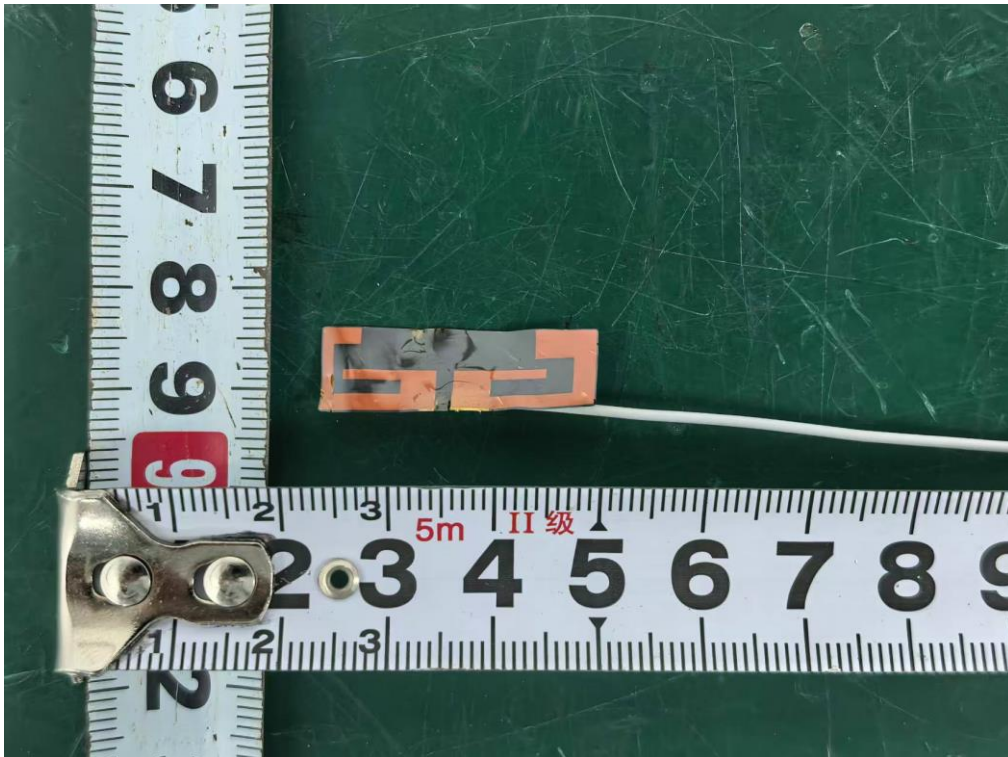

End of Test Report