

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/3/25

01_Bluetooth_1Mbps_Front_25mm_Ch39

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.292

Medium: HSL_2450_260325 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.786$ S/m; $\epsilon_r = 39.312$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(7.65, 7.44, 7.58) @ 2441 MHz; Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.00893 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.232 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.0370 W/kg

SAR(1 g) = 0.00786 W/kg; SAR(10 g) = 0.0043 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 58.9%

Maximum value of SAR (measured) = 0.00965 W/kg

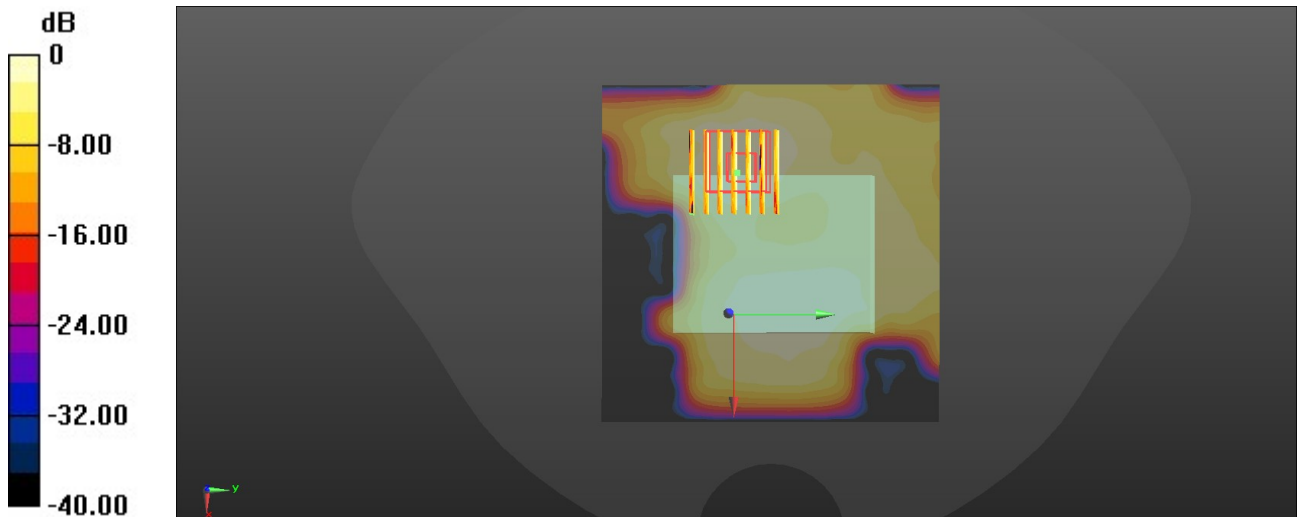

0 dB = 0.00965 W/kg = -20.15 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/3/25

02_Bluetooth_1Mbps_Back_0mm_Ch39

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.292

Medium: HSL_2450_260325 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.786$ S/m; $\epsilon_r = 39.312$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(7.65, 7.44, 7.58) @ 2441 MHz; Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0585 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.016 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.0860 W/kg

SAR(1 g) = 0.046 W/kg; SAR(10 g) = 0.025 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 53.4%

Maximum value of SAR (measured) = 0.0583 W/kg

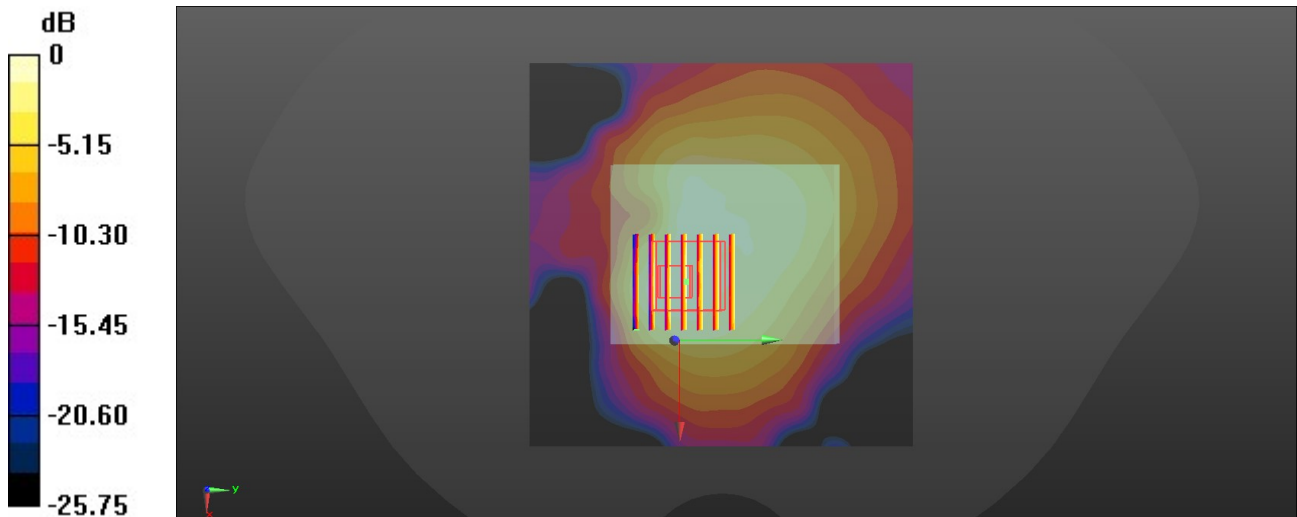

0 dB = 0.0583 W/kg = -12.34 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/3/25

03_Bluetooth_1Mbps_Front_0mm_Ch39

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.292

Medium: HSL_2450_260325 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.786$ S/m; $\epsilon_r = 39.312$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(7.65, 7.44, 7.58) @ 2441 MHz; Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.594 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.783 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.831 W/kg

SAR(1 g) = 0.425 W/kg; SAR(10 g) = 0.202 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 52.7%

Maximum value of SAR (measured) = 0.558 W/kg

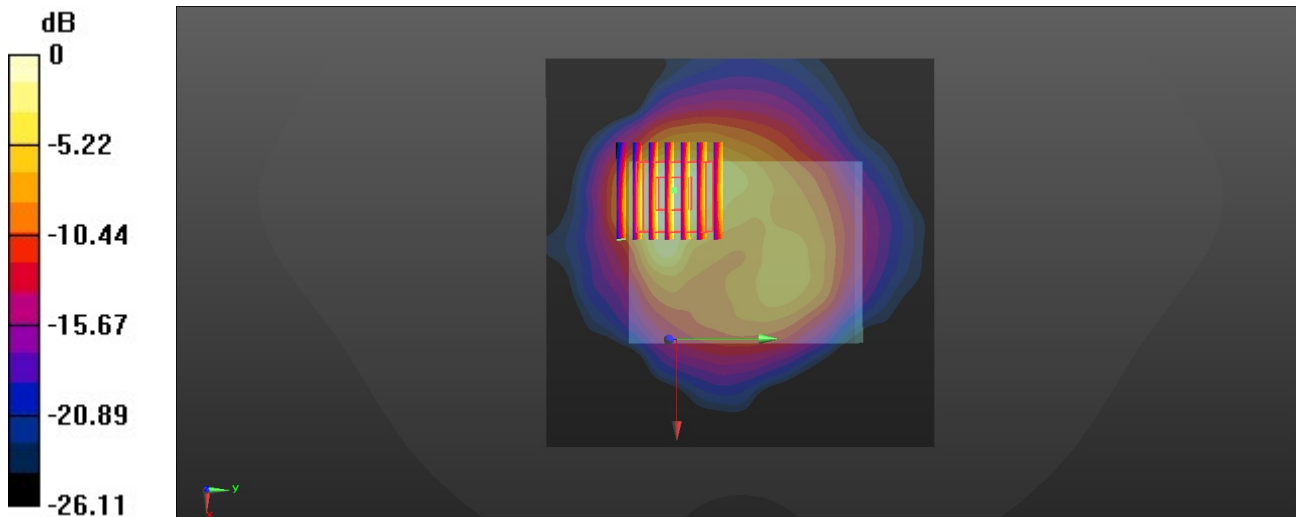

0 dB = 0.558 W/kg = -2.53 dBW/kg