





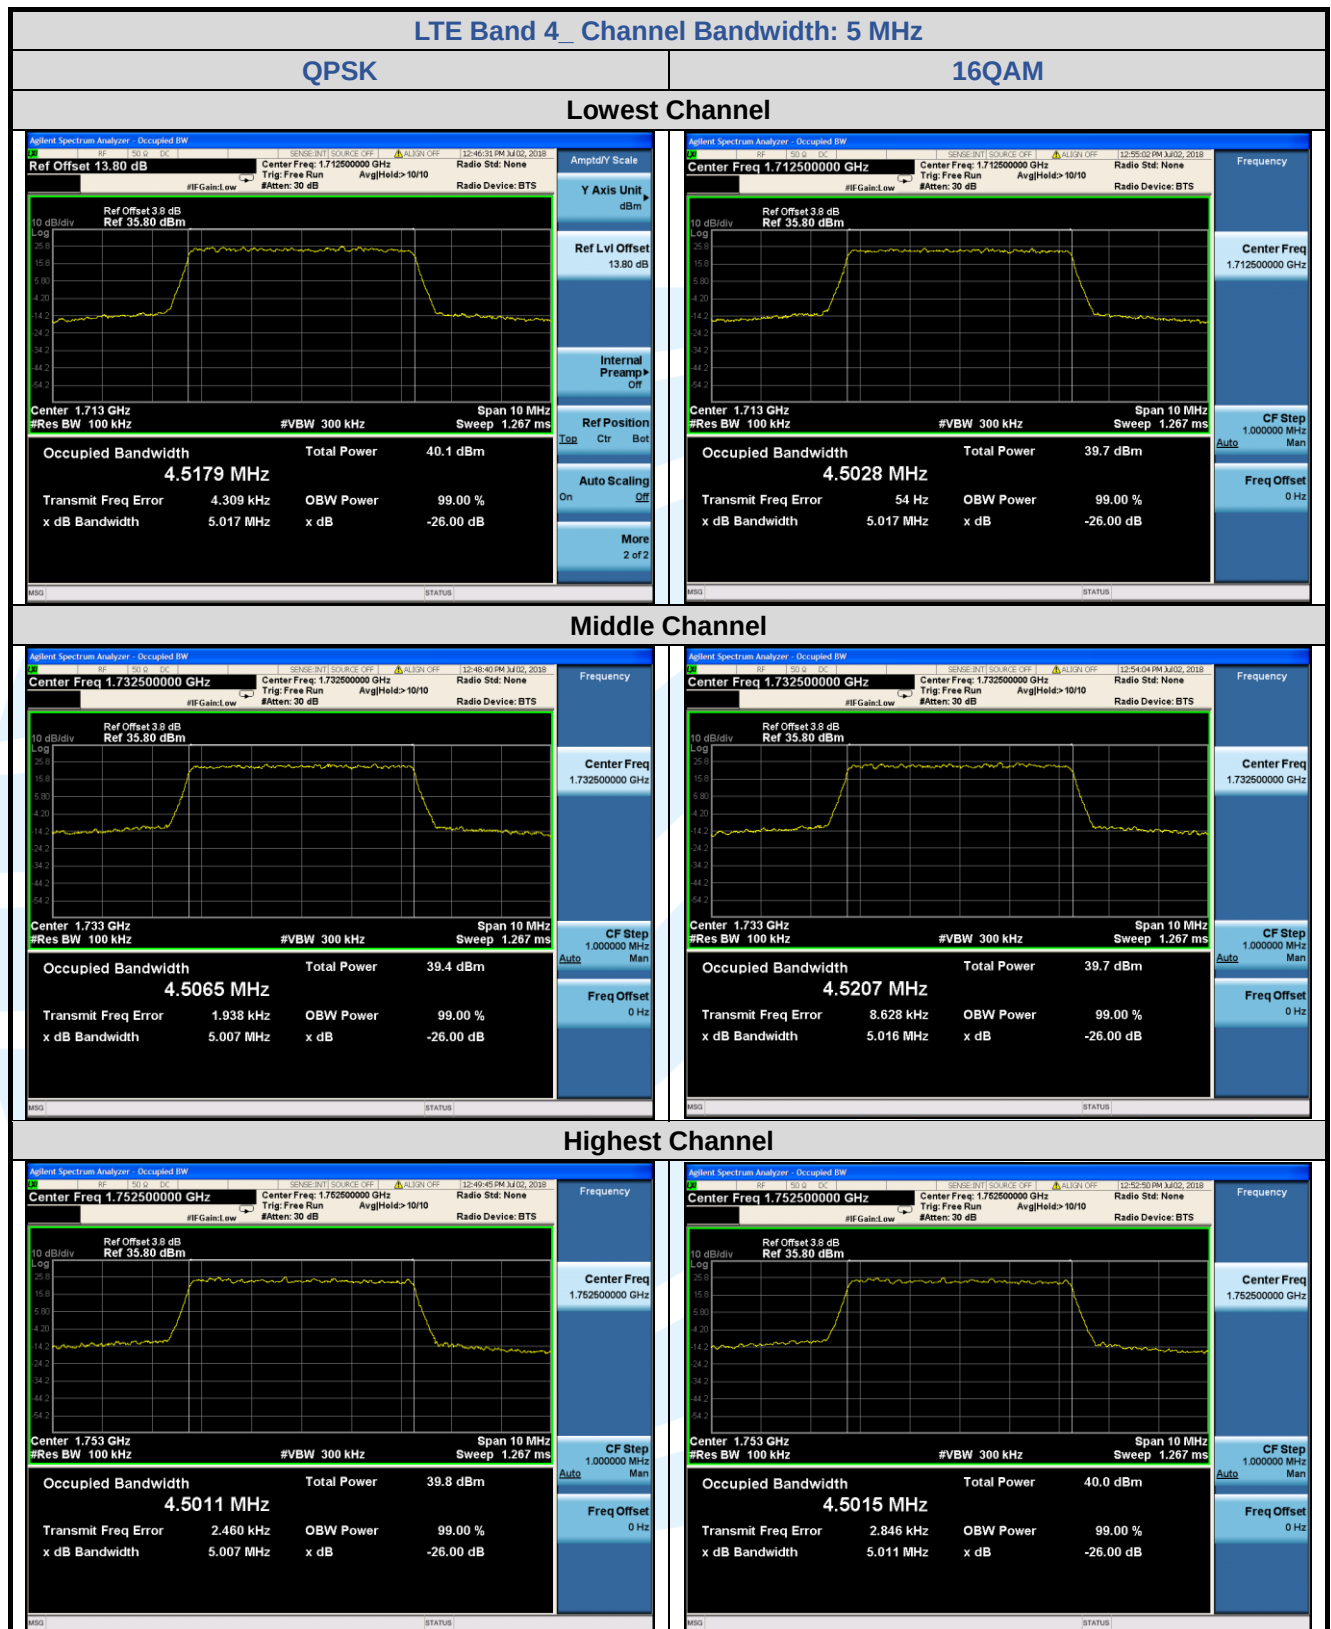


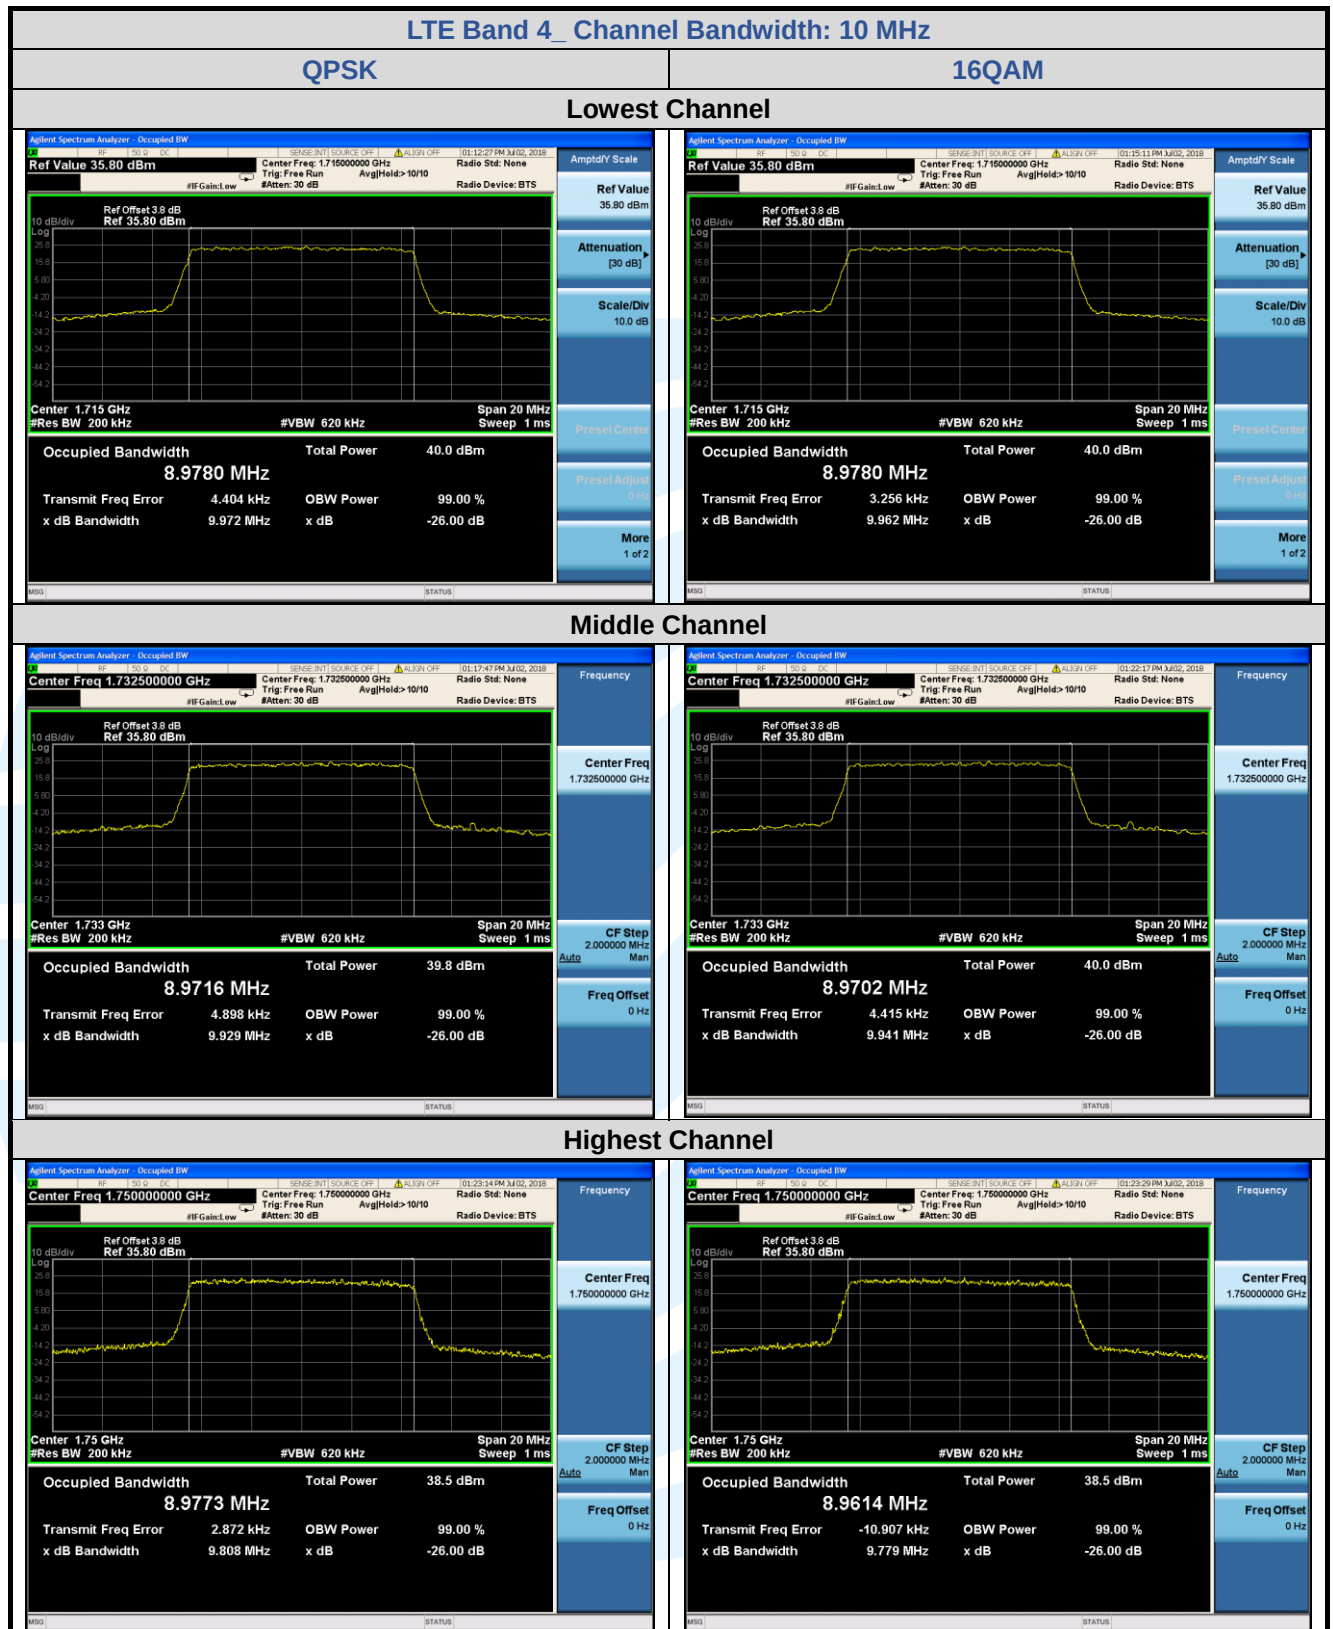


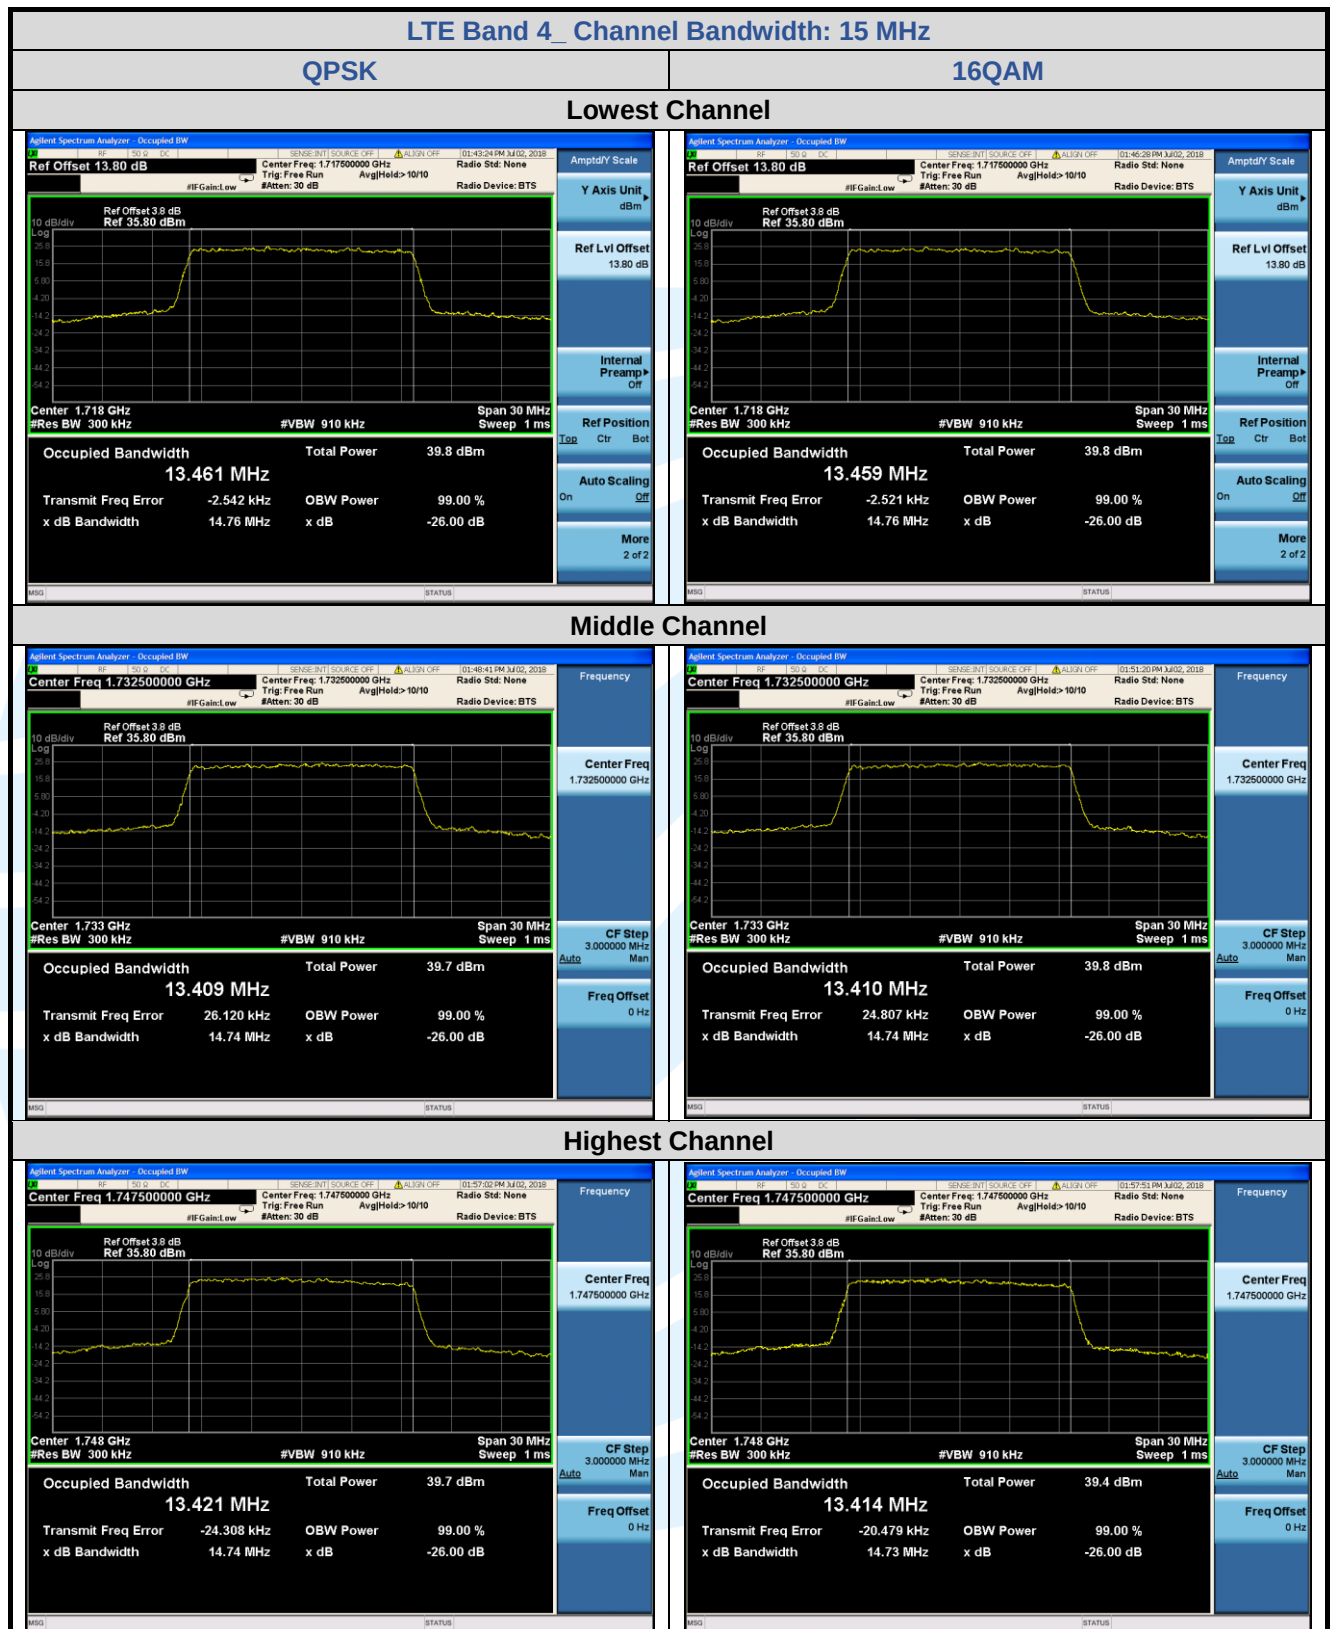


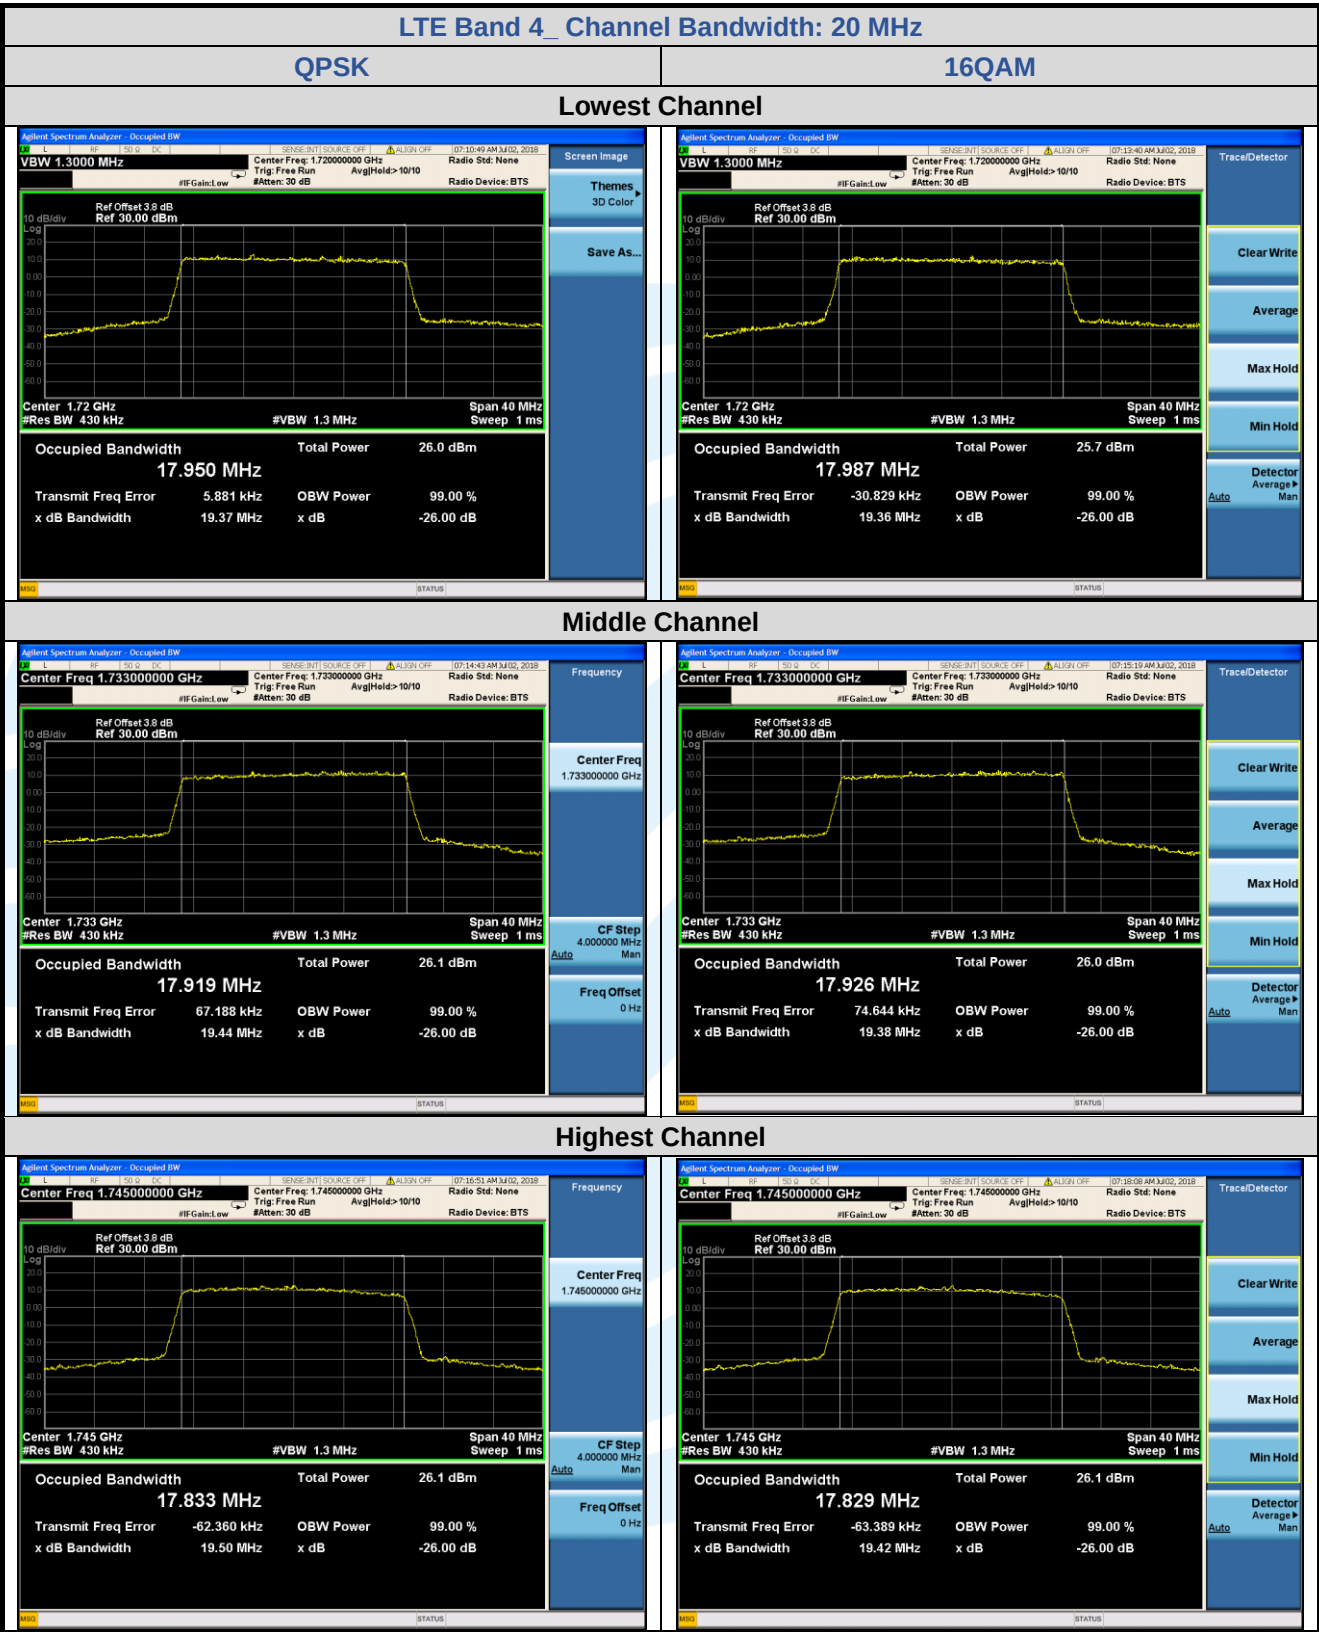


LTE Band 12								
Channel	RB Configuration		26 dB BW (MHz)			99% BW (MHz)		
	Size	Offset	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
Channel Bandwidth: 1.4 MHz								
Lowest	6	0	1.363	1.357	N/A	1.1468	1.1395	N/A
Middle	6	0	1.348	1.356	N/A	1.1219	1.1293	N/A
Highest	6	0	1.365	1.375	N/A	1.1305	1.1399	N/A
Channel Bandwidth: 3 MHz								
Lowest	15	0	2.985	2.992	N/A	2.7018	2.7093	N/A
Middle	15	0	2.988	2.991	N/A	2.7102	2.7105	N/A
Highest	15	0	3.017	3.007	N/A	2.7127	2.7123	N/A
Channel Bandwidth: 5 MHz								
Lowest	25	0	5.017	5.014	N/A	4.5083	4.5084	N/A
Middle	25	0	5.006	5.001	N/A	4.5138	4.5145	N/A
Highest	25	0	5.059	5.043	N/A	4.5307	4.5300	N/A
Channel Bandwidth: 10 MHz								
Lowest	50	0	9.932	9.870	N/A	9.0089	9.0010	N/A
Middle	50	0	9.755	9.774	N/A	8.8828	8.8879	N/A
Highest	50	0	9.816	9.760	N/A	8.9657	8.9731	N/A

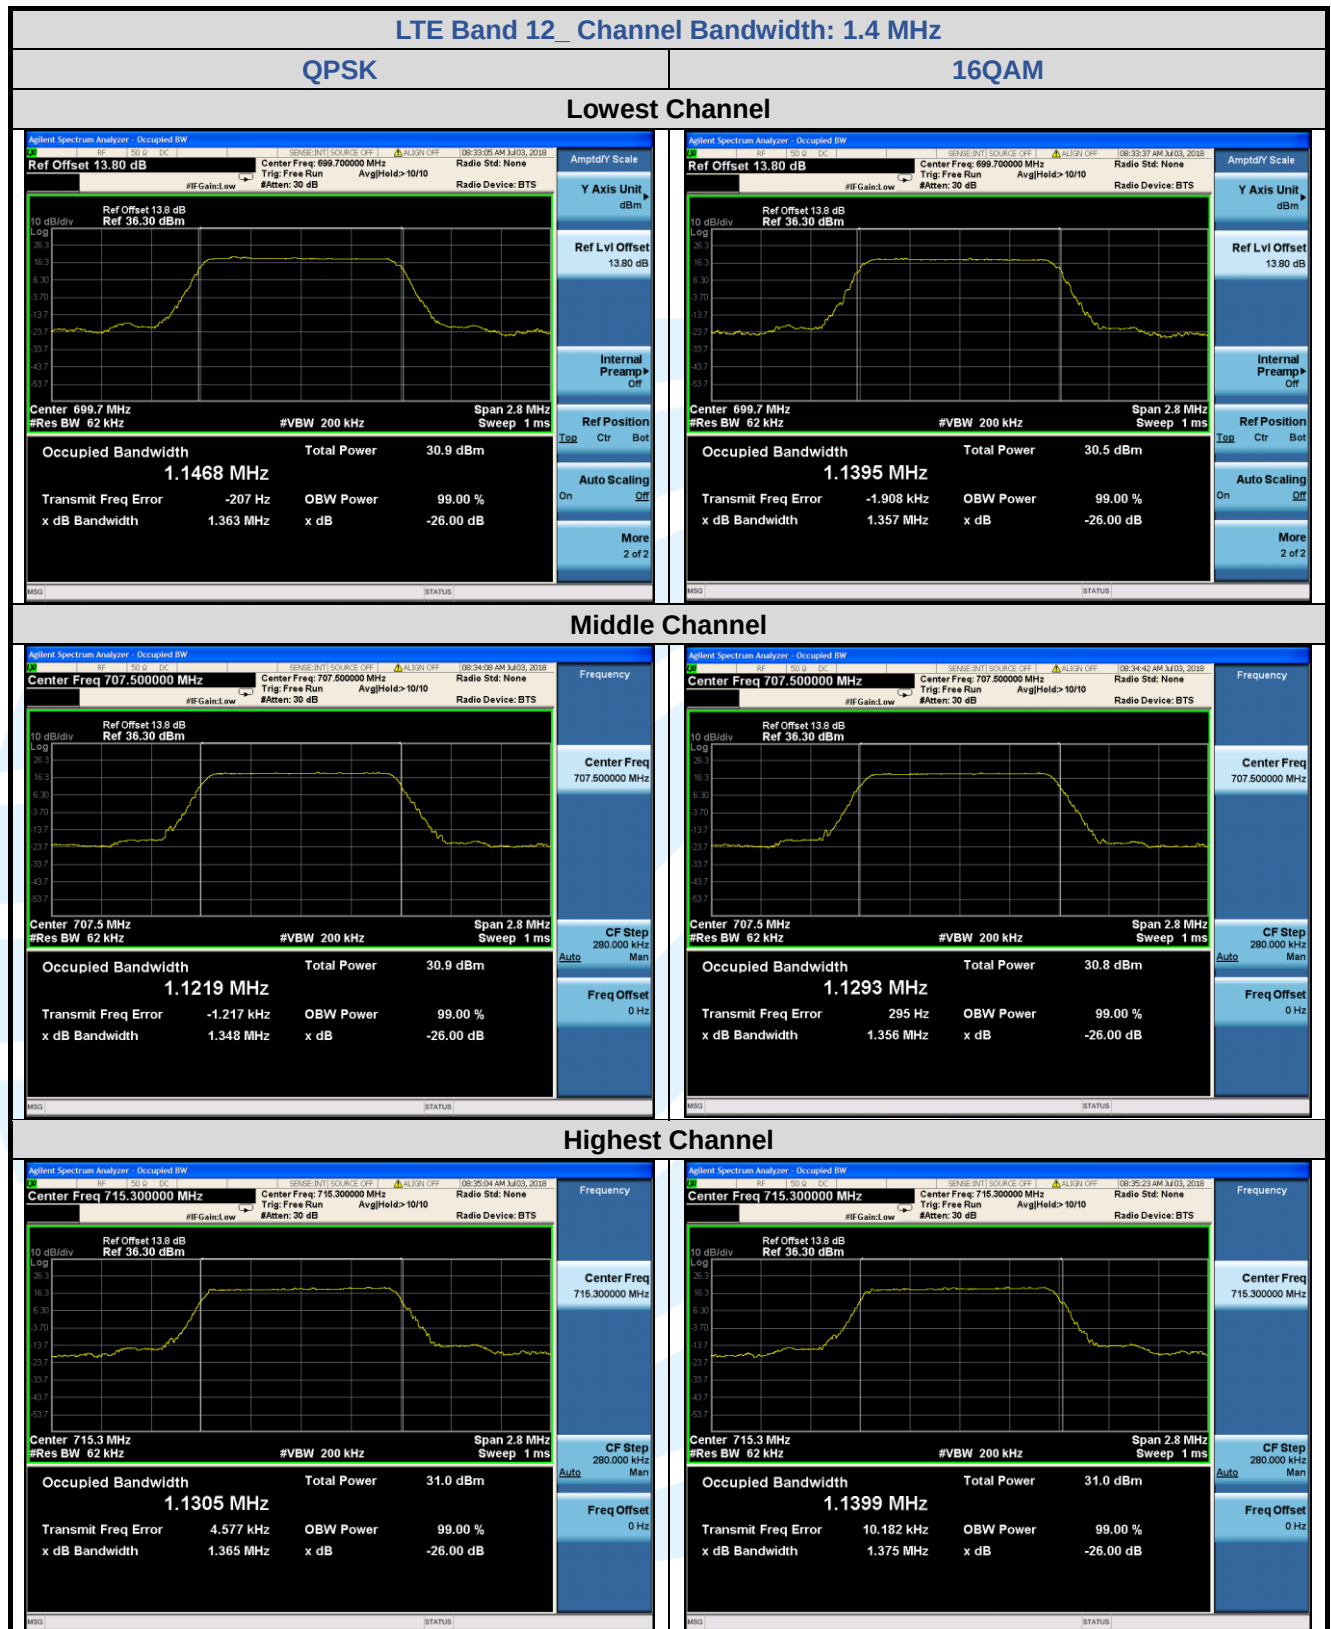

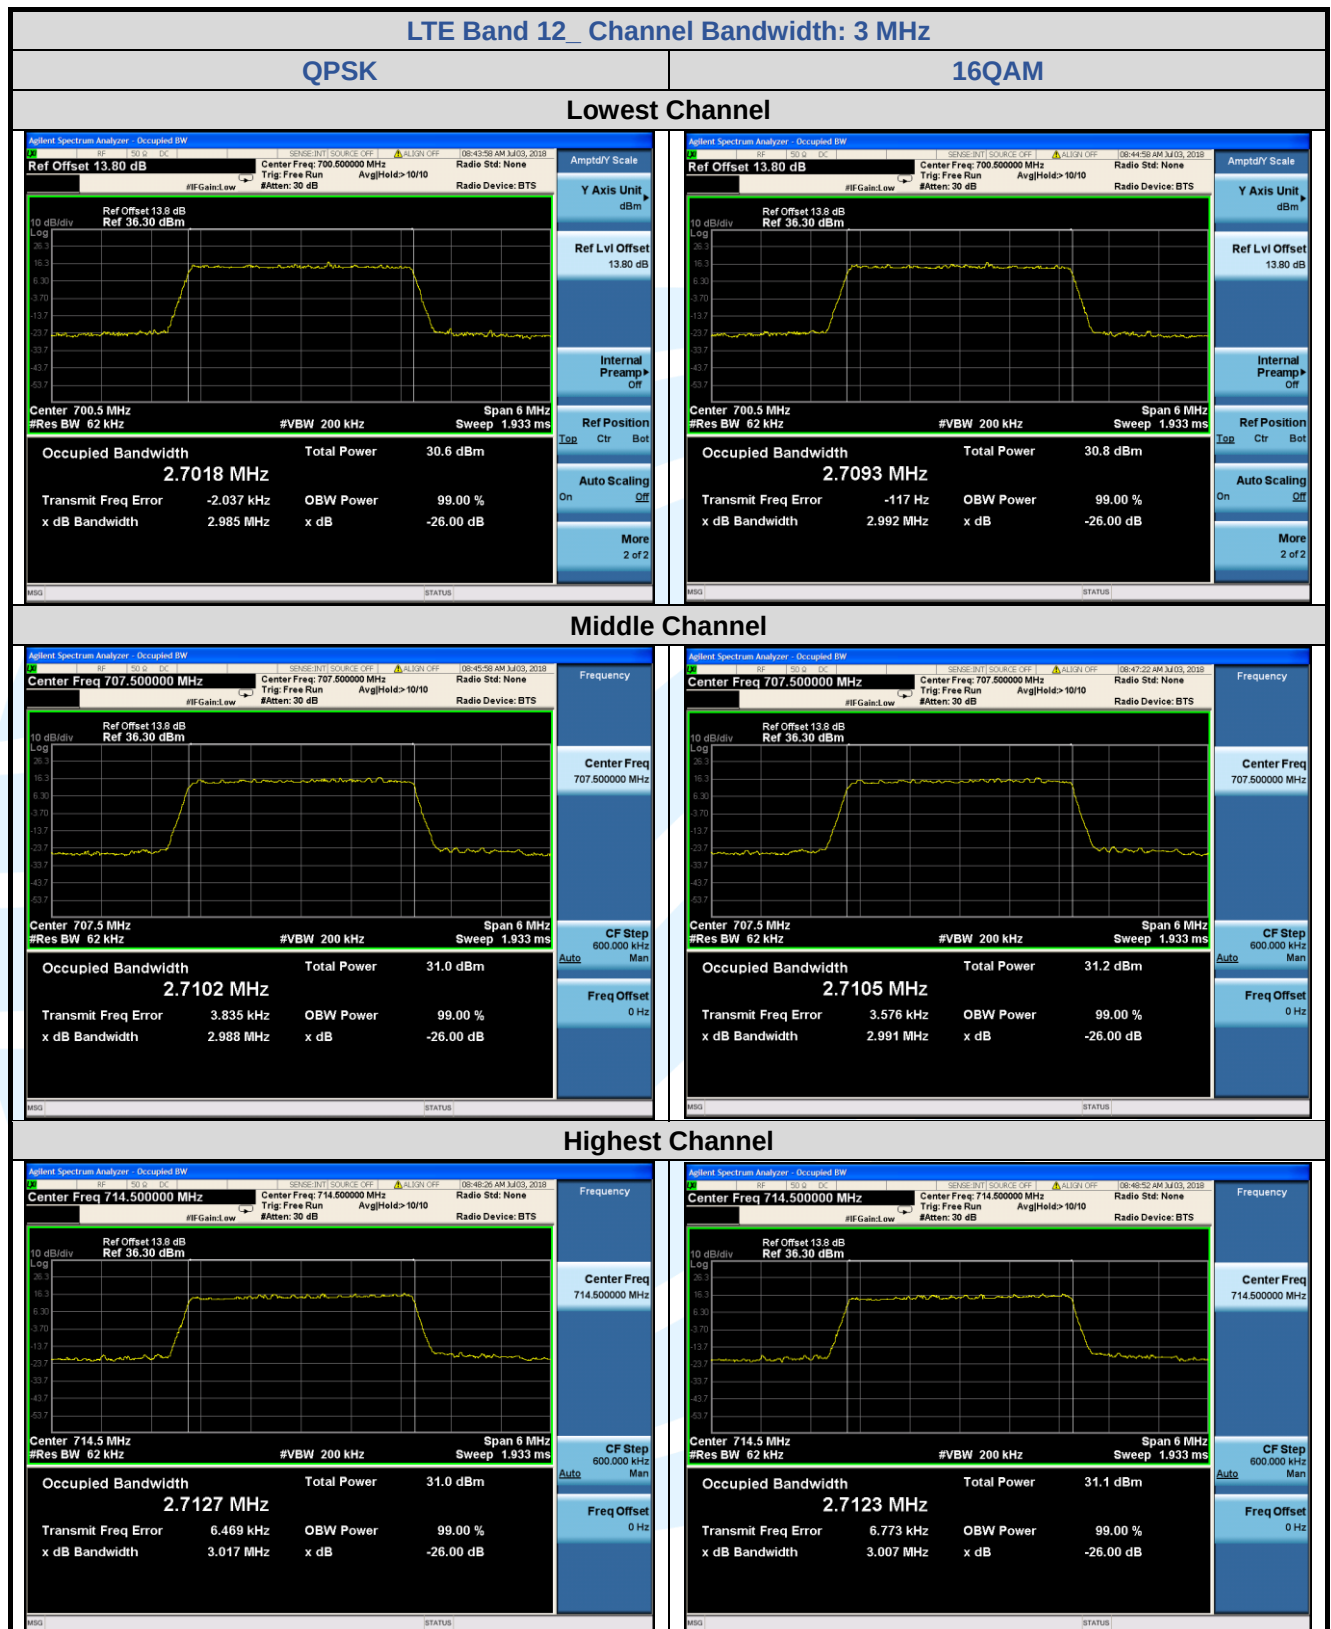

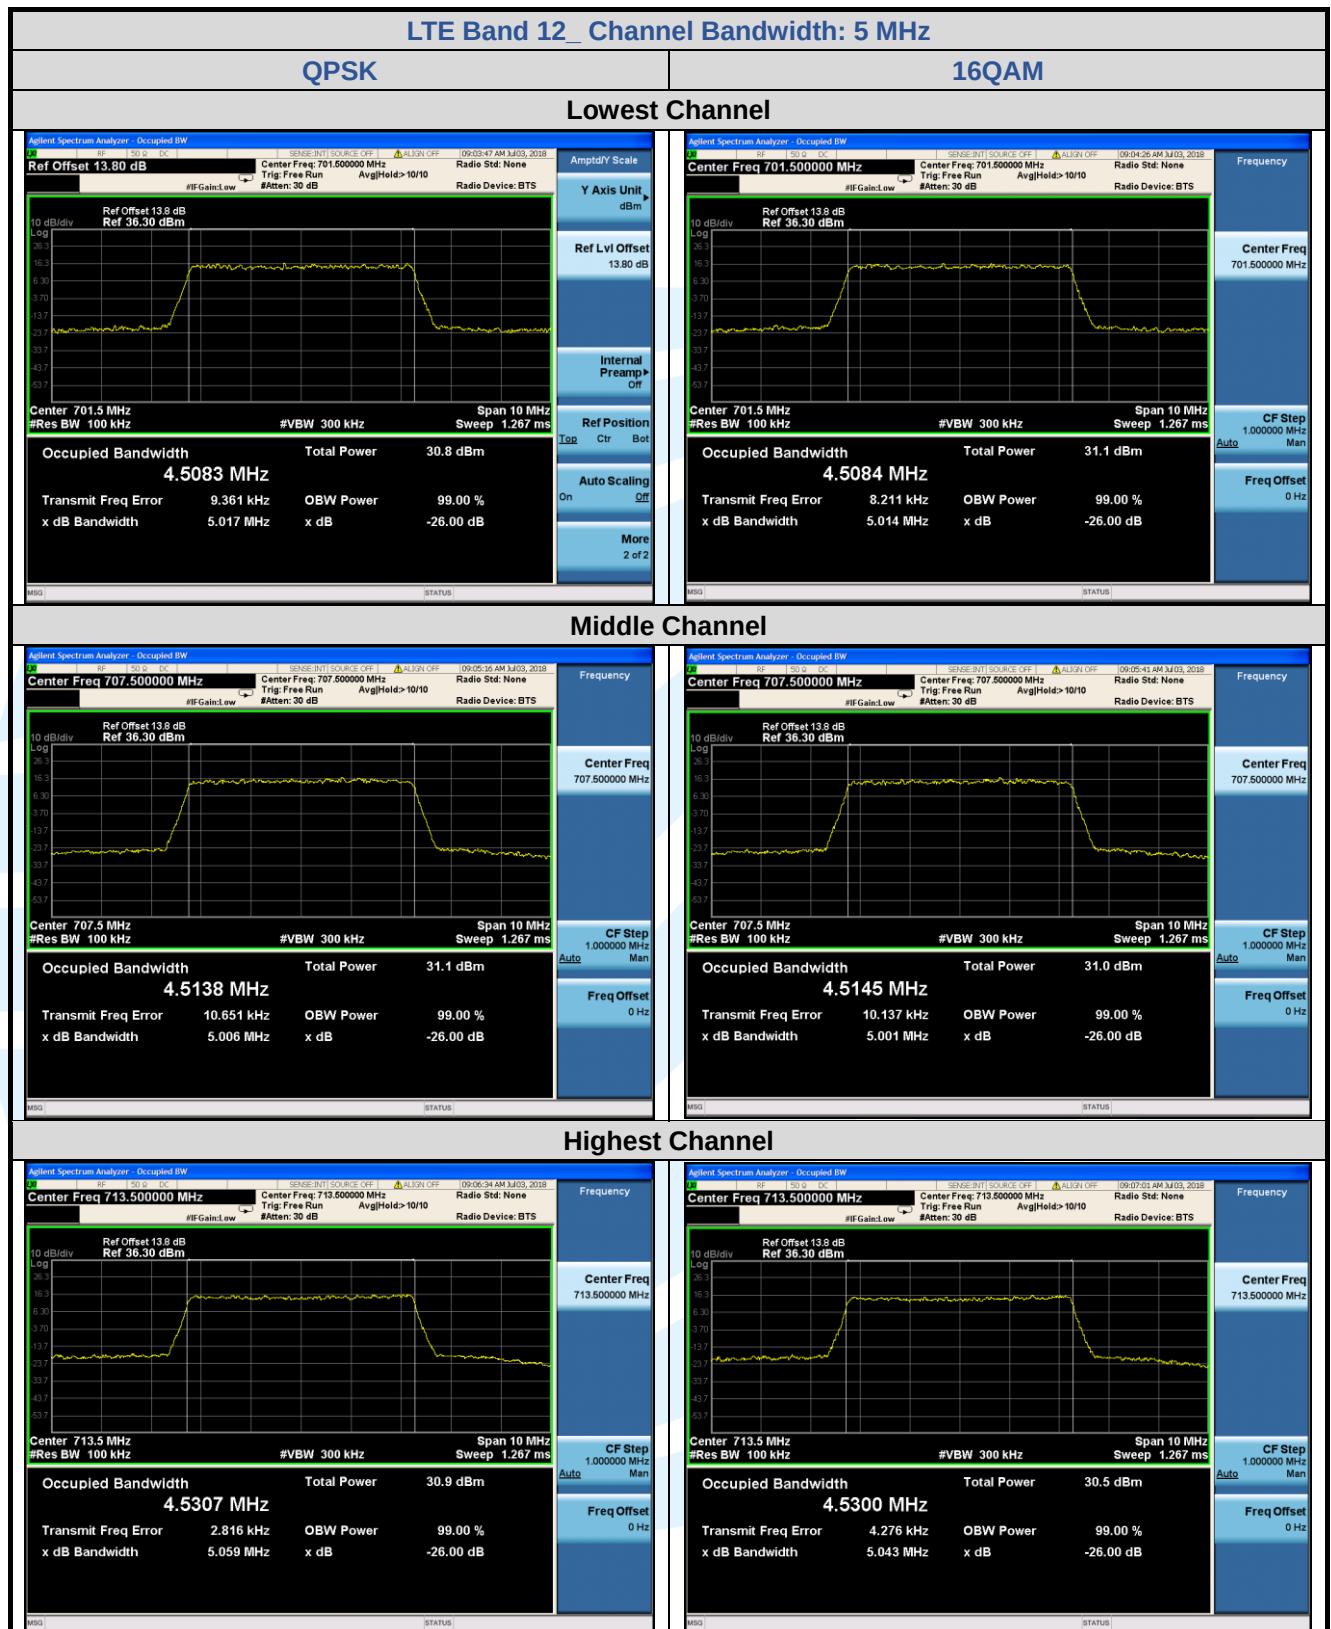

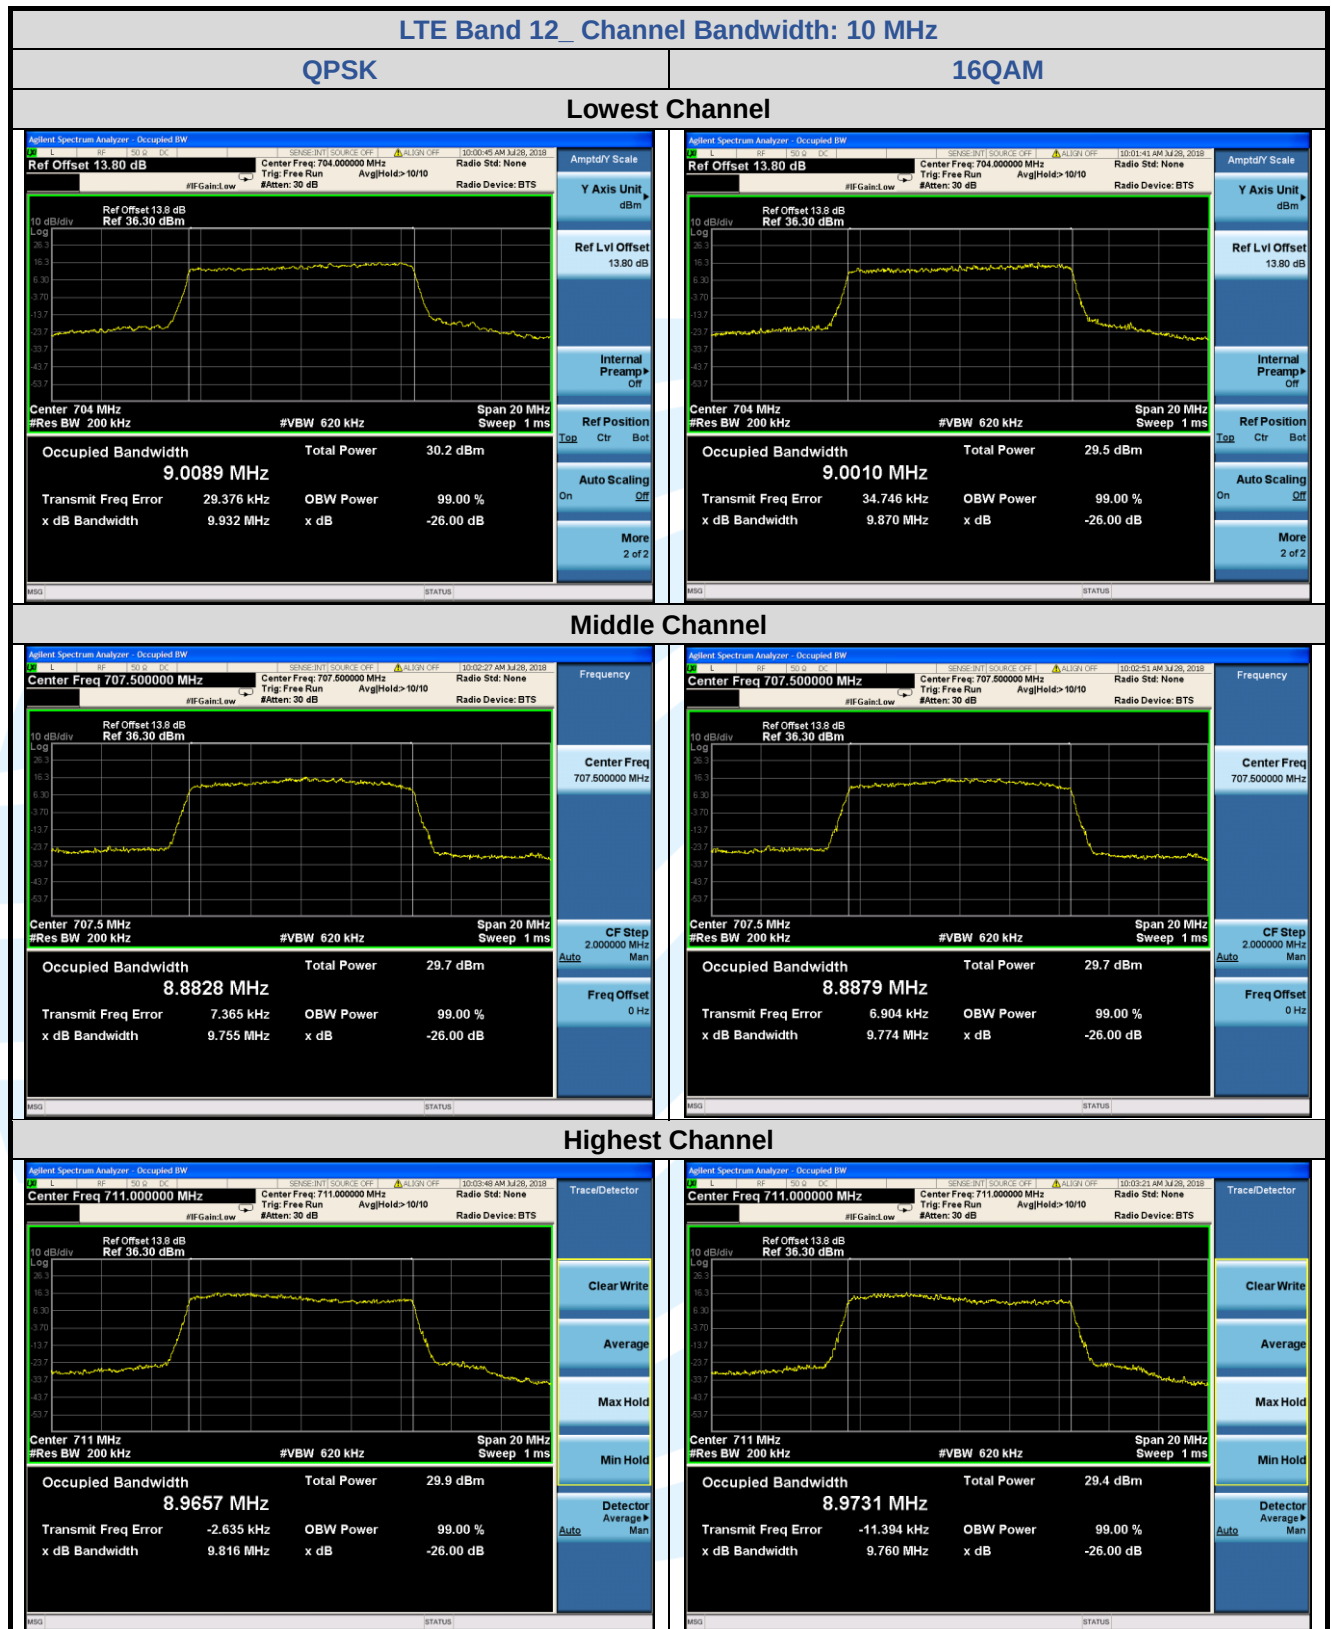

5.6 BAND EDGE AT ANTENNA TERMINALS

Test Requirement: LTE Band 4: FCC 47 CFR Part 27.53(h)(1)

LTE Band 12: FCC 47 CFR Part 27.53(g)

Test Method: ANSI/TIA-603-E-2016 & KDB 971168 D01v03

Limit:

FCC 47 CFR Part 27.53(g): For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

FCC 47 CFR Part 27.53(h)(1): Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB. The emission limit equal to -13 dBm.

FCC 47 CFR Part 27.53(h)(3): Measurement procedure. (i) Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(ii) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.

(iii) The measurements of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

Test Procedure:

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer.

For each band edge measurement:

- 1) Set the spectrum analyzer span to include the block edge frequency.
- 2) Set a marker to point the corresponding band edge frequency in each test case.
- 3) Set display line at -13 dBm
- 4) Set resolution bandwidth to at least 1% of emission bandwidth.
- 5) Set spectrum analyzer with RMS detector.
- 6) Record the max trace plot into the test report


Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.2.2 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Pass

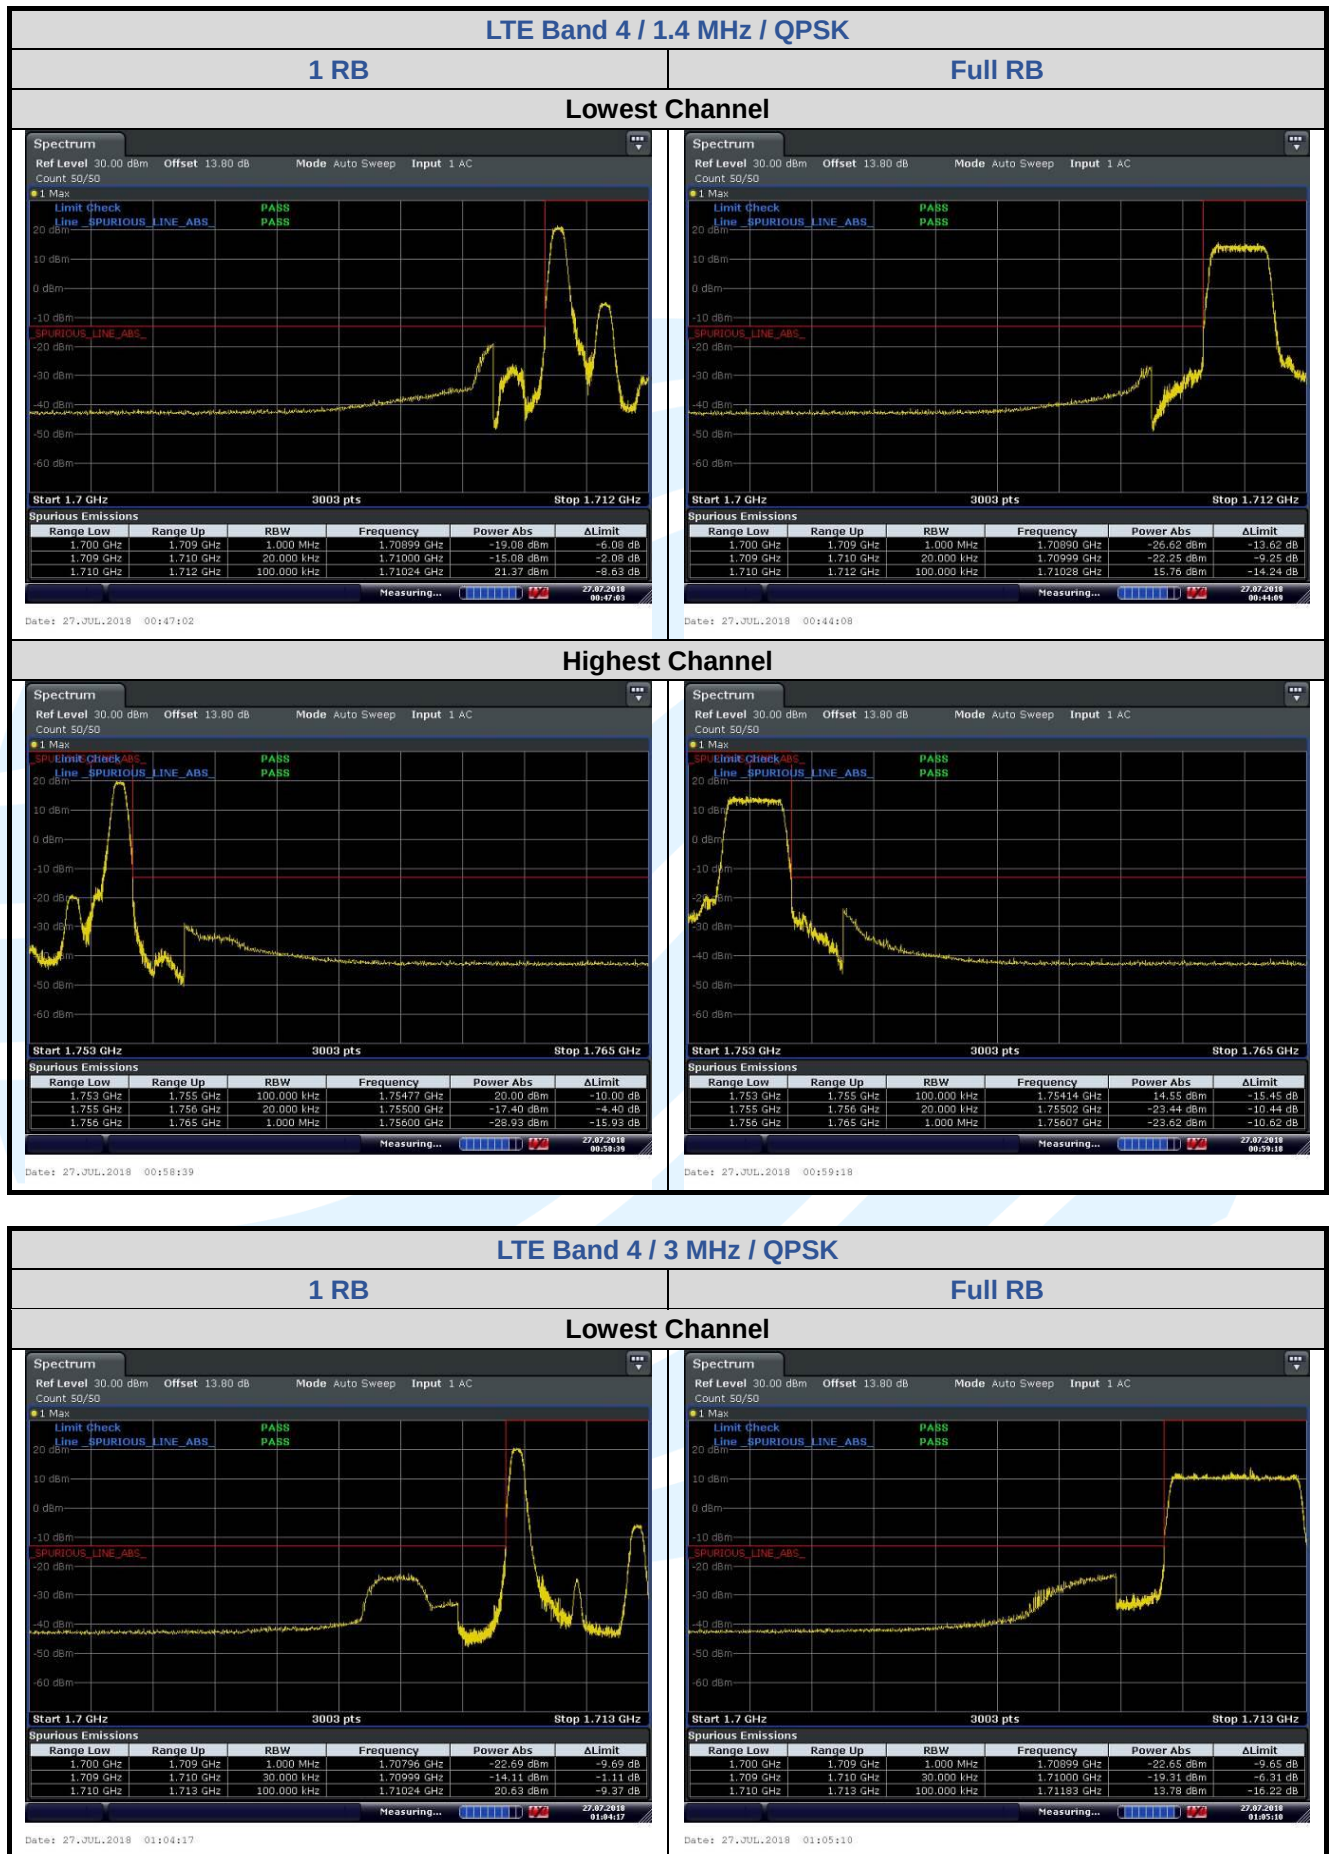
LTE Band 4 / 3 MHz / QPSK
1 RB
Full RB
Lowest Channel

Spectrum

Ref Level 30.00 dBm Offset 13.80 dB Mode Auto Sweep Input 1 AC
Count 50/50

1 Max

Limit Check PASS
Line SPURIOUS_LINE_ABS PASS

Start 1.7 GHz Stop 1.713 GHz

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
1.700 GHz	1.709 GHz	1.000 MHz	1.70796 GHz	-22.69 dBm	-9.69 dB
1.709 GHz	1.710 GHz	30.000 kHz	1.70999 GHz	-14.11 dBm	-5.11 dB
1.710 GHz	1.713 GHz	100.000 kHz	1.71024 GHz	-20.63 dBm	-9.37 dB

Date: 27.JUL.2018 01:04:17

Spectrum

Ref Level 30.00 dBm Offset 13.80 dB Mode Auto Sweep Input 1 AC
Count 50/50

1 Max

Limit Check PASS
Line SPURIOUS_LINE_ABS PASS

Start 1.7 GHz Stop 1.713 GHz

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
1.700 GHz	1.709 GHz	1.000 MHz	1.70899 GHz	-22.65 dBm	-9.65 dB
1.709 GHz	1.710 GHz	30.000 kHz	1.71000 GHz	-19.31 dBm	-6.31 dB
1.710 GHz	1.713 GHz	100.000 kHz	1.71183 GHz	13.78 dBm	-16.22 dB

Date: 27.JUL.2018 01:05:10

