

FCC PART 90

TEST REPORT

For

Tersus GNSS Inc.

Rm 601, Bldg E2, No. 88, Jinjihu Ave, Suzhou, China

FCC ID: 2AMDJ-TREK

Report Type:

Original Report

Product Name:

GNSS Receiver

Report Number: RSHA241101001-00E

Report Date: 2025-11-07

Reviewed By: Bard Liu

Bard Liu

Approved By: Kyle Xu

Kyle Xu

Prepared By:

Bay Area Compliance Laboratories Corp. (Kunshan)
No.248 Chenghu Road, Kunshan, Jiangsu Province, China
Tel: +86-512-86175000
Fax: +86-512-88934268
www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Kunshan). This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, or any agency of the U.S. Government.

TABLE OF CONTENTS

REPORT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION.....	7
DESCRIPTION OF TEST CONFIGURATION	7
SPECIAL ACCESSORIES	7
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS.....	9
TEST EQUIPMENT LIST	10
FCC §1.1310 & §2.1091 - MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	11
FCC §2.1046 & §90.205 RF OUTPUTPOWER.....	13
APPLICABLE STANDARD	13
TEST PROCEDURE	13
TEST DATA: SEE APPENDIX	13
FCC §2.1049 & §90.209 §90.210 - OCCUPIED BANDWIDTH &EMISSION MASK.....	14
APPLICABLE STANDARD	14
TEST PROCEDURE	14
TEST DATA: SEE APPENDIX	14
FCC §2.1051&§90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	15
APPLICABLE STANDARD	15
TEST PROCEDURE	15
TEST DATA: SEE APPENDIX	15
FCC §2.1053 & §90.210 - SPURIOUS RADIATED EMISSIONS	16
APPLICABLE STANDARD	16
TEST PROCEDURE	16
TEST DATA: SEE APPENDIX	17
FCC §2.1055 & §90.213 - FREQUENCY STABILITY.....	18
APPLICABLE STANDARD	18
TEST PROCEDURE	18
TEST DATA: SEE APPENDIX	18
FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR.....	19
APPLICABLE STANDARD	19
TEST PROCEDURE	19
TEST DATA: SEE APPENDIX	19
APPENDIX - TEST DATA.....	20
RF OUTPUTPOWER	20
OCCUPIED BANDWIDTH &EMISSION MASK.....	21

SPURIOUS EMISSIONS AT ANTENNA TERMINALS	24
SPURIOUS RADIATED EMISSIONS.....	27
FREQUENCY STABILITY	28
TRANSIENT FREQUENCY BEHAVIOR.....	34
EUT PHOTOGRAPHS	36
TEST SETUP PHOTOGRAPHS	37

REPORT REVISION HISTORY

Number of Revisions	Report No.	Version	Issue Date	Description
0	RSHA241101001-00E	R1V1	2025-11-07	Initial Release

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	Tersus GNSS Inc.
Product Name	GNSS Receiver
Tested Model	Oscar Trek
Power Supply	DC 9-28 V charging by adapter or DC 7.4V powered by battery
RF Function:	UHF
Operating Band/Frequency:	410-470 MHz
Modulation Type:	GMSK
Channel Separation:	12.5 kHz
Channel Bandwidth	12.5 kHz
Antenna Type:	Patch antenna
★Maximum Antenna Gain:	2 dBi
Rated Power:	High power: 2.0 W Low power: 0.6 W

Adapter Information:

Model: NT-120300D1

Input: 100-240V 50/60Hz 1.6A Max

Output: 12V, 3.0A

Note: The maximum antenna gain was declared by the manufacturer.

All measurement and test data in this report was gathered from production sample serial number: RSHA241101001-1 (Assigned by the BACL (Kunshan). The EUT supplied by the applicant was received on 2024-11-01.)

Objective

This test report is prepared for *Tersus GNSS Inc.* in accordance with Part 2, and Part 90 of the Federal Communication Commissions rules.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, Sub-part J as well as Part the following individual parts:

Pat90-Private Land Mobile Radio Service

Applicable Standards: ANSI C63.26:2015.

Measurement Uncertainty

Item		Uncertainty
Unwanted Emissions, radiated	30MHz~1GHz	5.91dB
	1GHz~6GHz	4.68dB
	6 GHz ~18 GHz	4.92dB
	18 GHz~40 GHz	5.21dB
Occupied Channel Bandwidth		±5%
RF output power, conducted		±0.61dB
Unwanted Emissions, conducted		±1.5dB
Temperature		±1℃
Humidity		±5%
DC and low frequency voltages		±0.4%
Duty Cycle		1%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) is accredited in accordance with ISO/IEC 17025:2017 by NVLAP (Lab code: 600338-0), and the lab has been recognized as the FCC accredited lab under the KDB 974614 D01, the FCC Designation No.: CN5055.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

Special Accessories

No special accessory was used.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable


Cable Description	Length(m)	From Port	To Port
Power Cable 1	1.5	EUT	Adapter
Power Cable 2	1.0	Adapter	AC Source

Block Diagram of Test Setup

For Radiated Emissions(Below 1GHz):

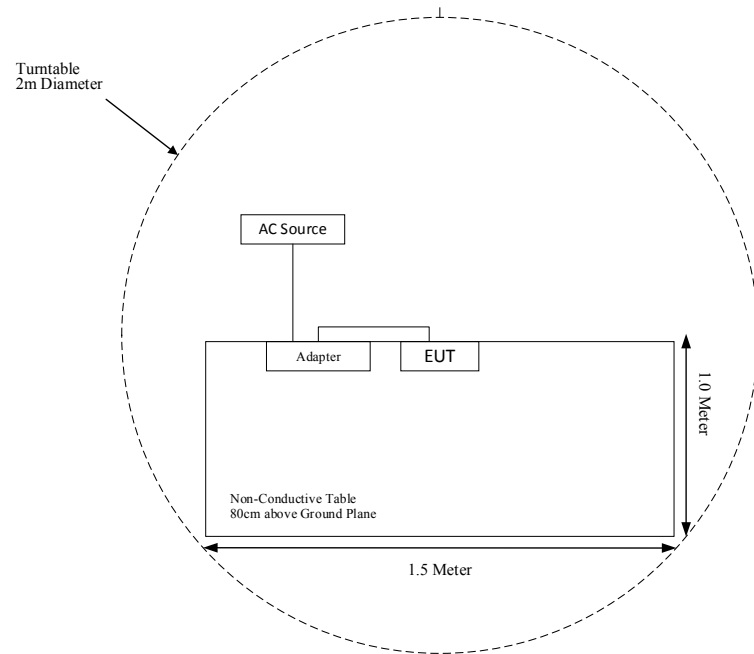

For Radiated Emissions(Above 1GHz):

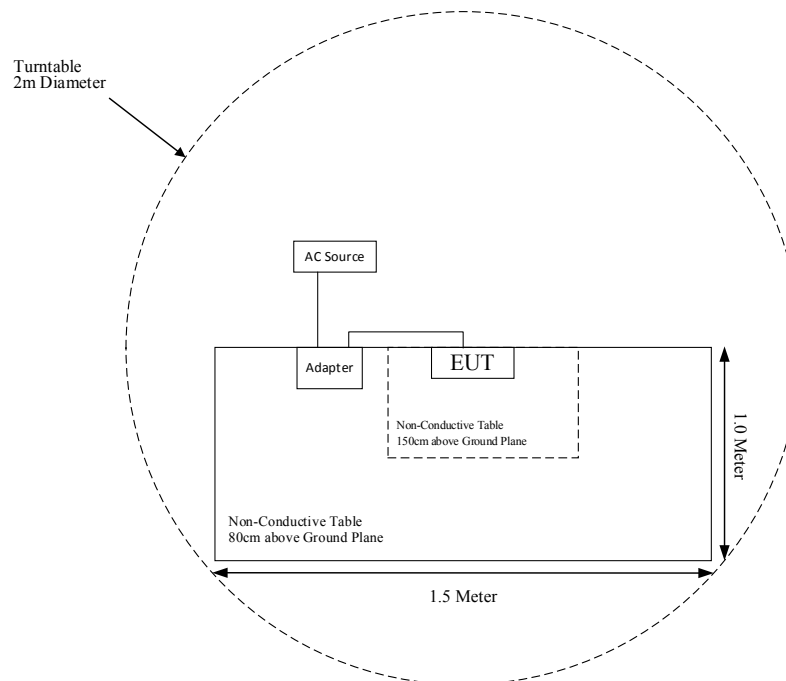

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§1.1310, §2.1091	Maximum Permissible Exposure (MPE)	Compliant
§2.1046, §90.205	RF Output Power	Compliant
§2.1047	Modulation Characteristic	Not Applicable (See Note)
§2.1049; §90.209; §90.210	Occupied Bandwidth & Emission Mask	Compliant
§2.1051; §90.210	Spurious Emission at Antenna Terminal	Compliant
§2.1053; §90.210	Spurious Radiated Emissions	Compliant
§2.1055; §90.213	Frequency stability	Compliant
§90.214	Transient Frequency Behavior	Compliant

Note: The EUT is used in digital modulation.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber #1)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2024-04-23	2025-04-22
Sunol Sciences	Hybrid Antenna	JB3	A090314-1	2024-11-08	2027-11-07
Sunol Sciences	Hybrid antenna	JB3	A060217	2024-11-08	2027-11-07
Narda	6dB Attenuator	773-6	10690812-2-1	2024-11-08	2027-11-07
Agilent	Analog Signal Generator	N5183A	MY51040755	2024-04-23	2025-04-22
Sonoma Instrument	Amplifier	310N	171205	2024-04-23	2025-04-22
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-8	008	2024-04-23	2025-04-22
MICRO-COAX	Coaxial Cable	Cable-9	009	2024-04-23	2025-04-22
MICRO-COAX	Coaxial Cable	Cable-10	010	2024-04-23	2025-04-22
Radiated Emission Test (Chamber #2)					
Agilent	Analog Signal Generator	N5183A	MY51040755	2024-04-23	2025-04-22
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2024-04-25	2025-04-24
ETS-LINDGREN	Horn Antenna	3115	9207-3900	2024-11-03	2027-11-02
ETS-LINDGREN	Horn Antenna	3115	6229	2025-01-06	2026-01-05
A.H.Systems, inc	Amplifier	PAM-0118P	512	2024-04-25	2025-04-24
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-6	006	2024-04-23	2025-04-22
MICRO-COAX	Coaxial Cable	Cable-11	011	2024-04-25	2025-04-24
MICRO-COAX	Coaxial Cable	Cable-12	012	2024-04-25	2025-04-24
MICRO-COAX	Coaxial Cable	Cable-13	013	2024-04-25	2025-04-24
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSU26	200103	2024-04-24	2025-04-23
Rohde & Schwarz	Spectrum Analyzer	FSU26	200103	2025-04-09	2026-04-08
Rohde & Schwarz	Signal Analyzer	FSV40	101116	2024-04-24	2025-04-23
Narda	Attenuator	30dB	N/A	2024-04-23	2025-04-22
BACL	Temperature & Humidity Chamber	BTH-150	30023	2024-04-25	2025-04-25
EAST	Regulated DC Power Supply	MCH-303D-II	14070562	N/A	N/A
Agilent	Power meter	E4419B	MY41291878	2024-04-23	2025-04-22
MICRO-COAX	Coaxial Cable	Cable-15	015	2024-04-23	2025-04-22

Statement of Traceability: Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310 & §2.1091 - MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart §2.1091 and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

Limits for Occupational/Controlled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time [E], [H] or S (minutes)
0.3- 3.0	614	1.63	(100)*	6
3.0 - 30	1842/f	4.89/f	(900/f ²)*	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Calculation Data:**General Population/Uncontrolled**

Mode	Frequency Range (MHz)	Antenna Gain		Tune-up Output Power★		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)	MPE ratio
		(dBi)	(numeric)	(dBm)	(mW)				
2.4G Wi-Fi	2412-2462	-0.26	0.94	19.0	79.43	20	0.0149	1.00	0.0149
BLE	2402-2480	4.41	2.76	3.0	2.00	20	0.0011	1.00	0.0011
BT	2402-2480	4.41	2.76	2.5	1.78	20	0.0010	1.00	0.0010
5G Wi-Fi	5150-5250	2.18	1.65	13.5	22.39	20	0.0073	1.00	0.0073
	5725-5850	-1.37	0.73	11.0	12.59	20	0.0018	1.00	0.0018
GSM 850	824-849	-0.14	0.97	25.81	381.07	20	0.0734	0.55	0.1336
PCS 1900	1850-1910	1.62	1.45	22.81	190.99	20	0.0551	1.0	0.0551
WCDMA Band 2	1850-1910	1.62	1.45	25.00	316.23	20	0.0912	1.0	0.0912
WCDMA Band 4	1710-1755	0.32	1.08	25.00	316.23	20	0.0679	1.0	0.0679
WCDMA Band 5	824-849	-0.14	0.97	25.00	316.23	20	0.0609	0.55	0.1109
LTE Band 2	1850-1910	1.62	1.45	25.00	316.23	20	0.0912	1.0	0.0912
LTE Band 4	1710-1755	0.32	1.08	25.00	316.23	20	0.0679	1.0	0.0679
LTE Band 5	824-849	-0.14	0.97	25.00	316.23	20	0.0609	0.55	0.1109
LTE Band 7	2500-2570	3.78	2.39	25.00	316.23	20	0.1503	1.0	0.1503
LTE Band 12	699-716	-0.14	0.97	25.00	316.23	20	0.0609	0.47	0.1307
LTE Band 13	777-787	-0.14	0.97	25.00	316.23	20	0.0609	0.52	0.1176
LTE Band 25	1850-1915	1.62	1.45	25.00	316.23	20	0.0912	1.0	0.0912
LTE Band 26	814-849	-0.14	0.97	25.00	316.23	20	0.0609	0.54	0.1122
LTE Band 38	2570-2620	3.78	2.39	25.00	316.23	20	0.1503	1.0	0.1503
LTE Band 41	2496-2690	3.78	2.39	25.00	316.23	20	0.1503	1.0	0.1503

Occupational/Controlled

Mode	Frequency Range (MHz)	Antenna Gain		★Tune-up Output Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)	MPE ratio
		(dBi)	(numeric)	(dBm)	(mW)				
UHF	410-470	2.0	1.58	33.5	2238.72	20	0.7058	1.3667	0.5164

Note:

1. The target output powers are all declared by the Manufacturer.
2. The WWAN module FCC ID: XMR201903EG25G (Grant on: 03/29/2019).
3. Wi-Fi, BLE/BT, WWAN and UHF can transmit simultaneously, the worst condition is as below:

$$\sum_i \frac{S_i}{S_{Limit,i}} = 0.0149 + 0.0011 + 0.1503 + 0.5164 = 0.6827 < 1.0$$

Result: The device meet FCC MPE at 20 cm distance.

FCC §2.1046 & §90.205 RF OUTPUTPOWER


Applicable Standard

FCC §2.1046 & §90.205

Test Procedure

Conducted RF Output Power:

The RF output of the transmitter was connected to the input of the Power meter through sufficient attenuation.



Note: Offset (31dB) = Attenuator(30.0dB)+Cable loss(1.0dB)

Test Data: See Appendix

FCC §2.1049 & § 90.209 § 90.210 - OCCUPIED BANDWIDTH & EMISSION MASK

Applicable Standard

FCC §2.1049, §90.209 and §90.210


Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(f_d - 2.88)$ dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.
- (4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 100Hz and the spectrum was recorded in the frequency band.



Note: Offset (31dB) = Attenuator(30.0dB) + Cable loss(1.0dB)

Test Data: See Appendix


FCC § 2.1051&§90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standard

FCC §2.1051,§90.210

Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz for below 1GHz, and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.



Note: Offset (31dB) = Attenuator(30.0dB)+Cable loss(1.0dB)

Test Data: See Appendix

FCC § 2.1053 & §90.210 - SPURIOUS RADIATED EMISSIONS

Applicable Standard

FCC §2.1053, §90.210

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 lg (TXpwr in Watts/0.001)-the absolute level

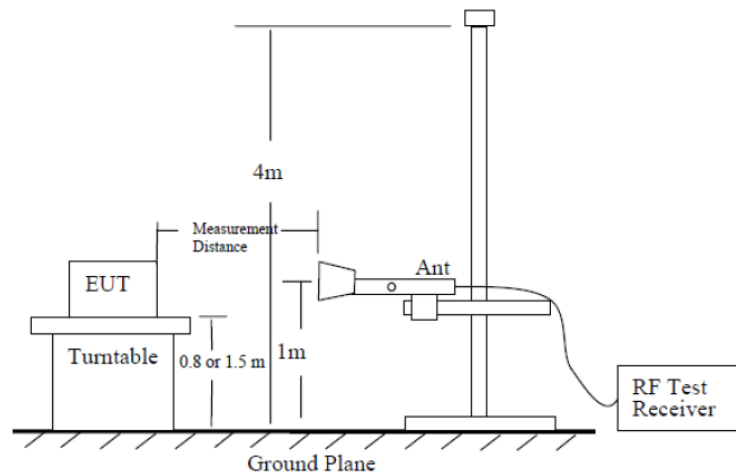


Figure 6—Test site-up for radiated ERP and/or EIRP measurements

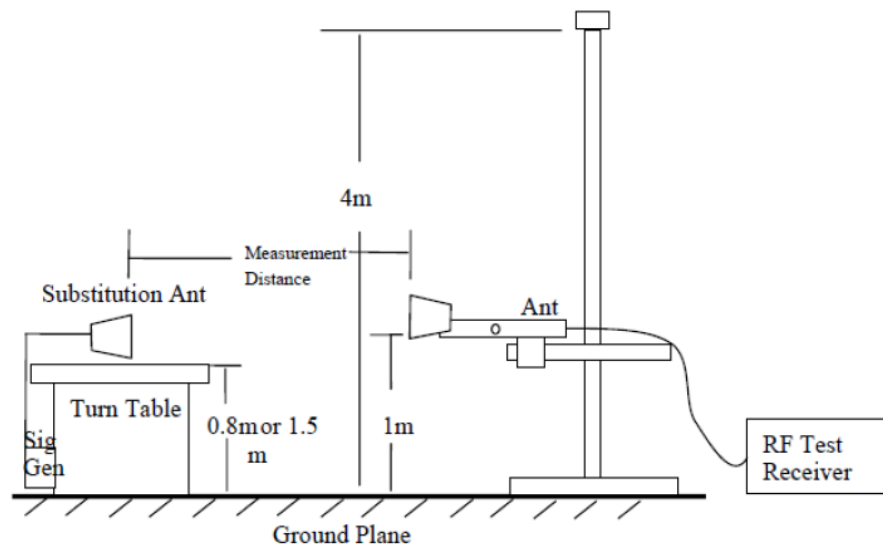


Figure 7 —Substitution method set-up for radiated emission

Test Data: See Appendix

FCC § 2.1055 & §90.213 - FREQUENCY STABILITY


Applicable Standard

FCC §2.1055, §90.213

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external power supply and the RF output was connected to a frequency counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.

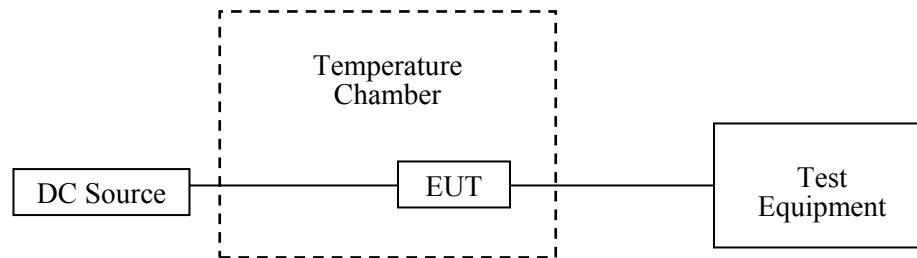

Test Data: See Appendix

FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR


Applicable Standard

Regulations: FCC §90.214

Test method: ANSI C63.26.

Test Procedure

- a) Connect the equipment as illustrated.
- b) Modulate the transmitter with the standard transmitter symbol rate pattern.
- c) Connect the output of the standard transmitter load to the RF power meter. Supply sufficient attenuation via the RF attenuator to provide a level that is approximately 40 dB below the maximum allowable input to the modulation domain analyzer.
- d) Turn the transmitter off.
- e) Disconnect the RF power meter and connect the modulation domain analyzer in its place. Set the envelope trigger of the modulation domain analyzer to the minimum level that will trigger when the transmitter is keyed.
- f) Reduce the attenuation of the RF attenuator so that the input to the modulation domain analyzer is increased by 30 dB when the transmitter is turned on.
- g) Set the modulation domain analyzer to trigger on the rising edge of the waveform in order to capture a single-shot turn-on of the transmitter signal.
- h) Adjust the display of the modulation domain analyzer for proper viewing of the transmitter transient behavior. Set the timebase reference to the left for observing the transmitter turn-on transient.
- i) Turn the transmitter on.
- j) Observe the stored display of the modulation domain analyzer. The average of the positive and negative peak of the signal trace shall be maintained within the allowable limits during the periods t_1 and t_2 , and shall also remain within limits following t_2 .
- k) Adjust the modulation domain analyzer to trigger on the falling edge of the transmitter waveform in order to capture a single-shot turn-off transient of the transmitter signal.
- l) Adjust the display of the modulation domain analyzer for proper viewing of the transmitter transient behavior. Set the timebase reference to the right for observing the transmitter turn-off transient.
- m) Turn off the transmitter.
- n) Observe the stored display of the modulation domain analyzer. The average of the positive and negative peak of the signal trace shall be maintained within the allowable limits during the period t_3 .

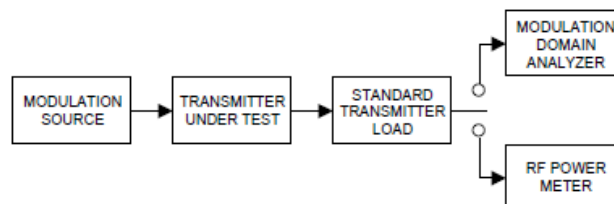

Test Data: See Appendix

APPENDIX - TEST DATA

RF OUTPUTPOWER

Environmental Conditions & Test Information

Test Date:	2025-03-25
Temperature:	25.5 °C
Relative Humidity:	65 %
ATM Pressure:	100.9 kPa
Test Result:	Pass
Test Engineer:	Neil Zhou

Test Result: Compliant.

Please refer to following table.

Modulation Mode	ChannelSpacing(kHz)	fc (MHz)	Conducted Output Power (W)	
			High power level	Low power level
GMSK	12.5	410.0125	2.08	0.58
		440	2.14	0.59
		469.9875	2.16	0.48

Note: The output power shall not exceed by more than 20 percent of the rated power. The rated high power is 2.0W, the limit is 2.4W, and rated low power level 0.6W, the limit is 0.72W.

OCCUPIED BANDWIDTH & EMISSION MASK**Environmental Conditions & Test Information**


Test Date:	2025-02-24 to 2025-09-05
Temperature:	25.2-27.6 °C
Relative Humidity:	55-65 %
ATM Pressure:	100.9-101.1 kPa
Test Result:	Pass
Test Engineer:	Neil Zhou

Test Mode: Transmitting

Test Result: Compliant.


Modulation Mode	Channel Spacing (kHz)	fc (MHz)	Power level	99% Bandwidth (kHz)	26dB Bandwidth (kHz)
GMSK	12.5	410.0125	High	6.382	7.424
			Low	6.382	7.728
		440	High	6.382	7.381
			Low	6.382	7.337
		469.9875	High	6.339	7.424
			Low	6.339	7.467

High Power, 410.0125 MHz

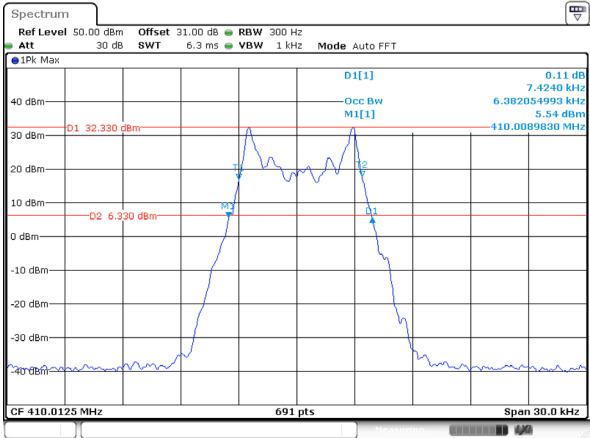


ProjectNo.:RSHA241101001 Tester:Neil Zhou
Date: 24.FEB.2025 15:10:46

Emission Mask D

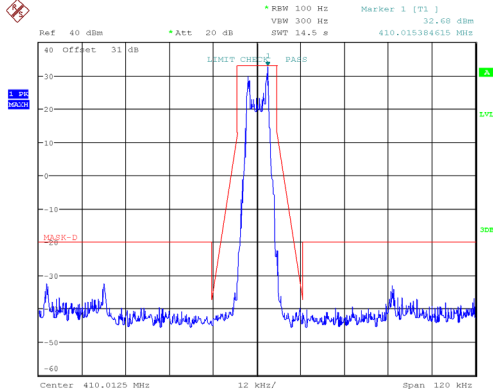


ProjectNo.:RSHA241101001 Tester:Neil Zhou
Date: 5.SEP.2025 13:24:40

High Power, 440 MHz

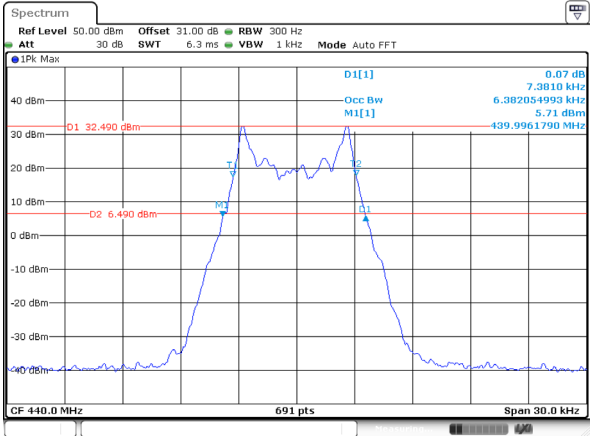


ProjectNo.:RSHA241101001 Tester:Neil Zhou
Date: 24.FEB.2025 15:38:04

Emission Mask D

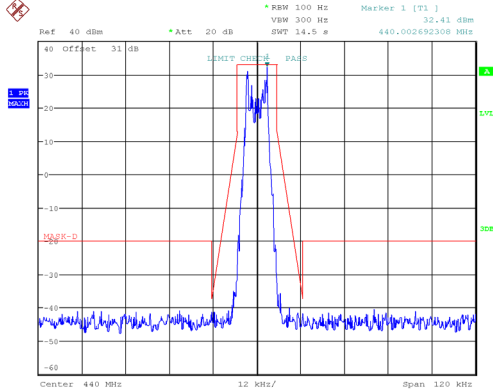


ProjectNo.:RSHA241101001 Tester:Neil Zhou
Date: 5.SEP.2025 13:40:04

High Power, 469.9875 MHz

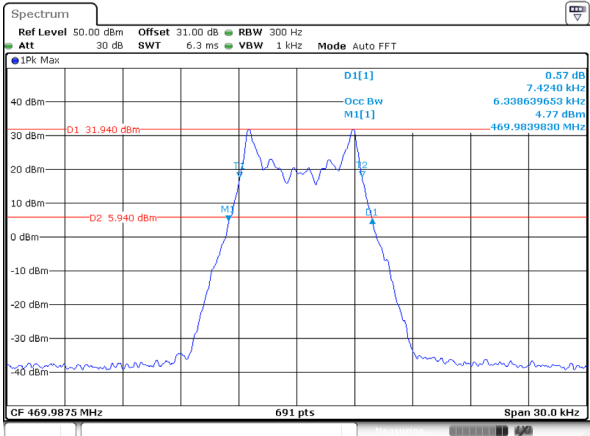


ProjectNo.:RSHA241101001 Tester:Neil Zhou
Date: 24.FEB.2025 16:20:48

Emission Mask D

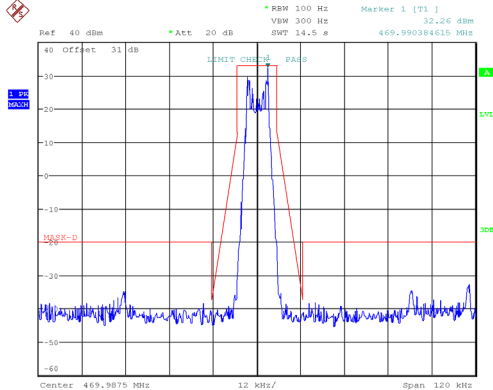


ProjectNo.:RSHA241101001 Tester:Neil Zhou
Date: 5.SEP.2025 14:24:45


Low Power, 410.0125MHz

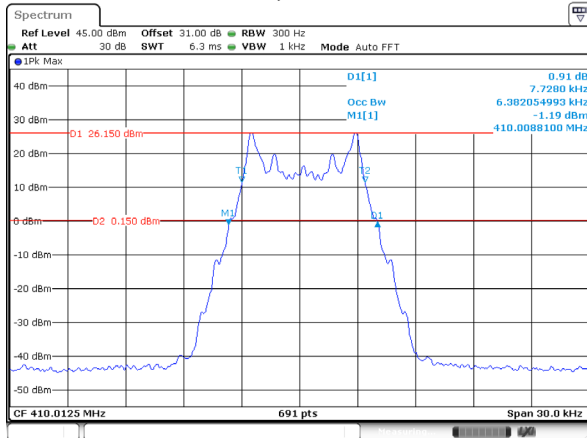


Emission Mask D

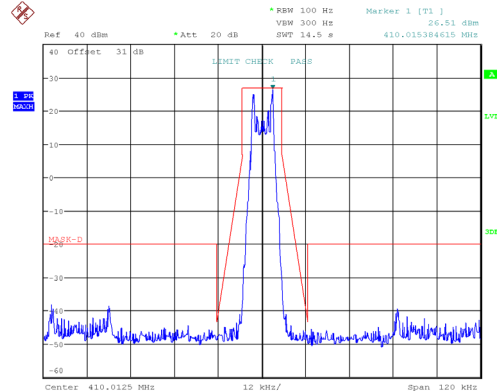


Low Power, 440 MHz

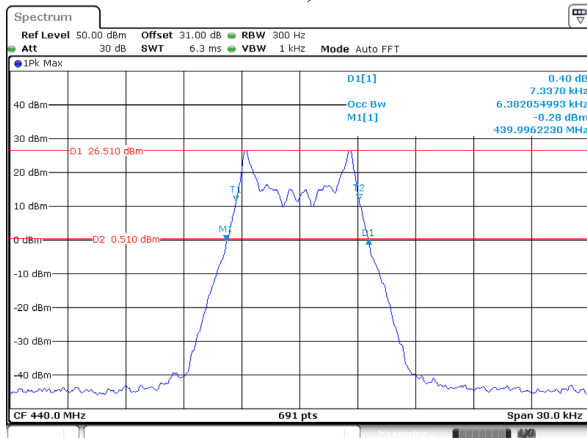


Emission Mask D

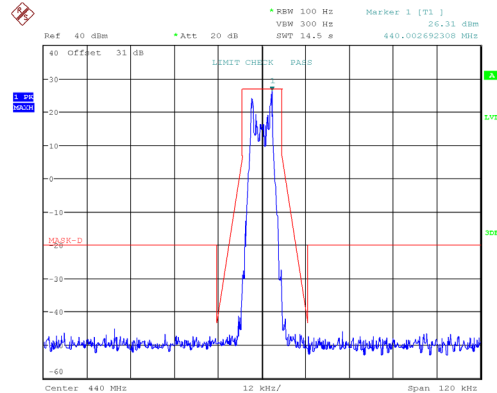

Low Power, 469.9875 MHz

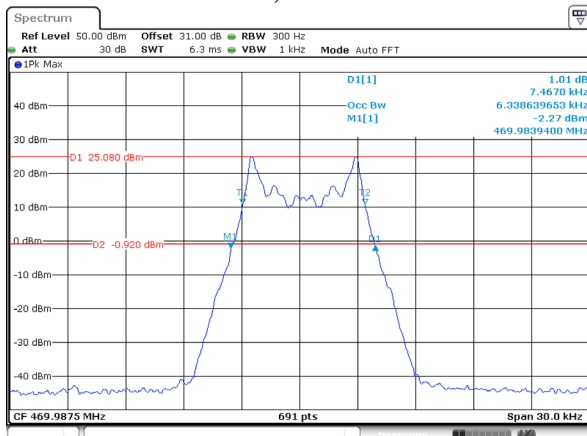

Emission Mask D

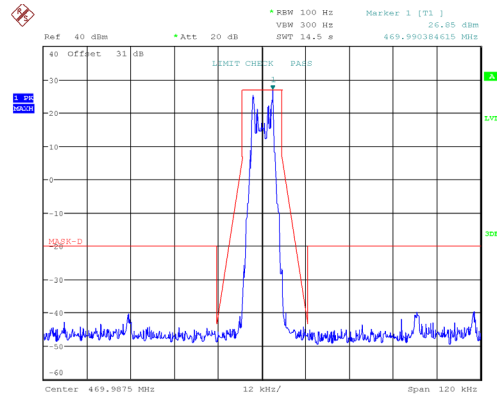


SPURIOUS EMISSIONS AT ANTENNA TERMINALS**Environmental Conditions & Test Information**

Test Date:	2025-03-25	2025-10-31
Temperature:	25.5 °C	24.8 °C
Relative Humidity:	65 %	51 %
ATM Pressure:	100.9 kPa	102.0 kPa
Test Result:	Pass	Pass
Test Engineer:	Neil Zhou	Neil Zhou


EUT Operation Mode: Transmitting

Test Result: Compliant.

Conducted Spurious Emissions at Antenna Port (High power level (worst case))
High Power, 410.0125 MHz

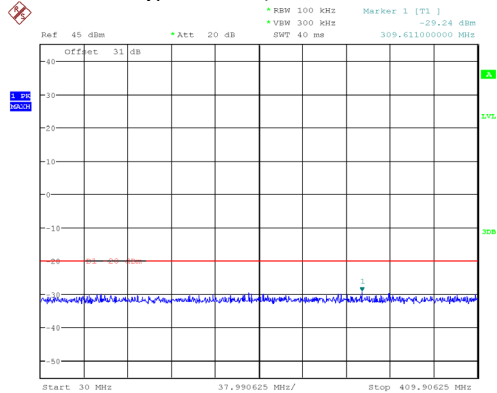


ProjectNo.:RSHA241101001 Tester:Neil Zhou
Date: 31.OCT.2025 15:23:03

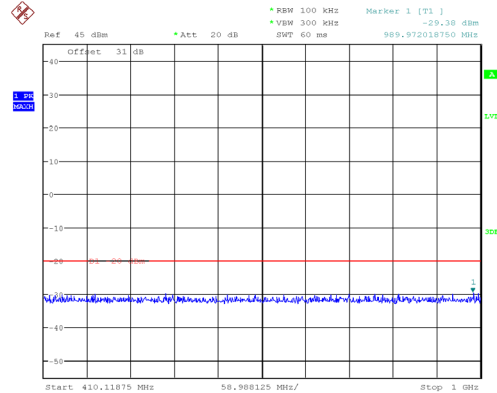


ProjectNo.:RSHA241101001 Tester:Neil Zhou
Date: 31.OCT.2025 15:25:52


High Power, 440 MHz

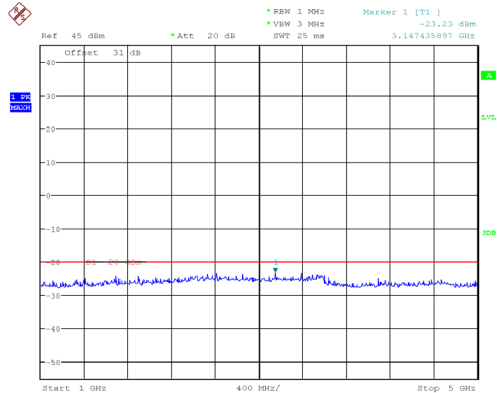


ProjectNo.:RSHA241101001 Tester:Neil Zhou
Date: 25.MAR.2025 17:35:14

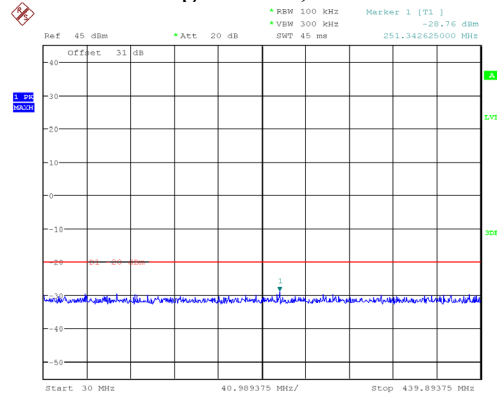


ProjectNo.:RSHA241101001 Tester:Neil Zhou
Date: 31.OCT.2025 15:27:53

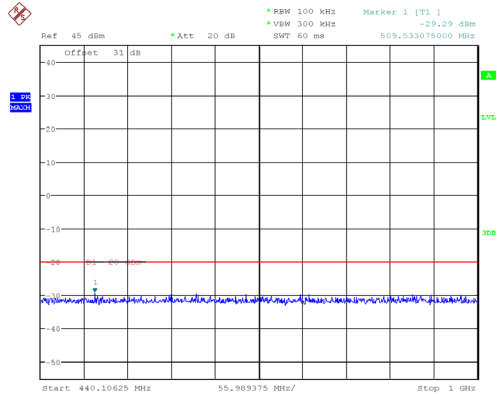


ProjectNo.:RSHA241101001 Tester:Neil Zhou
Date: 31.OCT.2025 15:29:16

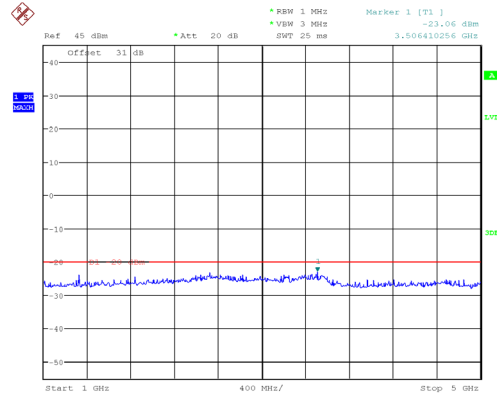


ProjectNo.:RSHA241101001 Tester:Neil Zhou
Date: 25.MAR.2025 17:37:37

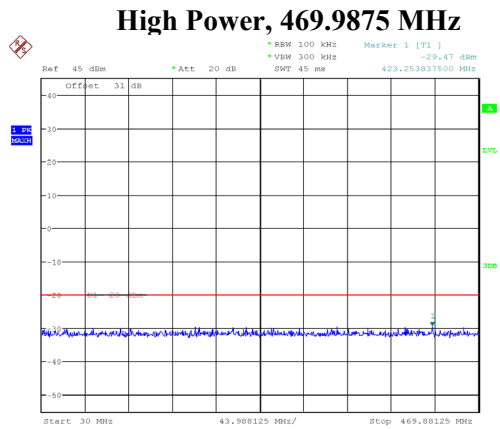

ProjectNo.:RSHA241101001 Tester:Neil Zhou
Date: 31.OCT.2025 15:31:30

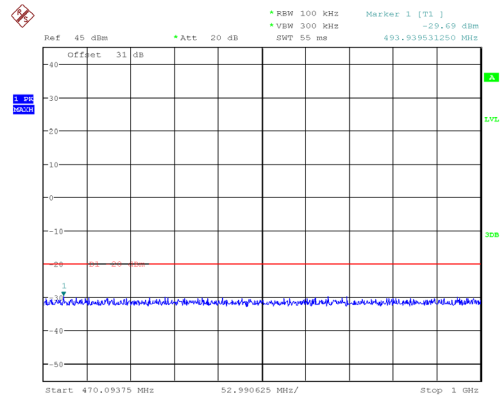

ProjectNo.:RSHA241101001 Tester:Neil Zhou
Date: 31.OCT.2025 15:33:25

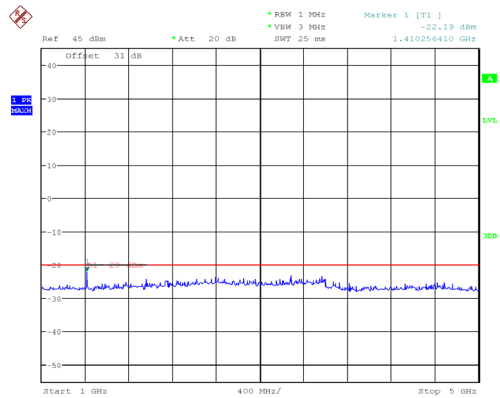

ProjectNo.:RSHA241101001 Tester:Neil Zhou
Date: 25.MAR.2025 17:32:05

SPURIOUS RADIATED EMISSIONS**Environmental Conditions & Test Information**

Test Date:	2025-03-25
Temperature:	25.5 °C
Relative Humidity:	65 %
ATM Pressure:	100.9 kPa
Test Result:	Pass
Test Engineer:	Neil Zhou

EUT Operation Mode: Transmitting in high power level (worst case)

30MHz - 5GHz:

Frequency (MHz)	Receiver Reading (dBμV)	Rx Antenna	Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
		Polar (H/V)	SGLevel (dBm)	Cable Loss (dB)	Antenna Gain (dBd/dBi)			
Frequency: 410.0125 MHz								
820.03	58.07	H	-38.31	0.62	-1.19	-40.12	-20.00	20.12
820.03	59.33	V	-39.04	0.62	-1.19	-40.85	-20.00	20.85
2318.56	65.77	H	-45.31	0.88	9.70	-36.49	-20.00	16.49
2318.56	65.20	V	-45.88	0.88	9.70	-37.06	-20.00	17.06
Frequency: 440 MHz								
880.00	56.37	H	-39.52	0.63	-1.01	-41.16	-20.00	21.16
880.00	56.55	V	-40.07	0.63	-1.01	-41.71	-20.00	21.71
2320.45	66.79	H	-44.29	0.88	9.70	-35.47	-20.00	15.47
2320.45	66.18	V	-44.90	0.88	9.70	-36.08	-20.00	16.08
Frequency: 469.9875 MHz								
939.98	58.83	H	-38.98	0.64	-1.11	-40.73	-20.00	20.73
939.98	54.44	V	-39.79	0.64	-1.11	-41.54	-20.00	21.54
2294.18	65.64	H	-45.42	0.87	9.65	-36.64	-20.00	16.64
2294.18	66.25	V	-44.81	0.87	9.65	-36.03	-20.00	16.03

Note:

- 1) Antenna gain is dBd for frequency below 1GHz and is dBi for frequency above 1GHz.
- 2) Absolute Level = SG Level - Cable loss + Antenna Gain
- 3) Margin = Limit- Absolute Level

FREQUENCY STABILITY**Environmental Conditions & Test Information**

Test Date:	2025-10-21
Temperature:	25.4 °C
Relative Humidity:	51 %
ATM Pressure:	103.2 kPa
Test Result:	Pass
Test Engineer:	Neil Zhou

*EUT Operation Mode: Transmitting***Test Result:** Compliant.

Powered by battery

Modulation	Channel Spacing(kHz)	Reference: 410.0125 MHz, High power				
GMSK	12.5	Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)	Limit (ppm)
		-30	N.V.7.4	410.01247	-0.07	±2.5
		-20		410.01239	-0.27	±2.5
		-10		410.01255	0.12	±2.5
		0		410.01259	0.22	±2.5
		10		410.01235	-0.37	±2.5
		20		410.01250	0.00	±2.5
		30		410.01232	-0.44	±2.5
		40		410.01241	-0.22	±2.5
		50		410.01262	0.29	±2.5
		20	L.V.6.29	410.01236	-0.34	±2.5
			H.V.8.51	410.01233	-0.41	±2.5

Modulation	Channel Spacing(kHz)	Reference: 440 MHz, High power				
GMSK	12.5	Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)	Limit (ppm)
		-30	N.V.7.4	440.00018	0.41	±2.5
		-20		440.00034	0.77	±2.5
		-10		439.99958	-0.95	±2.5
		0		440.00015	0.34	±2.5
		10		440.00008	0.18	±2.5
		20		440.00000	0.00	±2.5
		30		439.99972	-0.64	±2.5
		40		439.99949	-1.16	±2.5
		50		439.99942	-1.32	±2.5
		20	L.V.6.29	439.99928	-1.64	±2.5
			H.V.8.51	439.99936	-1.45	±2.5

Modulation	Channel Spacing(kHz)	Reference: 469.9875 MHz, High power				
GMSK	12.5	Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)	Limit (ppm)
		-30	N.V.7.4	469.98732	-0.38	±2.5
		-20		469.98759	0.19	±2.5
		-10		469.98772	0.47	±2.5
		0		469.98726	-0.51	±2.5
		10		469.98717	-0.70	±2.5
		20		469.98750	0.00	±2.5
		30		469.98731	-0.40	±2.5
		40		469.98753	0.06	±2.5
		50		469.98716	-0.72	±2.5
		20	L.V.6.29	469.98728	-0.47	±2.5
			H.V.8.51	469.98704	-0.98	±2.5

Powered by external power supply

Modulation	Channel Spacing(kHz)	Reference: 410.0125 MHz, High power				
		Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)	Limit (ppm)
GMSK	12.5	-30	N.V.12	410.01268	0.44	±2.5
		-20		410.01241	-0.22	±2.5
		-10		410.01232	-0.44	±2.5
		0		410.01274	0.59	±2.5
		10		410.01269	0.46	±2.5
		20		410.01250	0.00	±2.5
		30		410.01235	-0.37	±2.5
		40		410.01226	-0.59	±2.5
		50		410.01228	-0.54	±2.5
		20	L.V.9	410.01265	0.37	±2.5
			H.V.28	410.01223	-0.66	±2.5

Modulation	Channel Spacing(kHz)	Reference: 440 MHz, High power				
		Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)	Limit (ppm)
GMSK	12.5	-30	N.V.12	440.00012	0.27	±2.5
		-20		440.00036	0.82	±2.5
		-10		440.00064	1.45	±2.5
		0		440.00031	0.70	±2.5
		10		440.00052	1.18	±2.5
		20		440.00000	0.00	±2.5
		30		439.99947	-1.2	±2.5
		40		439.99961	-0.89	±2.5
		50		439.99928	-1.64	±2.5
		20	L.V.9	439.99961	-0.89	±2.5
			H.V.28	439.99932	-1.55	±2.5



Modulation	Channel Spacing(kHz)	Reference: 469.9875 MHz, High power				
GMSK	12.5	Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)	Limit (ppm)
		-30	N.V.12	469.98772	0.47	±2.5
		-20		469.98741	-0.19	±2.5
		-10		469.98784	0.72	±2.5
		0		469.98723	-0.57	±2.5
		10		469.98715	-0.74	±2.5
		20		469.98750	0.00	±2.5
		30		469.98736	-0.30	±2.5
		40		469.98717	-0.70	±2.5
		50		469.98726	-0.51	±2.5
		20	L.V.9	469.98789	0.83	±2.5
			H.V.28	469.98782	0.68	±2.5

TRANSIENT FREQUENCY BEHAVIOR**Environmental Conditions & Test Information**

Test Date:	2025-05-27
Temperature:	25.3 °C
Relative Humidity:	60 %
ATM Pressure:	100.6 kPa
Test Result:	Pass
Test Engineer:	Neil Zhou

Channel Spacing (kHz)	Transient Period (ms)	Transient Frequency (kHz)	Result
12.5	10(t ₁)	±12.5	Compliant
	25(t ₂)	±6.25	Compliant
	10(t ₃)	±12.5	Not Applicable

Note: Not Applicable: t₃ is not applicable for the t₂ less than 25ms.

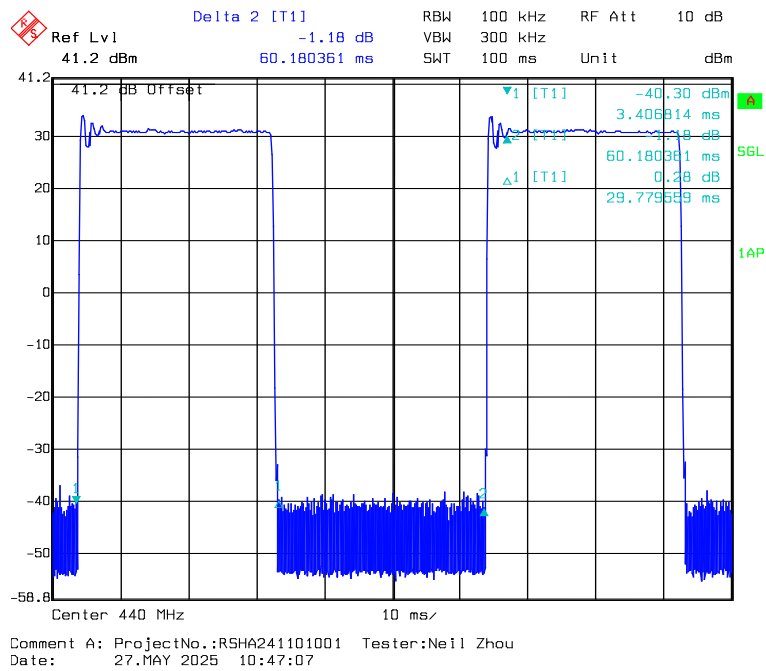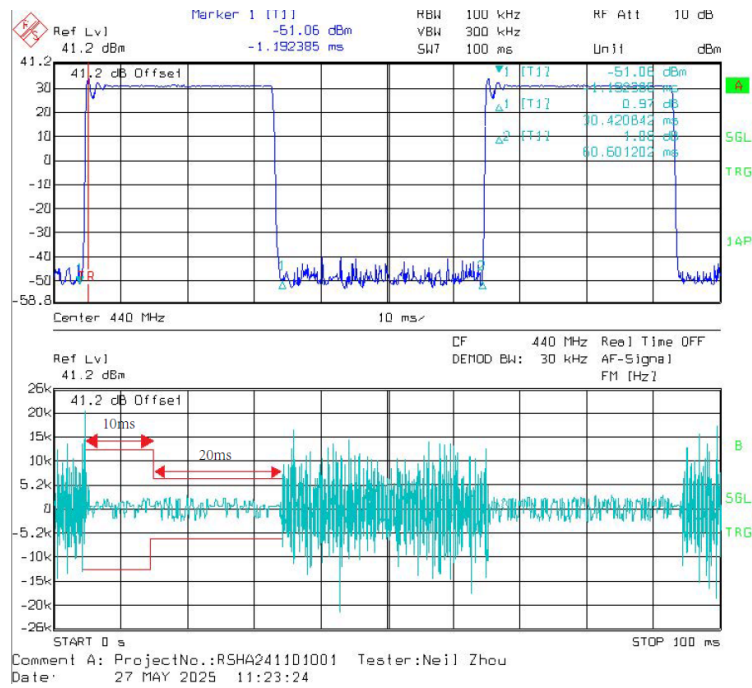

EUT PHOTOGRAPHS

Please refer to the attachment EXHIBIT A - EUT EXTERNAL PHOTOGRAPHS and EXHIBIT B - EUT INTERNAL PHOTOGRAPHS.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment EXHIBIT D - TEST SETUP PHOTOGRAPHS.

Declarations

1. The laboratory is not responsible for the authenticity of any information provided by the applicant. Information from the applicant that may affect test results is marked with “★”.
2. The test data was only valid for the test sample(s).
3. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
4. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
5. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor $k=2$ with the 95.45% confidence interval.

******* END OF REPORT*******