




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: EinScan Tracker Test Engineer: Felix
Test Mode: a 5180MHz
Test Voltage: DC 3.636V
Note:

Radiated Emission Measurement

Test Date: 2026/7/6 18:25:56

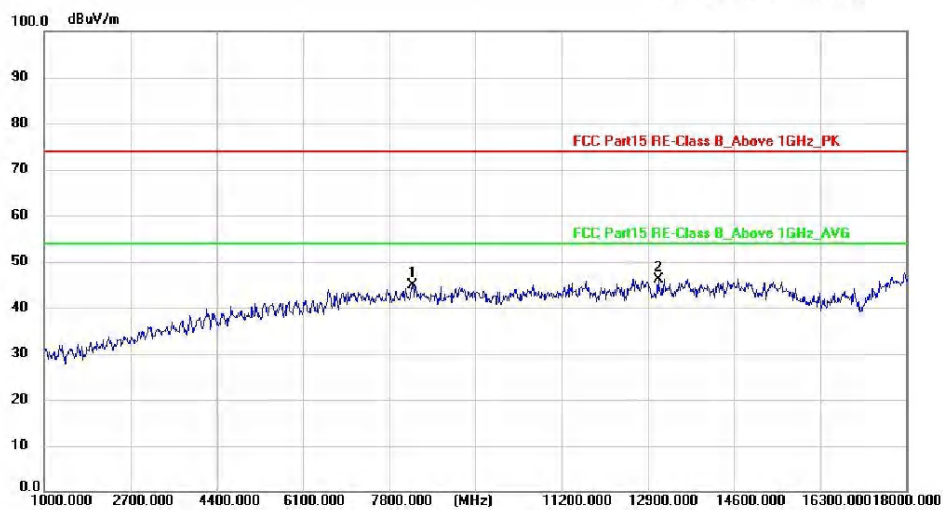

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	8269.625	55.39	-10.59	44.80	74.00	-29.20	peak	150	239	P	
2 *	13114.625	53.77	-7.54	46.23	74.00	-27.77	peak	150	55	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: EinScan Tracker
Test Mode: a 5200MHz
Test Voltage: DC 3.636V
Note:

Polarization: **Vertical**
Distance: 3m
Test Engineer: Felix

Temperature: 26 °C
Humidity: 54 %RH

Radiated Emission Measurement

Test Date: 2026/7/6 18:06:43

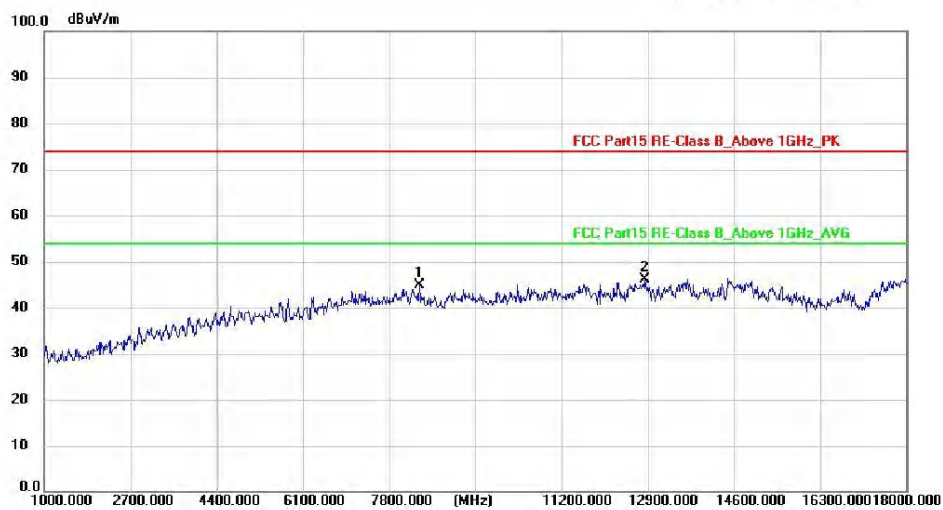

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	8401.375	55.42	-10.56	44.86	74.00	-29.14	peak	150	359	P	
2 *	12855.375	53.84	-7.76	46.08	74.00	-27.92	peak	150	323	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: EinScan Tracker
Test Mode: a 5200MHz
Test Voltage: DC 3.636V
Note:

Polarization: **Horizontal**
Distance: 3m
Test Engineer: Felix

Temperature: 26 °C
Humidity: 54 %RH

Radiated Emission Measurement

Test Date: 2026/7/6 18:12:48

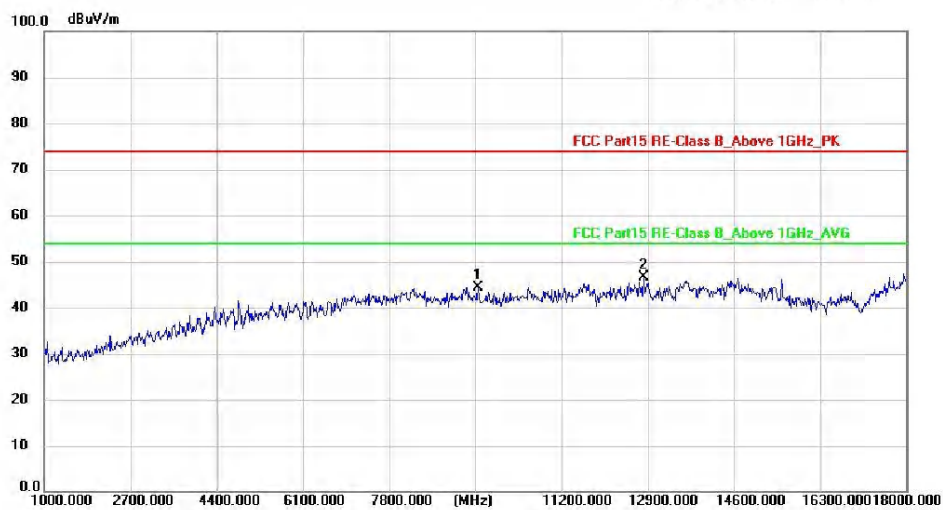

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	9561.625	54.58	-10.15	44.43	74.00	-29.57	peak	150	104	P	
2 *	12823.500	54.41	-7.80	46.61	74.00	-27.39	peak	150	29	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: EinScan Tracker
Test Mode: a 5240MHz
Test Voltage: DC 3.636V
Note:

Polarization: **Vertical**
Distance: 3m
Test Engineer: Felix

Temperature: 26 °C
Humidity: 54 %RH

Radiated Emission Measurement

Test Date: 2026/7/6 18:53:23

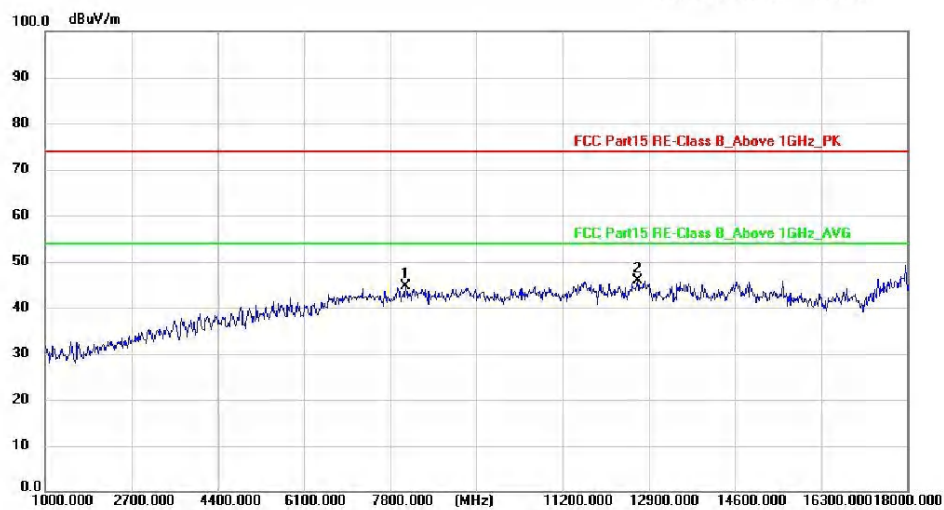

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	8120.875	55.28	-10.63	44.65	74.00	-29.35	peak	150	76	P	
2 *	12681.125	53.81	-7.94	45.87	74.00	-28.13	peak	150	152	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: EinScan Tracker Test Engineer: Felix
Test Mode: a 5240MHz
Test Voltage: DC 3.636V
Note:

Radiated Emission Measurement

Test Date: 2026/7/6 18:59:27

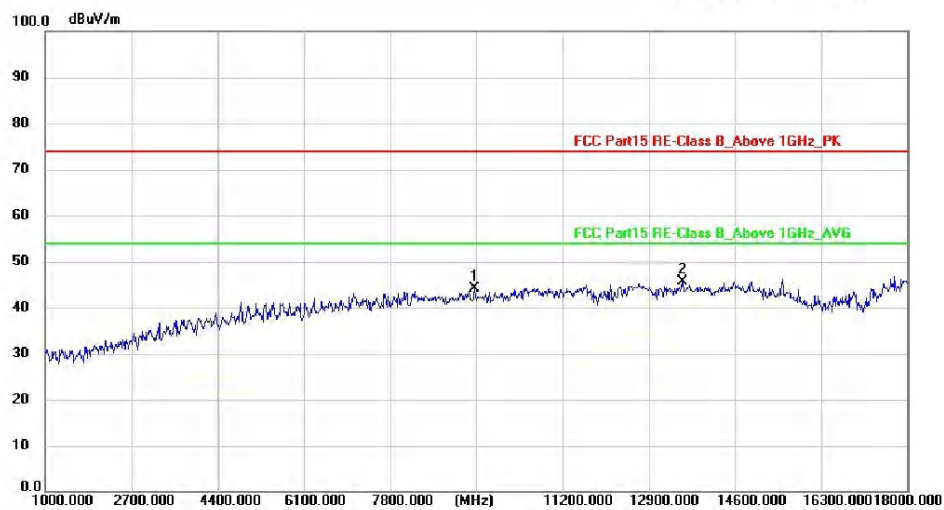

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	9478.750	54.34	-10.18	44.16	74.00	-29.84	peak	150	151	P	
2 *	13575.750	52.83	-7.20	45.63	74.00	-28.37	peak	150	317	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Vertical	Temperature: 26 °C
EUT: 3D Scanner	Distance: 3m	Humidity: 54 %RH
M/N: EinScan Tracker	Test Engineer: Felix	
Test Mode: ax40 5190MHz		
Test Voltage: DC 3.636V		
Note:		

Radiated Emission Measurement

Test Date: 2026/7/6 19:54:58

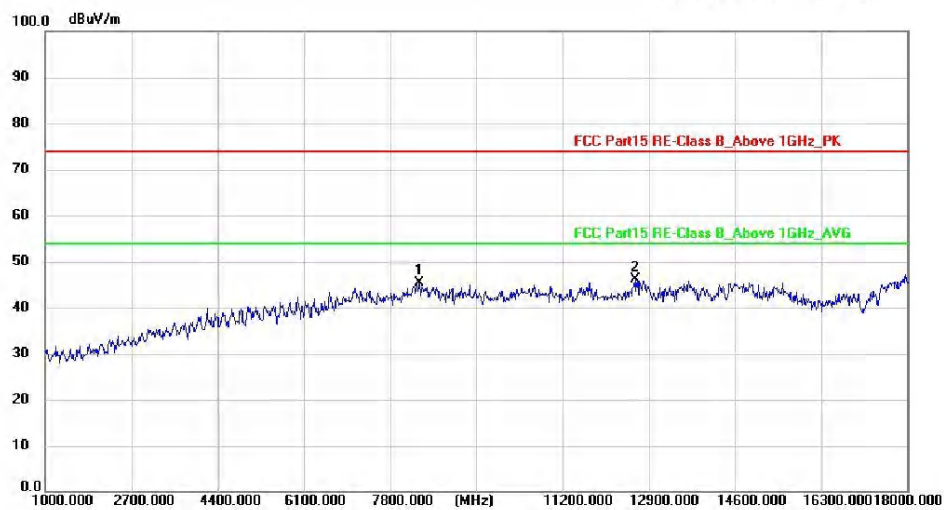

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	8380.125	55.96	-10.56	45.40	74.00	-28.60	peak	150	182	P	
2 *	12636.500	54.23	-7.98	46.25	74.00	-27.75	peak	150	357	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: EinScan Tracker
Test Mode: ax40 5190MHz
Test Voltage: DC 3.636V
Note:

Polarization: **Horizontal**
Distance: 3m
Test Engineer: Felix

Temperature: 26 °C
Humidity: 54 %RH

Radiated Emission Measurement

Test Date: 2026/7/6 20:00:03

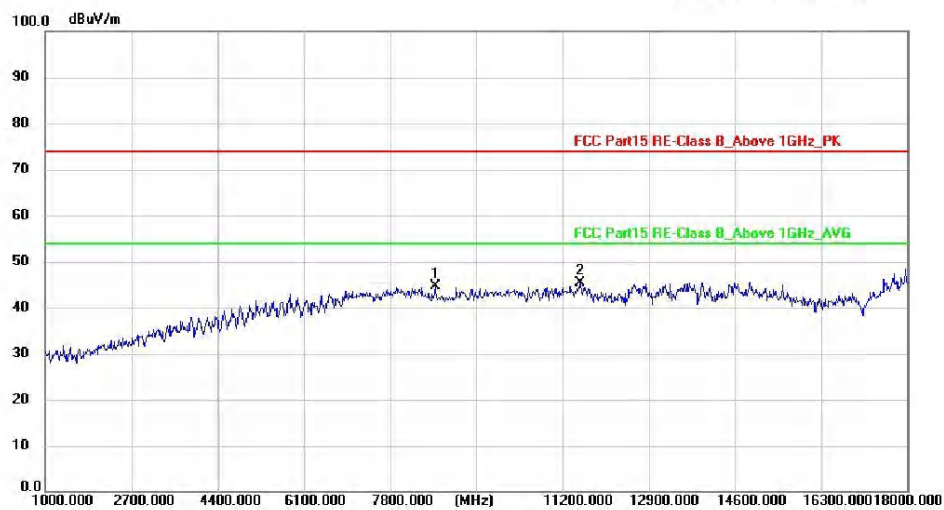

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	8690.375	55.08	-10.48	44.60	74.00	-29.40	peak	150	144	P	
2 *	11565.500	54.15	-8.78	45.37	74.00	-28.63	peak	150	283	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: EinScan Tracker Test Engineer: Felix
Test Mode: ax40 5230MHz
Test Voltage: DC 3.636V
Note:

Radiated Emission Measurement

Test Date: 2026/7/6 20:17:17

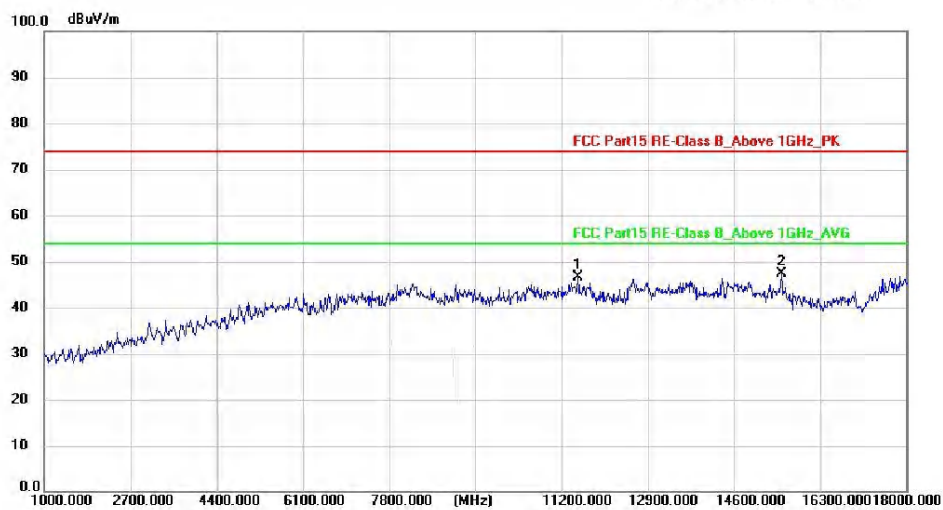

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	11529.375	55.47	-8.78	46.69	74.00	-27.31	peak	150	360	P	
2 *	15539.250	55.24	-7.88	47.36	74.00	-26.64	peak	150	343	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: EinScan Tracker Test Engineer: Felix
Test Mode: ax40 5230MHz
Test Voltage: DC 3.636V
Note:

Radiated Emission Measurement

Test Date: 2026/7/6 20:23:22

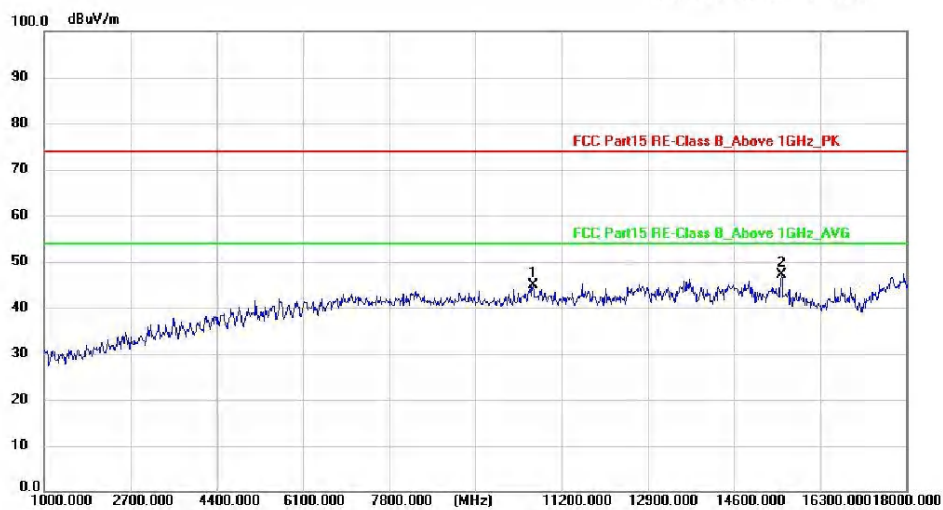

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	10639.000	54.07	-9.31	44.76	74.00	-29.24	peak	150	51	P	
2 *	15543.500	55.02	-7.89	47.13	74.00	-26.87	peak	150	155	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: EinScan Tracker Test Engineer: Felix
Test Mode: ax80 5210MHz
Test Voltage: DC 3.636V
Note:

Radiated Emission Measurement

Test Date: 2026/7/6 20:29:26

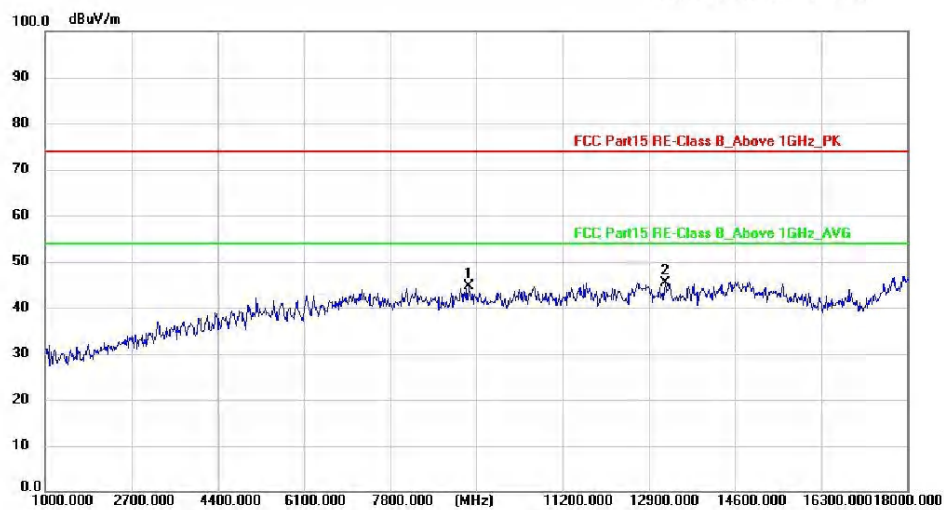

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	9357.625	54.91	-10.24	44.67	74.00	-29.33	peak	150	189	P	
2 *	13235.750	52.91	-7.44	45.47	74.00	-28.53	peak	150	39	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: EinScan Tracker
Test Mode: ax80 5210MHz
Test Voltage: DC 3.636V
Note:

Polarization: **Vertical**
Distance: 3m
Test Engineer: Felix

Temperature: 26 °C
Humidity: 54 %RH

Radiated Emission Measurement

Test Date: 2026/7/6 20:35:31

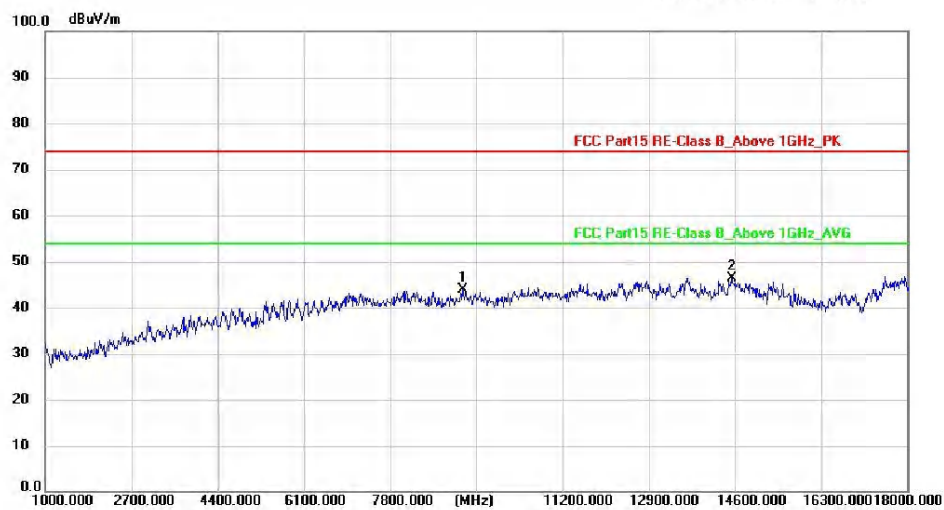

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	9234.375	54.18	-10.29	43.89	74.00	-30.11	peak	150	290	P	
2 *	14534.125	53.54	-7.05	46.49	74.00	-27.51	peak	150	0	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

U-NII-3 Band




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Horizontal	Temperature: 24 °C
EUT: 3D Scanner	Distance: 3m	Humidity: 56 %RH
M/N: EinScan Tracker	Test Engineer: Felix	
Test Mode: a 5745MHz		
Test Voltage: DC 3.636V		
Note:		

Radiated Emission Measurement

Test Date: 2026/7/6 20:40:30

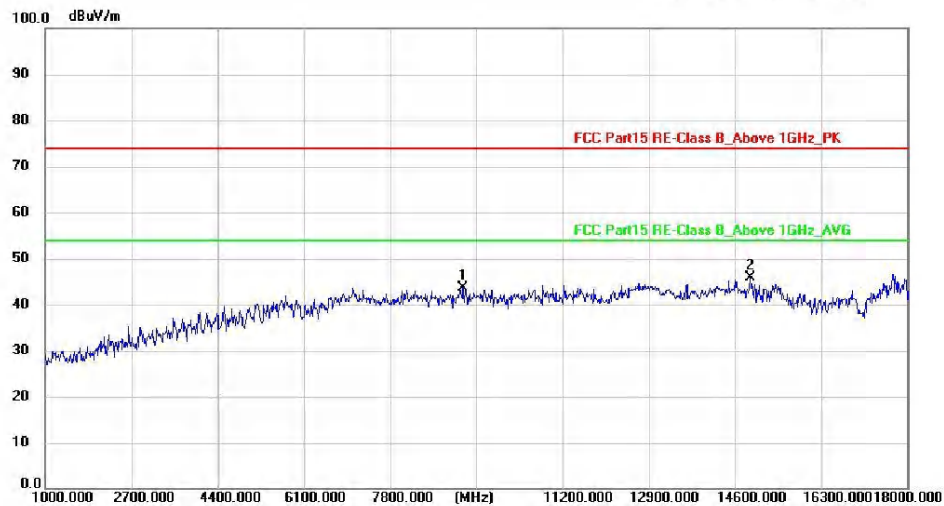

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	9259.875	53.92	-10.29	43.63	74.00	-30.37	peak	150	92	P	
2 *	14914.500	53.05	-7.17	45.88	74.00	-28.12	peak	150	177	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: EinScan Tracker
Test Mode: a 5745MHz
Test Voltage: DC 3.636V
Note:

Polarization: **Vertical**
Distance: 3m
Test Engineer: Felix

Temperature: 24 °C
Humidity: 56 %RH

Radiated Emission Measurement

Test Date: 2026/7/6 20:45:16

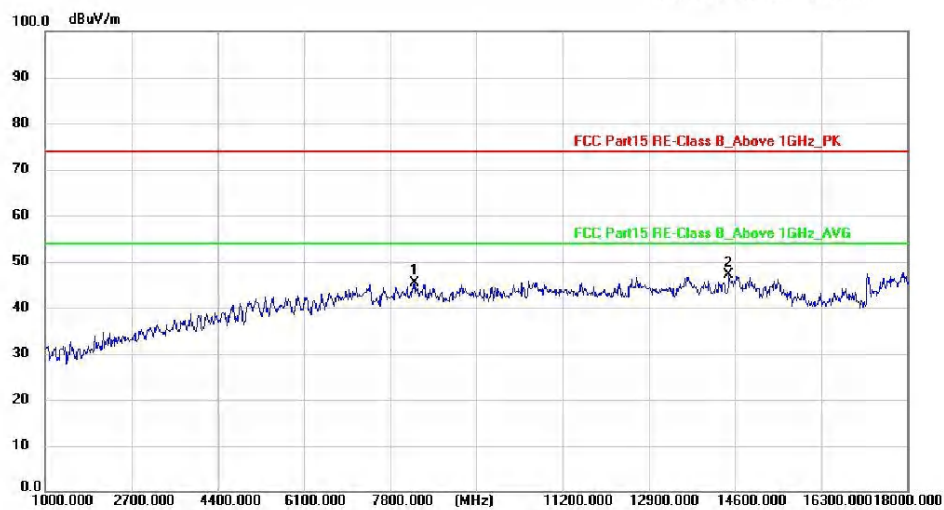

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	8303.625	55.92	-10.58	45.34	74.00	-28.66	peak	150	301	P	
2 *	14489.500	54.09	-7.04	47.05	74.00	-26.95	peak	150	40	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: EinScan Tracker
Test Mode: a 5785MHz
Test Voltage: DC 3.636V
Note:

Polarization: **Horizontal**
Distance: 3m
Test Engineer: Felix

Temperature: 24 °C
Humidity: 56 %RH

Radiated Emission Measurement

Test Date: 2026/7/6 20:51:34

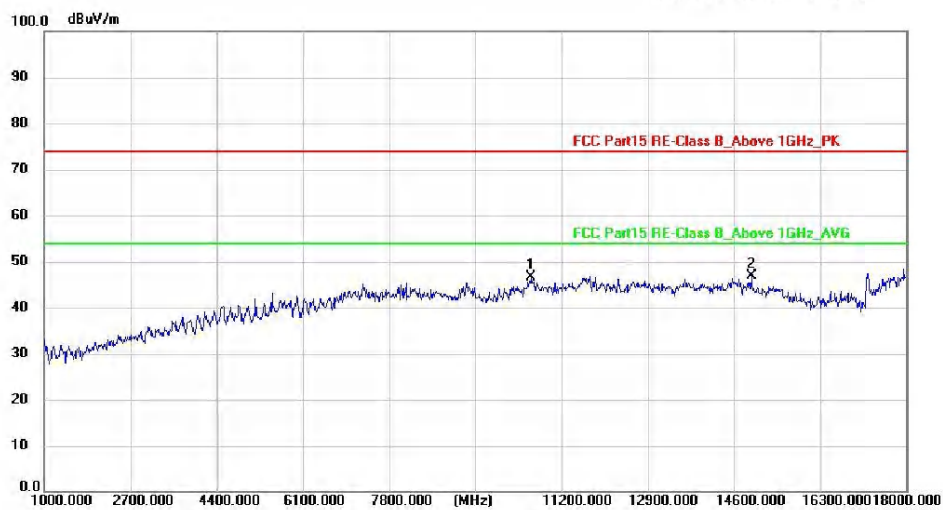

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	10619.875	56.09	-9.34	46.75	74.00	-27.25	peak	150	351	P	
2 *	14946.375	53.98	-7.18	46.80	74.00	-27.20	peak	150	144	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: EinScan Tracker
Test Mode: a 5785MHz
Test Voltage: DC 3.636V
Note:

Polarization: **Vertical**
Distance: 3m
Test Engineer: Felix

Temperature: 24 °C
Humidity: 56 %RH

Radiated Emission Measurement

Test Date: 2026/7/6 20:57:04

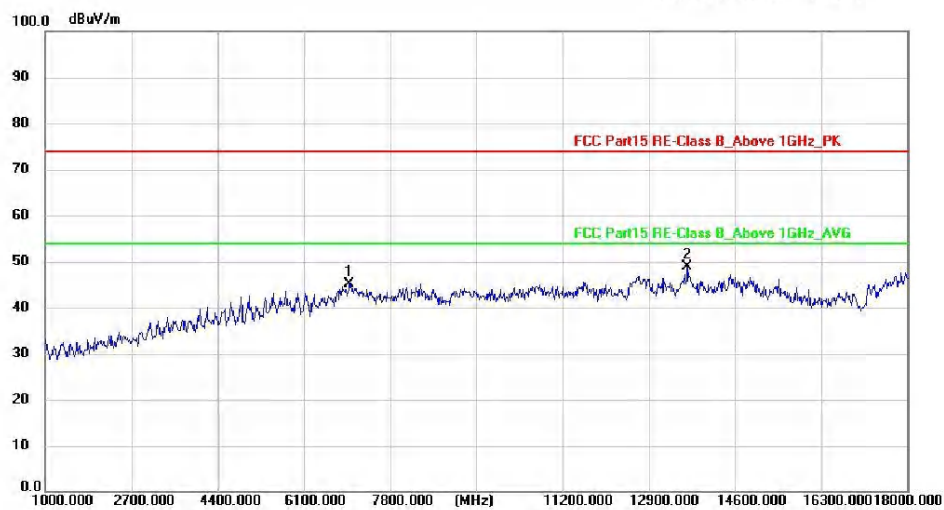

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	7015.875	56.49	-11.36	45.13	74.00	-28.87	peak	150	282	P	
2 *	13677.750	55.92	-7.13	48.79	74.00	-25.21	peak	150	329	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 24 °C
EUT: 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: EinScan Tracker Test Engineer: Felix
Test Mode: a 5825MHz
Test Voltage: DC 3.636V
Note:

Radiated Emission Measurement

Test Date: 2026/7/6 21:03:38

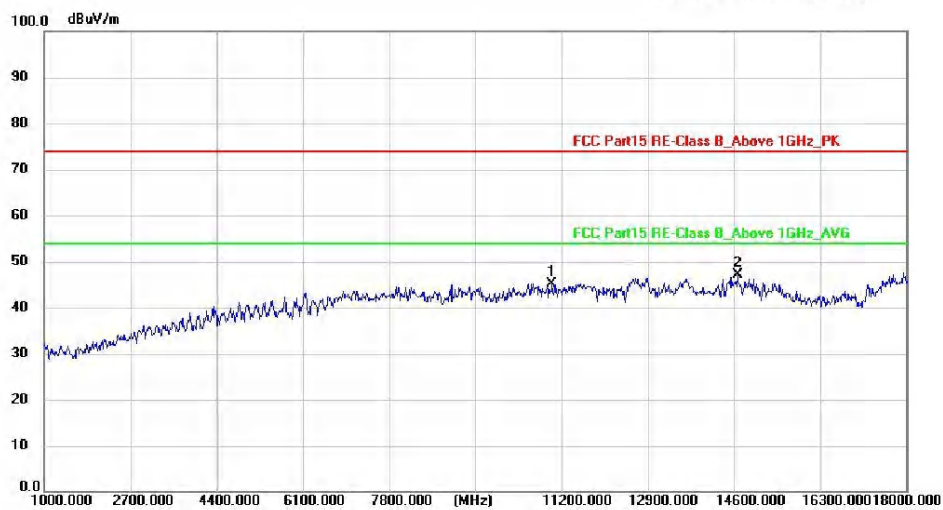

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	11017.250	54.05	-8.95	45.10	74.00	-28.90	peak	150	244	P	
2 *	14682.875	54.30	-7.10	47.20	74.00	-26.80	peak	150	72	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: EinScan Tracker
Test Mode: a 5825MHz
Test Voltage: DC 3.636V
Note:

Polarization: **Horizontal**
Distance: 3m
Test Engineer: Felix

Temperature: 24 °C
Humidity: 56 %RH

Radiated Emission Measurement

Test Date: 2026/7/6 21:09:28

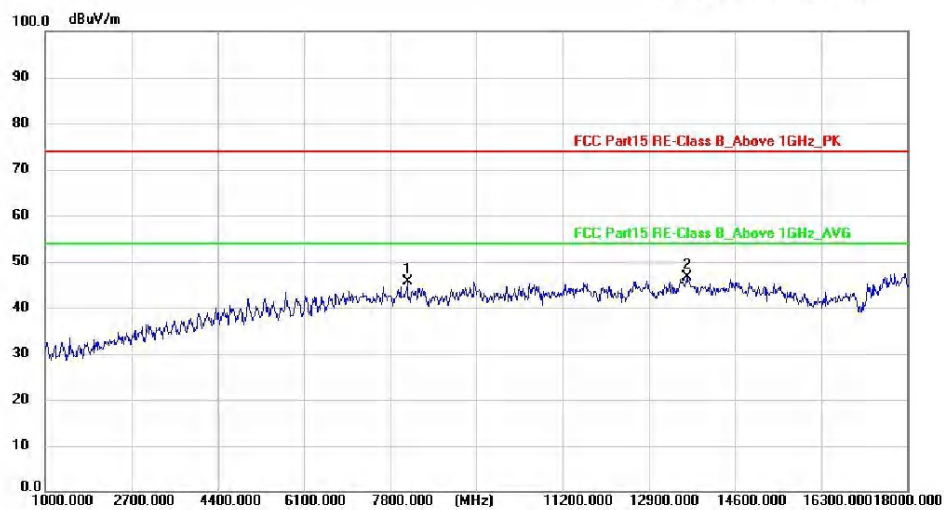

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	8146.375	56.32	-10.62	45.70	74.00	-28.30	peak	150	238	P	
2 *	13652.250	53.88	-7.15	46.73	74.00	-27.27	peak	150	340	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 24 °C
EUT: 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: EinScan Tracker Test Engineer: Felix
Test Mode: ax40 5755MHz
Test Voltage: DC 3.636V
Note:

Radiated Emission Measurement

Test Date: 2026/7/6 22:57:55

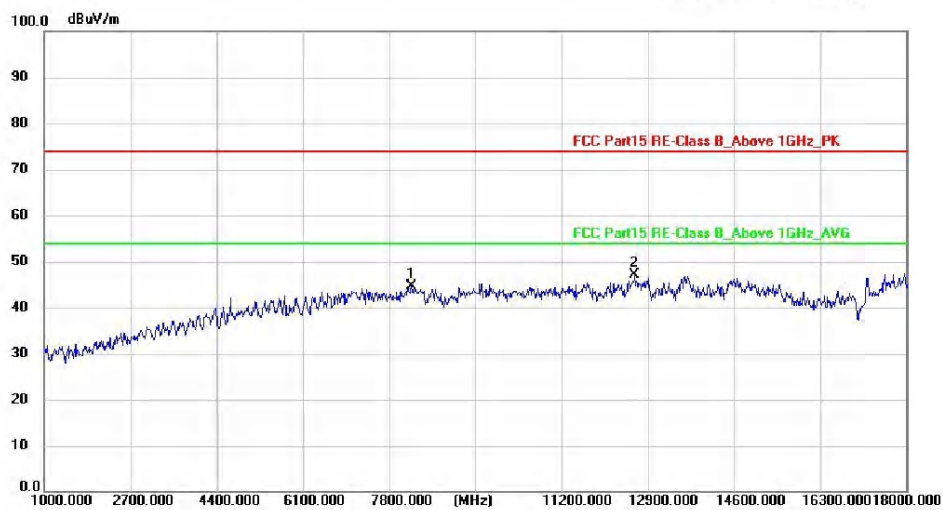

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	8252.625	55.26	-10.60	44.66	74.00	-29.34	peak	150	162	P	
2 *	12649.250	55.15	-7.97	47.18	74.00	-26.82	peak	150	190	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: EinScan Tracker
Test Mode: ax40 5755MHz
Test Voltage: DC 3.636V
Note:

Polarization: **Vertical**
Distance: 3m
Test Engineer: Felix

Temperature: 24 °C
Humidity: 56 %RH

Radiated Emission Measurement

Test Date: 2026/7/6 23:03:07

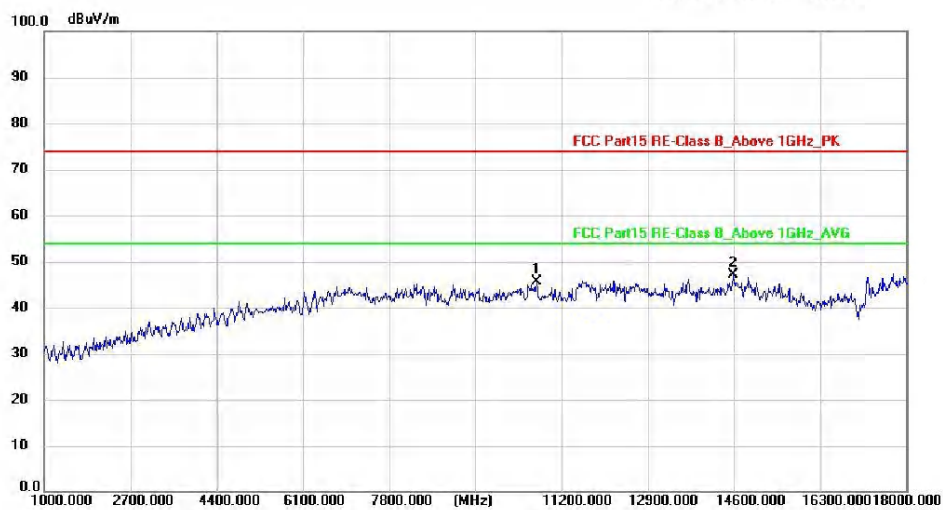

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	10707.000	54.83	-9.25	45.58	74.00	-28.42	peak	150	170	P	
2 *	14595.750	54.30	-7.07	47.23	74.00	-26.77	peak	150	136	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: EinScan Tracker
Test Mode: ax40 5795MHz
Test Voltage: DC 3.636V
Note:

Polarization: **Horizontal**
Distance: 3m
Test Engineer: Felix

Temperature: 24 °C
Humidity: 56 %RH

Radiated Emission Measurement

Test Date: 2026/7/6 23:08:17

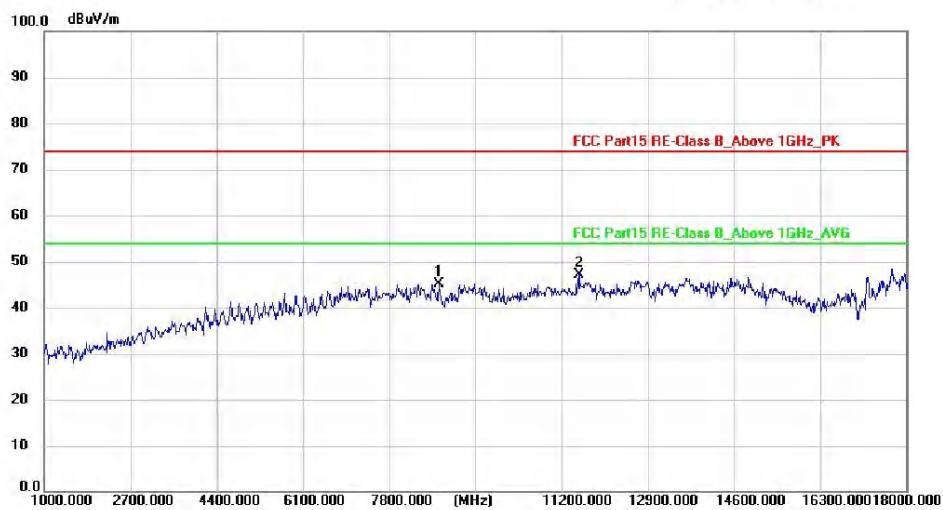

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	8792.375	55.68	-10.46	45.22	74.00	-28.78	peak	150	108	P	
2 *	11552.750	55.83	-8.78	47.05	74.00	-26.95	peak	150	268	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 24 °C
EUT: 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: EinScan Tracker Test Engineer: Felix
Test Mode: ax40 5795MHz
Test Voltage: DC 3.636V
Note:

Radiated Emission Measurement

Test Date: 2026/7/6 23:14:28

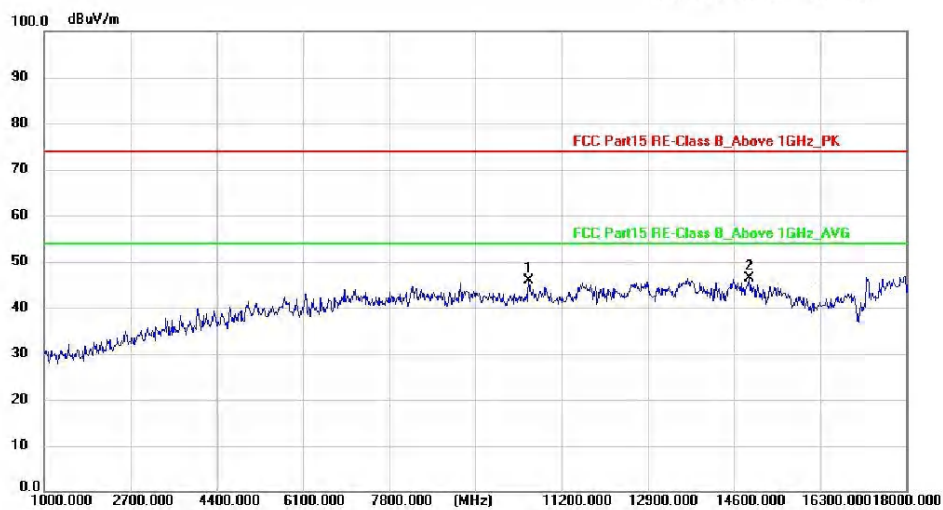

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	10568.875	55.22	-9.38	45.84	74.00	-28.16	peak	150	120	P	
2 *	14908.125	53.59	-7.16	46.43	74.00	-27.57	peak	150	81	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: EinScan Tracker
Test Mode: ax80 5775MHz
Test Voltage: DC 3.636V
Note:

Polarization: **Horizontal**
Distance: 3m
Test Engineer: Felix

Temperature: 24 °C
Humidity: 56 %RH

Radiated Emission Measurement

Test Date: 2026/7/6 23:44:18

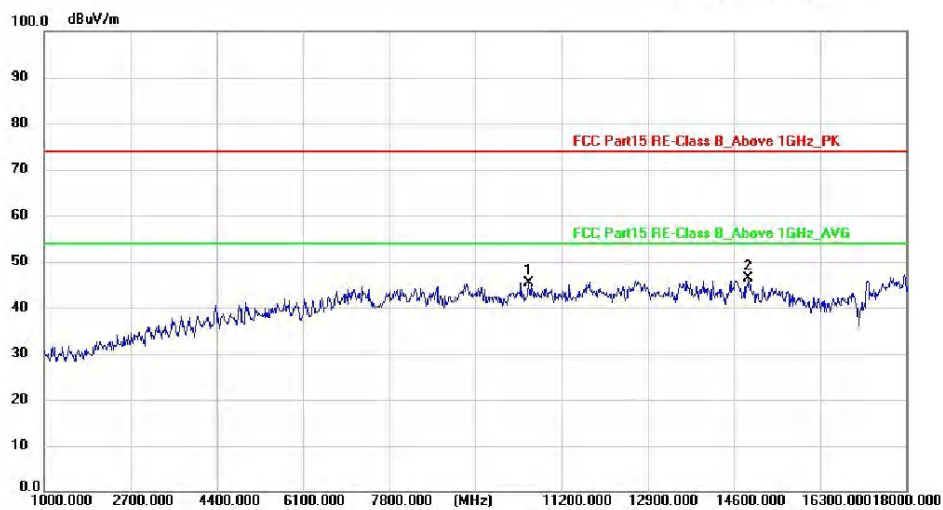

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	10558.250	54.83	-9.39	45.44	74.00	-28.56	peak	150	316	P	
2 *	14903.875	53.58	-7.16	46.42	74.00	-27.58	peak	150	122	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: EinScan Tracker
Test Mode: ax80 5775MHz
Test Voltage: DC 3.636V
Note:

Polarization: **Vertical**
Distance: 3m
Test Engineer: Felix

Temperature: 24 °C
Humidity: 56 %RH

Radiated Emission Measurement

Test Date: 2026/7/6 23:50:29

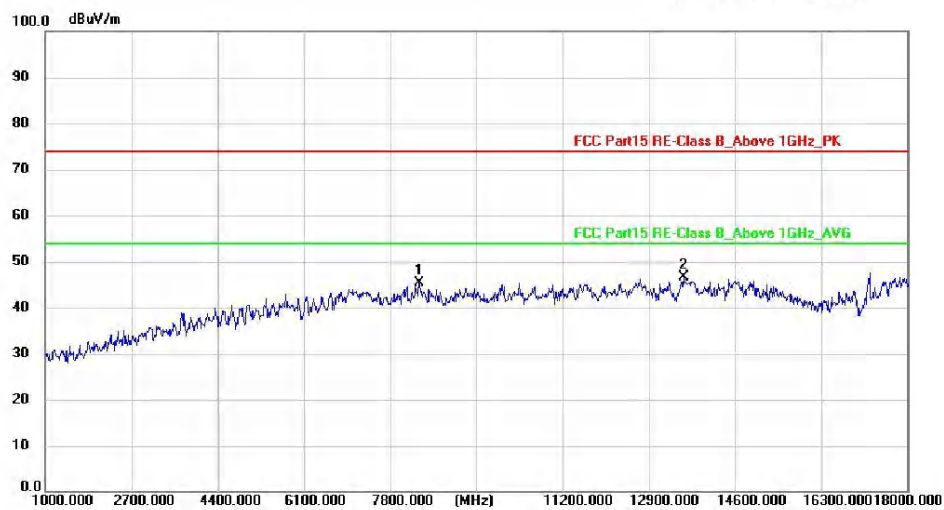

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	8380.125	55.88	-10.56	45.32	74.00	-28.68	peak	150	198	P	
2 *	13590.625	53.88	-7.20	46.68	74.00	-27.32	peak	150	295	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix A.7: Test Results of Radiated Emissions in Restricted Bands

- 1) Both antenna 1 and antenna tested for 802.11a, only worst case reported.
- 2) Both MIMO and SISO tested for 802.11n/ac/ax, only worst case (MIMO) reported.

U-NII-1 Band



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 24 °C
EUT: 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: EinScan Tracker Test Engineer: Felix
Test Mode: a 5180MHz
Test Voltage: DC 3.636V
Note:

Radiated Emission Measurement

Test Date: 2026/7/10 15:28:14



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5150.000	69.20	-17.45	51.75	68.82	-17.07	peak	150	211	P	
2 *	5150.000	63.60	-17.45	46.15	54.00	-7.85	AVG	150	211	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 24 °C
EUT: 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: EinScan Tracker Test Engineer: Felix
Test Mode: a 5180MHz
Test Voltage: DC 3.636V
Note:

Radiated Emission Measurement

Test Date: 2026/7/10 15:33:25



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5150.000	64.71	-17.45	47.26	68.82	-21.56	peak	150	46	P	
2 *	5150.000	52.59	-17.45	35.14	54.00	-18.86	AVG	150	46	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: EinScan Tracker
Test Mode: a 5240MHz
Test Voltage: DC 3.636V
Note:

Polarization: **Vertical**
Distance: 3m
Test Engineer: Felix

Temperature: 24 °C
Humidity: 56 %RH

Radiated Emission Measurement

Test Date: 2026/7/10 15:39:21



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5350.000	44.80	-16.99	27.81	68.82	-41.01	peak	150	215	P	
2 *	5350.000	35.94	-16.99	18.95	54.00	-35.05	AVG	150	215	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: EinScan Tracker
Test Mode: a 5240MHz
Test Voltage: DC 3.636V
Note:

Polarization: **Horizontal**
Distance: 3m
Test Engineer: Felix

Temperature: 24 °C
Humidity: 56 %RH

Radiated Emission Measurement

Test Date: 2026/7/10 15:44:08



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5350.000	52.40	-16.99	35.41	68.82	-33.41	peak	150	34	P	
2 *	5350.000	40.55	-16.99	23.56	54.00	-30.44	AVG	150	34	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 24 °C
EUT: 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: EinScan Tracker Test Engineer: Felix
Test Mode: n20 5180MHz
Test Voltage: DC 3.636V
Note:

Radiated Emission Measurement

Test Date: 2026/7/10 15:50:12

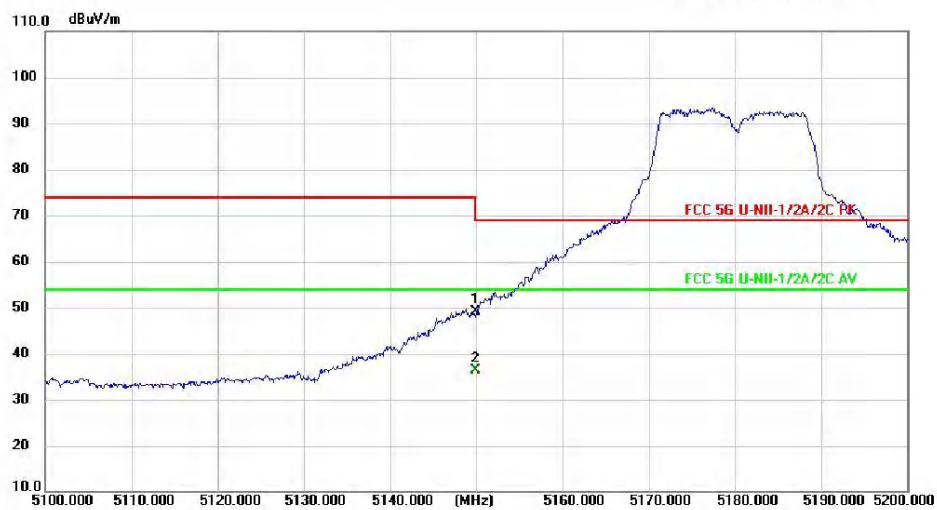

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5150.000	66.64	-17.45	49.19	68.82	-19.63	peak	150	119	P	
2 *	5150.000	53.86	-17.45	36.41	54.00	-17.59	AVG	150	119	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 24 °C
EUT: 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: EinScan Tracker Test Engineer: Felix
Test Mode: n20 5180MHz
Test Voltage: DC 3.636V
Note:

Radiated Emission Measurement

Test Date: 2026/7/10 15:56:43

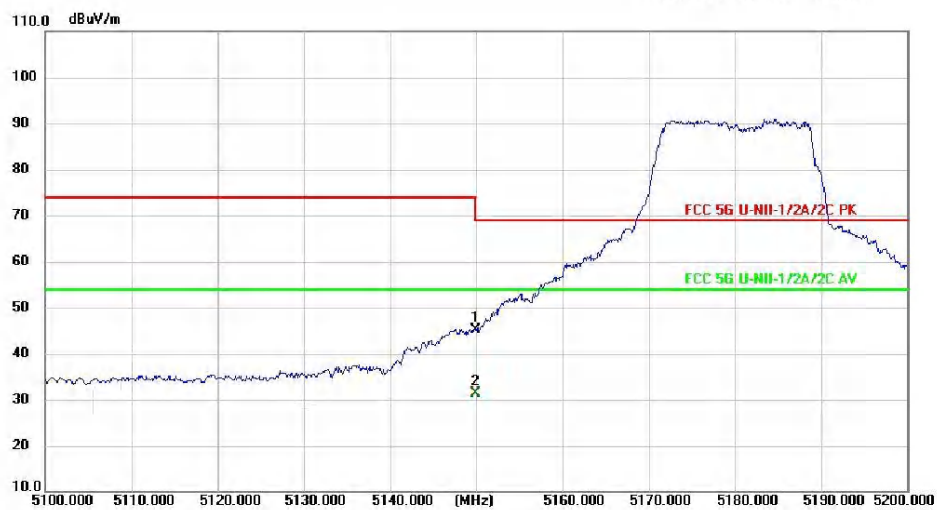

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5150.000	62.54	-17.45	45.09	68.82	-23.73	peak	150	194	P	
2 *	5150.000	48.71	-17.45	31.26	54.00	-22.74	AVG	150	194	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

File: FCC 5\Data :#6

Page: 1

Engineer Signature:





Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: EinScan Tracker
Test Mode: n20 5240MHz
Test Voltage: DC 3.636V
Note:

Polarization: **Vertical**
Distance: 3m
Test Engineer: Felix

Temperature: 24 °C
Humidity: 56 %RH

Radiated Emission Measurement

Test Date: 2026/7/10 16:01:16



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5350.000	52.33	-16.99	35.34	68.82	-33.48	peak	150	153	P	
2 *	5350.000	40.50	-16.99	23.51	54.00	-30.49	AVG	150	153	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

File: FCC 5\Data :#7

Page: 1

Engineer Signature:



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: EinScan Tracker
Test Mode: n20 5240MHz
Test Voltage: DC 3.636V
Note:

Polarization: **Horizontal**
Distance: 3m
Test Engineer: Felix

Temperature: 24 °C
Humidity: 56 %RH

Radiated Emission Measurement

Test Date: 2026/7/10 16:07:49



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5350.000	53.69	-16.99	36.70	68.82	-32.12	peak	150	63	P	
2 *	5350.000	40.14	-16.99	23.15	54.00	-30.85	AVG	150	63	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

File: FCC 5\Data :#8

Page: 1

Engineer Signature:



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: EinScan Tracker
Test Mode: n40 5190MHz
Test Voltage: DC 3.636V
Note:

Polarization: **Horizontal**
Distance: 3m
Test Engineer: Felix

Temperature: 24 °C
Humidity: 56 %RH

Radiated Emission Measurement

Test Date: 2026/7/10 16:14:34



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5150.000	72.39	-17.45	54.94	68.82	-13.88	peak	150	326	P	
2 *	5150.000	57.60	-17.45	40.15	54.00	-13.85	AVG	150	326	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: EinScan Tracker
Test Mode: n40 5190MHz
Test Voltage: DC 3.636V
Note:

Polarization: **Vertical**
Distance: 3m
Test Engineer: Felix

Temperature: 24 °C
Humidity: 56 %RH

Radiated Emission Measurement

Test Date: 2026/7/10 16:20:14



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5150.000	71.09	-17.45	53.64	68.82	-15.18	peak	150	209	P	
2 *	5150.000	57.61	-17.45	40.16	54.00	-13.84	AVG	150	209	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: EinScan Tracker
Test Mode: n40 5230MHz
Test Voltage: DC 3.636V
Note:

Polarization: **Vertical**
Distance: 3m
Test Engineer: Felix

Temperature: 24 °C
Humidity: 56 %RH

Radiated Emission Measurement

Test Date: 2026/7/10 16:26:52



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5350.000	52.59	-16.99	35.60	68.82	-33.22	peak	150	118	P	
2 *	5350.000	40.64	-16.99	23.65	54.00	-30.35	AVG	150	118	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: EinScan Tracker
Test Mode: n40 5230MHz
Test Voltage: DC 3.636V
Note:

Polarization: **Horizontal**
Distance: 3m
Test Engineer: Felix

Temperature: 24 °C
Humidity: 56 %RH

Radiated Emission Measurement

Test Date: 2026/7/10 16:31:47



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5350.000	55.33	-16.99	38.34	68.82	-30.48	peak	150	145	P	
2 *	5350.000	41.44	-16.99	24.45	54.00	-29.55	AVG	150	145	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: EinScan Tracker
Test Mode: ax80 5210MHz
Test Voltage: DC 3.636V
Note:

Polarization: **Horizontal**
Distance: 3m
Test Engineer: Felix

Temperature: 24 °C
Humidity: 56 %RH

Radiated Emission Measurement

Test Date: 2026/7/10 16:37:01

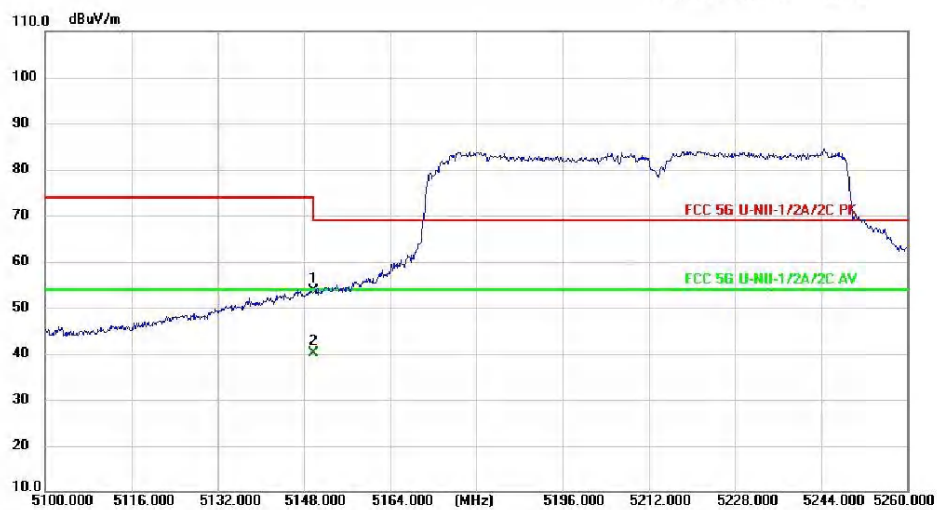

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5150.000	70.96	-17.45	53.51	68.82	-15.31	peak	150	41	P	
2 *	5150.000	57.60	-17.45	40.15	54.00	-13.85	AVG	150	41	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: EinScan Tracker
Test Mode: ax80 5210MHz
Test Voltage: DC 3.636V
Note:

Polarization: **Vertical**
Distance: 3m
Test Engineer: Felix

Temperature: 24 °C
Humidity: 56 %RH

Radiated Emission Measurement

Test Date: 2026/7/10 16:44:12

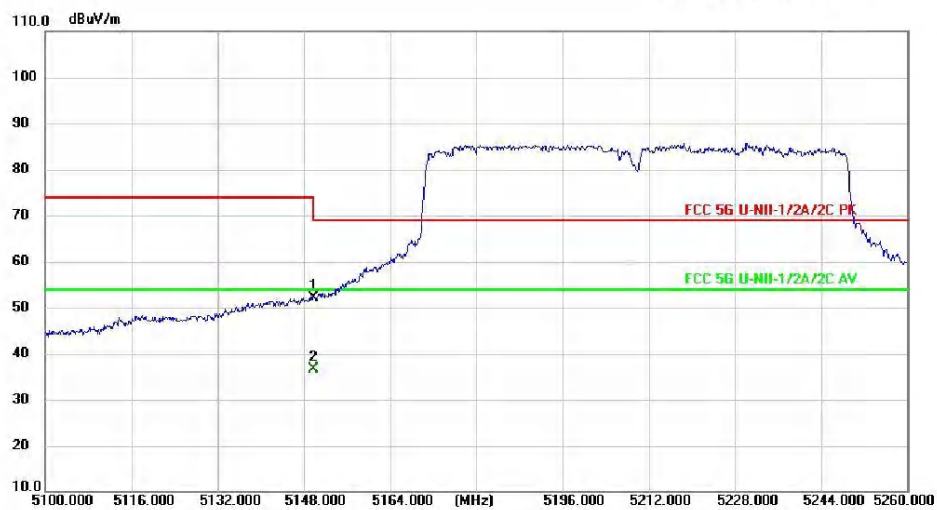

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5150.000	69.55	-17.45	52.10	68.82	-16.72	peak	150	216	P	
2	5150.000	54.03	-17.45	36.58	54.00	-17.42	AVG	150	216	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

U-NII-3 Band




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Horizontal	Temperature: 24 °C
EUT: 3D Scanner	Distance: 3m	Humidity: 56 %RH
M/N: EinScan Tracker	Test Engineer: Felix	
Test Mode: a 5745MHz		
Test Voltage: DC 3.636V		
Note:		

Radiated Emission Measurement

Test Date: 2026/7/10 14:05:11

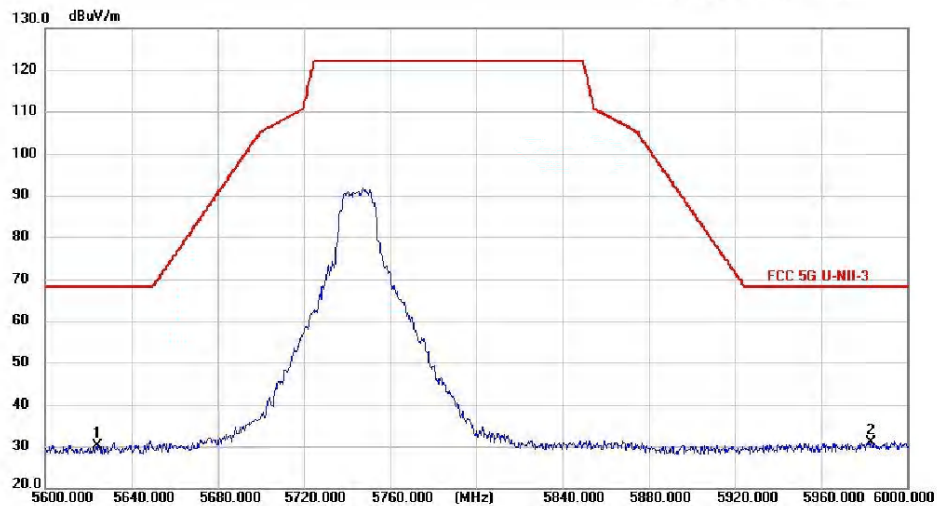

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5624.400	46.66	-16.36	30.30	68.20	-37.90	peak	150	206	P	
2 *	5983.400	46.66	-15.53	31.13	68.20	-37.07	peak	150	134	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: EinScan Tracker
Test Mode: a 5745MHz
Test Voltage: DC 3.636V
Note:

Polarization: **Vertical**
Distance: 3m
Test Engineer: Felix

Temperature: 24 °C
Humidity: 56 %RH

Radiated Emission Measurement

Test Date: 2026/7/10 14:11:23

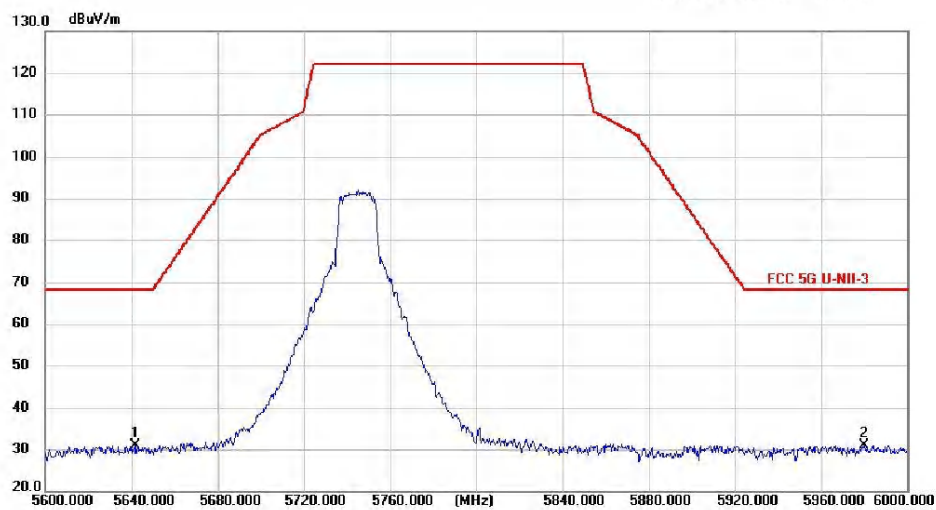

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5641.950	47.36	-16.33	31.03	68.20	-37.17	peak	150	168	P	
2 *	5980.000	46.66	-15.55	31.11	68.20	-37.09	peak	150	245	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: EinScan Tracker
Test Mode: a 5825MHz
Test Voltage: DC 3.636V
Note:

Polarization: **Vertical**
Distance: 3m
Test Engineer: Felix

Temperature: 24 °C
Humidity: 56 %RH

Radiated Emission Measurement

Test Date: 2026/7/10 14:16:28

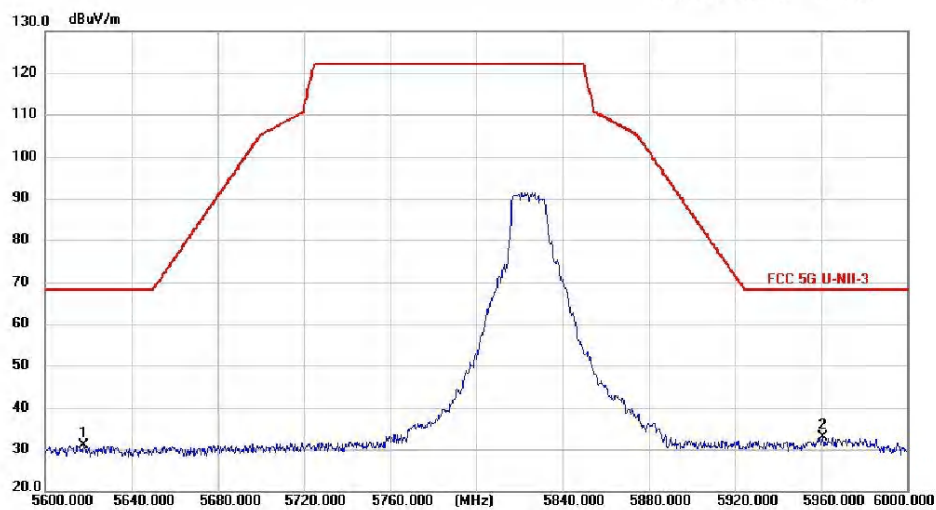

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5617.950	47.42	-16.38	31.04	68.20	-37.16	peak	150	165	P	
2 *	5960.800	48.55	-15.59	32.96	68.20	-35.24	peak	150	148	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

File: FCC 5\Data :#3

Page: 1

Engineer Signature:



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: EinScan Tracker
Test Mode: a 5825MHz
Test Voltage: DC 3.636V
Note:

Polarization: **Horizontal**
Distance: 3m
Test Engineer: Felix

Temperature: 24 °C
Humidity: 56 %RH

Radiated Emission Measurement

Test Date: 2026/7/10 14:21:52

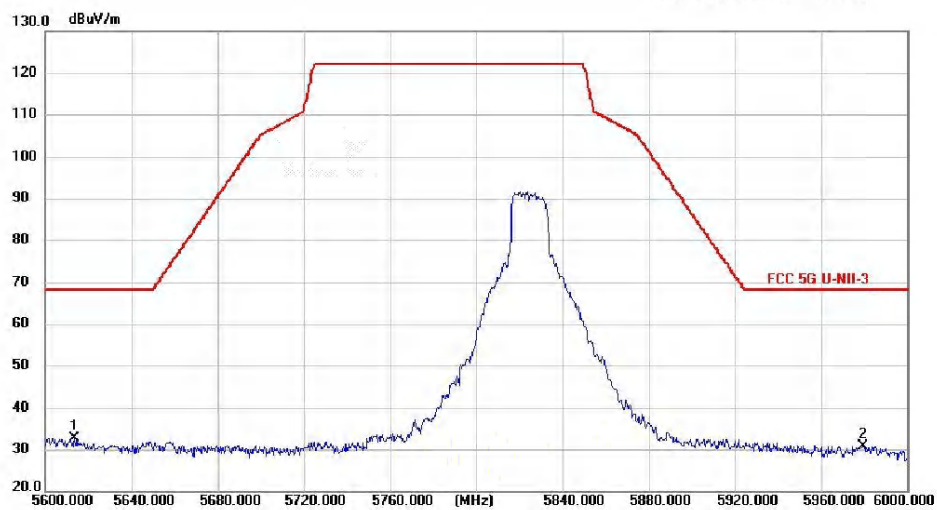

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5613.600	49.17	-16.39	32.78	68.20	-35.42	peak	150	306	P	
2	5979.600	46.47	-15.55	30.92	68.20	-37.28	peak	150	154	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

File: FCC 5\Data :#4

Page: 1

Engineer Signature:



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: EinScan Tracker
Test Mode: n20 5745MHz
Test Voltage: DC 3.636V
Note:

Polarization: **Horizontal**
Distance: 3m
Test Engineer: Felix

Temperature: 24 °C
Humidity: 56 %RH

Radiated Emission Measurement

Test Date: 2026/7/10 14:28:02

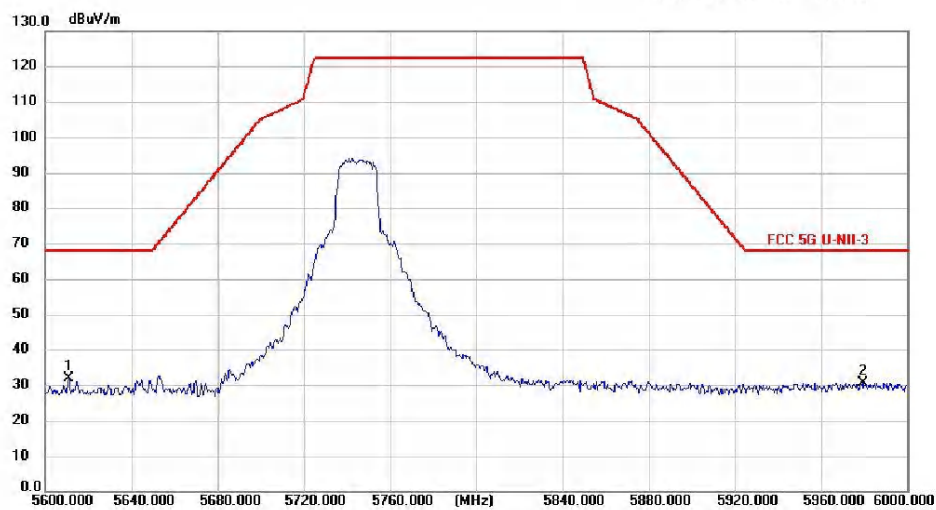

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5611.100	48.34	-16.40	31.94	68.20	-36.26	peak	150	311	P	
2	5979.550	46.35	-15.55	30.80	68.20	-37.40	peak	150	264	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: EinScan Tracker
Test Mode: n20 5745MHz
Test Voltage: DC 3.636V
Note:

Polarization: **Vertical**
Distance: 3m
Test Engineer: Felix

Temperature: 24 °C
Humidity: 56 %RH

Radiated Emission Measurement

Test Date: 2026/7/10 14:35:14

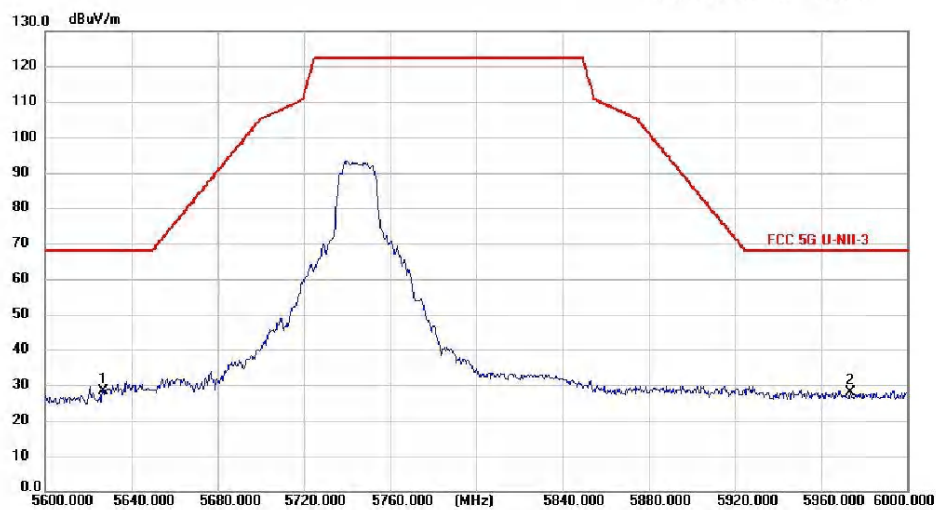

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5626.850	44.76	-16.36	28.40	68.20	-39.80	peak	150	308	P	
2	5973.950	43.61	-15.56	28.05	68.20	-40.15	peak	150	247	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

File: FCC 5\Data :#6

Page: 1

Engineer Signature:





Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: EinScan Tracker
Test Mode: n20 5825MHz
Test Voltage: DC 3.636V
Note:

Polarization: **Vertical**
Distance: 3m
Test Engineer: Felix

Temperature: 24 °C
Humidity: 56 %RH

Radiated Emission Measurement

Test Date: 2026/7/10 14:41:46

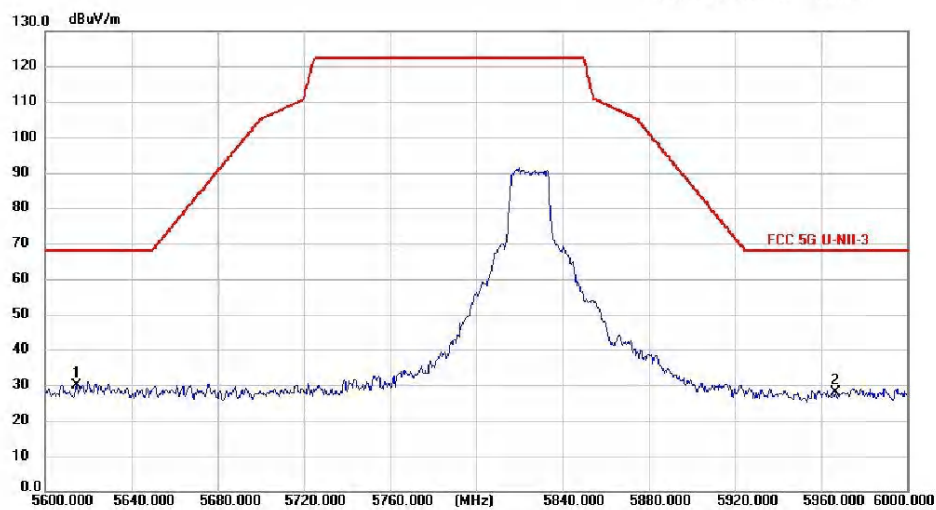

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5614.800	46.59	-16.39	30.20	68.20	-38.00	peak	150	147	P	
2	5966.800	43.65	-15.57	28.08	68.20	-40.12	peak	150	125	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

File: FCC 5\Data :#7

Page: 1

Engineer Signature:




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Horizontal	Temperature: 24 °C
EUT: 3D Scanner	Distance: 3m	Humidity: 56 %RH
M/N: EinScan Tracker	Test Engineer: Felix	
Test Mode: n20 5825MHz		
Test Voltage: DC 3.636V		
Note:		

Radiated Emission Measurement

Test Date: 2026/7/10 14:46:12

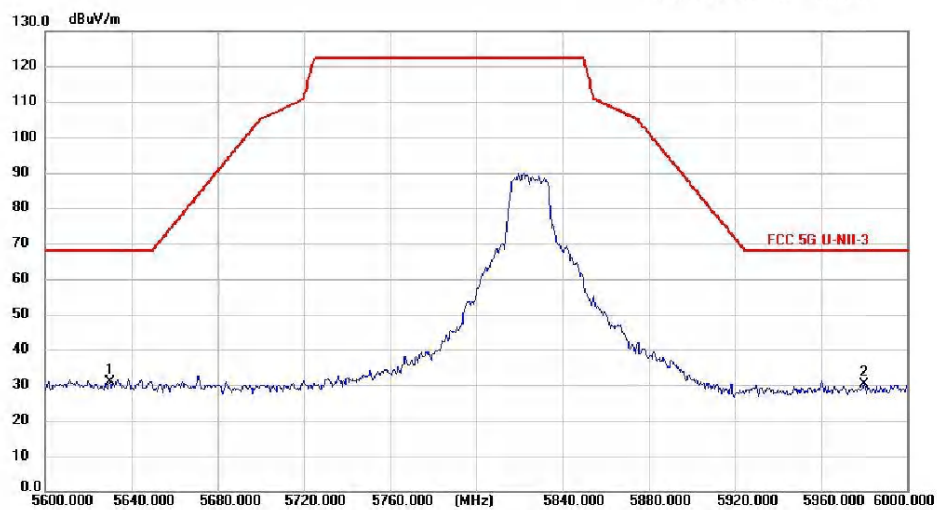

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5630.100	47.31	-16.35	30.96	68.20	-37.24	peak	150	355	P	
2	5980.250	45.92	-15.55	30.37	68.20	-37.83	peak	150	269	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: EinScan Tracker
Test Mode: n40 5755MHz
Test Voltage: DC 3.636V
Note:

Polarization: **Horizontal**
Distance: 3m
Test Engineer: Felix

Temperature: 24 °C
Humidity: 56 %RH

Radiated Emission Measurement

Test Date: 2026/7/10 14:50:32

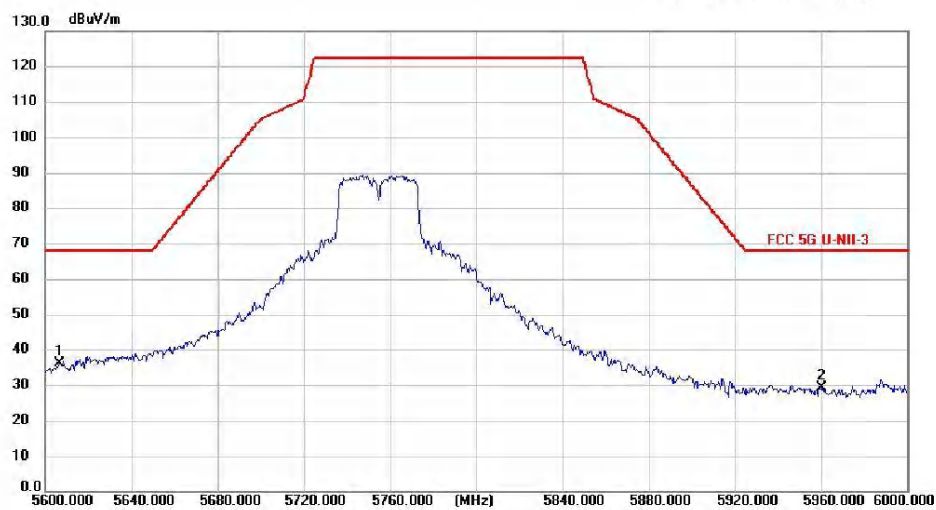

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5606.650	52.59	-16.41	36.18	68.20	-32.02	peak	150	179	P	
2	5960.700	44.87	-15.59	29.28	68.20	-38.92	peak	150	341	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Vertical	Temperature: 24 °C
EUT: 3D Scanner	Distance: 3m	Humidity: 56 %RH
M/N: EinScan Tracker	Test Engineer: Felix	
Test Mode: n40 5755MHz		
Test Voltage: DC 3.636V		
Note:		

Radiated Emission Measurement

Test Date: 2026/7/10 14:55:47



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5624.750	54.43	-16.36	38.07	68.20	-30.13	peak	150	211	P	
2	5955.400	46.29	-15.60	30.69	68.20	-37.51	peak	150	52	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: EinScan Tracker
Test Mode: n40 5795MHz
Test Voltage: DC 3.636V
Note:

Polarization: **Vertical**
Distance: 3m
Test Engineer: Felix

Temperature: 24 °C
Humidity: 56 %RH

Radiated Emission Measurement

Test Date: 2026/7/10 15:05:27

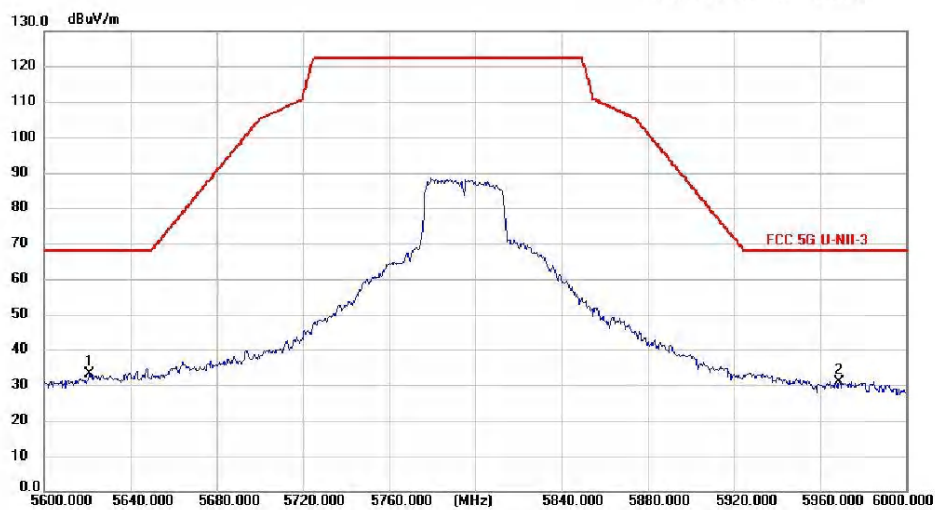

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5621.250	49.61	-16.37	33.24	68.20	-34.96	peak	150	316	P	
2	5969.050	46.58	-15.57	31.01	68.20	-37.19	peak	150	217	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: EinScan Tracker
Test Mode: n40 5795MHz
Test Voltage: DC 3.636V
Note:

Polarization: **Horizontal**
Distance: 3m
Test Engineer: Felix

Temperature: 24 °C
Humidity: 56 %RH

Radiated Emission Measurement

Test Date: 2026/7/10 15:13:62

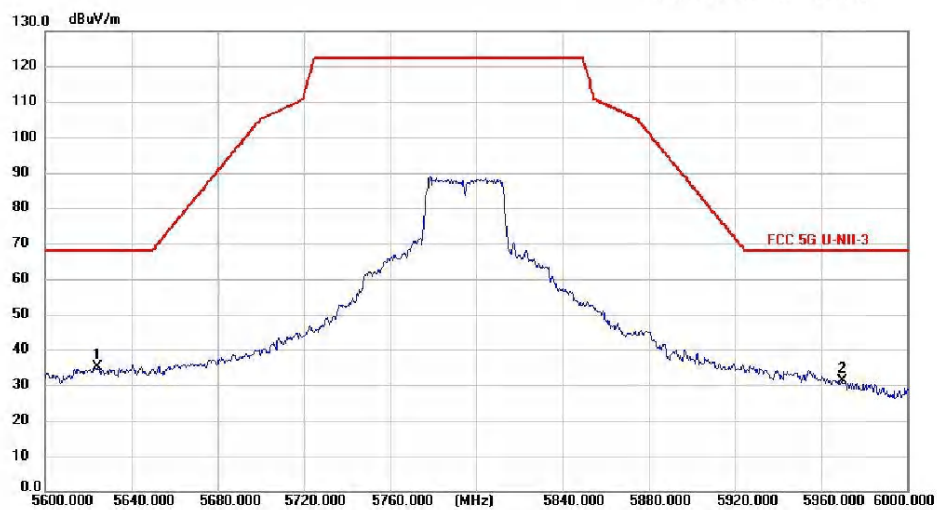

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5624.000	51.46	-16.36	35.10	68.20	-33.10	peak	150	114	P	
2	5970.000	46.86	-15.57	31.29	68.20	-36.91	peak	150	121	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: EinScan Tracker
Test Mode: ax80 5775MHz
Test Voltage: DC 3.636V
Note:

Polarization: **Horizontal**
Distance: 3m
Test Engineer: Felix

Temperature: 24 °C
Humidity: 56 %RH

Radiated Emission Measurement

Test Date: 2026/7/10 15:20:04

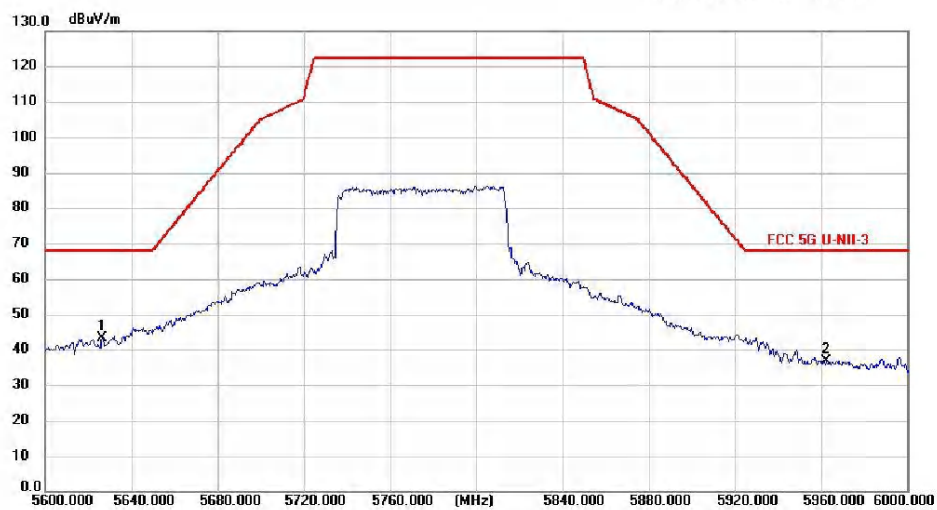

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5626.650	59.87	-16.36	43.51	68.20	-24.69	peak	150	62	P	
2	5962.750	52.53	-15.59	36.94	68.20	-31.26	peak	150	158	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: EinScan Tracker
Test Mode: ax80 5775MHz
Test Voltage: DC 3.636V
Note:

Polarization: **Vertical**
Distance: 3m
Test Engineer: Felix

Temperature: 24 °C
Humidity: 56 %RH

Radiated Emission Measurement

Test Date: 2026/7/10 15:26:44

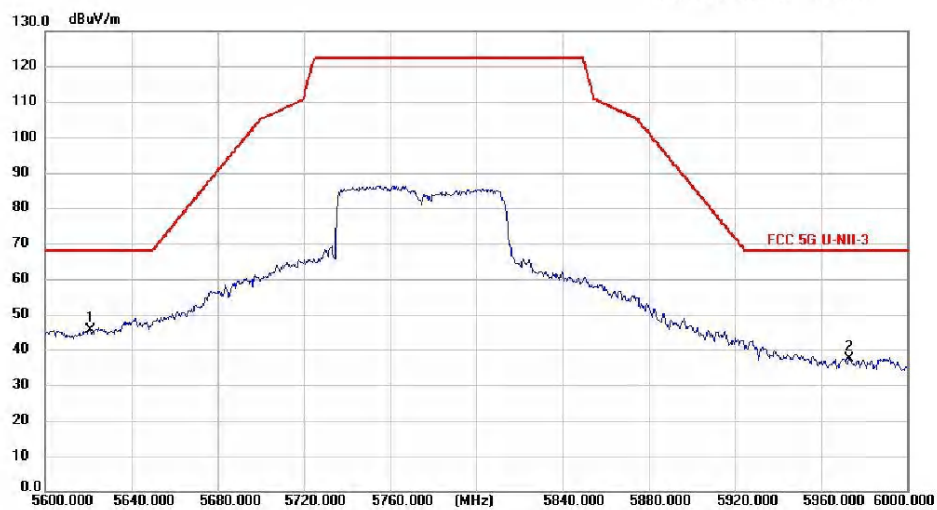

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5621.550	62.05	-16.36	45.69	68.20	-22.51	peak	150	256	P	
2	5973.150	53.14	-15.56	37.58	68.20	-30.62	peak	150	226	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix A.8: Test Results of Conducted Emission on AC Mains




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-Shielded Room Phase: **N** Temperature: 26 °C
EUT: 3D Scanner Humidity: 54 %RH
M/N: EinScan Tracker Test Engineer: Felix
Test Mode: 5G WiFi
Test Voltage: AC 120V/60Hz
Note:

Conducted Emission Measurement

Test Date: 2026/5/20 10:59:57

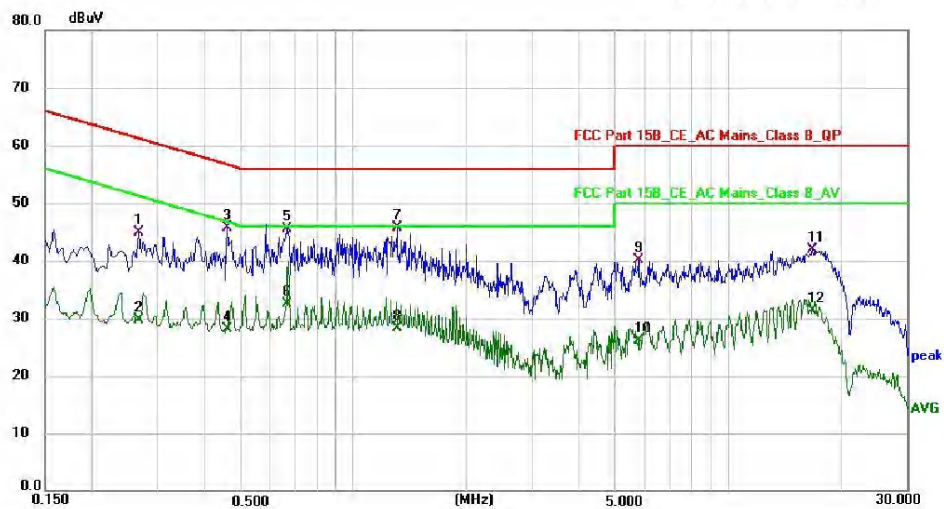

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2660	35.59	9.40	44.99	61.24	-16.25	QP	P	
2	0.2660	20.23	9.40	29.63	51.24	-21.61	AVG	P	
3	0.4580	36.12	9.57	45.69	56.73	-11.04	QP	P	
4	0.4580	18.51	9.57	28.08	46.73	-18.65	AVG	P	
5	0.6620	35.55	9.86	45.41	56.00	-10.59	QP	P	
6	0.6620	22.58	9.86	32.44	46.00	-13.56	AVG	P	
7 *	1.3060	36.11	9.54	45.65	56.00	-10.35	QP	P	
8	1.3060	18.76	9.54	28.30	46.00	-17.70	AVG	P	
9	5.7460	30.39	9.70	40.09	60.00	-19.91	QP	P	
10	5.7460	16.50	9.70	26.20	50.00	-23.80	AVG	P	
11	16.8060	32.43	9.43	41.86	60.00	-18.14	QP	P	
12	16.8060	21.89	9.43	31.32	50.00	-18.68	AVG	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

File: CE\Data :#15

Page: 1

Engineer Signature:



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-Shielded Room

Phase: **L1**

Temperature: 26 °C

EUT: 3D Scanner

Humidity: 54 %RH

M/N: EinScan Tracker

Test Engineer: Felix


Test Mode: 5G WiFi

Test Voltage: AC 120V/60Hz

Note:

Conducted Emission Measurement

Test Date: 2026/5/20 11:06:06

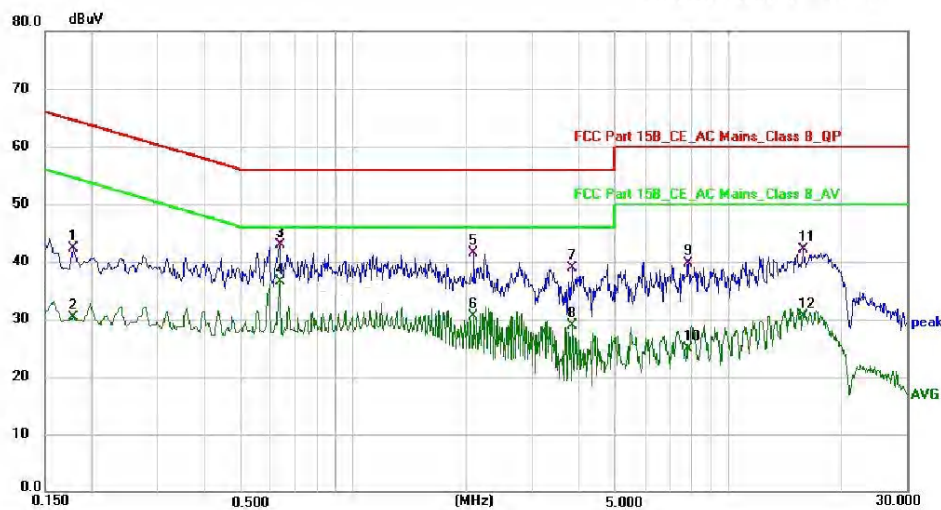

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1780	32.83	9.53	42.36	64.58	-22.22	QP	P	
2	0.1780	20.68	9.53	30.21	54.58	-24.37	AVG	P	
3	0.6340	33.41	9.50	42.91	56.00	-13.09	QP	P	
4 *	0.6340	27.06	9.50	36.56	46.00	-9.44	AVG	P	
5	2.0980	31.54	9.90	41.44	56.00	-14.56	QP	P	
6	2.0980	20.64	9.90	30.54	46.00	-15.46	AVG	P	
7	3.8300	29.01	9.82	38.83	56.00	-17.17	QP	P	
8	3.8300	19.02	9.82	28.84	46.00	-17.16	AVG	P	
9	7.8300	30.05	9.74	39.79	60.00	-20.21	QP	P	
10	7.8300	15.07	9.74	24.81	50.00	-25.19	AVG	P	
11	15.8180	32.34	9.77	42.11	60.00	-17.89	QP	P	
12	15.8180	20.69	9.77	30.46	50.00	-19.54	AVG	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

File: CE\Data :#16

Page: 1

Engineer Signature: