




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 24 °C
EUT: Laser 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: FreeScan TE31W Test Engineer: Felix
Test Mode: ac20 5825MHz
Test Voltage: AC 120V/60Hz
Note:

Radiated Emission Measurement

Test Date: 2026/3/21 11:55:25

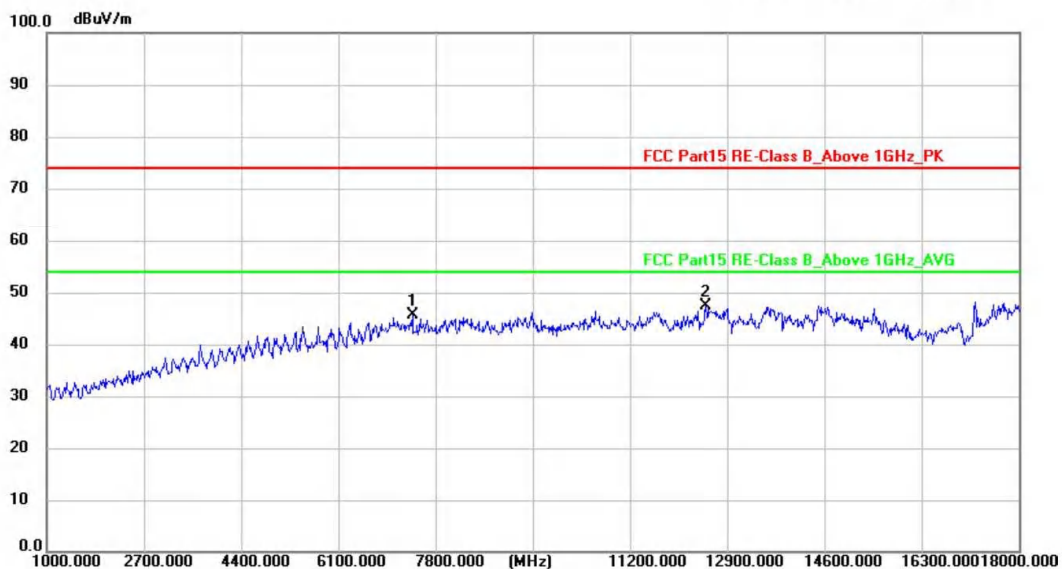

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	7394.125	56.80	-11.09	45.71	74.00	-28.29	peak	150	111	P	
2 *	12532.375	55.38	-8.09	47.29	74.00	-26.71	peak	150	126	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 24 °C
EUT: Laser 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: FreeScan TE31W Test Engineer: Felix
Test Mode: ax20 5745MHz
Test Voltage: AC 120V/60Hz
Note:

Radiated Emission Measurement

Test Date: 2026/3/21 12:00:43

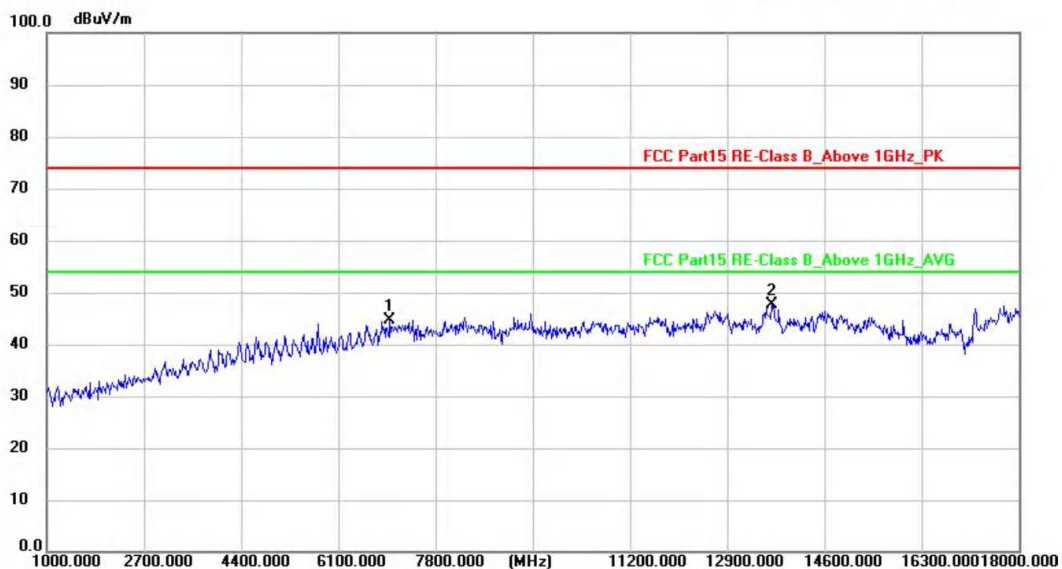

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	7001.000	56.04	-11.36	44.68	74.00	-29.32	peak	150	9	P	
2 *	13696.875	54.65	-7.12	47.53	74.00	-26.47	peak	150	155	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 24 °C
EUT: Laser 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: FreeScan TE31W Test Engineer: Felix
Test Mode: ax20 5745MHz
Test Voltage: AC 120V/60Hz
Note:

Radiated Emission Measurement

Test Date: 2026/3/21 12:06:55

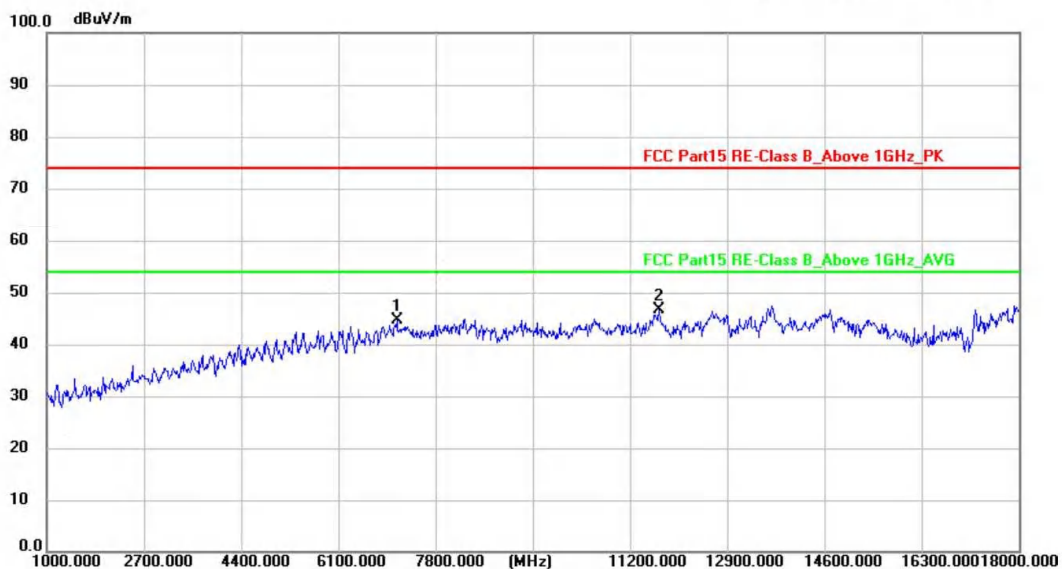

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	7120.000	55.87	-11.27	44.60	74.00	-29.40	peak	150	22	P	
2 *	11716.375	55.32	-8.72	46.60	74.00	-27.40	peak	150	154	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 24 °C
EUT: Laser 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: FreeScan TE31W Test Engineer: Felix
Test Mode: ax20 5785MHz
Test Voltage: AC 120V/60Hz
Note:

Radiated Emission Measurement

Test Date: 2026/3/21 12:12:06

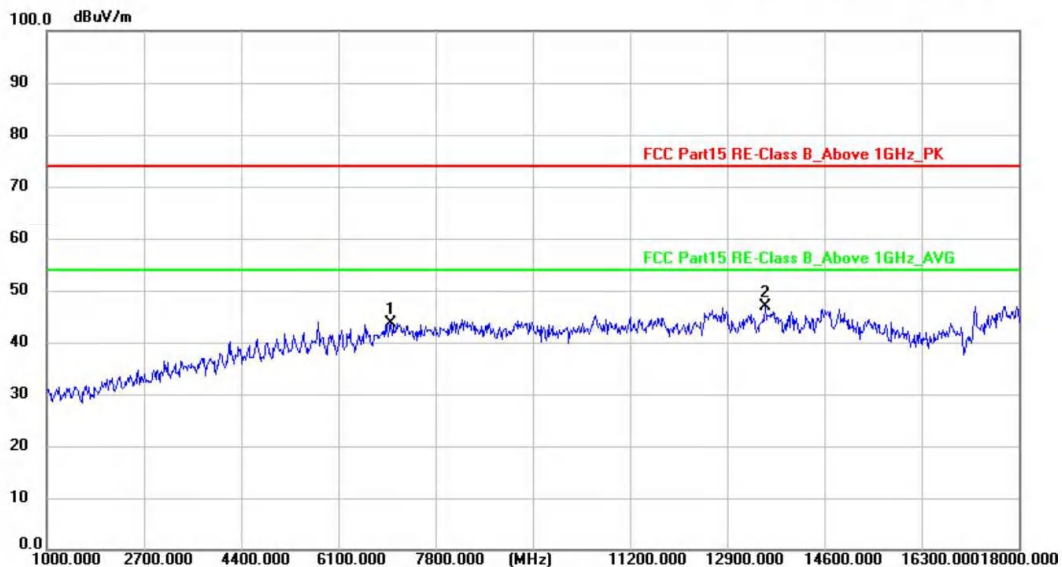

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	7030.750	55.09	-11.34	43.75	74.00	-30.25	peak	150	144	P	
2 *	13571.500	53.99	-7.21	46.78	74.00	-27.22	peak	150	4	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 24 °C
EUT: Laser 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: FreeScan TE31W Test Engineer: Felix
Test Mode: ax20 5785MHz
Test Voltage: AC 120V/60Hz
Note:

Radiated Emission Measurement

Test Date: 2026/3/21 12:18:17

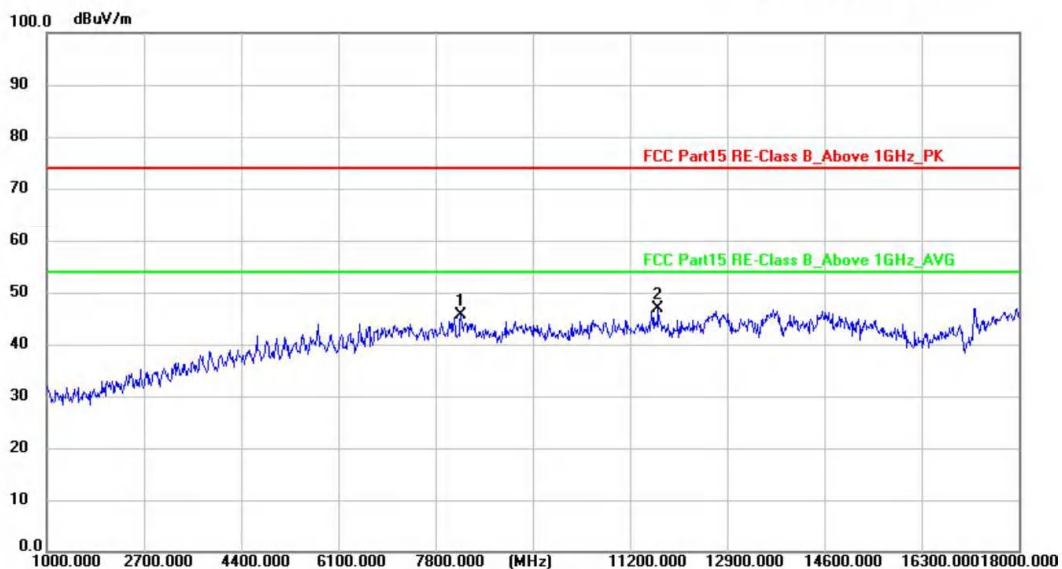

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	8248.375	56.12	-10.59	45.53	74.00	-28.47	peak	150	144	P	
2 *	11699.375	55.54	-8.73	46.81	74.00	-27.19	peak	150	124	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 24 °C
EUT: Laser 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: FreeScan TE31W Test Engineer: Felix
Test Mode: ax20 5825MHz
Test Voltage: AC 120V/60Hz
Note:

Radiated Emission Measurement

Test Date: 2026/3/21 12:24:29

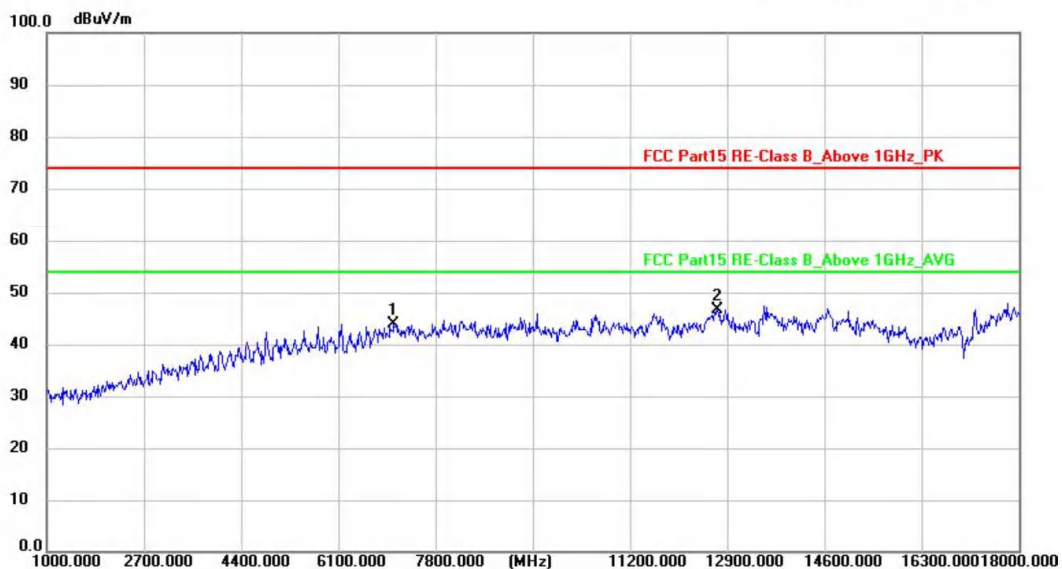

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	7073.250	55.12	-11.31	43.81	74.00	-30.19	peak	150	224	P	
2 *	12734.250	54.64	-7.89	46.75	74.00	-27.25	peak	150	155	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Vertical	Temperature: 24 °C
EUT: Laser 3D Scanner	Distance: 3m	Humidity: 56 %RH
M/N: FreeScan TE31W	Test Engineer: Felix	
Test Mode: ax20 5825MHz		
Test Voltage: AC 120V/60Hz		
Note:		

Radiated Emission Measurement

Test Date: 2026/3/21 12:30:40

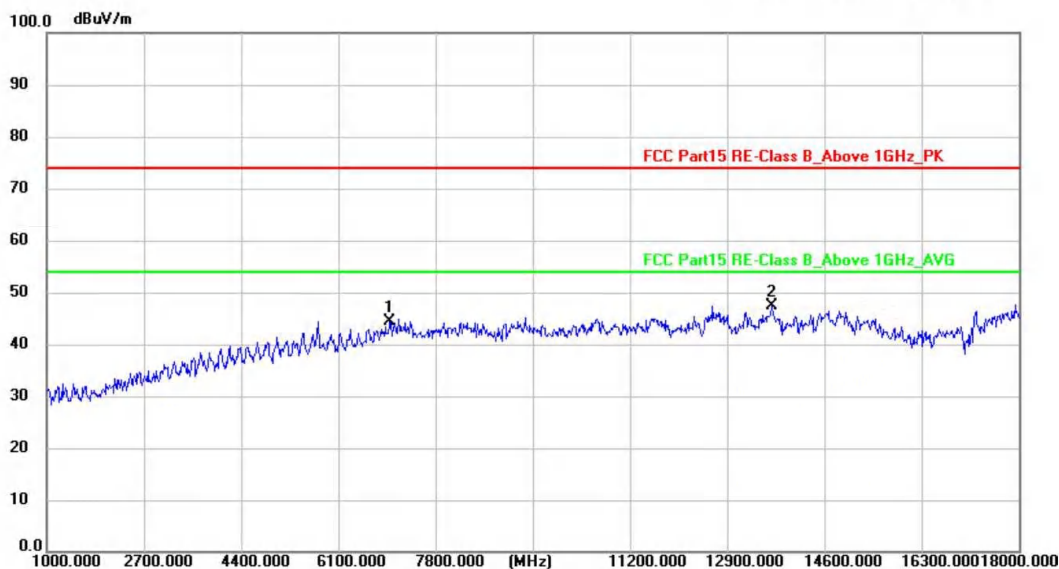

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	7005.250	55.67	-11.36	44.31	74.00	-29.69	peak	150	203	P	
2 *	13682.000	54.39	-7.12	47.27	74.00	-26.73	peak	150	159	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 24 °C
EUT: Laser 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: FreeScan TE31W Test Engineer: Felix
Test Mode: ax40 5755MHz
Test Voltage: AC 120V/60Hz
Note:

Radiated Emission Measurement

Test Date: 2026/3/21 12:35:55

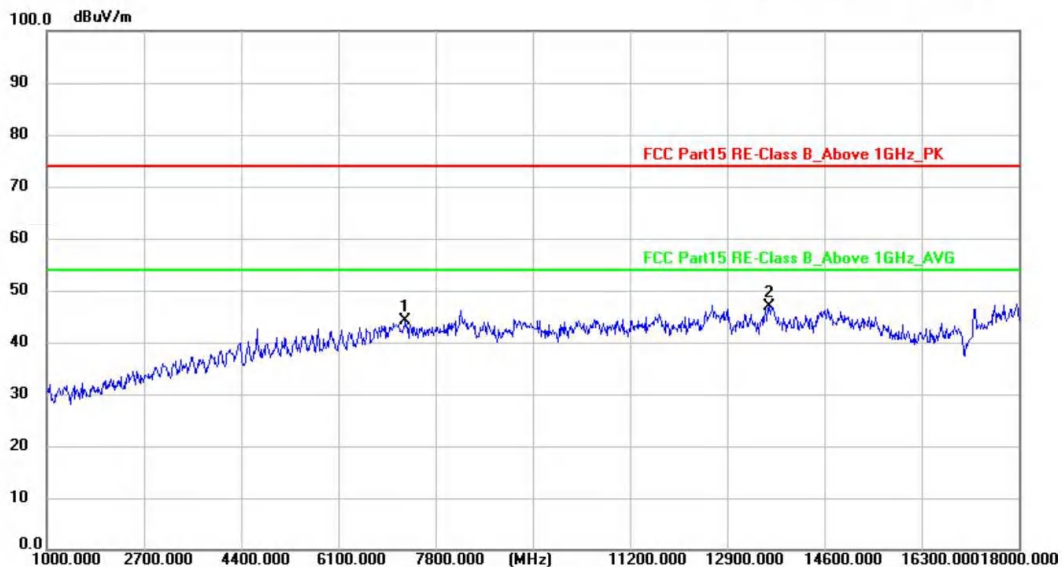

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	7281.500	55.33	-11.17	44.16	74.00	-29.84	peak	150	200	P	
2 *	13633.125	54.02	-7.16	46.86	74.00	-27.14	peak	150	280	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 24 °C
EUT: Laser 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: FreeScan TE31W Test Engineer: Felix
Test Mode: ax40 5755MHz
Test Voltage: AC 120V/60Hz
Note:

Radiated Emission Measurement

Test Date: 2026/3/21 12:41:07

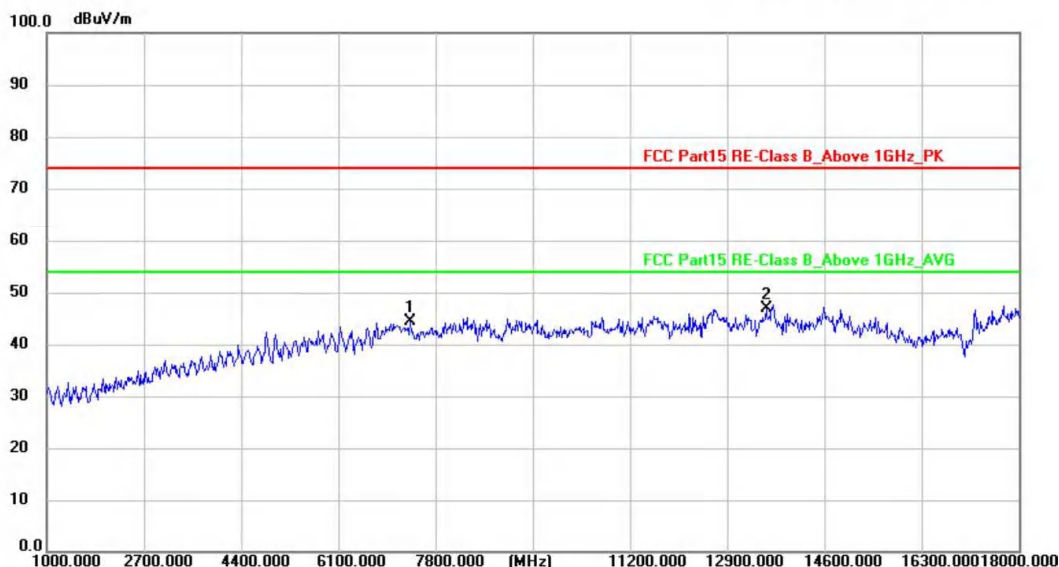

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	7364.375	55.38	-11.10	44.28	74.00	-29.72	peak	150	73	P	
2 *	13586.375	53.98	-7.20	46.78	74.00	-27.22	peak	150	290	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 24 °C
EUT: Laser 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: FreeScan TE31W Test Engineer: Felix
Test Mode: ax40 5795MHz
Test Voltage: AC 120V/60Hz
Note:

Radiated Emission Measurement

Test Date: 2026/3/21 12:46:17

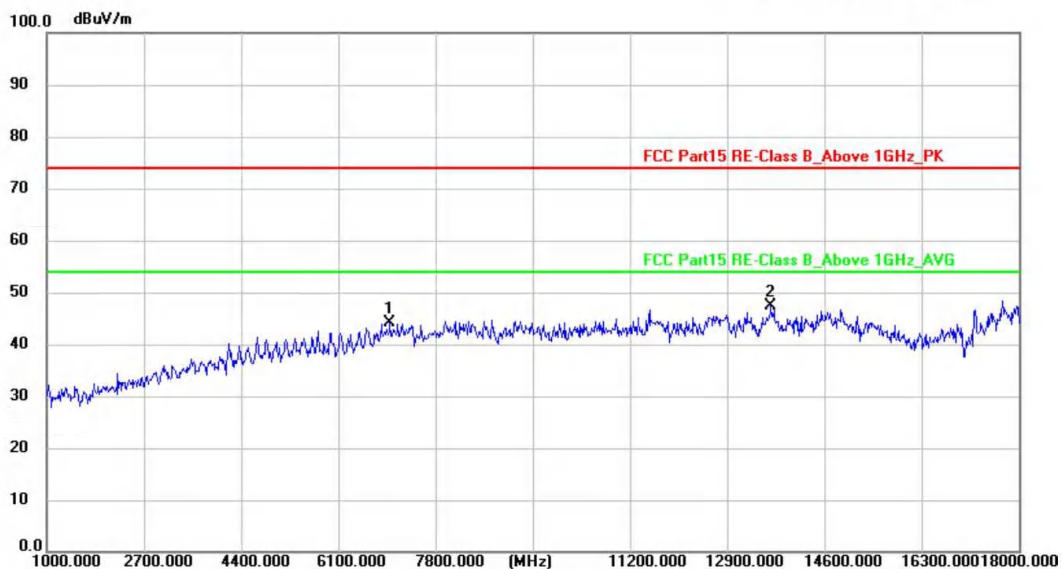

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	7015.875	55.42	-11.36	44.06	74.00	-29.94	peak	150	124	P	
2 *	13677.750	54.61	-7.13	47.48	74.00	-26.52	peak	150	96	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
 1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
 Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Vertical	Temperature: 24 °C
EUT: Laser 3D Scanner	Distance: 3m	Humidity: 56 %RH
M/N: FreeScan TE31W	Test Engineer: Felix	
Test Mode: ax40 5795MHz		
Test Voltage: AC 120V/60Hz		
Note:		

Radiated Emission Measurement

Test Date: 2026/3/21 12:52:28

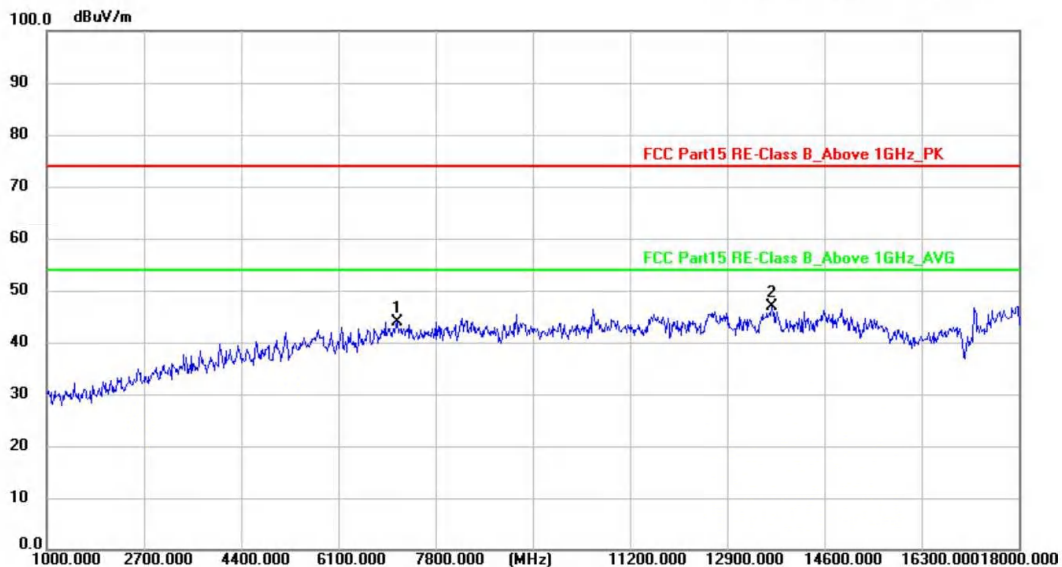

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	7132.750	55.27	-11.27	44.00	74.00	-30.00	peak	150	44	P	
2 *	13688.375	53.99	-7.12	46.87	74.00	-27.13	peak	150	12	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 24 °C
EUT: Laser 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: FreeScan TE31W Test Engineer: Felix
Test Mode: n40 5755MHz
Test Voltage: AC 120V/60Hz
Note:

Radiated Emission Measurement

Test Date: 2026/3/21 12:58:38

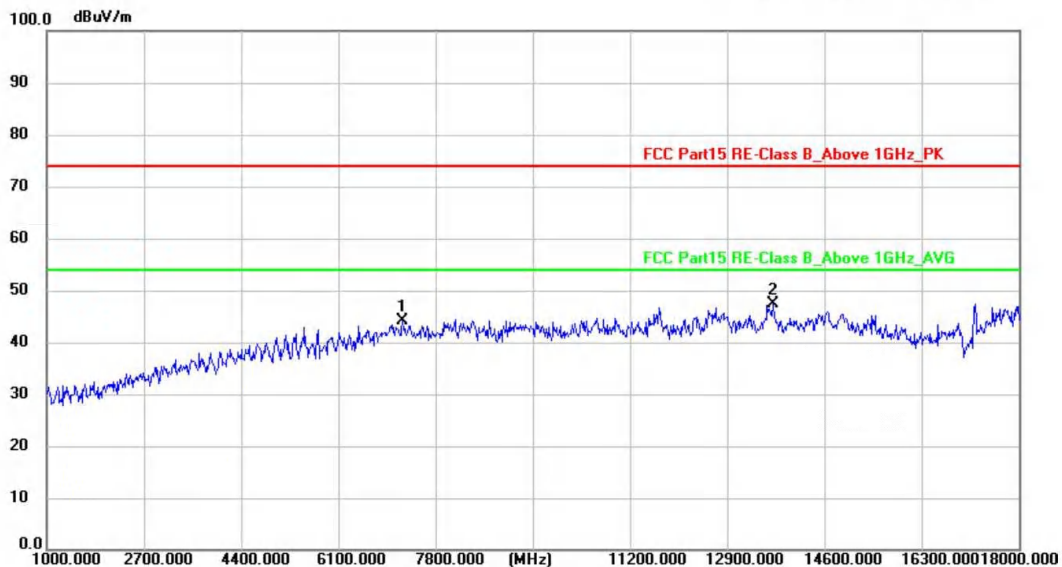

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	7236.875	55.24	-11.20	44.04	74.00	-29.96	peak	150	124	P	
2 *	13699.000	54.39	-7.12	47.27	74.00	-26.73	peak	150	245	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
 1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
 Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Vertical	Temperature: 24 °C
EUT: Laser 3D Scanner	Distance: 3m	Humidity: 56 %RH
M/N: FreeScan TE31W	Test Engineer: Felix	
Test Mode: n40 5755MHz		
Test Voltage: AC 120V/60Hz		
Note:		

Radiated Emission Measurement

Test Date: 2026/3/21 13:03:49

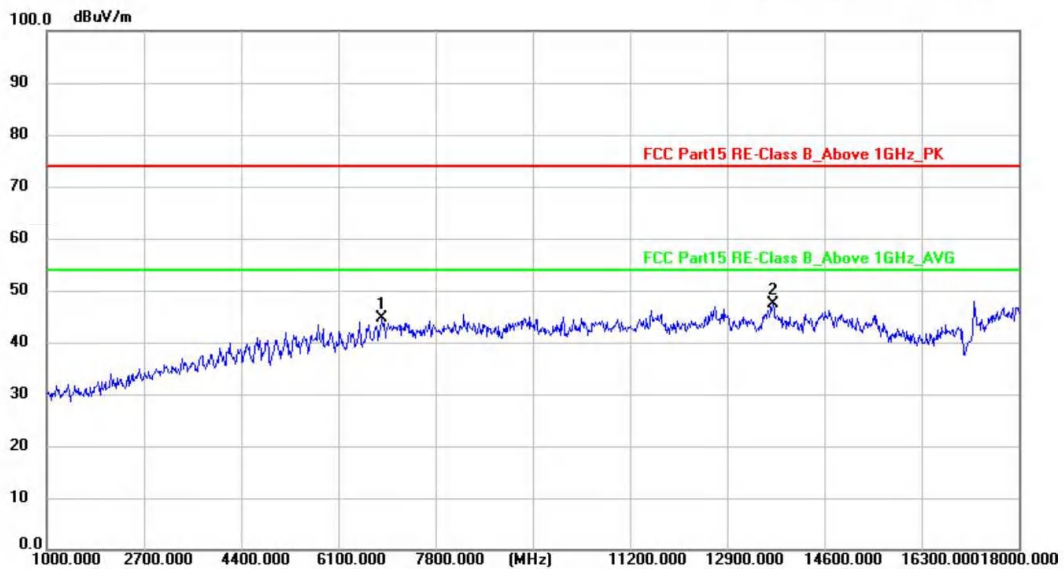

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	6879.875	56.17	-11.64	44.53	74.00	-29.47	peak	150	351	P	
2 *	13711.750	54.37	-7.11	47.26	74.00	-26.74	peak	150	12	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 24 °C
EUT: Laser 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: FreeScan TE31W Test Engineer: Felix
Test Mode: n40 5795MHz
Test Voltage: AC 120V/60Hz
Note:

Radiated Emission Measurement

Test Date: 2026/3/21 13:09:59

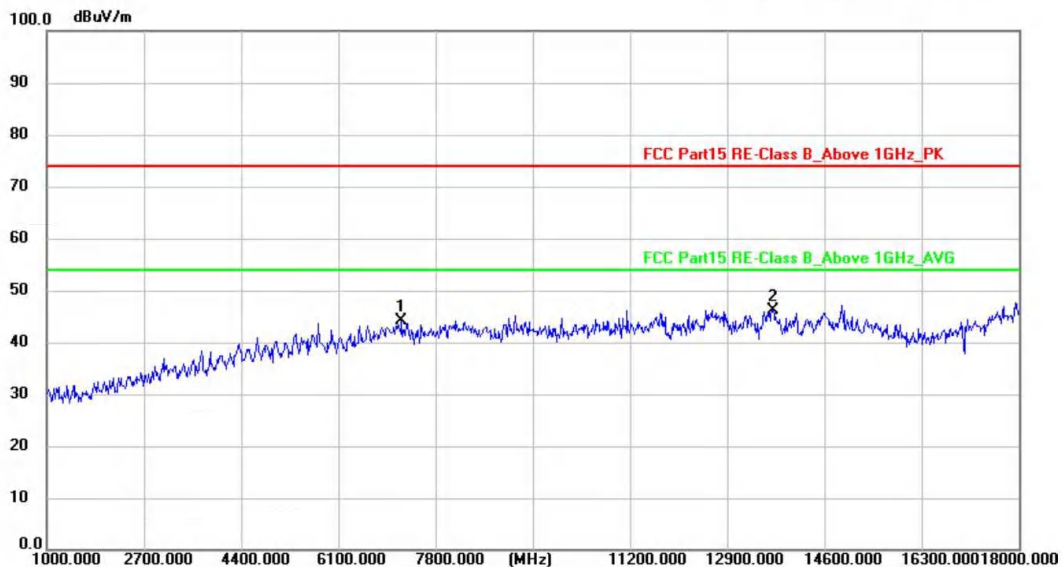

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	7217.750	55.30	-11.20	44.10	74.00	-29.90	peak	150	115	P	
2 *	13713.875	53.36	-7.11	46.25	74.00	-27.75	peak	150	251	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 24 °C
EUT: Laser 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: FreeScan TE31W Test Engineer: Felix
Test Mode: n40 5795MHz
Test Voltage: AC 120V/60Hz
Note:

Radiated Emission Measurement

Test Date: 2026/3/21 13:15:09

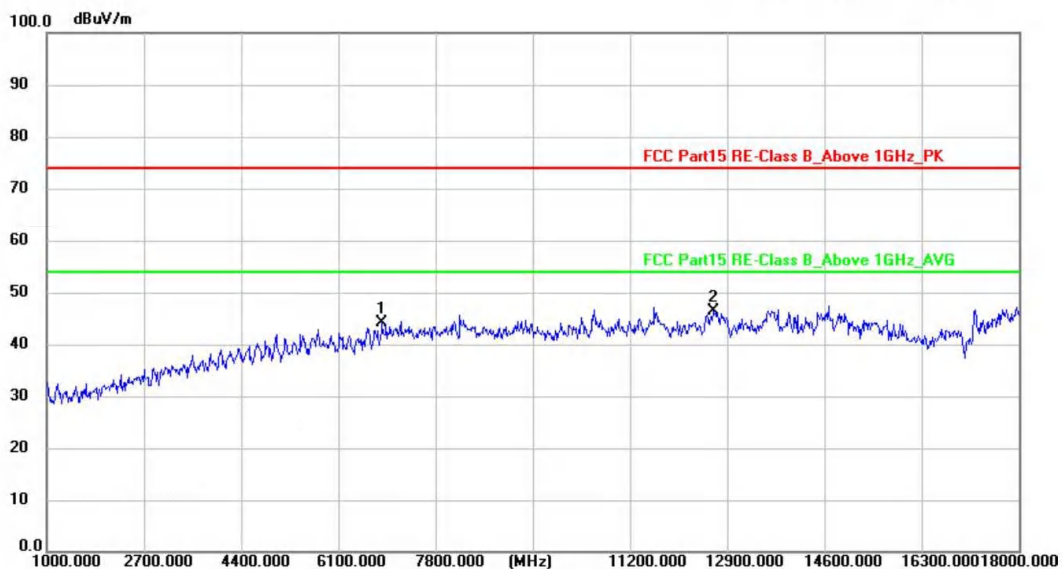

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	6879.875	55.81	-11.64	44.17	74.00	-29.83	peak	150	124	P	
2 *	12674.750	54.25	-7.95	46.30	74.00	-27.70	peak	150	24	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 24 °C
EUT: Laser 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: FreeScan TE31W Test Engineer: Felix
Test Mode: ax80 5775MHz
Test Voltage: AC 120V/60Hz
Note:

Radiated Emission Measurement

Test Date: 2026/3/21 13:20:18

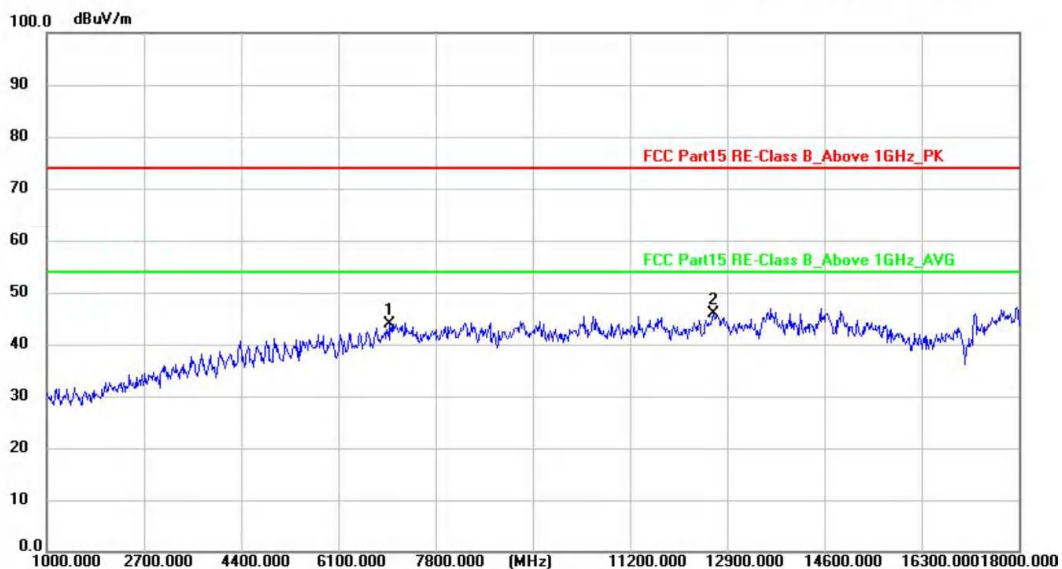

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	7013.750	55.24	-11.36	43.88	74.00	-30.12	peak	150	12	P	
2 *	12672.625	53.87	-7.95	45.92	74.00	-28.08	peak	150	45	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 24 °C
EUT: Laser 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: FreeScan TE31W Test Engineer: Felix
Test Mode: ax80 5775MHz
Test Voltage: AC 120V/60Hz
Note:

Radiated Emission Measurement

Test Date: 2026/3/21 13:25:29

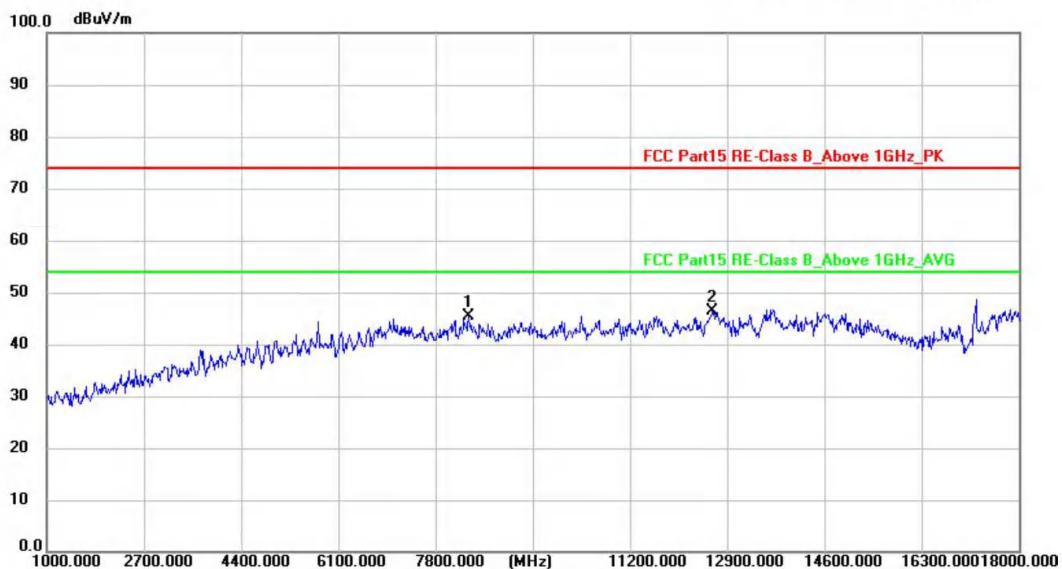

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	8380.125	55.88	-10.56	45.32	74.00	-28.68	peak	150	35	P	
2 *	12655.625	54.28	-7.96	46.32	74.00	-27.68	peak	150	1	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 24 °C
EUT: Laser 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: FreeScan TE31W Test Engineer: Felix
Test Mode: a 5745MHz
Test Voltage: AC 120V/60Hz
Note:

Radiated Emission Measurement

Test Date: 2026/3/19 9:50:10

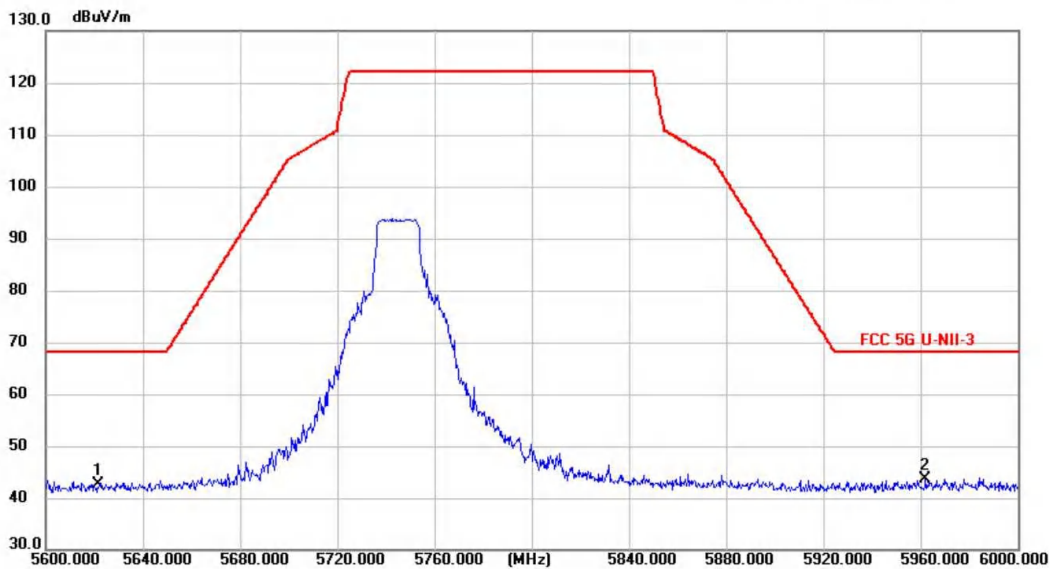

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5622.000	57.14	-14.50	42.64	68.20	-25.56	peak	150	153	P	
2 *	5962.150	57.28	-13.77	43.51	68.20	-24.69	peak	150	335	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 24 °C
EUT: Laser 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: FreeScan TE31W Test Engineer: Felix
Test Mode: a 5745MHz
Test Voltage: AC 120V/60Hz
Note:

Radiated Emission Measurement

Test Date: 2026/3/19 9:56:13

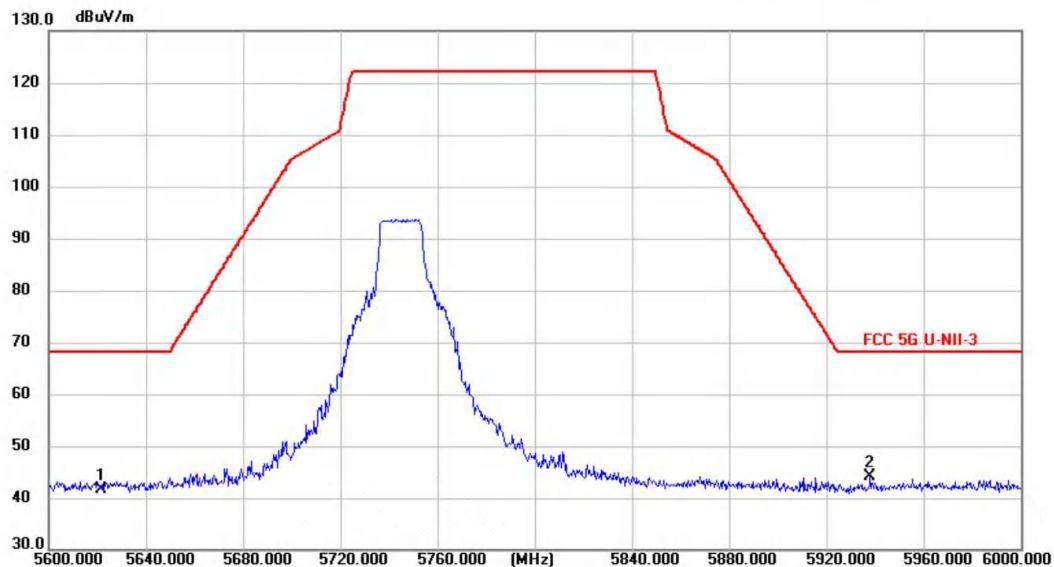

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5622.000	56.23	-14.50	41.73	68.20	-26.47	peak	150	155	P	
2 *	5938.100	57.95	-13.82	44.13	68.20	-24.07	peak	150	251	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 24 °C
EUT: Laser 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: FreeScan TE31W Test Engineer: Felix
Test Mode: a 5825MHz
Test Voltage: AC 120V/60Hz
Note:

Radiated Emission Measurement

Test Date: 2026/3/19 10:02:04

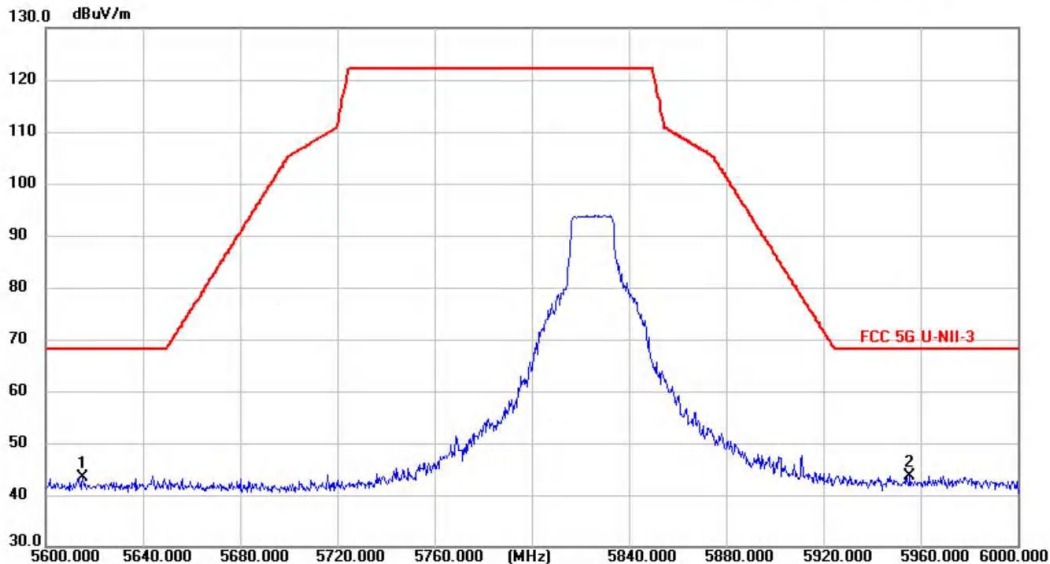

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5615.250	57.79	-14.50	43.29	68.20	-24.91	peak	150	33	P	
2 *	5955.600	57.44	-13.78	43.66	68.20	-24.54	peak	150	267	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit