




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Horizontal	Temperature: 26 °C
EUT: Laser 3D Scanner	Distance: 3m	Humidity: 54 %RH
M/N: FreeTrak WT	Test Engineer: Felix	
Test Mode: 1Mbps 2402MHz		
Test Voltage: AC 120V/60Hz		
Note:		

Radiated Emission Measurement

Test Date: 2026/3/13 10:08:02

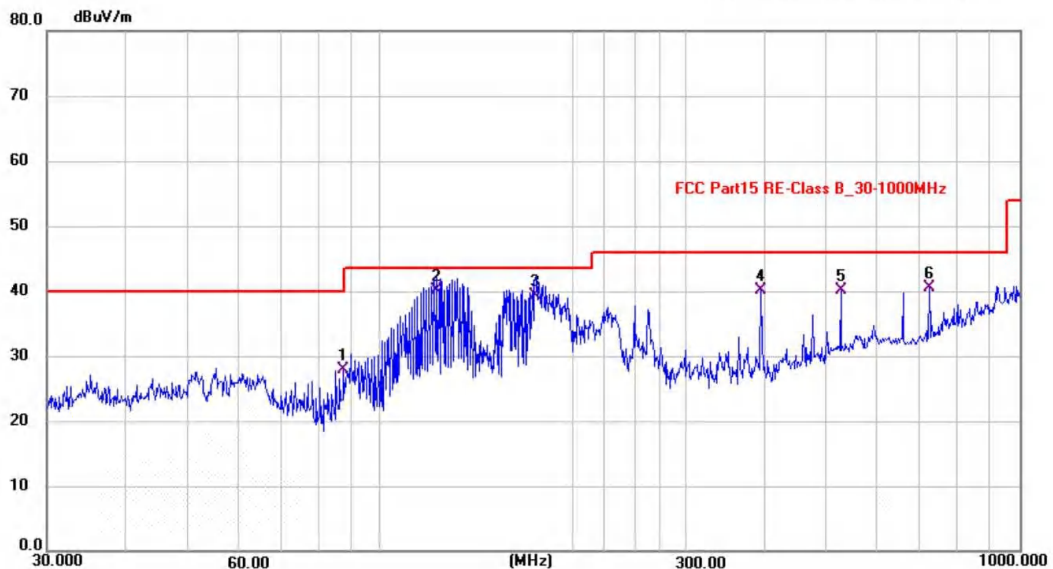

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	87.5710	17.68	10.19	27.87	40.00	-12.13	QP	100	245	P	
2 *	122.5650	26.72	13.33	40.05	43.50	-3.45	QP	100	154	P	
3	175.0365	25.63	13.59	39.22	43.50	-4.28	QP	100	237	P	
4	394.3355	22.67	17.44	40.11	46.00	-5.89	QP	100	224	P	
5	525.7050	19.65	20.45	40.10	46.00	-5.90	QP	100	124	P	
6	722.9923	16.41	24.15	40.56	46.00	-5.44	QP	100	14	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Vertical	Temperature: 26 °C
EUT: Laser 3D Scanner	Distance: 3m	Humidity: 54 %RH
M/N: FreeTrak WT	Test Engineer: Felix	
Test Mode: 1Mbps 2402MHz		
Test Voltage: AC 120V/60Hz		
Note:		

Radiated Emission Measurement

Test Date: 2026/3/13 10:02:39

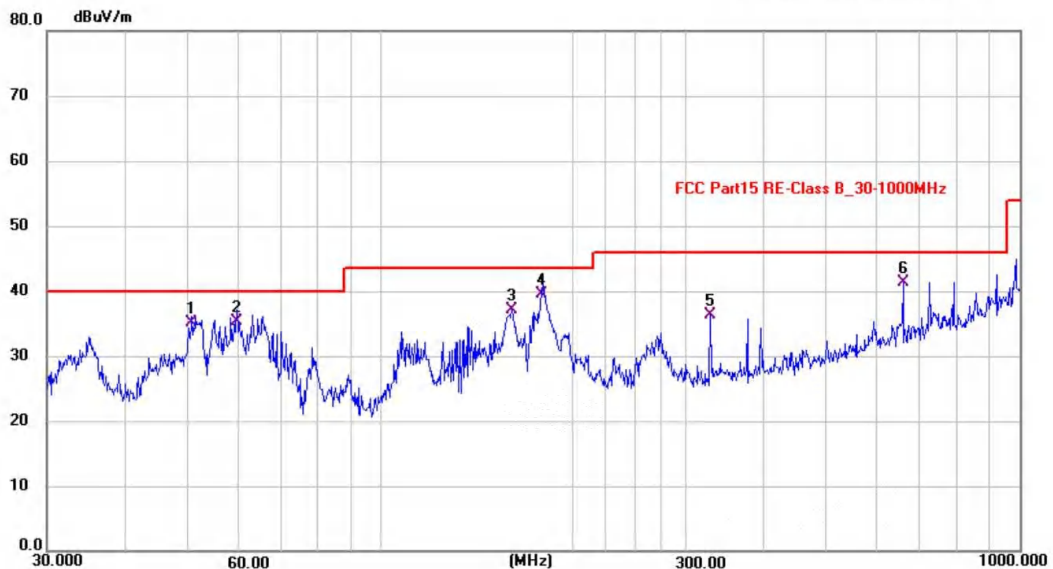

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	50.6747	21.40	13.71	35.11	40.00	-4.89	QP	100	34	P	
2	59.4666	21.94	13.28	35.22	40.00	-4.78	QP	100	215	P	
3	160.5566	21.97	15.12	37.09	43.50	-6.41	QP	100	126	P	
4 *	179.7799	26.58	12.90	39.48	43.50	-4.02	QP	100	122	P	
5	328.6066	20.29	15.98	36.27	46.00	-9.73	QP	100	111	P	
6	657.3938	18.11	23.11	41.22	46.00	-4.78	QP	100	188	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Above 1GHz

Note: The highest waveform in the figure is 2.4GHz SRD Fundamental.




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Horizontal	Temperature: 26 °C
EUT: Laser 3D Scanner	Distance: 3m	Humidity: 54 %RH
M/N: FreeTrak WT	Test Engineer: Felix	
Test Mode: 1Mbps 2402MHz		
Test Voltage: AC 120V/60Hz		
Note:		

Radiated Emission Measurement

Test Date: 2026/3/13 8:43:17

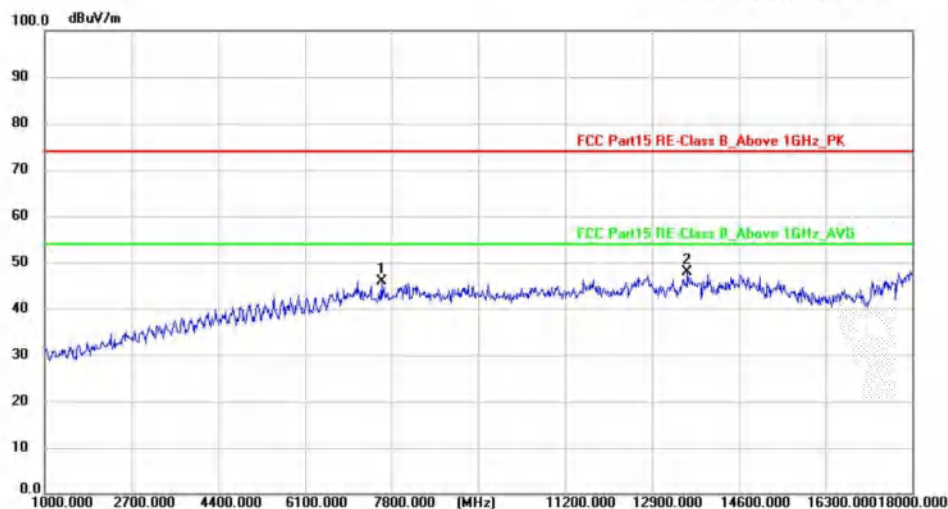

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	7602.375	56.81	-10.94	45.87	74.00	-28.13	peak	150	35	P	
2 *	13603.375	55.10	-7.19	47.91	74.00	-26.09	peak	150	225	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Horizontal	Temperature: 26 °C
EUT: Laser 3D Scanner	Distance: 3m	Humidity: 54 %RH
M/N: FreeTrak WT	Test Engineer: Felix	
Test Mode: 1Mbps 2440MHz		
Test Voltage: AC 120V/60Hz		
Note:		

Radiated Emission Measurement

Test Date: 2026/3/13 8:49:51

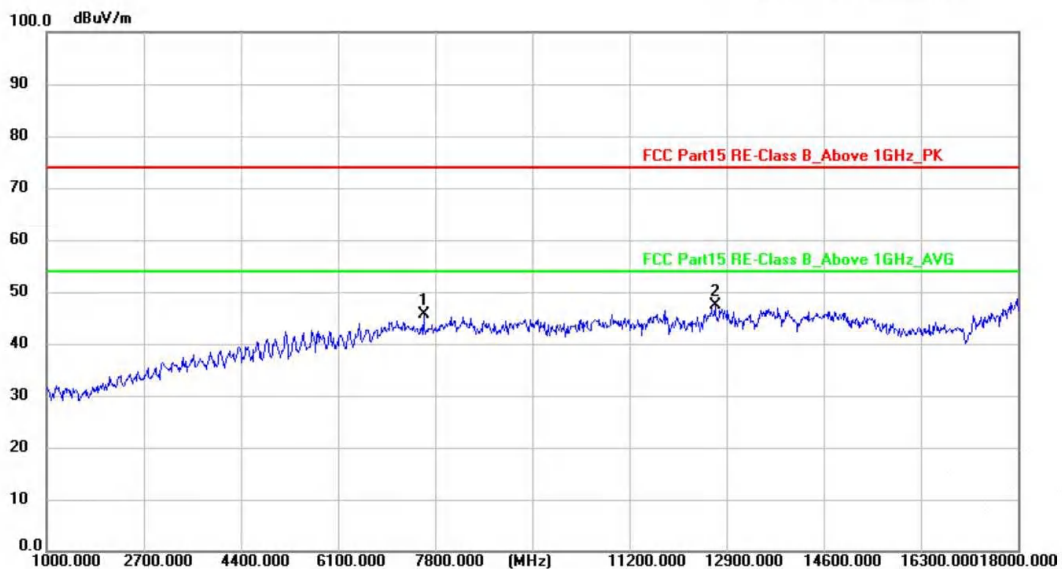

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	7602.375	56.60	-10.94	45.66	74.00	-28.34	peak	150	116	P	
2 *	12702.375	55.31	-7.92	47.39	74.00	-26.61	peak	150	126	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Vertical	Temperature: 26 °C
EUT: Laser 3D Scanner	Distance: 3m	Humidity: 54 %RH
M/N: FreeTrak WT	Test Engineer: Felix	
Test Mode: 1Mbps 2440MHz		
Test Voltage: AC 120V/60Hz		
Note:		

Radiated Emission Measurement

Test Date: 2026/3/13 8:55:16

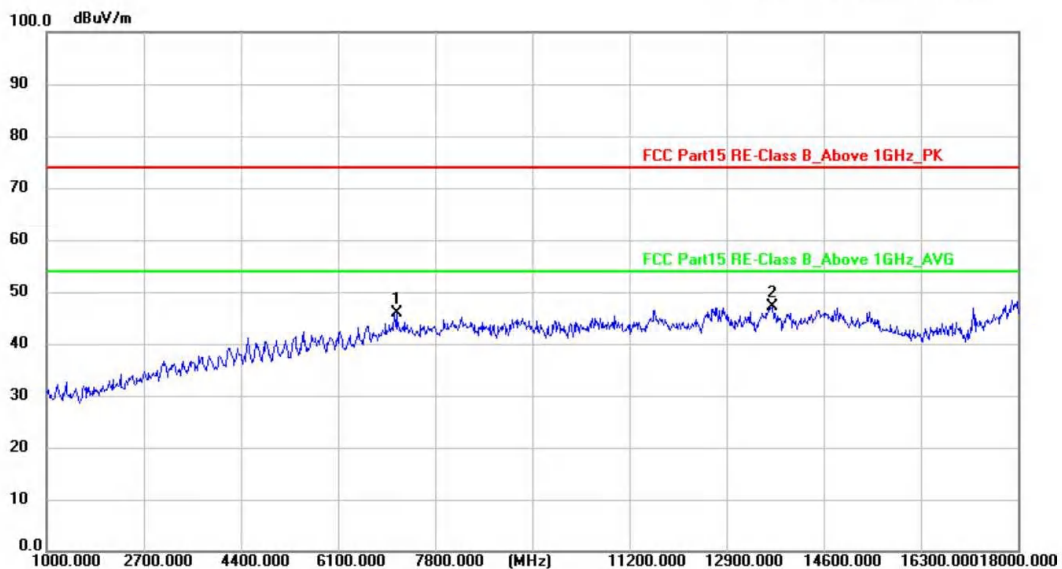

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	7128.500	57.07	-11.26	45.81	74.00	-28.19	peak	150	225	P	
2 *	13699.000	54.27	-7.12	47.15	74.00	-26.85	peak	150	115	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Vertical	Temperature: 26 °C
EUT: Laser 3D Scanner	Distance: 3m	Humidity: 54 %RH
M/N: FreeTrak WT	Test Engineer: Felix	
Test Mode: 1Mbps 2402MHz		
Test Voltage: AC 120V/60Hz		
Note:		

Radiated Emission Measurement

Test Date: 2026/3/13 8:37:48

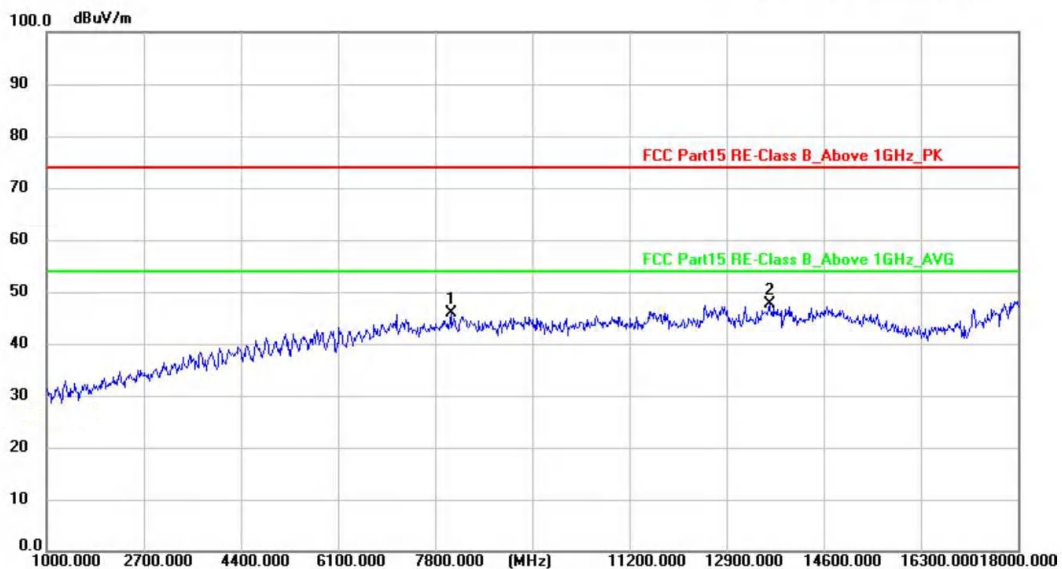

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	8078.375	56.50	-10.64	45.86	74.00	-28.14	peak	150	221	P	
2 *	13662.875	54.70	-7.15	47.55	74.00	-26.45	peak	150	144	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Vertical	Temperature: 26 °C
EUT: Laser 3D Scanner	Distance: 3m	Humidity: 54 %RH
M/N: FreeTrak WT	Test Engineer: Felix	
Test Mode: 1Mbps 2480MHz		
Test Voltage: AC 120V/60Hz		
Note:		

Radiated Emission Measurement

Test Date: 2026/3/13 9:02:44

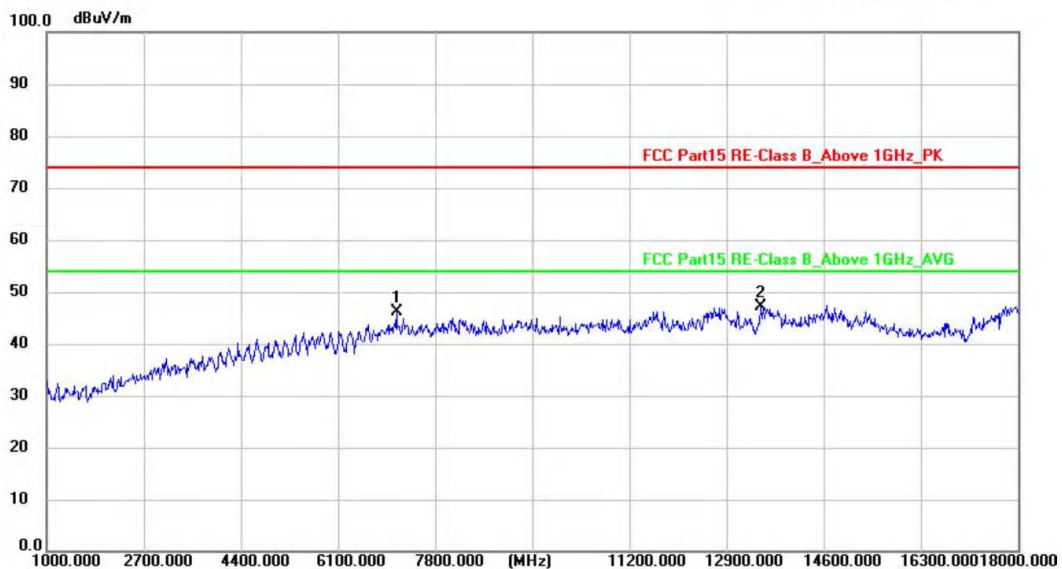

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	7128.500	57.37	-11.26	46.11	74.00	-27.89	peak	150	118	P	
2 *	13499.250	54.48	-7.26	47.22	74.00	-26.78	peak	150	123	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Horizontal	Temperature: 26 °C
EUT: Laser 3D Scanner	Distance: 3m	Humidity: 54 %RH
M/N: FreeTrak WT	Test Engineer: Felix	
Test Mode: 1Mbps 2480MHz		
Test Voltage: AC 120V/60Hz		
Note:		

Radiated Emission Measurement

Test Date: 2026/3/13 9:08:12

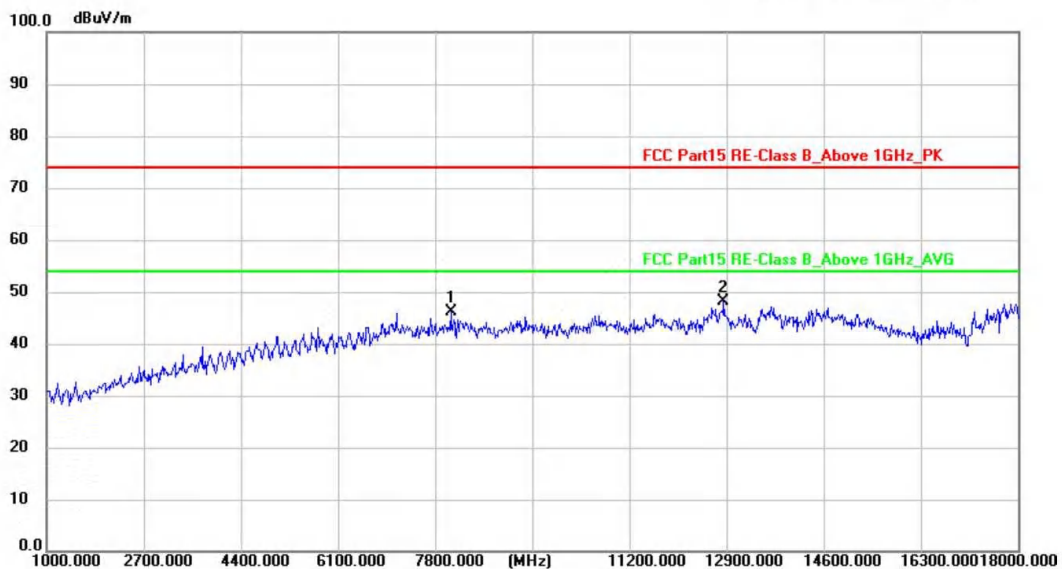

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	8078.375	56.66	-10.64	46.02	74.00	-27.98	peak	150	112	P	
2 *	12849.000	55.94	-7.77	48.17	74.00	-25.83	peak	150	46	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Horizontal	Temperature: 26 °C
EUT: Laser 3D Scanner	Distance: 3m	Humidity: 54 %RH
M/N: FreeTrak WT	Test Engineer: Felix	
Test Mode: 2Mbps 2402MHz		
Test Voltage: AC 120V/60Hz		
Note:		

Radiated Emission Measurement

Test Date: 2026/3/13 9:14:51

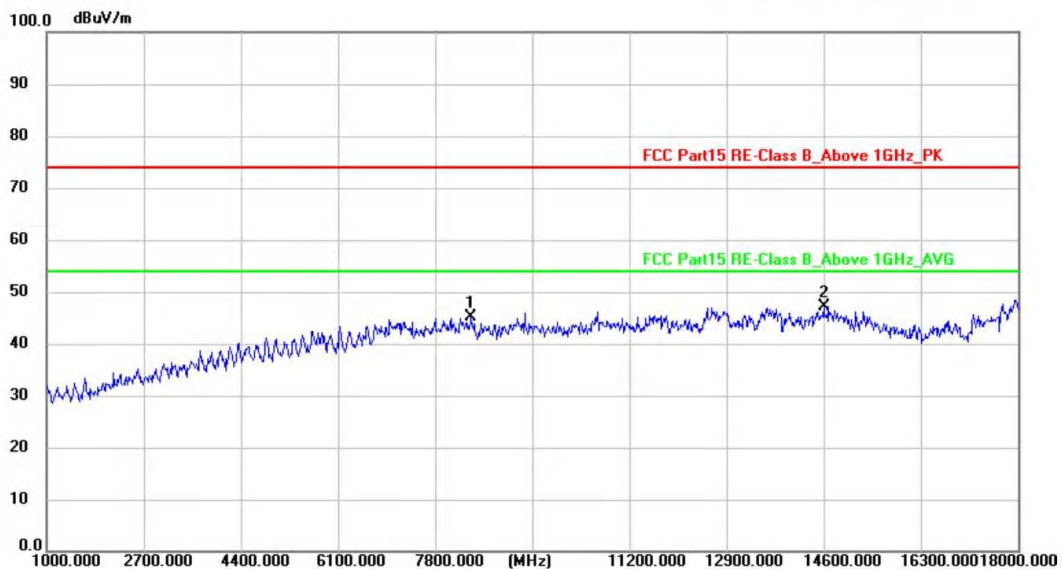

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	8437.500	55.55	-10.54	45.01	74.00	-28.99	peak	150	119	P	
2 *	14610.625	54.30	-7.08	47.22	74.00	-26.78	peak	150	33	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Vertical	Temperature: 26 °C
EUT: Laser 3D Scanner	Distance: 3m	Humidity: 54 %RH
M/N: FreeTrak WT	Test Engineer: Felix	
Test Mode: 2Mbps 2402MHz		
Test Voltage: AC 120V/60Hz		
Note:		

Radiated Emission Measurement

Test Date: 2026/3/13 9:20:18

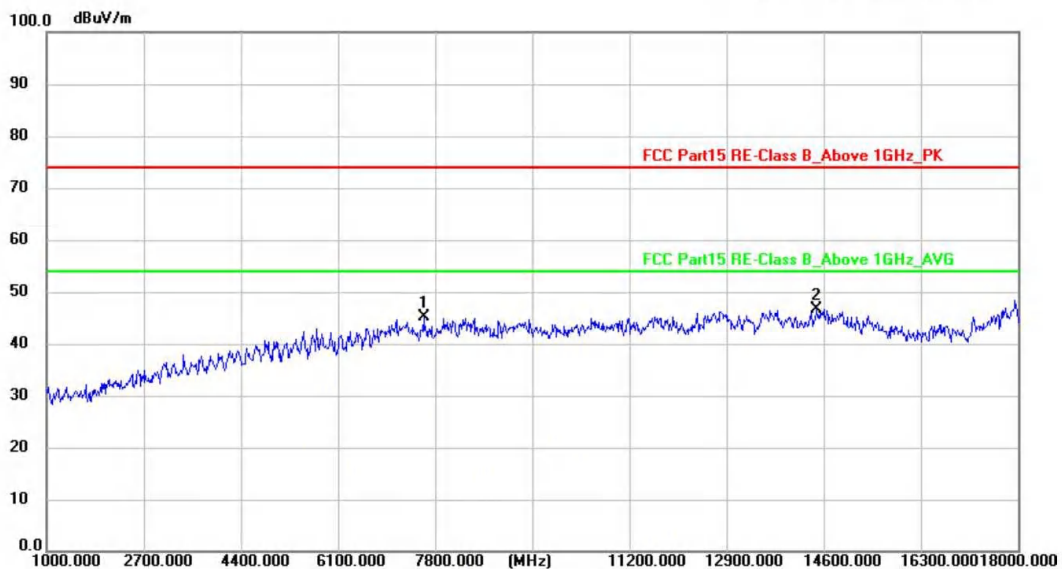

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	7602.375	56.16	-10.94	45.22	74.00	-28.78	peak	150	177	P	
2 *	14495.875	53.70	-7.05	46.65	74.00	-27.35	peak	150	124	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Vertical	Temperature: 26 °C
EUT: Laser 3D Scanner	Distance: 3m	Humidity: 54 %RH
M/N: FreeTrak WT	Test Engineer: Felix	
Test Mode: 2Mbps 2440MHz		
Test Voltage: AC 120V/60Hz		
Note:		

Radiated Emission Measurement

Test Date: 2026/3/13 9:26:55

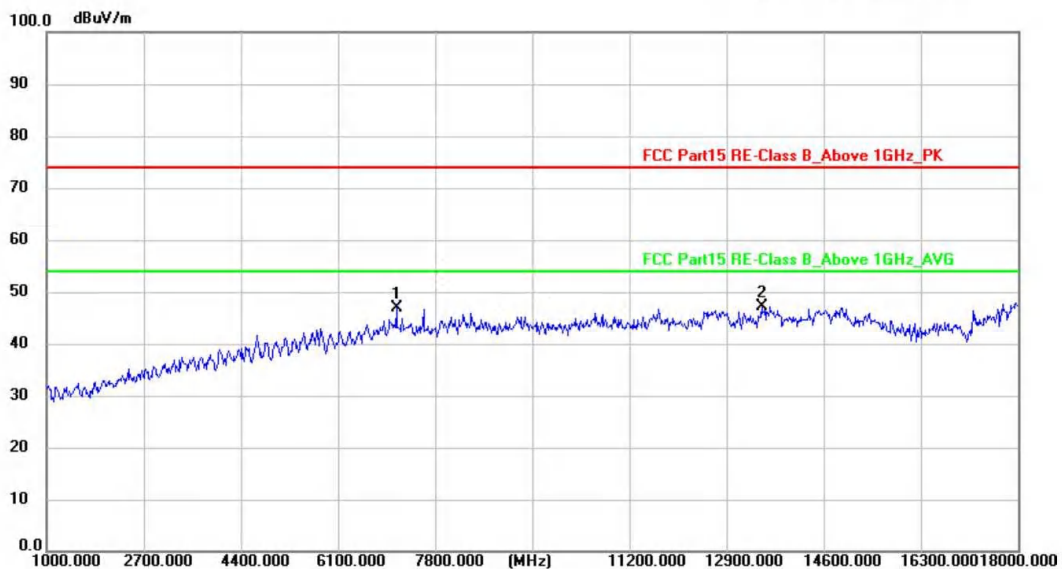

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	7128.500	58.11	-11.26	46.85	74.00	-27.15	peak	150	145	P	
2 *	13520.500	54.39	-7.25	47.14	74.00	-26.86	peak	150	128	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Horizontal	Temperature: 26 °C
EUT: Laser 3D Scanner	Distance: 3m	Humidity: 54 %RH
M/N: FreeTrak WT	Test Engineer: Felix	
Test Mode: 2Mbps 2440MHz		
Test Voltage: AC 120V/60Hz		
Note:		

Radiated Emission Measurement

Test Date: 2026/3/13 9:32:05

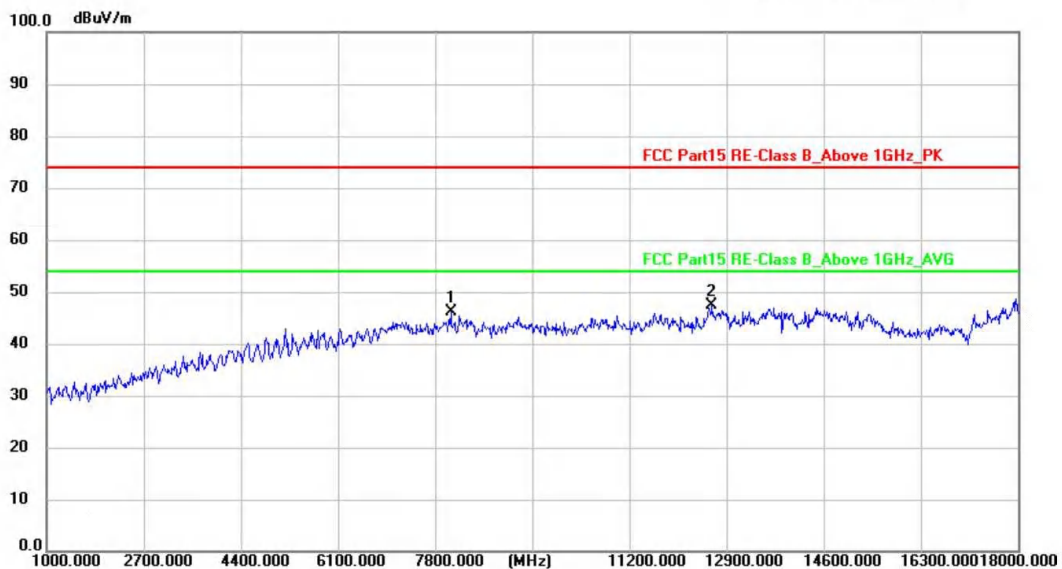

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	8078.375	56.85	-10.64	46.21	74.00	-27.79	peak	150	24	P	
2 *	12651.375	55.38	-7.97	47.41	74.00	-26.59	peak	150	154	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Horizontal	Temperature: 26 °C
EUT: Laser 3D Scanner	Distance: 3m	Humidity: 54 %RH
M/N: FreeTrak WT	Test Engineer: Felix	
Test Mode: 2Mbps 2480MHz		
Test Voltage: AC 120V/60Hz		
Note:		

Radiated Emission Measurement

Test Date: 2026/3/13 9:38:31

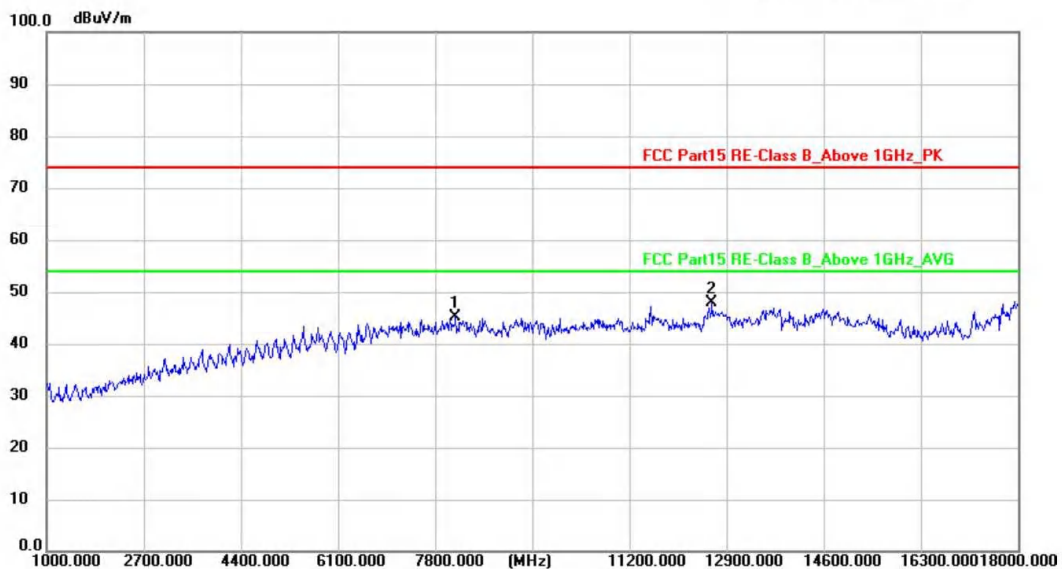

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	8169.750	55.64	-10.62	45.02	74.00	-28.98	peak	150	214	P	
2 *	12657.750	55.75	-7.96	47.79	74.00	-26.21	peak	150	146	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Vertical	Temperature: 26 °C
EUT: Laser 3D Scanner	Distance: 3m	Humidity: 54 %RH
M/N: FreeTrak WT	Test Engineer: Felix	
Test Mode: 2Mbps 2480MHz		
Test Voltage: AC 120V/60Hz		
Note:		

Radiated Emission Measurement

Test Date: 2026/3/13 9:44:56

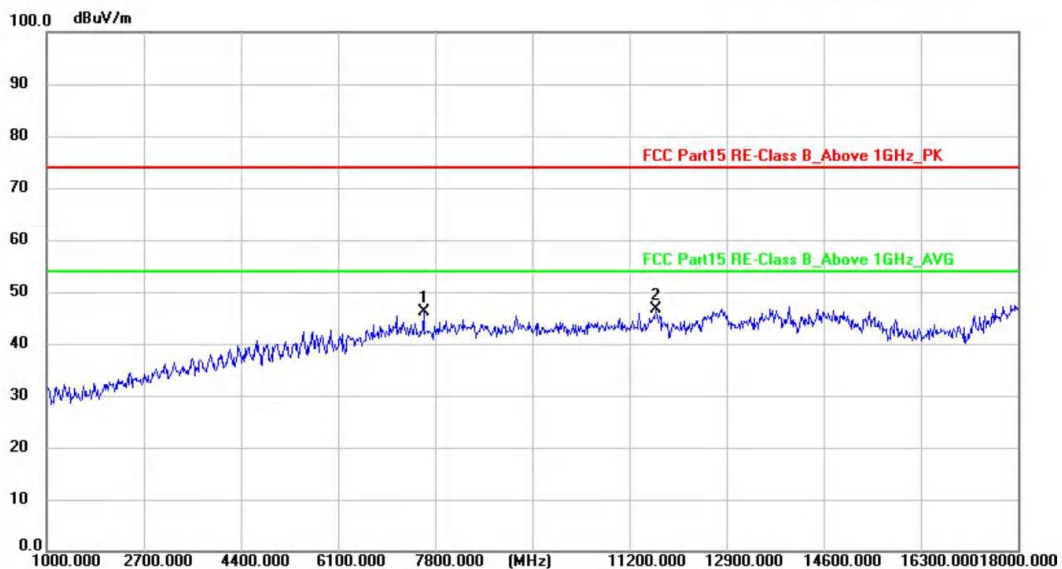

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	7602.375	56.95	-10.94	46.01	74.00	-27.99	peak	150	11	P	
2 *	11671.750	55.37	-8.74	46.63	74.00	-27.37	peak	150	145	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix A.7: Test Results of Radiated Emissions in Restricted Bands




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Horizontal	Temperature: 26 °C
EUT: Laser 3D Scanner	Distance: 3m	Humidity: 54 %RH
M/N: FreeTrak WT	Test Engineer: Felix	
Test Mode: 2Mbps 2402MHz		
Test Voltage: AC 120V/60Hz		
Note:		

Radiated Emission Measurement

Test Date: 2026/3/12 9:05:23

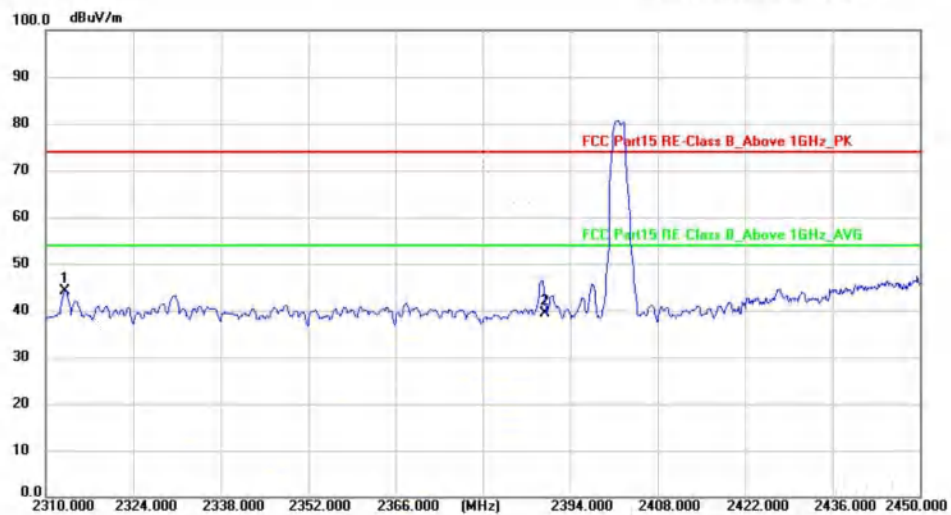

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2313.168	68.21	-24.13	44.08	74.00	-29.92	peak	150	350	P	
2	2390.000	63.31	-23.89	39.42	74.00	-34.58	peak	150	258	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Vertical	Temperature: 26 °C
EUT: Laser 3D Scanner	Distance: 3m	Humidity: 54 %RH
M/N: FreeTrak WT	Test Engineer: Felix	
Test Mode: 2Mbps 2402MHz		
Test Voltage: AC 120V/60Hz		
Note:		

Radiated Emission Measurement

Test Date: 2026/3/12 9:11:04

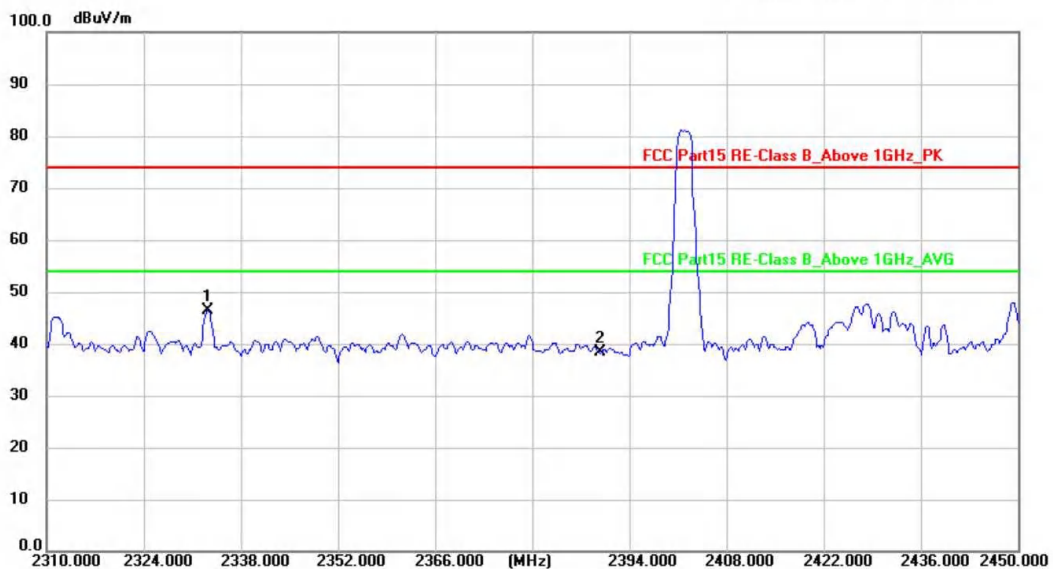

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2333.275	70.37	-24.08	46.29	74.00	-27.71	peak	150	294	P	
2	2390.000	62.28	-23.89	38.39	74.00	-35.61	peak	150	327	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Horizontal	Temperature: 26 °C
EUT: Laser 3D Scanner	Distance: 3m	Humidity: 54 %RH
M/N: FreeTrak WT	Test Engineer: Felix	
Test Mode: 1Mbps 2402MHz		
Test Voltage: AC 120V/60Hz		
Note:		

Radiated Emission Measurement

Test Date: 2026/3/12 9:17:12

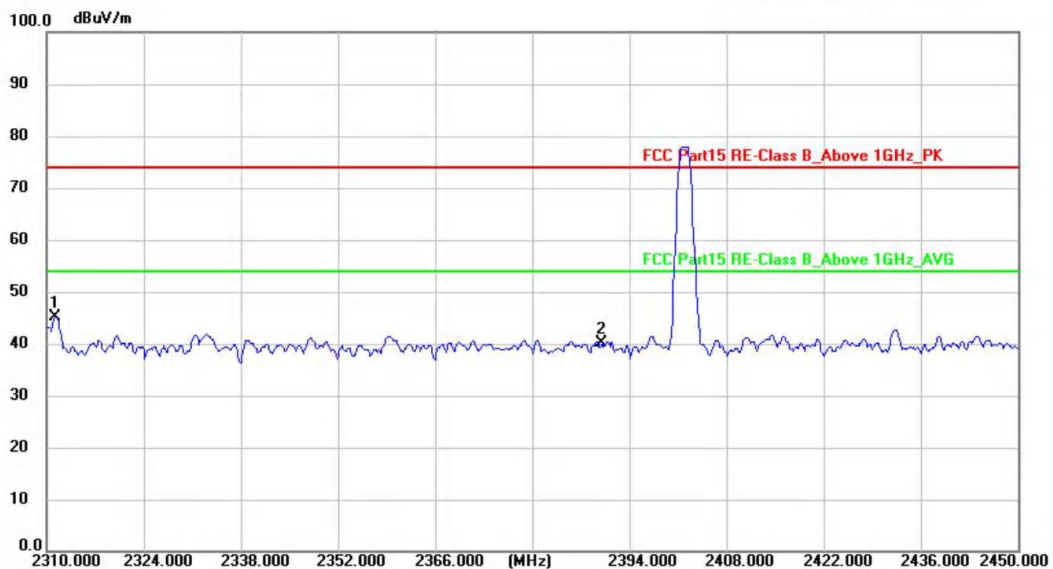

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2311.347	69.35	-24.14	45.21	74.00	-28.79	peak	150	225	P	
2	2390.000	63.93	-23.89	40.04	74.00	-33.96	peak	150	168	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Vertical	Temperature: 26 °C
EUT: Laser 3D Scanner	Distance: 3m	Humidity: 54 %RH
M/N: FreeTrak WT	Test Engineer: Felix	
Test Mode: 1Mbps 2402MHz		
Test Voltage: AC 120V/60Hz		
Note:		

Radiated Emission Measurement

Test Date: 2026/3/12 9:23:53

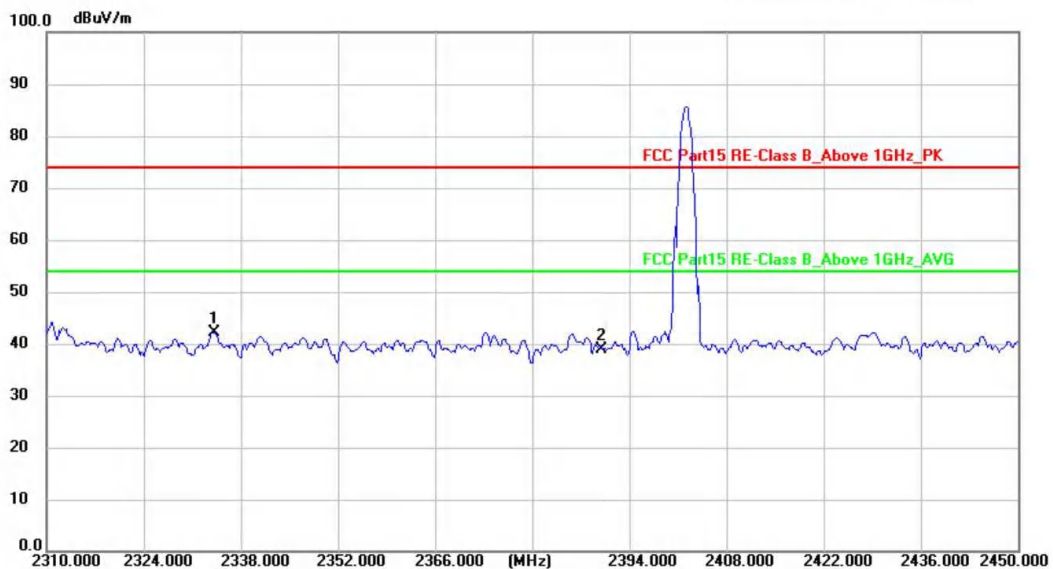

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2334.133	66.30	-24.07	42.23	74.00	-31.77	peak	150	166	P	
2	2390.000	62.86	-23.89	38.97	74.00	-35.03	peak	150	164	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Vertical	Temperature: 26 °C
EUT: Laser 3D Scanner	Distance: 3m	Humidity: 54 %RH
M/N: FreeTrak WT	Test Engineer: Felix	
Test Mode: 1Mbps 2480MHz		
Test Voltage: AC 120V/60Hz		
Note:		

Radiated Emission Measurement

Test Date: 2026/3/12 9:29:35

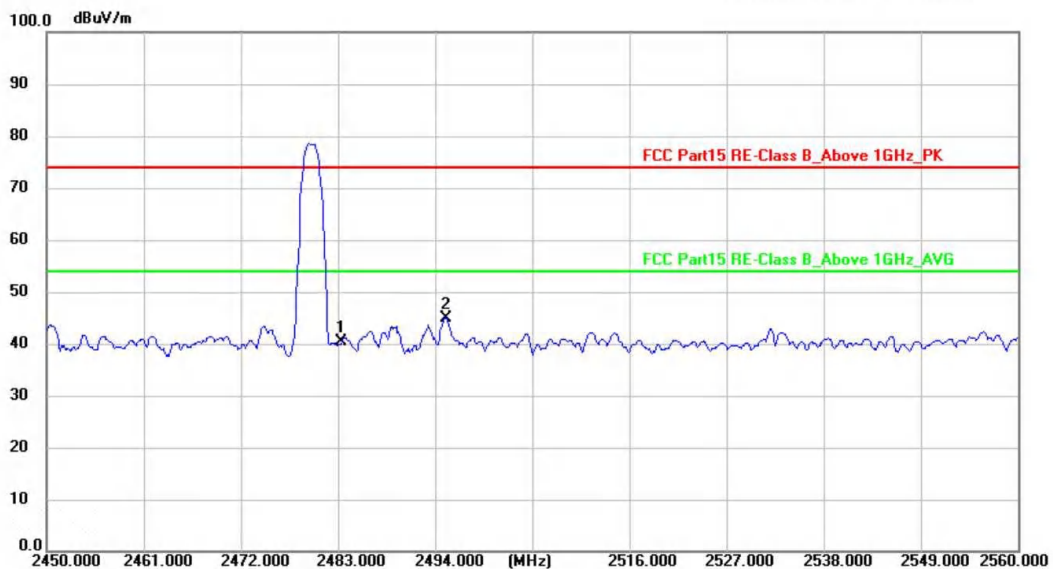

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	64.02	-23.58	40.44	74.00	-33.56	peak	150	167	P	
2 *	2495.210	68.49	-23.54	44.95	74.00	-29.05	peak	150	144	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Horizontal	Temperature: 26 °C
EUT: Laser 3D Scanner	Distance: 3m	Humidity: 54 %RH
M/N: FreeTrak WT	Test Engineer: Felix	
Test Mode: 1Mbps 2480MHz		
Test Voltage: AC 120V/60Hz		
Note:		

Radiated Emission Measurement

Test Date: 2026/3/12 9:35:56

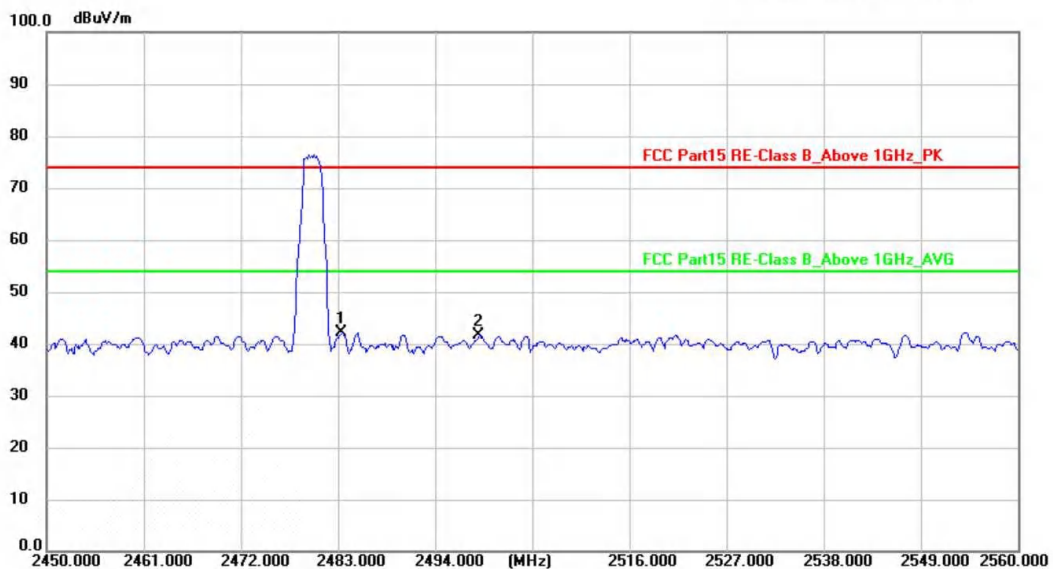

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2483.500	65.65	-23.58	42.07	74.00	-31.93	peak	150	125	P	
2	2499.156	65.05	-23.53	41.52	74.00	-32.48	peak	150	177	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Horizontal	Temperature: 26 °C
EUT: Laser 3D Scanner	Distance: 3m	Humidity: 54 %RH
M/N: FreeTrak WT	Test Engineer: Felix	
Test Mode: 2Mbps 2480MHz		
Test Voltage: AC 120V/60Hz		
Note:		

Radiated Emission Measurement

Test Date: 2026/3/12 9:41:46

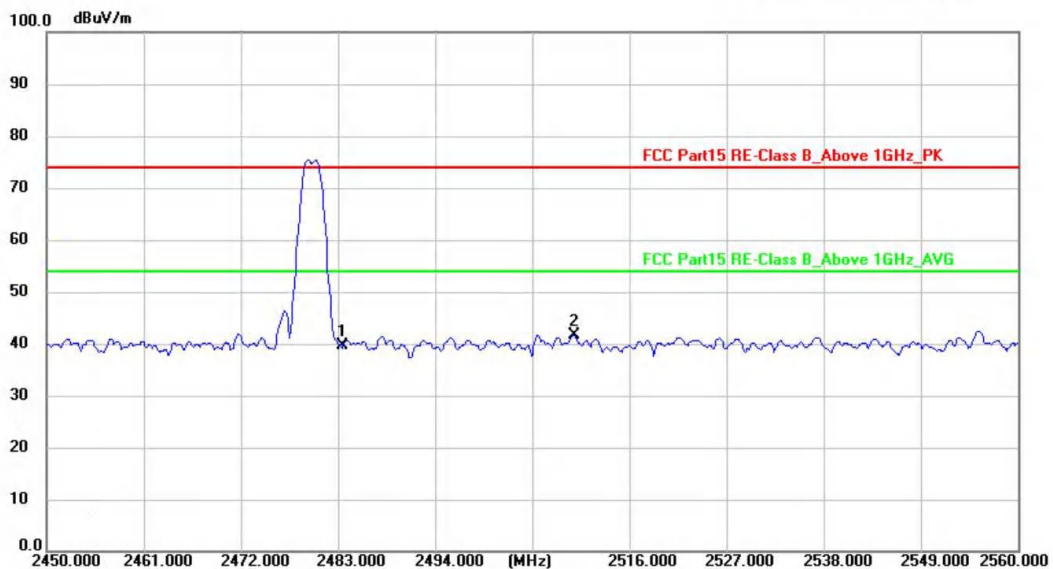

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	63.12	-23.58	39.54	74.00	-34.46	peak	150	275	P	
2 *	2509.730	65.13	-23.49	41.64	74.00	-32.36	peak	150	266	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Vertical	Temperature: 26 °C
EUT: Laser 3D Scanner	Distance: 3m	Humidity: 54 %RH
M/N: FreeTrak WT	Test Engineer: Felix	
Test Mode: 2Mbps 2480MHz		
Test Voltage: AC 120V/60Hz		
Note:		

Radiated Emission Measurement

Test Date: 2026/3/12 9:47:42

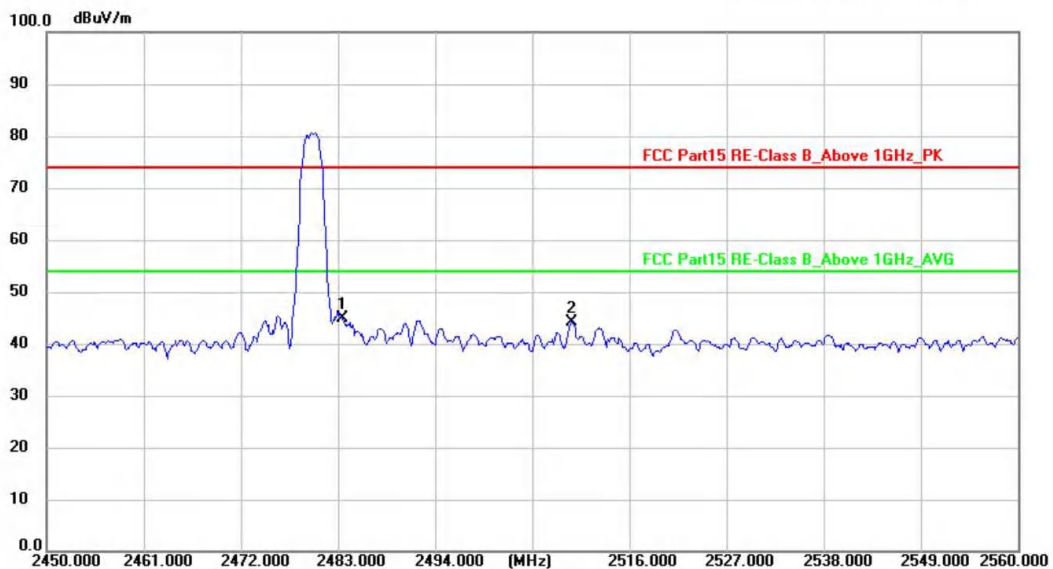

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2483.500	68.37	-23.58	44.79	74.00	-29.21	peak	150	167	P	
2	2509.537	67.70	-23.49	44.21	74.00	-29.79	peak	150	12	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix A.8: Test Results of Conducted emissions of AC mains




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-Shielded Room Phase: **L1** Temperature: 26 °C
EUT: Laser 3D Scanner Humidity: 54 %RH
M/N: FreeTrak WT Test Engineer: Felix
Test Mode: 2.4G SRD Link
Test Voltage: AC 120V/60Hz
Note:

Conducted Emission Measurement

Test Date: 2026/1/22 14:46:57

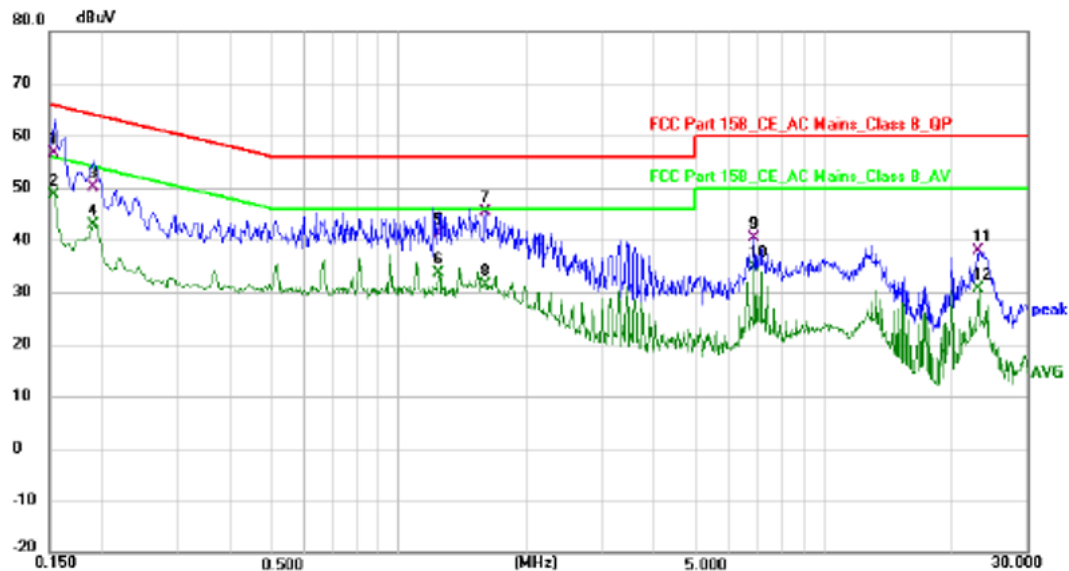

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1539	46.98	9.68	56.66	65.79	-9.13	QP	P	
2 *	0.1539	38.83	9.68	48.51	55.79	-7.28	AVG	P	
3	0.1900	40.76	9.46	50.22	64.04	-13.82	QP	P	
4	0.1900	33.36	9.46	42.82	54.04	-11.22	AVG	P	
5	1.2420	31.40	9.82	41.22	56.00	-14.78	QP	P	
6	1.2420	23.89	9.82	33.71	46.00	-12.29	AVG	P	
7	1.5980	35.53	9.86	45.39	56.00	-10.61	QP	P	
8	1.5980	21.47	9.86	31.33	46.00	-14.67	AVG	P	
9	6.8540	30.64	9.79	40.43	60.00	-19.57	QP	P	
10	6.8540	25.16	9.79	34.95	50.00	-15.05	AVG	P	
11	23.2099	28.34	9.60	37.94	60.00	-22.06	QP	P	
12	23.2099	20.98	9.60	30.58	50.00	-19.42	AVG	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-Shielded Room Phase: **N** Temperature: 26 °C
EUT: Laser 3D Scanner Humidity: 54 %RH
M/N: FreeTrak WT Test Engineer: Felix
Test Mode: 2.4G SRD Link
Test Voltage: AC 120V/60Hz
Note:

Conducted Emission Measurement

Test Date: 2026/1/22 14:42:43

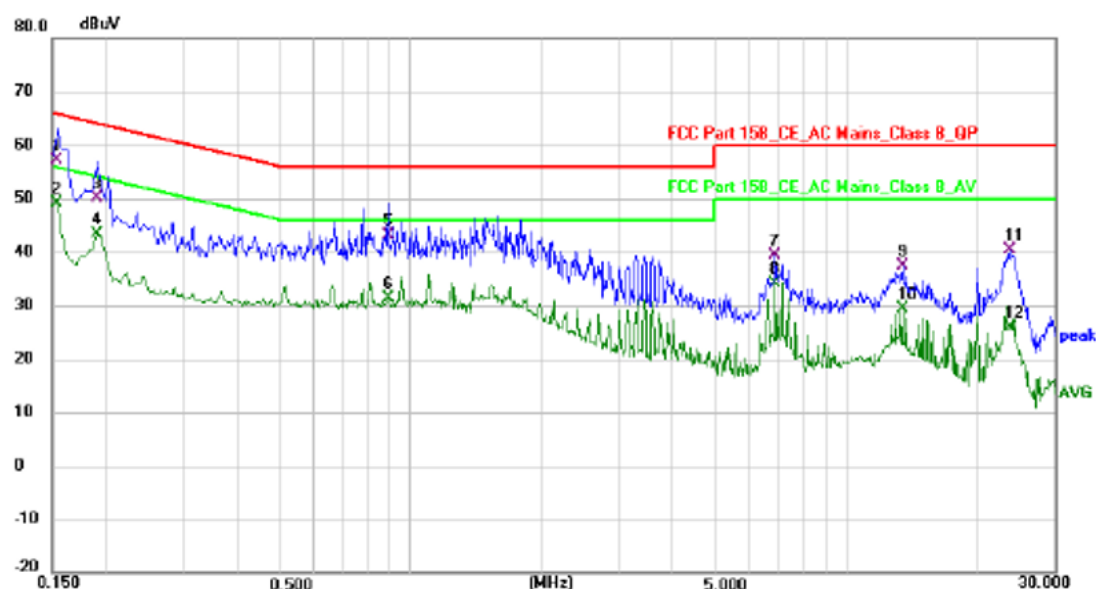

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1539	47.44	9.68	57.12	65.79	-8.67	QP	P	
2 *	0.1539	39.42	9.68	49.10	55.79	-6.69	AVG	P	
3	0.1900	40.69	9.46	50.15	64.04	-13.89	QP	P	
4	0.1900	33.90	9.46	43.36	54.04	-10.68	AVG	P	
5	0.8860	33.53	9.65	43.18	56.00	-12.82	QP	P	
6	0.8860	21.69	9.65	31.34	46.00	-14.66	AVG	P	
7	6.8580	29.63	9.79	39.42	60.00	-20.58	QP	P	
8	6.8580	24.43	9.79	34.22	50.00	-15.78	AVG	P	
9	13.4580	27.66	9.74	37.40	60.00	-22.60	QP	P	
10	13.4580	19.57	9.74	29.31	50.00	-20.69	AVG	P	
11	23.6500	30.90	9.60	40.50	60.00	-19.50	QP	P	
12	23.6500	16.38	9.60	25.98	50.00	-24.02	AVG	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit