




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 24 °C
EUT: Laser 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: FreeTrak WT Test Engineer: Felix
Test Mode: ax20 5745MHz
Test Voltage: AC 120V/60Hz
Note:

Radiated Emission Measurement

Test Date: 2026/3/14 13:50:26

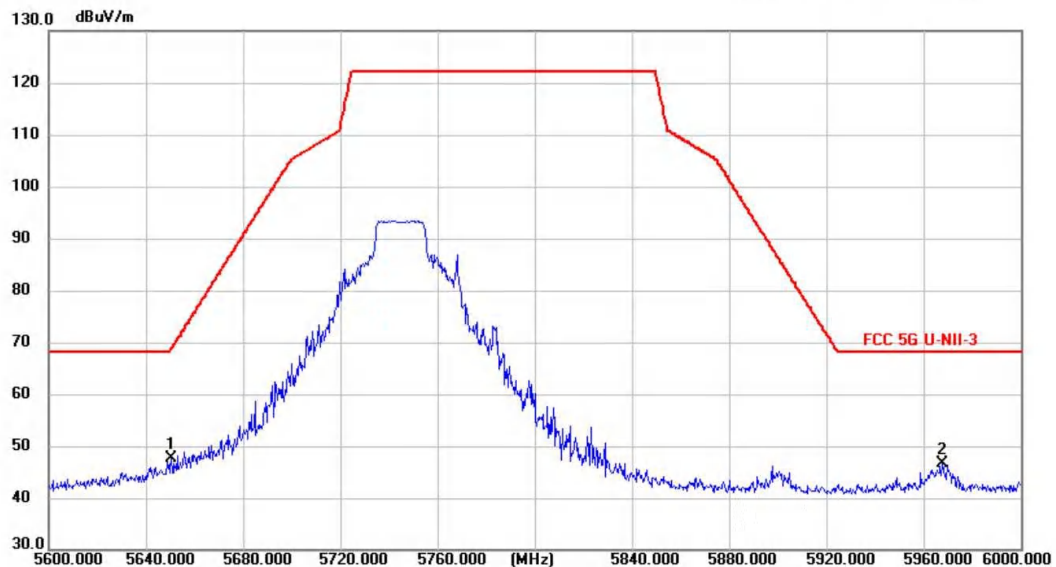

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5650.700	62.02	-14.42	47.60	68.72	-21.12	peak	150	155	P	
2	5967.750	60.36	-13.77	46.59	68.20	-21.61	peak	150	56	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 24 °C
EUT: Laser 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: FreeTrak WT Test Engineer: Felix
Test Mode: ax20 5825MHz
Test Voltage: AC 120V/60Hz
Note:

Radiated Emission Measurement

Test Date: 2026/3/14 13:55:27

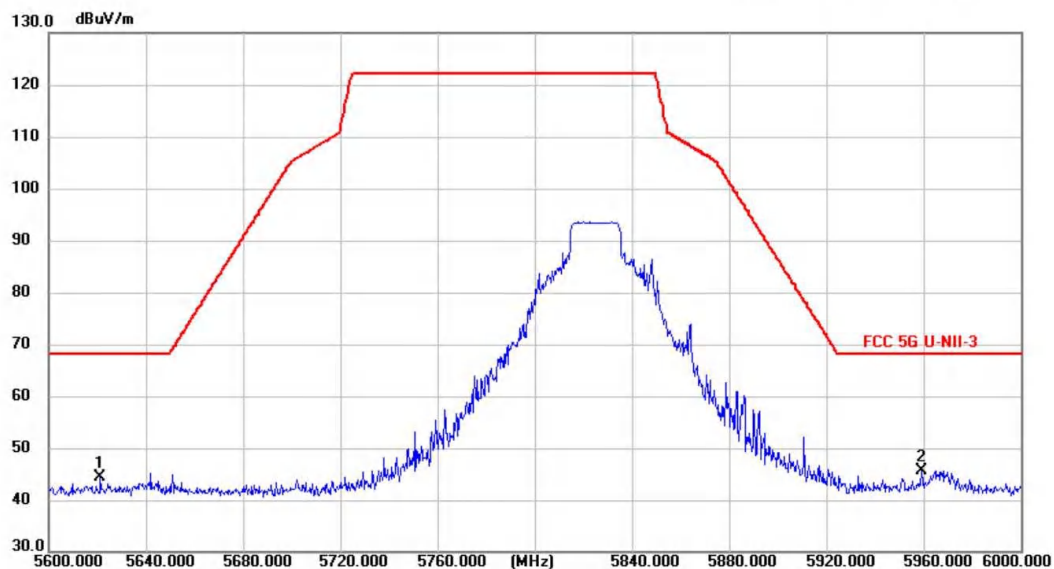

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5621.250	59.00	-14.50	44.50	68.20	-23.70	peak	150	112	P	
2 *	5959.350	59.39	-13.77	45.62	68.20	-22.58	peak	150	19	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 24 °C
EUT: Laser 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: FreeTrak WT Test Engineer: Felix
Test Mode: ax20 5825MHz
Test Voltage: AC 120V/60Hz
Note:

Radiated Emission Measurement

Test Date: 2026/3/14 14:01:15

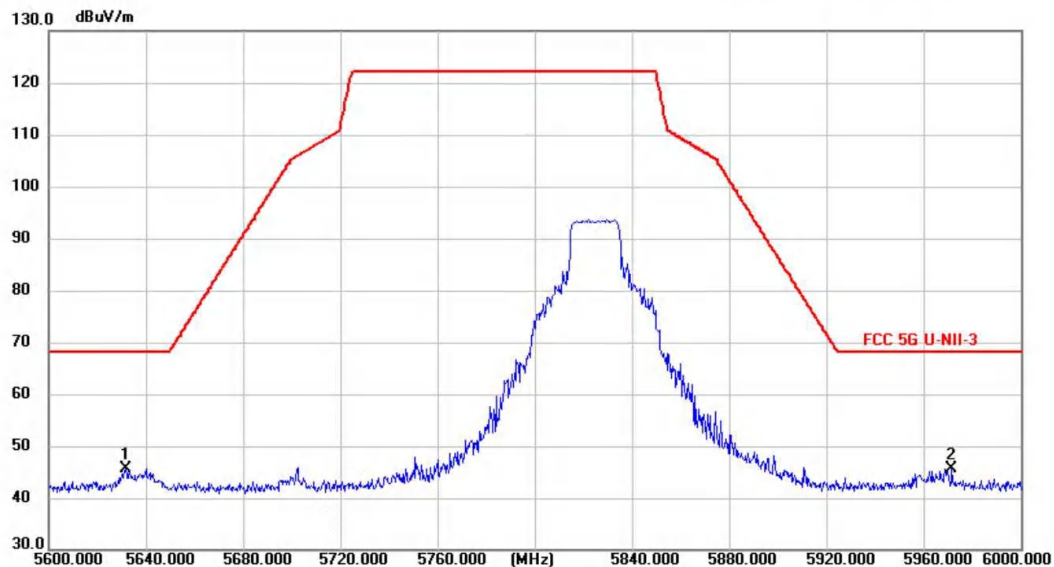

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5631.700	60.14	-14.47	45.67	68.20	-22.53	peak	150	22	P	
2 *	5971.700	59.45	-13.74	45.71	68.20	-22.49	peak	150	249	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 24 °C
EUT: Laser 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: FreeTrak WT Test Engineer: Felix
Test Mode: n40 5755MHz
Test Voltage: AC 120V/60Hz
Note:

Radiated Emission Measurement

Test Date: 2026/3/14 14:06:18

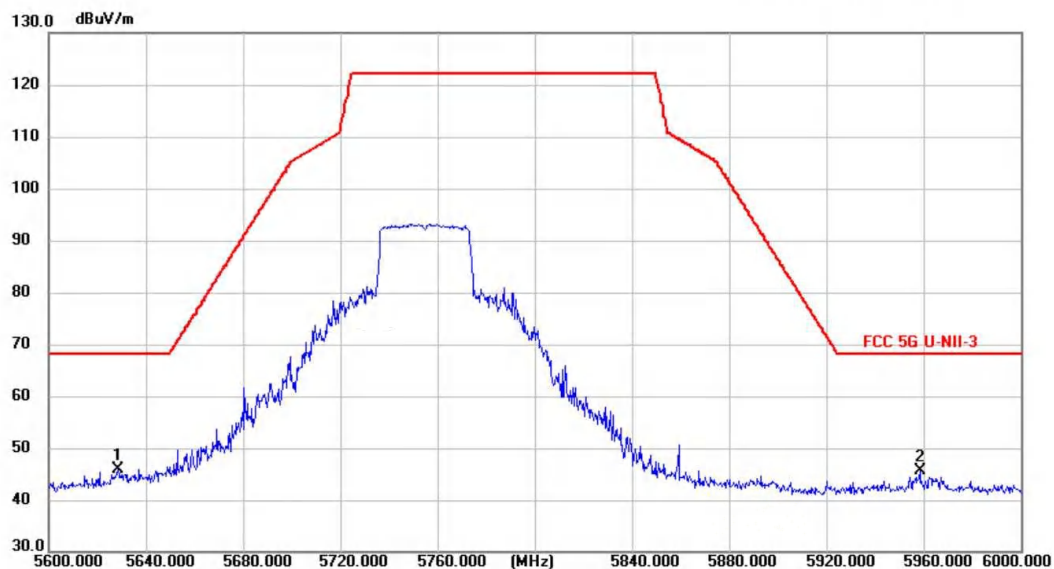

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5628.550	60.28	-14.48	45.80	68.20	-22.40	peak	150	256	P	
2	5958.750	59.47	-13.78	45.69	68.20	-22.51	peak	150	29	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 24 °C
EUT: Laser 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: FreeTrak WT Test Engineer: Felix
Test Mode: n40 5755MHz
Test Voltage: AC 120V/60Hz
Note:

Radiated Emission Measurement

Test Date: 2026/3/14 14:12:37

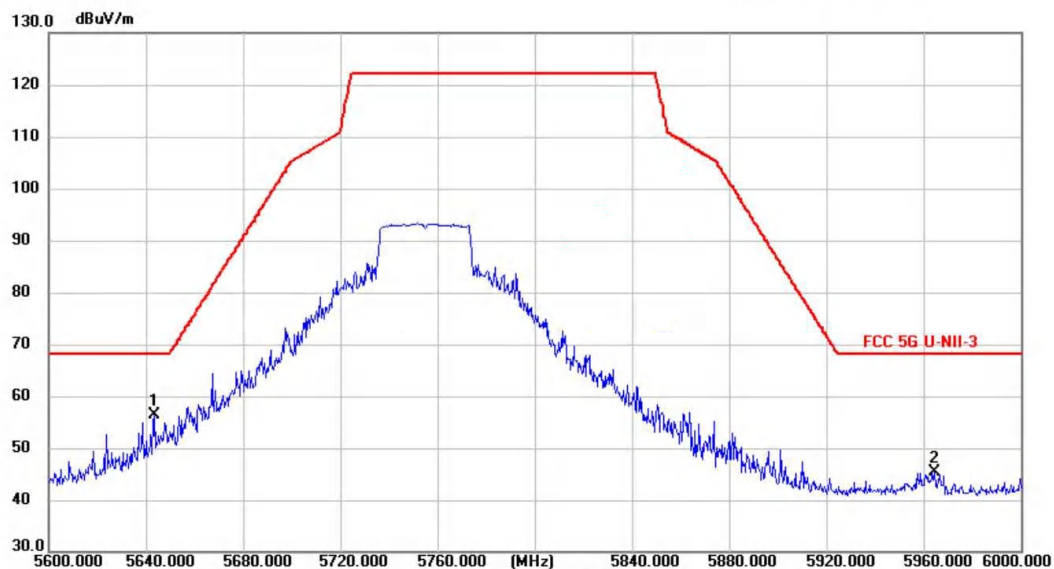

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5643.750	70.80	-14.45	56.35	68.20	-11.85	peak	150	16	P	
2	5964.600	59.12	-13.77	45.35	68.20	-22.85	peak	150	24	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 24 °C
EUT: Laser 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: FreeTrak WT Test Engineer: Felix
Test Mode: n40 5795MHz
Test Voltage: AC 120V/60Hz
Note:

Radiated Emission Measurement

Test Date: 2026/3/14 14:18:20

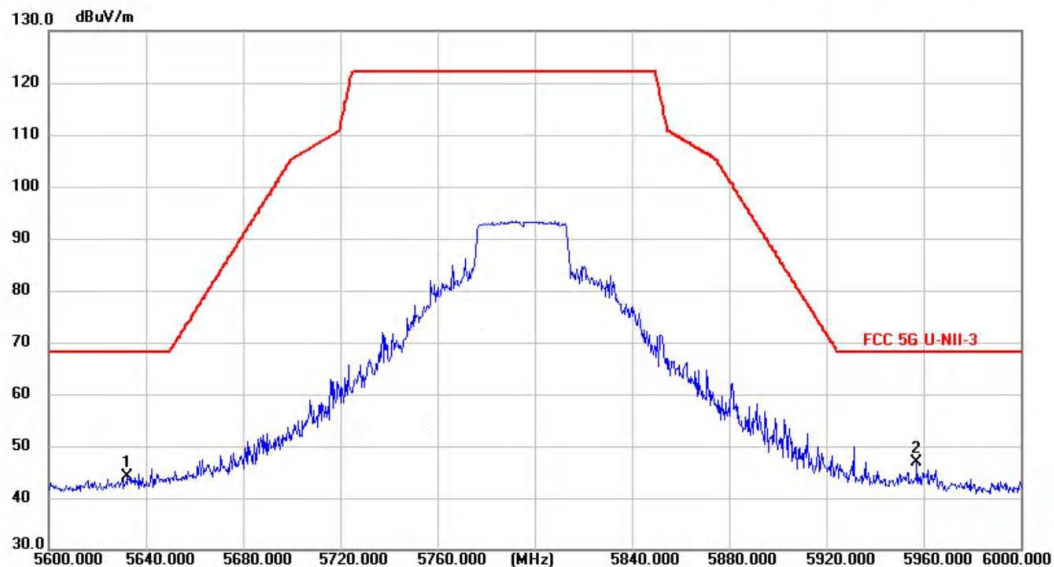

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5632.750	58.59	-14.46	44.13	68.20	-24.07	peak	150	142	P	
2 *	5957.550	60.54	-13.78	46.76	68.20	-21.44	peak	150	119	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 24 °C
EUT: Laser 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: FreeTrak WT Test Engineer: Felix
Test Mode: n40 5795MHz
Test Voltage: AC 120V/60Hz
Note:

Radiated Emission Measurement

Test Date: 2026/3/14 14:24:34

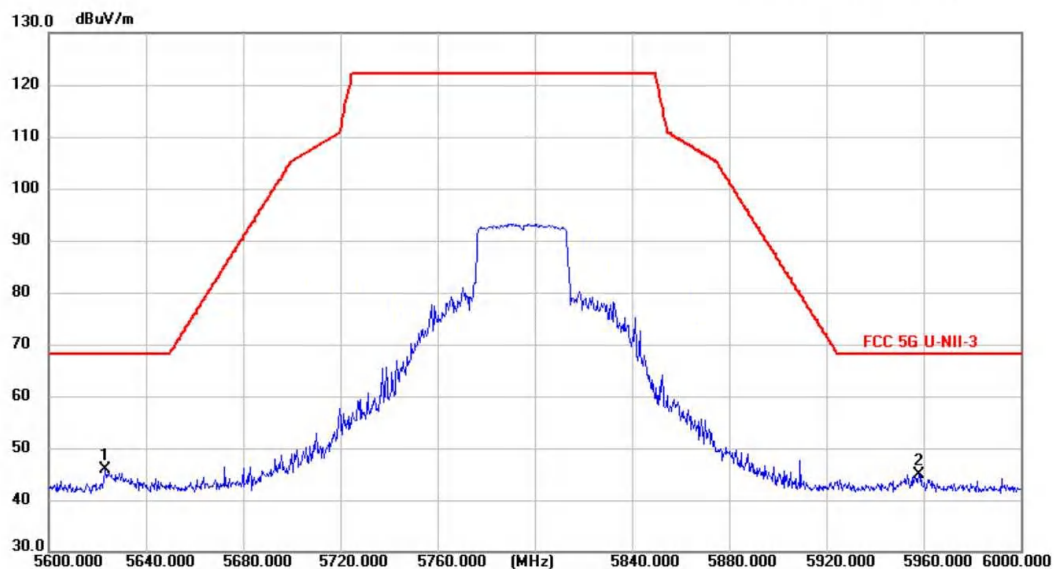

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5623.400	60.42	-14.49	45.93	68.20	-22.27	peak	150	114	P	
2	5958.100	58.75	-13.78	44.97	68.20	-23.23	peak	150	245	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Vertical	Temperature: 24 °C
EUT: Laser 3D Scanner	Distance: 3m	Humidity: 56 %RH
M/N: FreeTrak WT	Test Engineer: Felix	
Test Mode: ax40 5755MHz		
Test Voltage: AC 120V/60Hz		
Note:		

Radiated Emission Measurement

Test Date: 2026/3/14 14:30:15

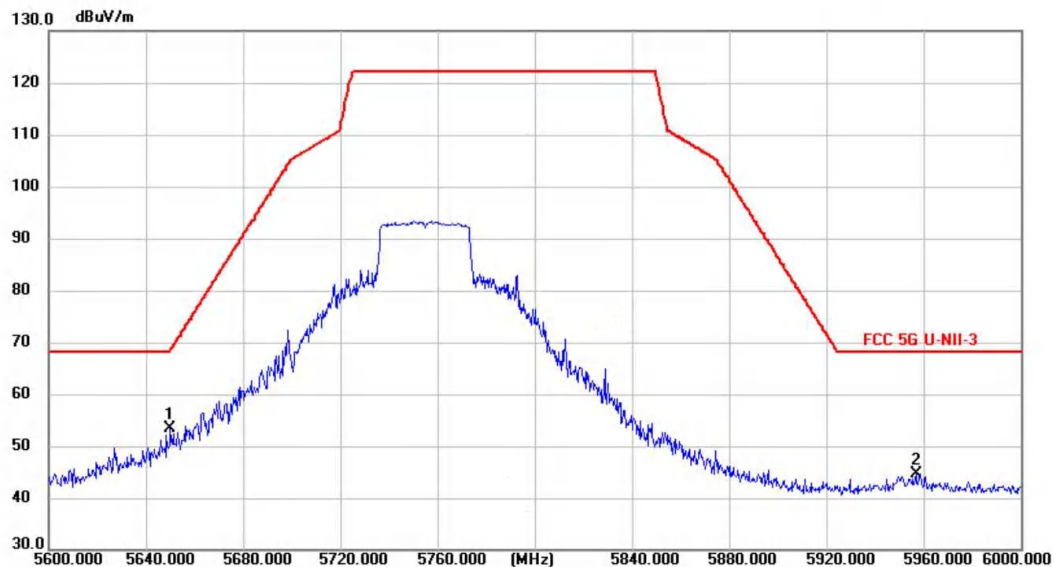

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5650.050	67.74	-14.43	53.31	68.24	-14.93	peak	150	277	P	
2	5957.100	58.46	-13.78	44.68	68.20	-23.52	peak	150	168	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 24 °C
EUT: Laser 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: FreeTrak WT Test Engineer: Felix
Test Mode: ax40 5755MHz
Test Voltage: AC 120V/60Hz
Note:

Radiated Emission Measurement

Test Date: 2026/3/14 14:36:45

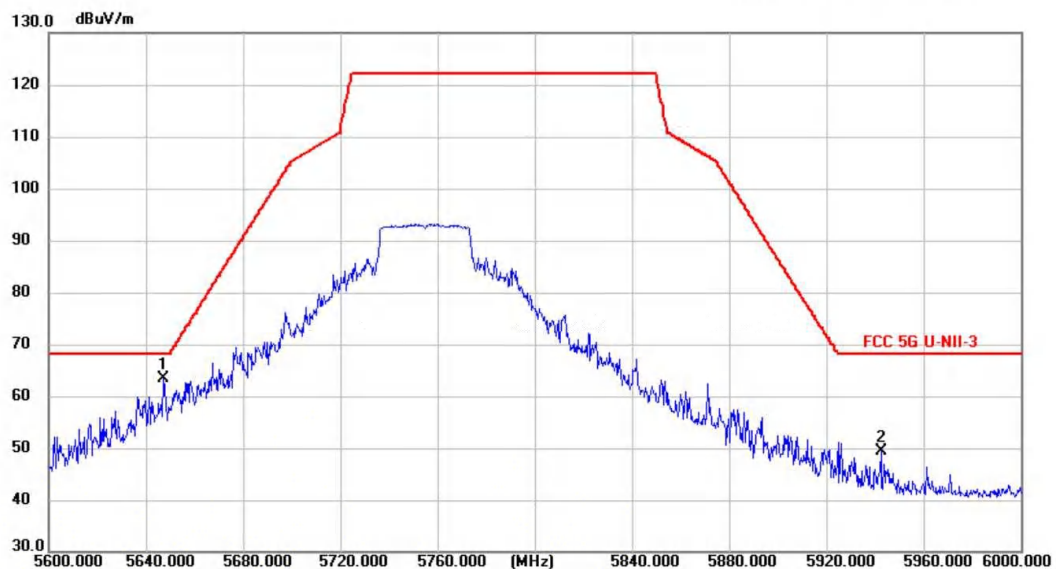

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5647.450	77.84	-14.44	63.40	68.20	-4.80	peak	150	21	P	
2	5942.400	63.27	-13.81	49.46	68.20	-18.74	peak	150	176	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 24 °C
EUT: Laser 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: FreeTrak WT Test Engineer: Felix
Test Mode: ax40 5795MHz
Test Voltage: AC 120V/60Hz
Note:

Radiated Emission Measurement

Test Date: 2026/3/14 14:42:32

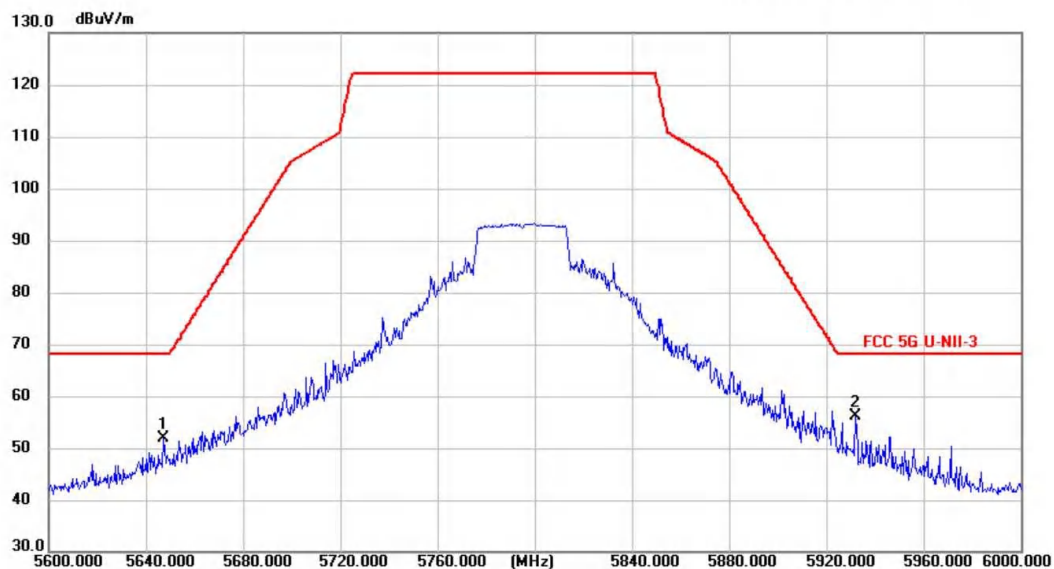

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5647.500	66.36	-14.44	51.92	68.20	-16.28	peak	150	25	P	
2 *	5932.350	70.06	-13.83	56.23	68.20	-11.97	peak	150	117	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 24 °C
EUT: Laser 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: FreeTrak WT Test Engineer: Felix
Test Mode: ax40 5795MHz
Test Voltage: AC 120V/60Hz
Note:

Radiated Emission Measurement

Test Date: 2026/3/14 14:48:15

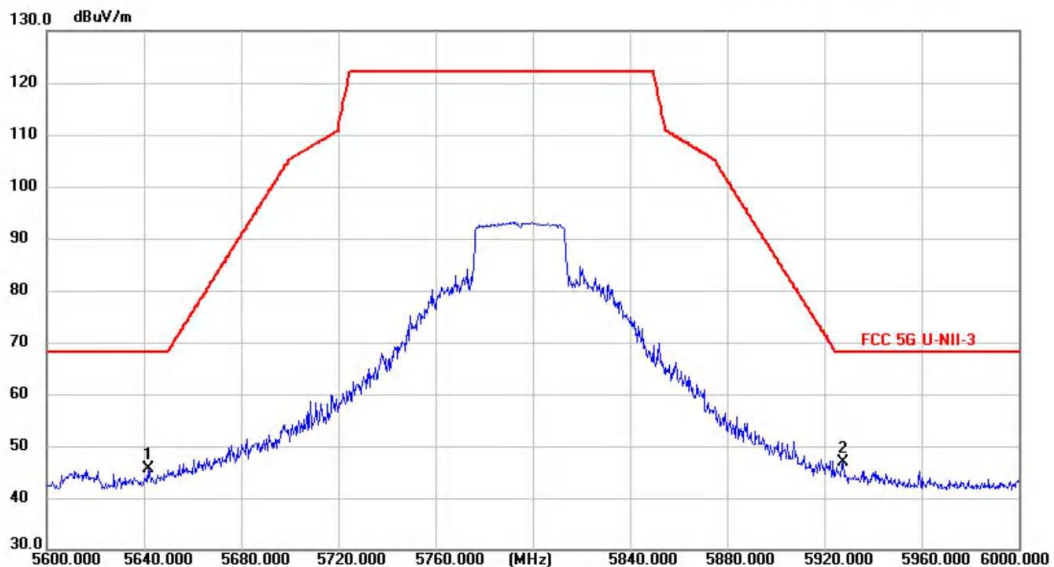

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5641.800	60.11	-14.45	45.66	68.20	-22.54	peak	150	245	P	
2 *	5927.950	60.67	-13.85	46.82	68.20	-21.38	peak	150	119	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 24 °C
EUT: Laser 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: FreeTrak WT Test Engineer: Felix
Test Mode: ax80 5775MHz
Test Voltage: AC 120V/60Hz
Note:

Radiated Emission Measurement

Test Date: 2026/3/14 14:54:21

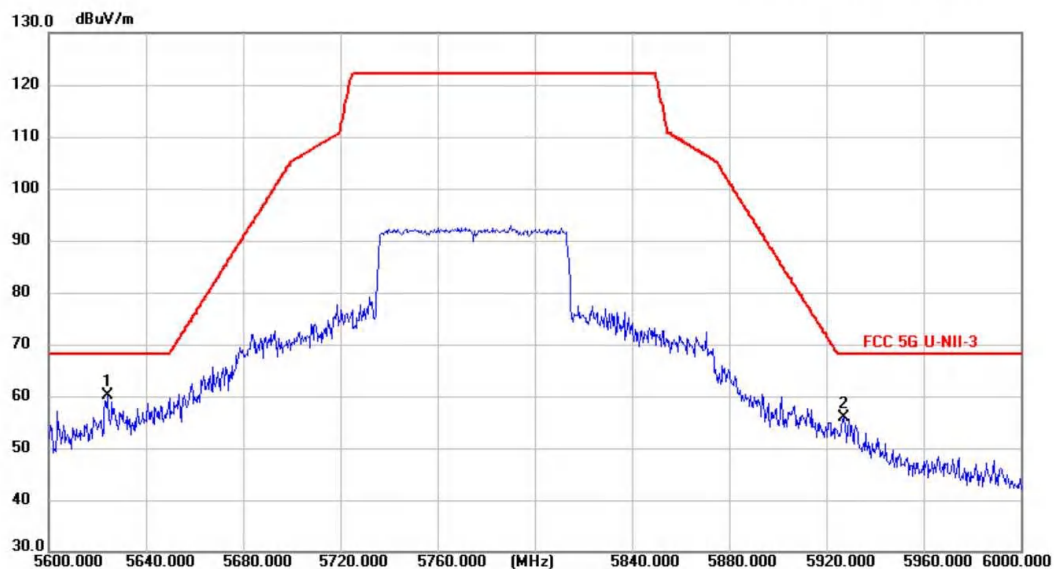

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5624.100	74.55	-14.49	60.06	68.20	-8.14	peak	150	116	P	
2	5927.250	69.63	-13.85	55.78	68.20	-12.42	peak	150	136	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Horizontal	Temperature: 24 °C
EUT: Laser 3D Scanner	Distance: 3m	Humidity: 56 %RH
M/N: FreeTrak WT	Test Engineer: Felix	
Test Mode: ax80 5775MHz		
Test Voltage: AC 120V/60Hz		
Note:		

Radiated Emission Measurement

Test Date: 2026/3/14 15:00:25

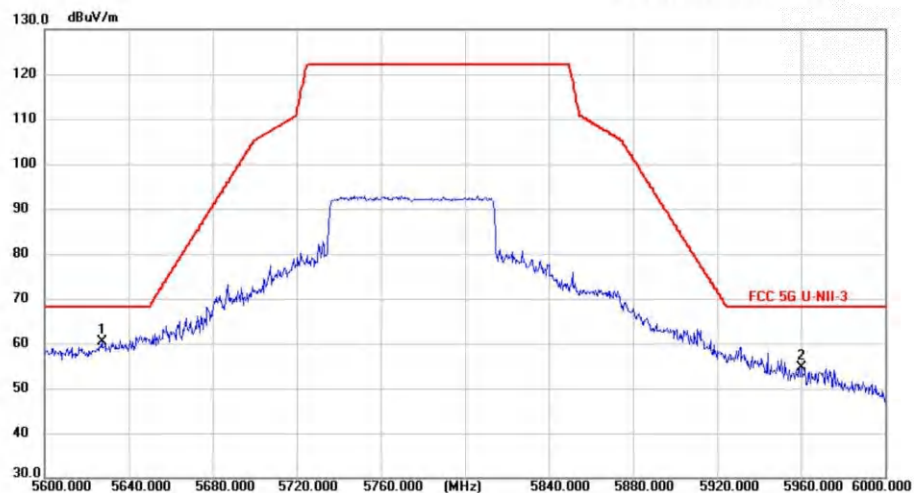

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5627.450	74.76	-14.48	60.28	68.20	-7.92	peak	150	34	P	
2	5960.500	68.33	-13.77	54.56	68.20	-13.64	peak	150	246	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

File: 5\Data :#26

Page: 1

Engineer Signature:

Co-location modes:

It verified that there are no evident emissions found in co-location modes (2.4GHz SRD+5GHz Wi-Fi), thus no records listed.

6. Test Results of AC Conducted Emissions



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-Shielded Room

Phase: **L1**

Temperature: 26 °C

EUT: Laser 3D Scanner

Humidity: 54 %RH

M/N: FreeTrak WT

Test Engineer: Felix


Test Mode: WiFi Link

Test Voltage: AC 120V/60Hz

Note:

Conducted Emission Measurement

Test Date: 2026/1/22 14:58:35

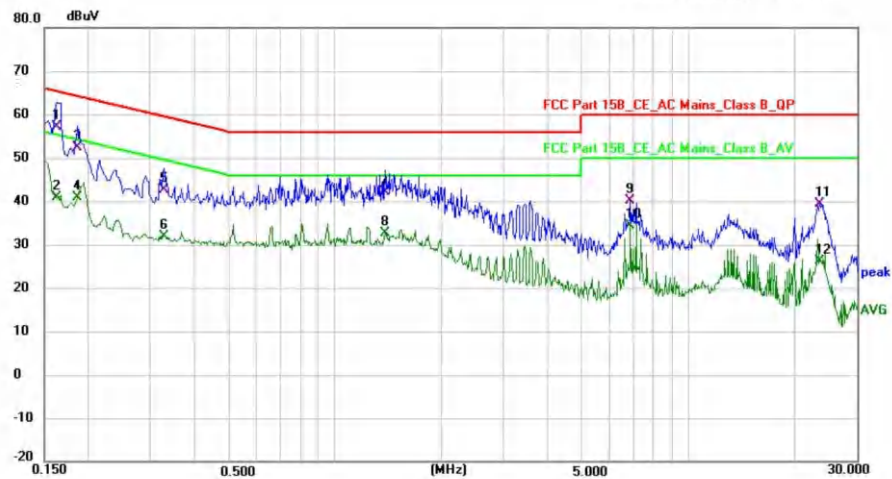

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.1620	47.51	9.63	57.14	65.36	-8.22	QP	P	
2	0.1620	31.22	9.63	40.85	55.36	-14.51	AVG	P	
3	0.1860	42.88	9.48	52.36	64.21	-11.85	QP	P	
4	0.1860	31.35	9.48	40.83	54.21	-13.38	AVG	P	
5	0.3260	33.22	9.40	42.62	59.55	-16.93	QP	P	
6	0.3260	22.53	9.40	31.93	49.55	-17.62	AVG	P	
7	1.3820	32.31	9.84	42.15	56.00	-13.85	QP	P	
8	1.3820	22.84	9.84	32.68	46.00	-13.32	AVG	P	
9	6.8580	30.25	9.79	40.04	60.00	-19.96	QP	P	
10	6.8580	24.57	9.79	34.36	50.00	-15.64	AVG	P	
11	23.6220	29.82	9.60	39.42	60.00	-20.58	QP	P	
12	23.6220	16.42	9.60	26.02	50.00	-23.98	AVG	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-Shielded Room Phase: **N** Temperature: 26 °C
EUT: Laser 3D Scanner Humidity: 54 %RH
M/N: FreeTrak WT Test Engineer: Felix
Test Mode: WiFi Link
Test Voltage: AC 120V/60Hz
Note:

Conducted Emission Measurement

Test Date: 2026/1/22 15:04:17

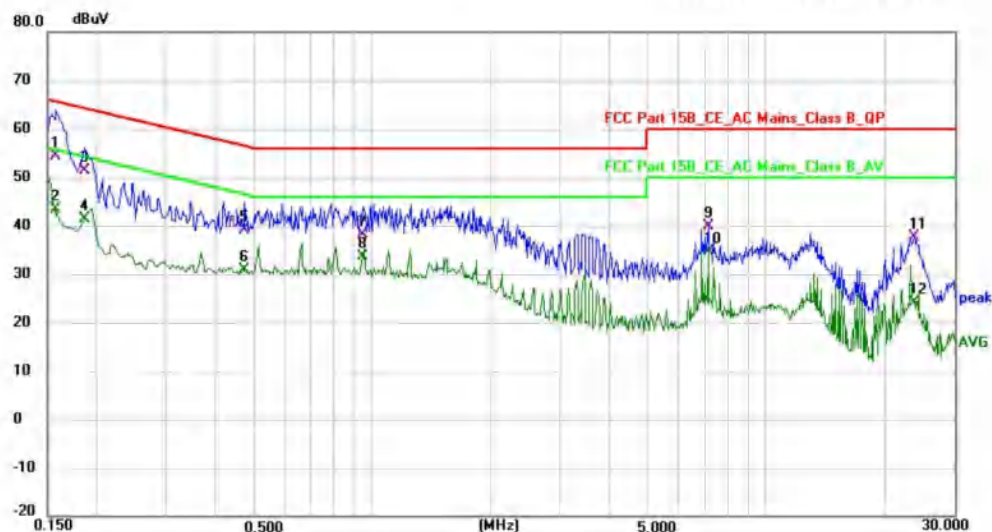

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.1573	44.79	9.57	54.36	65.61	-11.25	QP	P	
2	0.1573	33.92	9.57	43.49	55.61	-12.12	AVG	P	
3	0.1860	41.80	9.46	51.26	64.21	-12.95	QP	P	
4	0.1860	31.87	9.46	41.33	54.21	-12.88	AVG	P	
5	0.4740	29.53	9.62	39.15	56.44	-17.29	QP	P	
6	0.4740	21.17	9.62	30.79	46.44	-15.65	AVG	P	
7	0.9460	28.50	9.65	38.15	56.00	-17.85	QP	P	
8	0.9460	24.01	9.65	33.66	46.00	-12.34	AVG	P	
9	7.1100	30.17	9.69	39.86	60.00	-20.14	QP	P	
10	7.1100	24.98	9.69	34.67	50.00	-15.33	AVG	P	
11	23.6780	27.95	9.67	37.62	60.00	-22.38	QP	P	
12	23.6780	14.58	9.67	24.25	50.00	-25.75	AVG	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit