




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Horizontal	Temperature: 26 °C
EUT: 3D Printer	Distance: 3m	Humidity: 54 %RH
M/N: Ceramix-Nano	Test Engineer: Jeffrey	
Test Mode: N40 2452		
Test Voltage: AC 120V/60Hz		
Note:		

Radiated Emission Measurement

Test Date: 2026/5/14 20:12:45

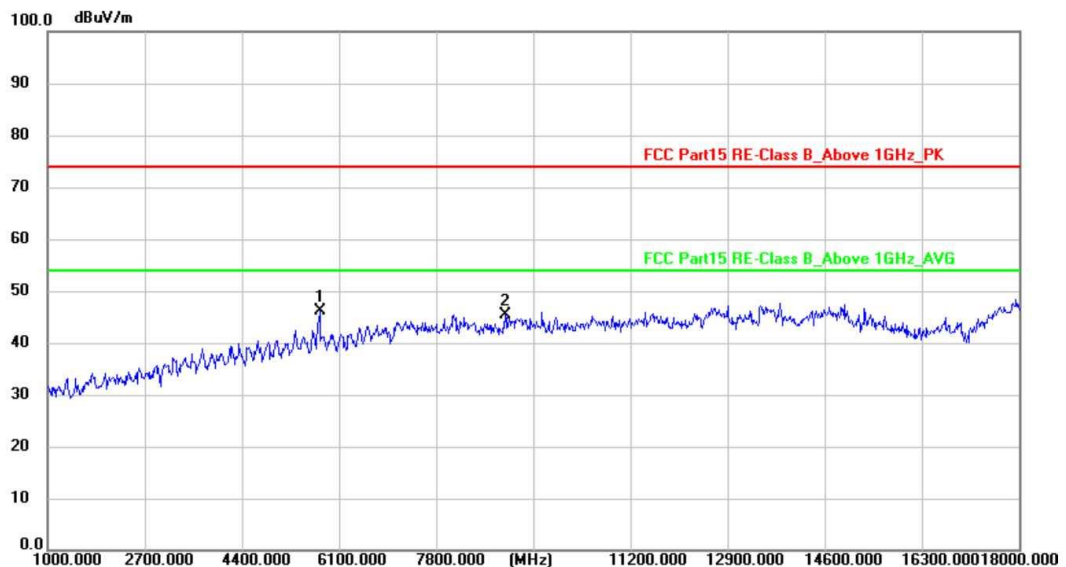

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5762.125	66.29	-20.21	46.08	74.00	-27.92	peak	150	176	P	
2	9021.875	61.97	-16.49	45.48	74.00	-28.52	peak	150	209	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Vertical	Temperature: 26 °C
EUT: 3D Printer	Distance: 3m	Humidity: 54 %RH
M/N: Ceramix-Nano	Test Engineer: Jeffrey	
Test Mode: N40 2452		
Test Voltage: AC 120V/60Hz		
Note:		

Radiated Emission Measurement

Test Date: 2026/5/14 20:17:57

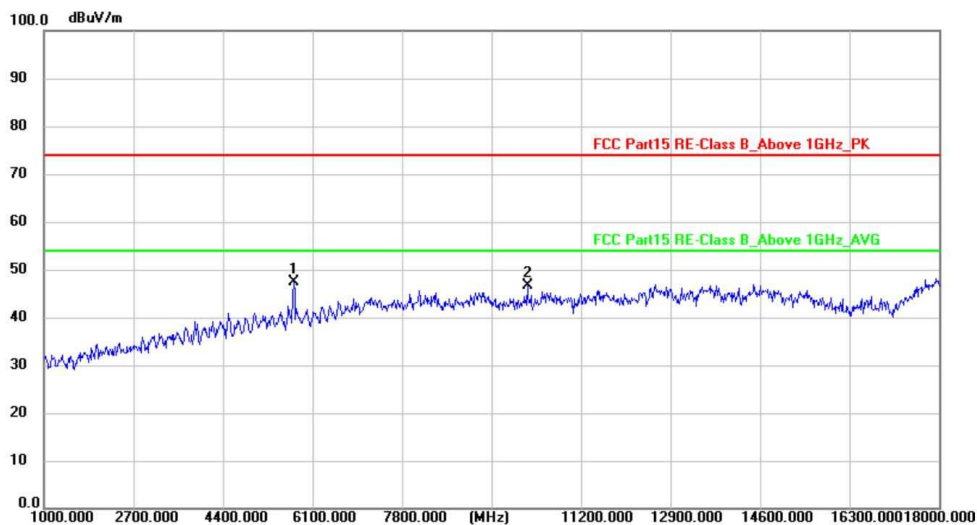

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5745.125	67.63	-20.25	47.38	74.00	-26.62	peak	150	112	P	
2	10192.750	62.43	-15.88	46.55	74.00	-27.45	peak	150	43	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

File: FCC 2\Data :#12

Page: 1

Engineer Signature:

Appendix B.7: Test Results of Radiated Emissions in Restricted Bands

802.11b/g: Both antenna 1 and 2 tested, only worst case reported.

802.11n: Both MIMO and SISO tested, only worst case MIMO reported.




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Horizontal	Temperature: 26 °C
EUT: 3D Printer	Distance: 3m	Humidity: 54 %RH
M/N: Ceramix-Nano	Test Engineer: Jeffrey	
Test Mode: ANT1 B 2412		
Test Voltage: AC 120V/60Hz		
Note:		

Radiated Emission Measurement

Test Date: 2026/5/18 18:46:57

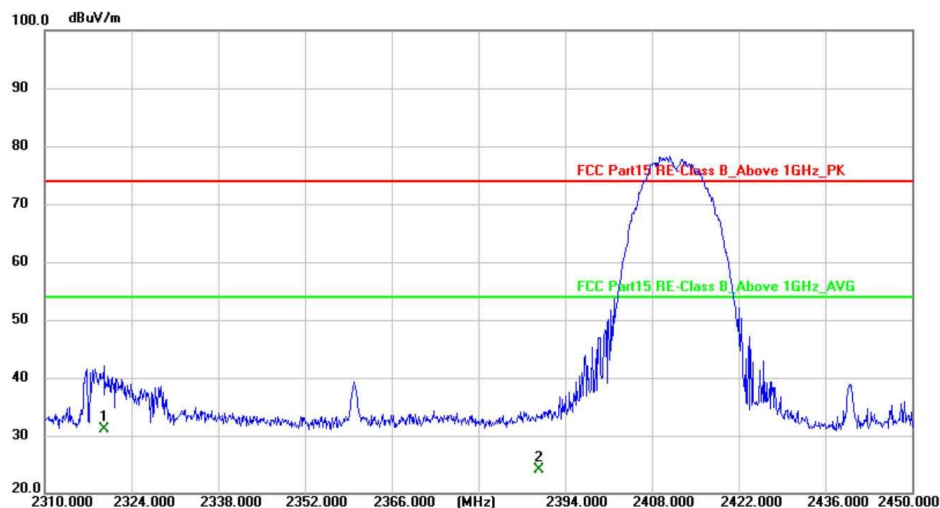

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2319.555	55.17	-24.13	31.04	54.00	-22.96	AVG	150	141	P	
2	2390.000	47.97	-23.89	24.08	54.00	-29.92	AVG	150	352	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Printer
M/N: Ceramix-Nano
Test Mode: ANT1 B 2412
Test Voltage: AC 120V/60Hz
Note:

Polarization: **Vertical**
Distance: 3m
Test Engineer: Jeffrey

Temperature: 26 °C
Humidity: 54 %RH

Radiated Emission Measurement

Test Date: 2026/5/18 18:53:03

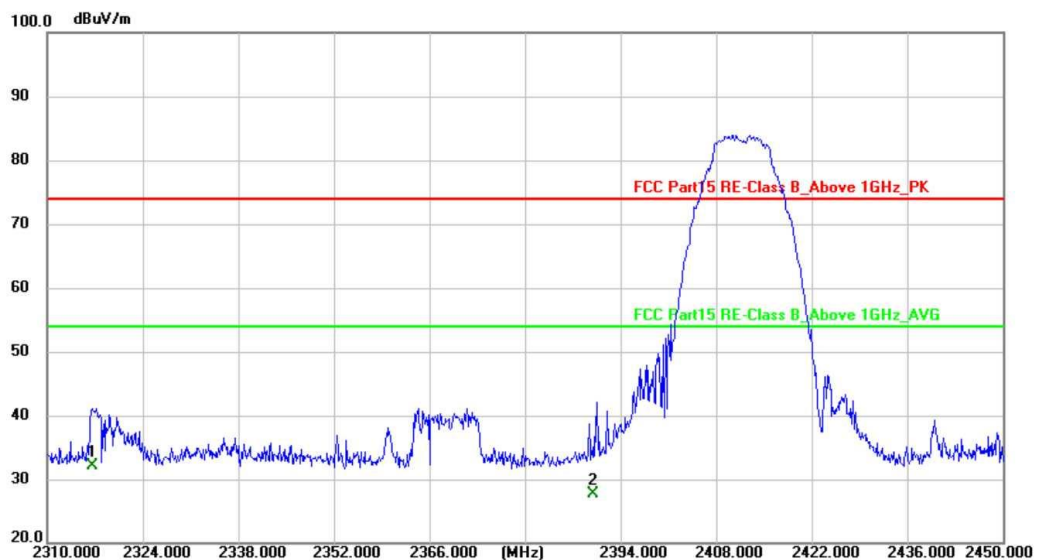

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2316.633	56.26	-24.12	32.14	54.00	-21.86	AVG	150	109	P	
2	2390.000	51.49	-23.89	27.60	54.00	-26.40	AVG	150	214	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

File: 2\Data :#2

Page: 1

Engineer Signature:



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Printer
M/N: Ceramix-Nano
Test Mode: ANT1 B 2462
Test Voltage: AC 120V/60Hz
Note:

Polarization: **Vertical**
Distance: 3m
Test Engineer: Jeffrey

Temperature: 26 °C
Humidity: 54 %RH

Radiated Emission Measurement

Test Date: 2026/5/18 19:04:51

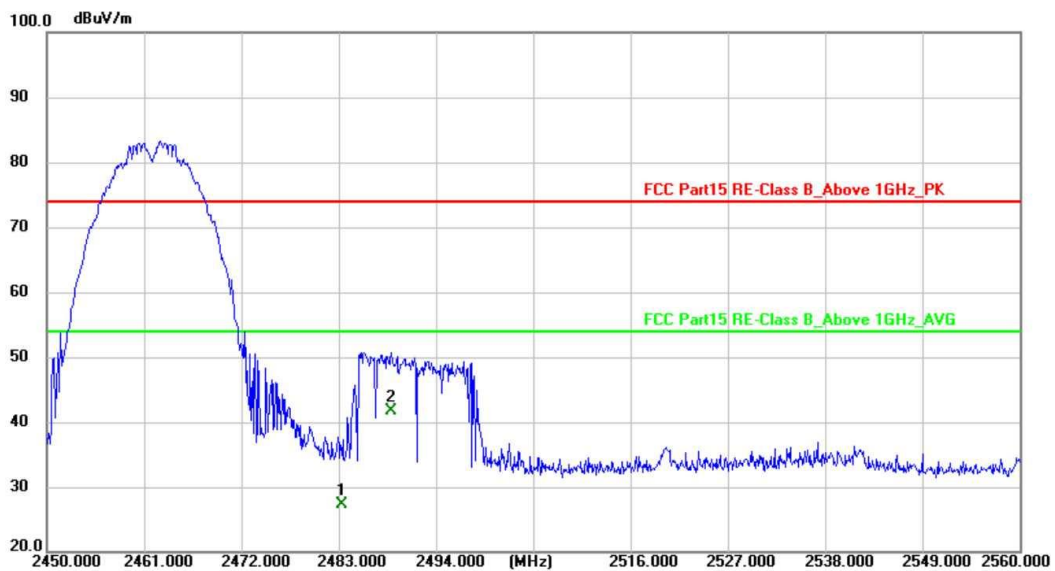

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	50.82	-23.58	27.24	54.00	-26.76	AVG	150	141	P	
2 *	2488.968	65.33	-23.57	41.76	54.00	-12.24	AVG	150	266	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Horizontal	Temperature: 26 °C
EUT: 3D Printer	Distance: 3m	Humidity: 54 %RH
M/N: Ceramix-Nano	Test Engineer: Jeffrey	
Test Mode: ANT1 B 2462		
Test Voltage: AC 120V/60Hz		
Note:		

Radiated Emission Measurement

Test Date: 2026/5/18 18:59:06

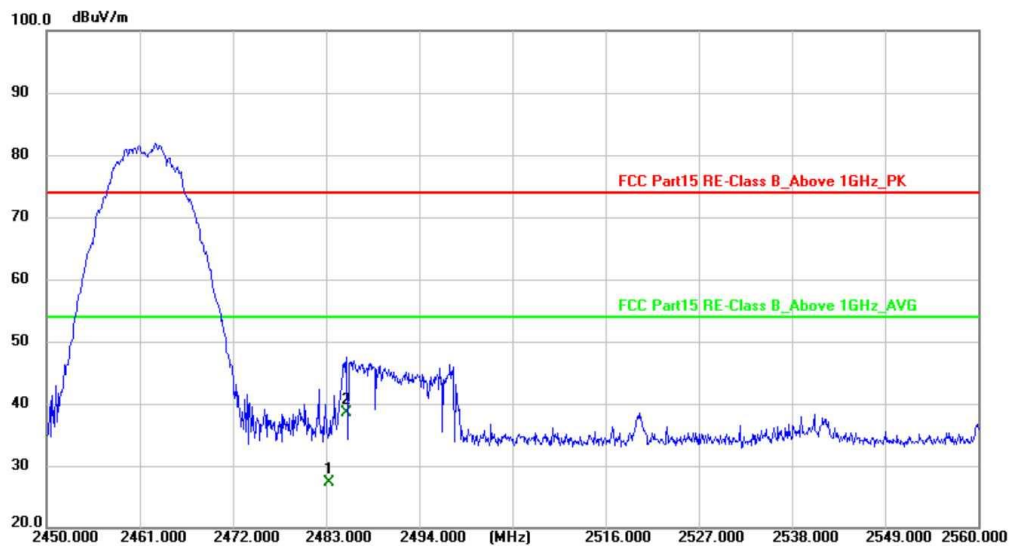

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	50.82	-23.58	27.24	54.00	-26.76	AVG	150	276	P	
2 *	2485.503	62.10	-23.58	38.52	54.00	-15.48	AVG	150	41	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

File: 2\Data :#3

Page: 1

Engineer Signature:




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Printer Distance: 3m Humidity: 54 %RH
M/N: Ceramix-Nano Test Engineer:
Test Mode: ANT1 G 2412MHz
Test Voltage: AC 120V/60Hz
Note:

Radiated Emission Measurement

Test Date: 2026/7/21 9:47:01

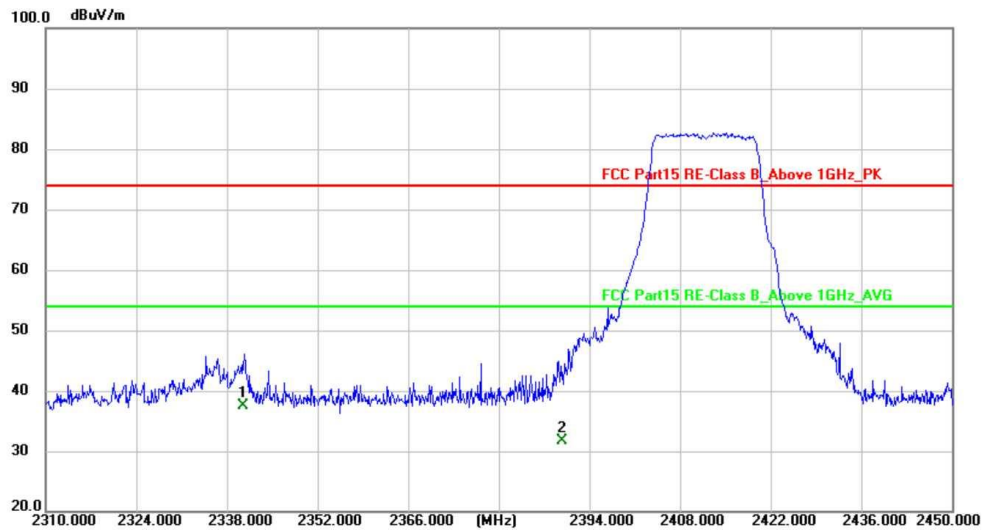

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2340.677	61.46	-24.05	37.41	54.00	-16.59	AVG	150	189	P	
2	2390.000	55.52	-23.89	31.63	54.00	-22.37	AVG	150	261	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

File: 2\Data :#16

Page: 1

Engineer Signature:



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Printer
M/N: Ceramix-Nano
Test Mode: ANT1 G 2412MHz
Test Voltage: AC 120V/60Hz
Note:

Polarization: **Vertical**
Distance: 3m
Test Engineer:

Temperature: 26 °C
Humidity: 54 %RH

Radiated Emission Measurement

Test Date: 2026/7/21 9:42:12

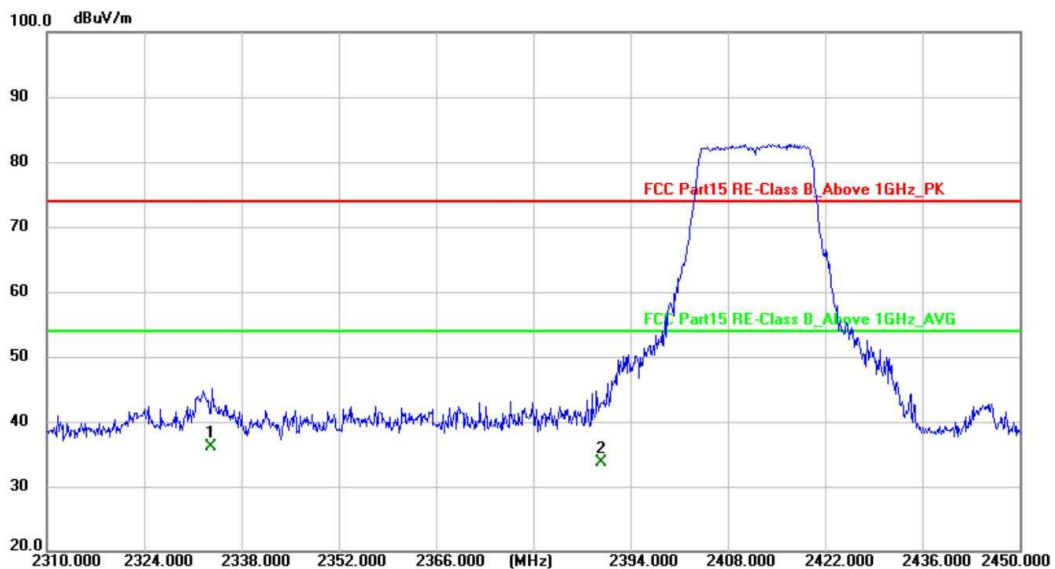

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2333.887	60.25	-24.08	36.17	54.00	-17.83	AVG	150	107	P	
2	2390.000	57.58	-23.89	33.69	54.00	-20.31	AVG	150	42	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Printer
M/N: Ceramix-Nano
Test Mode: ANT1 G 2462MHz
Test Voltage: AC 120V/60Hz
Note:

Polarization: **Horizontal**
Distance: 3m
Test Engineer:

Temperature: 26 °C
Humidity: 54 %RH

Radiated Emission Measurement

Test Date: 2026/7/21 9:38:04

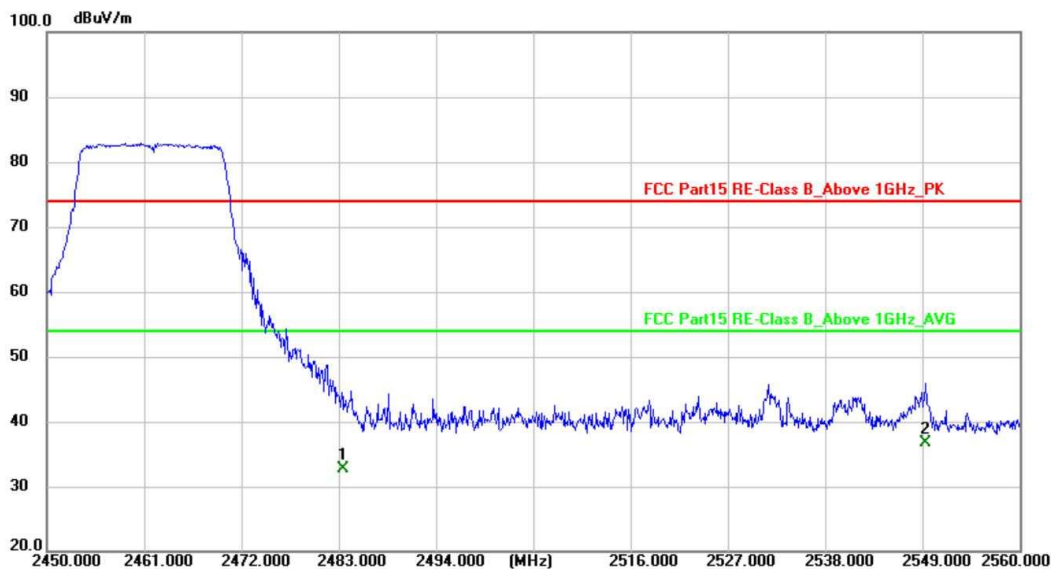

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	56.26	-23.58	32.68	54.00	-21.32	AVG	150	157	P	
2 *	2549.385	60.13	-23.36	36.77	54.00	-17.23	AVG	150	326	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Printer
M/N: Ceramix-Nano
Test Mode: ANT1 G 2462MHz
Test Voltage: AC 120V/60Hz
Note:

Polarization: **Vertical**
Distance: 3m
Test Engineer:

Temperature: 26 °C
Humidity: 54 %RH

Radiated Emission Measurement

Test Date: 2026/7/21 9:34:08

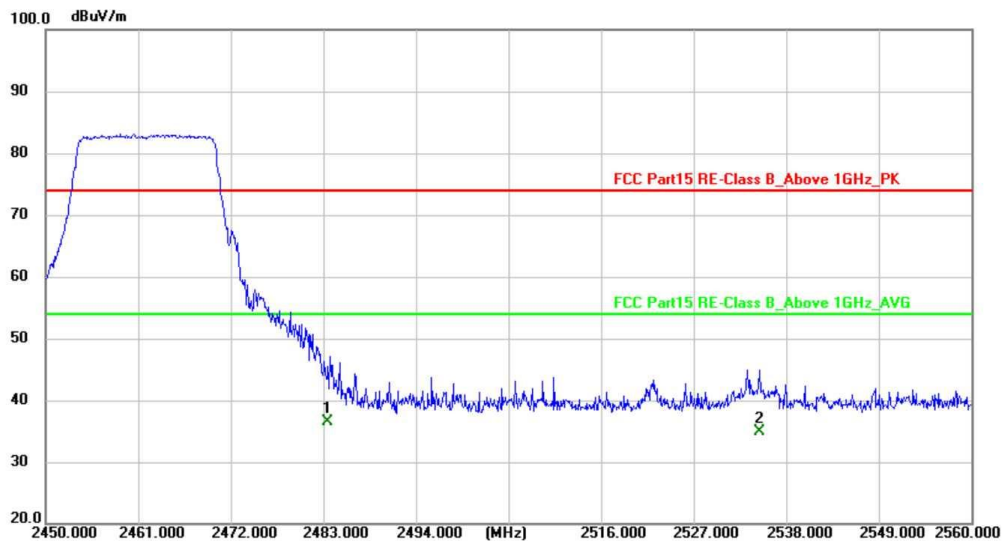

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2483.500	60.05	-23.58	36.47	54.00	-17.53	AVG	150	141	P	
2	2534.865	58.33	-23.41	34.92	54.00	-19.08	AVG	150	217	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

File: 2\Data :#13

Page: 1

Engineer Signature:



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Printer
M/N: Ceramix-Nano
Test Mode: N20 2462MHz
Test Voltage: AC 120V/60Hz
Note:

Polarization: **Vertical**
Distance: 3m
Test Engineer:

Temperature: 26 °C
Humidity: 54 %RH

Radiated Emission Measurement

Test Date: 2026/7/21 10:07:18

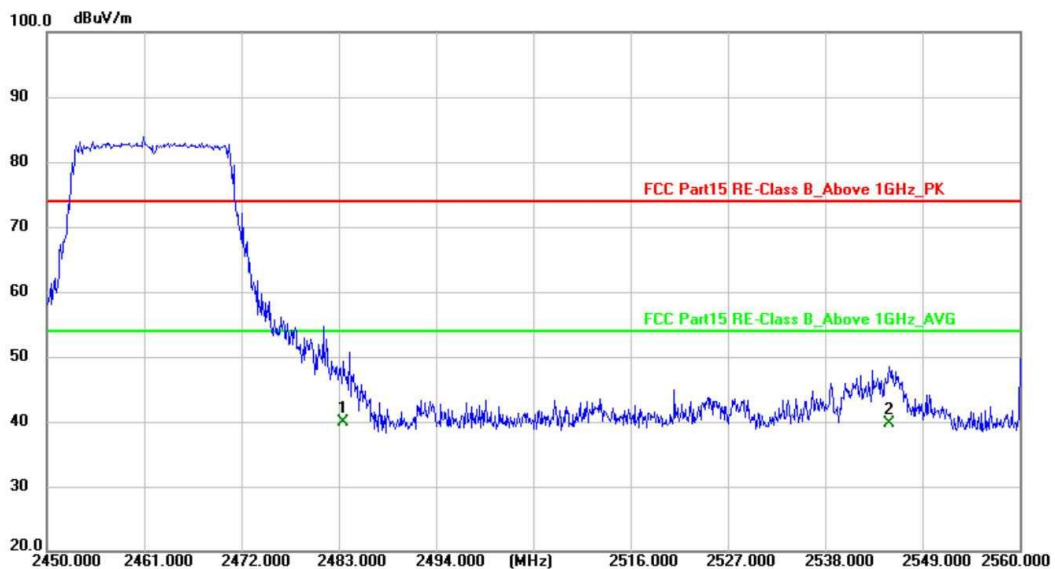

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2483.500	63.47	-23.58	39.89	54.00	-14.11	AVG	150	198	P	
2	2545.329	62.99	-23.38	39.61	54.00	-14.39	AVG	150	216	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Printer
M/N: Ceramix-Nano
Test Mode: N20 2462MHz
Test Voltage: AC 120V/60Hz
Note:

Polarization: **Vertical**
Distance: 3m
Test Engineer:

Temperature: 26 °C
Humidity: 54 %RH

Radiated Emission Measurement

Test Date: 2026/7/21 10:03:23

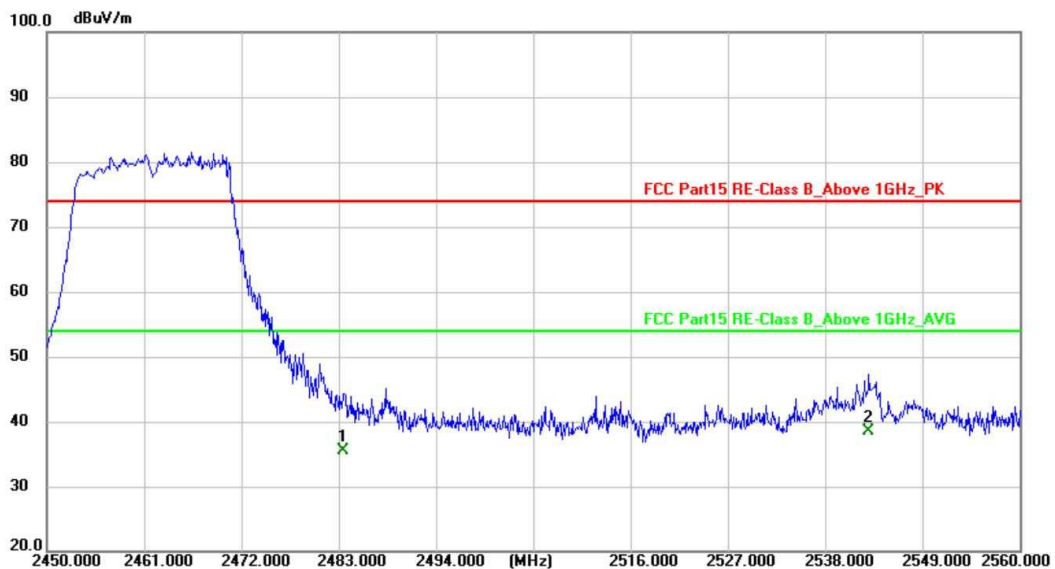

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	59.17	-23.58	35.59	54.00	-18.41	AVG	150	215	P	
2 *	2542.991	61.86	-23.39	38.47	54.00	-15.53	AVG	150	107	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Printer
M/N: Ceramix-Nano
Test Mode: N20 2412MHz
Test Voltage: AC 120V/60Hz
Note:

Polarization: **Horizontal**
Distance: 3m
Test Engineer:

Temperature: 26 °C
Humidity: 54 %RH

Radiated Emission Measurement

Test Date: 2026/7/21 9:57:37

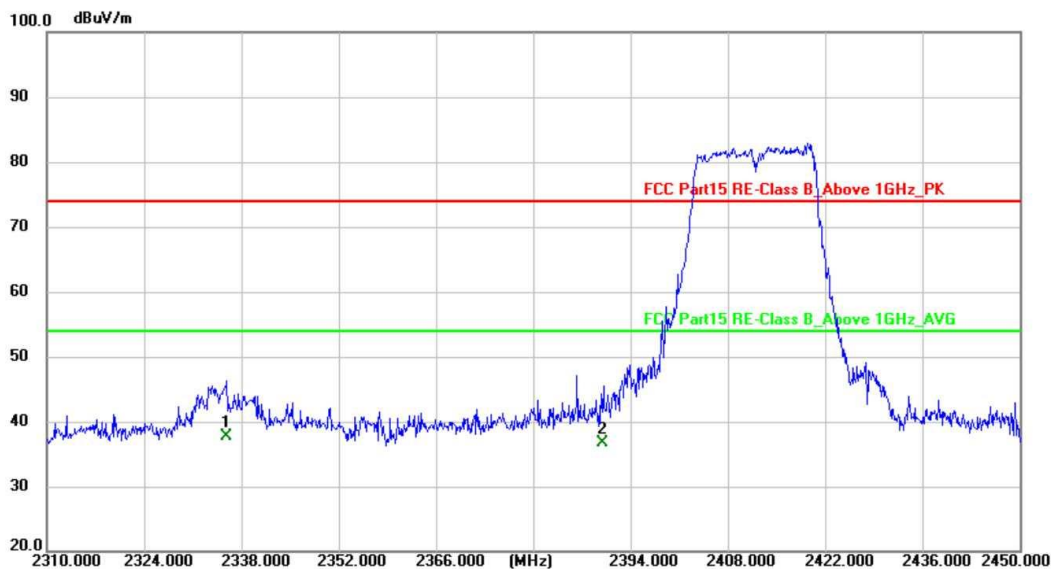

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2336.005	61.85	-24.06	37.79	54.00	-16.21	AVG	150	188	P	
2	2390.000	60.57	-23.89	36.68	54.00	-17.32	AVG	150	214	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Printer
M/N: Ceramix-Nano
Test Mode: N20 2412MHz
Test Voltage: AC 120V/60Hz
Note:

Polarization: **Vertical**
Distance: 3m
Test Engineer:

Temperature: 26 °C
Humidity: 54 %RH

Radiated Emission Measurement

Test Date: 2026/7/21 9:52:14

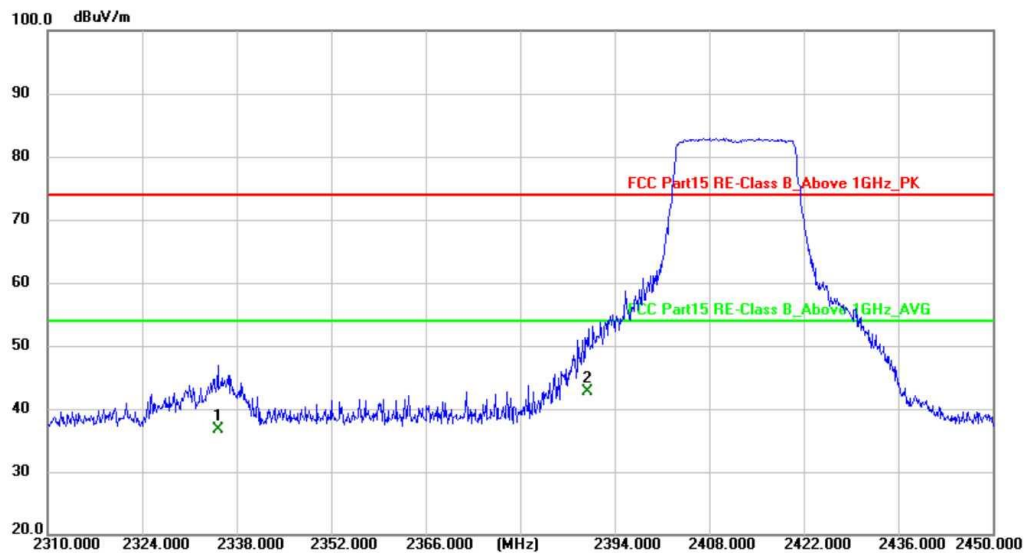

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2335.270	60.85	-24.07	36.78	54.00	-17.22	AVG	150	76	P	
2 *	2390.000	66.64	-23.89	42.75	54.00	-11.25	AVG	150	131	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

File: 2\Data :#17

Page: 1

Engineer Signature:



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Printer
M/N: Ceramix-Nano
Test Mode: N40 2452
Test Voltage: AC 120V/60Hz
Note:

Polarization: **Horizontal**
Distance: 3m
Test Engineer: Jeffrey

Temperature: 26 °C
Humidity: 54 %RH

Radiated Emission Measurement

Test Date: 2026/5/18 19:43:14

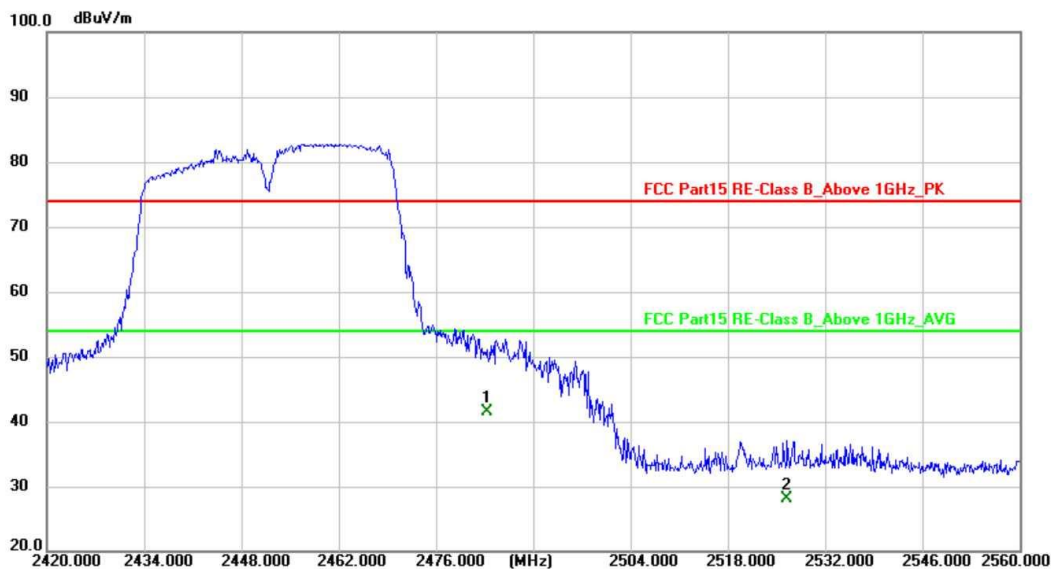

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2483.500	65.16	-23.58	41.58	54.00	-12.42	AVG	150	278	P	
2	2526.628	51.50	-23.45	28.05	54.00	-25.95	AVG	150	198	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Printer
M/N: Ceramix-Nano
Test Mode: N40 2452
Test Voltage: AC 120V/60Hz
Note:

Polarization: **Vertical**
Distance: 3m
Test Engineer: Jeffrey

Temperature: 26 °C
Humidity: 54 %RH

Radiated Emission Measurement

Test Date: 2026/5/18 19:38:36

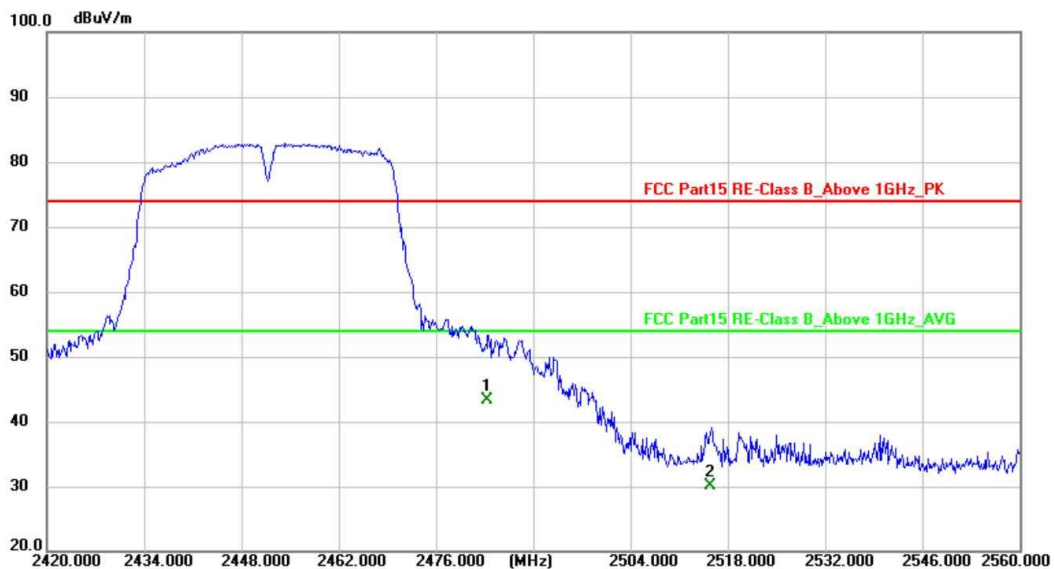

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2483.500	66.92	-23.58	43.34	54.00	-10.66	AVG	150	216	P	
2	2515.742	53.58	-23.48	30.10	54.00	-23.90	AVG	150	142	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Printer
M/N: Ceramix-Nano
Test Mode: N40 2422
Test Voltage: AC 120V/60Hz
Note:

Polarization: **Vertical**
Distance: 3m
Test Engineer: Jeffrey

Temperature: 26 °C
Humidity: 54 %RH

Radiated Emission Measurement

Test Date: 2026/5/18 19:33:47

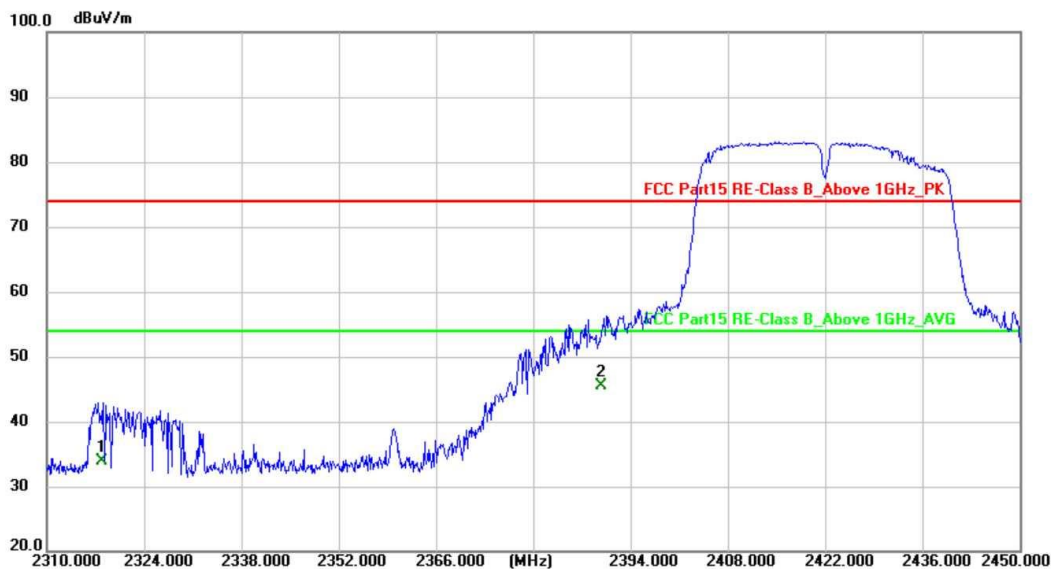

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2318.137	58.06	-24.13	33.93	54.00	-20.07	AVG	150	175	P	
2 *	2390.000	69.37	-23.89	45.48	54.00	-8.52	AVG	150	211	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Printer
M/N: Ceramix-Nano
Test Mode: N40 2422
Test Voltage: AC 120V/60Hz
Note:

Polarization: **Horizontal**
Distance: 3m
Test Engineer: Jeffrey

Temperature: 26 °C
Humidity: 54 %RH

Radiated Emission Measurement

Test Date: 2026/5/18 19:29:28

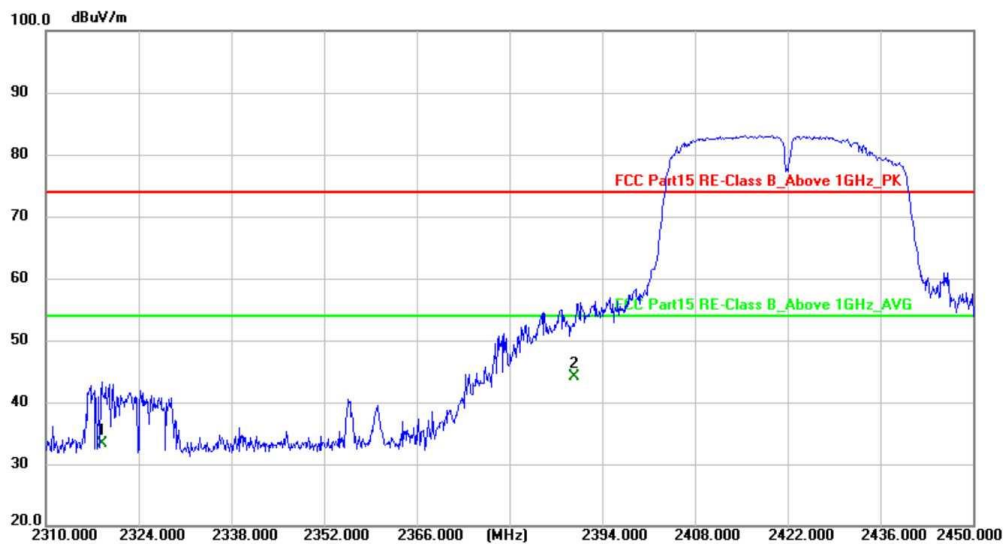

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2318.435	57.42	-24.13	33.29	54.00	-20.71	AVG	150	176	P	
2 *	2390.000	67.94	-23.89	44.05	54.00	-9.95	AVG	150	261	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

File: 2\Data :#9

Page: 1

Engineer Signature:

Appendix B.8: Test Results of Conducted Emission on AC Mains



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-Shielded Room
EUT: 3D Printer
M/N: Ceramix-Nano
Test Mode: Normal working with 2.4G
Test Voltage: AC120/60Hz
Note:

Phase: **L1**
Test Engineer: Jeffrey

Temperature: 26 °C
Humidity: 54 %RH

Conducted Emission Measurement

Test Date: 2026/5/12 10:04:39

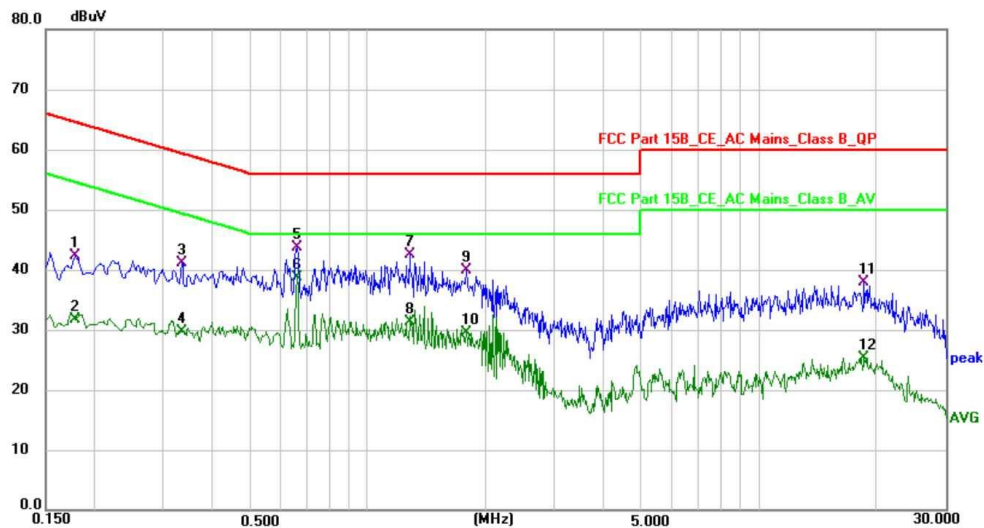

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1780	32.77	9.53	42.30	64.58	-22.28	QP	P	
2	0.1780	22.25	9.53	31.78	54.58	-22.80	AVG	P	
3	0.3339	31.74	9.40	41.14	59.35	-18.21	QP	P	
4	0.3339	20.40	9.40	29.80	49.35	-19.55	AVG	P	
5	0.6580	34.28	9.46	43.74	56.00	-12.26	QP	P	
6 *	0.6580	29.30	9.46	38.76	46.00	-7.24	AVG	P	
7	1.2820	32.74	9.83	42.57	56.00	-13.43	QP	P	
8	1.2820	21.52	9.83	31.35	46.00	-14.65	AVG	P	
9	1.7860	30.08	9.88	39.96	56.00	-16.04	QP	P	
10	1.7860	19.59	9.88	29.47	46.00	-16.53	AVG	P	
11	18.5340	28.25	9.66	37.91	60.00	-22.09	QP	P	
12	18.5340	15.56	9.66	25.22	50.00	-24.78	AVG	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

File: CE\Data :#7

Page: 1

Engineer Signature:



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-Shielded Room
EUT: 3D Printer
M/N: Ceramix-Nano
Test Mode: Normal working with 2.4G
Test Voltage: AC120/60Hz
Note:

Phase: **N**
Test Engineer: Jeffrey

Temperature: 26 °C
Humidity: 54 %RH

Conducted Emission Measurement

Test Date: 2026/5/12 10:09:50

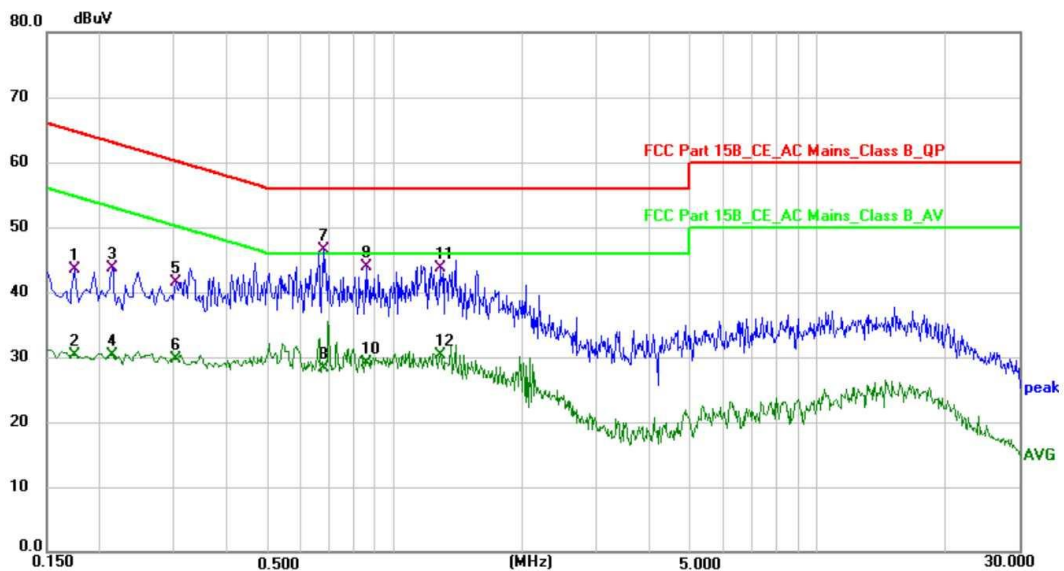

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1740	33.96	9.50	43.46	64.77	-21.31	QP	P	
2	0.1740	20.80	9.50	30.30	54.77	-24.47	AVG	P	
3	0.2140	34.36	9.40	43.76	63.05	-19.29	QP	P	
4	0.2140	20.88	9.40	30.28	53.05	-22.77	AVG	P	
5	0.3020	32.20	9.40	41.60	60.19	-18.59	QP	P	
6	0.3020	20.35	9.40	29.75	50.19	-20.44	AVG	P	
7 *	0.6820	36.60	9.88	46.48	56.00	-9.52	QP	P	
8	0.6820	18.35	9.88	28.23	46.00	-17.77	AVG	P	
9	0.8540	34.09	9.75	43.84	56.00	-12.16	QP	P	
10	0.8540	19.38	9.75	29.13	46.00	-16.87	AVG	P	
11	1.2780	34.07	9.54	43.61	56.00	-12.39	QP	P	
12	1.2780	20.76	9.54	30.30	46.00	-15.70	AVG	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit