




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: ax20 5240MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/14 22:55:06

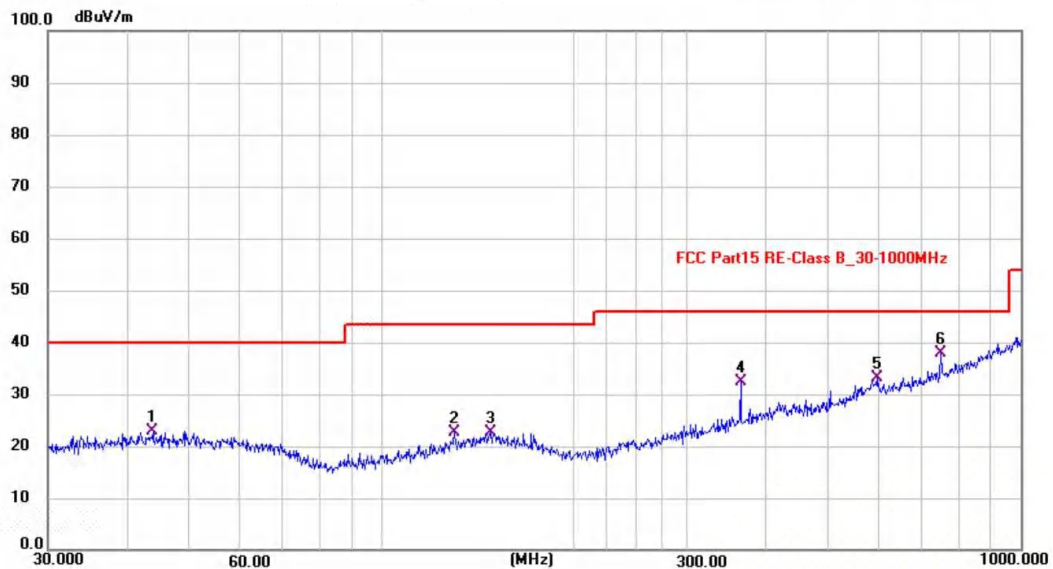

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	43.8119	8.47	14.41	22.88	40.00	-17.12	QP	150	275	P	
2	129.9226	9.39	13.21	22.60	43.50	-20.90	QP	150	53	P	
3	147.9214	8.51	14.08	22.59	43.50	-20.91	QP	150	318	P	
4	364.2595	15.63	16.72	32.35	46.00	-13.65	QP	150	270	P	
5	595.1329	10.43	22.75	33.18	46.00	-12.82	QP	150	132	P	
6 *	750.1083	12.51	25.43	37.94	46.00	-8.06	QP	150	210	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: ax40 5190MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/14 23:00:57

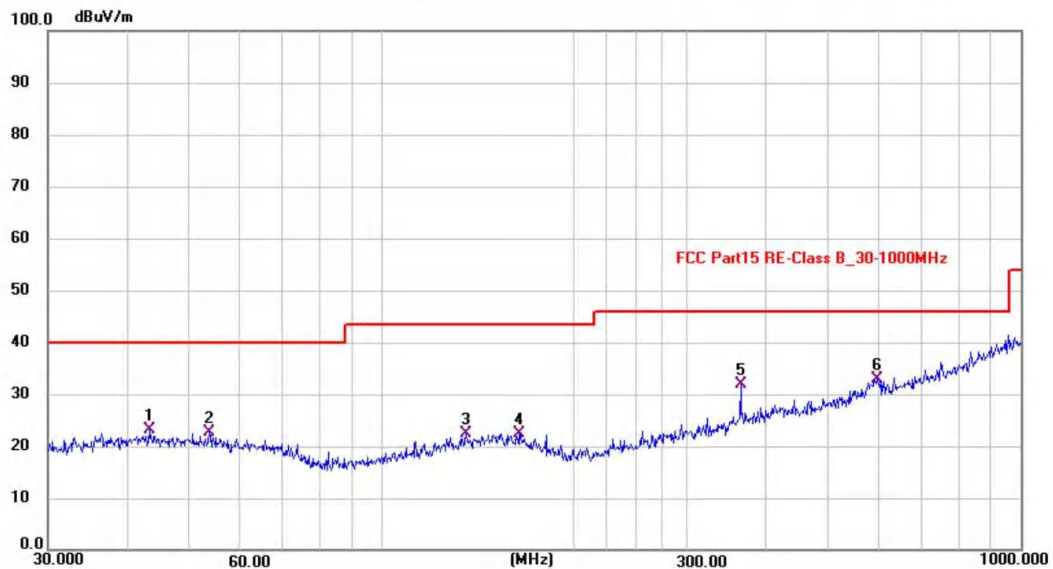

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	43.2017	8.73	14.43	23.16	40.00	-16.84	QP	150	115	P	
2	53.6932	8.80	13.76	22.56	40.00	-17.44	QP	150	82	P	
3	135.5062	8.77	13.60	22.37	43.50	-21.13	QP	150	305	P	
4	163.7550	8.38	13.98	22.36	43.50	-21.14	QP	150	300	P	
5	364.2595	15.16	16.72	31.88	46.00	-14.12	QP	150	152	P	
6 *	595.1329	10.10	22.75	32.85	46.00	-13.15	QP	150	64	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Vertical	Temperature: 26 °C
EUT: 3D Scanner	Distance: 3m	Humidity: 54 %RH
M/N: Einstar Rockit	Test Engineer: Felix	
Test Mode: ax40 5190MHz		
Test Voltage: DC 3.6V		
Note:		

Radiated Emission Measurement

Test Date: 2025/7/14 23:05:28

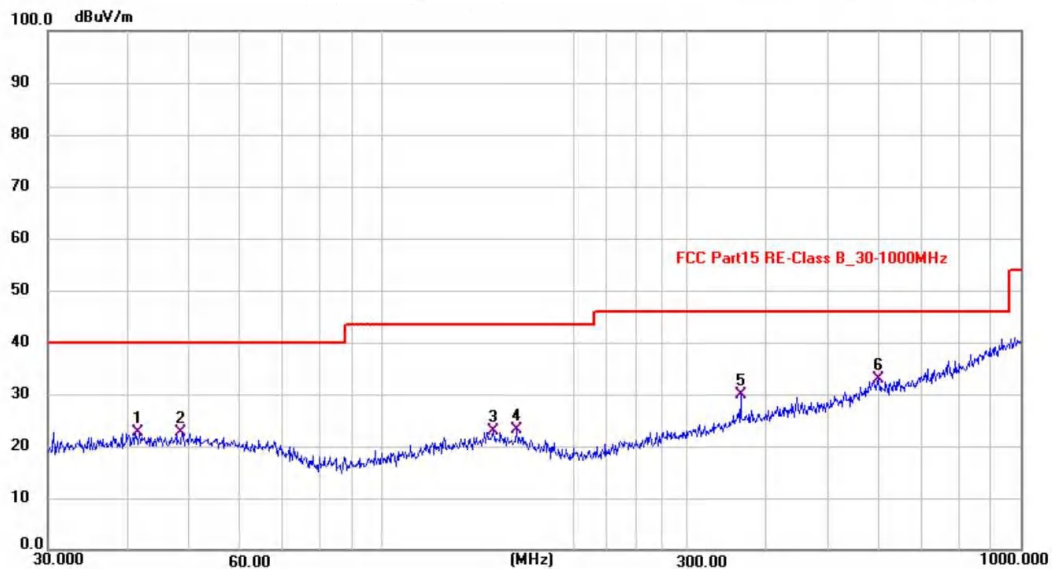

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	41.7129	8.03	14.49	22.52	40.00	-17.48	QP	150	204	P	
2	48.6719	8.39	14.20	22.59	40.00	-17.41	QP	150	318	P	
3	149.4857	8.74	14.11	22.85	43.50	-20.65	QP	150	125	P	
4	162.6106	8.94	14.10	23.04	43.50	-20.46	QP	150	146	P	
5	364.2595	13.11	16.72	29.83	46.00	-16.17	QP	150	222	P	
6 *	599.3212	10.05	22.86	32.91	46.00	-13.09	QP	150	115	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
 1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
 Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Vertical	Temperature: 26 °C
EUT: 3D Scanner	Distance: 3m	Humidity: 54 %RH
M/N: Einstar Rockit	Test Engineer: Felix	
Test Mode: ax40 5230MHz		
Test Voltage: DC 3.6V		
Note:		

Radiated Emission Measurement

Test Date: 2025/7/14 23:10:04

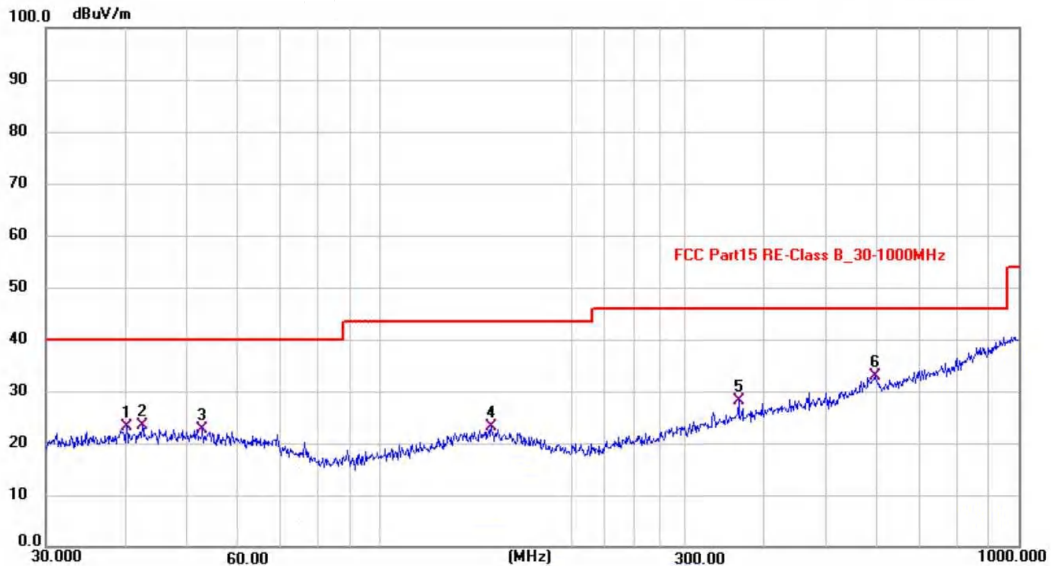

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	40.1347	8.67	14.56	23.23	40.00	-16.77	QP	150	218	P	
2	42.4508	8.86	14.47	23.33	40.00	-16.67	QP	150	70	P	
3	52.7600	8.81	13.86	22.67	40.00	-17.33	QP	150	83	P	
4	149.4857	8.97	14.11	23.08	43.50	-20.42	QP	150	84	P	
5	364.2595	11.51	16.72	28.23	46.00	-17.77	QP	150	13	P	
6 *	595.1329	10.16	22.75	32.91	46.00	-13.09	QP	150	89	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: ax40 5230MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/14 23:15:37

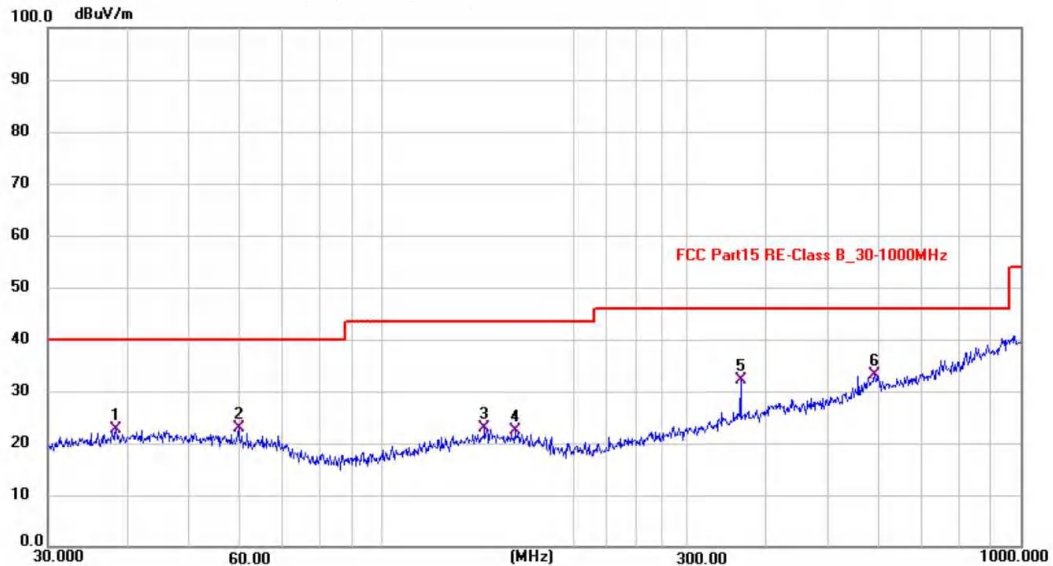

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	38.3462	8.35	14.33	22.68	40.00	-17.32	QP	150	207	P	
2	59.6493	9.66	13.15	22.81	40.00	-17.19	QP	150	31	P	
3	144.8418	8.81	14.01	22.82	43.50	-20.68	QP	150	275	P	
4	161.4742	8.15	14.20	22.35	43.50	-21.15	QP	150	176	P	
5	364.2595	15.47	16.72	32.19	46.00	-13.81	QP	150	78	P	
6 *	590.9737	10.44	22.64	33.08	46.00	-12.92	QP	150	108	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Horizontal	Temperature: 26 °C
EUT: 3D Scanner	Distance: 3m	Humidity: 54 %RH
M/N: Einstar Rockit	Test Engineer: Felix	
Test Mode: ax80 5210MHz		
Test Voltage: DC 3.6V		
Note:		

Radiated Emission Measurement

Test Date: 2025/7/14 23:20:21

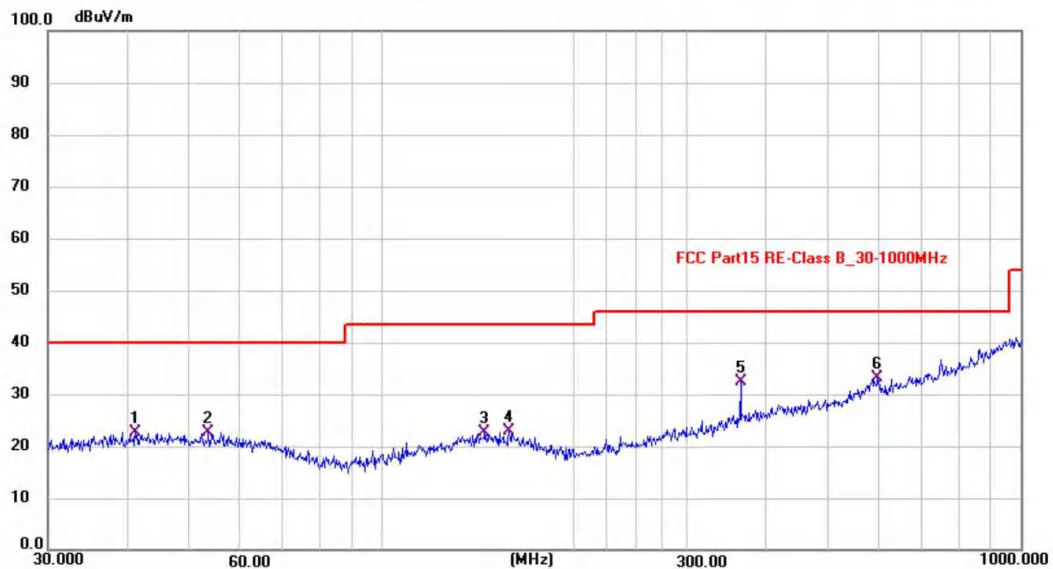

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	41.1320	8.22	14.52	22.74	40.00	-17.26	QP	150	267	P	
2	53.5052	8.91	13.78	22.69	40.00	-17.31	QP	150	131	P	
3	144.8418	8.68	14.01	22.69	43.50	-20.81	QP	150	167	P	
4	158.1123	8.60	14.31	22.91	43.50	-20.59	QP	150	83	P	
5	364.2595	15.64	16.72	32.36	46.00	-13.64	QP	150	246	P	
6 *	597.2234	10.20	22.81	33.01	46.00	-12.99	QP	150	21	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: ax80 5210MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/14 23:25:25

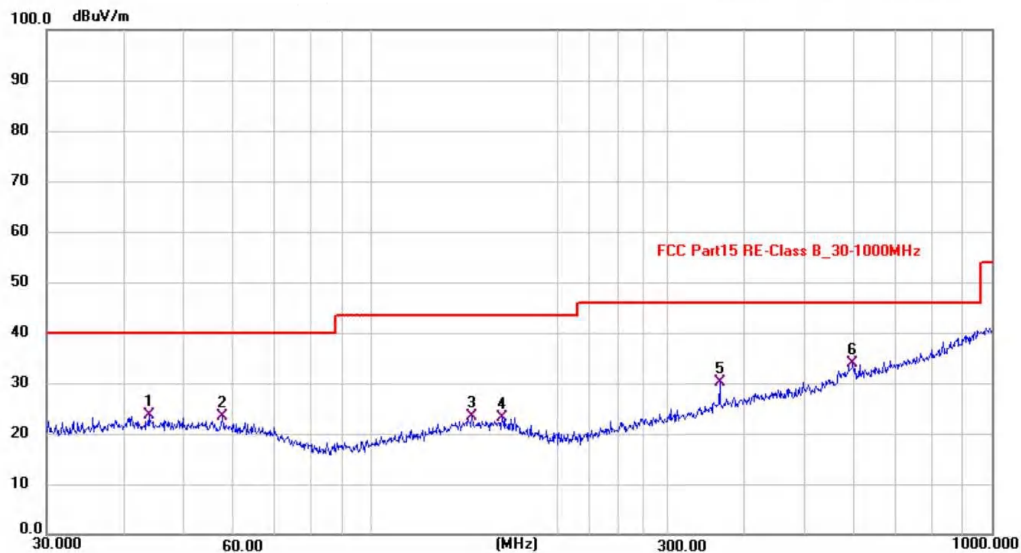

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	43.8120	9.28	14.41	23.69	40.00	-16.31	QP	150	128	P	
2	57.5940	10.05	13.36	23.41	40.00	-16.59	QP	150	181	P	
3	145.3505	9.42	14.02	23.44	43.50	-20.06	QP	150	27	P	
4	162.6105	9.13	14.10	23.23	43.50	-20.27	QP	150	189	P	
5	364.2595	13.51	16.72	30.23	46.00	-15.77	QP	150	206	P	
6 *	597.2234	11.07	22.81	33.88	46.00	-12.12	QP	150	218	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

4.2 U-NII-1 Band:



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Horizontal	Temperature: 26 °C
EUT: 3D Scanner	Distance: 3m	Humidity: 54 %RH
M/N: Einstar Rockit	Test Engineer: Felix	
Test Mode: a 5180MHz		
Test Voltage: DC 3.6V		
Note:		

Radiated Emission Measurement

Test Date: 2025/7/15 9:05:06



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	4049.375	52.48	-13.26	39.22	74.00	-34.78	peak	150	158	P	
2	5668.625	49.34	-10.24	39.10	74.00	-34.90	peak	150	205	P	
3	6010.750	48.37	-9.48	38.89	74.00	-35.11	peak	150	228	P	
4	8365.250	44.61	-8.12	36.49	74.00	-37.51	peak	150	237	P	
5	9270.500	42.81	-7.08	35.73	74.00	-38.27	peak	150	118	P	
6	14876.250	35.98	-2.14	33.84	74.00	-40.16	peak	150	85	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN25M6MM 001



Prüfbericht - Produkte
Test Report - Products

Page 93 of 224




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: a 5180MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/15 9:10:31

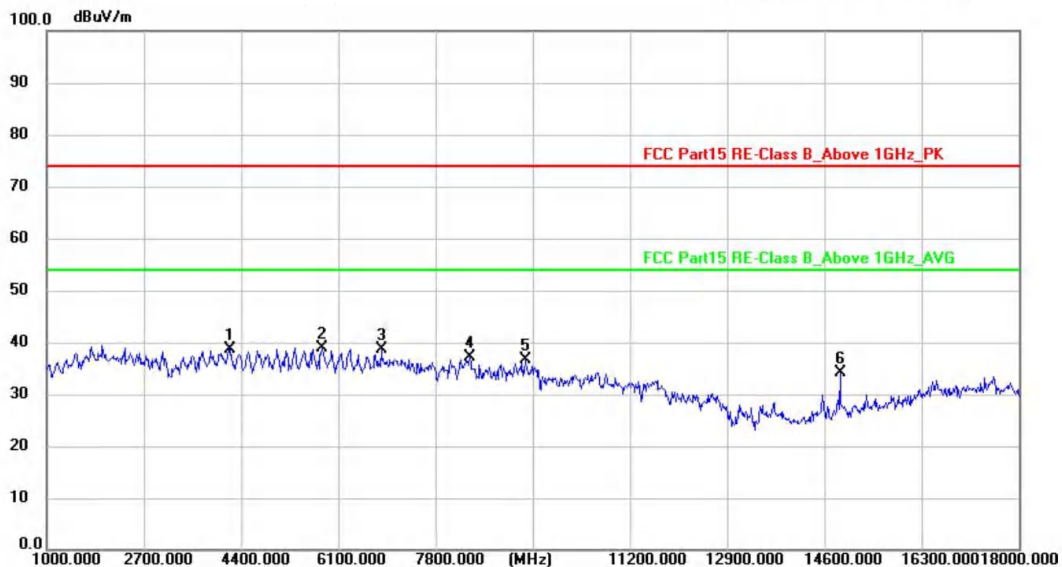

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4196.000	51.70	-13.02	38.68	74.00	-35.32	peak	150	156	P	
2 *	5821.625	48.78	-9.88	38.90	74.00	-35.10	peak	150	131	P	
3	6860.750	47.50	-8.94	38.56	74.00	-35.44	peak	150	284	P	
4	8405.625	45.16	-8.08	37.08	74.00	-36.92	peak	150	39	P	
5	9370.375	43.59	-6.96	36.63	74.00	-37.37	peak	150	226	P	
6	14874.125	36.27	-2.14	34.13	74.00	-39.87	peak	150	237	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: n20 5180MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/15 9:15:33

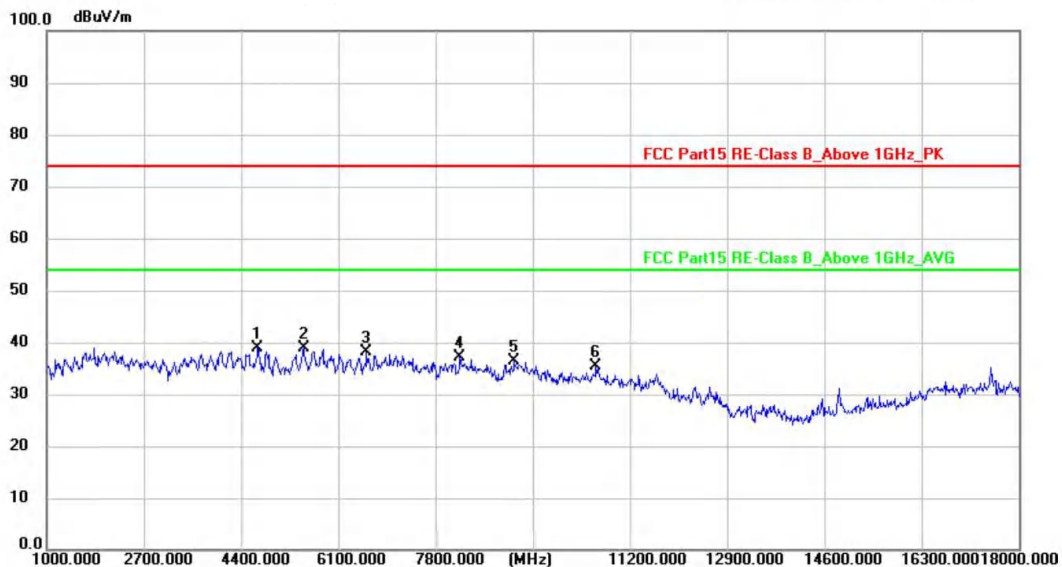

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4693.250	51.03	-12.26	38.77	74.00	-35.23	peak	150	312	P	
2 *	5492.250	49.63	-10.66	38.97	74.00	-35.03	peak	150	150	P	
3	6601.500	47.16	-9.10	38.06	74.00	-35.94	peak	150	189	P	
4	8231.375	45.31	-8.27	37.04	74.00	-36.96	peak	150	126	P	
5	9185.500	43.50	-7.17	36.33	74.00	-37.67	peak	150	229	P	
6	10617.750	40.59	-5.30	35.29	74.00	-38.71	peak	150	154	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B CN25M6MM 001



Prüfbericht - Produkte
Test Report - Products

Page 95 of 224




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: n20 5180MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/15 9:20:07

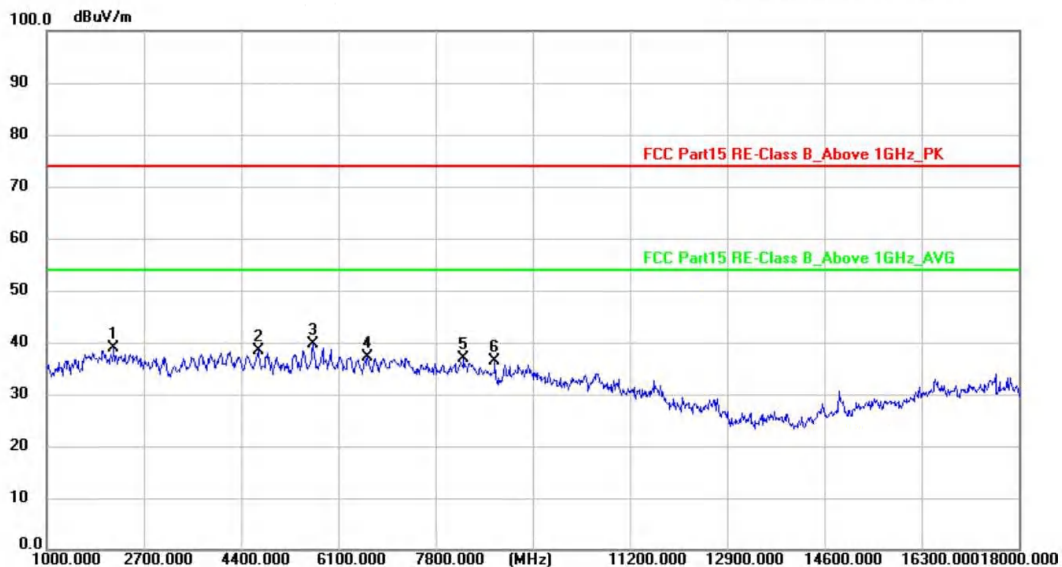

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2173.000	54.74	-15.95	38.79	74.00	-35.21	peak	150	256	P	
2	4706.000	50.67	-12.26	38.41	74.00	-35.59	peak	150	149	P	
3 *	5666.500	49.85	-10.24	39.61	74.00	-34.39	peak	150	59	P	
4	6618.500	46.12	-9.09	37.03	74.00	-36.97	peak	150	354	P	
5	8305.750	45.03	-8.18	36.85	74.00	-37.15	peak	150	213	P	
6	8849.750	43.91	-7.58	36.33	74.00	-37.67	peak	150	231	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B

CN25M6MM 001



Prüfbericht - Produkte
Test Report - Products

Page 96 of 224




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: ac20 5180MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/15 9:25:21

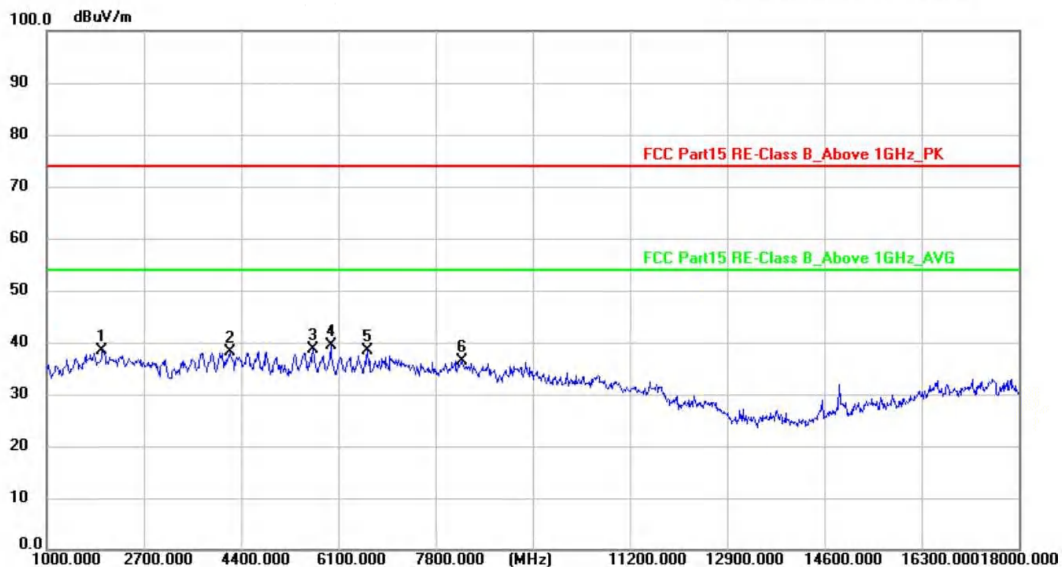

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1977.500	54.58	-16.27	38.31	74.00	-35.69	peak	150	158	P	
2	4204.500	51.20	-13.02	38.18	74.00	-35.82	peak	150	339	P	
3	5664.375	48.76	-10.25	38.51	74.00	-35.49	peak	150	68	P	
4 *	5978.875	49.01	-9.53	39.48	74.00	-34.52	peak	150	167	P	
5	6612.125	47.40	-9.10	38.30	74.00	-35.70	peak	150	135	P	
6	8269.625	44.72	-8.23	36.49	74.00	-37.51	peak	150	30	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN25M6MM 001



Prüfbericht - Produkte
Test Report - Products

Page 97 of 224




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: ac20 5180MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/15 9:30:47

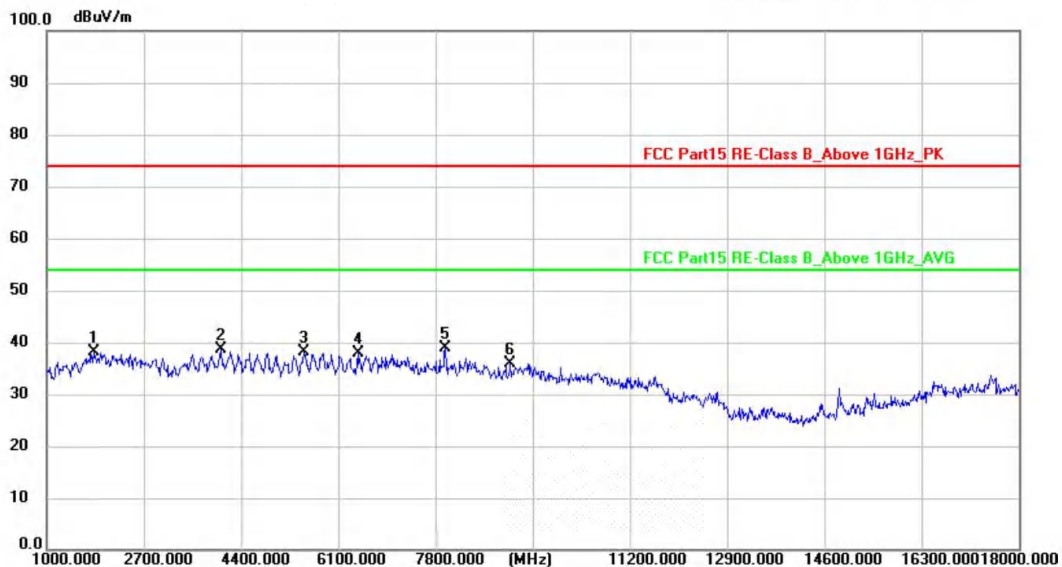

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1830.875	54.96	-16.86	38.10	74.00	-35.90	peak	150	0	P	
2	4051.500	51.88	-13.24	38.64	74.00	-35.36	peak	150	184	P	
3	5498.625	48.66	-10.64	38.02	74.00	-35.98	peak	150	38	P	
4	6446.375	47.09	-9.21	37.88	74.00	-36.12	peak	150	166	P	
5 *	7976.375	47.43	-8.54	38.89	74.00	-35.11	peak	150	239	P	
6	9121.750	43.16	-7.25	35.91	74.00	-38.09	peak	150	38	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B

CN25M6MM 001



Prüfbericht - Produkte
Test Report - Products

Page 98 of 224




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: ax20 5180MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/15 9:35:04

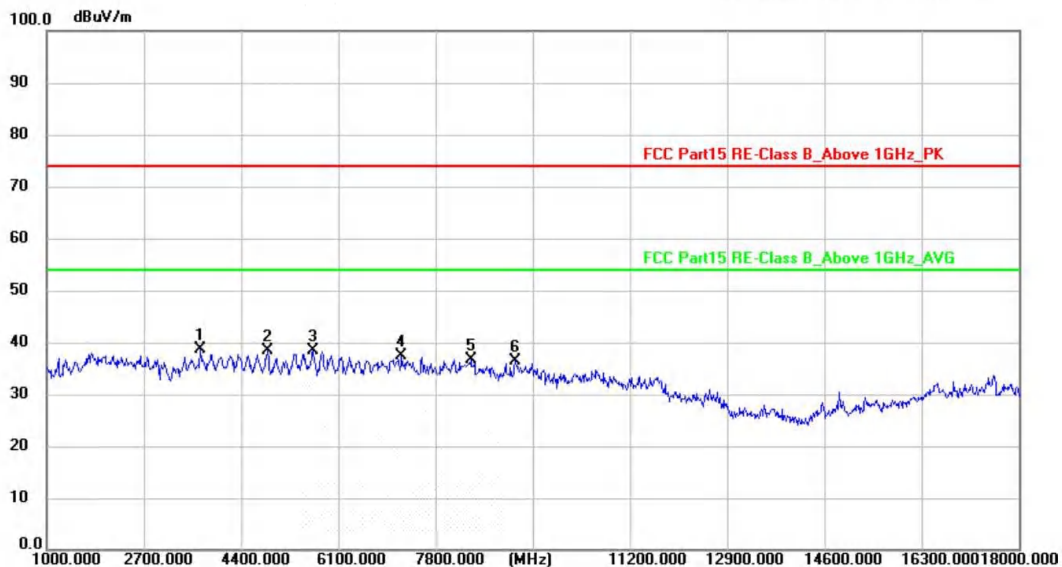

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	3696.625	52.49	-13.81	38.68	74.00	-35.32	peak	150	145	P	
2	4861.125	50.51	-12.01	38.50	74.00	-35.50	peak	150	288	P	
3	5666.500	48.58	-10.24	38.34	74.00	-35.66	peak	150	27	P	
4	7217.750	46.20	-8.78	37.42	74.00	-36.58	peak	150	186	P	
5	8424.750	44.62	-8.06	36.56	74.00	-37.44	peak	150	111	P	
6	9198.250	43.45	-7.16	36.29	74.00	-37.71	peak	150	352	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN25M6MM 001



Prüfbericht - Produkte
Test Report - Products

Page 99 of 224




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: ax20 5180MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/15 9:40:34

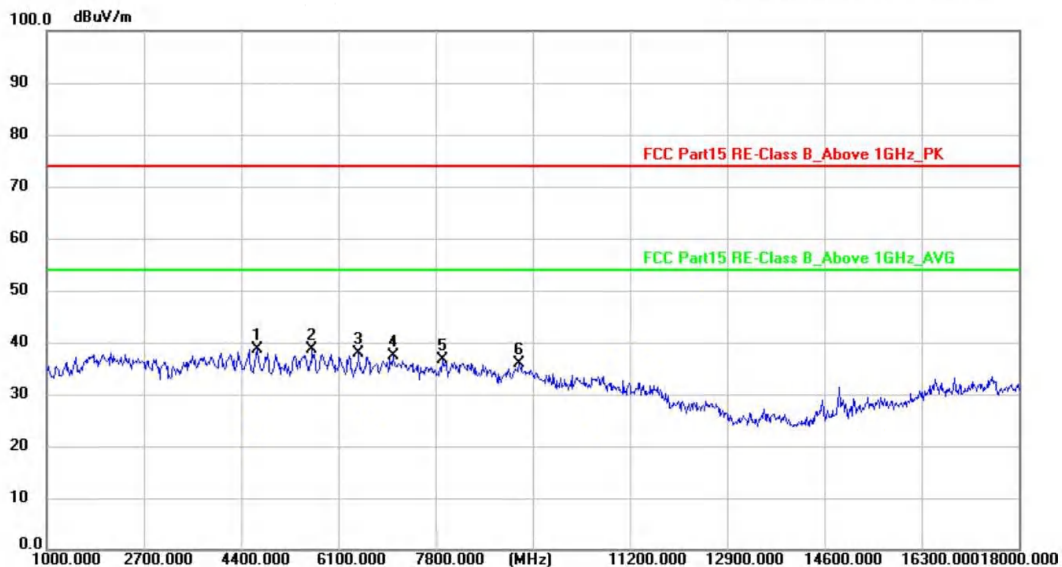

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	4680.500	51.04	-12.29	38.75	74.00	-35.25	peak	150	176	P	
2	5651.625	48.86	-10.27	38.59	74.00	-35.41	peak	150	216	P	
3	6467.625	47.11	-9.18	37.93	74.00	-36.07	peak	150	225	P	
4	7056.250	46.27	-8.83	37.44	74.00	-36.56	peak	150	91	P	
5	7933.875	45.06	-8.55	36.51	74.00	-37.49	peak	150	80	P	
6	9276.875	42.97	-7.07	35.90	74.00	-38.10	peak	150	181	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: n40 5190MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/15 9:45:57

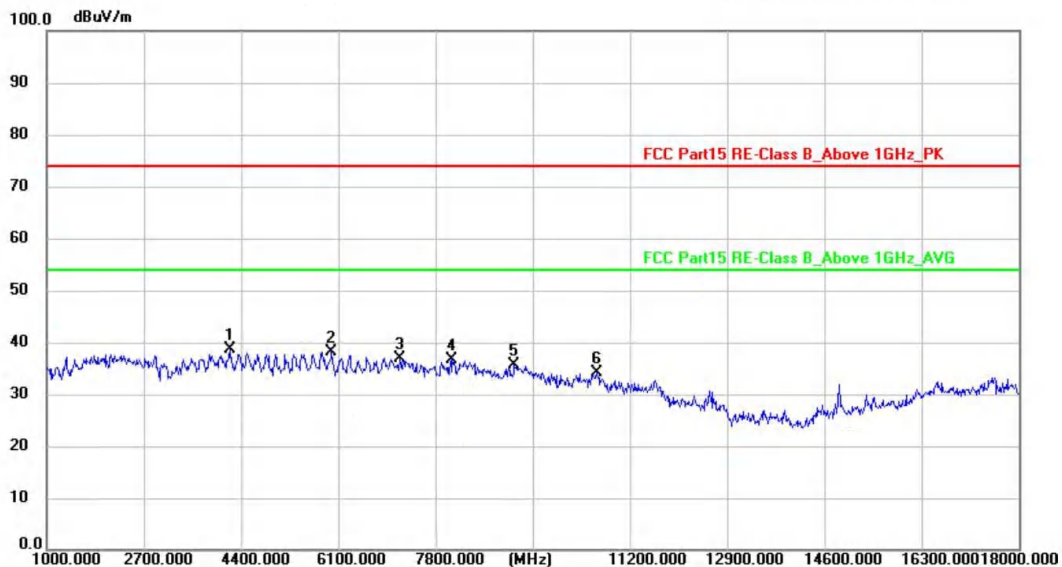

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	4208.750	51.64	-13.01	38.63	74.00	-35.37	peak	150	10	P	
2	5987.375	47.63	-9.51	38.12	74.00	-35.88	peak	150	202	P	
3	7183.750	45.74	-8.79	36.95	74.00	-37.05	peak	150	134	P	
4	8095.375	44.97	-8.42	36.55	74.00	-37.45	peak	150	124	P	
5	9187.625	42.91	-7.17	35.74	74.00	-38.26	peak	150	94	P	
6	10636.875	39.36	-5.28	34.08	74.00	-39.92	peak	150	337	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: n40 5190MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/15 9:50:21

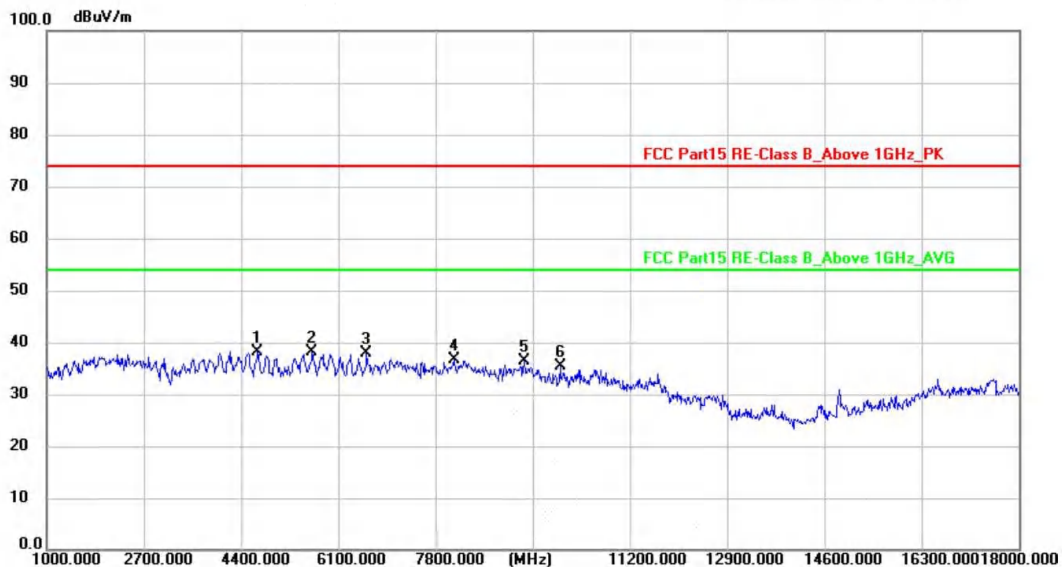

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	4689.000	50.47	-12.28	38.19	74.00	-35.81	peak	150	136	P	
2	5653.750	48.31	-10.27	38.04	74.00	-35.96	peak	150	42	P	
3	6603.625	47.00	-9.10	37.90	74.00	-36.10	peak	150	180	P	
4	8137.875	45.08	-8.38	36.70	74.00	-37.30	peak	150	354	P	
5	9359.750	43.37	-6.97	36.40	74.00	-37.60	peak	150	168	P	
6	9984.500	41.47	-6.20	35.27	74.00	-38.73	peak	150	295	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: ac40 5190MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/15 9:55:23

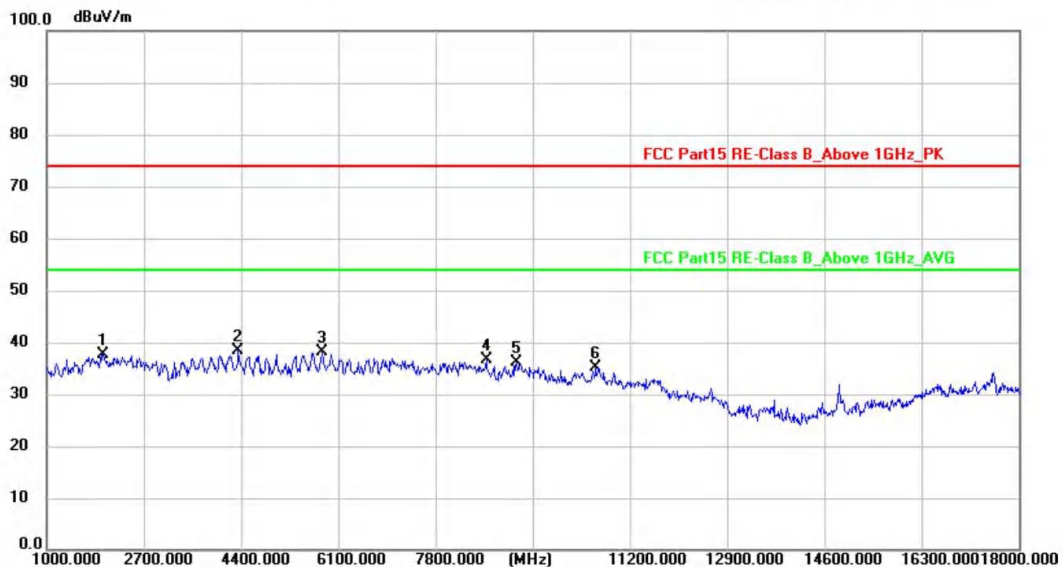

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1994.500	53.79	-16.20	37.59	74.00	-36.41	peak	150	112	P	
2 *	4363.875	51.20	-12.77	38.43	74.00	-35.57	peak	150	123	P	
3	5813.125	48.12	-9.91	38.21	74.00	-35.79	peak	150	195	P	
4	8686.125	44.39	-7.76	36.63	74.00	-37.37	peak	150	49	P	
5	9221.625	43.24	-7.13	36.11	74.00	-37.89	peak	150	3	P	
6	10617.750	40.41	-5.30	35.11	74.00	-38.89	peak	150	124	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B

CN25M6MM 001



Prüfbericht - Produkte
Test Report - Products

Page 103 of 224




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: ac40 5190MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/15 10:00:43

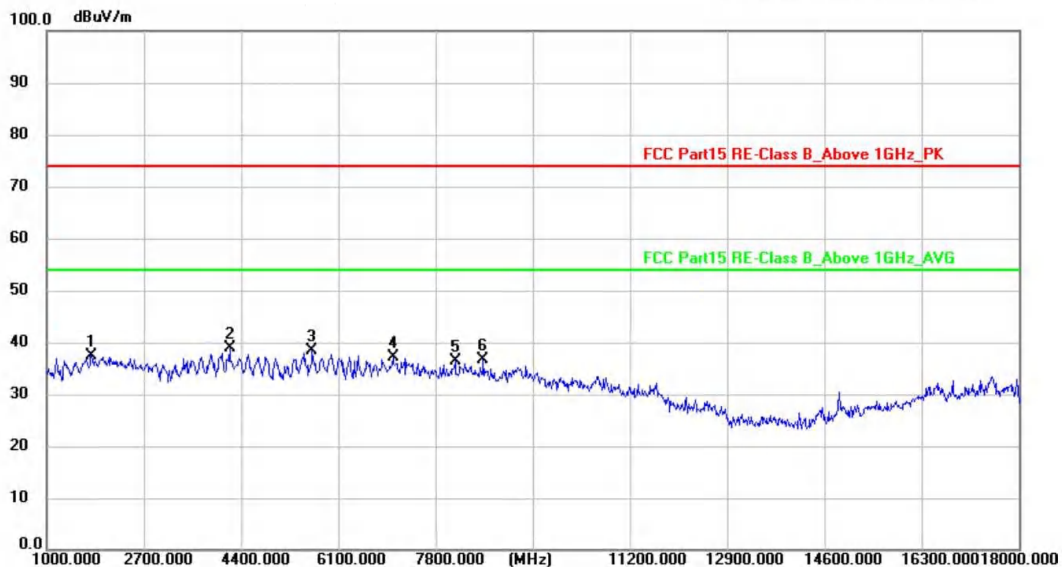

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1796.875	54.44	-16.99	37.45	74.00	-36.55	peak	150	34	P	
2 *	4200.250	51.99	-13.02	38.97	74.00	-35.03	peak	150	224	P	
3	5653.750	48.55	-10.27	38.28	74.00	-35.72	peak	150	347	P	
4	7054.125	45.99	-8.83	37.16	74.00	-36.84	peak	150	295	P	
5	8140.000	44.86	-8.37	36.49	74.00	-37.51	peak	150	343	P	
6	8639.375	44.38	-7.81	36.57	74.00	-37.43	peak	150	108	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: ax40 5190MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/15 10:05:02

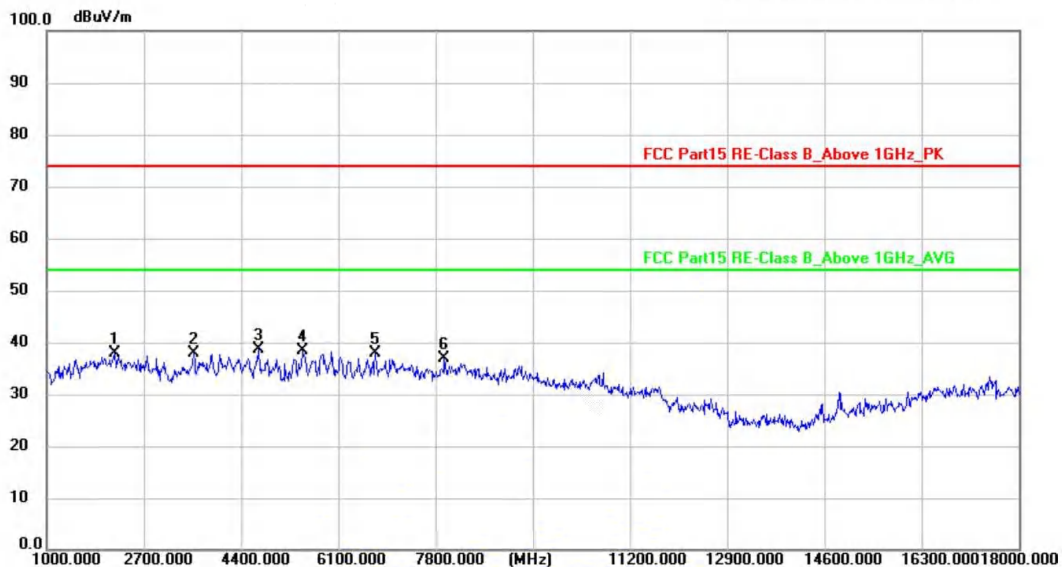

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2204.875	53.79	-15.93	37.86	74.00	-36.14	peak	150	334	P	
2	3567.000	51.84	-14.03	37.81	74.00	-36.19	peak	150	27	P	
3 *	4706.000	50.88	-12.26	38.62	74.00	-35.38	peak	150	220	P	
4	5485.875	48.94	-10.67	38.27	74.00	-35.73	peak	150	120	P	
5	6750.250	46.99	-9.01	37.98	74.00	-36.02	peak	150	6	P	
6	7953.000	45.50	-8.54	36.96	74.00	-37.04	peak	150	10	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B

CN25M6MM 001



Prüfbericht - Produkte
Test Report - Products

Page 105 of 224




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: ax40 5190MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/15 10:10:23

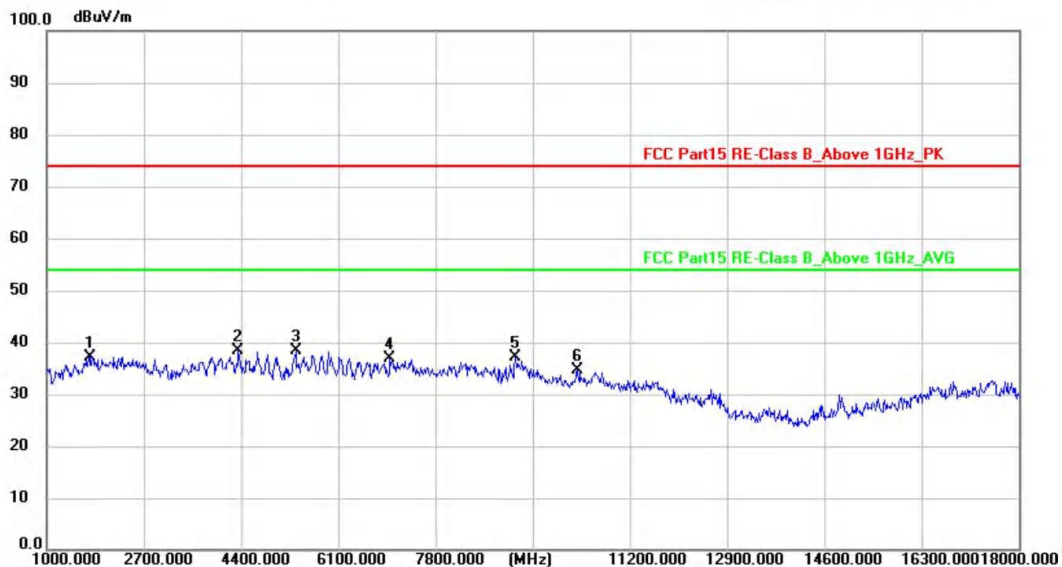

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1771.375	54.34	-17.10	37.24	74.00	-36.76	peak	150	276	P	
2 *	4361.750	51.25	-12.77	38.48	74.00	-35.52	peak	150	46	P	
3	5352.000	49.36	-10.97	38.39	74.00	-35.61	peak	150	26	P	
4	7003.125	45.77	-8.85	36.92	74.00	-37.08	peak	150	136	P	
5	9208.875	44.21	-7.15	37.06	74.00	-36.94	peak	150	265	P	
6	10286.250	40.36	-5.77	34.59	74.00	-39.41	peak	150	168	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B

CN25M6MM 001



Prüfbericht - Produkte
Test Report - Products

Page 106 of 224




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: ac80 5210MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/15 10:15:06

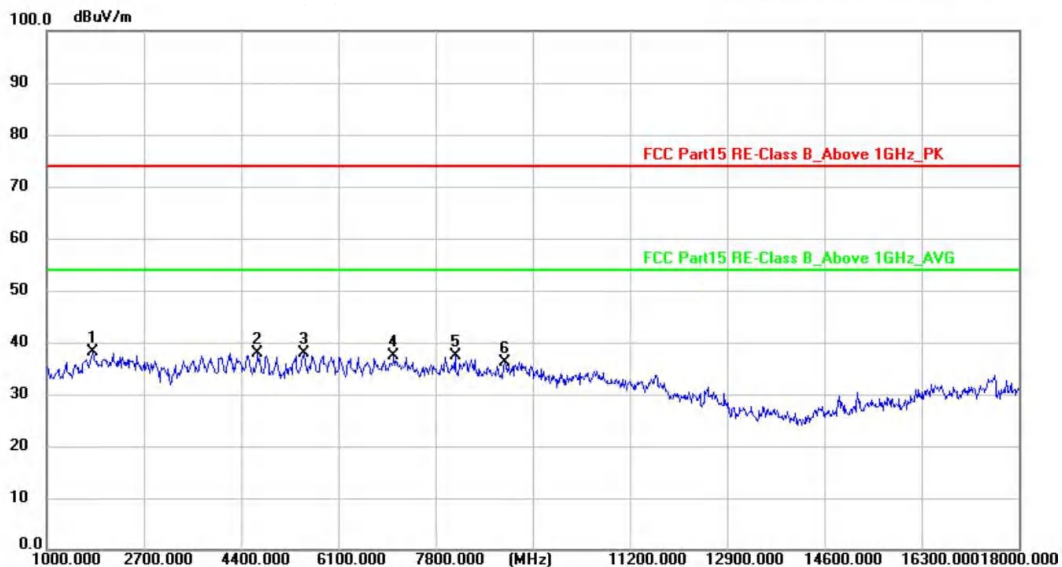

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	1807.500	55.02	-16.95	38.07	74.00	-35.93	peak	150	112	P	
2	4701.750	50.18	-12.26	37.92	74.00	-36.08	peak	150	13	P	
3	5509.250	48.48	-10.62	37.86	74.00	-36.14	peak	150	355	P	
4	7081.750	46.11	-8.83	37.28	74.00	-36.72	peak	150	276	P	
5	8142.125	45.76	-8.37	37.39	74.00	-36.61	peak	150	345	P	
6	9017.625	43.64	-7.39	36.25	74.00	-37.75	peak	150	252	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: ac80 5210MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/15 10:20:27

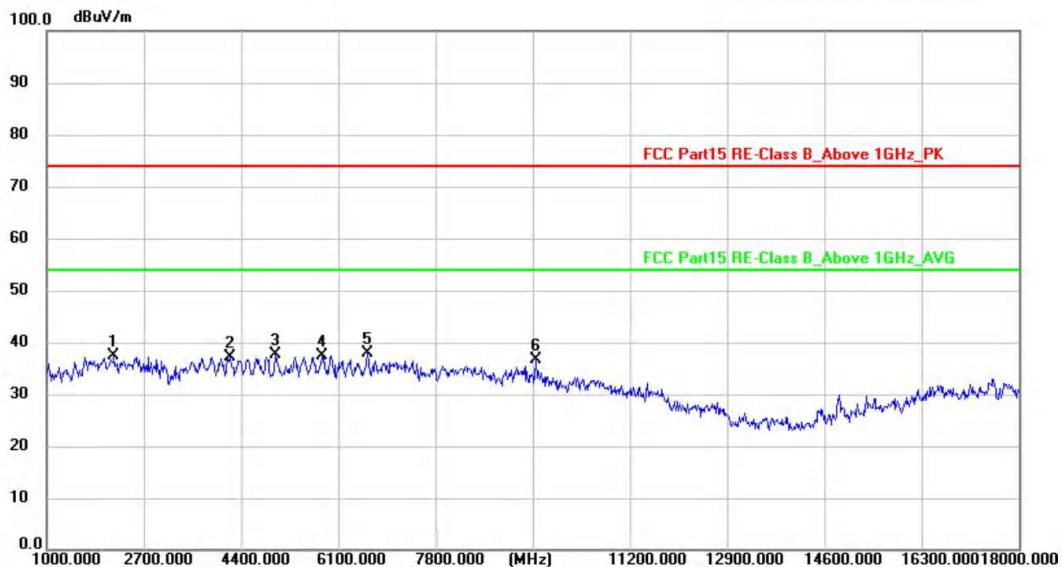

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2185.750	53.37	-15.95	37.42	74.00	-36.58	peak	150	288	P	
2	4202.375	50.25	-13.02	37.23	74.00	-36.77	peak	150	264	P	
3	4999.250	49.50	-11.80	37.70	74.00	-36.30	peak	150	359	P	
4	5821.625	47.32	-9.88	37.44	74.00	-36.56	peak	150	256	P	
5 *	6612.125	46.92	-9.10	37.82	74.00	-36.18	peak	150	107	P	
6	9551.000	43.48	-6.73	36.75	74.00	-37.25	peak	150	159	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B

CN25M6MM 001



Prüfbericht - Produkte
Test Report - Products

Page 108 of 224




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: ax80 5210MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/15 10:25:41

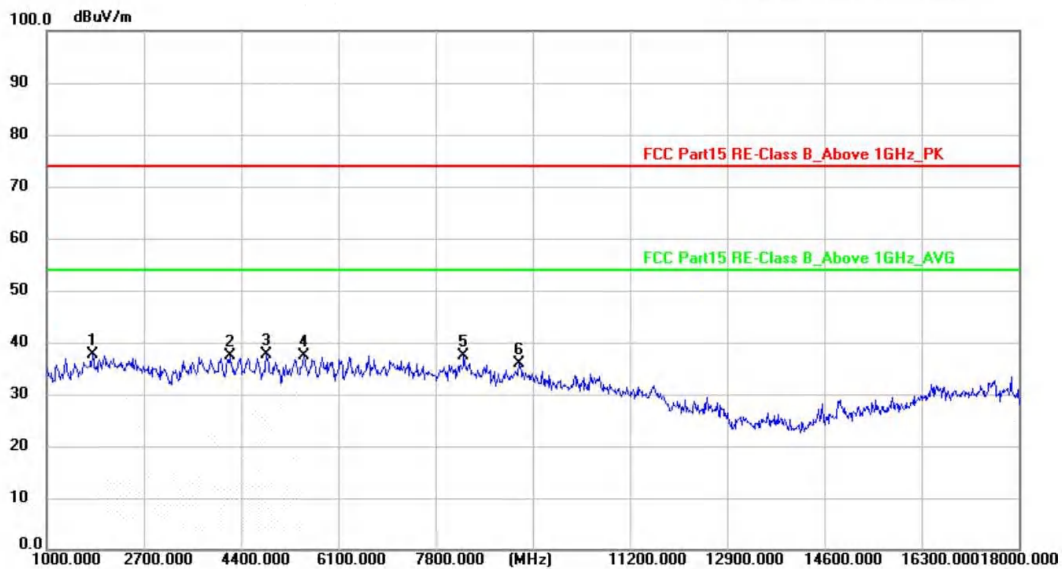

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1805.375	54.59	-16.96	37.63	74.00	-36.37	peak	150	314	P	
2	4200.250	50.33	-13.02	37.31	74.00	-36.69	peak	150	210	P	
3 *	4848.375	49.73	-12.04	37.69	74.00	-36.31	peak	150	111	P	
4	5490.125	48.16	-10.66	37.50	74.00	-36.50	peak	150	306	P	
5	8299.375	45.59	-8.19	37.40	74.00	-36.60	peak	150	131	P	
6	9272.625	42.92	-7.08	35.84	74.00	-38.16	peak	150	13	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: ax80 5210MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/15 10:30:00

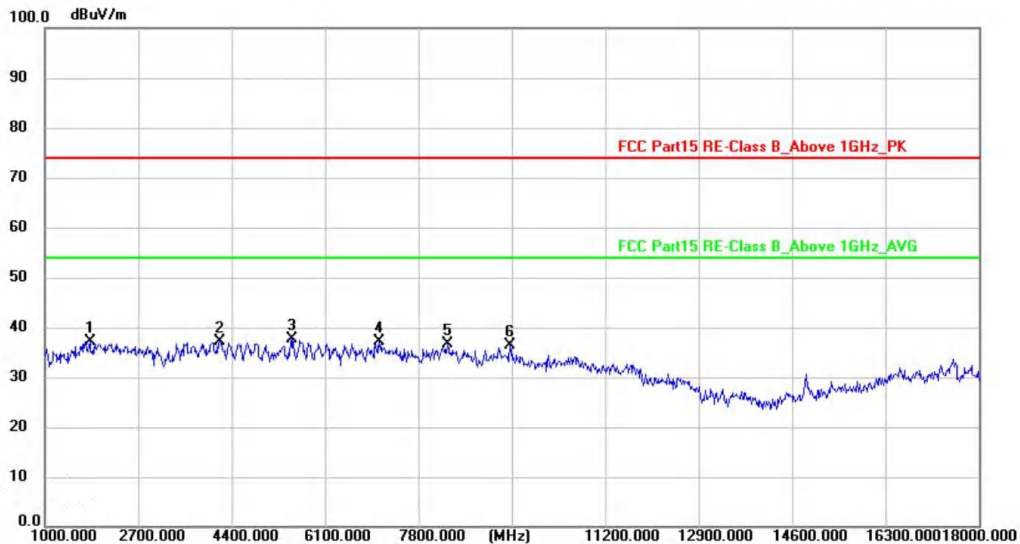

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1828.750	54.10	-16.86	37.24	74.00	-36.76	peak	150	297	P	
2	4193.875	50.19	-13.02	37.17	74.00	-36.83	peak	150	360	P	
3 *	5494.375	48.30	-10.65	37.65	74.00	-36.35	peak	150	165	P	
4	7092.375	45.95	-8.82	37.13	74.00	-36.87	peak	150	78	P	
5	8335.500	44.77	-8.15	36.62	74.00	-37.38	peak	150	185	P	
6	9480.875	43.29	-6.82	36.47	74.00	-37.53	peak	150	74	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 24 °C
EUT: 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: n20 5180MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/18 18:55:55

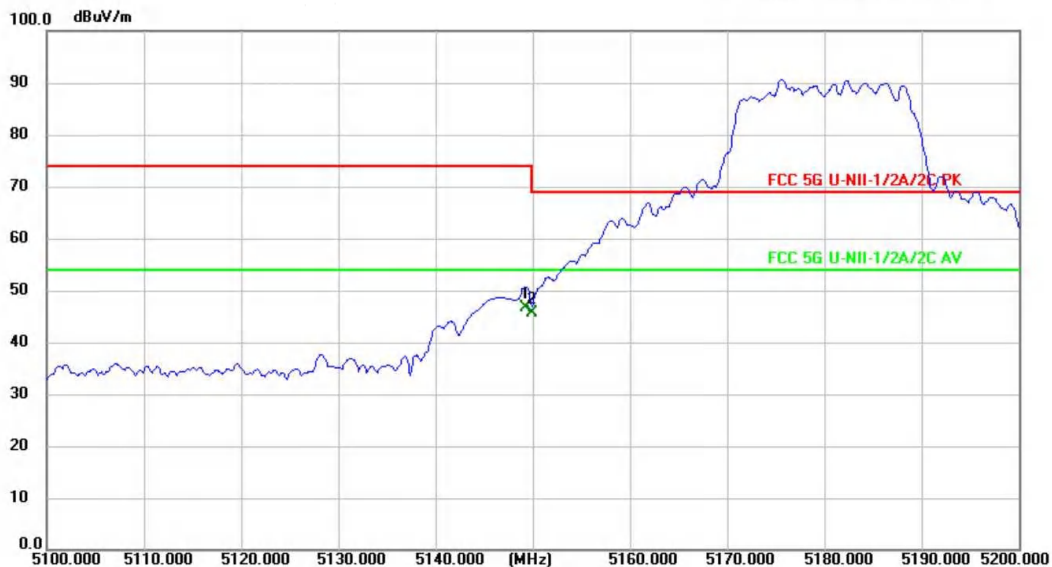

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5149.350	64.02	-17.47	46.55	54.00	-7.45	AVG	150	311	P	
2	5150.000	63.00	-17.45	45.55	54.00	-8.45	AVG	150	128	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 24 °C
EUT: 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: n20 5240MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/18 19:00:30



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5350.000	52.91	-16.99	35.92	68.82	-32.90	peak	150	296	P	
2	5357.881	54.96	-16.97	37.99	74.00	-36.01	peak	150	28	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 24 °C
EUT: 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: n20 5240MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/18 19:05:51

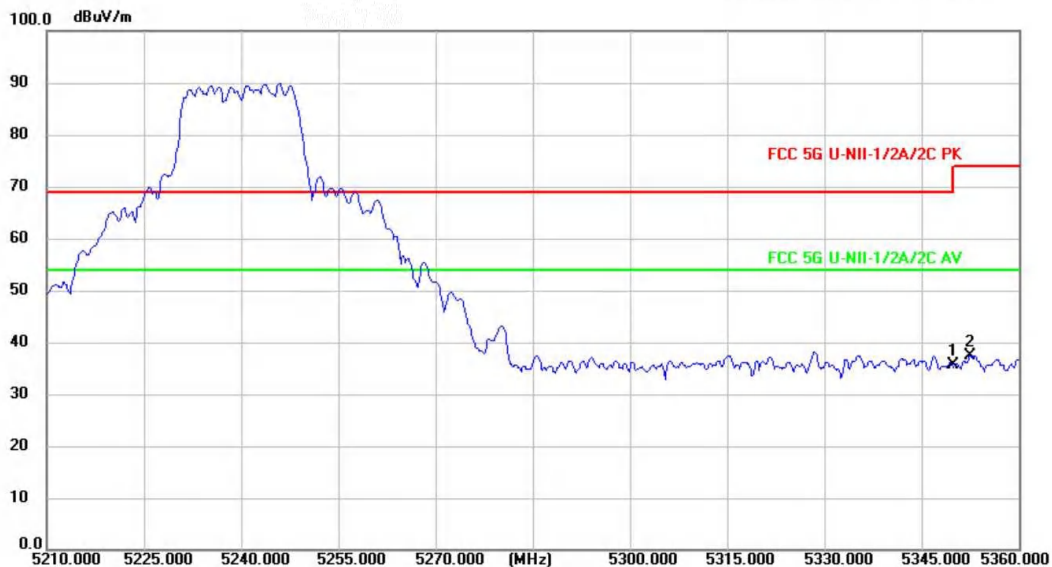

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5350.000	52.56	-16.99	35.57	68.82	-33.25	peak	150	104	P	
2	5352.594	54.46	-16.98	37.48	74.00	-36.52	peak	150	180	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit