




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 24 °C
EUT: 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: ax40 5795MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/19 20:20:06

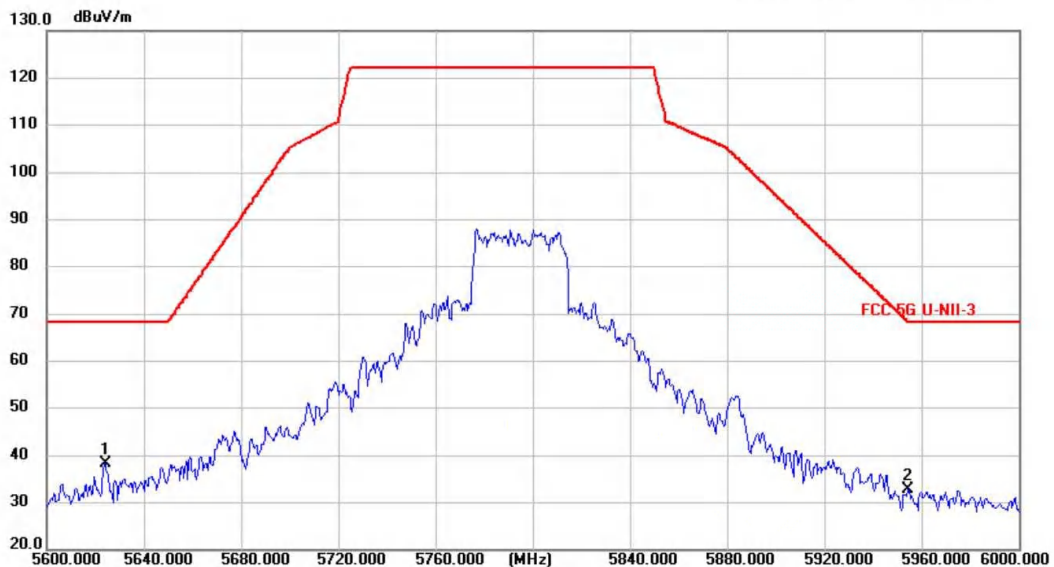

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5624.000	54.64	-16.36	38.28	68.20	-29.92	peak	150	153	P	
2	5954.750	48.30	-15.60	32.70	68.32	-35.62	peak	150	339	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 24 °C
EUT: 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: ac80 5775MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/19 20:25:42

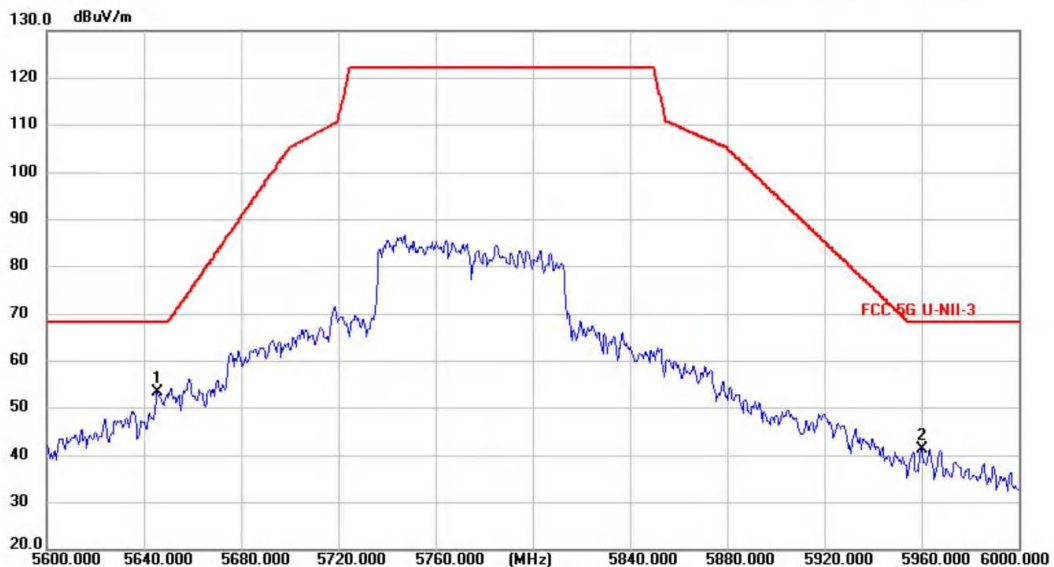

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5645.650	69.72	-16.32	53.40	68.20	-14.80	peak	150	211	P	
2	5960.100	56.96	-15.59	41.37	68.20	-26.83	peak	150	104	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
 1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
 Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Vertical	Temperature: 24 °C
EUT: 3D Scanner	Distance: 3m	Humidity: 56 %RH
M/N: Einstar Rockit	Test Engineer: Felix	
Test Mode: ac80 5775MHz		
Test Voltage: DC 3.6V		
Note:		

Radiated Emission Measurement

Test Date: 2025/7/19 20:30:56

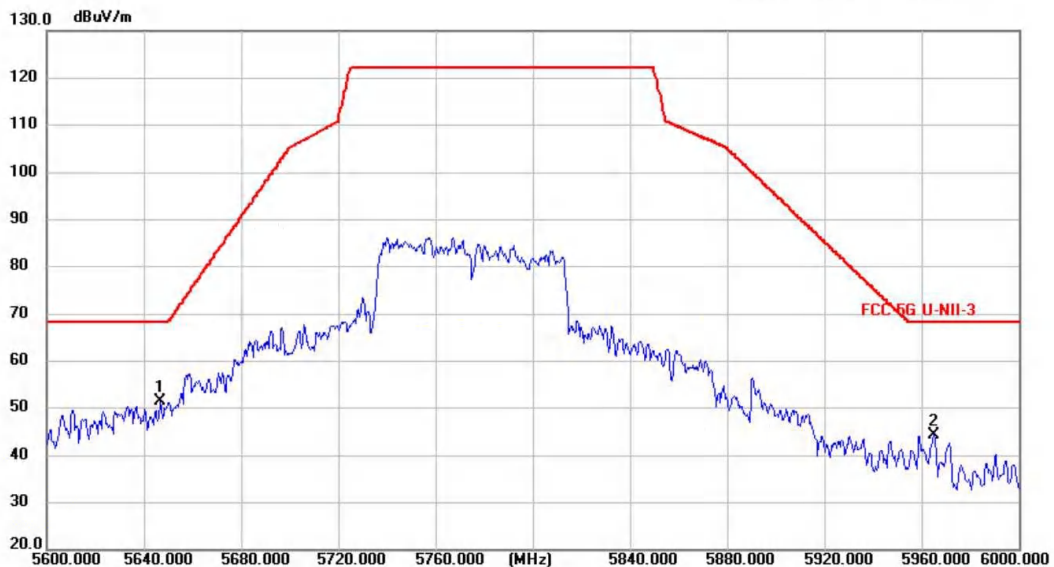

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5646.900	67.78	-16.32	51.46	68.20	-16.74	peak	150	84	P	
2	5965.200	59.86	-15.58	44.28	68.20	-23.92	peak	150	268	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 24 °C
EUT: 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: ax80 5775MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/19 20:35:19

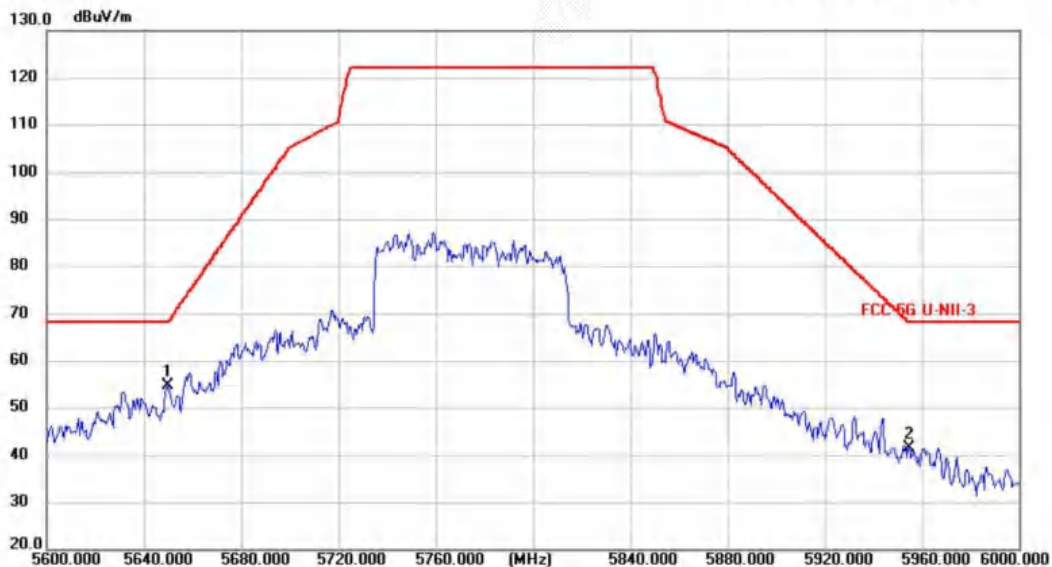

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5649.900	70.99	-16.32	54.67	68.20	-13.53	peak	150	323	P	
2	5954.900	57.26	-15.60	41.66	68.25	-26.59	peak	150	210	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 24 °C
EUT: 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: ax80 5775MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/19 20:40:25



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5644.550	69.77	-16.32	53.45	68.20	-14.75	peak	150	180	P	
2	5957.800	59.42	-15.59	43.83	68.20	-24.37	peak	150	49	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN25M6MM 001



Prüfbericht - Produkte
Test Report - Products

Page 174 of 224




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: a 5745MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/15 10:40:07

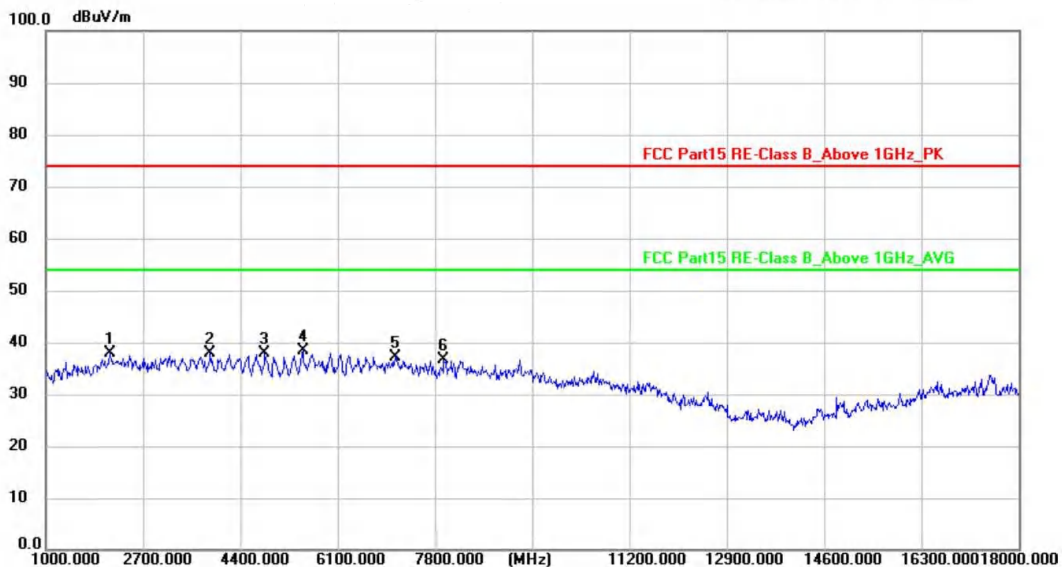

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2122.000	53.92	-16.02	37.90	74.00	-36.10	peak	150	72	P	
2	3879.375	51.48	-13.53	37.95	74.00	-36.05	peak	150	217	P	
3	4835.625	50.03	-12.05	37.98	74.00	-36.02	peak	150	307	P	
4 *	5494.375	48.96	-10.65	38.31	74.00	-35.69	peak	150	138	P	
5	7109.375	46.00	-8.82	37.18	74.00	-36.82	peak	150	311	P	
6	7965.750	45.05	-8.54	36.51	74.00	-37.49	peak	150	296	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: n20 5745MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/15 10:45:03

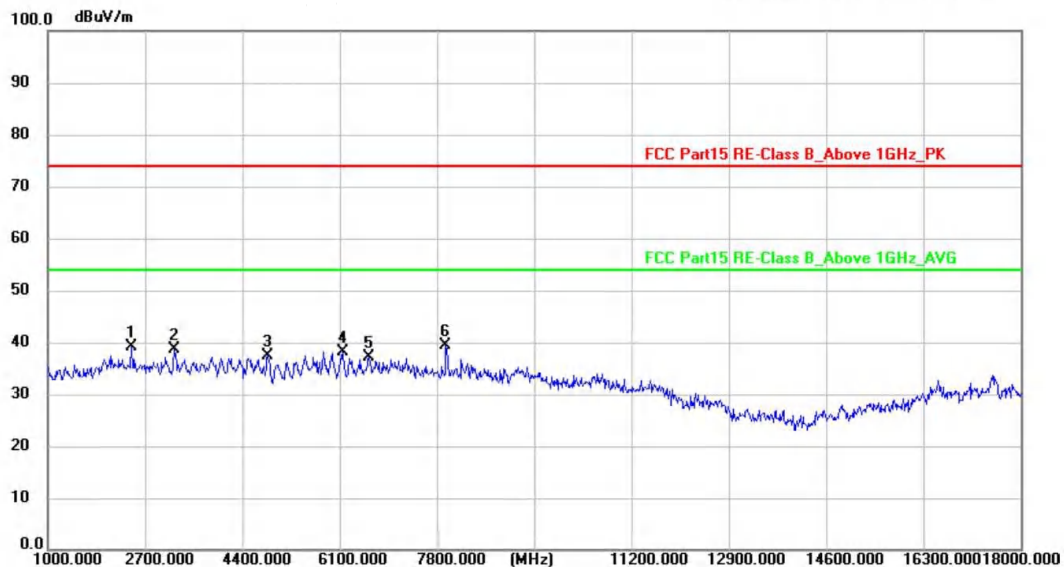

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2466.250	54.79	-15.60	39.19	74.00	-34.81	peak	150	14	P	
2	3218.500	53.28	-14.59	38.69	74.00	-35.31	peak	150	106	P	
3	4848.375	49.36	-12.04	37.32	74.00	-36.68	peak	150	30	P	
4	6151.000	47.44	-9.37	38.07	74.00	-35.93	peak	150	13	P	
5	6616.375	46.19	-9.09	37.10	74.00	-36.90	peak	150	92	P	
6 *	7965.750	47.88	-8.54	39.34	74.00	-34.66	peak	150	301	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Horizontal	Temperature: 26 °C
EUT: 3D Scanner	Distance: 3m	Humidity: 54 %RH
M/N: Einstar Rockit	Test Engineer: Felix	
Test Mode: n20 5745MHz		
Test Voltage: DC 3.6V		
Note:		

Radiated Emission Measurement

Test Date: 2025/7/15 10:50:06

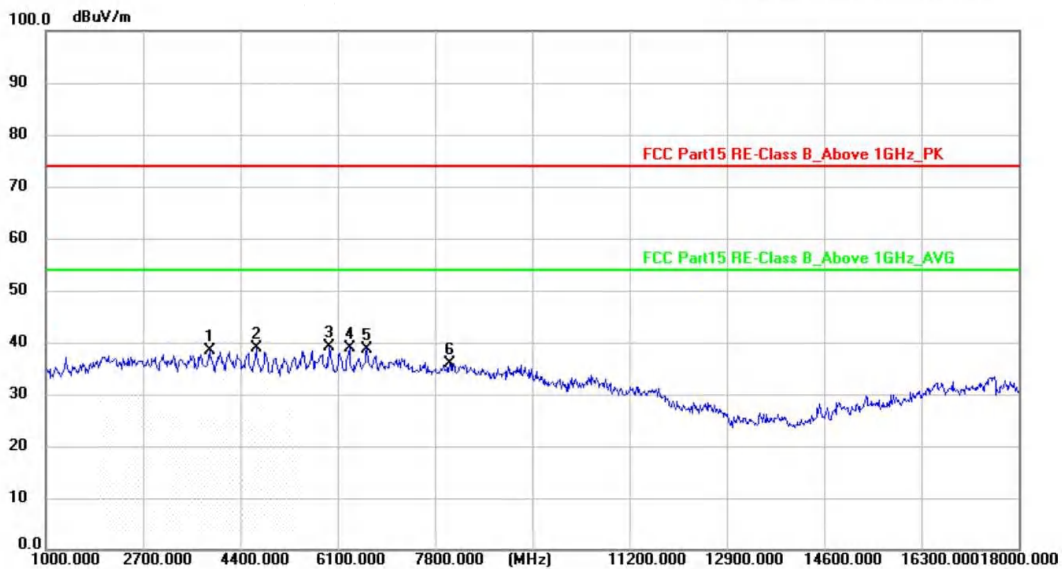

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	3870.875	51.84	-13.53	38.31	74.00	-35.69	peak	150	172	P	
2	4682.625	51.14	-12.29	38.85	74.00	-35.15	peak	150	108	P	
3 *	5953.375	48.82	-9.58	39.24	74.00	-34.76	peak	150	32	P	
4	6310.375	48.22	-9.29	38.93	74.00	-35.07	peak	150	80	P	
5	6620.625	47.67	-9.09	38.58	74.00	-35.42	peak	150	217	P	
6	8063.500	44.34	-8.46	35.88	74.00	-38.12	peak	150	333	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Horizontal	Temperature: 26 °C
EUT: 3D Scanner	Distance: 3m	Humidity: 54 %RH
M/N: Einstar Rockit	Test Engineer: Felix	
Test Mode: ac20 5745MHz		
Test Voltage: DC 3.6V		
Note:		

Radiated Emission Measurement

Test Date: 2025/7/15 10:55:58

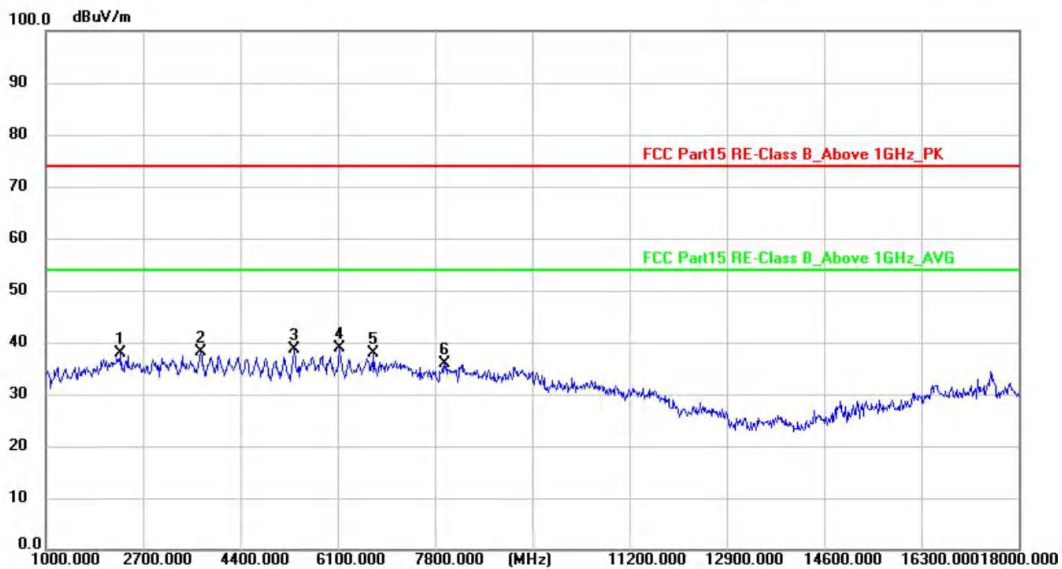

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2319.625	53.73	-15.78	37.95	74.00	-36.05	peak	150	94	P	
2	3713.625	51.81	-13.79	38.02	74.00	-35.98	peak	150	242	P	
3	5339.250	49.59	-11.01	38.58	74.00	-35.42	peak	150	184	P	
4 *	6140.375	48.15	-9.39	38.76	74.00	-35.24	peak	150	30	P	
5	6739.625	46.88	-9.02	37.86	74.00	-36.14	peak	150	313	P	
6	7972.125	44.44	-8.54	35.90	74.00	-38.10	peak	150	327	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN25M6MM 001



Prüfbericht - Produkte
Test Report - Products

Page 178 of 224




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: ac20 5745MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/15 11:00:43

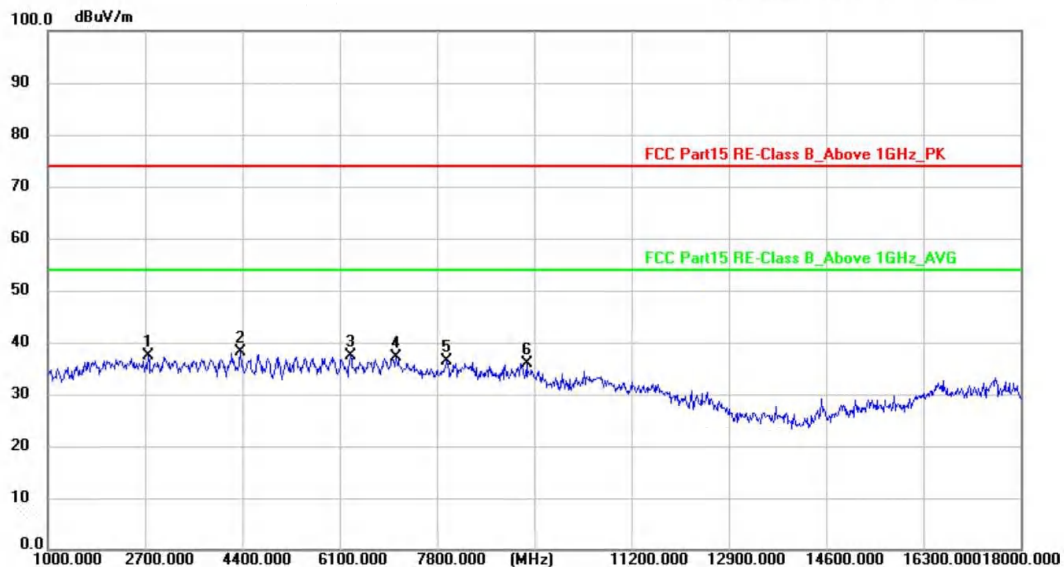

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2765.875	52.66	-15.23	37.43	74.00	-36.57	peak	150	157	P	
2 *	4368.125	50.92	-12.77	38.15	74.00	-35.85	peak	150	329	P	
3	6295.500	46.72	-9.29	37.43	74.00	-36.57	peak	150	240	P	
4	7096.625	45.89	-8.82	37.07	74.00	-36.93	peak	150	71	P	
5	7974.250	45.02	-8.54	36.48	74.00	-37.52	peak	150	173	P	
6	9372.500	42.91	-6.96	35.95	74.00	-38.05	peak	150	143	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: ax20 5745MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/15 11:05:44

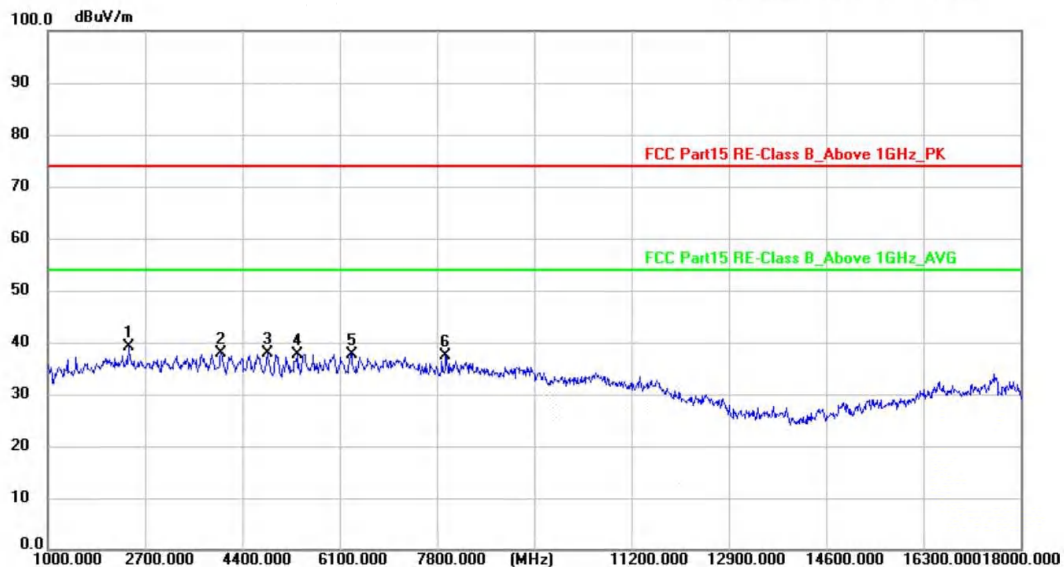

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2425.875	54.90	-15.66	39.24	74.00	-34.76	peak	150	109	P	
2	4040.875	51.23	-13.27	37.96	74.00	-36.04	peak	150	337	P	
3	4844.125	49.96	-12.04	37.92	74.00	-36.08	peak	150	268	P	
4	5354.125	48.70	-10.97	37.73	74.00	-36.27	peak	150	225	P	
5	6304.000	46.98	-9.29	37.69	74.00	-36.31	peak	150	208	P	
6	7965.750	45.81	-8.54	37.27	74.00	-36.73	peak	150	44	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN25M6MM 001



Prüfbericht - Produkte
Test Report - Products

Page 180 of 224




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: ax20 5745MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/15 11:10:45

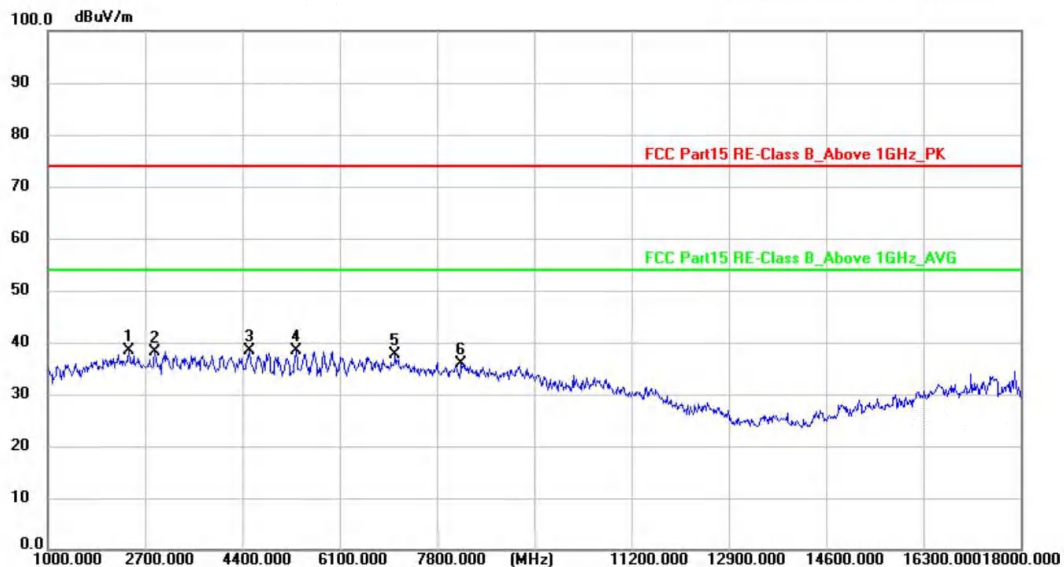

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2425.875	54.15	-15.66	38.49	74.00	-35.51	peak	150	36	P	
2	2876.375	53.16	-15.11	38.05	74.00	-35.95	peak	150	319	P	
3	4529.625	50.84	-12.52	38.32	74.00	-35.68	peak	150	53	P	
4	5343.500	49.45	-11.00	38.45	74.00	-35.55	peak	150	317	P	
5	7079.625	46.44	-8.83	37.61	74.00	-36.39	peak	150	28	P	
6	8235.625	44.25	-8.27	35.98	74.00	-38.02	peak	150	169	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: n40 5755MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/15 11:15:45

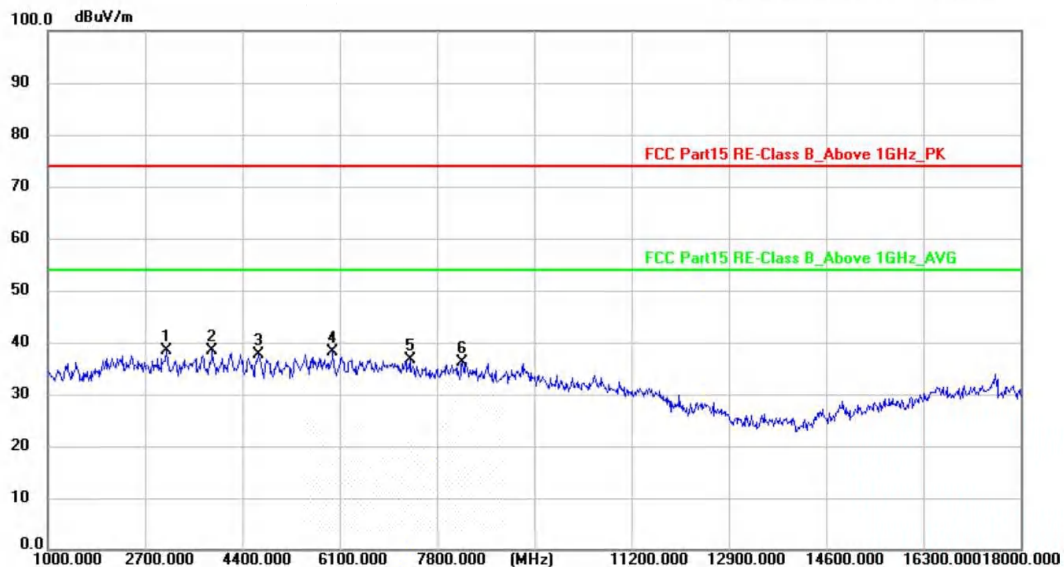

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	3078.250	53.17	-14.83	38.34	74.00	-35.66	peak	150	195	P	
2	3875.125	51.80	-13.53	38.27	74.00	-35.73	peak	150	44	P	
3	4682.625	50.02	-12.29	37.73	74.00	-36.27	peak	150	360	P	
4	5995.875	47.74	-9.49	38.25	74.00	-35.75	peak	150	279	P	
5	7324.000	45.30	-8.75	36.55	74.00	-37.45	peak	150	40	P	
6	8242.000	44.40	-8.26	36.14	74.00	-37.86	peak	150	217	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN25M6MM 001



Prüfbericht - Produkte
Test Report - Products

Page 182 of 224




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: n40 5755MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/15 11:20:27

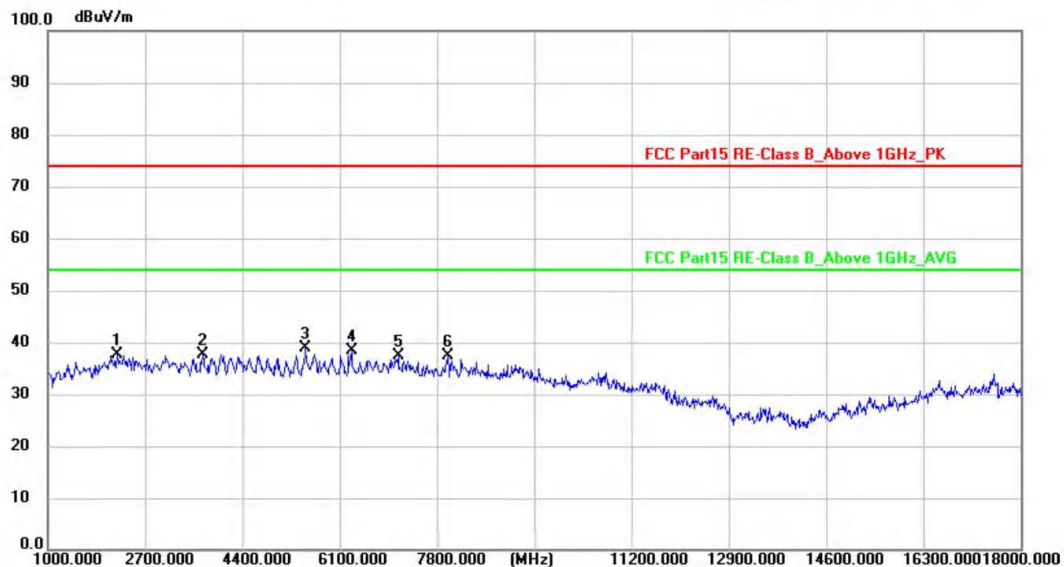

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2207.000	53.57	-15.92	37.65	74.00	-36.35	peak	150	19	P	
2	3703.000	51.53	-13.81	37.72	74.00	-36.28	peak	150	41	P	
3 *	5513.500	49.45	-10.61	38.84	74.00	-35.16	peak	150	176	P	
4	6306.125	47.74	-9.29	38.45	74.00	-35.55	peak	150	40	P	
5	7130.625	46.26	-8.81	37.45	74.00	-36.55	peak	150	347	P	
6	7989.125	45.90	-8.53	37.37	74.00	-36.63	peak	150	54	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: ac40 5755MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/15 11:25:27

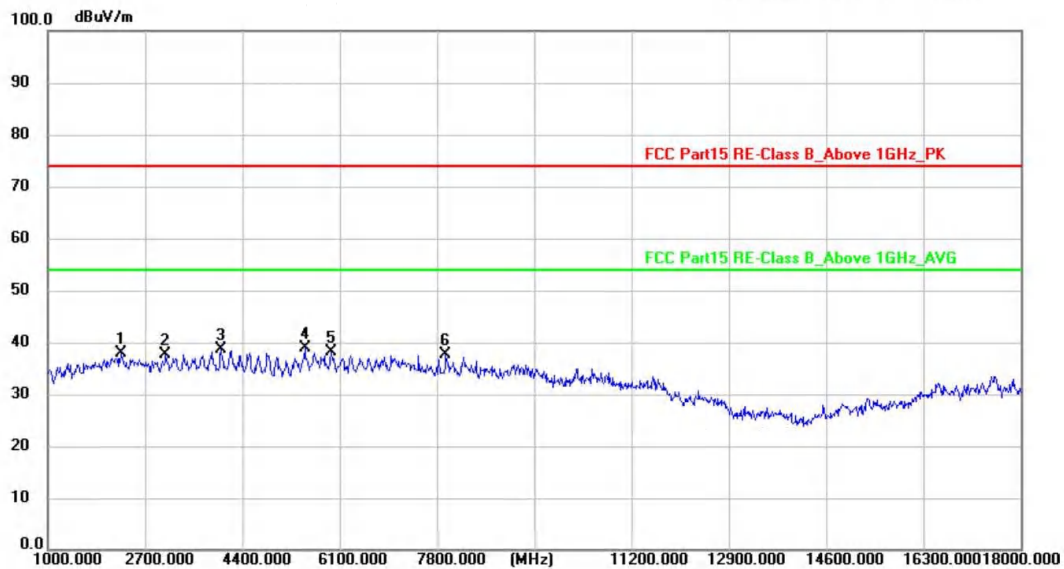

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2289.875	53.77	-15.82	37.95	74.00	-36.05	peak	150	30	P	
2	3067.625	52.44	-14.84	37.60	74.00	-36.40	peak	150	82	P	
3	4036.625	51.86	-13.27	38.59	74.00	-35.41	peak	150	293	P	
4 *	5494.375	49.51	-10.65	38.86	74.00	-35.14	peak	150	5	P	
5	5957.625	47.70	-9.58	38.12	74.00	-35.88	peak	150	250	P	
6	7963.625	46.10	-8.54	37.56	74.00	-36.44	peak	150	100	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: ac40 5755MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/15 11:30:20

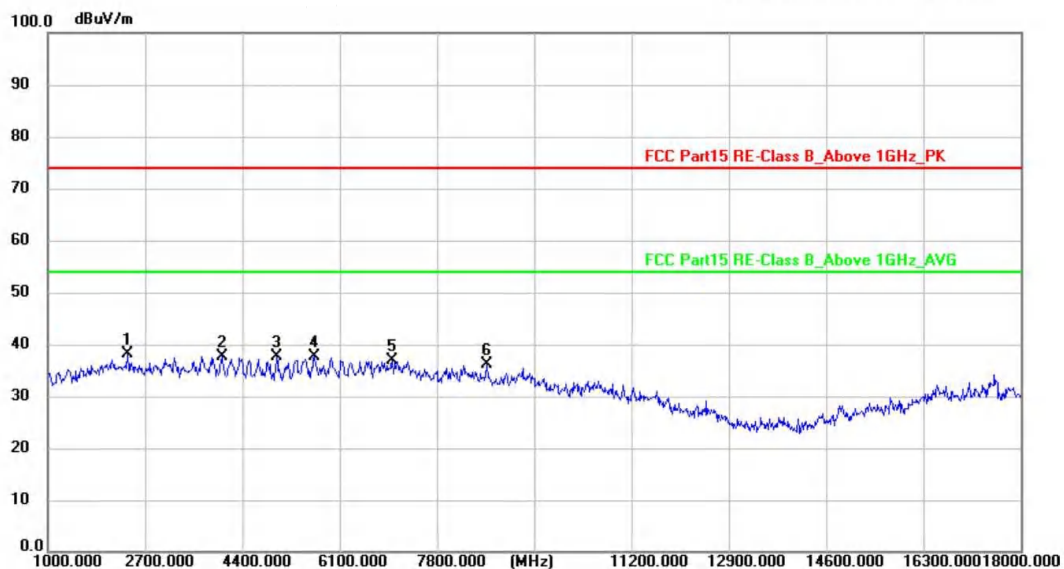

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2400.375	53.74	-15.68	38.06	74.00	-35.94	peak	150	294	P	
2	4047.250	50.97	-13.26	37.71	74.00	-36.29	peak	150	322	P	
3	5009.875	49.53	-11.78	37.75	74.00	-36.25	peak	150	266	P	
4	5660.125	47.95	-10.26	37.69	74.00	-36.31	peak	150	158	P	
5	7018.000	45.76	-8.84	36.92	74.00	-37.08	peak	150	90	P	
6	8667.000	43.98	-7.79	36.19	74.00	-37.81	peak	150	243	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B

CN25M6MM 001



Prüfbericht - Produkte
Test Report - Products

Page 185 of 224




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: ax40 5755MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/15 11:35:30

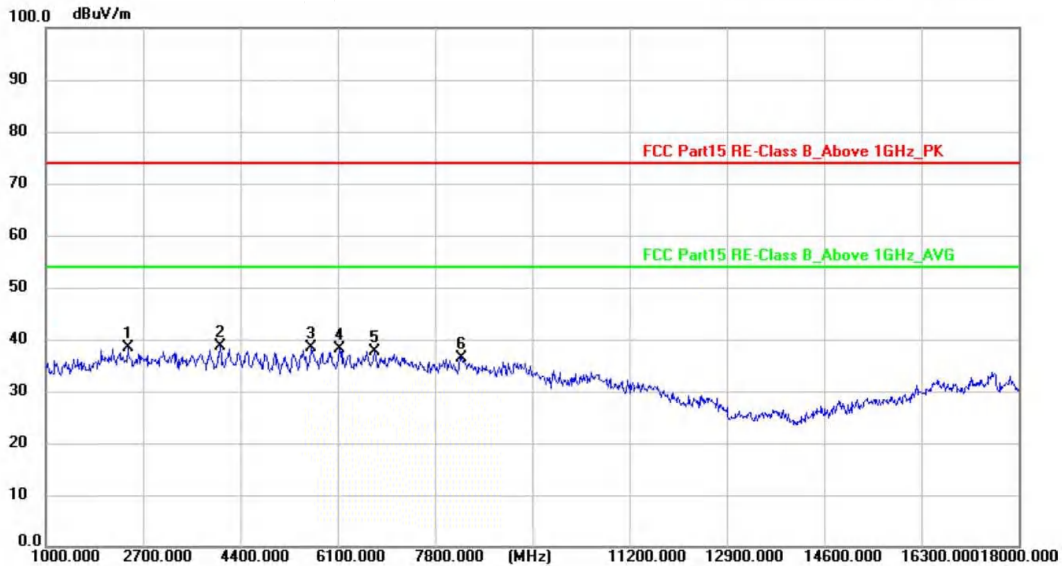

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2432.250	53.93	-15.65	38.28	74.00	-35.72	peak	150	164	P	
2 *	4045.125	51.85	-13.26	38.59	74.00	-35.41	peak	150	318	P	
3	5647.375	48.63	-10.31	38.32	74.00	-35.68	peak	150	115	P	
4	6142.500	47.63	-9.39	38.24	74.00	-35.76	peak	150	88	P	
5	6760.875	46.59	-9.00	37.59	74.00	-36.41	peak	150	233	P	
6	8259.000	44.56	-8.24	36.32	74.00	-37.68	peak	150	313	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B
CN25M6MM 001



Prüfbericht - Produkte
Test Report - Products

Page 186 of 224




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: ax40 5755MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/15 11:40:25

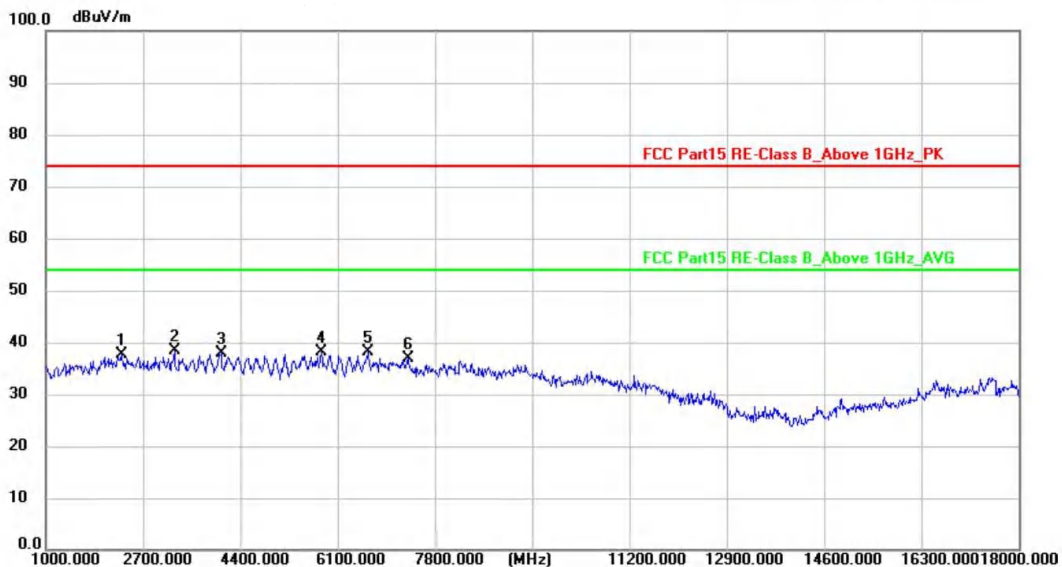

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2330.250	53.28	-15.77	37.51	74.00	-36.49	peak	150	304	P	
2 *	3246.125	52.98	-14.55	38.43	74.00	-35.57	peak	150	282	P	
3	4070.625	50.99	-13.22	37.77	74.00	-36.23	peak	150	58	P	
4	5817.375	48.01	-9.90	38.11	74.00	-35.89	peak	150	45	P	
5	6637.625	47.14	-9.08	38.06	74.00	-35.94	peak	150	346	P	
6	7328.250	45.58	-8.75	36.83	74.00	-37.17	peak	150	240	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: ac80 5775MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/15 11:45:15

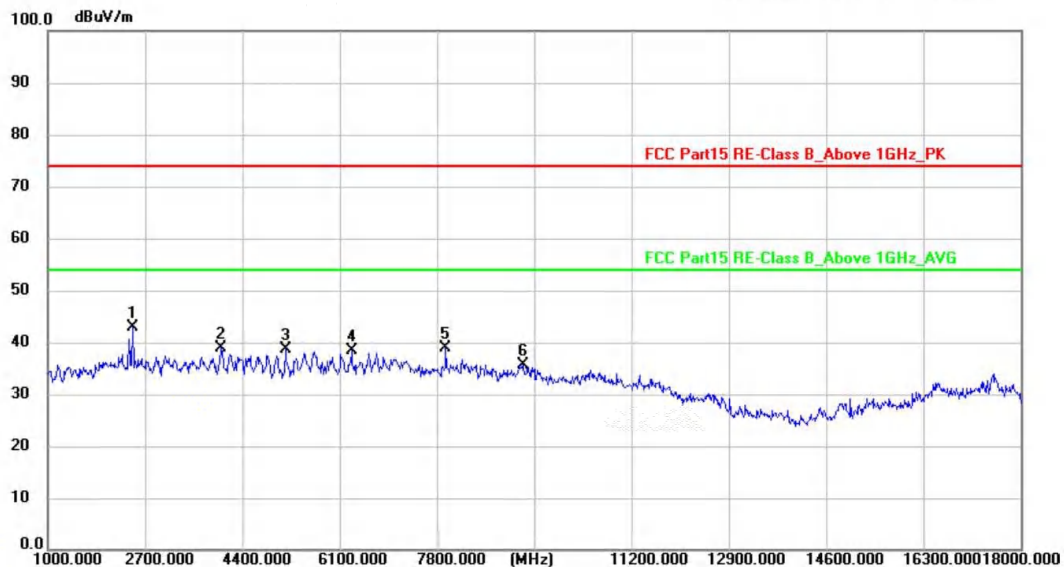

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2479.000	58.38	-15.60	42.78	74.00	-31.22	peak	150	278	P	
2	4040.875	52.20	-13.27	38.93	74.00	-35.07	peak	150	279	P	
3	5160.750	50.07	-11.43	38.64	74.00	-35.36	peak	150	69	P	
4	6306.125	47.56	-9.29	38.27	74.00	-35.73	peak	150	36	P	
5	7967.875	47.45	-8.54	38.91	74.00	-35.09	peak	150	242	P	
6	9310.875	42.76	-7.03	35.73	74.00	-38.27	peak	150	80	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: ac80 5775MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/15 11:50:16

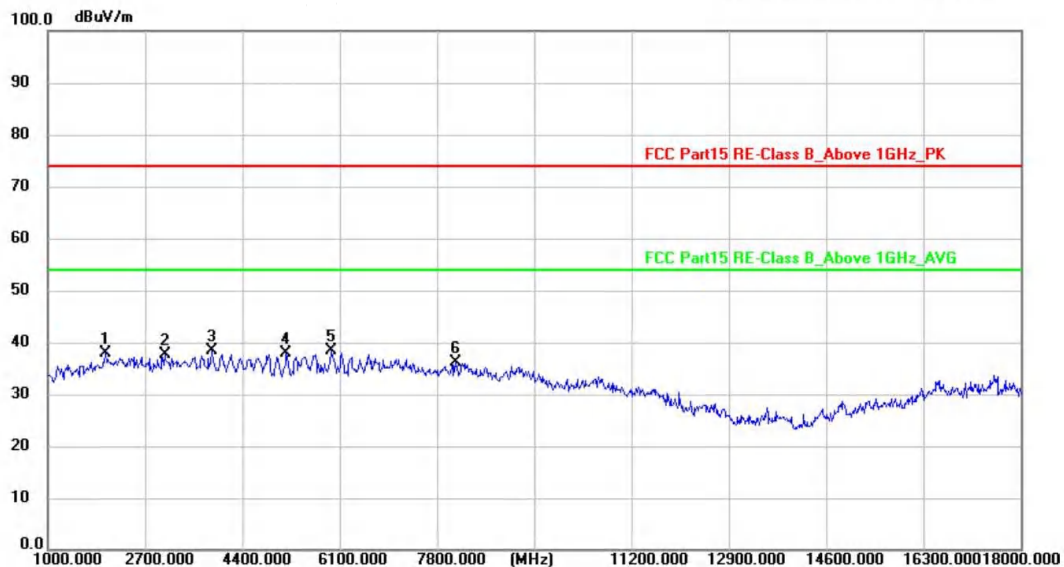

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2005.125	53.97	-16.17	37.80	74.00	-36.20	peak	150	168	P	
2	3054.875	52.55	-14.86	37.69	74.00	-36.31	peak	150	52	P	
3	3870.875	51.87	-13.53	38.34	74.00	-35.66	peak	150	148	P	
4	5171.375	49.26	-11.41	37.85	74.00	-36.15	peak	150	320	P	
5 *	5961.875	48.05	-9.57	38.48	74.00	-35.52	peak	150	16	P	
6	8131.500	44.47	-8.38	36.09	74.00	-37.91	peak	150	72	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

Appendix B

CN25M6MM 001



Prüfbericht - Produkte
Test Report - Products

Page 189 of 224




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: ax80 5775MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/15 11:55:59

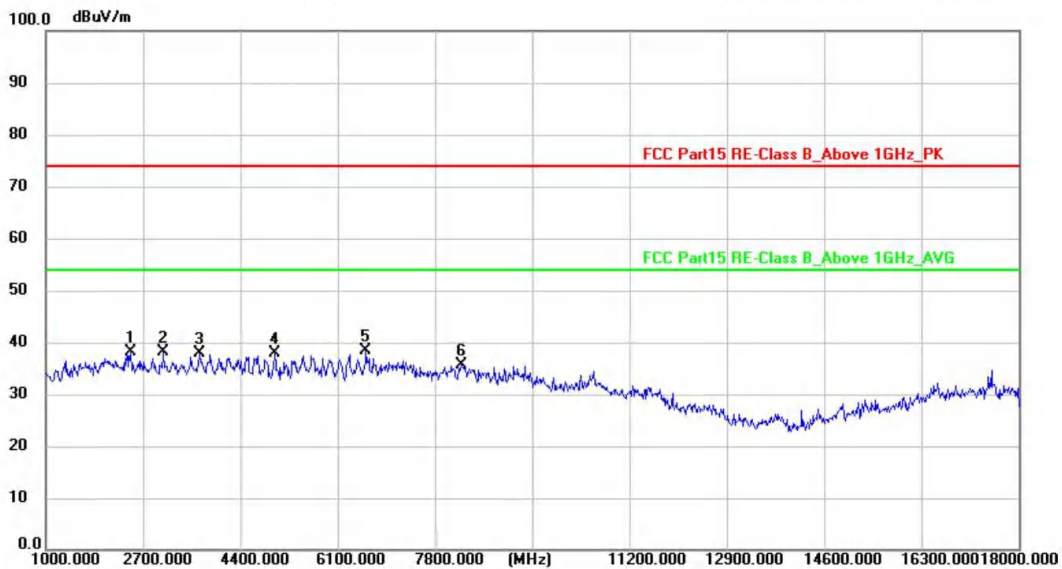

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2479.000	53.75	-15.60	38.15	74.00	-35.85	peak	150	156	P	
2	3061.250	52.98	-14.85	38.13	74.00	-35.87	peak	150	127	P	
3	3700.875	51.65	-13.81	37.84	74.00	-36.16	peak	150	124	P	
4	5003.500	49.60	-11.80	37.80	74.00	-36.20	peak	150	196	P	
5 *	6601.500	47.59	-9.10	38.49	74.00	-35.51	peak	150	265	P	
6	8273.875	43.73	-8.21	35.52	74.00	-38.48	peak	150	322	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: ax80 5775MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/15 12:00:44

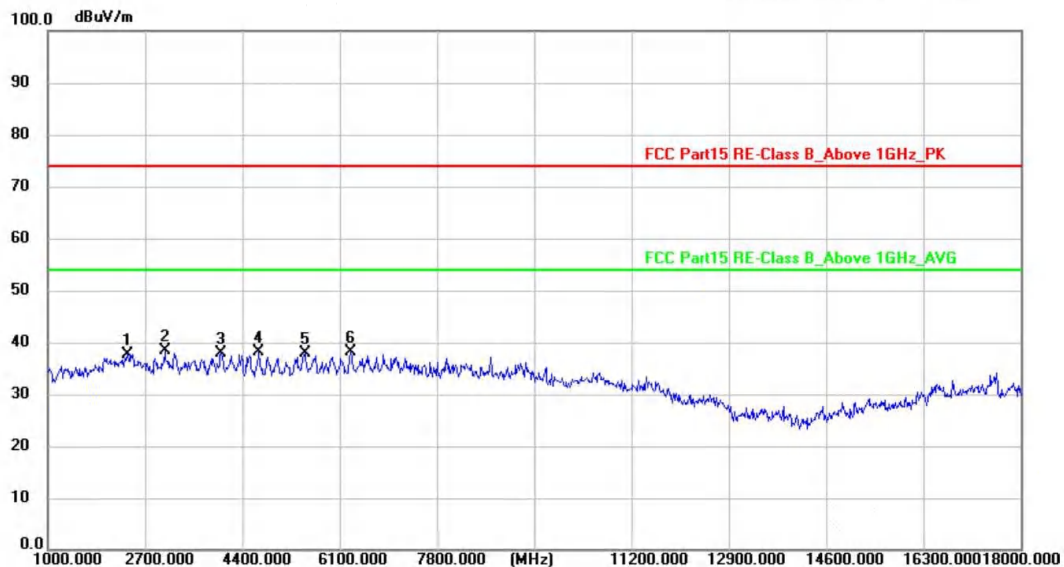

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2404.625	53.33	-15.68	37.65	74.00	-36.35	peak	150	181	P	
2 *	3054.875	53.30	-14.86	38.44	74.00	-35.56	peak	150	318	P	
3	4036.625	51.07	-13.27	37.80	74.00	-36.20	peak	150	189	P	
4	4689.000	50.32	-12.28	38.04	74.00	-35.96	peak	150	166	P	
5	5490.125	48.42	-10.66	37.76	74.00	-36.24	peak	150	167	P	
6	6299.750	47.31	-9.29	38.02	74.00	-35.98	peak	150	170	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 24 °C
EUT: 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: a 5745MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/19 18:05:05

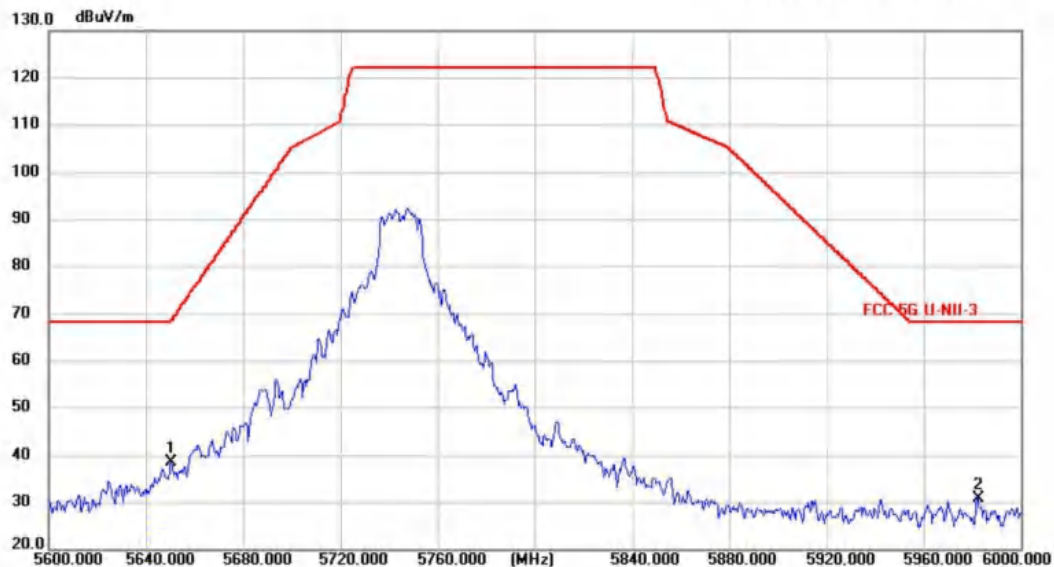

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5650.500	54.80	-16.29	38.51	68.57	-30.06	peak	150	297	P	
2	5982.400	46.44	-15.54	30.90	68.20	-37.30	peak	150	231	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 24 °C
EUT: 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: a 5745MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/19 18:10:56

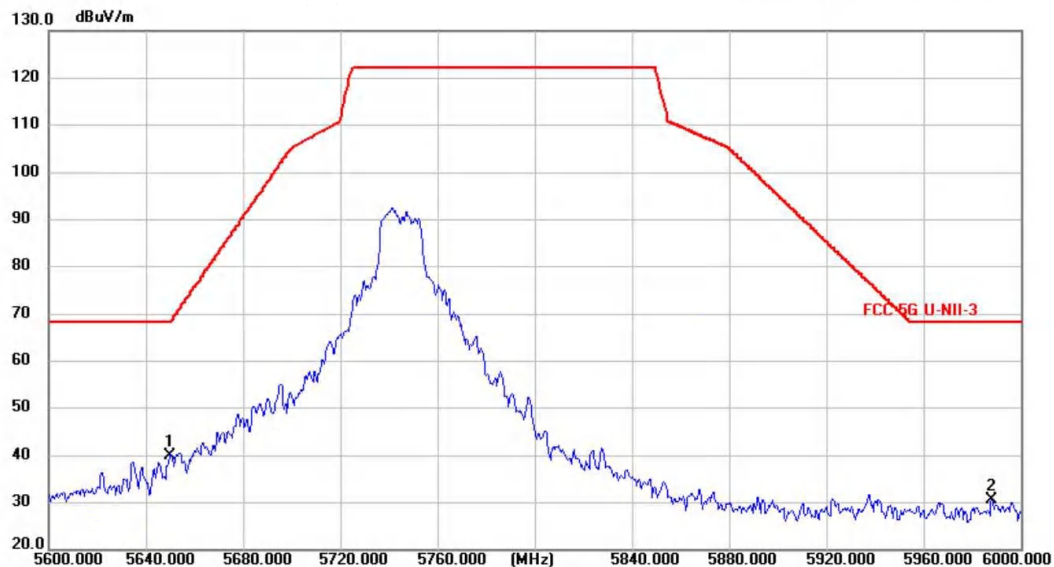

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5649.950	56.27	-16.31	39.96	68.20	-28.24	peak	150	146	P	
2	5988.250	46.10	-15.53	30.57	68.20	-37.63	peak	150	32	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
 1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
 Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Vertical	Temperature: 24 °C
EUT: 3D Scanner	Distance: 3m	Humidity: 56 %RH
M/N: Einstar Rockit	Test Engineer: Felix	
Test Mode: a 5825MHz		
Test Voltage: DC 3.6V		
Note:		

Radiated Emission Measurement

Test Date: 2025/7/19 18:15:19

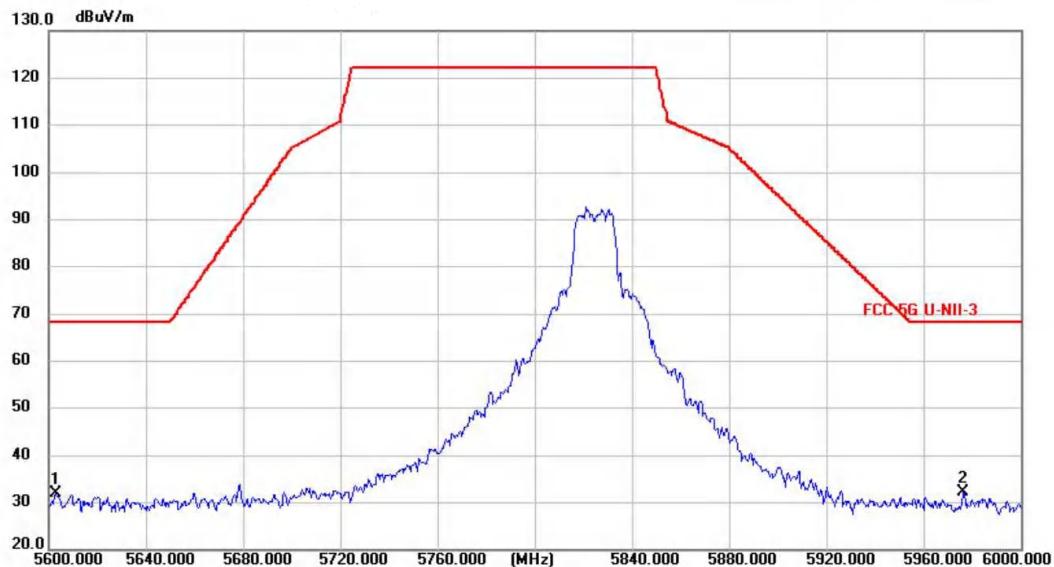

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5602.800	48.25	-16.42	31.83	68.20	-36.37	peak	150	280	P	
2 *	5976.600	47.86	-15.56	32.30	68.20	-35.90	peak	150	310	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 24 °C
EUT: 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: a 5825MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/19 18:20:12

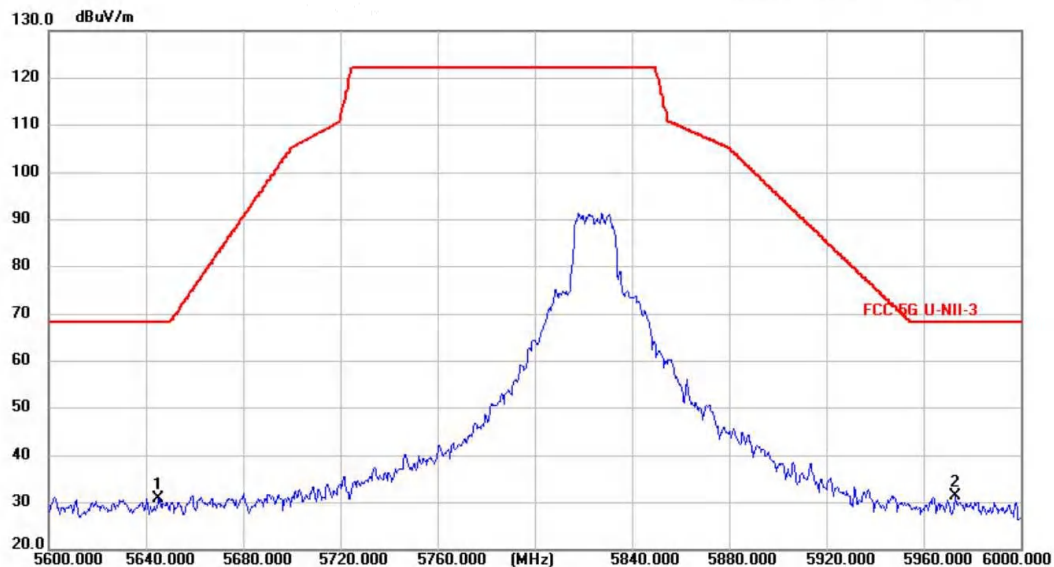

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5645.400	47.28	-16.32	30.96	68.20	-37.24	peak	150	312	P	
2 *	5973.150	46.84	-15.56	31.28	68.20	-36.92	peak	150	208	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 24 °C
EUT: 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: n20 5745MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/19 18:25:47

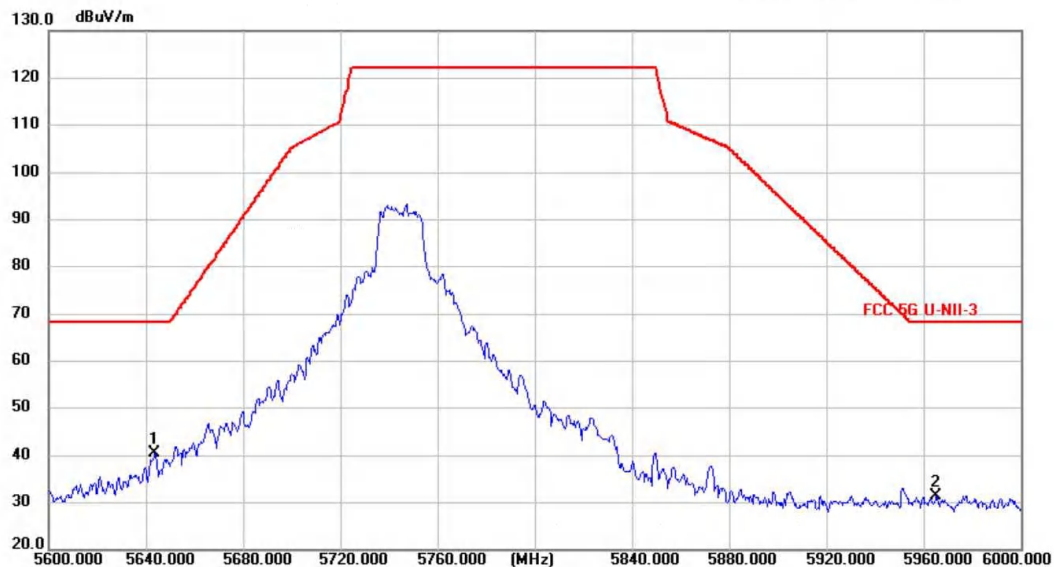

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5643.850	56.77	-16.32	40.45	68.20	-27.75	peak	150	153	P	
2	5965.450	47.00	-15.57	31.43	68.20	-36.77	peak	150	213	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 24 °C
EUT: 3D Scanner Distance: 3m Humidity: 56 %RH
M/N: Einstar Rockit Test Engineer: Felix
Test Mode: n20 5745MHz
Test Voltage: DC 3.6V
Note:

Radiated Emission Measurement

Test Date: 2025/7/19 18:30:29

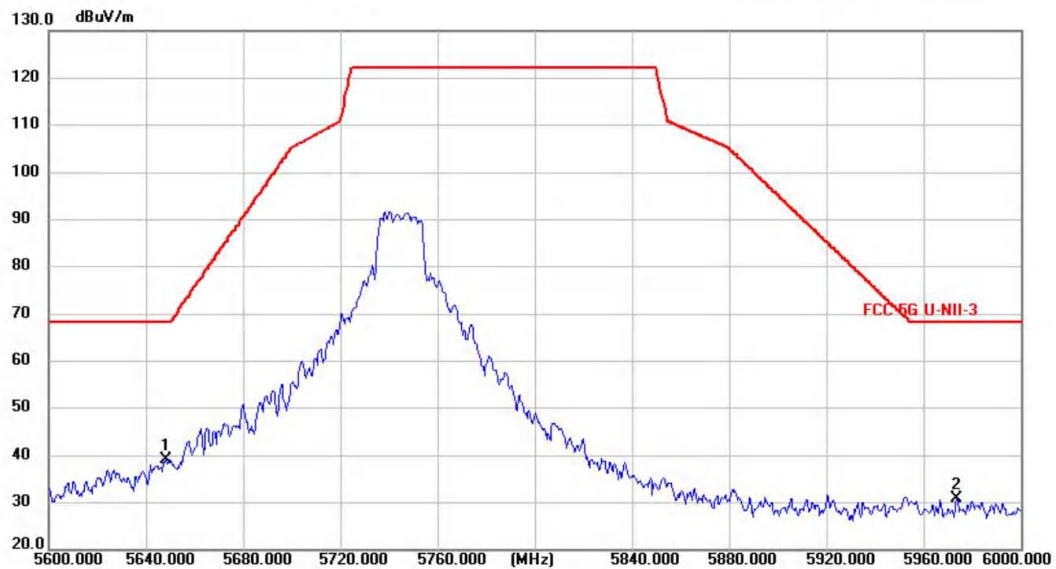

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5648.400	55.56	-16.32	39.24	68.20	-28.96	peak	150	219	P	
2	5973.800	46.33	-15.56	30.77	68.20	-37.43	peak	150	168	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit