




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber      Polarization: **Vertical**      Temperature: 24 °C  
EUT: 3D Scanner      Distance: 3m      Humidity: 56 %RH  
M/N: Einstar Rockit      Test Engineer: Felix  
Test Mode: n20 5825MHz  
Test Voltage: DC 3.6V  
Note:

### Radiated Emission Measurement

Test Date: 2025/7/19 18:35:04

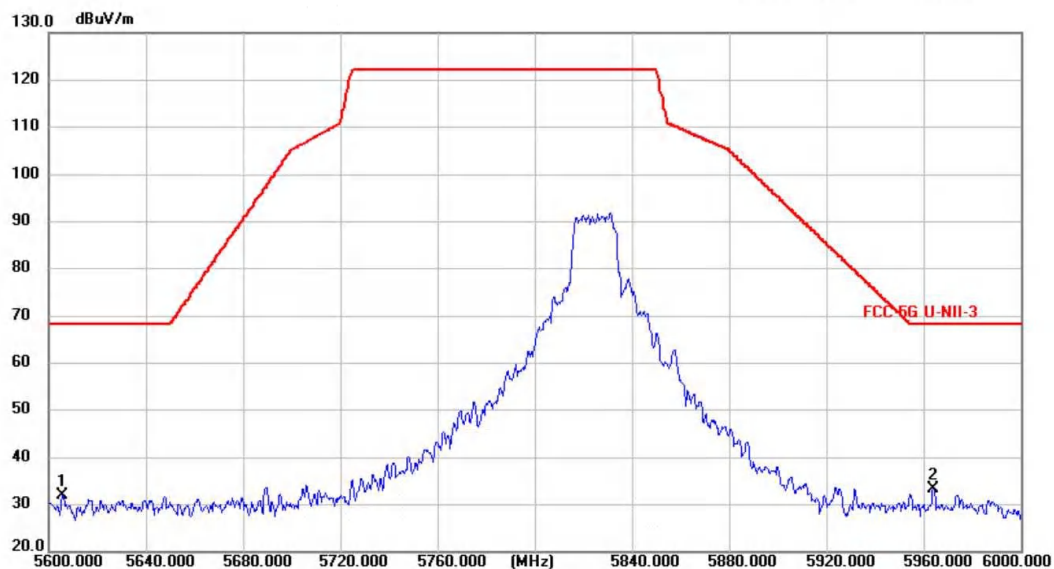

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1   | 5605.950        | 48.38          | -16.41        | 31.97          | 68.20          | -36.23      | peak     | 150         | 360            | P   |        |
| 2 * | 5964.150        | 48.92          | -15.59        | 33.33          | 68.20          | -34.87      | peak     | 150         | 259            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
 1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
 Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

|                                   |                                 |                    |
|-----------------------------------|---------------------------------|--------------------|
| Test Site: PSI EMC Lab-3m Chamber | Polarization: <b>Horizontal</b> | Temperature: 24 °C |
| EUT: 3D Scanner                   | Distance: 3m                    | Humidity: 56 %RH   |
| M/N: Einstar Rockit               | Test Engineer: Felix            |                    |
| Test Mode: n20 5825MHz            |                                 |                    |
| Test Voltage: DC 3.6V             |                                 |                    |
| Note:                             |                                 |                    |

**Radiated Emission Measurement**

Test Date: 2025/7/19 18:40:49

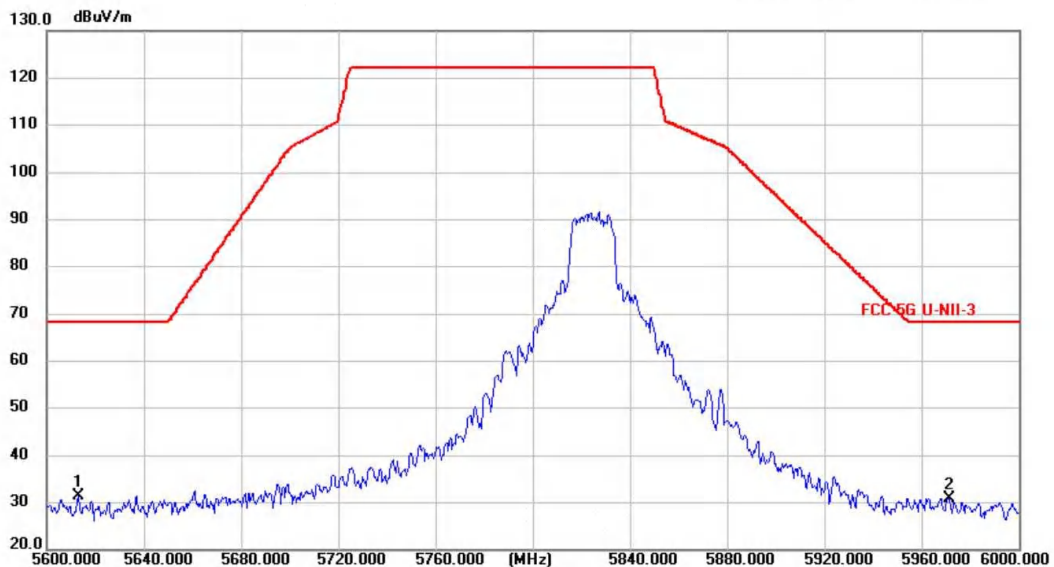

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 5613.150        | 47.86          | -16.39        | 31.47          | 68.20          | -36.73      | peak     | 150         | 260            | P   |        |
| 2   | 5971.350        | 46.57          | -15.57        | 31.00          | 68.20          | -37.20      | peak     | 150         | 245            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber      Polarization: **Horizontal**      Temperature: 24 °C  
EUT: 3D Scanner      Distance: 3m      Humidity: 56 %RH  
M/N: Einstar Rockit      Test Engineer: Felix  
Test Mode: ac20 5745MHz  
Test Voltage: DC 3.6V  
Note:

### Radiated Emission Measurement

Test Date: 2025/7/19 18:45:57

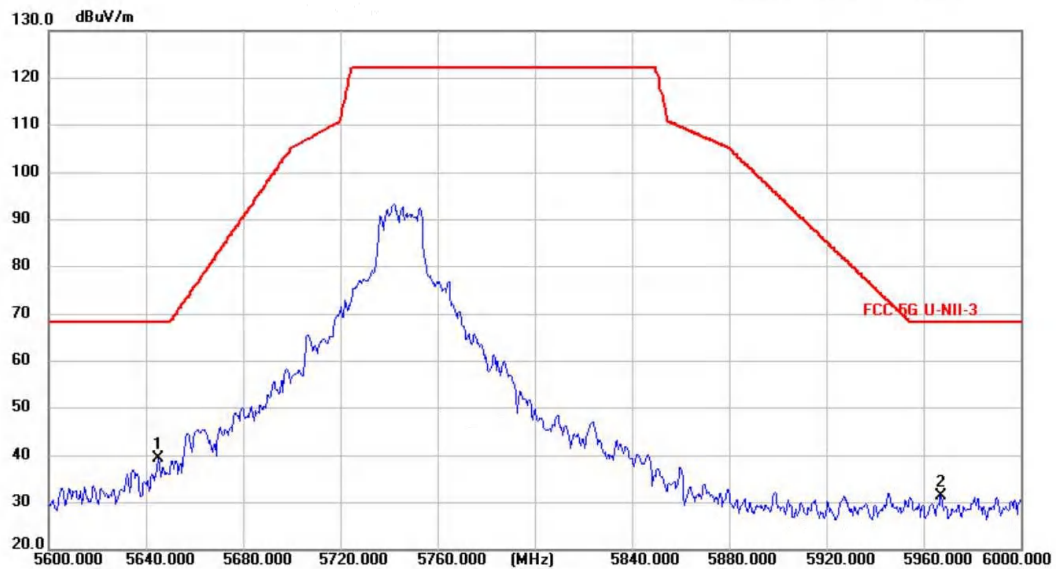

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 5645.200        | 55.72          | -16.32        | 39.40          | 68.20          | -28.80      | peak     | 150         | 326            | P   |        |
| 2   | 5967.200        | 46.93          | -15.57        | 31.36          | 68.20          | -36.84      | peak     | 150         | 188            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber      Polarization: **Vertical**      Temperature: 24 °C  
EUT: 3D Scanner      Distance: 3m      Humidity: 56 %RH  
M/N: Einstar Rockit      Test Engineer: Felix  
Test Mode: ac20 5745MHz  
Test Voltage: DC 3.6V  
Note:

#### Radiated Emission Measurement

Test Date: 2025/7/19 18:50:36

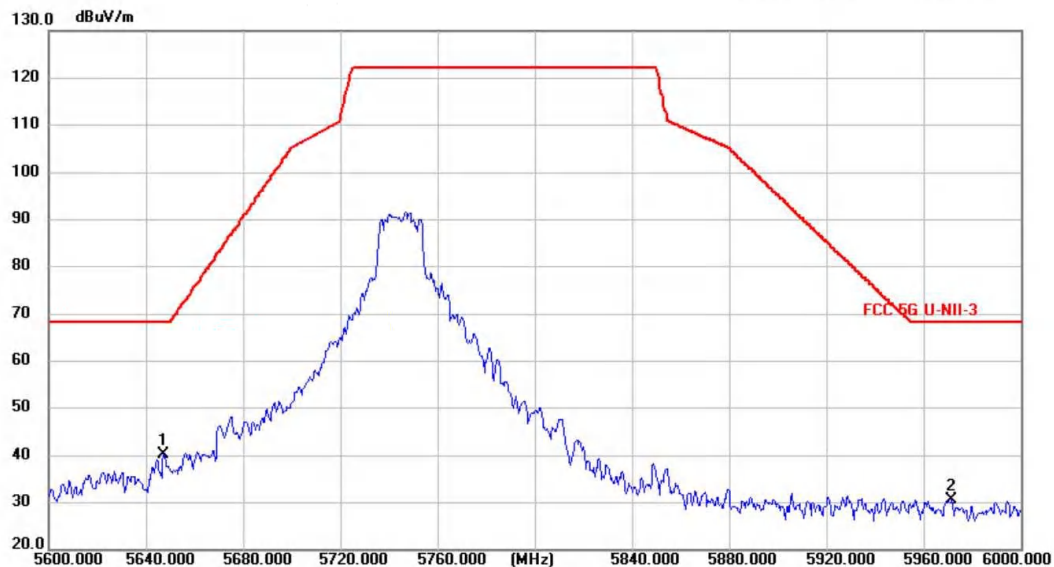

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 5647.500        | 56.51          | -16.32        | 40.19          | 68.20          | -28.01      | peak     | 150         | 240            | P   |        |
| 2   | 5971.800        | 46.26          | -15.57        | 30.69          | 68.20          | -37.51      | peak     | 150         | 190            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
 1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
 Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

|                                   |                               |                    |
|-----------------------------------|-------------------------------|--------------------|
| Test Site: PSI EMC Lab-3m Chamber | Polarization: <b>Vertical</b> | Temperature: 24 °C |
| EUT: 3D Scanner                   | Distance: 3m                  | Humidity: 56 %RH   |
| M/N: Einstar Rockit               | Test Engineer: Felix          |                    |
| Test Mode: ac20 5825MHz           |                               |                    |
| Test Voltage: DC 3.6V             |                               |                    |
| Note:                             |                               |                    |

**Radiated Emission Measurement**

Test Date: 2025/7/19 18:55:38

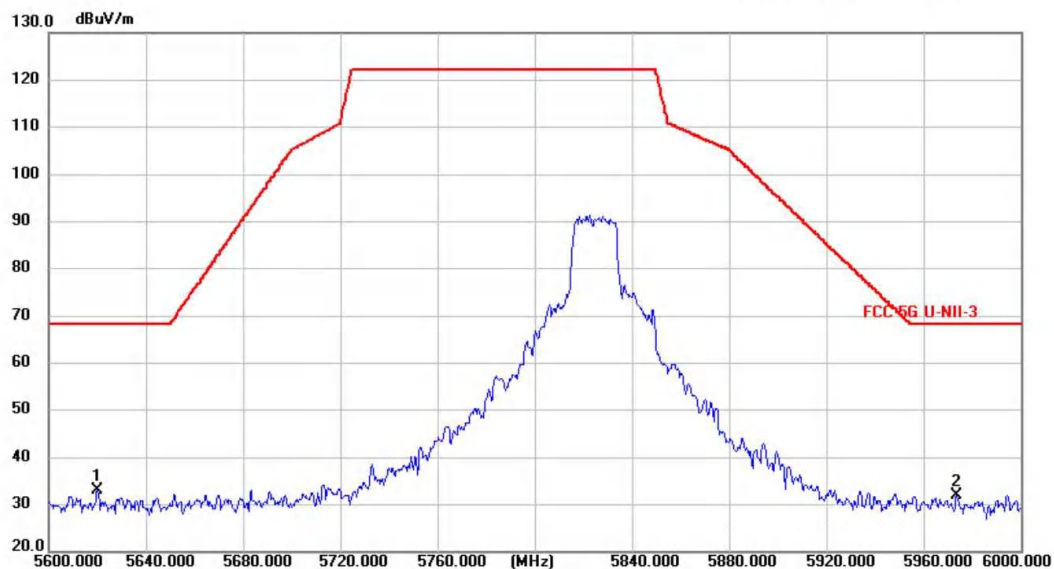

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 5620.150        | 49.38          | -16.37        | 33.01          | 68.20          | -35.19      | peak     | 150         | 108            | P   |        |
| 2   | 5973.700        | 47.45          | -15.56        | 31.89          | 68.20          | -36.31      | peak     | 150         | 131            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

|                                   |                                 |                    |
|-----------------------------------|---------------------------------|--------------------|
| Test Site: PSI EMC Lab-3m Chamber | Polarization: <b>Horizontal</b> | Temperature: 24 °C |
| EUT: 3D Scanner                   | Distance: 3m                    | Humidity: 56 %RH   |
| M/N: Einstar Rockit               | Test Engineer: Felix            |                    |
| Test Mode: ac20 5825MHz           |                                 |                    |
| Test Voltage: DC 3.6V             |                                 |                    |
| Note:                             |                                 |                    |

### Radiated Emission Measurement

Test Date: 2025/7/19 19:00:20

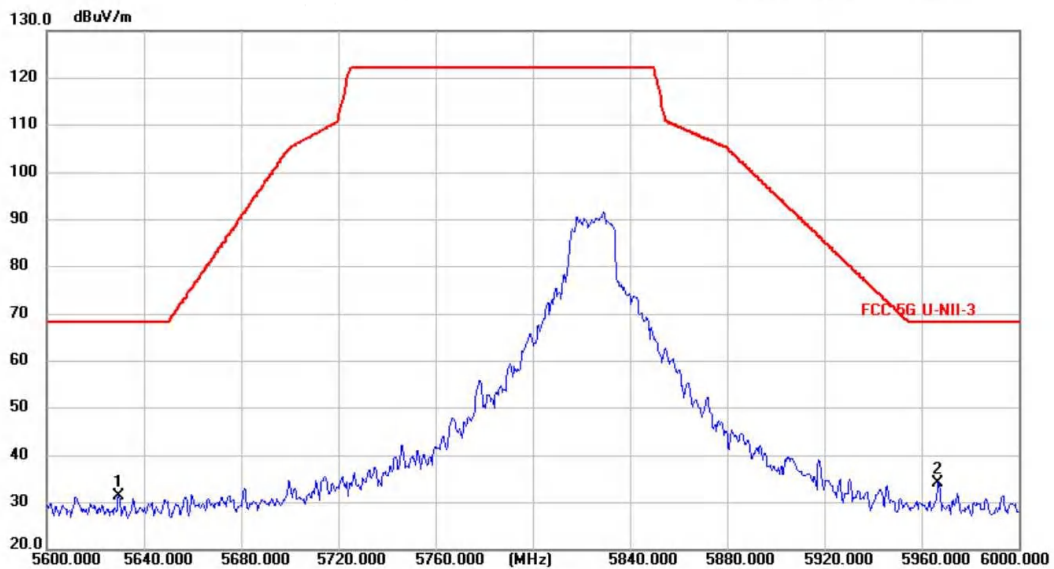

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1   | 5629.700        | 47.71          | -16.35        | 31.36          | 68.20          | -36.84      | peak     | 150         | 128            | P   |        |
| 2 * | 5967.100        | 49.70          | -15.57        | 34.13          | 68.20          | -34.07      | peak     | 150         | 331            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
 1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
 Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

|                                   |                                 |                    |
|-----------------------------------|---------------------------------|--------------------|
| Test Site: PSI EMC Lab-3m Chamber | Polarization: <b>Horizontal</b> | Temperature: 24 °C |
| EUT: 3D Scanner                   | Distance: 3m                    | Humidity: 56 %RH   |
| M/N: Einstar Rockit               | Test Engineer: Felix            |                    |
| Test Mode: ax20 5745MHz           |                                 |                    |
| Test Voltage: DC 3.6V             |                                 |                    |
| Note:                             |                                 |                    |

**Radiated Emission Measurement**

Test Date: 2025/7/19 19:05:26

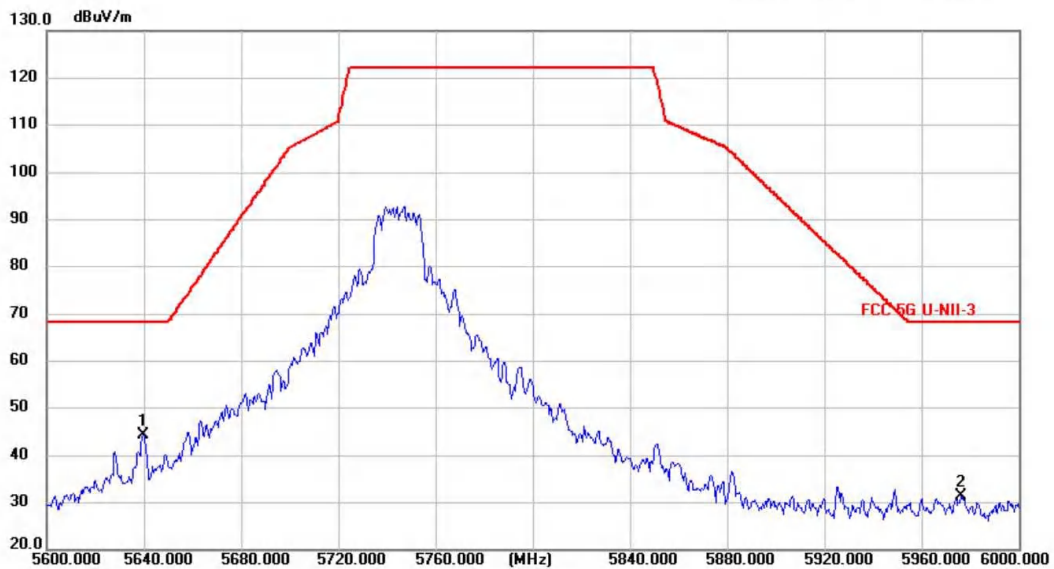

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 5639.900        | 60.70          | -16.33        | 44.37          | 68.20          | -23.83      | peak     | 150         | 289            | P   |        |
| 2   | 5976.550        | 47.07          | -15.56        | 31.51          | 68.20          | -36.69      | peak     | 150         | 226            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber      Polarization: **Vertical**      Temperature: 24 °C  
EUT: 3D Scanner      Distance: 3m      Humidity: 56 %RH  
M/N: Einstar Rockit      Test Engineer: Felix  
Test Mode: ax20 5745MHz  
Test Voltage: DC 3.6V  
Note:

### Radiated Emission Measurement

Test Date: 2025/7/19 19:10:56

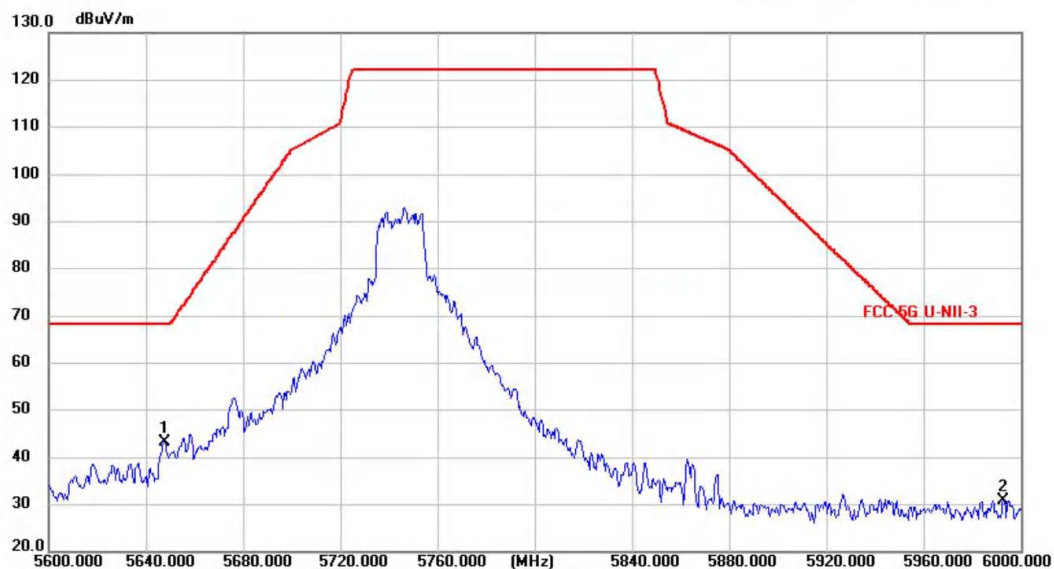

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 5647.750        | 59.44          | -16.32        | 43.12          | 68.20          | -25.08      | peak     | 150         | 132            | P   |        |
| 2   | 5993.050        | 46.39          | -15.51        | 30.88          | 68.20          | -37.32      | peak     | 150         | 261            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber      Polarization: **Vertical**      Temperature: 24 °C  
EUT: 3D Scanner      Distance: 3m      Humidity: 56 %RH  
M/N: Einstar Rockit      Test Engineer: Felix  
Test Mode: ax20 5825MHz  
Test Voltage: DC 3.6V  
Note:

### Radiated Emission Measurement

Test Date: 2025/7/19 19:15:32

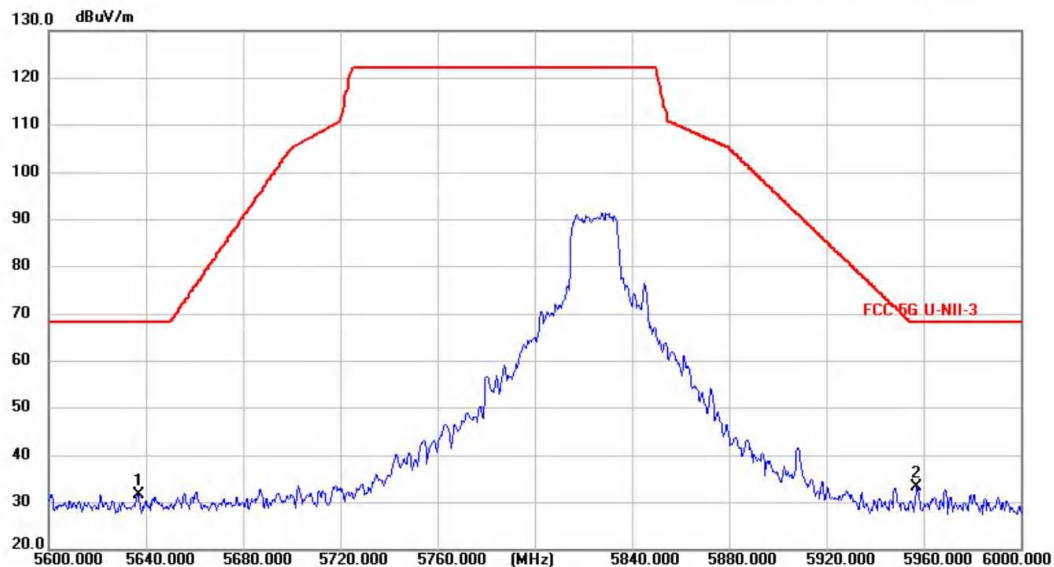

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1   | 5636.850        | 48.15          | -16.33        | 31.82          | 68.20          | -36.38      | peak     | 150         | 246            | P   |        |
| 2 * | 5957.500        | 48.86          | -15.60        | 33.26          | 68.20          | -34.94      | peak     | 150         | 120            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber      Polarization: **Horizontal**      Temperature: 24 °C  
EUT: 3D Scanner      Distance: 3m      Humidity: 56 %RH  
M/N: Einstar Rockit      Test Engineer: Felix  
Test Mode: ax20 5825MHz  
Test Voltage: DC 3.6V  
Note:

### Radiated Emission Measurement

Test Date: 2025/7/19 19:20:19

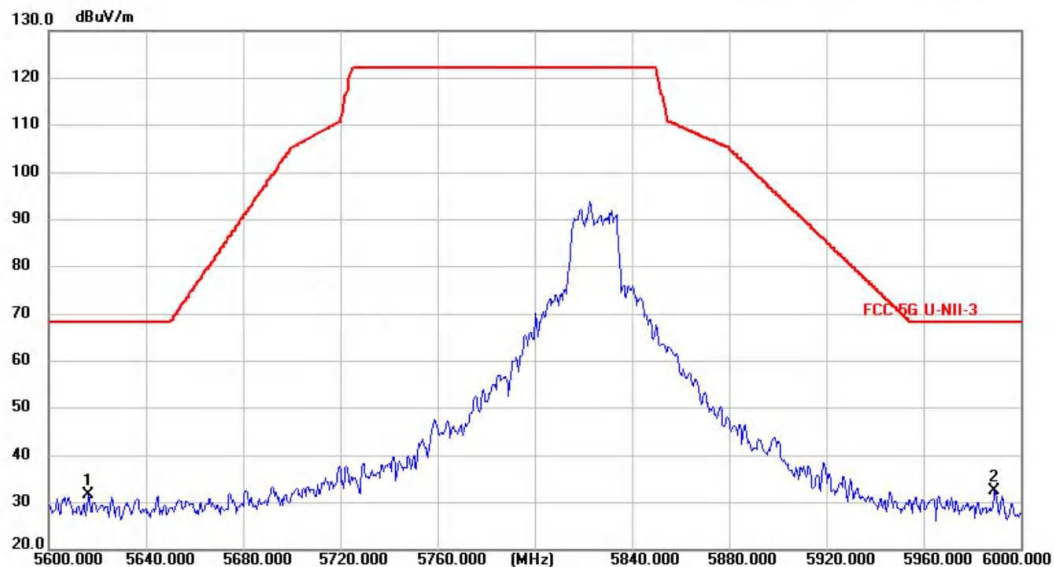

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1   | 5616.550        | 48.01          | -16.39        | 31.62          | 68.20          | -36.58      | peak     | 150         | 327            | P   |        |
| 2 * | 5989.550        | 48.04          | -15.52        | 32.52          | 68.20          | -35.68      | peak     | 150         | 38             | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber      Polarization: **Horizontal**      Temperature: 24 °C  
EUT: 3D Scanner      Distance: 3m      Humidity: 56 %RH  
M/N: Einstar Rockit      Test Engineer: Felix  
Test Mode: n40 5755MHz  
Test Voltage: DC 3.6V  
Note:

### Radiated Emission Measurement

Test Date: 2025/7/19 19:25:28

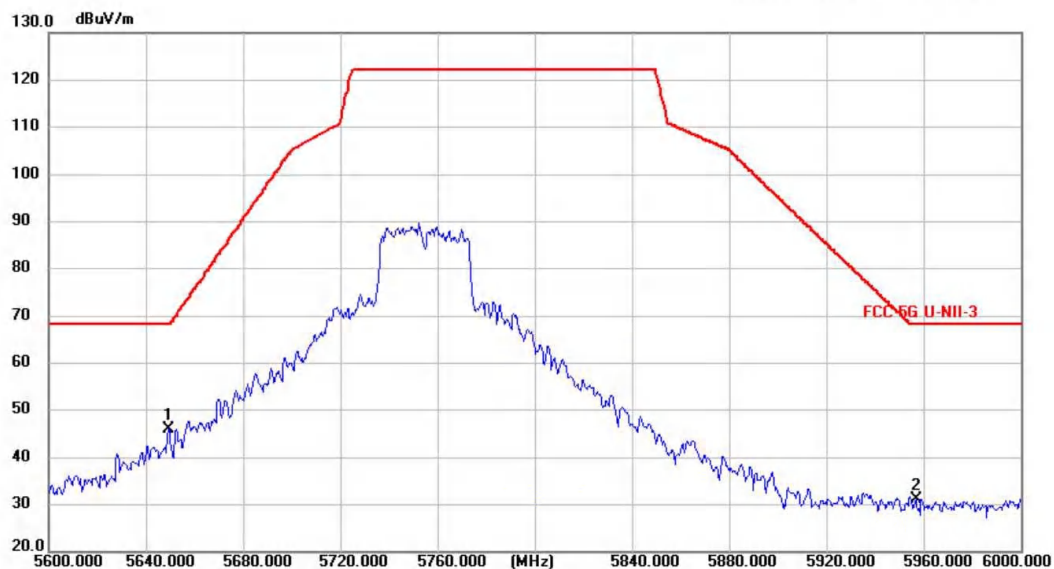

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 5649.500        | 62.44          | -16.32        | 46.12          | 68.20          | -22.08      | peak     | 150         | 119            | P   |        |
| 2   | 5956.900        | 46.68          | -15.60        | 31.08          | 68.20          | -37.12      | peak     | 150         | 320            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber      Polarization: **Vertical**      Temperature: 24 °C  
EUT: 3D Scanner      Distance: 3m      Humidity: 56 %RH  
M/N: Einstar Rockit      Test Engineer: Felix  
Test Mode: n40 5755MHz  
Test Voltage: DC 3.6V  
Note:

### Radiated Emission Measurement

Test Date: 2025/7/19 19:30:03

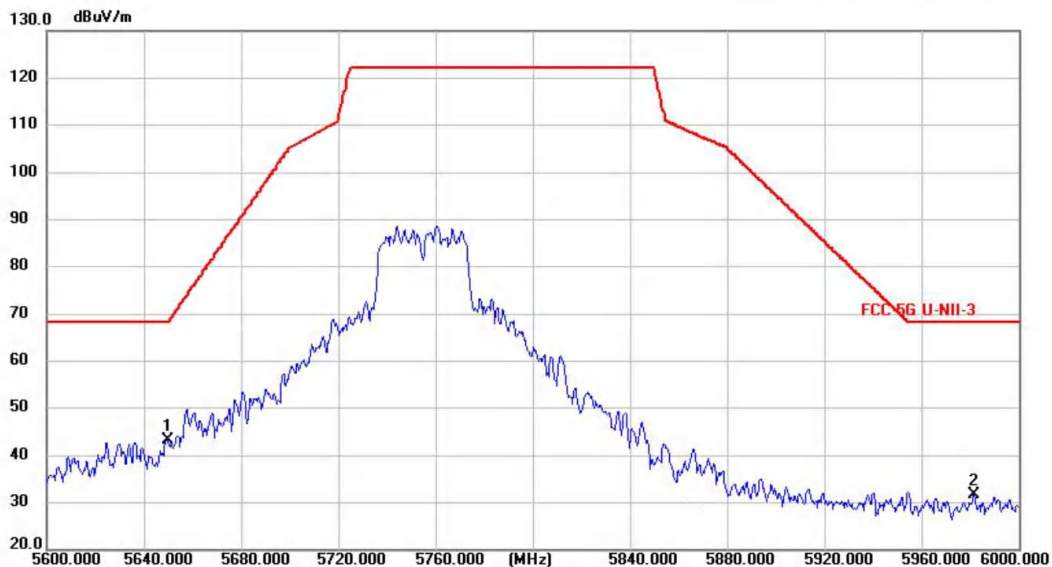

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 5649.600        | 59.63          | -16.32        | 43.31          | 68.20          | -24.89      | peak     | 150         | 340            | P   |        |
| 2   | 5981.600        | 47.15          | -15.54        | 31.61          | 68.20          | -36.59      | peak     | 150         | 124            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber      Polarization: **Vertical**      Temperature: 24 °C  
EUT: 3D Scanner      Distance: 3m      Humidity: 56 %RH  
M/N: Einstar Rockit      Test Engineer: Felix  
Test Mode: n40 5795MHz  
Test Voltage: DC 3.6V  
Note:

### Radiated Emission Measurement

Test Date: 2025/7/19 19:35:15

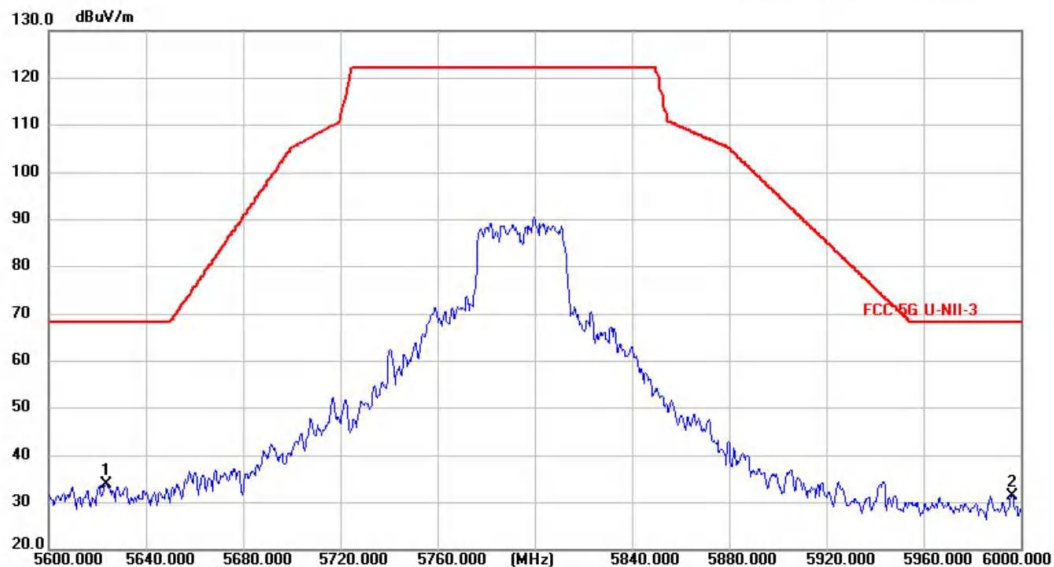

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 5623.850        | 50.17          | -16.36        | 33.81          | 68.20          | -34.39      | peak     | 150         | 206            | P   |        |
| 2   | 5996.450        | 47.05          | -15.50        | 31.55          | 68.20          | -36.65      | peak     | 150         | 112            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber      Polarization: **Horizontal**      Temperature: 24 °C  
EUT: 3D Scanner      Distance: 3m      Humidity: 56 %RH  
M/N: Einstar Rockit      Test Engineer: Felix  
Test Mode: n40 5795MHz  
Test Voltage: DC 3.6V  
Note:

### Radiated Emission Measurement

Test Date: 2025/7/19 19:40:25

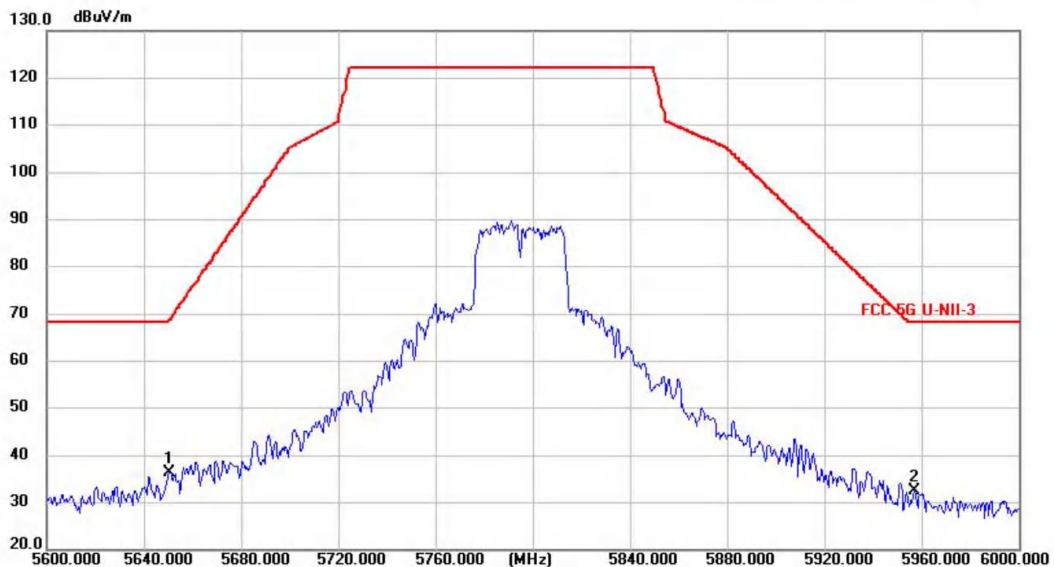

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 5650.750        | 52.56          | -16.29        | 36.27          | 68.76          | -32.49      | peak     | 150         | 121            | P   |        |
| 2   | 5957.300        | 48.08          | -15.60        | 32.48          | 68.20          | -35.72      | peak     | 150         | 174            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber      Polarization: **Horizontal**      Temperature: 24 °C  
EUT: 3D Scanner      Distance: 3m      Humidity: 56 %RH  
M/N: Einstar Rockit      Test Engineer: Felix  
Test Mode: ac40 5755MHz  
Test Voltage: DC 3.6V  
Note:

### Radiated Emission Measurement

Test Date: 2025/7/19 19:45:58

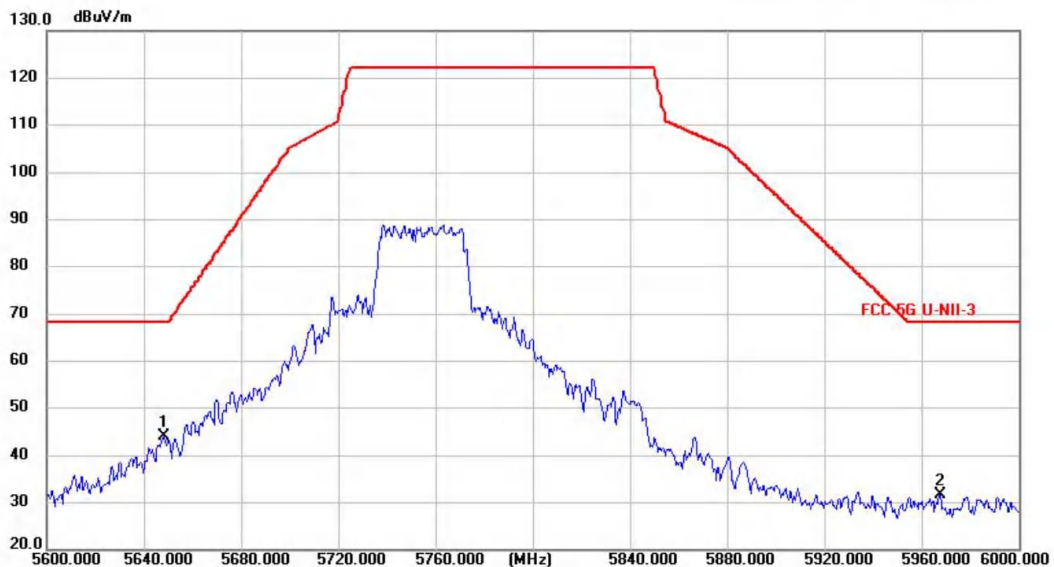

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 5648.250        | 60.42          | -16.32        | 44.10          | 68.20          | -24.10      | peak     | 150         | 254            | P   |        |
| 2   | 5967.600        | 47.24          | -15.57        | 31.67          | 68.20          | -36.53      | peak     | 150         | 158            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber      Polarization: **Vertical**      Temperature: 24 °C  
EUT: 3D Scanner      Distance: 3m      Humidity: 56 %RH  
M/N: Einstar Rockit      Test Engineer: Felix  
Test Mode: ac40 5755MHz  
Test Voltage: DC 3.6V  
Note:

#### Radiated Emission Measurement

Test Date: 2025/7/19 19:50:39

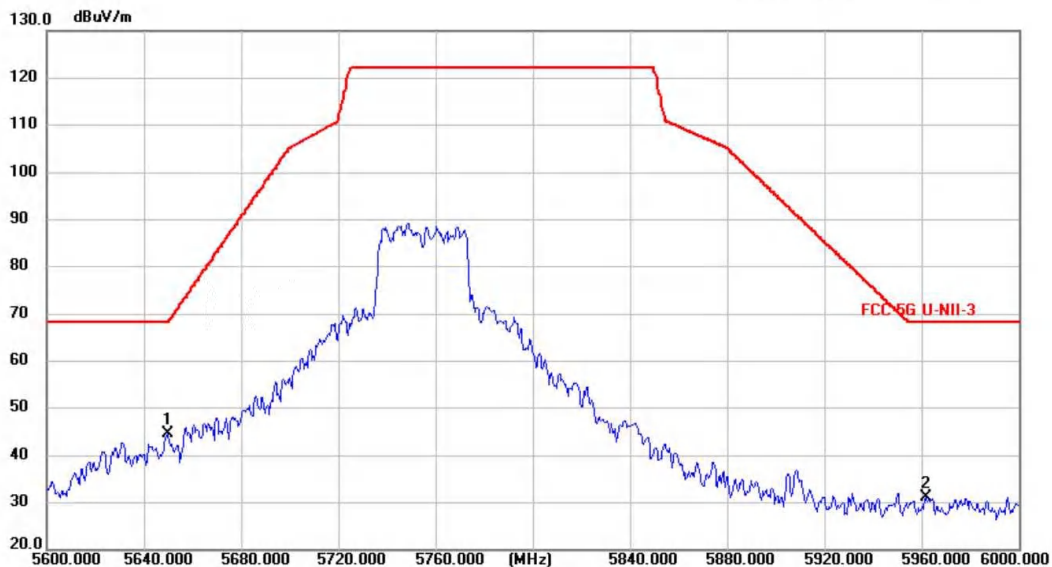

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 5649.800        | 60.96          | -16.32        | 44.64          | 68.20          | -23.56      | peak     | 150         | 114            | P   |        |
| 2   | 5961.800        | 46.76          | -15.59        | 31.17          | 68.20          | -37.03      | peak     | 150         | 56             | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber      Polarization: **Vertical**      Temperature: 24 °C  
EUT: 3D Scanner      Distance: 3m      Humidity: 56 %RH  
M/N: Einstar Rockit      Test Engineer: Felix  
Test Mode: ac40 5795MHz  
Test Voltage: DC 3.6V  
Note:

### Radiated Emission Measurement

Test Date: 2025/7/19 19:55:39



| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 5623.550        | 50.70          | -16.36        | 34.34          | 68.20          | -33.86      | peak     | 150         | 292            | P   |        |
| 2   | 5961.550        | 48.70          | -15.59        | 33.11          | 68.20          | -35.09      | peak     | 150         | 298            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber      Polarization: **Horizontal**      Temperature: 24 °C  
EUT: 3D Scanner      Distance: 3m      Humidity: 56 %RH  
M/N: Einstar Rockit      Test Engineer: Felix  
Test Mode: ac40 5795MHz  
Test Voltage: DC 3.6V  
Note:

### Radiated Emission Measurement

Test Date: 2025/7/19 20:00:38

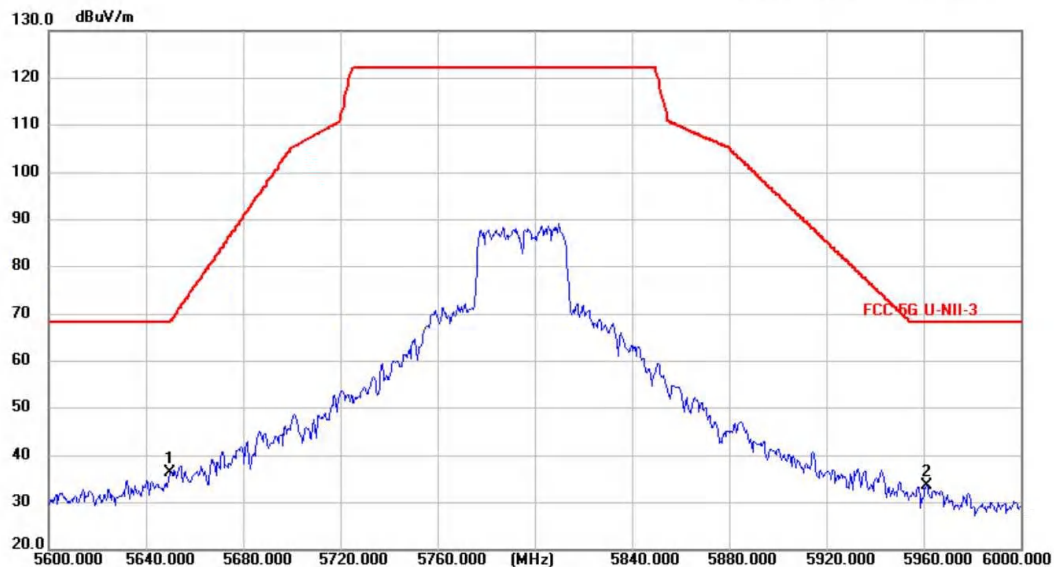

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 5650.350        | 52.67          | -16.29        | 36.38          | 68.46          | -32.08      | peak     | 150         | 110            | P   |        |
| 2   | 5961.550        | 49.28          | -15.59        | 33.69          | 68.20          | -34.51      | peak     | 150         | 201            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber      Polarization: **Horizontal**      Temperature: 24 °C  
EUT: 3D Scanner      Distance: 3m      Humidity: 56 %RH  
M/N: Einstar Rockit      Test Engineer: Felix  
Test Mode: ax40 5755MHz  
Test Voltage: DC 3.6V  
Note:

### Radiated Emission Measurement

Test Date: 2025/7/19 20:05:41



| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 5646.250        | 62.30          | -16.32        | 45.98          | 68.20          | -22.22      | peak     | 150         | 157            | P   |        |
| 2   | 5964.600        | 47.46          | -15.58        | 31.88          | 68.20          | -36.32      | peak     | 150         | 123            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

|                                   |                               |                    |
|-----------------------------------|-------------------------------|--------------------|
| Test Site: PSI EMC Lab-3m Chamber | Polarization: <b>Vertical</b> | Temperature: 24 °C |
| EUT: 3D Scanner                   | Distance: 3m                  | Humidity: 56 %RH   |
| M/N: Einstar Rockit               | Test Engineer: Felix          |                    |
| Test Mode: ax40 5755MHz           |                               |                    |
| Test Voltage: DC 3.6V             |                               |                    |
| Note:                             |                               |                    |

### Radiated Emission Measurement

Test Date: 2025/7/19 20:10:20

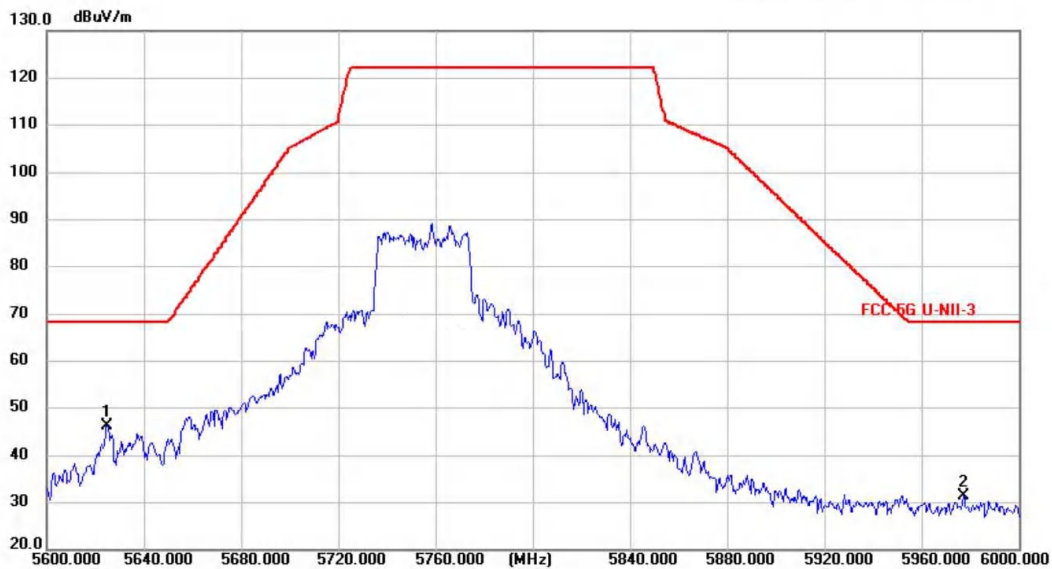

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 5624.900        | 62.63          | -16.36        | 46.27          | 68.20          | -21.93      | peak     | 150         | 280            | P   |        |
| 2   | 5977.550        | 47.07          | -15.56        | 31.51          | 68.20          | -36.69      | peak     | 150         | 16             | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber      Polarization: **Vertical**      Temperature: 24 °C  
EUT: 3D Scanner      Distance: 3m      Humidity: 56 %RH  
M/N: Einstar Rockit      Test Engineer: Felix  
Test Mode: ax40 5795MHz  
Test Voltage: DC 3.6V  
Note:

### Radiated Emission Measurement

Test Date: 2025/7/19 20:15:32

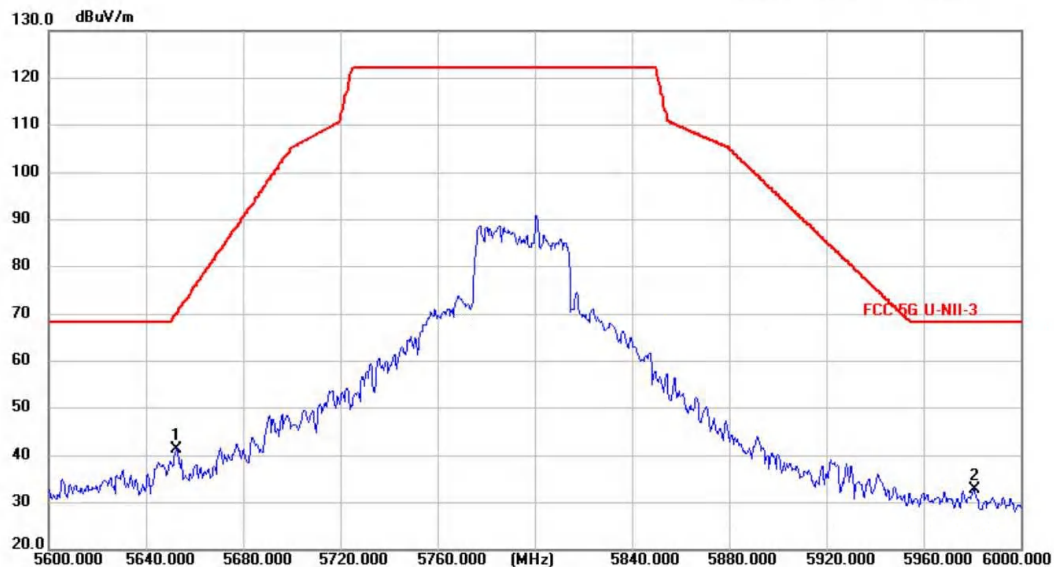

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 5652.750        | 57.53          | -16.29        | 41.24          | 70.24          | -29.00      | peak     | 150         | 233            | P   |        |
| 2   | 5980.850        | 48.37          | -15.54        | 32.83          | 68.20          | -35.37      | peak     | 150         | 219            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber      Polarization: **Horizontal**      Temperature: 24 °C  
EUT: 3D Scanner      Distance: 3m      Humidity: 56 %RH  
M/N: Einstar Rockit      Test Engineer: Felix  
Test Mode: ax40 5795MHz  
Test Voltage: DC 3.6V  
Note:

### Radiated Emission Measurement

Test Date: 2025/7/19 20:20:06

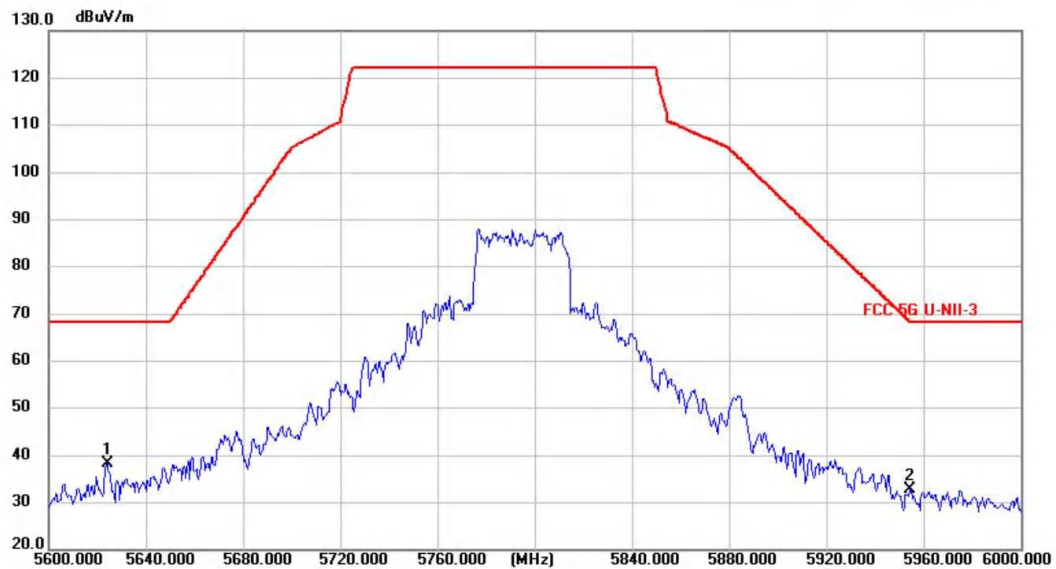

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 5624.000        | 54.64          | -16.36        | 38.28          | 68.20          | -29.92      | peak     | 150         | 153            | P   |        |
| 2   | 5954.750        | 48.30          | -15.60        | 32.70          | 68.32          | -35.62      | peak     | 150         | 339            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber      Polarization: **Horizontal**      Temperature: 24 °C  
EUT: 3D Scanner      Distance: 3m      Humidity: 56 %RH  
M/N: Einstar Rockit      Test Engineer: Felix  
Test Mode: ac80 5775MHz  
Test Voltage: DC 3.6V  
Note:

### Radiated Emission Measurement

Test Date: 2025/7/19 20:25:42

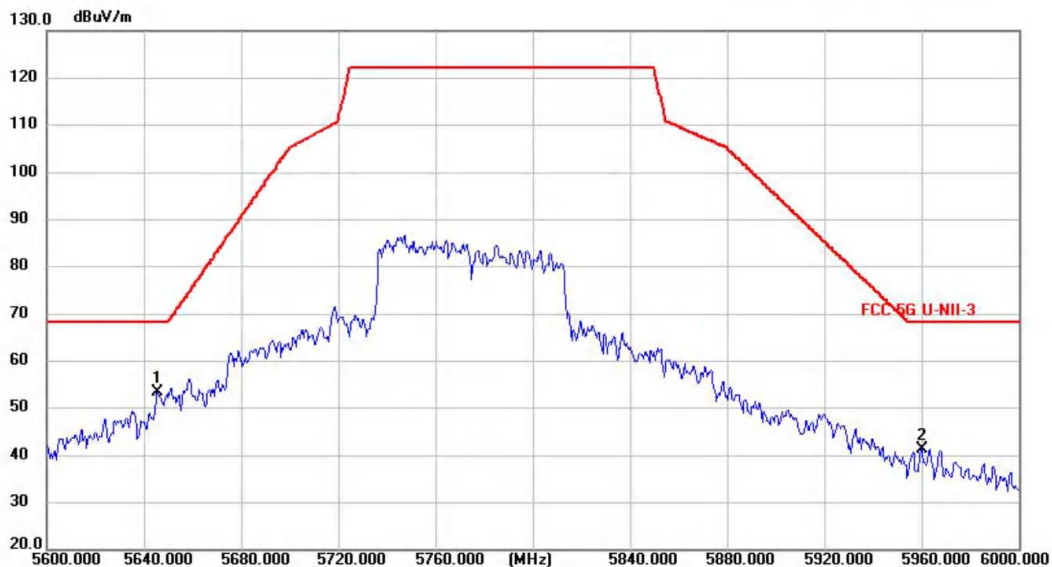

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 5645.650        | 69.72          | -16.32        | 53.40          | 68.20          | -14.80      | peak     | 150         | 211            | P   |        |
| 2   | 5960.100        | 56.96          | -15.59        | 41.37          | 68.20          | -26.83      | peak     | 150         | 104            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber      Polarization: **Vertical**      Temperature: 24 °C  
EUT: 3D Scanner      Distance: 3m      Humidity: 56 %RH  
M/N: Einstar Rockit      Test Engineer: Felix  
Test Mode: ac80 5775MHz  
Test Voltage: DC 3.6V  
Note:

### Radiated Emission Measurement

Test Date: 2025/7/19 20:30:56

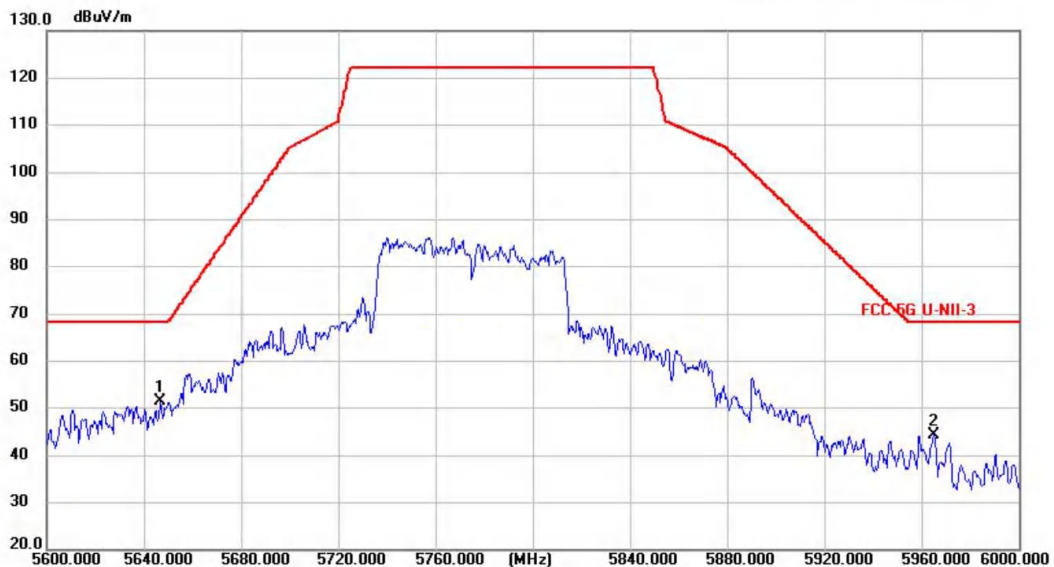

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 5646.900        | 67.78          | -16.32        | 51.46          | 68.20          | -16.74      | peak     | 150         | 84             | P   |        |
| 2   | 5965.200        | 59.86          | -15.58        | 44.28          | 68.20          | -23.92      | peak     | 150         | 268            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber      Polarization: **Vertical**      Temperature: 24 °C  
EUT: 3D Scanner      Distance: 3m      Humidity: 56 %RH  
M/N: Einstar Rockit      Test Engineer: Felix  
Test Mode: ax80 5775MHz  
Test Voltage: DC 3.6V  
Note:

#### Radiated Emission Measurement

Test Date: 2025/7/19 20:35:19

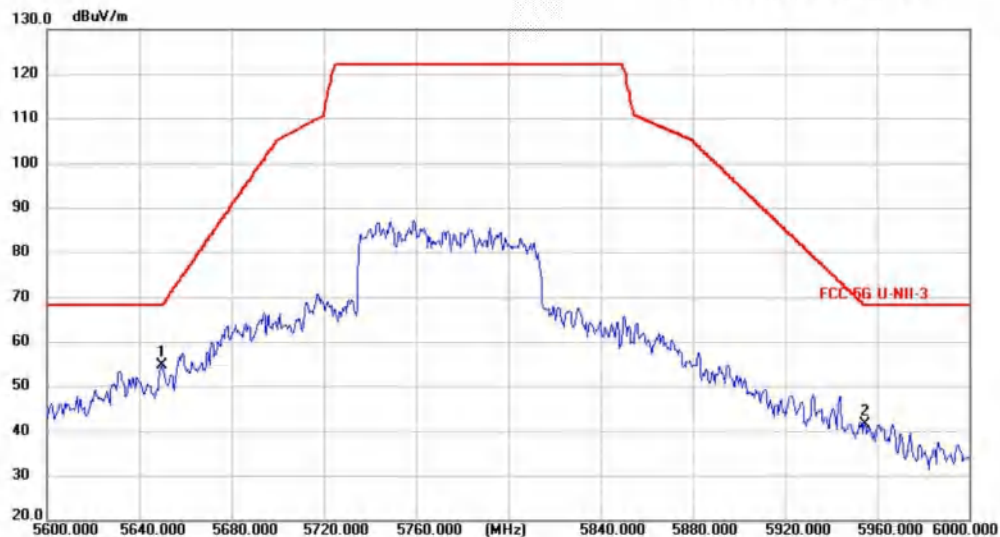

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 5649.900        | 70.99          | -16.32        | 54.67          | 68.20          | -13.53      | peak     | 150         | 323            | P   |        |
| 2   | 5954.900        | 57.26          | -15.60        | 41.66          | 68.25          | -26.59      | peak     | 150         | 210            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

|                                   |                                 |                    |
|-----------------------------------|---------------------------------|--------------------|
| Test Site: PSI EMC Lab-3m Chamber | Polarization: <b>Horizontal</b> | Temperature: 24 °C |
| EUT: 3D Scanner                   | Distance: 3m                    | Humidity: 56 %RH   |
| M/N: Einstar Rockit               | Test Engineer: Felix            |                    |
| Test Mode: ax80 5775MHz           |                                 |                    |
| Test Voltage: DC 3.6V             |                                 |                    |
| Note:                             |                                 |                    |

#### Radiated Emission Measurement

Test Date: 2025/7/19 20:40:25



| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 5644.550        | 69.77          | -16.32        | 53.45          | 68.20          | -14.75      | peak     | 150         | 180            | P   |        |
| 2   | 5957.800        | 59.42          | -15.59        | 43.83          | 68.20          | -24.37      | peak     | 150         | 49             | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit

## 5. Test Results of AC Conducted Emissions




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-Shielded Room      Phase: **N**      Temperature: 26 °C  
EUT: 3D Scanner      Humidity: 54 %RH  
M/N: Einstar Rockit      Test Engineer: Felix  
Test Mode: 5G Wi-Fi Link (Part 15E)  
Test Voltage: AC 120V/60Hz  
Note:

### Conducted Emission Measurement

Test Date: 2025/6/16 17:30:35

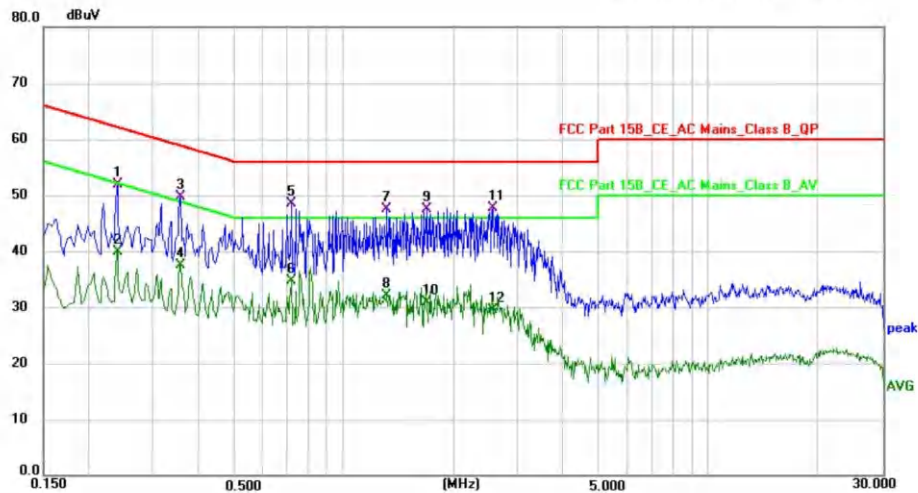

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|-------------|--------------|--------------|-------------|----------|-----|--------|
| 1   | 0.2380          | 41.88          | 9.95        | 51.83        | 62.17        | -10.34      | QP       | P   |        |
| 2   | 0.2380          | 29.91          | 9.95        | 39.86        | 52.17        | -12.31      | AVG      | P   |        |
| 3   | 0.3540          | 39.95          | 9.66        | 49.61        | 58.87        | -9.26       | QP       | P   |        |
| 4   | 0.3540          | 27.90          | 9.66        | 37.56        | 48.87        | -11.31      | AVG      | P   |        |
| 5 * | 0.7180          | 38.69          | 9.76        | 48.45        | 56.00        | -7.55       | QP       | P   |        |
| 6   | 0.7180          | 24.91          | 9.76        | 34.67        | 46.00        | -11.33      | AVG      | P   |        |
| 7   | 1.3140          | 38.12          | 9.43        | 47.55        | 56.00        | -8.45       | QP       | P   |        |
| 8   | 1.3140          | 22.66          | 9.43        | 32.09        | 46.00        | -13.91      | AVG      | P   |        |
| 9   | 1.6940          | 38.26          | 9.34        | 47.60        | 56.00        | -8.40       | QP       | P   |        |
| 10  | 1.6940          | 21.62          | 9.34        | 30.96        | 46.00        | -15.04      | AVG      | P   |        |
| 11  | 2.5660          | 38.30          | 9.43        | 47.73        | 56.00        | -8.27       | QP       | P   |        |
| 12  | 2.5660          | 19.99          | 9.43        | 29.42        | 46.00        | -16.58      | AVG      | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit

# Appendix B

## CN25M6MM 001



Prüfbericht - Produkte  
Test Report - Products

Page 224 of 224




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-Shielded Room Phase: **L1** Temperature: 26 °C  
EUT: 3D Scanner Humidity: 54 %RH  
M/N: Einstar Rockit Test Engineer: Felix  
Test Mode: 5G Wi-Fi Link (Part 15E)  
Test Voltage: AC 120V/60Hz  
Note:

### Conducted Emission Measurement

Test Date: 2025/6/16 17:42:44

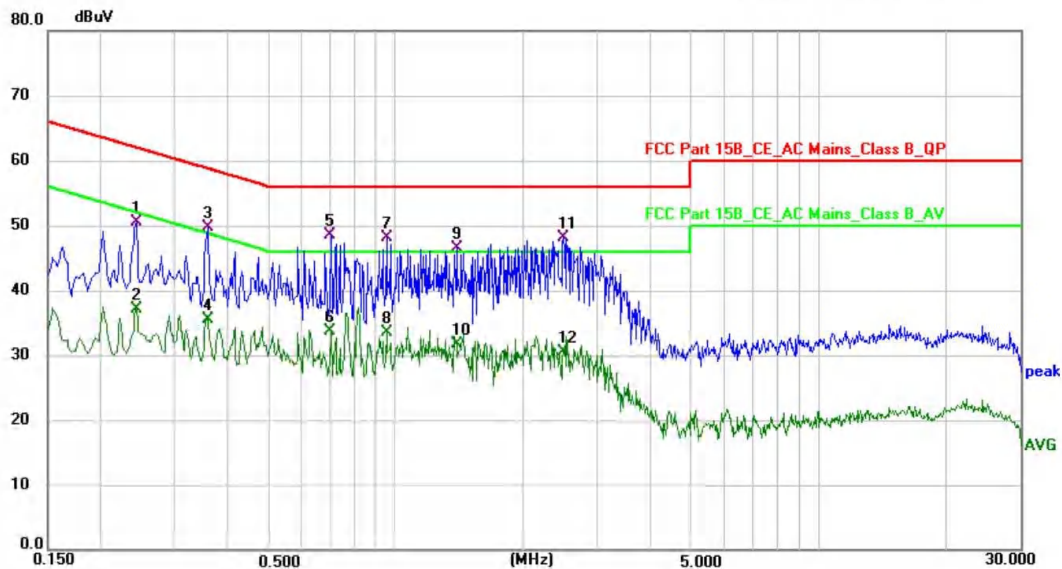

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|-------------|--------------|--------------|-------------|----------|-----|--------|
| 1   | 0.2420          | 40.57          | 9.94        | 50.51        | 62.03        | -11.52      | QP       | P   |        |
| 2   | 0.2420          | 27.11          | 9.94        | 37.05        | 52.03        | -14.98      | AVG      | P   |        |
| 3   | 0.3580          | 40.13          | 9.65        | 49.78        | 58.77        | -8.99       | QP       | P   |        |
| 4   | 0.3580          | 25.78          | 9.65        | 35.43        | 48.77        | -13.34      | AVG      | P   |        |
| 5 * | 0.7019          | 38.66          | 9.78        | 48.44        | 56.00        | -7.56       | QP       | P   |        |
| 6   | 0.7019          | 23.88          | 9.78        | 33.66        | 46.00        | -12.34      | AVG      | P   |        |
| 7   | 0.9500          | 38.54          | 9.55        | 48.09        | 56.00        | -7.91       | QP       | P   |        |
| 8   | 0.9500          | 23.97          | 9.55        | 33.52        | 46.00        | -12.48      | AVG      | P   |        |
| 9   | 1.3940          | 37.04          | 9.41        | 46.45        | 56.00        | -9.55       | QP       | P   |        |
| 10  | 1.3940          | 22.30          | 9.41        | 31.71        | 46.00        | -14.29      | AVG      | P   |        |
| 11  | 2.4940          | 38.75          | 9.41        | 48.16        | 56.00        | -7.84       | QP       | P   |        |
| 12  | 2.4940          | 21.10          | 9.41        | 30.51        | 46.00        | -15.49      | AVG      | P   |        |

Note: \*:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit