



Quick Guide



售后客服


R5 Pro Racing Simulator

HVIN:R5 Pro




01 R5 Pro Direct Drive Wheel Base

Wheelbase Interface

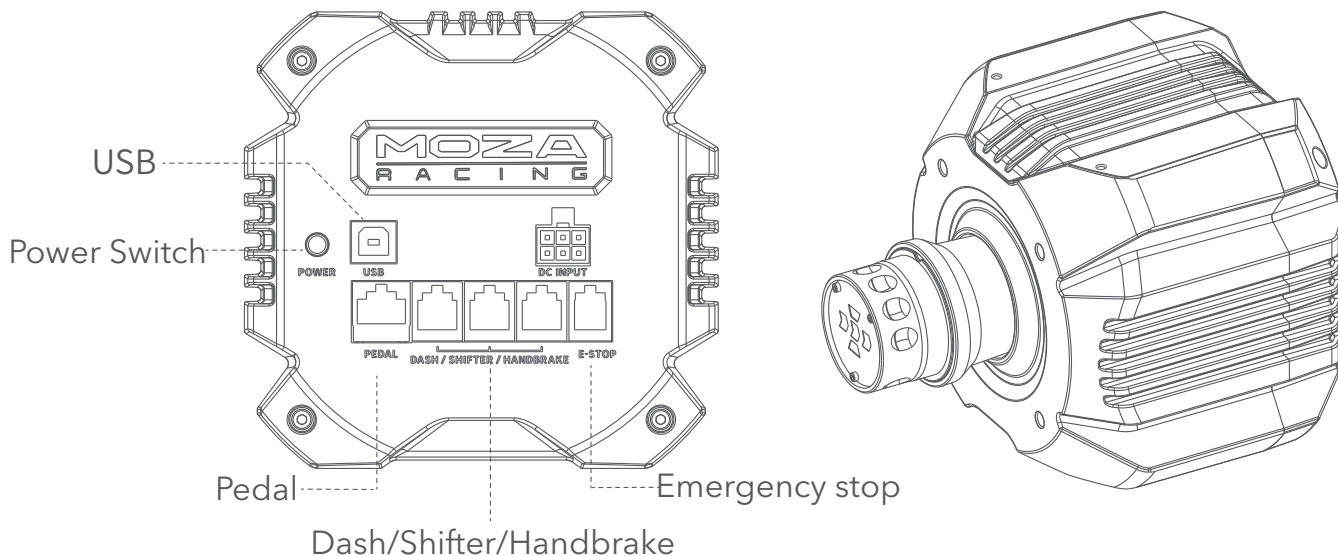

Basic Parameters

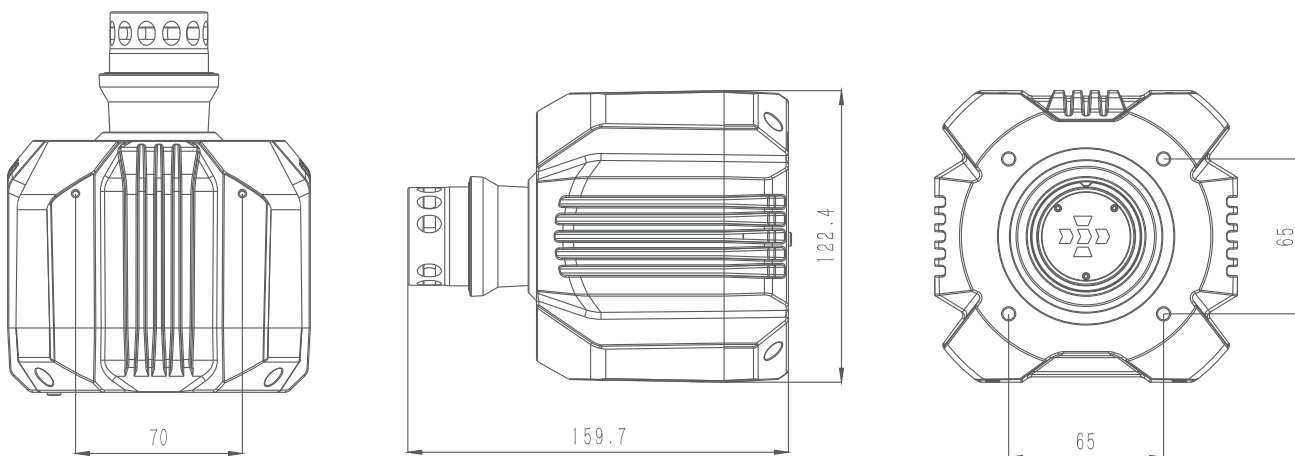


Installation Guide

1. Secure the base to your simulator rig using the bottom or front mounting holes, depending on your mounting configuration.
2. Insert the Type-B end of USB cable and power cable into corresponding ports on the rear of the R5 Pro base.
3. Short press the power button (located on the rear of the R5 Pro base) to power on the R5 Pro.
4. Navigate to MOZA Racing (www.mozaracing.com) and download the latest version of the MOZA Pit House Software Suite. Install it and start your racing journey!
5. For installation videos and further information, visit our official website (www.mozaracing.com)

Desk Clamp Installation Guide

Align the four screw holes on the bottom of the base with the mounting holes on the desk clamp and fix it to the desk clamp with 4 screws. Tighten the knobs on the desk clamp to the desktop and be sure to tighten up the knobs again to avoid the desk clamp from loosening and falling off during intense driving.

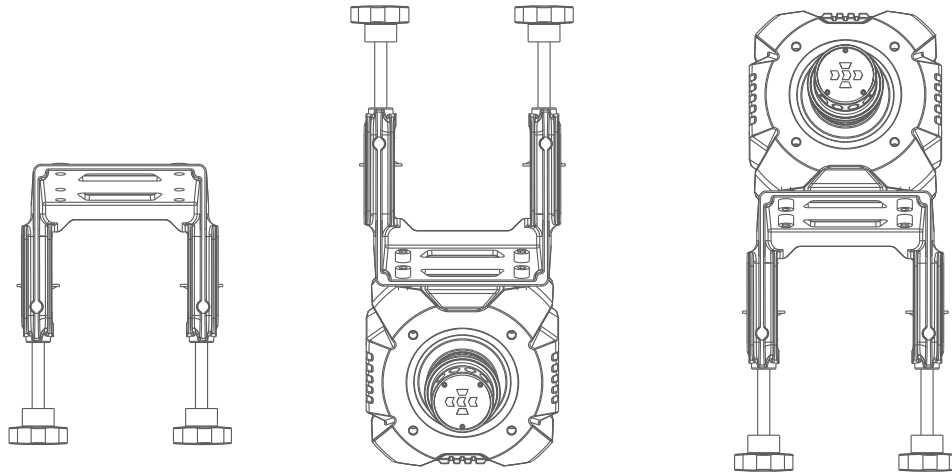

Precautions


- Never expose the unit to rain or water to avoid fire / electric shock.
- The R5 is not suitable for children under the age of 6, and smaller parts may present a choking hazard.
- Children under the age of 13 should be accompanied by a guardian when using the R5.
- It is forbidden to disassemble the device without the permission of MOZA, otherwise the user voluntarily voids their warranty.
- The R5 must be connected to a safe electronic power supply.
- Use only AC power provided by a standard wall outlet to avoid damage to the R5.
- If you find an abnormality with the R5, please stop using the device immediately and contact MOZA directly or a relevant authorized dealer / center.



This product is designed as a simulator! Please remember to distinguish simulations from reality and drive safely!

02 ES Lite Steering Wheel

Quick Release Instructions

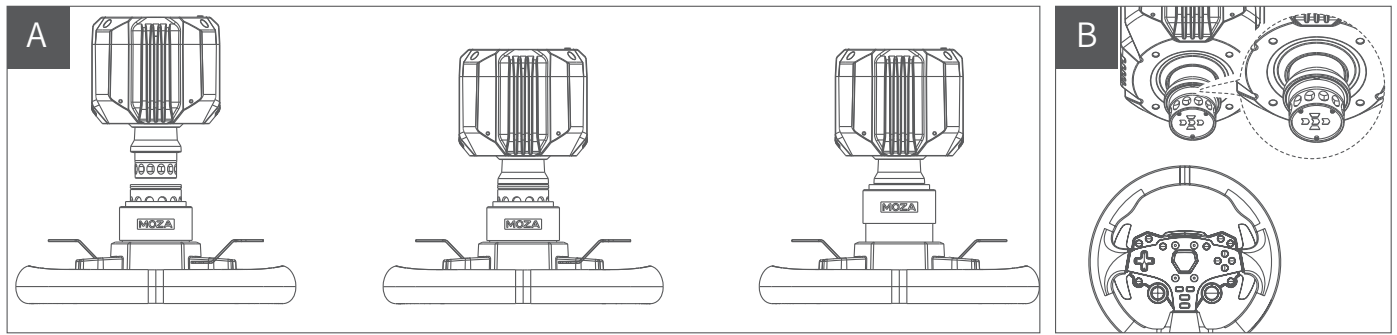

Method A:

- Align the 6 ball bearings on the wheel QR with the 6 notches on the base QR mount.
- Press the quick release onto the base mount, keeping the bearings and notches aligned.
- The quick release will automatically lock into place; if it doesn't, then remove it, recheck the alignment and try again.
- To remove the wheel, squeeze the black quick release part with the MOZA logo towards the wheel with both hands and pull out the wheel at the same time.

Method B:

- Rotate the wheelbase until you locate the arrow directly above the base.
- Center the wheel and attach it to the wheelbase.
- To remove the wheel, use both hands to squeeze the black quick release part with the MOZA logo towards the wheel with both hands and pull out the wheel at the same time.

Wheel Configuration



Using MOZA Pit House, our software suite, the ES Lite steering wheel can easily be set up and configured to your liking.

- Joystick Mode: Can be configured as buttons or keys.
- Indicator Light Switch: Allows for switching the indicator light off, on, or specific speed settings.
- Indicator Light Display Mode: Divided into two modes, toggled in the MOZA Pit house suite.
- Speed Adjustment: Adjustable according to speed and the timing of the shift indicator light, with different presets available.
- Brightness Adjustment: Allows for adjusting of the brightness of the shift indicator.

03 SR-P Lite2 Racing Pedals

Pedal Installation Process

1. Install the pedals onto the included footrest using the mounting holes. Use a 2.5mm hexagon wrench to fix the M4*10 screws into the footrest. To ensure stability and that the pedals will remain secure, it is recommended to use all four screws and install firmly.
2. Connect the pedal wires to the corresponding included interface, using the wire clip under the pedal base to clamp the wires, preventing them from coming loose or interfering with product use.

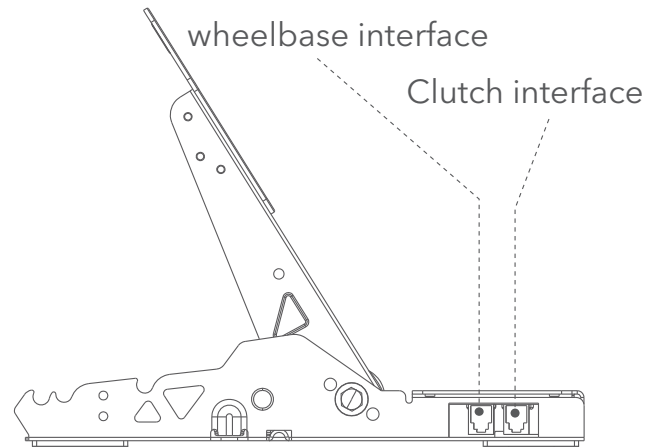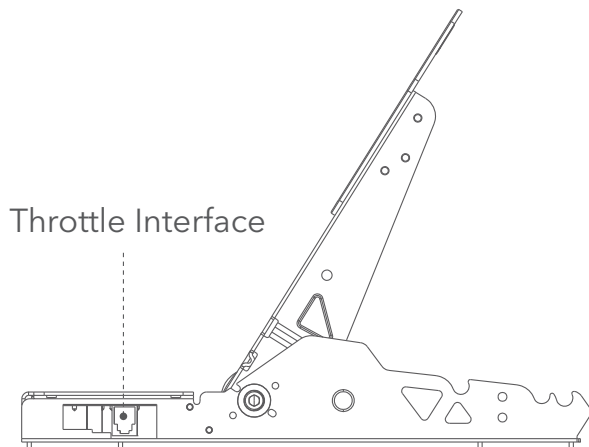

3. Open the MOZA Pit House software suite to preview and confirm the status of each pedal. If the device is still colored grey or does not respond after using the pedal, please unplug the base, close the MOZA Pit House, restart your PC and reconnect the base, finally opening the MOZA Pit House again.
4. The pedal input (start, end point, stroke detail) can all be adjusted within the MOZA Pit House suite.

Pedal Spacing Adjustment

Select the relevant screw holes of the pedal you wish to adjust, loosen the pedal, and move it either left or right to align the pedal as you wish, tightening the screws to lock the pedal into place (adjusting the distance between the throttle, brake and clutch is the same).

Plate Height Adjustment

Loosen and remove the screws holding the pedal face using the 2.5 mm hex wrench. Move the pedal face to the desired height, then reinstall and tighten the screws until they sit flush. (The process is the same for all pedals.)

04 Compliance

- FCC Compliance

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: (1) Reorient or relocate the receiving antenna. (2) Increase the separation between the equipment and receiver. (3) Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. (4) Consult the dealer or an experienced radio/TV technician for help.

- FCC RF Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 cm between the radiator and your body.

- ISED Compliance

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions: (1) This device may not cause interference. (2) This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

1. L'appareil ne doit pas produire de brouillage;
2. L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

- ISED RF Exposure Statement


This equipment complies with ISED radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 cm between the product and your body.

ISED RF Déclaration de exposition:


Este equipo cumple con los límites de exposición a radiación por radiofrecuencia de la ISED estipulados para un ambiente no controlado. Este equipo deberá instalarse y utilizarse con una distancia mínima de 20 cm entre el radiador y el cuerpo.

01 R5 Pro直驱赛车模拟器

基座接口介绍

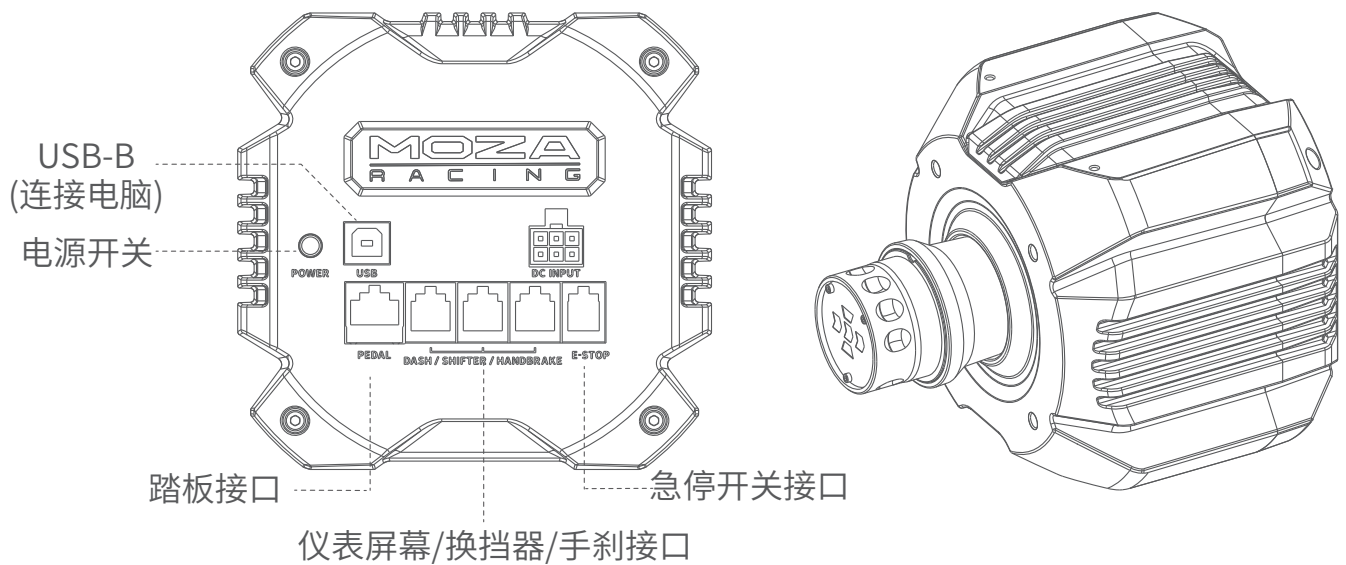

基本参数

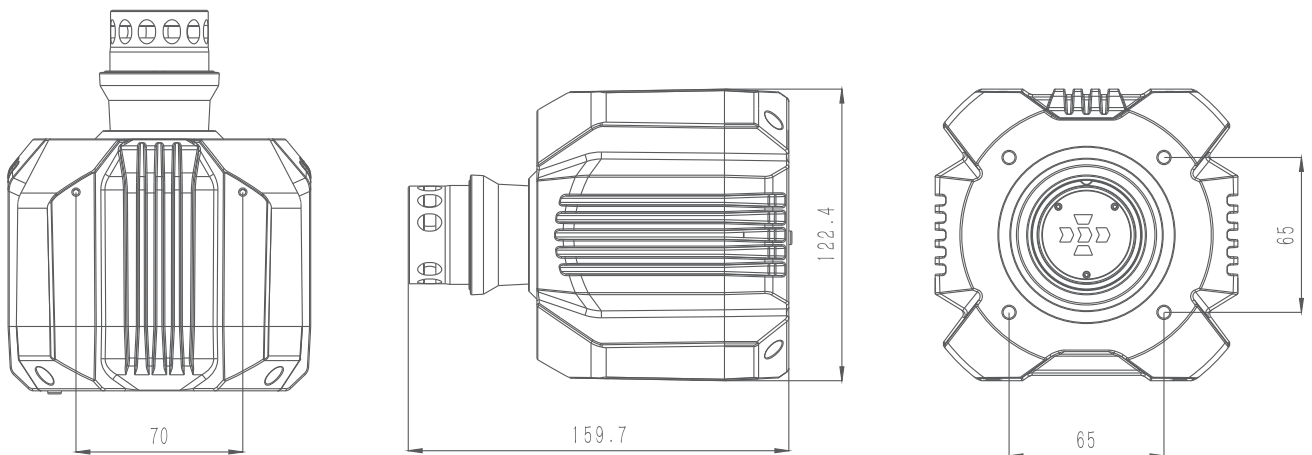


模拟器支架安装教程

1. 根据模拟器支架的安装方式, 将基座通过底部或正面的螺丝孔固定到模拟器支架上。
2. 将电源线、USB线Type-B端分别插入R5 Pro基座尾部对应接口上, 电源线另一端接入220V电源插口, USB线Type-A端接入PC。
3. 短按R5 Pro基座尾部的电源按钮开机。
4. 在MOZA Racing官网 (www.mozaracing.com) 的帮助中心下载最新版本的MOZA Pit House软件并安装, 即可开启您的赛车之旅。
5. 更多信息和教学视频请登录官网 (www.mozaracing.com) 进行查阅。

桌面夹安装教程

将基座底部的四个螺丝孔对准桌面夹上的安装孔位，然后使用4颗螺丝将其固定到桌面夹上，调整桌面夹上的旋钮并使其夹紧到桌面上，夹住桌面后务必再次拧紧旋钮使其彻底固定，以免在激烈的模拟驾驶中桌面夹松动与脱落。

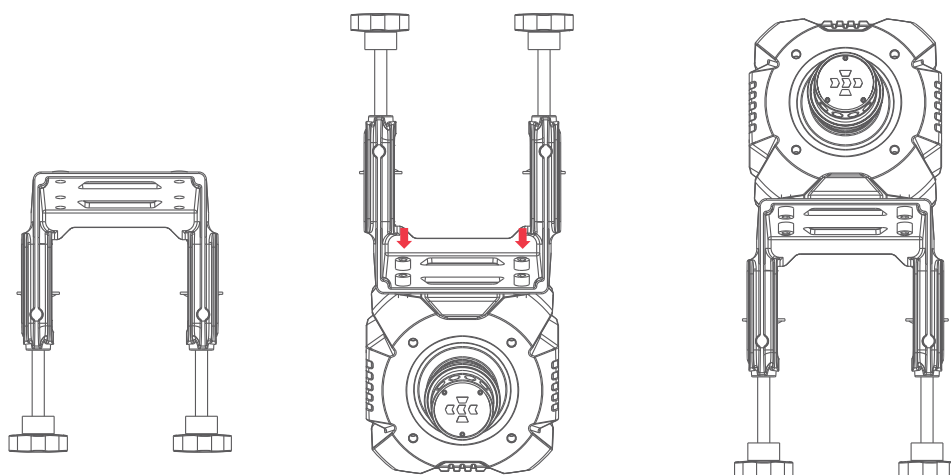

更多信息和教学视频请登录官网 (www.mozaracing.com) 进行查阅


注意事项

- 严禁将设备暴露在雨水以及潮湿的环境中，以避免发生火灾/电击
- 严禁在太阳直射的条件下使用设备
- 为了您的健康，请合理控制游戏时间
- 设备不适用于6岁以下儿童，小配件可能造成窒息的危险！
- 13岁以下孩童需在家长陪同下使用
- 未经厂商允许的情况下，严禁自行拆解设备，否则将失去质保资格
- 设备必须使用配套出厂的电源进行连接，以保障用电安全及用户权益得到保障
- 为保障相关安全，零部件维修或者更换只能由官方授权维修中心进行
- 即使相关电压等数据匹配，亦禁止使用非标准电源
- 只能使用标准壁式电源插座提供的交流电源以避免对产品造成损坏
- 禁止将设备暴露在热源中
- 长期不使用的情况下，请拔出设备电源线断电
- 如发现有任何异常，请立即停止使用并寻求 MOZA 官方或相关授权中心的帮助
- 请关注 MOZA 官网及公众平台以了解最新的相关产品信息

⚠ 本产品仅限于模拟驾驶相关活动，请区别模拟游戏与现实，安全驾驶。

02 ES Lite赛车方向盘

快拆使用方法

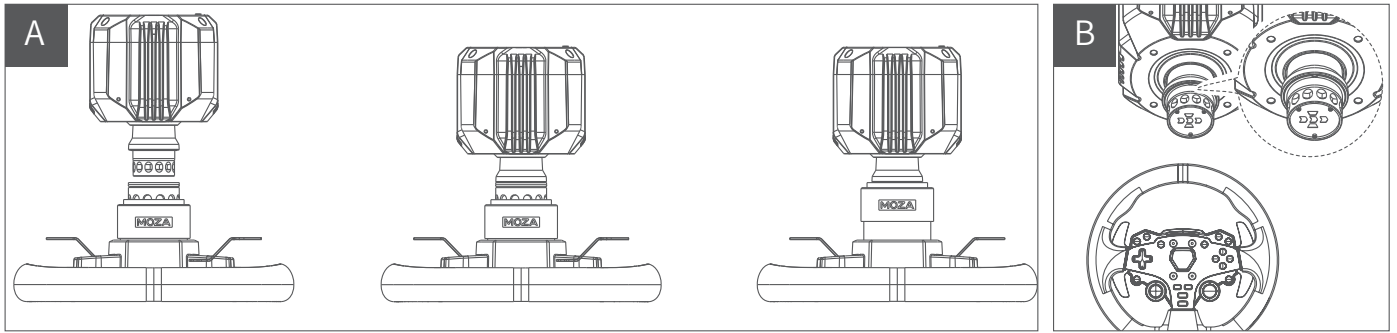

图A:

1. 将方向盘快拆母头上6颗钢珠的位置与基座快拆公头的6个凹槽对应
2. 将快拆往盘面方向按压
3. 快拆将自动归位锁紧, 若无归位, 可尝试轻微转动盘面或取下后再安装
4. 如需拆取盘面, 用双手捏住黑色带logo的外壳, 同时拔出盘面

图B:

1. 找到基座正上方的箭头
2. 找到方向盘正面, 正插进去即可安装
3. 如需拆取盘面, 用双手捏住黑色带logo的外壳, 同时拔出盘面

方向盘配置


在MOZA Pit House软件中可以方便快捷地对ES Lite方向盘进行设置。

- 摇杆模式: 可设置为按键与十字键
- 指示灯开关模式: 指示灯状态调节, 分为随速转动, 关闭和常亮
- 指示灯显示模式: 共分为模式一和模式二, 当鼠标移动到选项上时会弹出详细解释
- 转速提示设置: 根据转速与换档指示灯亮起的时机关系, 分为提前型, 标准型, 极限型和自定义模式
- 亮度调节: 调节换档指示灯的亮度

03 SRP Lite2赛车踏板

踏板安装流程

1. 将踏板装在搁脚板上并调整好安装孔位, 使用2.5mm六角扳手将M4*10螺丝固定到搁脚板上, 为了保证使用稳定性, 建议每个踏板的全部4颗螺丝都安装到位。
2. 将连接线连接到对应的安装接口处, 可以利用踏板底座下的线卡卡住线束, 以防止激烈驾驶时线束磨损与缠绕。

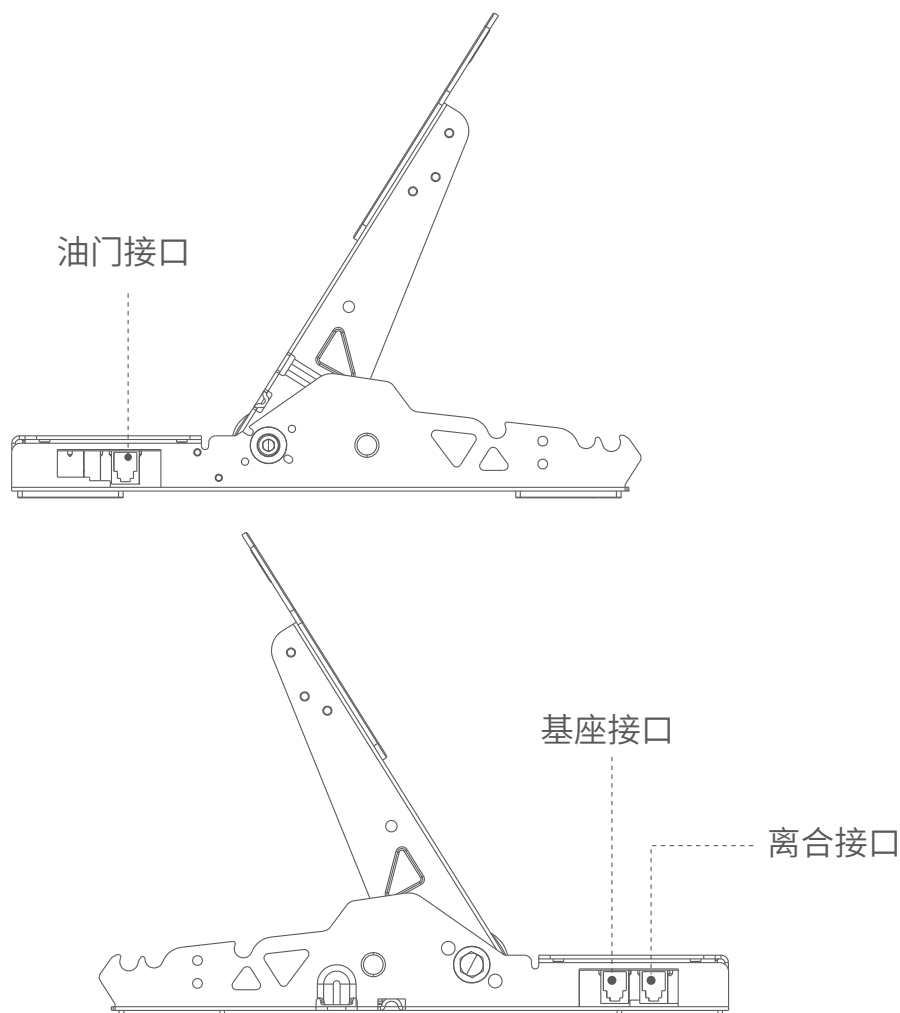

3. 在MOZA Pit House中即可看到踏板的工作状态。(若设备仍为灰色或踩踏后无响应, 请拔出基座端接口, 关闭MOZA Pit House, 再重新接入基座端接口并打开MOZA Pit House)
4. 可在MOZA Pit House中重新设置踏板的起点、终点和行程。

踏板间距调节说明

左右移动调节踏板与底座孔位之间的间距, 选择好螺丝孔位后再锁紧螺丝, (油门、刹车和离合的间距调节方式一致)

踏板板面高度调节说明

使用2.5mm六角扳手, 逆时针转动取下踏板面的螺丝, 上下移动踏板面到合适高度, 再将螺丝拧至与踏板面贴合并固定 (油门、刹车和离合的踏板面调节方式一致)

产品保修卡

产品型号		购买日期	
用户姓名		用户电话	
产品条码		通讯地址	

经销商信息(签章)

产品保修条例

保修期

自购机日起, 基座主体, 方向盘, 踏板和仪表显示屏保修12个月。设备外壳、说明书、线材、螺丝、扳手、包装等不在“一年免费保修服务”范围内, 但您可以选择有偿服务。购买者在以下条件下不享受免费保修服务:

1. 超过三包有效期的;
2. 无三包凭证及有效发票的, 但能够证明该产品在三包有效期内的除外;
3. 保修凭证上的型号与维修产品型号不符或者涂改的;
4. 非本公司特约维修人员拆动造成损坏的;
5. 因不可抗力造成损坏的;
6. 未按产品使用说明书要求使用、维护、保养而造成损坏的;

保修期限鉴于产品部位、不同国家法律法规等差异, 将有所不同。相关国家与区域的保修期限, 请咨询MOZA官方或购买时联系的MOZA授权经销商。





Manufacturer: Shenzhen Gudsen Technology Co., Ltd

Address: Room 1903-1904, Building 3, Nanshan
ZhiyuanChongwen Park, No. 3370 Liuxian Avenue,
Nanshan District, Shenzhen China

Web: www.mozaracing.com

E-mail: info@mozaracing.com

Made in China

EU Representative: Gudsen Technology EU GmbH

Address: Birkenstrasse 23, 40233 Düsseldorf

Contact: JUNWEN DING

Email: support@gudsen.com

UK Representative: Gudsen Technology UK
Limited

Address: Tc-Abo, Luminous House, 300 South Row
Milton Keynes, MK9 2FR, United Kingdom

Contact: JUNWEN DING

Email: support@gudsen.com