


Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M21705-16932-C-1

FCC ID: 2AMKO-IAQPRO

Internal Photos

Model No.: IAQ-Pro

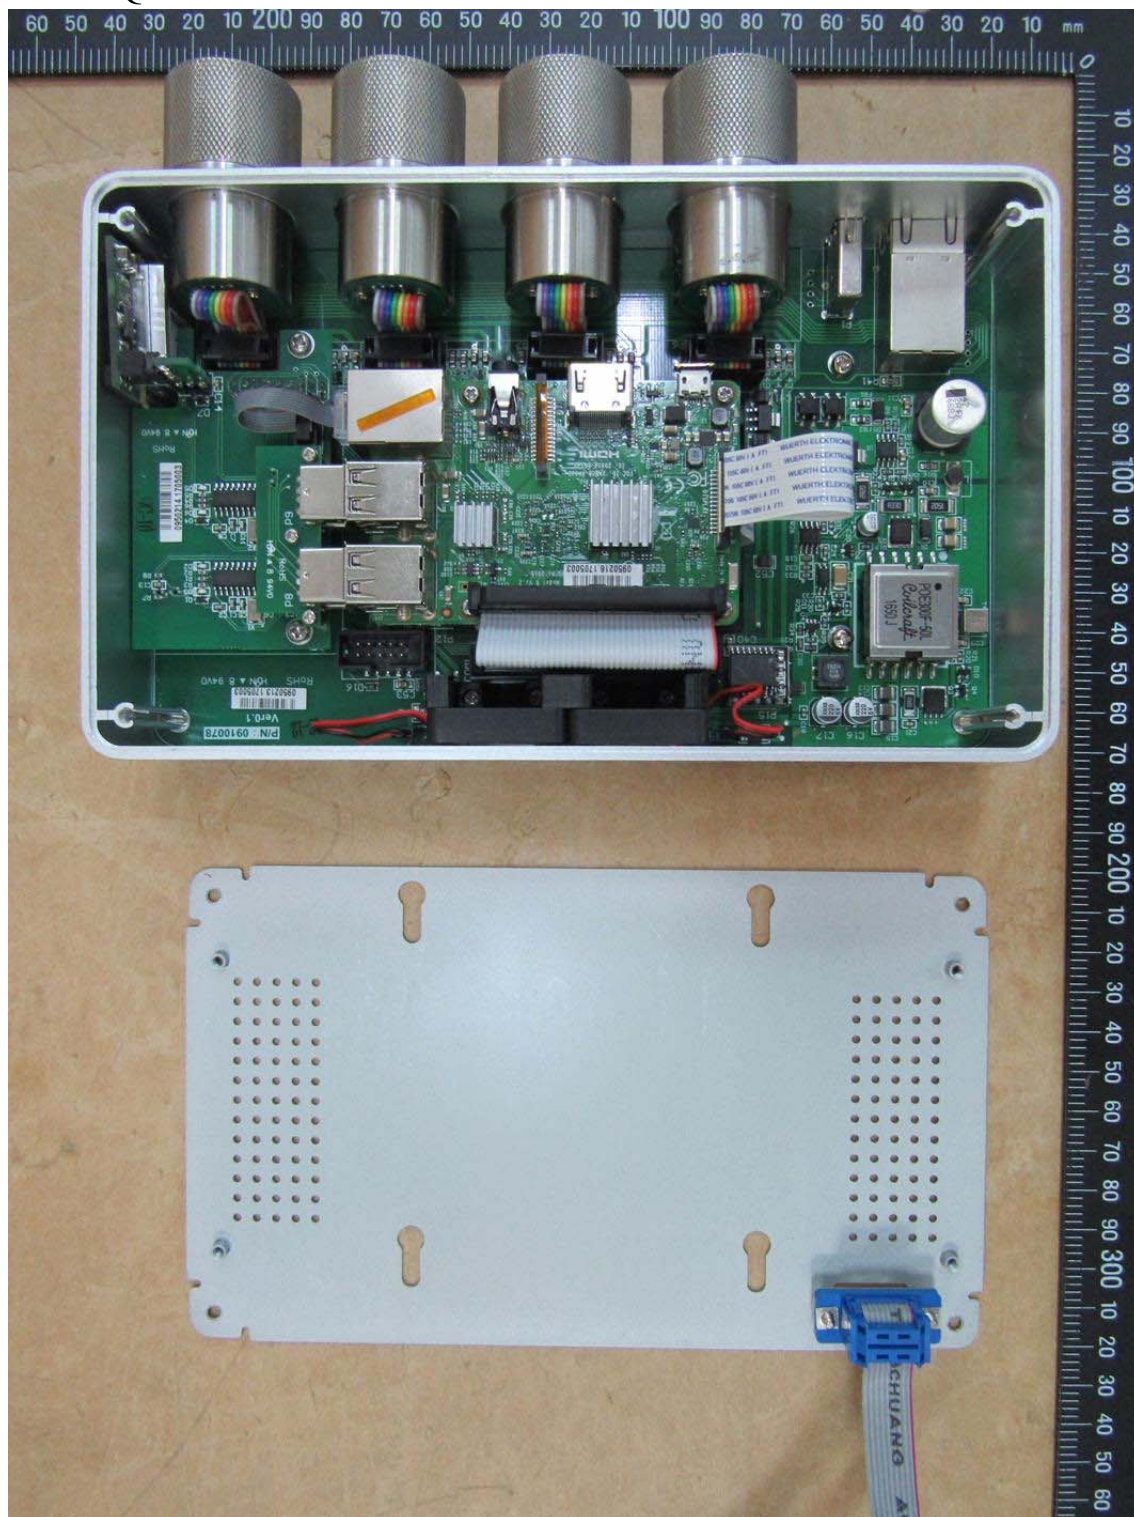




Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M21705-16932-C-1

FCC ID: 2AMKO-IAQPRO

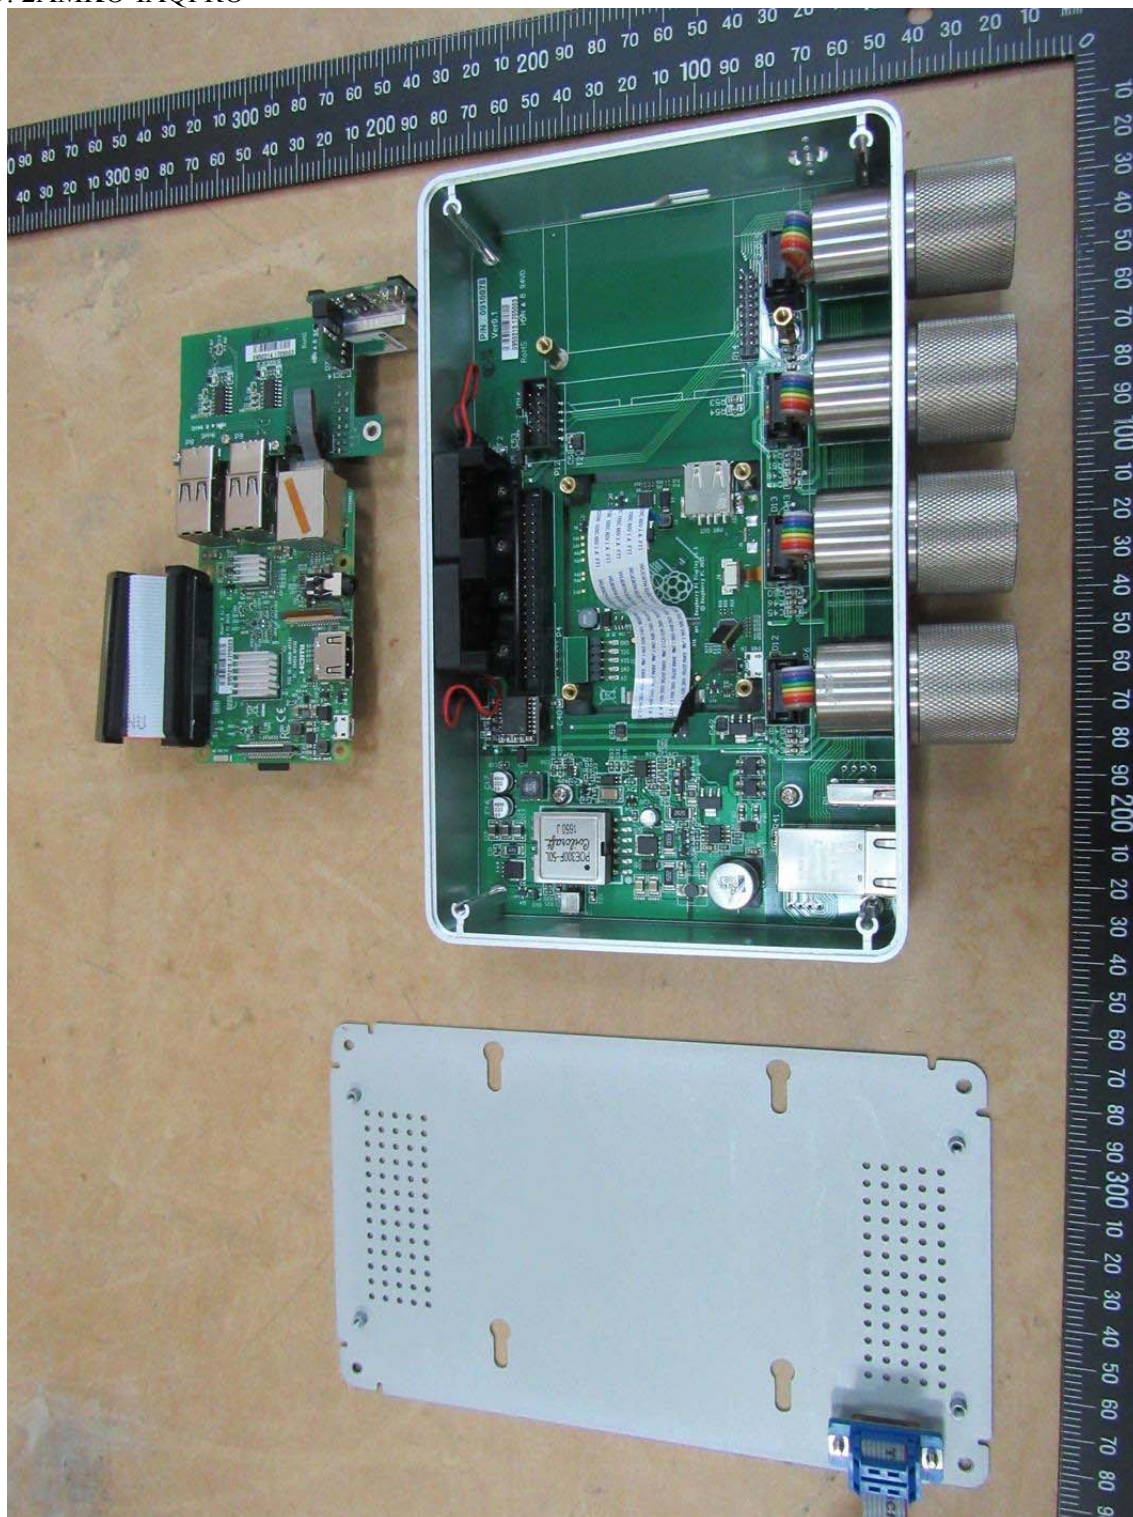


Registration number: W6M21705-16932-C-1
FCC ID: 2AMKO-IAQPRO






Registration number: W6M21705-16932-C-1


FCC ID: 2AMKO-IAQPRO

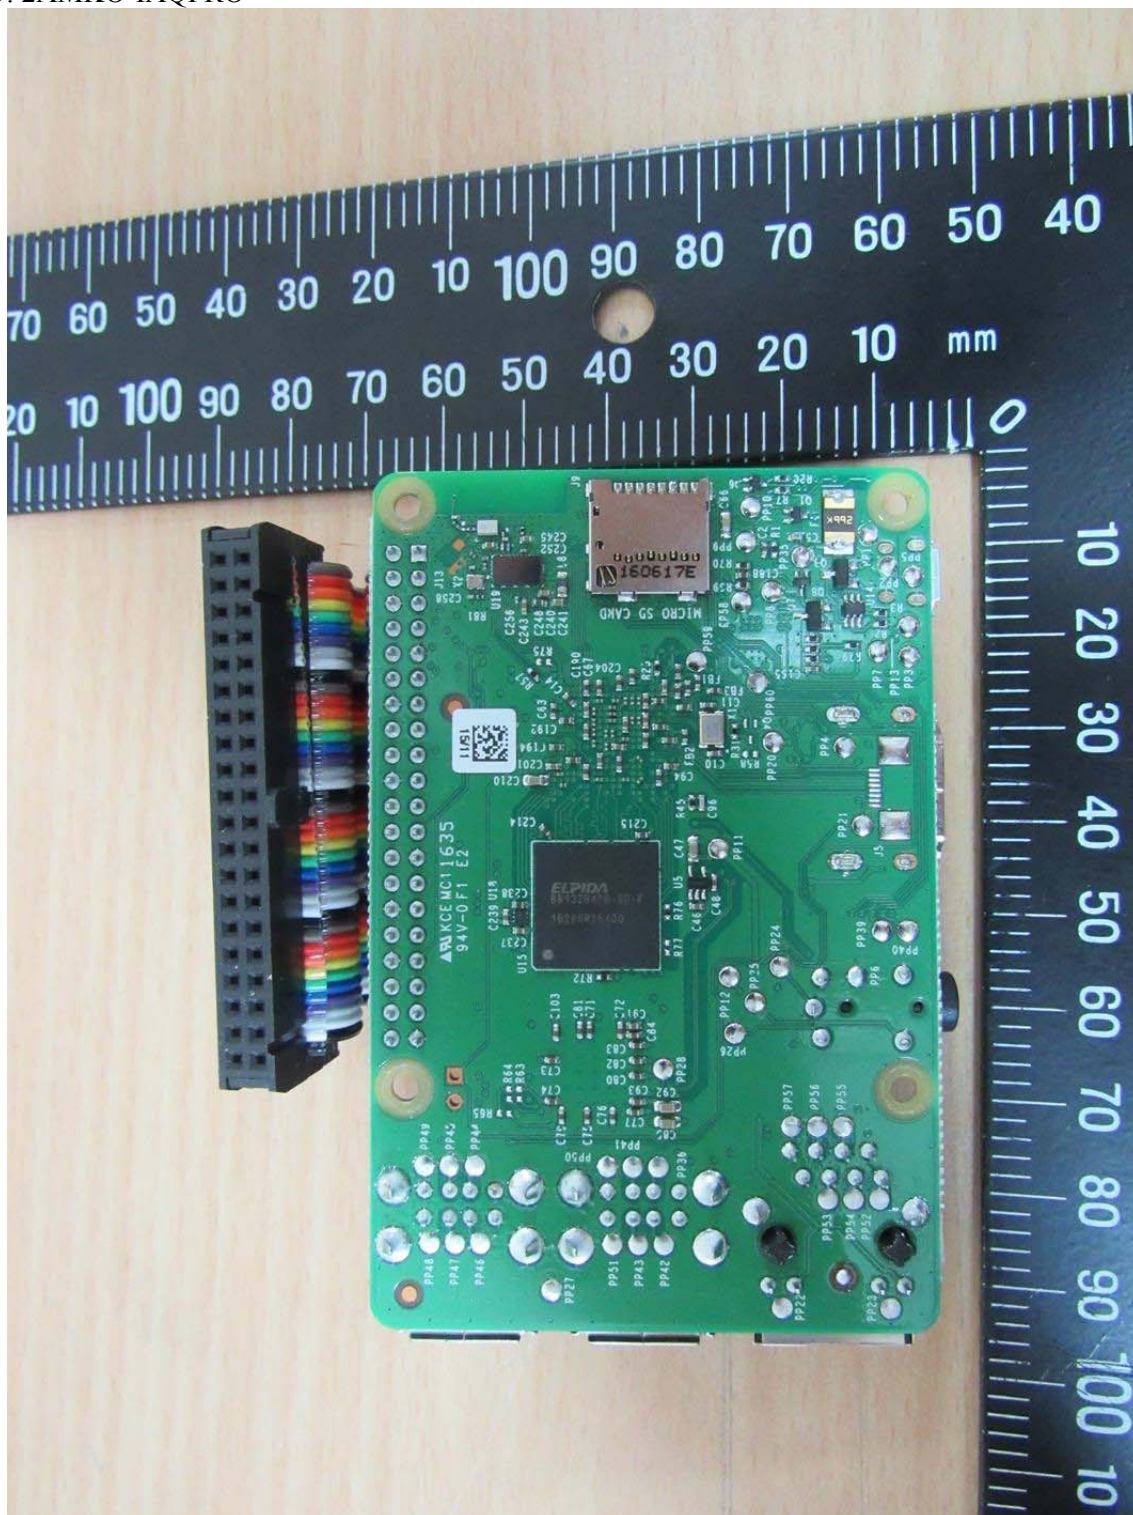




Registration number: W6M21705-16932-C-1

FCC ID: 2AMKO-IAQPRO

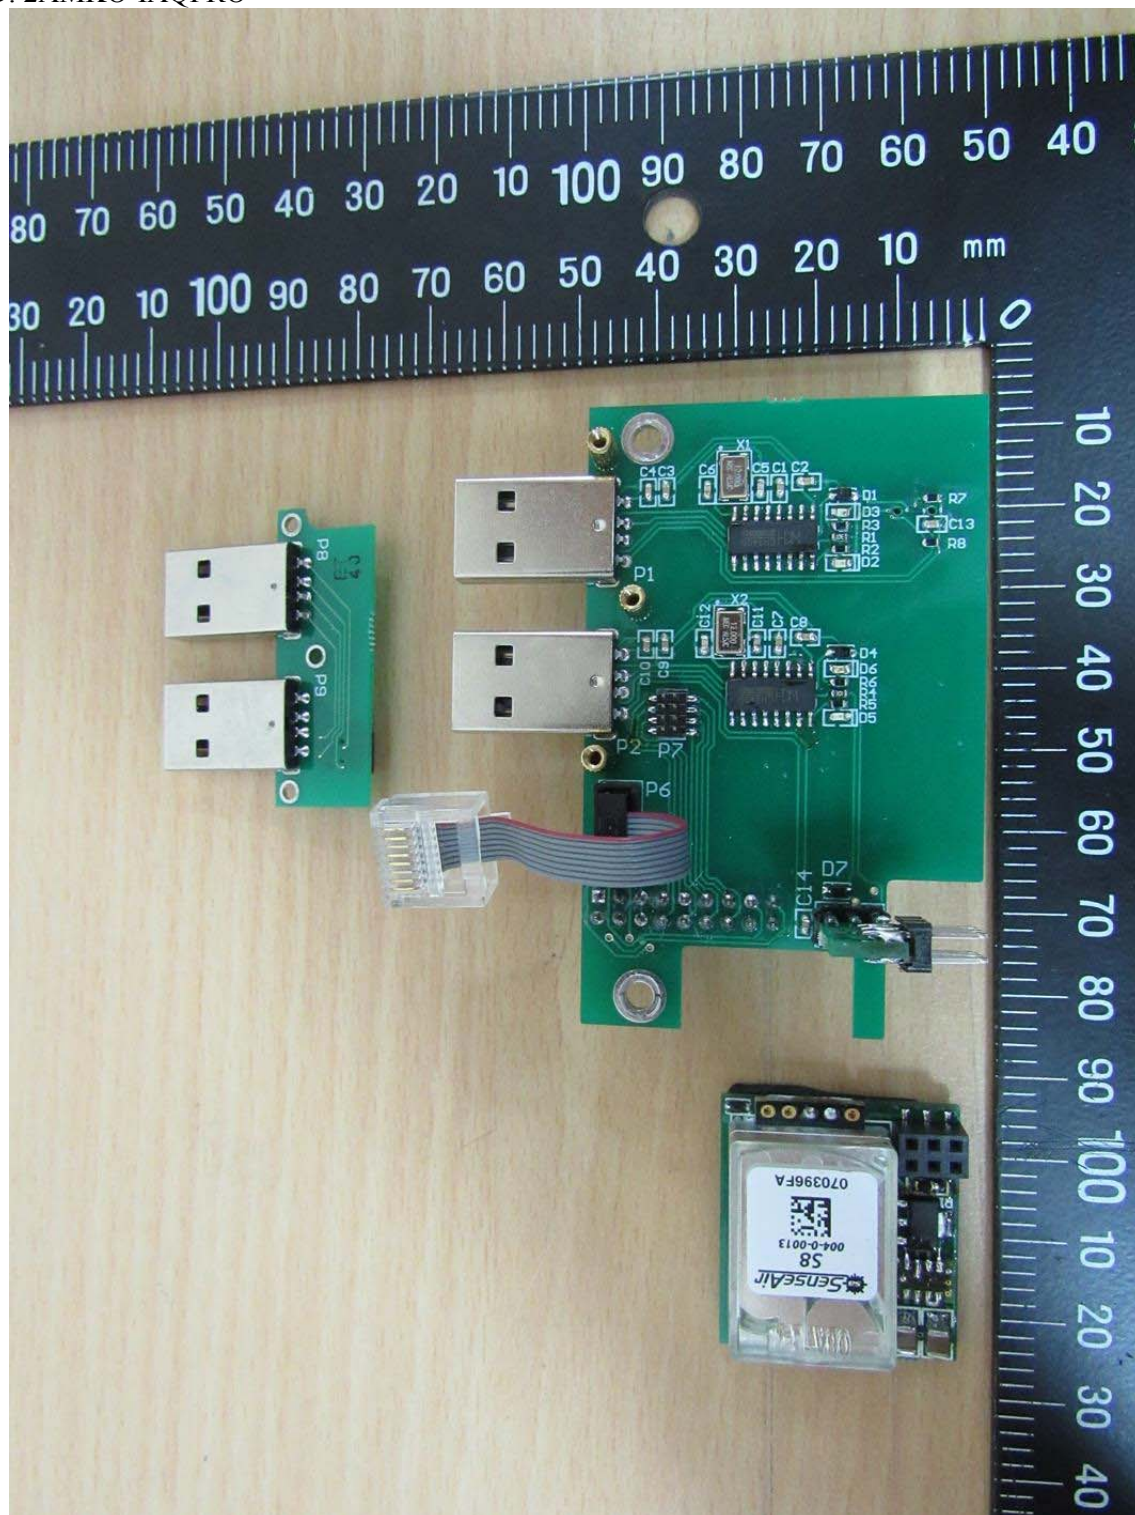





A photograph of a custom green PCB. The board features two USB-A ports (P1, P2) on the left side. A ribbon cable is connected to a connector (P6) on the bottom left. A pin header (D7) is located on the bottom right. Various components are labeled, including microcontrollers (X1, X2), resistors (R1-R8), capacitors (C1-C14), and diodes (D1-D6). A ruler is placed above and to the right of the board for scale, showing dimensions in millimeters.





Registration number: W6M21705-16932-C-1
FCC ID: 2AMKO-IAQPRO

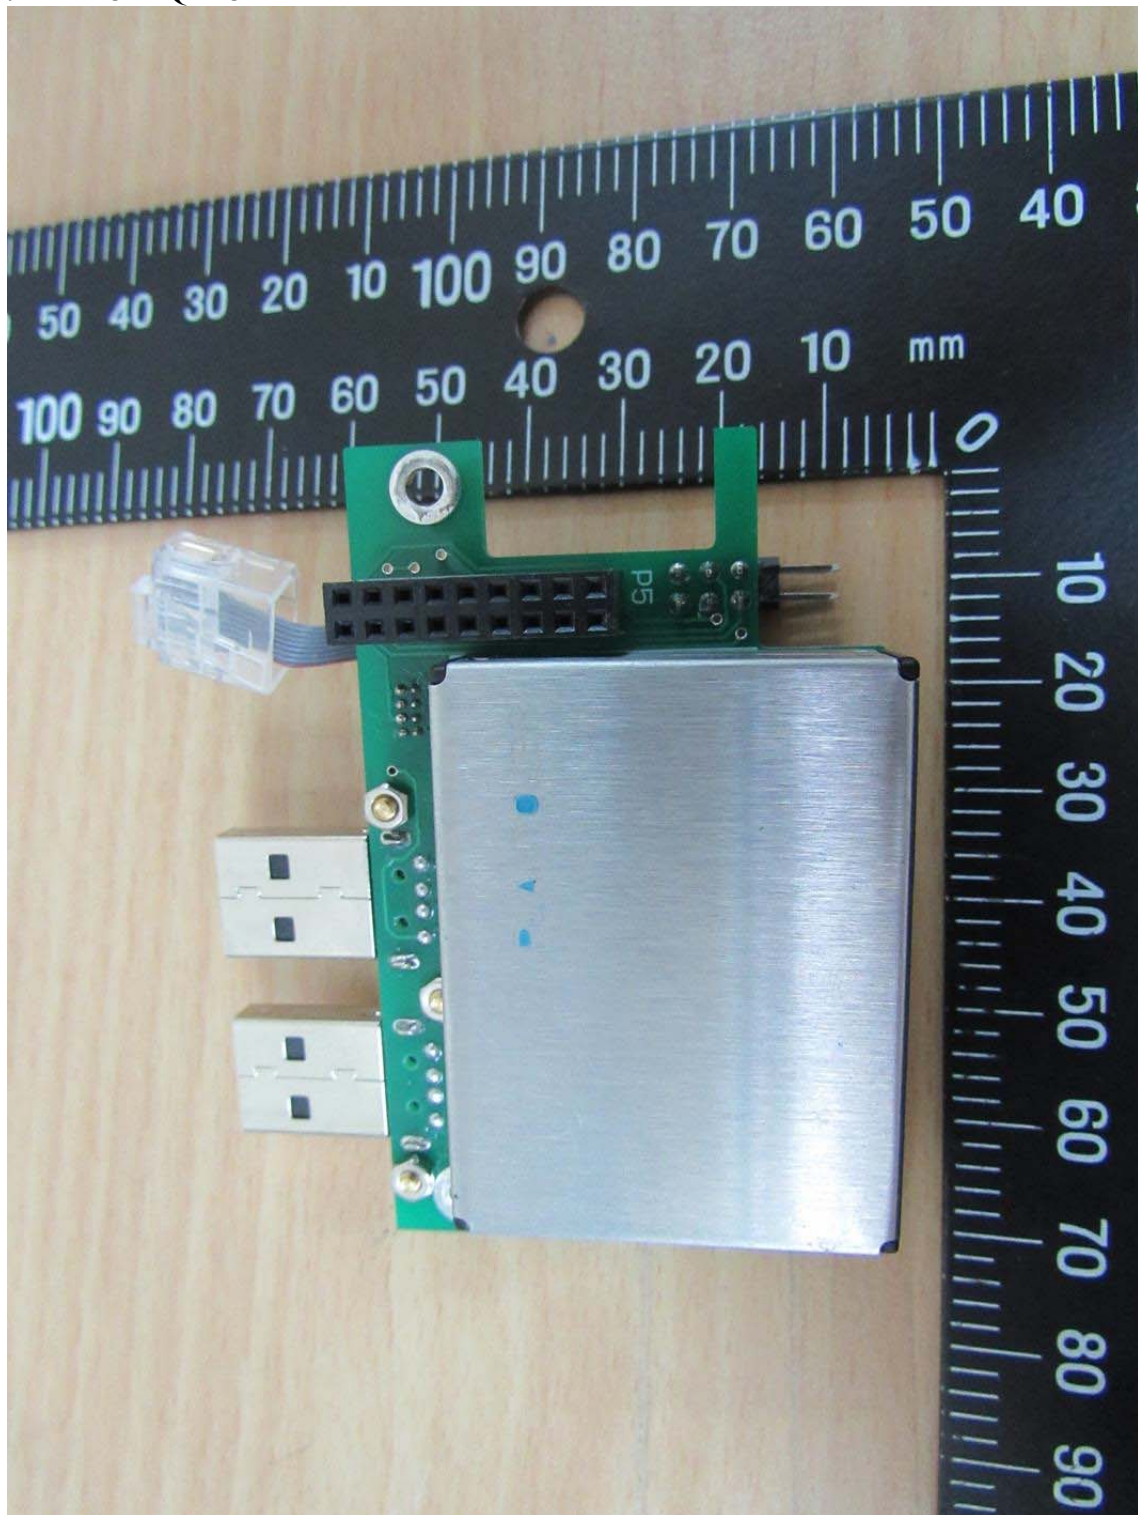





Registration number: W6M21705-16932-C-1
FCC ID: 2AMKO-IAQPRO

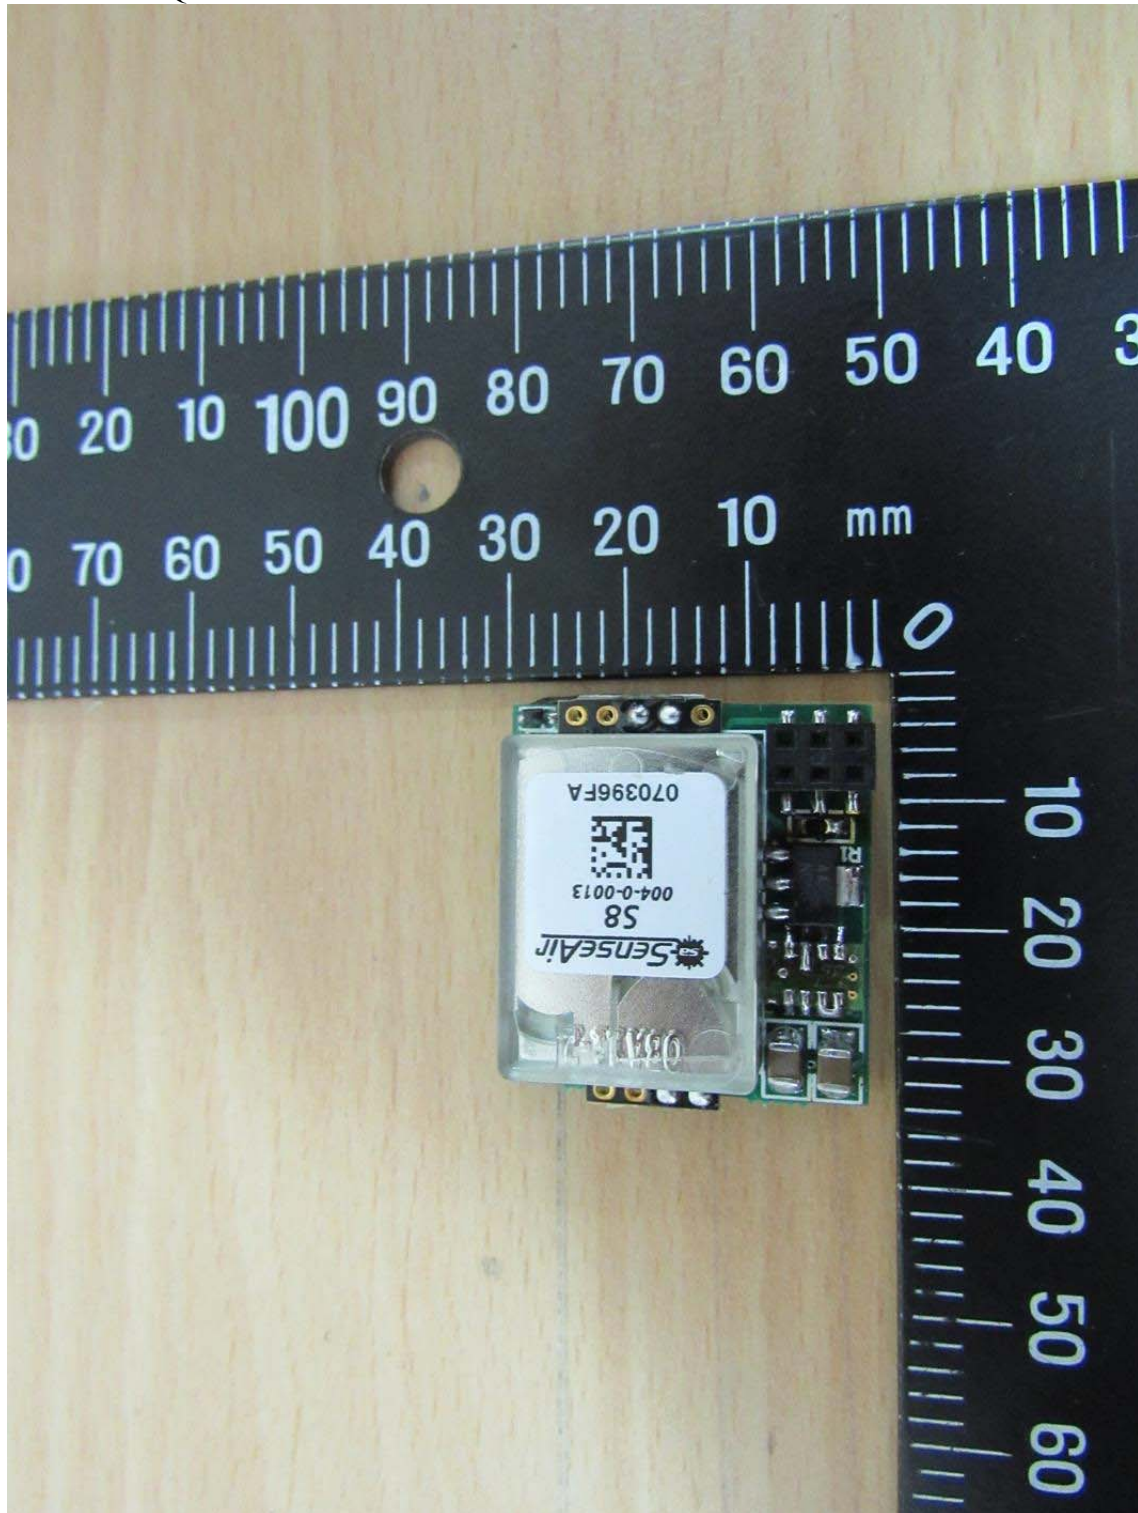





Registration number: W6M21705-16932-C-1
FCC ID: 2AMKO-IAQPRO

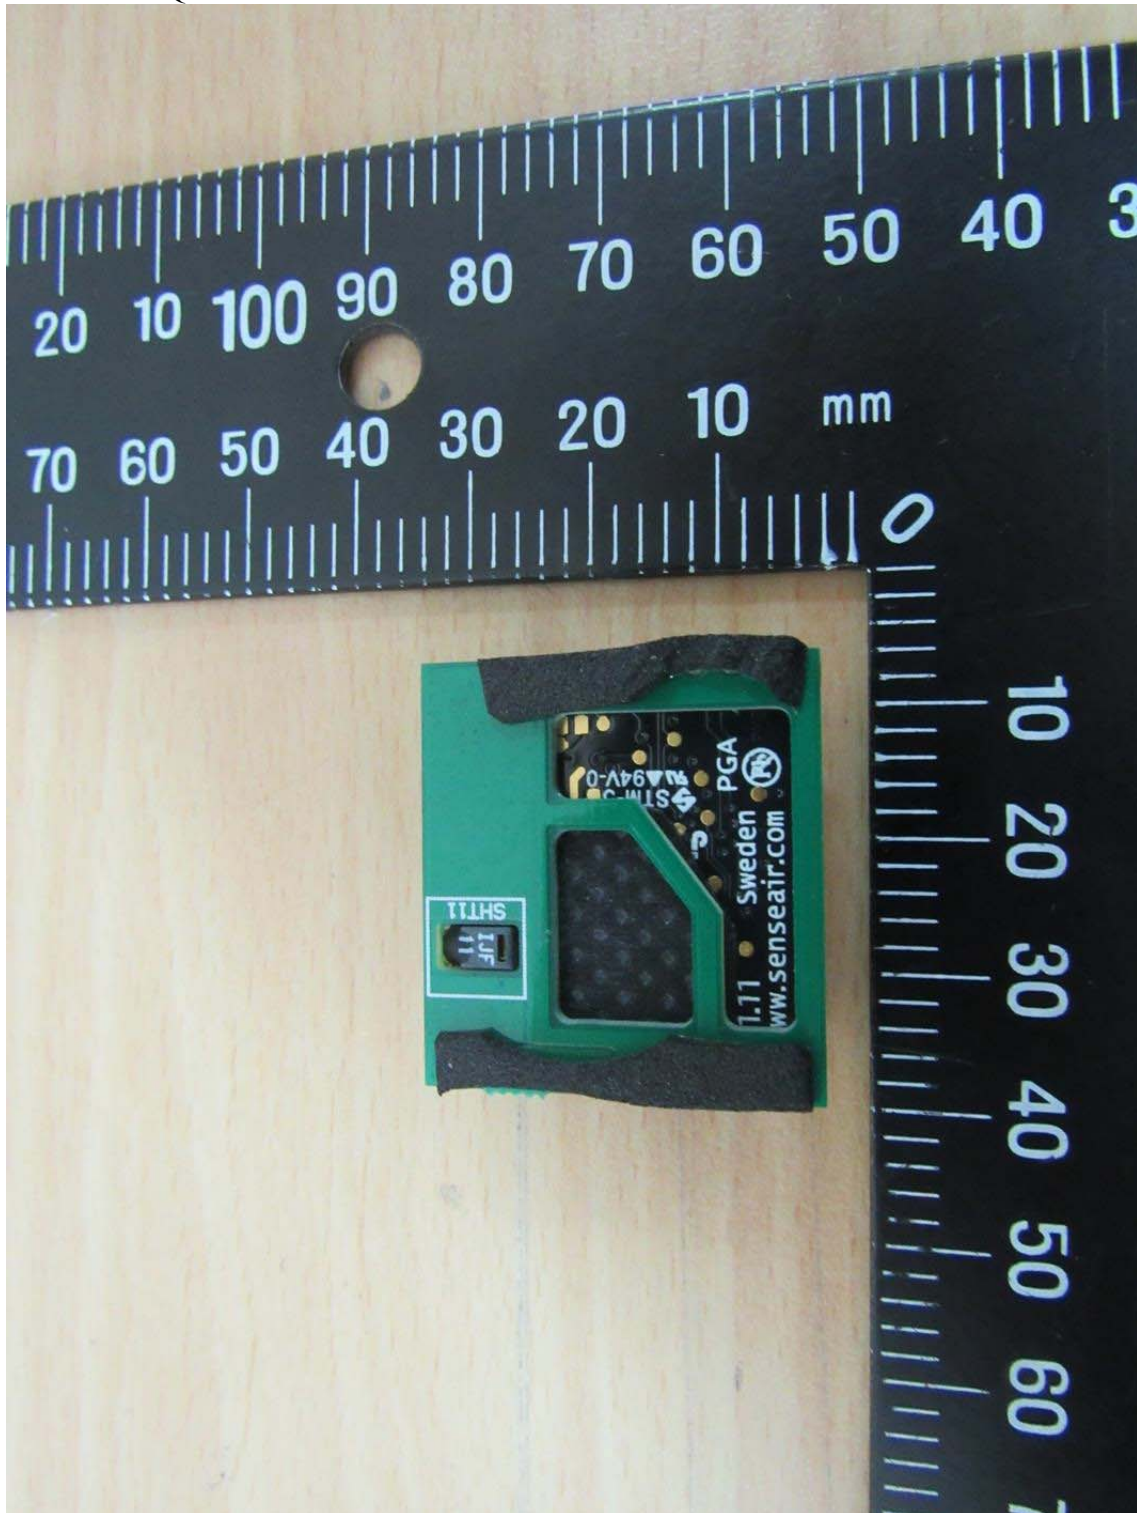





Registration number: W6M21705-16932-C-1
FCC ID: 2AMKO-IAQPRO

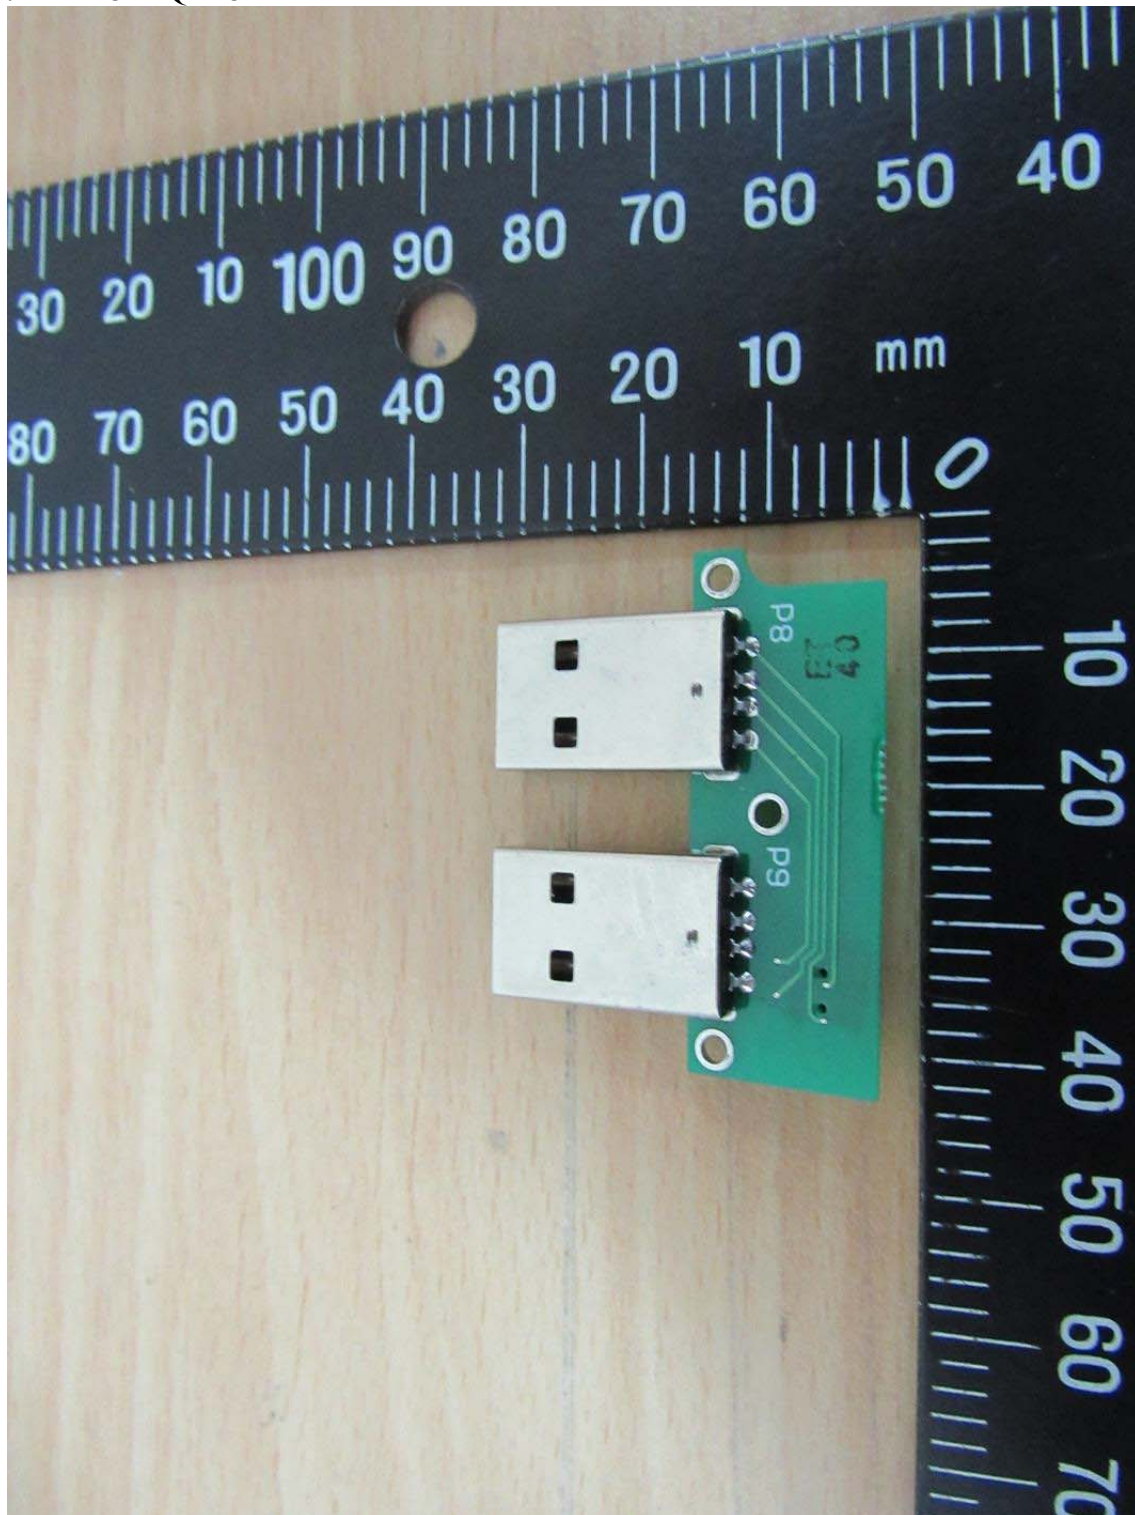





Registration number: W6M21705-16932-C-1
FCC ID: 2AMKO-IAQPRO

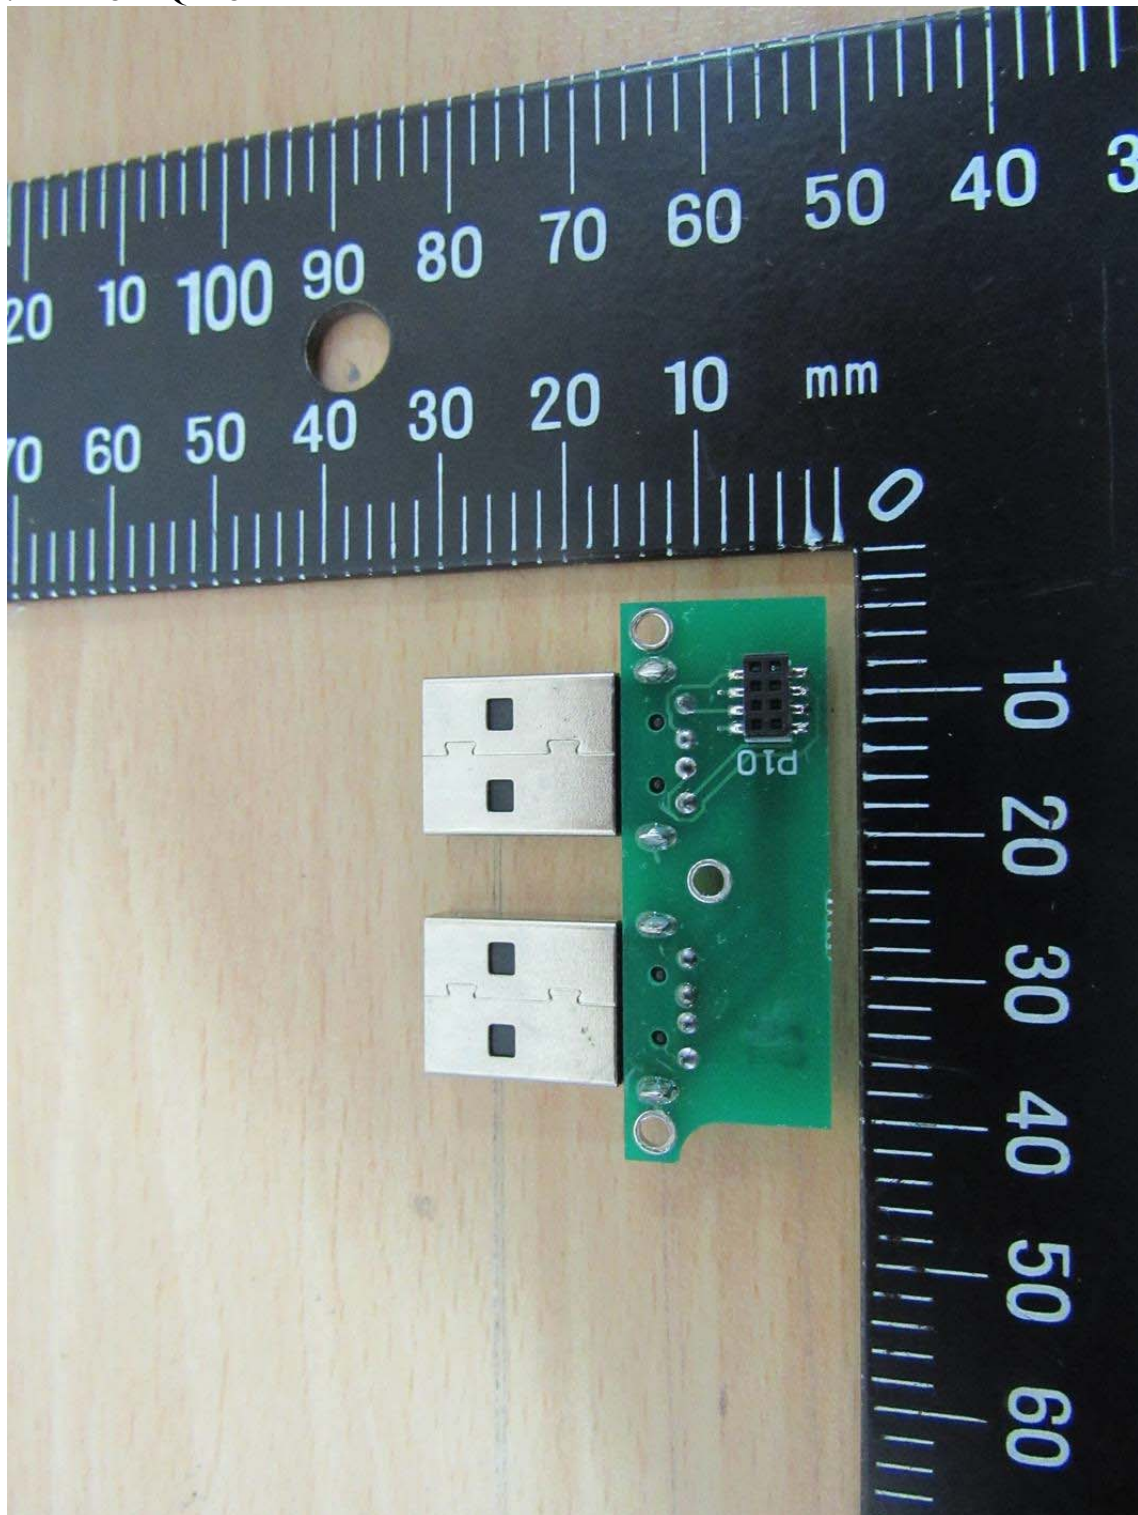



Registration number: W6M21705-16932-C-1
FCC ID: 2AMKO-IAQPRO

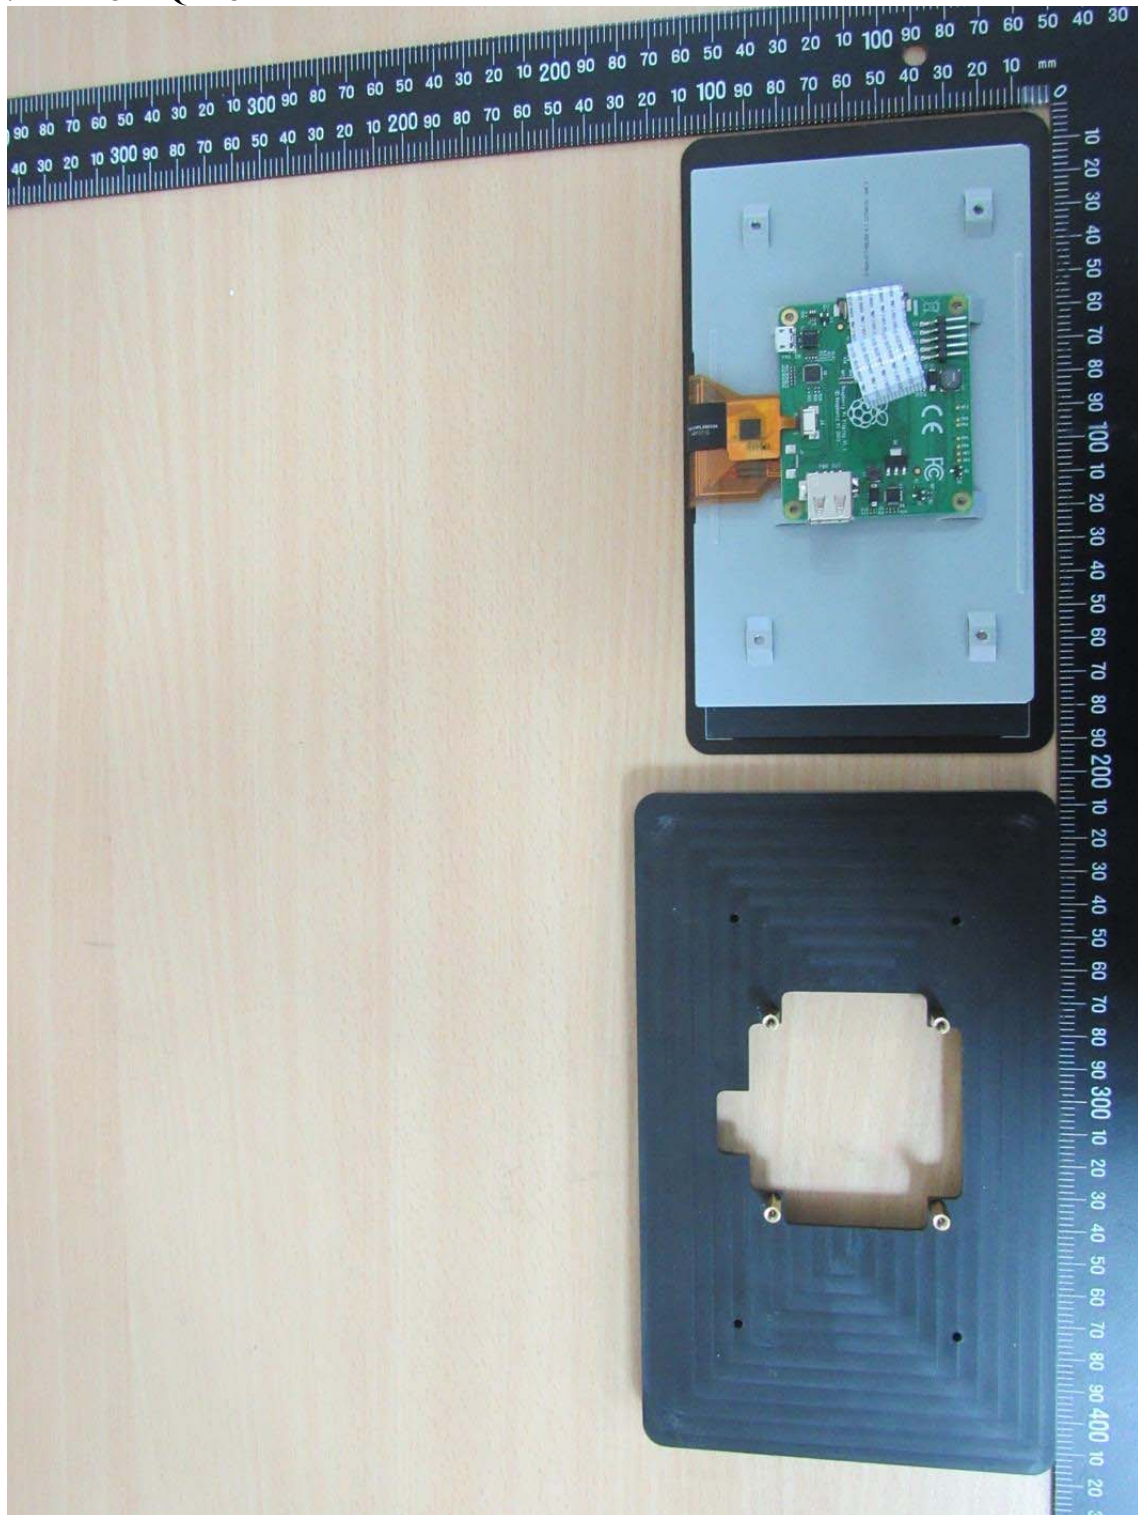





Registration number: W6M21705-16932-C-1
FCC ID: 2AMKO-IAQPRO



Registration number: W6M21705-16932-C-1

FCC ID: 2AMKO-IAQPRO

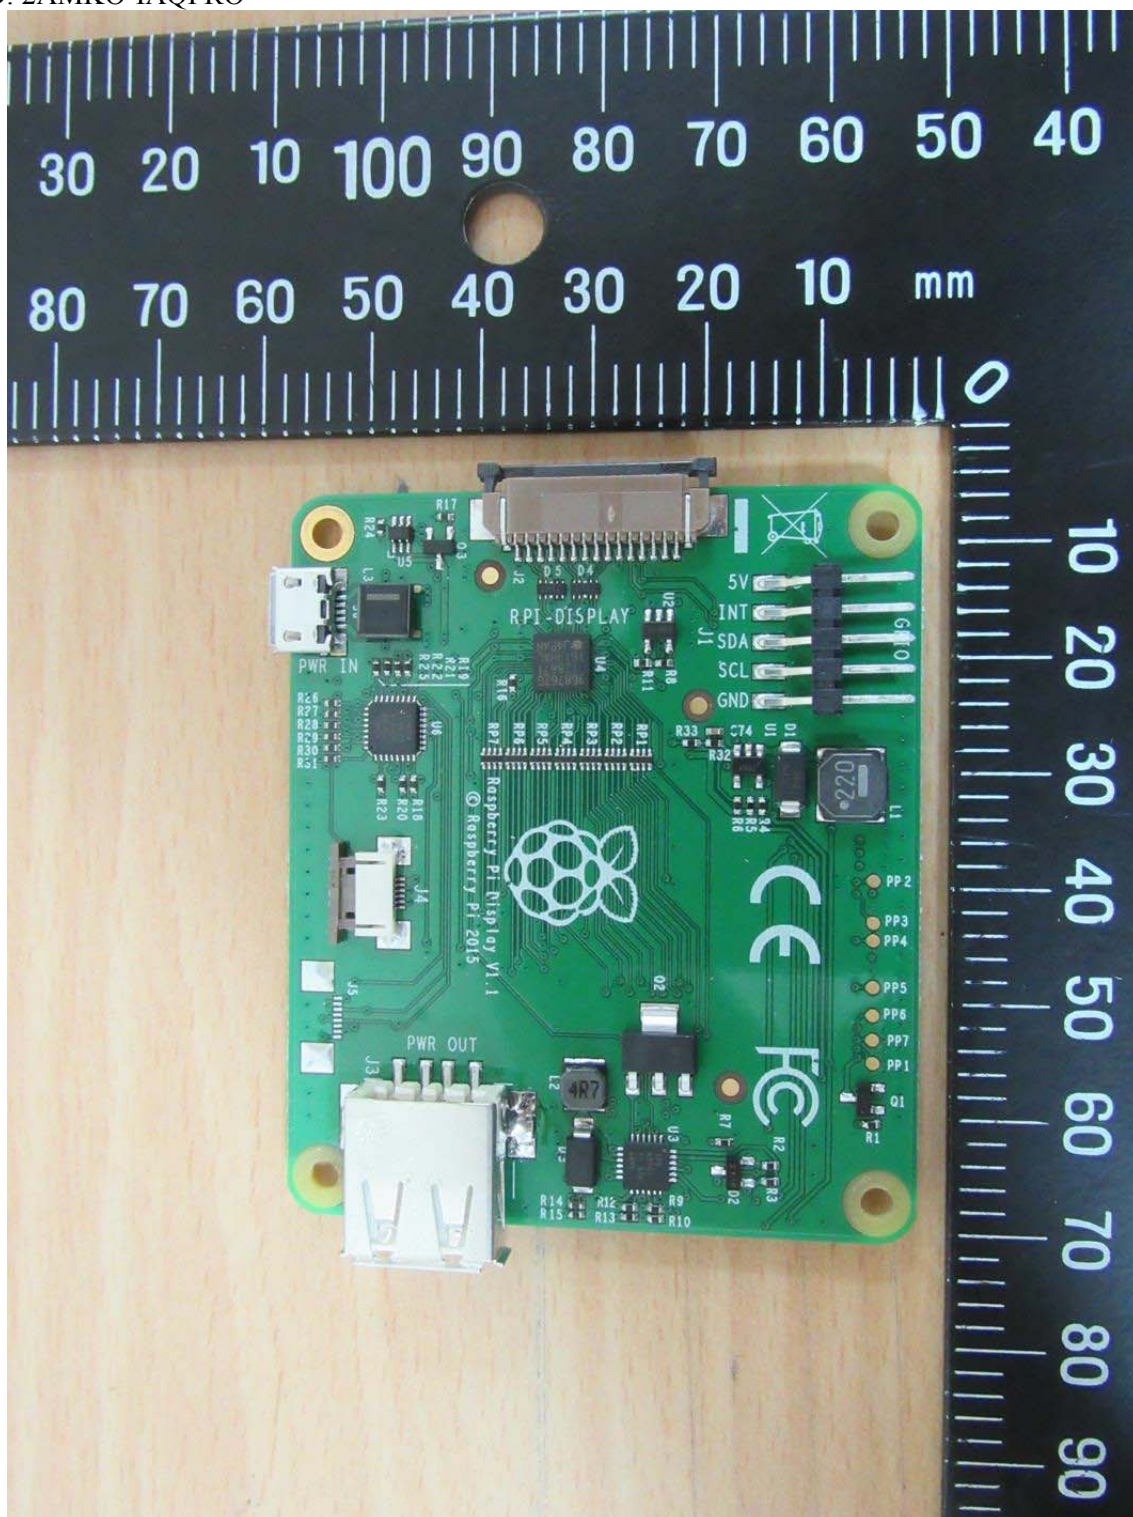





Registration number: W6M21705-16932-C-1
FCC ID: 2AMKO-IAQPRO



Registration number: W6M21705-16932-C-1

FCC ID: 2AMKO-IAQPRO

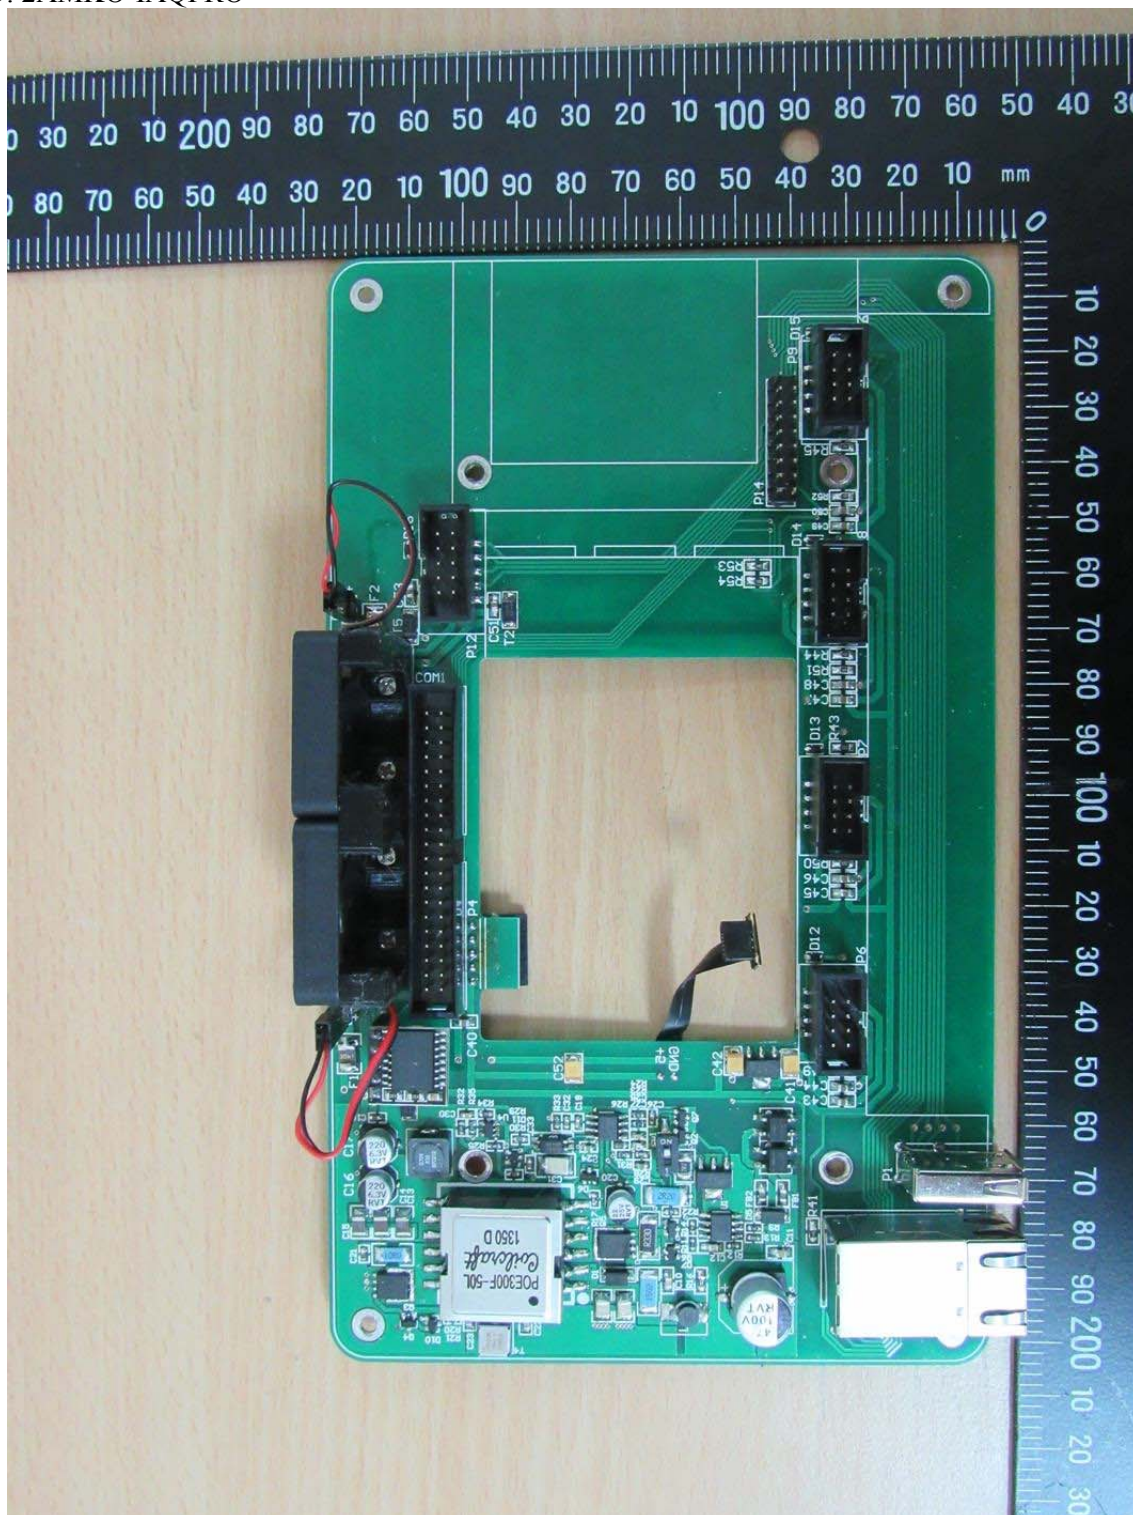



Registration number: W6M21705-16932-C-1
FCC ID: 2AMKO-IAQPRO

