

[AEBW00R0001100](#)

 Eliwell Controls srl IT 32016 Alpago	Made in Italy	UK CA
AIR EDGE WiFi RS485 SD		
AEBW00R0001100		
-20T60		
100-240Vac 5W		
IC: 9727A-EDGEWIFI		
HVIN: AIR EDGE WiFi RS485		
FCC ID: 2AMLEEDGEWIFI		
PV:	RL:	SV:
SN:		
OP:		
		
		
		
		
		
I.T.E. E319849		

[AEBW00T0001100](#)

 Eliwell Controls srl IT 32016 Alpago	Made in Italy	UK CA
AIR EDGE WiFi SD		
AEBW00T0001100		
-20T60		
100-240Vac 50/60Hz 5W		
IC: 9727A-EDGEWIFI		
HVIN: AIR EDGE WiFi SD		
FCC ID: 2AMLEEDGEWIFI		
PV:	RL:	SV:
SN:		
OP:		
		
		
		
		
		
I.T.E. E319849		


[AEBWEOR0001100](#)

 Eliwell Controls srl IT 32016 Alpago	Made in Italy	UK CA
		
AIR EDGE WiFi-Eth RS485 SD		EAC
AEBWEOR0001100		
		CE
-20T60		
100-240Vac 5W		
IC: 97272A-EDGEWIFI		
HVIN: AIR EDGE WiFi Eth RS485		
FCC ID: 2AMLEEDGEWIFI		
		I.T.E. E319849
PV: RL: SV:		
SN:		
OP:		

[AEBWEOT0001100](#)

 Eliwell Controls srl IT 32016 Alpago	Made in Italy	UK CA
		
AIR EDGE WiFi-Eth SD		EAC
AEBWEOT0001100		
		CE
-20T60		
100-240Vac 50/60Hz 5W		
IC: 9727A-EDGEWIFI		
HVIN: AIR EDGE WiFi Eth SD		
FCC ID: 2AMLEEDGEWIFI		
		I.T.E. E319849
PV: RL: SV:		
SN:		
OP:		

IOTSWPH

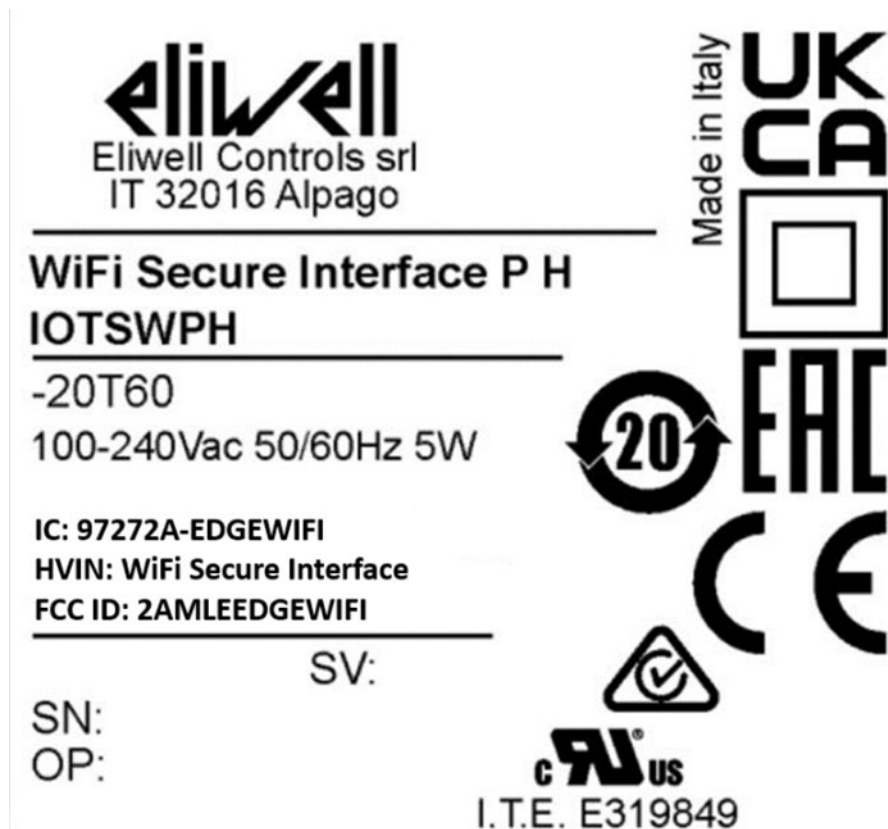

The label is plastified, with glue in the back used to stick it in the back of the product. This is what is written in the documentation: "A gloss white polyester film with print treated surface for enhanced ink adhesion.

Facestock: "A gloss white polyester film with print treated surface for enhanced link adhesion

Adhesive: S8030 is a high strength permanent solvent based acrylic adhesive

Performance data

Initial Tack	23.5 N/25mm	FTM 9 Glass
Peel Adhesion 90°	11.5 N/25mm	FTM 2 St.St.
Min. Application Temp.	7 °C	
Service temperature	-40°C to 150°C	
Adhesive Type	Solvent Acrylic	
Adhesive weight	24 g/m ²	FTM12