

BW2. 4JWX105-7KJ










test report

Frequency:	2400~2500MHz
S. W. R. :	<1.8
Max Gain:	3.5 dBi
Efficiency:	70%~90%
Impedance:	50 Ohm
Storage Temperature:	-40℃~+85℃
Operation Temperature:	-40℃~+85℃
Manufacturer:	Shenzhen Bat Wireless Technology Co., Ltd
Address:	1301, No. 8, Fenghua Road, Xinshi Community, Dalang Street, Longhua District, Shenzhen












Frequency/MHz	Max Gain/dBi	Efficiency/dB	Efficiency/%
2400	2.47	-1.28	74.47
2402	2.53	-1.24	75.16
2404	2.51	-1.25	74.99
2406	2.45	-1.3	74.13
2408	2.42	-1.32	73.79
2410	2.55	-1.23	75.34
2412	2.57	-1.19	76.03
2414	2.67	-1.12	77.27
2416	2.82	-1.04	78.7
2418	2.94	-0.97	79.98
2420	2.95	-0.96	80.17
2422	2.99	-0.91	81.1
2424	3.02	-0.9	81.28
2426	3.07	-0.87	81.85
2428	3.13	-0.83	82.6
2430	3.14	-0.83	82.6
2432	3.21	-0.84	82.41
2434	3.25	-0.82	82.79
2436	3.23	-0.8	83.18
2438	3.23	-0.78	83.56
2440	3.33	-0.68	85.51
2442	3.32	-0.66	85.9
2444	3.33	-0.64	86.3
2446	3.35	-0.64	86.3
2448	3.38	-0.64	86.3
2450	3.39	-0.63	86.5
2452	3.37	-0.61	86.9
2454	3.42	-0.57	87.7
2456	3.49	-0.5	89.13
2458	3.53	-0.47	89.74
2460	3.48	-0.5	89.13
2462	3.53	-0.45	90.16
2464	3.51	-0.46	89.95
2466	3.47	-0.46	89.95
2468	3.46	-0.44	90.36
2470	3.49	-0.4	91.2
2472	3.55	-0.38	91.62
2474	3.56	-0.36	92.04
2476	3.54	-0.37	91.83
2478	3.53	-0.38	91.62
2480	3.56	-0.38	91.62
2482	3.47	-0.42	90.78
2484	3.44	-0.45	90.16
2486	3.47	-0.45	90.16
2488	3.49	-0.44	90.36
2490	3.46	-0.45	90.16
2492	3.44	-0.44	90.36
2494	3.47	-0.4	91.2
2496	3.47	-0.38	91.62
2498	3.44	-0.39	91.41
2500	3.45	-0.37	91.83

2400MHz

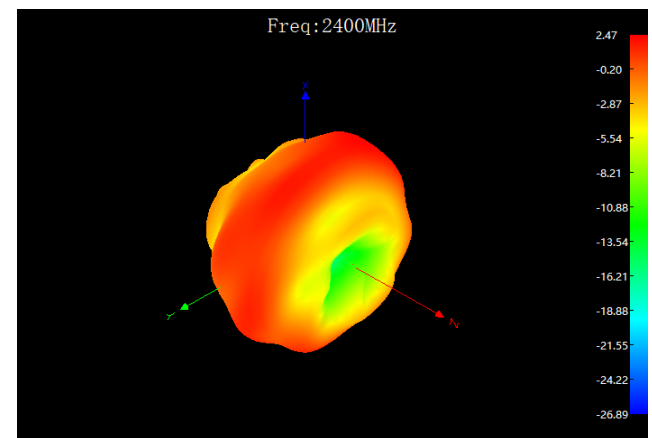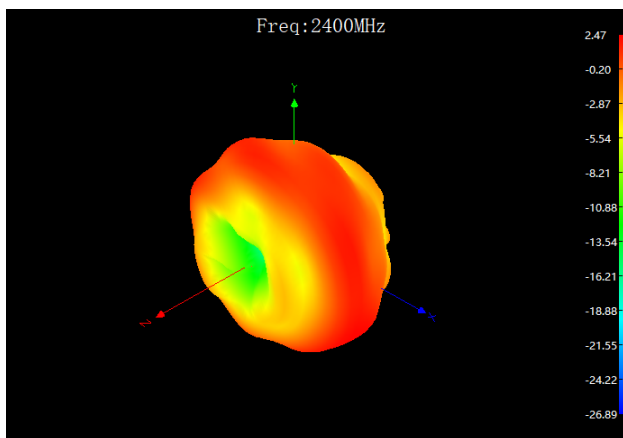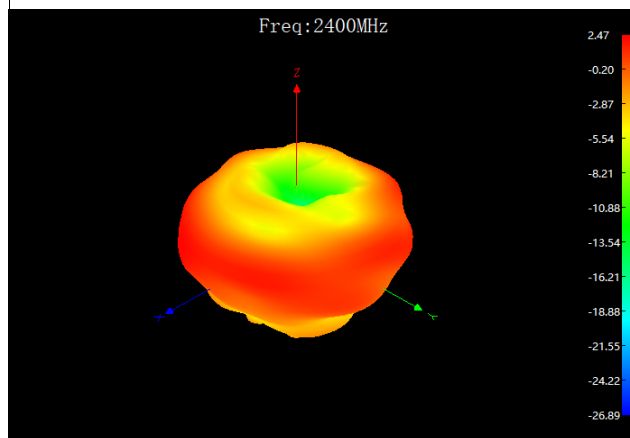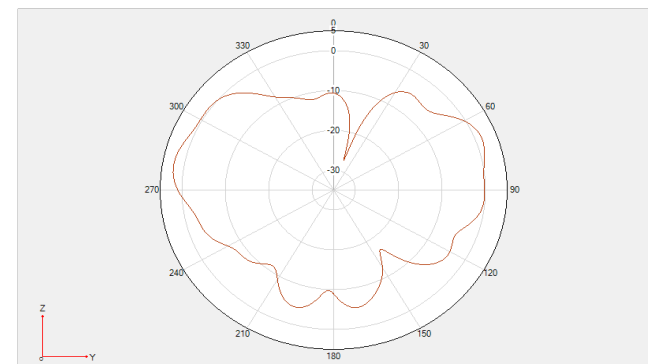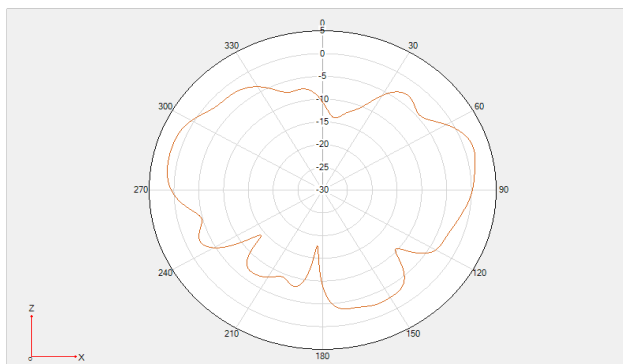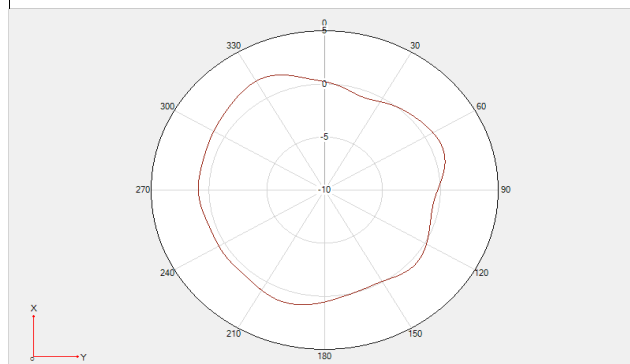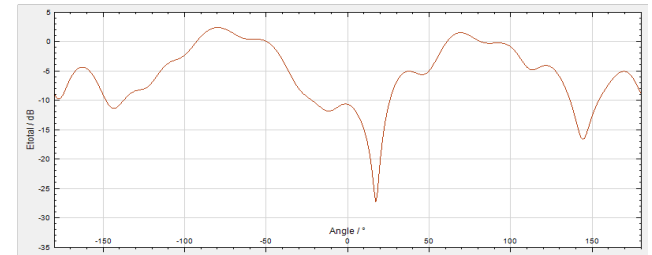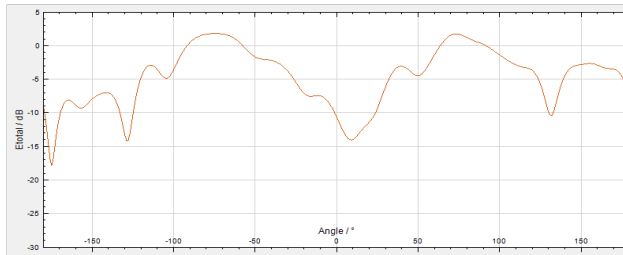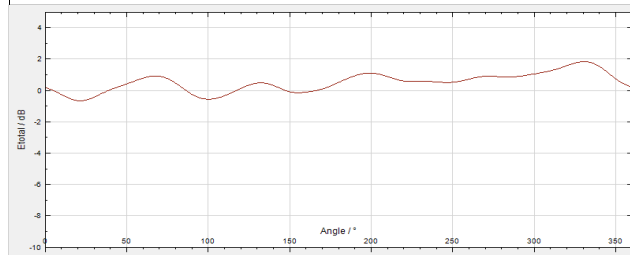

2450MHz

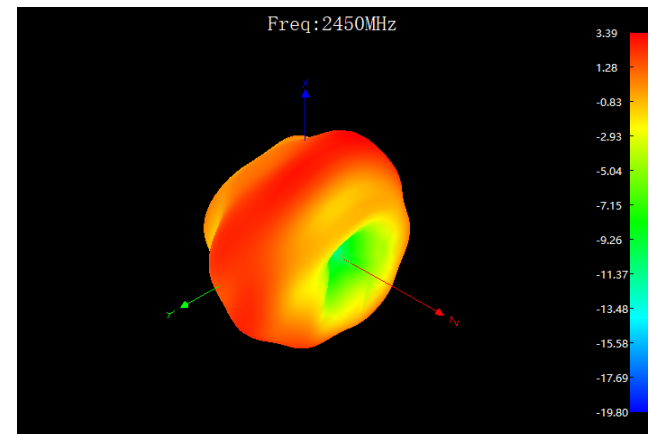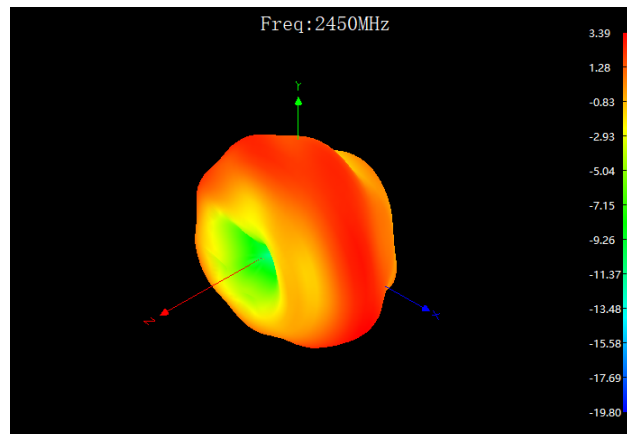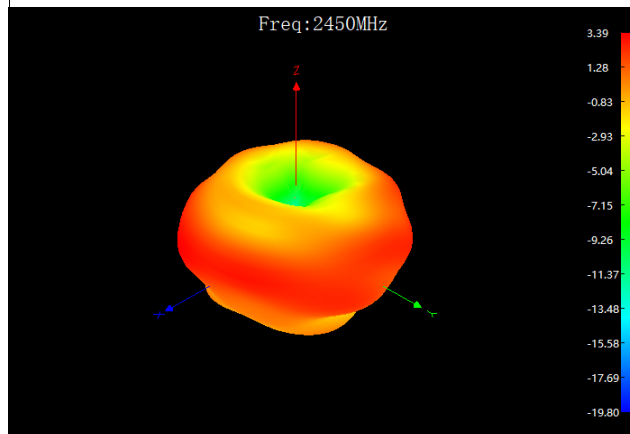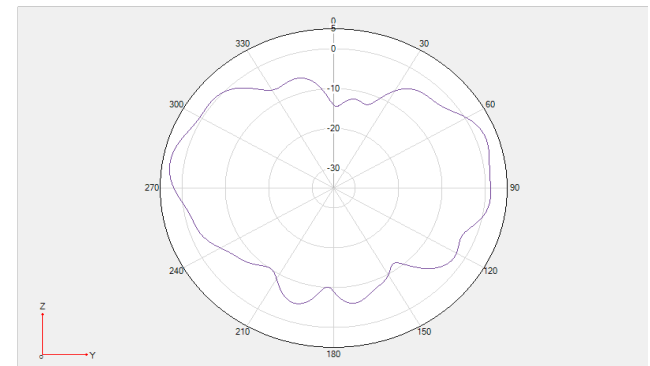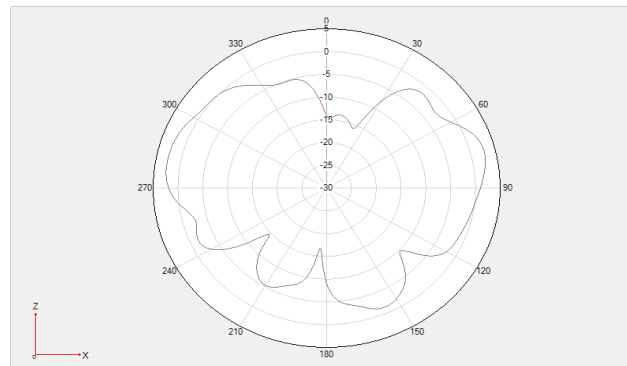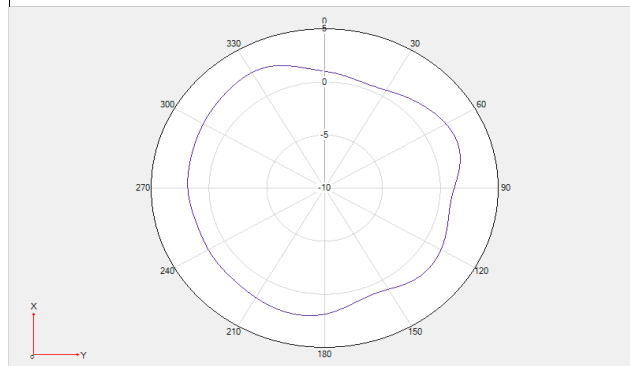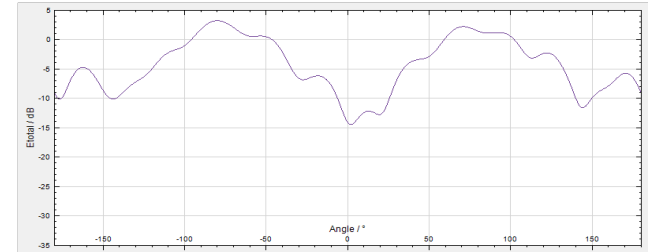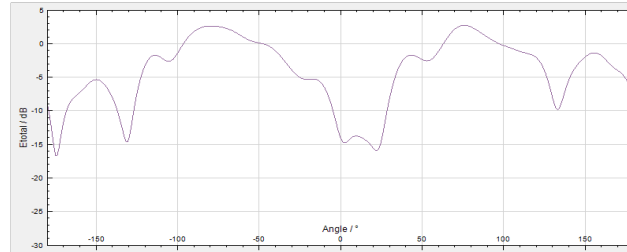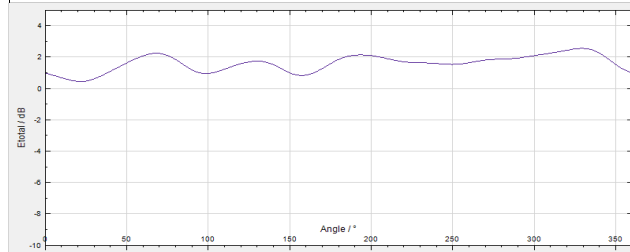

2500MHz

