

TEST REPORT

Report No.: SHE19110012-03JE

Date: 2019-11-19

Page 1 of 14

Applicant : Toast, Inc.
Address of Applicant : 401 Park Drive, Suite 801, Boston, MA 02215, USA

Product Name : Data Processing machine
Model No. : TT201
Sample No. : E19110012-03#01
FCC ID : 2AMNG-TT200
ISED Number : 23177-TT200

Standards : FCC CFR47 Part 15, Subpart C
RSS-Gen (Issue 5, March 2019)
RSS-247 (Issue 2, February 2017)

Date of Receipt : 2019-11-12
Date of Test : 2019-11-12 ~ 2019-11-18
Date of Issue : 2019-11-19

Remark:

This report details the results of the testing carried out on one sample, the results contained in this report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

Prepared by: Jennifer Zhou Reviewed by: Adrian Shi Approved by: Guoyou Chi
(Jennifer Zhou) (Adrian Shi) (Authorized signatory: Guoyou Chi)

TEST REPORT

Report No.: SHE19110012-03JE

Date: 2019-11-19

Page 2 of 14

Revision Record			
Version	Date	Revisions	Revised By
1.0	2019-11-19	Original	--

TEST REPORT

Report No.: SHE19110012-03JE

Date: 2019-11-19

Page 3 of 14

Contents

1	GENERAL INFORMATION	4
1.1	TESTING LABORATORY	4
1.2	DETAILS OF APPLICATION	4
1.3	DETAILS OF EUT	4
1.4	TEST METHODOLOGY.....	5
2	TEST CONDITION	6
2.1	ENVIRONMENTAL CONDITIONS	6
2.2	EQUIPMENT LIST	6
2.3	MEASUREMENT UNCERTAINTY.....	6
3	TEST SET-UP AND OPERATION MODES	7
3.1	DETAILS OF TEST MODE	7
3.2	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	7
3.3	SUPPORT SOFTWARE.....	7
3.4	TEST SETUP DIAGRAM	8
4	TEST RESULTS	9
4.1	TRANSMITTER REQUIREMENT & TEST SUITES	9
4.1.1	<i>Spurious Emission</i>	9
4.1.2	<i>Band Edge (Restricted-band band-edge)</i>	10

TEST REPORT

Report No.: SHE19110012-03JE

Date: 2019-11-19

Page 4 of 14

1 General Information

1.1 Testing Laboratory

Company Name	ICAS Testing Technology Services (Shanghai) Co., Ltd.
Address	155 Pingbei Rd, Minhang District, Shanghai, China
Telephone	0086 21-51682999
Fax	0086 21-54711112
Homepage	www.icasiso.com

1.2 Details of Application

Company Name	Toast, Inc.
Address	401 Park Drive, Suite 801, Boston, MA 02215, USA
Contact Person	Mr James H Barber
Telephone	(562) 546-2272
Email	jbarber@toasttab.com

1.3 Details of EUT

Product Name	Data Processing machine
Brand Name	Toast
Model No.	TT201
FCC ID	2AMNG-TT200
ISED Number	23177-TT200
Mode of Operation	Bluetooth BLE
Frequency Range	2400MHz ~ 2483.5MHz
Number of Channels	40 (at intervals of 2 MHz)
Modulation Type	GFSK
Antenna Type	PIFA Antenna
Antenna Gain	1.92 dBi
Extreme Temperature Range	0°C ~ +55°C
Test Voltage	AC 24V

Note(s):

1. This test report is for approval of PCB, LCD and speaker change based on the original test report No. I19D00071-SRD02.
2. The details product change please refer to the document 'Product Change Description'.
3. Only additional test required in the product change list in this report.

TEST REPORT

Report No.: SHE19110012-03JE

Date: 2019-11-19

Page 5 of 14

1.4 Test Methodology

47 CFR Part 15, Subpart C (10-1-16 Edition)	Miscellaneous Wireless Communications Services
KDB Publication 558074 D01 v05r02	DTS Meas Guidance.
RSS-Gen (Issue 5, March 2019)	General Requirements for Compliance of Radio Apparatus
RSS-247 (Issue 2, February 2017)	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Note(s):

All test items were verified and recorded according to the standards and without any addition/deviation/exclusion during the test.

TEST REPORT

Report No.: SHE19110012-03JE

Date: 2019-11-19

Page 6 of 14

2 Test Condition

2.1 Environmental conditions

Temperature (°C)	18-25
Humidity (%RH)	40-65
Barometric Pressure (mbar)	960-1060

2.2 Equipment List

Name of Equipment	Manufacturer	Model	Serial No.	Cal. Due Date
Spectrum Analyzer	Keysight	N9020B	MY59260184	2020-07-28
Spectrum Analyzer	Rohde & Schwarz	FSV40N	101450	2020-06-24
EMI Test Receiver	Rohde & Schwarz	ESPI3	100173	2020-06-19
EMI Test Receiver	Rohde & Schwarz	ESR 7	101911	2020-06-19
V-network	SCHWARZBECK	NSLK 8127	8127-902	2020-02-20
Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	100687	2020-08-22
Broadband Antenna	SCHWARZBECK	VULB9163	9163-1037	2020-06-06
Horn Antenna-18G	SCHWARZBECK	BBHA9120D	9120D-1775	2020-06-06
Loop Antenna	SCHWARZBECK	FMZB 1513	N/A	2021-03-19
Horn Antenna-40G	YINGLIAN	LB-180400-KF	N/A	2020-07-26
EMC chamber 9*6*6 (L*W*H)	CHANGNING	966	N/A	2020-06-26
Shielded Enclosure 8*5*4 (L*W*H)	CHANGNING	854	N/A	2020-08-28
Test Software	BL	BL410_E	N/A	N/A

2.3 Measurement Uncertainty

Parameter	Frequency	Uncertainty
Antenna Port Conducted Emission	< 1GHz	± 1.5 dB
	> 1GHz	± 1.5 dB
Radiated Emission	30 MHz – 1 GHz	± 3 dB
	> 1GHz	± 3 dB

TEST REPORT

Report No.: SHE19110012-03JE

Date: 2019-11-19

Page 7 of 14

3 Test Set-up and Operation Modes

3.1 Details of Test Mode

Using test software was control EUT work in continuous transmitter and receiver mode. Select test channel as below:

Channel	Frequency
The lowest channel(CH0)	2402MHz
The middle channel(CH19)	2440MHz
The Highest channel(CH39)	2480MHz

The basic operation modes are:

- A. On
 - 1. BLE mode
 - a. Transmitting
 - i. Low Channel
 - ii. Middle Channel
 - iii. High Channel
 - b. Receiving
 - 2. Normal working with Bluetooth on
- B. Standby
- C. Off

3.2 Special Accessories and Auxiliary Equipment

Description	Manufacturer	Model No.	Serial No.
Laptop	Lenovo	TP00083A	N/A

3.3 Support Software

Description	Manufacturer	Software Name
Software	/	RF Test Tool

TEST REPORT


Report No.: SHE19110012-03JE

Date: 2019-11-19

Page 8 of 14

3.4 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

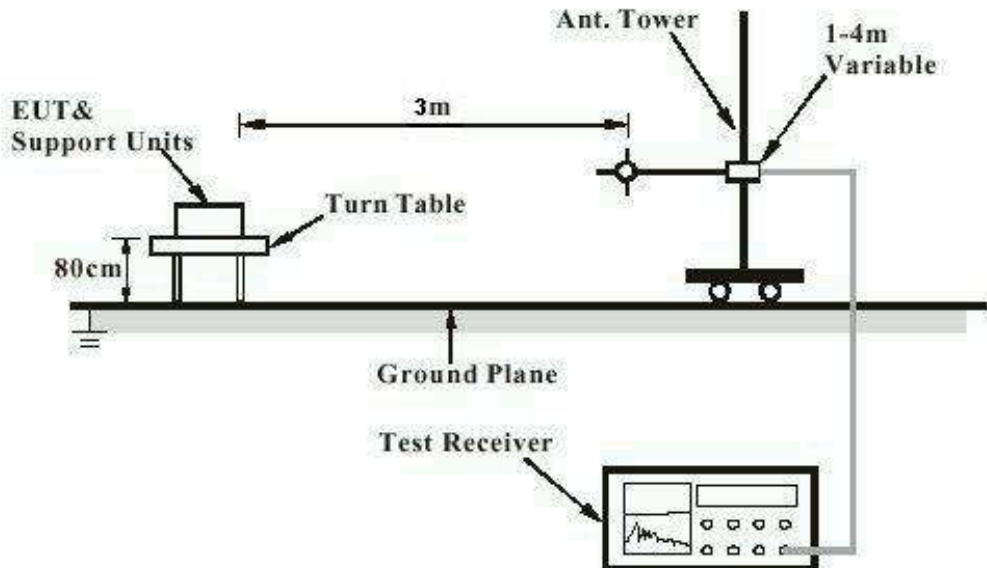

Note: Measurements above 1GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

TEST REPORT

Report No.: SHE19110012-03JE

Date: 2019-11-19

Page 9 of 14

4 Test Results

4.1 Transmitter Requirement & Test Suites

4.1.1 Spurious Emission

RESULT:

PASS

Test standard	: FCC Part 15.247(d), 15.205, 15.209 RSS-247 5.5
Requirement	: ANSI C63.10-2013, KDB 558074
Kind of test site	: 3m Semi-Anechoic Chamber

Test setup

Test Channel	: Low/Middle/High
Operation Mode	: A
Ambient temperature	: 25°C
Relative humidity	: 52%

Notes:

1. Test plots please refer to the annex document "EXHIBIT A of SHE19110012-03JE".
2. For 9 kHz ~ 30 MHz, the amplitude of spurious emissions that are attenuated by more than 20dB below the permissible. The value has no need to be reported.
3. The spurious above 18GHz is noise only and 20dB below the limit. The value has no need to be reported.
4. The EUT is working in the Normal link mode below 1 GHz.

TEST REPORT

Report No.: SHE19110012-03JE

Date: 2019-11-19

Page 10 of 14

4.1.2 Band Edge (Restricted-band band-edge)

RESULT:

PASS

Test standard	: FCC Part 15.247(d), 15.205, 15.209 RSS-247 5.5
Requirement	: ANSI C63.10-2013, KDB 558074
Kind of test site	: 3m Semi-Anechoic Chamber

Test setup

Test Channel	: Low/Middle/High
Operation Mode	: A.1
Ambient temperature	: 25°C
Relative humidity	: 52%

For details refer to following test plot.

TEST REPORT


Report No.: SHE19110012-03JE

Date: 2019-11-19

Page 11 of 14

Figure 1: Band Edge (Restricted-band band-edge), 2402MHz, GFSK

Horizontal

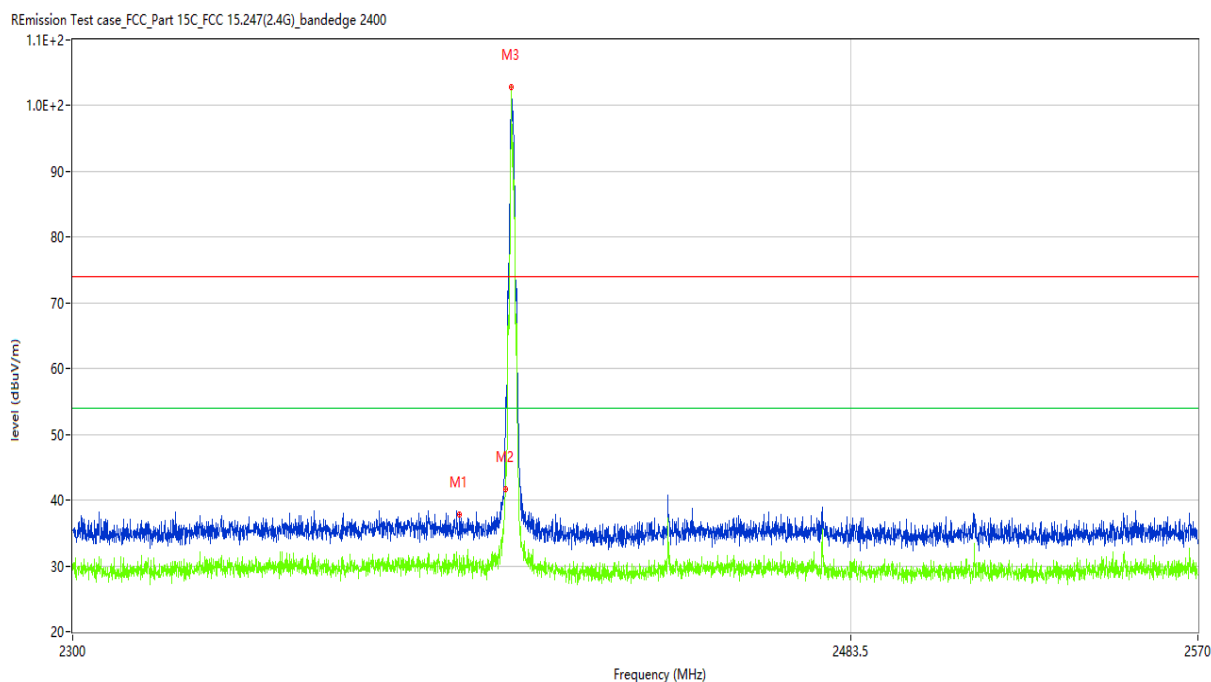

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2389.483	37.79	-3.76	74.0	-36.21	Peak	344.30	100	Horizontal	Pass
1**	2389.483	31.65	-3.76	54.0	-22.35	AV	344.30	100	Horizontal	Pass
2	2400.000	42.26	-4.18	74.0	-31.74	Peak	346.09	100	H	Pass
2**	2400.000	35.76	-4.18	54.0	-18.24	AV	346.09	100	H	Pass
3	2401.697	103.22	-4.17	74.0	29.22	Peak	348.80	100	Horizontal	N/A
3**	2401.697	102.78	-4.17	54.0	48.78	AV	348.80	100	Horizontal	N/A

TEST REPORT


Report No.: SHE19110012-03JE

Date: 2019-11-19

Page 12 of 14

Vertical

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

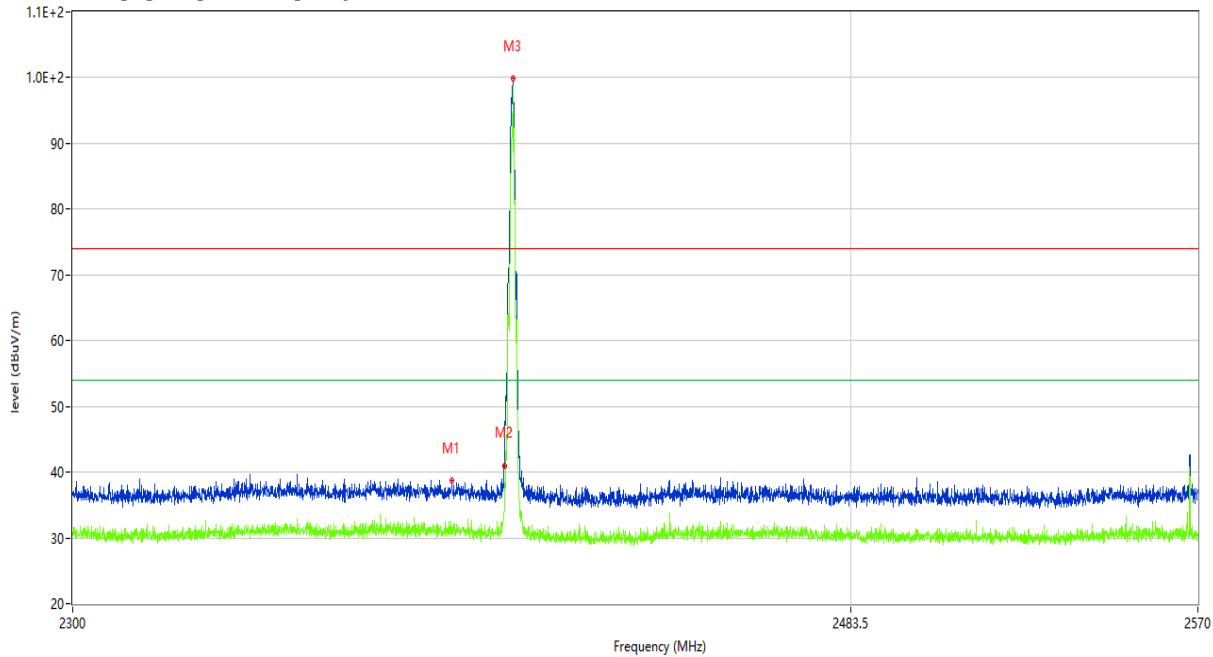

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2387.661	38.75	-3.77	74.0	-35.25	Peak	165.70	100	Vertical	Pass
1**	2387.661	30.72	-3.77	54.0	-23.28	AV	165.70	100	Vertical	Pass
2	2400.000	41.02	-4.18	74.0	-32.98	Peak	4.46	100	V	Pass
2**	2400.000	32.92	-4.18	54.0	-21.08	AV	4.46	100	V	Pass
3	2402.169	99.82	-4.17	74.0	25.82	Peak	7.10	100	Vertical	N/A
3**	2402.169	98.79	-4.17	54.0	44.79	AV	7.10	100	Vertical	N/A

TEST REPORT


Report No.: SHE19110012-03JE

Date: 2019-11-19

Page 13 of 14

Figure 2: Band Edge (Restricted-band band-edge), 2480MHz, GFSK

Horizontal

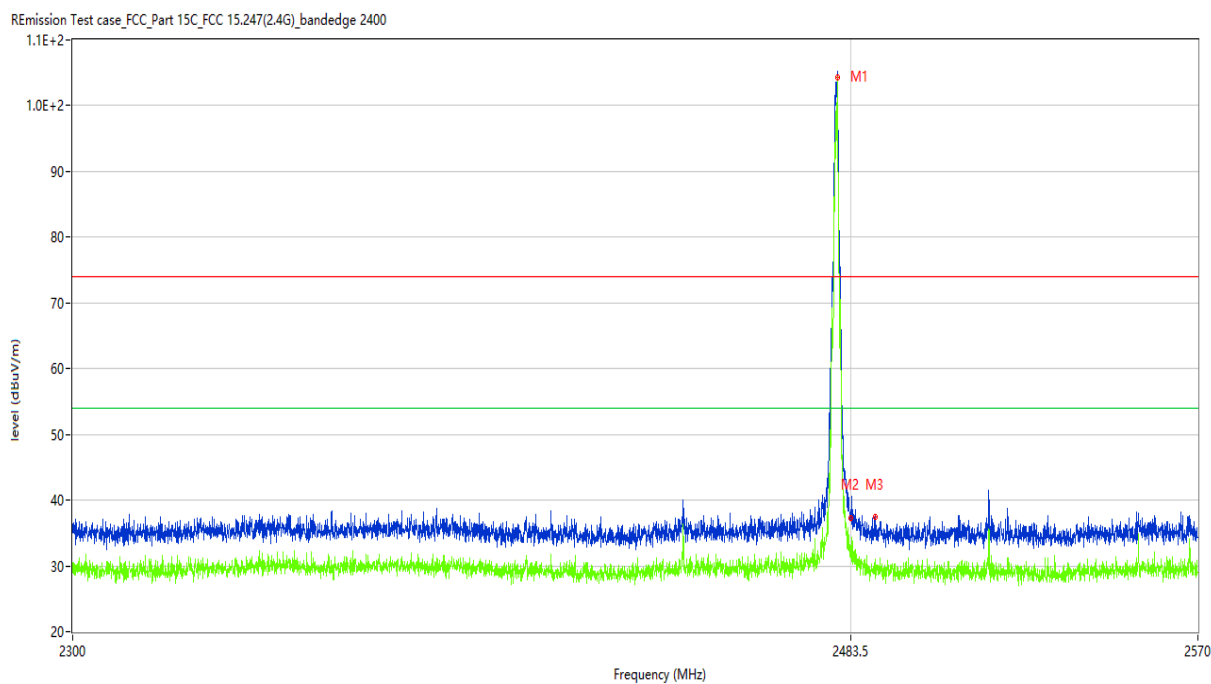

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2480.180	105.24	-3.77	74.0	31.24	Peak	358.00	100	Horizontal	N/A
1**	2480.180	104.27	-3.77	54.0	50.27	AV	358.00	100	Horizontal	N/A
2	2483.500	37.52	-3.87	74.0	-36.48	Peak	349.30	100	H	Pass
2**	2483.500	32.70	-3.87	54.0	-21.30	AV	349.30	100	H	Pass
3	2489.560	37.45	-4.07	74.0	-36.55	Peak	335.50	100	Horizontal	Pass
3**	2489.560	31.08	-4.07	54.0	-22.92	AV	335.50	100	Horizontal	Pass


TEST REPORT

Report No.: SHE19110012-03JE

Date: 2019-11-19

Page 14 of 14

Vertical

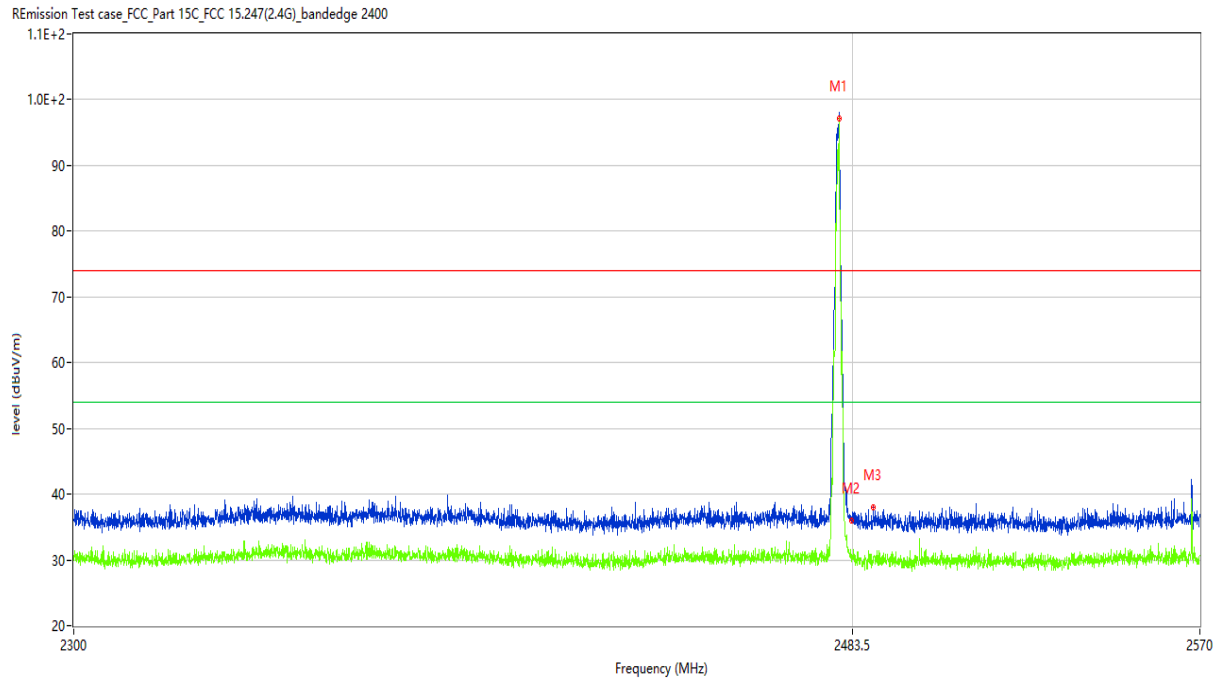

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2480.180	97.18	-3.77	74.0	23.18	Peak	1.90	100	Vertical	N/A
1**	2480.180	96.23	-3.77	54.0	42.23	AV	1.90	100	Vertical	N/A
2	2483.500	36.00	-3.87	74.0	-38.00	Peak	113.20	100	V	Pass
2**	2483.500	30.56	-3.87	54.0	-23.44	AV	113.20	100	V	Pass
3	2488.683	37.98	-4.04	74.0	-36.02	Peak	64.10	100	Vertical	Pass
3**	2488.683	30.45	-4.04	54.0	-23.55	AV	64.10	100	Vertical	Pass

End of the report