TESTING LABORATORY
CERTIFICATE #4820.01

FCC PART 15.407

RSS-GEN, ISSUE 5, AMENDMENT 1, MARCH 2019

RSS-247, ISSUE 2, FEBRUARY 2017

TEST REPORT

For

Chasing-Innovation Technology Co.,Ltd.

FCC: ROOM 506 XITA BUILDING, DIGITAL CULTURE INDUSTRY BASE, SHENLAN AVENUE 10128, NANSHAN DISTRICT, Shenzhen, China
IC: 506 Xita in Digital Cultural Industry Base of Shennan 10128 Nanshan, Nantou Street, Nanshan District, Shenzhen, Guangdong 51800, China

FCC ID:2AMOD-CHASINGM2
IC:22933-CHASINGM2

Report Type:	**Product Name:**
Original Report	CHASING underwater drone

Report Number: RDG200522003-00B

Report Date: 2020-06-23

Reviewed By: Ivan Cao
Assistant Manager

Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan)
No.69 Pulongcun, Puxinhu Industry Area,
Tangxia, Dongguan, Guangdong, China
Tel: +86-769-86858888
Fax: +86-769-86858891
www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION **4**
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) 4
OBJECTIVE 4
RELATED SUBMITTAL(S)/GRANT(S) 4
TEST METHODOLOGY 4
MEASUREMENT UNCERTAINTY 5
TEST FACILITY 5
DECLARATIONS 5
SYSTEM TEST CONFIGURATION **6**
DESCRIPTION OF TEST CONFIGURATION 6
EUT EXERCISE SOFTWARE 6
EQUIPMENT MODIFICATIONS 8
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS 8
SUPPORT CABLE LIST AND DETAILS 8
BLOCK DIAGRAM OF TEST SETUP 9
SUMMARY OF TEST RESULTS **10**
FCC §15.407 (f) & §1.1310 & §2.1093, RSS-102 CLAUSE 4- RF EXPOSURE **11**
APPLICABLE STANDARD 11
TEST RESULT 11
FCC §15.203& RSS-GEN CLAUSE 6.8 - ANTENNA REQUIREMENT **12**
APPLICABLE STANDARD 12
ANTENNA CONNECTOR CONSTRUCTION 13
FCC §15.209, §15.205 , §15.407(b) &RSS-247 CLAUSE 6.2, RSS-GEN CLAUSE 8.10 –UNWANTED EMISSION **14**
APPLICABLE STANDARD 14
EUT SETUP 16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP 18
TEST PROCEDURE 18
CORRECTED AMPLITUDE & MARGIN CALCULATION 19
TEST EQUIPMENT LIST AND DETAILS 20
TEST DATA 20
FCC §15.407(a)(e) & RSS-247 CLAUSE 6.2,RSS-Gen CLAUSE 6.7–EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH **29**
APPLICABLE STANDARD 29
TEST EQUIPMENT LIST AND DETAILS 29
TEST PROCEDURE 29
TEST DATA 29
FCC §15.407(a) & RSS-247 CLAUSE 6.2 –MAXIMUM CONDUCTED OUTPUT POWER **38**
APPLICABLE STANDARD 38
TEST EQUIPMENT LIST AND DETAILS 40
TEST PROCEDURE 40
TEST DATA 41
FCC §15.407(a)& RSS-247 CLAUSE 6.2- POWER SPECTRAL DENSITY **42**
APPLICABLE STANDARD 42

TEST PROCEDURE 44
TEST EQUIPMENT LIST AND DETAILS.....44
TEST DATA 45

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	CHASING underwater drone
EUT Model:	CHASING M2
Operation Frequency:	5745-5825MHz(802.11a/n ht20) 5755-5795 MHz(802.11n ht40)
Maximum Output Power (Conducted):	13.49 dBm
Modulation Type:	OFDM
Rated Input Voltage:	DC11.1V from battery
Serial Number:	RDG200522003-RF-S2
EUT Received Date:	2020.05.25
EUT Received Status:	Good

Objective

This type approval report is prepared on behalf of ***Chasing-Innovation Technology Co.,Ltd.*** in accordance with Part 2-Subpart J, Part 15-Subparts A, and E of the Federal Communications Commission's rules and RSS-247, Issue 2, February 2017, RSS-Gen Issue 5, Amendment 1, March 2019 of the Innovation, Science and Economic Development Canada.

The tests were performed in order to determine compliance with FCC Rules Part 15, Subpart E, section 15.203, 15.205, 15.209 and 15.407 rules and RSS-247, Issue 2, February 2017, RSS-Gen Issue 5, Amendment 1, March 2019 of the Innovation, Science and Economic Development Canada.

Related Submittal(s)/Grant(s)

FCC Part 15C DTS submissions with FCC ID: 2AMOD-CHASINGM2
RSS-247 DTSs submissions with IC: 22933-CHASINGM2

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And KDB 789033 D02 General U-NII Test Procedures New Rules v02r01, and RSS-247, Issue 2, February 2017, RSS-Gen Issue 5, Amendment 1, March 2019 of the Innovation, Science and Economic Development Canada.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB,200M~1GHz: 5.92 dB,1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions,conducted	±1.5 dB
Temperature	±1℃
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol "△ ". Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the U.S. Government.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk "★".

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

The system only supports 802.11a/n ht20/n ht40 in 5.8 GHz band.

For 5725~5850MHz band, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	159	5795
151	5755	161	5805
153	5765	165	5825
157	5785	/	/

For 802.11a, 802.11n ht20 Channel 149, 157 and 165 was tested, for 802.11n ht40 Channel 151, 159 were tested.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations. The device supports SISO in all modes, and MIMO in 802.11n modes, per pretest, 2TX mode was the worst mode and reported for 802.11n modes.

EUT Exercise Software

Software " ubuntu10.04 " was used during test, which was provided by manufacturer, the maximum power was configured as below:

Mode	Channel	Frequency (MHz)	Data rate	Power level Setting	
				Chain 0	Chain 1
802.11a	Low	5745	6Mbps	16	13
	Middle	5785	6Mbps	16	13
	High	5825	6Mbps	16	13
802.11n ht20	Low	5745	MCS8	15	15
	Middle	5785	MCS8	15	15
	High	5825	MCS8	15	15
802.11n ht40	Low	5755	MCS8	10	10
	High	5795	MCS8	10	10

The duty cycle as below:

Mode	T_{on} (ms)	T_{on+off} (ms)	Duty Cycle(x) (%)
802.11 a	2.064	2.115	97.59
802.11n ht20	1.923	1.962	98.01
802.11n ht40	0.948	0.986	96.15

802.11a

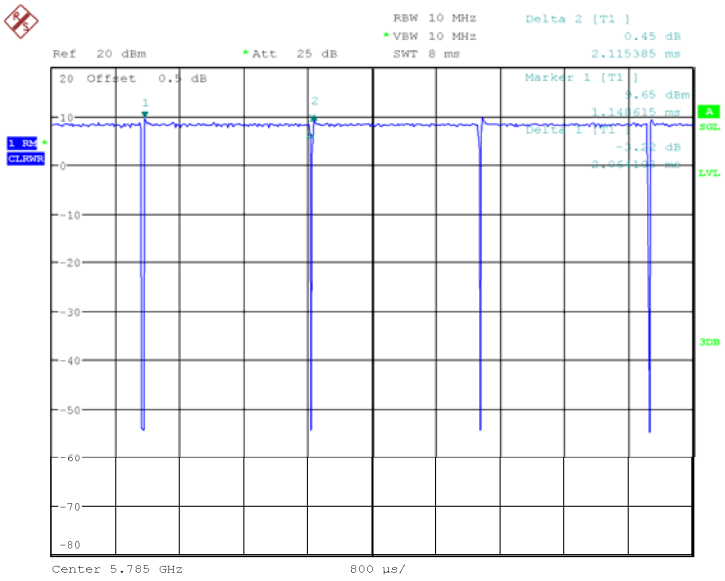

Date: 29.MAY.2020 01:05:18

802.11n ht20

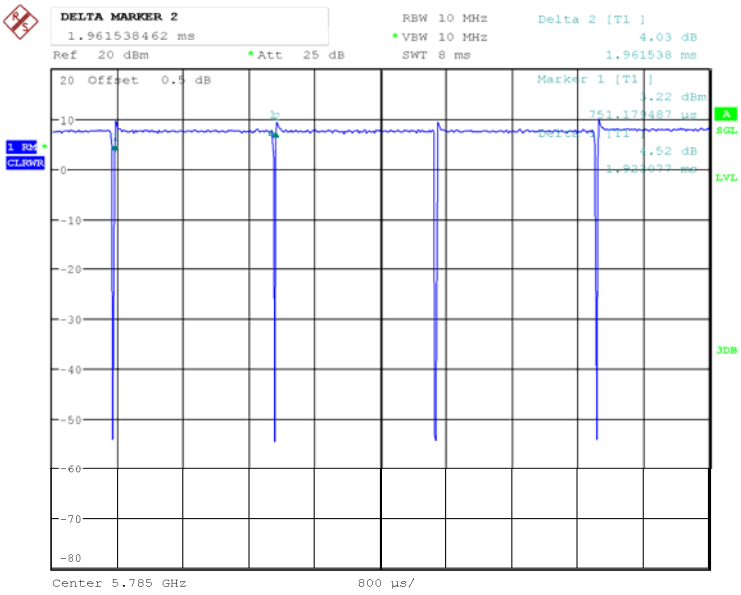

Date: 29.MAY.2020 01:08:40

802.11n ht40

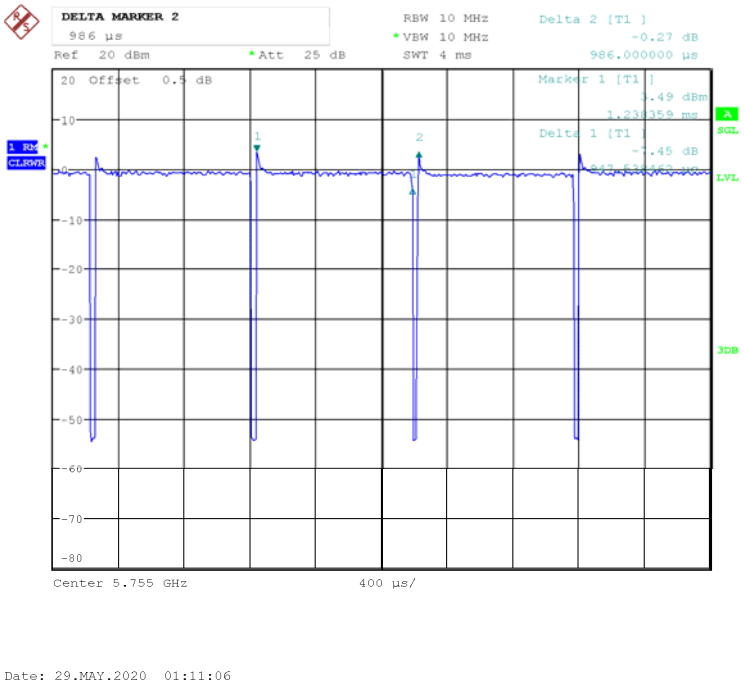

Equipment Modifications

No modification was made to the EUT.

Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Monitor	U3011t	CN-OPH5NY-74445-16T-290L
Chasing-Innovation Technology Co.,Ltd.	ROV	CHASING M2	RDG200522003-RF-S5
Chasing-Innovation Technology Co.,Ltd.	Winder	CHASING M2	RDG200522003-RF-S3

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
HDMI Cable	Yes	Yes	1.2	EUT	Monitor
Signal Cable	Yes	No	100	ROV	EUT
Signal Cable	Yes	No	3	EUT	Winder

Block Diagram of Test Setup

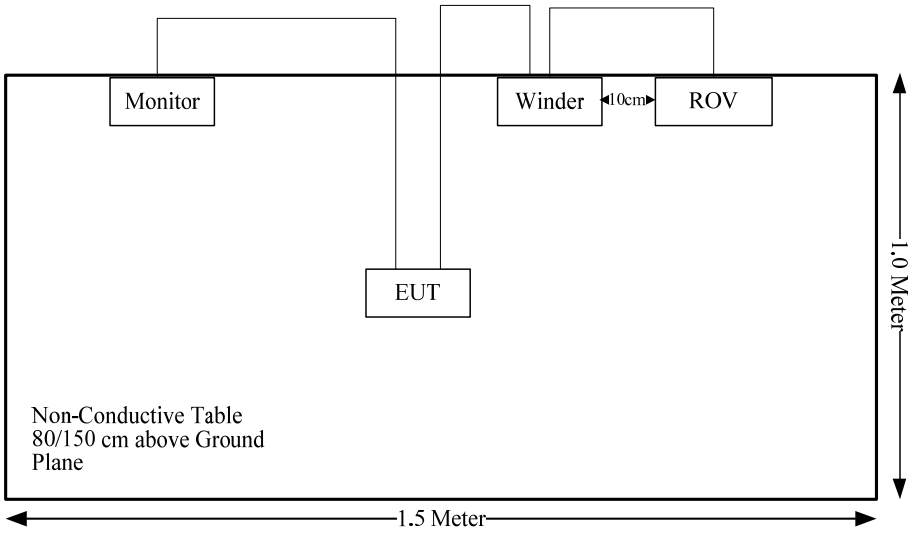

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.407 (f) & §1.1310 & §2.1093 RSS-102 Clause 4	RF Exposure	Compliance
FCC§15.203, RSS-Gen Clause 6.8	Antenna Requirement	Compliance
FCC§15.407(b)(6)& §15.207(a), RSS-Gen Clause 8.8	AC Line Conducted Emissions	Not Applicable
FCC§15.205& §15.209 &§15.407(b), RSS-247 Clause 6.2	Undesirable Emission& Restricted Bands	Compliance
FCC§15.407(a) (e), RSS-247 Clause 6.2 RSS-Gen Clause 6.7	Emission Bandwidth	Compliance
FCC§15.407(a) RSS-247 Clause 6.2	Conducted Transmitter Output Power	Compliance
FCC§15.407 (a), RSS-247 Clause 6.2	Power Spectral Density	Compliance

Note: the device was powered by battery when operating.

FCC §15.407 (f) & §1.1310 & §2.1093, RSS-102 CLAUSE 4- RF EXPOSURE

Applicable Standard

According to§15.407(f),§1.1310 and §2.1093.

According to RSS-102 Clause 4 Table 3, SAR limits for device used by the general public

Body Region	Average SAR (W/Kg)	Averaging Time (minutes)	Mass Average (g)
Whole Body	0.08	6	Whole Body
Localized Head, Neck and Trunk	1.6	6	1
Localized Limbs	4	6	10

Test Result

Compliant, please refer to the SAR report: RDG200522003-20.

FCC §15.203& RSS-GEN CLAUSE 6.8 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC§ 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

a. Antenna must be permanently attached to the unit.
b. Antenna must use a unique type of connector to attach to the EUT.
c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

According to RSS-Gen Clause 6.8, The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.
For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).
When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer. The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.
For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:
This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has two internal antenna arrangement, fulfill the requirement of this section. Please refer to below information and the EUT photos:

Antenna Chain	Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range
0	FPC	50	1.8 dBi/2.4~2.5GHz 2.0 dBi/5.15-5.85GHz
1	FPC	50	1.8 dBi/2.4~2.5GHz 2.0 dBi/5.15-5.85GHz

Result: Compliance.

FCC §15.209, §15.205 , §15.407(b) &RSS-247 CLAUSE 6.2, RSS-GEN CLAUSE 8.10 –UNWANTED EMISSION

Applicable Standard

FCC §15.407; §15.209; §15.205;

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of −27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of −27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of −27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of −27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

(7) The provisions of §15.205 apply to intentional radiators operating under this section.

According to RSS-247 Clause 6.2

Frequency band 5150-5250 MHz

6.2.1.2 Unwanted emission limits

For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz. The 26 dB bandwidth may fall into the 5250-5350 MHz band; however, if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing dynamic frequency selection (DFS) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.

Frequency band 5250-5350 MHz

6.2.2.2 Unwanted emission limits

Devices shall comply with the following:

a) All emissions outside the band 5250-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.; or

b) All emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. and its power shall comply with the spectral power density for operation within the band 5150-5250 MHz. The device, except devices installed in vehicles, shall be labelled or include in the user manual the following text "for indoor use only."

Frequency bands 5470-5600 MHz and 5650-5725 MHz:

6.2.3.2 Unwanted emission limits

Emissions outside the band 5470-5600 MHz and 5650-5725 MHz shall not exceed -27 dBm/MHz e.i.r.p. However, devices with bandwidth overlapping the band edge of 5725 MHz can meet the emission limit of -27 dBm/MHz e.i.r.p. at 5850 MHz instead of 5725 MHz.

Frequency band 5725-5850 MHz

6.2.4.2 Unwanted emission limits

Devices operating in the band 5725-5850 MHz with antenna gain greater than 10 dBi can have unwanted emissions that comply with either the limits in this section or in section 5.5 until six (6) months after the publication date of this standard for certification. Certified devices that do not comply with emission limits in this section shall not be manufactured, imported, distributed, leased, offered for sale or sold after April 1, 2018.

Devices operating in the band 5725-5850 MHz with antenna gain of 10 dBi or less can have unwanted emissions that comply with either the limits in this section or in section 5.5 until April 1, 2018 for certification. Certified devices that do not comply with emission limits in this section shall not be manufactured, imported, distributed, leased, offered for sale or sold after April 1, 2020.

Devices operating in the band 5725-5850 MHz shall have e.i.r.p. of unwanted emissions comply with the following:

a) 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;

b) 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;

c) 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and

d) -27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

EUT Setup

Below 1 GHz:

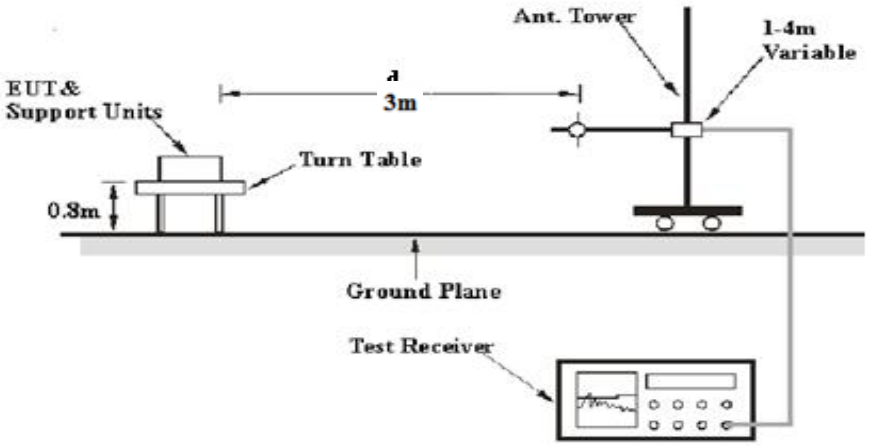

1-26.5 GHz:

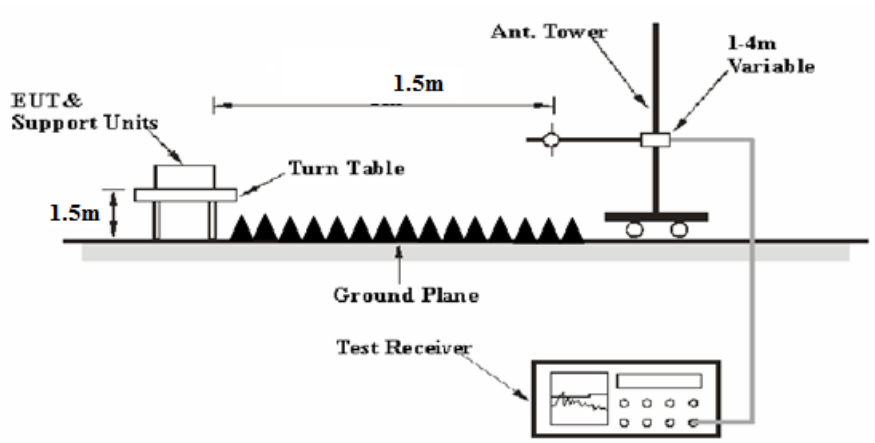

26.5-40 GHz:

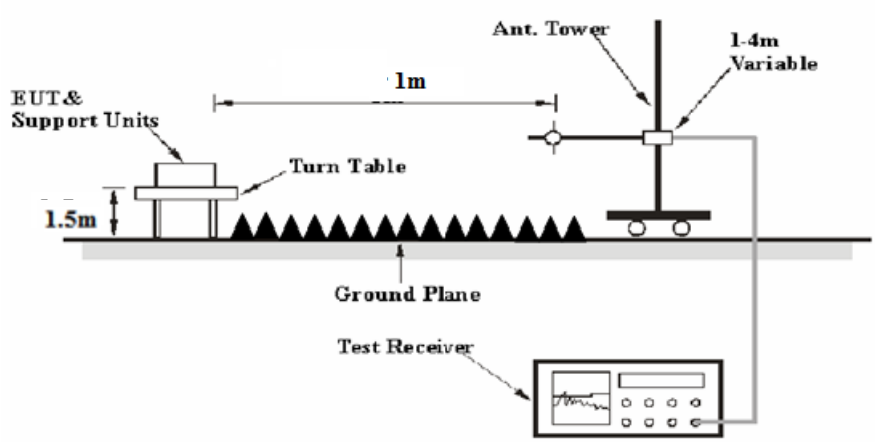

The radiated emission Below 1GHz tests were performed in the 3 meters chamber test site A , above 1GHz tests were performed in the 3 meters chamber test site B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.407 limits and RSS-247, RSS-Gen limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 40GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
Ave.	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: E [dBμV/m] = EIRP[dBm] + 95.2, for d = 3 meters.

According to C63.10, the above 1G test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m or 1m
Distance extrapolation factor =20 log (specific distance [3m]/test distance [1.5m]) dB= 6.02 dB
or
Distance extrapolation factor =20 log (specific distance [3m]/test distance [1m]) dB= 9.54 dB

All emissions under the average limit and under the noise floor have not recorded in the report.

Corrected Amplitude & Margin Calculation

For the range 30MHz-1GHz, the Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude = Meter Reading + Antenna Factor + Cable Loss - Amplifier Gain

The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin = Limit - Corrected Amplitude

For the range 1GHz-40GHz, Test performed at 1.5m or 1m, the Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading and the Distance extrapolation factor. The basic equation is as follows:

Corrected Amplitude
= Meter Reading + Antenna Factor + Cable Loss - Amplifier Gain-Distance extrapolation factor

The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin = Limit- Corrected Amplitude

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated emissions below 1GHz					
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
R&S	EMI Test Receiver	ESR3	102453	2019-09-12	2020-09-12
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2020-05-06	2021-05-06
HP	Amplifier	8447D	2727A05902	2019-09-05	2020-09-05
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Radiated emissions Above 1GHz					
R&S	Spectrum Analyzer	FSV40	101474	2020-01-09	2021-05-09
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Ducommun Technolagies	Horn Antenna	ARH-4223-02	1007726-02 1304	2017-12-06	2020-12-05
Ducommun Technolagies	Horn Antenna	ARH-2823-02	1007726-02 1302	2017-12-06	2020-12-05
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2019-06-27	2020-06-27
Mini-Circuit	Amplifier	ZVA-213-S+	54201245	2019-09-05	2020-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2019-06-27	2020-06-27
Sinoscite	Bandstop Filters	BSF5150-5850MN-0899-003	0899003	2020-05-06	2021-05-06
Mini Circuits	High Pass Filter	VHF-6010+	31118	2019-06-16	2020-06-16

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Test Items	Radiation Below 1GHz	Radiation Above 1GHz
Temperature:	25.1°C	23.6°C
Relative Humidity:	52 %	53%
ATM Pressure:	100.8kPa	100.8kPa
Tester:	Jalon Liu	Jalon Liu
Test Date:	2020-05-29	2020-06-17

Test Mode: Transmitting

Below 1GHz (802.11a chain 1, 5745 MHz was the worst):

Horizontal:

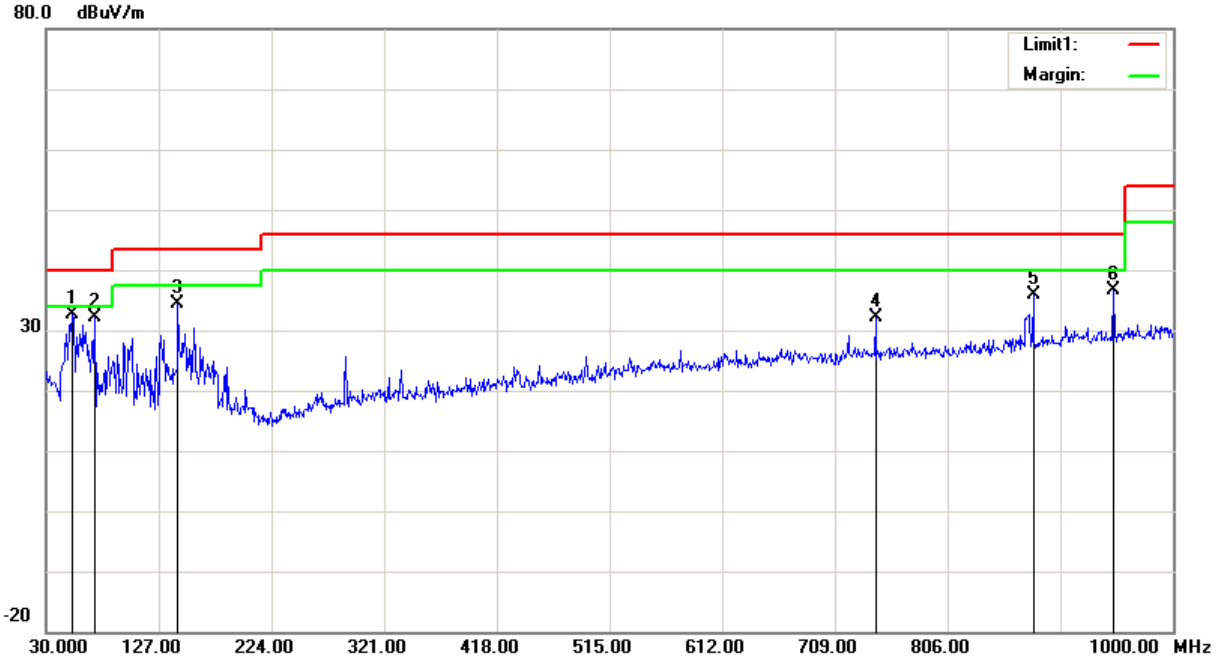

Frequency (MHz)	Receiver Reading (dBµV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
52.3100	49.04	peak	-16.45	32.59	40.00	7.41
71.7100	48.46	peak	-16.45	32.01	40.00	7.99
143.4900	43.48	peak	-9.17	34.31	43.50	9.19
743.9200	31.35	peak	0.68	32.03	46.00	13.97
879.7200	32.95	peak	2.99	35.94	46.00	10.06
948.5900	31.77	peak	4.77	36.54	46.00	9.46

Vertical

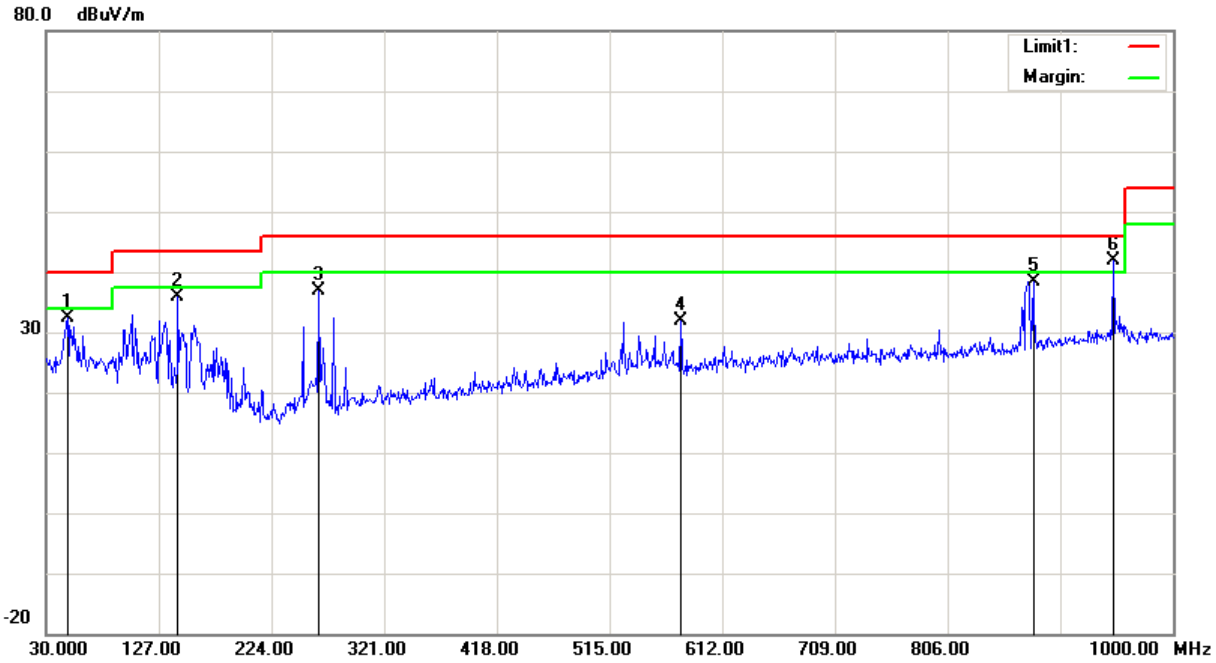

Frequency (MHz)	Receiver Reading (dBµV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
48.4300	47.68	peak	-15.33	32.35	40.00	7.65
143.4900	44.96	peak	-9.17	35.79	43.50	7.71
264.7400	45.82	peak	-8.96	36.86	46.00	9.14
576.1100	33.32	peak	-1.45	31.87	46.00	14.13
879.7200	35.46	peak	2.99	38.45	46.00	7.55
948.5900	37.01	QP	4.77	41.78	46.00	4.22

1GHz-40GHz:
802.11a,Chain 0:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5745 MHz										
5725.00	40.82	PK	H	34.19	3.69	0.00	78.70	78.7	122.20	43.50
5720.00	31.21	PK	H	34.19	3.69	0.00	69.09	69.09	110.80	41.71
5700.00	28.86	PK	H	34.18	3.68	0.00	66.72	66.72	105.20	38.48
5650.00	28.05	PK	H	34.16	3.63	0.00	65.84	65.84	68.20	2.36
11490.00	39.57	PK	H	38.99	6.59	25.51	59.64	59.64	74.00	14.36
11490.00	27.19	AV	H	38.99	6.59	25.51	47.26	47.26	54.00	6.74
17235.00	35.49	PK	H	41.56	8.78	23.72	62.11	62.11	68.20	6.09
Middle Channel: 5785 MHz										
11570.00	39.18	PK	H	39.00	6.61	25.46	59.33	59.33	74.00	14.67
11570.00	28.06	AV	H	39.00	6.61	25.46	48.21	48.21	54.00	5.79
17355.00	34.53	PK	H	42.26	8.81	23.60	62.00	62	68.20	6.20
High Channel: 5825 MHz										
5850.00	28.40	PK	H	34.24	3.75	0.00	66.39	66.39	122.20	55.81
5855.00	27.68	PK	H	34.24	3.75	0.00	65.67	65.67	110.80	45.13
5875.00	27.35	PK	H	34.25	3.77	0.00	65.37	65.37	105.20	39.83
5925.00	28.34	PK	H	34.27	3.80	0.00	66.41	66.41	68.20	1.79
11650.00	37.89	PK	H	39.00	6.64	25.41	58.12	58.12	74.00	15.88
11650.00	26.78	AV	H	39.00	6.64	25.41	47.01	47.01	54.00	6.99
17475.00	34.80	PK	H	42.96	8.84	23.48	63.12	63.12	68.20	5.08

802.11a,Chain 1:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5745 MHz										
5725.00	38.47	PK	H	34.19	3.69	0.00	76.35	76.35	122.20	45.85
5720.00	27.87	PK	H	34.19	3.69	0.00	65.75	65.75	110.80	45.05
5700.00	27.73	PK	H	34.18	3.68	0.00	65.59	65.59	105.20	39.61
5650.00	28.37	PK	H	34.16	3.63	0.00	66.16	66.16	68.20	2.04
11490.00	39.12	PK	H	38.99	6.59	25.51	59.19	59.19	74.00	14.81
11490.00	26.51	AV	H	38.99	6.59	25.51	46.58	46.58	54.00	7.42
17235.00	39.05	PK	H	41.56	8.78	23.72	65.67	65.67	68.20	2.53
Middle Channel: 5785 MHz										
11570.00	38.22	PK	H	39.00	6.61	25.46	58.37	58.37	74.00	15.63
11570.00	26.13	AV	H	39.00	6.61	25.46	46.28	46.28	54.00	7.72
17355.00	37.20	PK	H	42.26	8.81	23.60	64.67	64.67	68.20	3.53
High Channel: 5825 MHz										
5850.00	30.06	PK	H	34.24	3.75	0.00	68.05	68.05	122.20	54.15
5855.00	28.03	PK	H	34.24	3.75	0.00	66.02	66.02	110.80	44.78
5875.00	28.89	PK	H	34.25	3.77	0.00	66.91	66.91	105.20	38.29
5925.00	27.92	PK	H	34.27	3.80	0.00	65.99	65.99	68.20	2.21
11650.00	35.59	PK	H	39.00	6.64	25.41	55.82	55.82	74.00	18.18
11650.00	23.44	AV	H	39.00	6.64	25.41	43.67	43.67	54.00	10.33
17475.00	36.54	PK	H	42.96	8.84	23.48	64.86	64.86	68.20	3.34

802.11n ht20(2Tx was the worst)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5745 MHz										
5725.00	39.45	PK	H	34.19	3.69	0.00	77.33	77.33	122.20	44.87
5720.00	29.27	PK	H	34.19	3.69	0.00	67.15	67.15	110.80	43.65
5700.00	27.58	PK	H	34.18	3.68	0.00	65.44	65.44	105.20	39.76
5650.00	28.16	PK	H	34.16	3.63	0.00	65.95	65.95	68.20	2.25
11490.00	38.71	PK	H	38.99	6.59	25.51	58.78	58.78	74.00	15.22
11490.00	25.43	AV	H	38.99	6.59	25.51	45.50	45.5	54.00	8.50
17235.00	35.26	PK	H	41.56	8.78	23.72	61.88	61.88	68.20	6.32
Middle Channel: 5785 MHz										
11570.00	39.09	PK	H	39.00	6.61	25.46	59.24	59.24	74.00	14.76
11570.00	25.56	AV	H	39.00	6.61	25.46	45.71	45.71	54.00	8.29
17355.00	35.21	PK	H	42.26	8.81	23.60	62.68	62.68	68.20	5.52
High Channel: 5825 MHz										
5850.00	29.63	PK	H	34.24	3.75	0.00	67.62	67.62	122.20	54.58
5855.00	27.72	PK	H	34.24	3.75	0.00	65.71	65.71	110.80	45.09
5875.00	28.12	PK	H	34.25	3.77	0.00	66.14	66.14	105.20	39.06
5925.00	28.17	PK	H	34.27	3.80	0.00	66.24	66.24	68.20	1.96
11650.00	39.03	PK	H	39.00	6.64	25.41	59.26	59.26	74.00	14.74
11650.00	25.38	AV	H	39.00	6.64	25.41	45.61	45.61	54.00	8.39
17475.00	35.25	PK	H	42.96	8.84	23.48	63.57	63.57	68.20	4.63

802.11n ht40(2Tx was the worst)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5755 MHz										
5725.00	48.61	PK	H	34.19	3.69	0.00	86.49	86.49	122.20	35.71
5720.00	35.13	PK	H	34.19	3.69	0.00	73.01	73.01	110.80	37.79
5700.00	27.95	PK	H	34.18	3.68	0.00	65.81	65.81	105.20	39.39
5650.00	27.98	PK	H	34.16	3.63	0.00	65.77	65.77	68.20	2.43
11510.00	35.61	PK	H	39.00	6.59	25.50	55.70	55.7	74.00	18.30
11510.00	22.56	AV	H	39.00	6.59	25.50	42.65	42.65	54.00	11.35
17265.00	34.83	PK	H	41.74	8.79	23.69	61.67	61.67	68.20	6.53
High Channel: 5795 MHz										
5850.00	28.09	PK	H	34.24	3.75	0.00	66.08	66.08	122.20	56.12
5855.00	27.74	PK	H	34.24	3.75	0.00	65.73	65.73	110.80	45.07
5875.00	27.93	PK	H	34.25	3.77	0.00	65.95	65.95	105.20	39.25
5925.00	28.39	PK	H	34.27	3.80	0.00	66.46	66.46	68.20	1.74
11590.00	35.48	PK	H	39.00	6.62	25.45	55.65	55.65	74.00	18.35
11590.00	22.37	AV	H	39.00	6.62	25.45	42.54	42.54	54.00	11.46
17385.00	35.18	PK	H	42.43	8.82	23.57	62.86	62.86	68.20	5.34

Test Plots(For worst mode 802.11a chain 0 5745MHz)
Horizontal

Fundamental Test with Band Rejection Filter

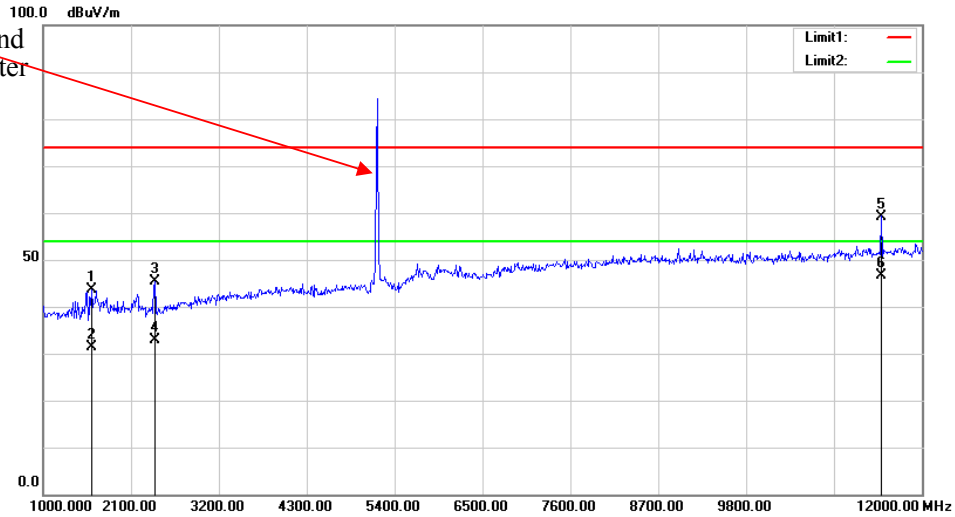

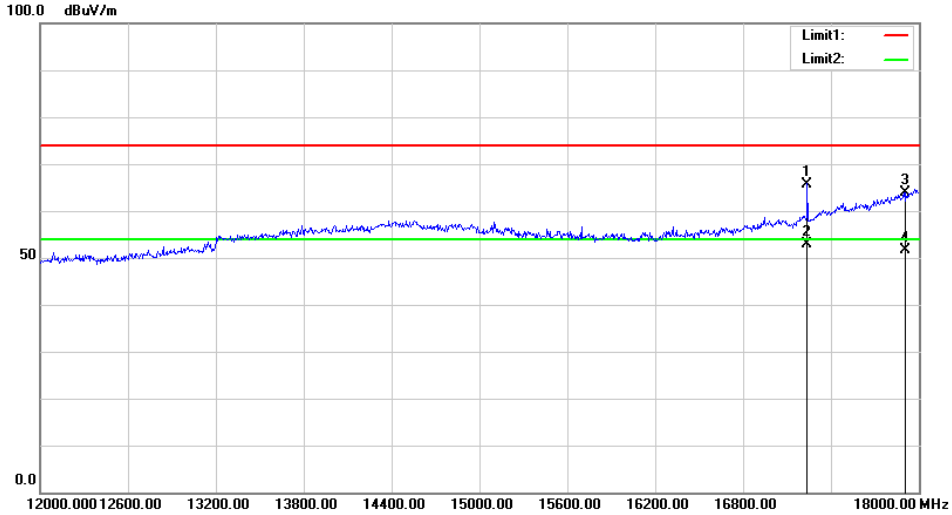

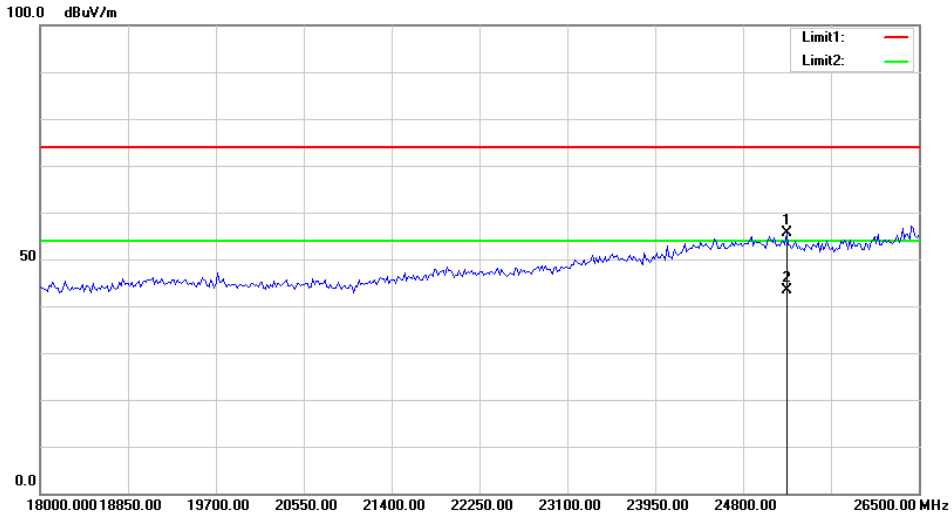

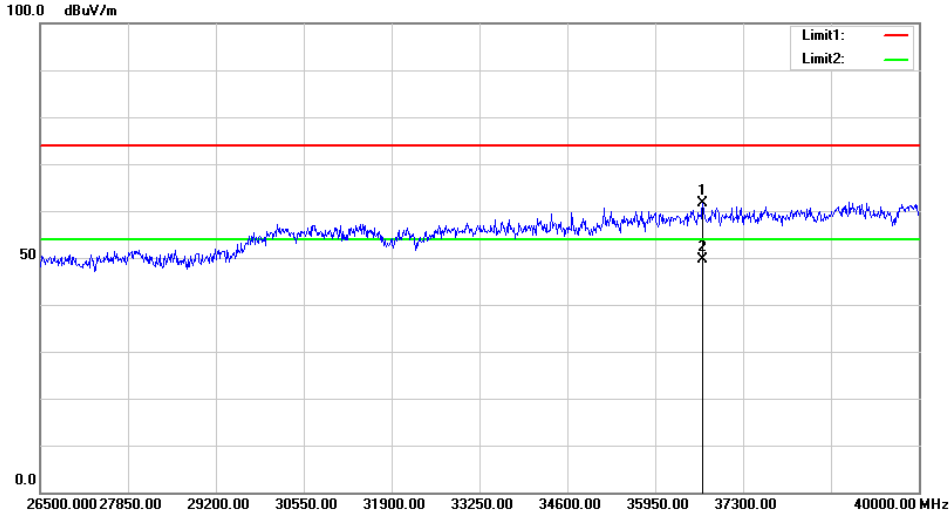

Vertical:

Fundamental Test with Band Rejection Filter

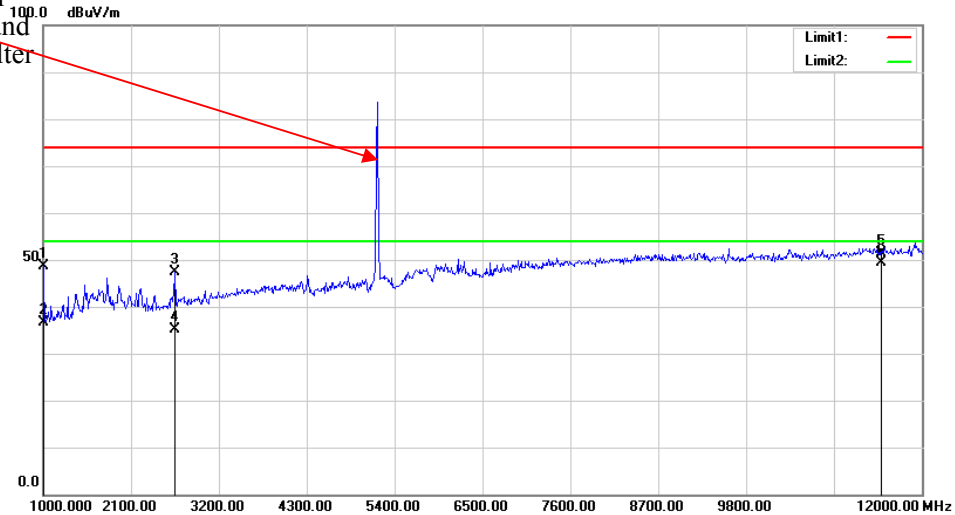

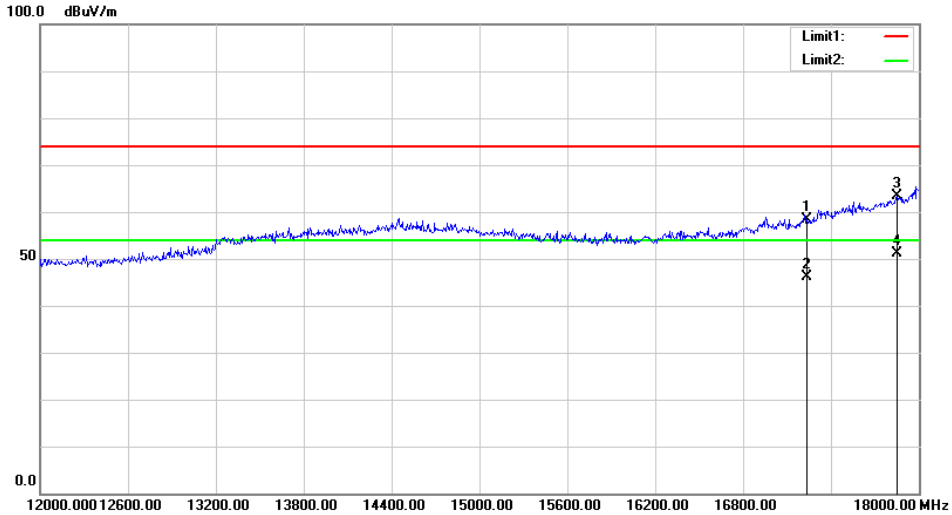

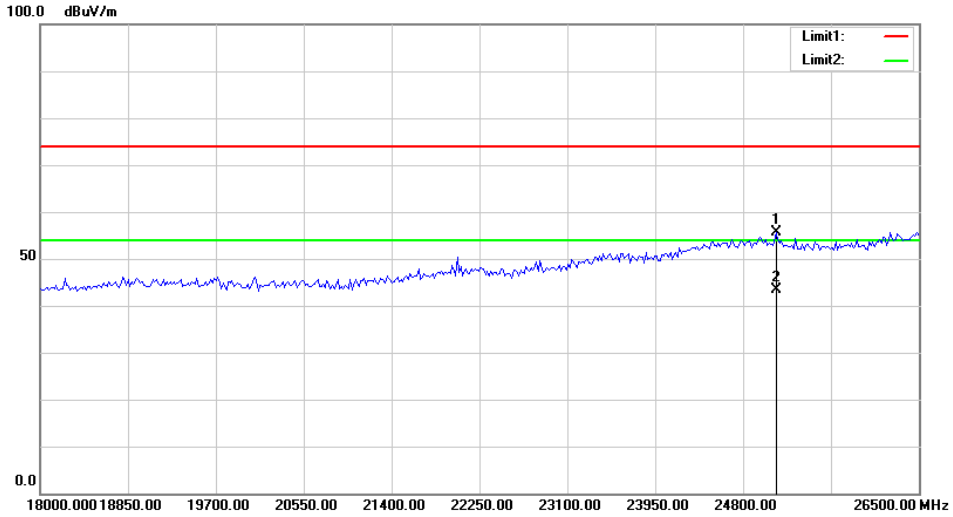
100.0 dBuV/m
Limit1:
Limit2:
50
0.0
1
2
18000.000 18850.00 19700.00 20550.00 21400.00 22250.00 23100.00 23950.00 24800.00 26500.00 MHz

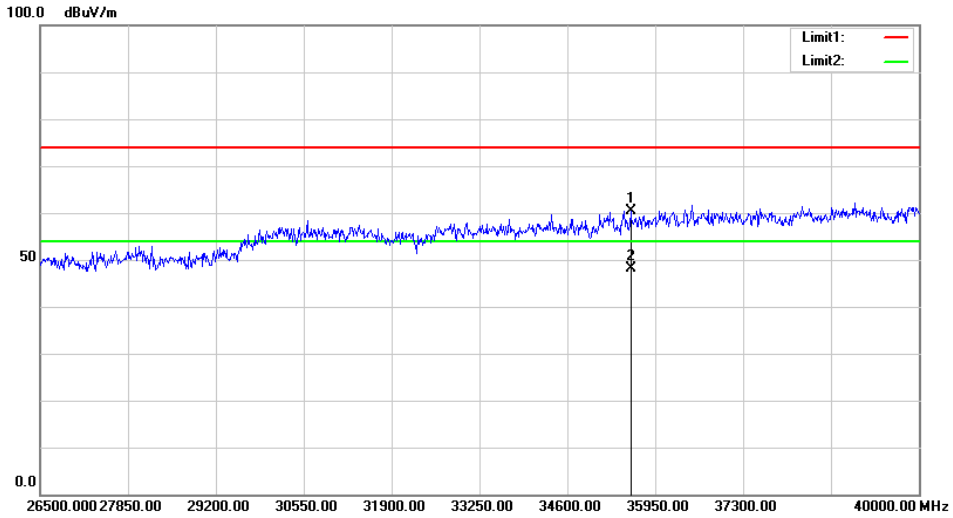
100.0 dBuV/m
Limit1:
Limit2:
50
0.0
1
2
26500.000 27850.00 29200.00 30550.00 31900.00 33250.00 34600.00 35950.00 37300.00 40000.00 MHz

FCC §15.407(a)(e) & RSS-247 CLAUSE 6.2,RSS-Gen CLAUSE 6.7– EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH

Applicable Standard

15.407(a) (e), RSS-247 Clause 6.2 and RSS-Gen Clause 6.7

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2020-05-09	2021-05-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/03	Each time	N/A

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Test Data

Environmental Conditions

Temperature:	25°C
Relative Humidity:	51 %
ATM Pressure:	100.4 kPa
Tester:	Severn Zhu
Test Date:	*2020-05-29*

Test mode: Transmitting (test was only performed at chain 0)

Test Result: Compliance. Please refer to the following tables and plots.

Mode	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	6 dB Emission Bandwidth Limit (MHz)	99% Occupied Bandwidth (MHz)
802.11 a	5745	15.440	≥0.5	20.40
	5785	15.440	≥0.5	20.800
	5825	15.360	≥0.5	19.440
802.11n ht20	5745	15.200	≥0.5	18.400
	5785	15.200	≥0.5	18.240
	5825	15.200	≥0.5	18.080
802.11n ht40	5755	35.040	≥0.5	41.120
	5795	35.040	≥0.5	40.800

Note: the 99% Occupied Bandwidth have not fall into the band 5470-5725MHz, please refer to the test plots of 99% Occupied Bandwidth.

6dB Emission Bandwidth:

802.11a Low Channel

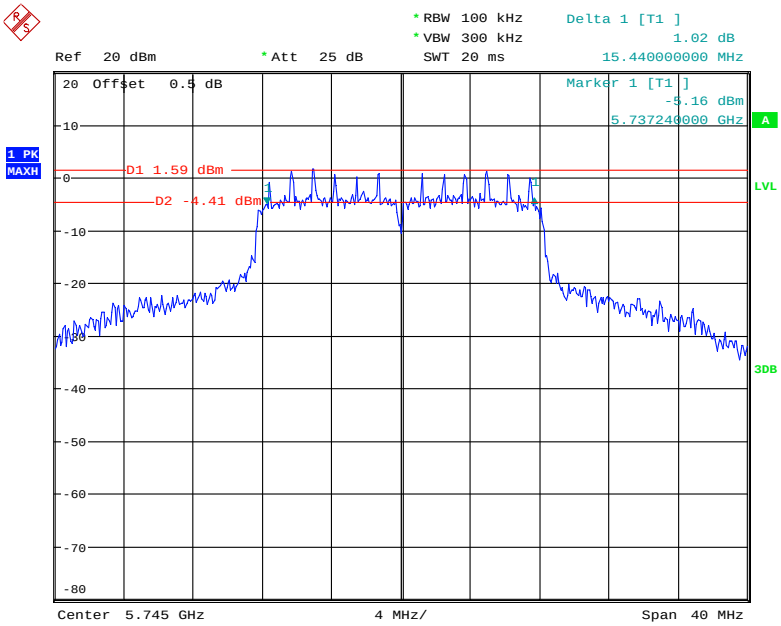

Date: 29.MAY.2020 00:04:57

802.11a Middle Channel

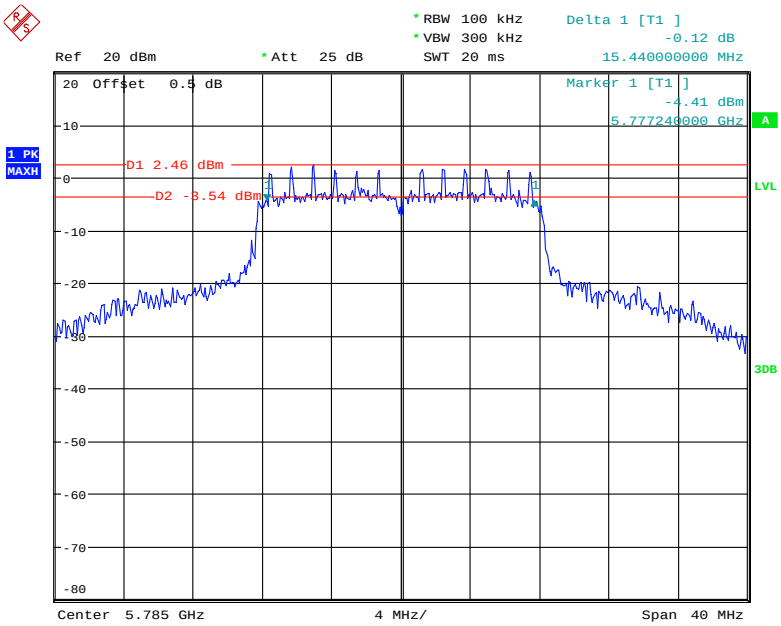

Date: 29.MAY.2020 00:06:10

802.11a High Channel

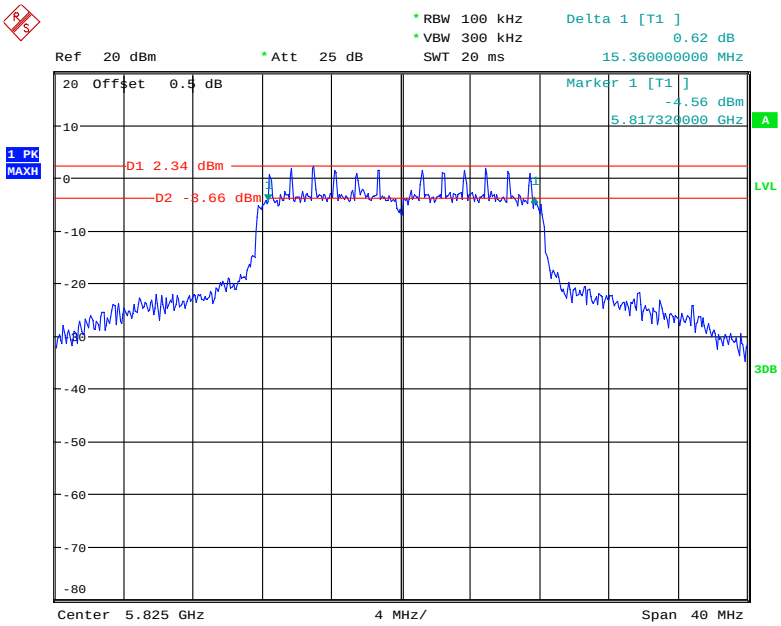

Date: 29.MAY.2020 00:07:48

802.11n ht20 Low Channel

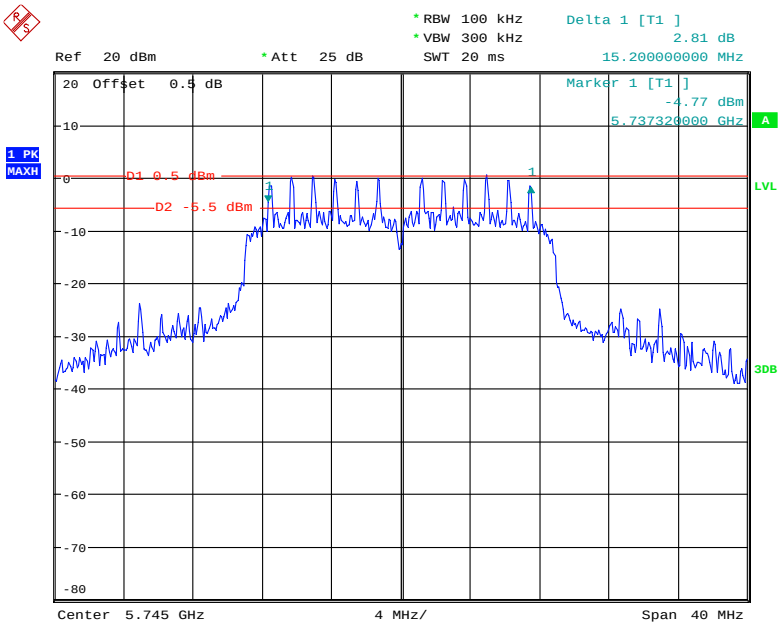

Date: 29.MAY.2020 00:09:26

802.11n ht20 Middle Channel

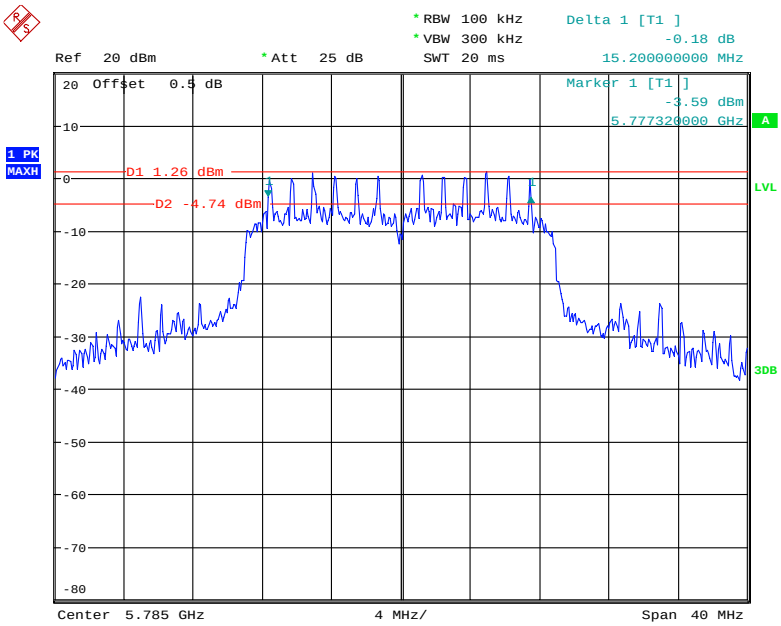

Date: 29.MAY.2020 00:12:46

802.11n ht20 High Channel

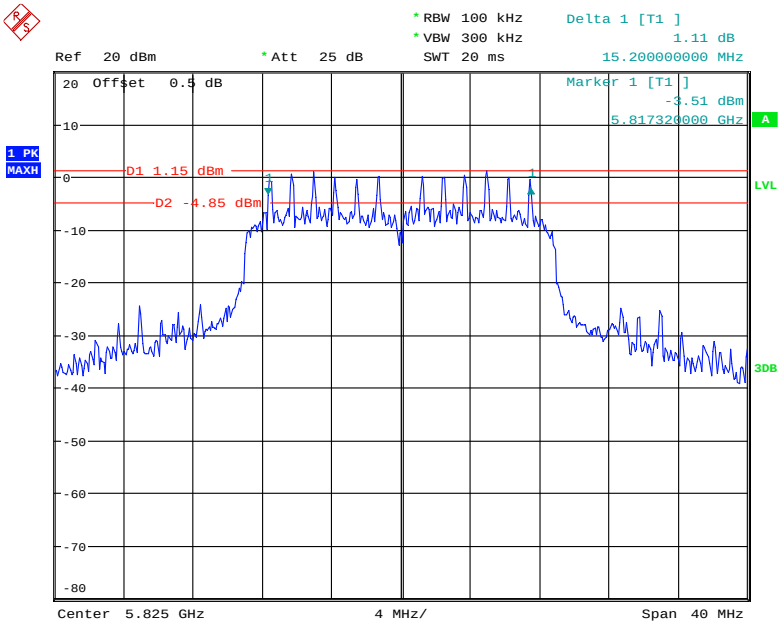

Date: 29.MAY.2020 00:15:00

802.11n ht40 Low Channel

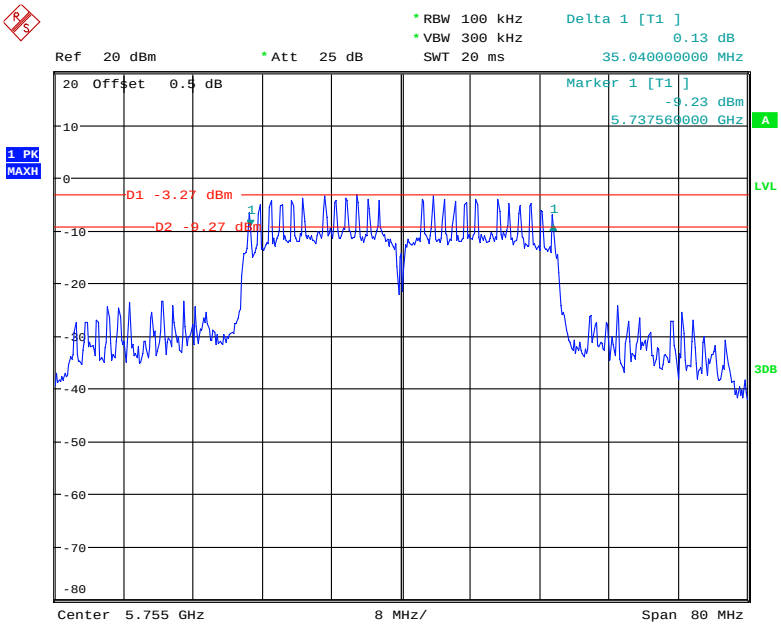

Date: 29.MAY.2020 00:16:48

802.11n ht40 High Channel

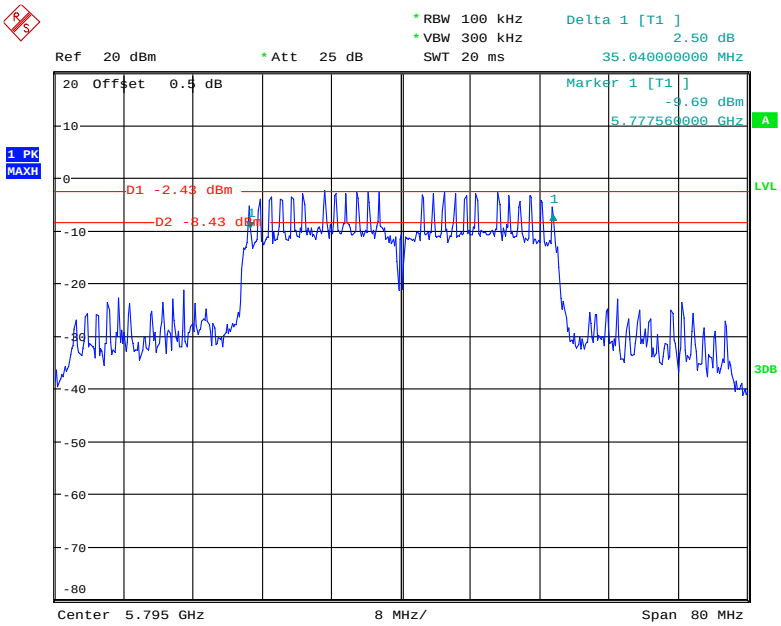

Date: 29.MAY.2020 00:17:53

99% Occupied Bandwidth:

802.11a Low Channel

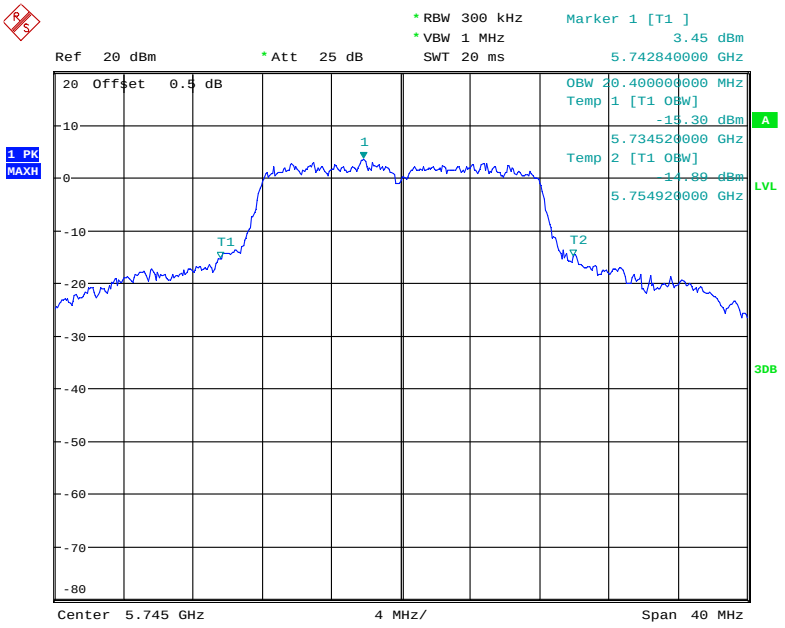

Date: 29.MAY.2020 00:05:06

802.11a Middle Channel

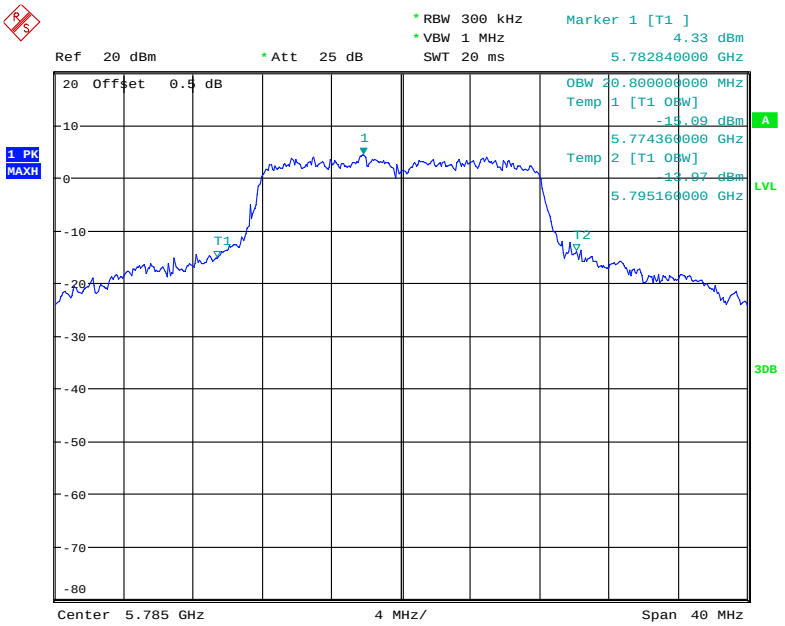

Date: 29.MAY.2020 00:06:22

802.11a High Channel

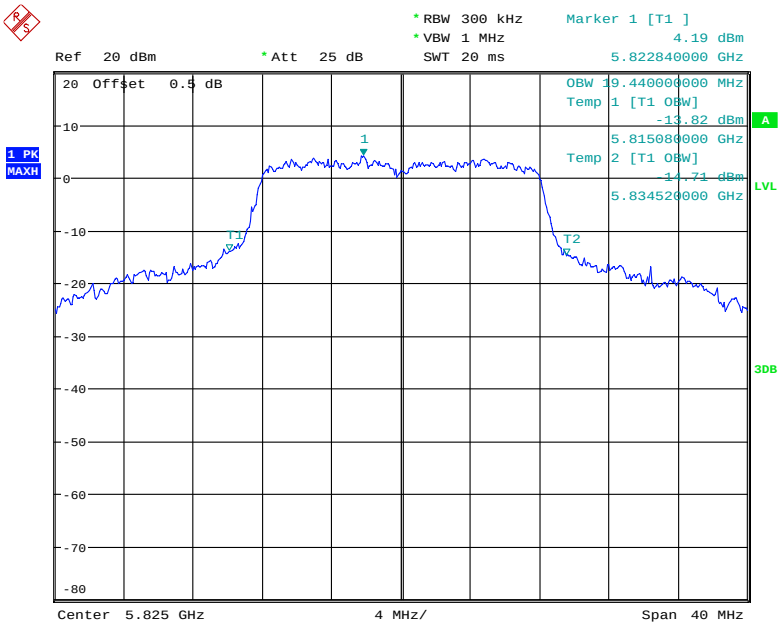

Date: 29.MAY.2020 00:08:01

802.11n ht20 Low Channel

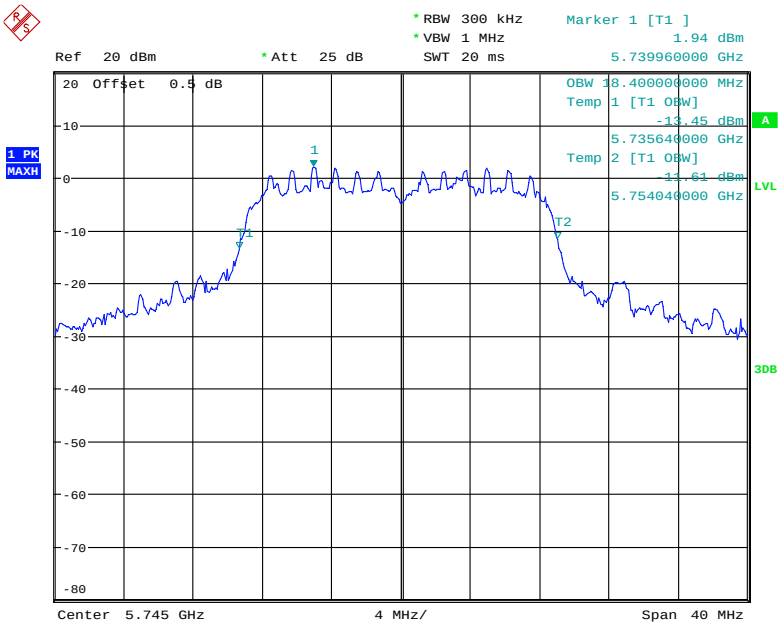

Date: 29.MAY.2020 00:09:38

802.11n ht20 Middle Channel

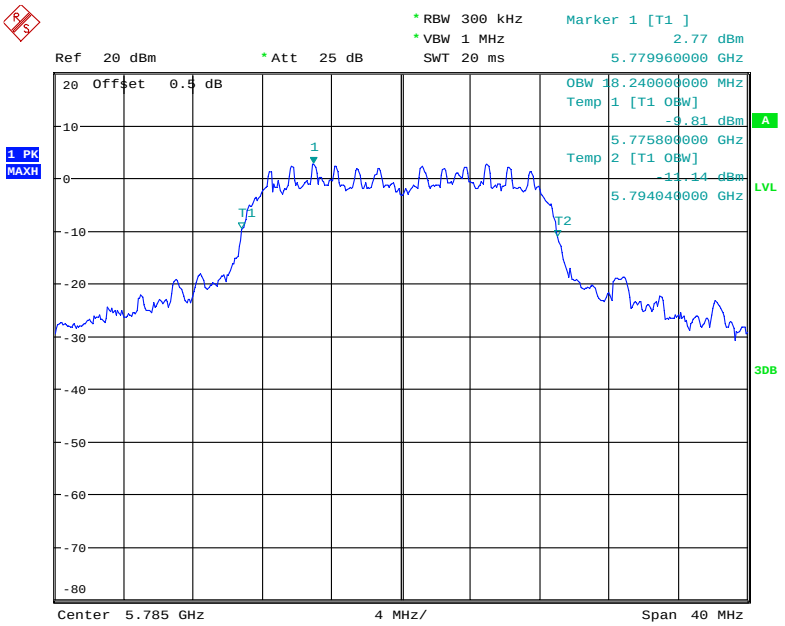

Date: 29.MAY.2020 00:12:58

802.11n ht20 High Channel

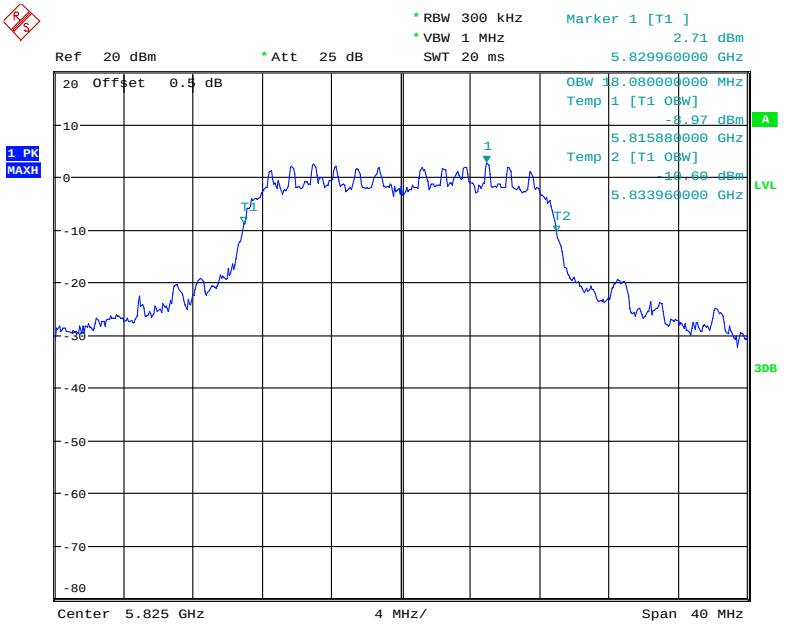

Date: 29.MAY.2020 00:15:12

802.11n ht40 Low Channel

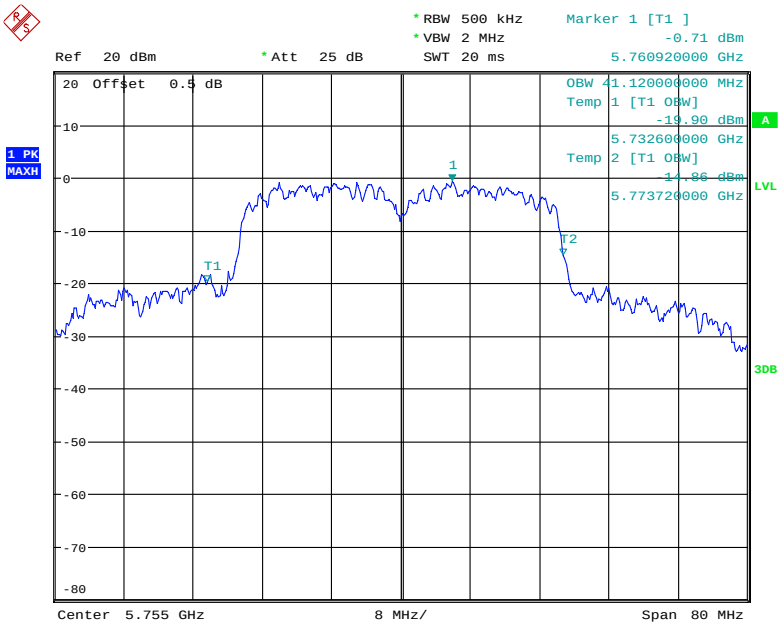

Date: 29.MAY.2020 00:17:01

802.11n ht40 High Channel

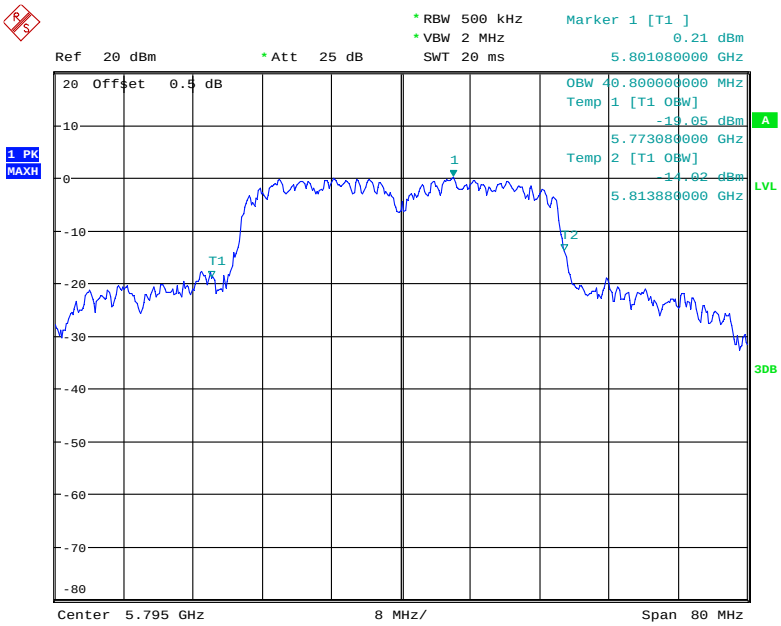

Date: 29.MAY.2020 00:18:05

FCC §15.407(a) & RSS-247 CLAUSE 6.2 –MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.407(a)

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(4) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

According to RSS-247 Clause 6.2:

Frequency band 5150-5250 MHz

6.2.1.1 Power limits

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or 1.76 + 10 $\log_{10}$B, dBm, whichever is less stringent. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 $\log_{10}$B, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

Frequency band 5250-5350 MHz

6.2.2.1 Power limits

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or 1.76 + 10 $\log_{10}$B, dBm, whichever is less. Devices shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

Devices, other than devices installed in vehicles, shall comply with the following:

a) The maximum conducted output power shall not exceed 250 mW or 11 + 10 $\log_{10}$B, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;

b) The maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 $\log_{10}$B, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

Frequency bands 5470-5600 MHz and 5650-5725 MHz

6.2.3.1 Power limits

The maximum conducted output power shall not exceed 250 mW or 11 + 10 $\log_{10}$B, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 $\log_{10}$B, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

Frequency band 5725-5850 MHz

6.2.4.1 Power limits

For equipment operating in the band 5725-5850 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint[3] systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Unknown	Coaxial Cable	C-SJ00-0010	C0010/03	Each time	N/A
Unknown	Attenuator	UNAT-3+	15529	Each time	N/A
Agilent	USB Wideband Power Sensor	U2021XA	MY5425009	2020-05-09	2021-05-09

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Test Data

Environmental Conditions

Temperature:	24.2°C
Relative Humidity:	51%
ATM Pressure:	100.6kPa
Test by:	Severn Zhu
Test Date:	2020-06-02

Test Mode: Transmitting

Test Result: Compliance.

Mode	Frequency (MHz)	Conducted Average Output Power (dBm)			Limit (dBm)
		Chain 0	Chain 1	Total	
802.11 a	5745	10.51	10.22	/	30
	5785	10.65	10.89	/	30
	5825	10.71	10.47	/	30
802.11n ht20	5745	8.09	11.44	13.09	30
	5785	8.37	11.90	13.49	30
	5825	7.64	10.71	12.45	30
802.11n ht40	5755	2.35	5.72	7.36	30
	5795	2.37	5.81	7.43	30

Note:
The duty cycle factor has been calculated into the test data.
The maximum antenna gain is 2.0dBi in 5GHz band, meets the RSS-247 EIRP limits. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

So:

Directional gain = G_{ANT} + Array Gain = 2dBi

FCC §15.407(a)& RSS-247 CLAUSE 6.2- POWER SPECTRAL DENSITY

Applicable Standard

According to FCC §15.407(a)

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output

power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

According to RSS-247 Clause 6.2:

Frequency band 5150-5250 MHz

6.2.1.1 Power limits

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or 1.76 + 10 $\log_{10}$B, dBm, whichever is less stringent. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 $\log_{10}$B, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

Frequency band 5250-5350 MHz

6.2.2.1 Power limits

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or 1.76 + 10 $\log_{10}$B, dBm, whichever is less. Devices shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

Devices, other than devices installed in vehicles, shall comply with the following:

a) The maximum conducted output power shall not exceed 250 mW or 11 + 10 $\log_{10}$B, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;

b) The maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 $\log_{10}$B, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

Frequency bands 5470-5600 MHz and 5650-5725 MHz

6.2.3.1 Power limits

The maximum conducted output power shall not exceed 250 mW or 11 + 10 $\log_{10}$B, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 $\log_{10}$B, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

Frequency band 5725-5850 MHz

6.2.4.1 Power limits

For equipment operating in the band 5725-5850 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint[3] systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2020-05-09	2021-05-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/03	Each time	N/A

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25.2°C
Relative Humidity:	51 %
ATM Pressure:	101 kPa

The testing was performed by Severn Zhu on 2020-06-02.

Test Mode: Transmitting

Test Result:Compliance.Please refer to the following table and plot.

5725-5850MHz

Mode	Frequency (MHz)	Reading (dBm/300kHz)		Result (dBm/500kHz)			Limit (dBm/500kHz)
		Chain 0	Chain 1	Chain 0	Chain 1	Total	
802.11a	5745	-1.45	-2.13	0.77	0.09	/	30
	5785	-1.73	-1.71	0.49	0.51	/	30
	5825	-1.75	-2.49	0.47	-0.27	/	30
802.11n ht20	5745	-4.75	-3.05	-2.53	-0.83	1.41	30
	5785	-4.42	-2.8	-2.2	-0.58	1.70	30
	5825	-5.58	-3.83	-3.36	-1.61	0.61	30
802.11n ht40	5755	-14.52	-12.43	-12.3	-10.21	-8.12	30
	5795	-13.8	-12.02	-11.58	-9.8	-7.59	30

Note:
The maximum antenna gain is 2.0 dBi in 5GHz band. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

$$\text{Array Gain} = 10 \log(N_{ANT}/N_{SS}) \text{ dB.}$$

So:

$$\text{Directional gain} = G_{ANT} + \text{Array Gain} = 2\text{dBi}+10*\log(2/1)=5\text{dBi}$$

For 5.8GHz band, If measurement bandwidth of Maximum PSD is specified in 500 kHz, add 10log(500kHz/RBW) to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.

Note 3: Method SA-3 in KDB 789033 D02 General UNII Test Procedures New Rules v02r01was used for PSD test.

Chain 0:

802.11a Low Channel

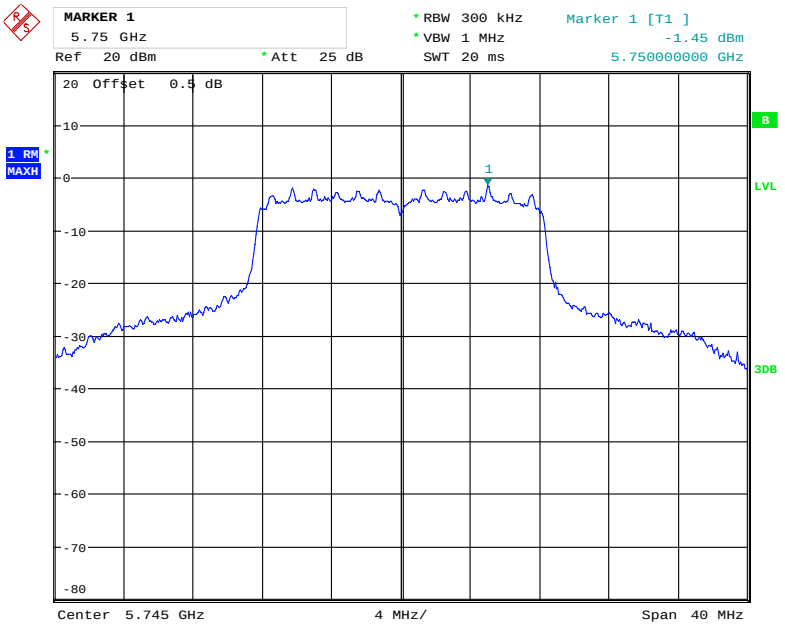

Date: 2.JUN.2020 10:08:49

802.11a Middle Channel

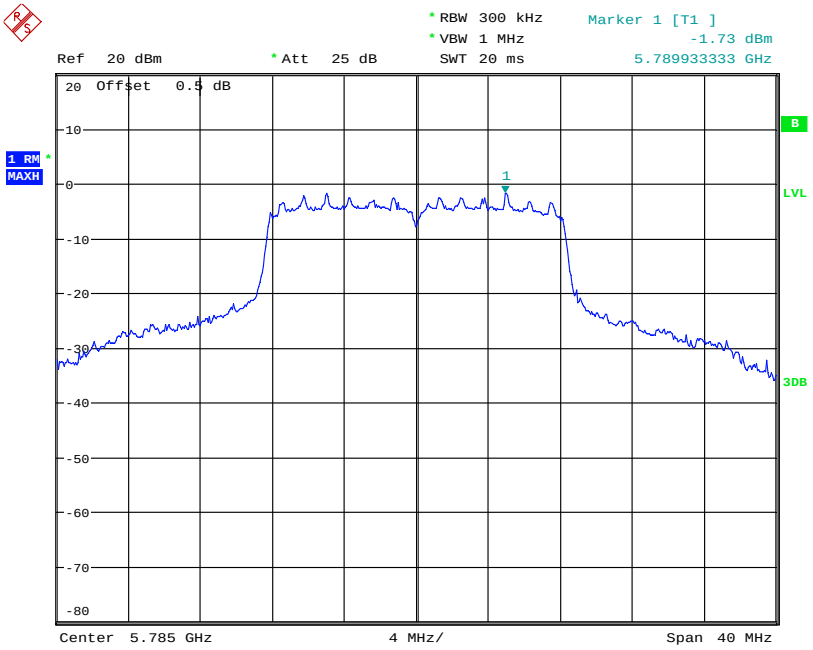

Date: 2.JUN.2020 10:09:48

802.11a High Channel

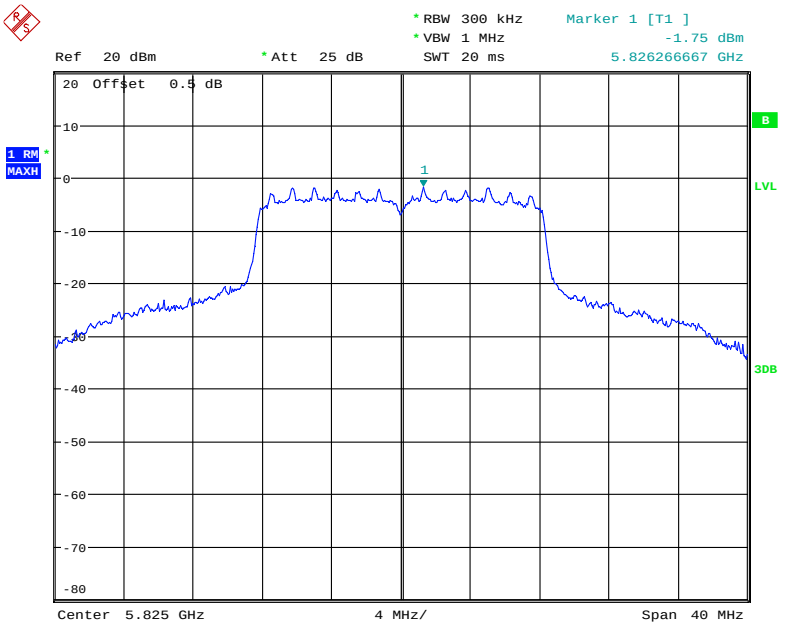

Date: 2.JUN.2020 10:15:12

802.11n ht20 Low Channel

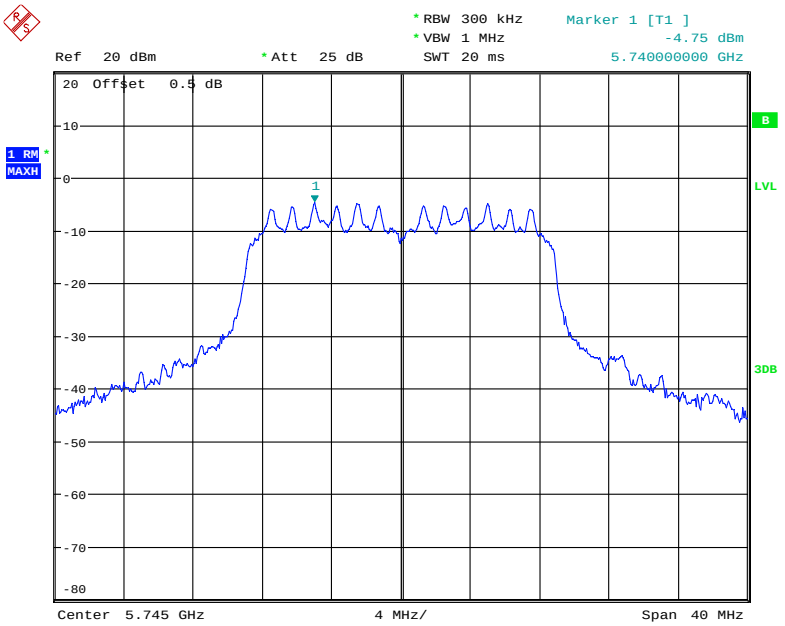

Date: 2.JUN.2020 10:16:56

802.11n ht20 Middle Channel

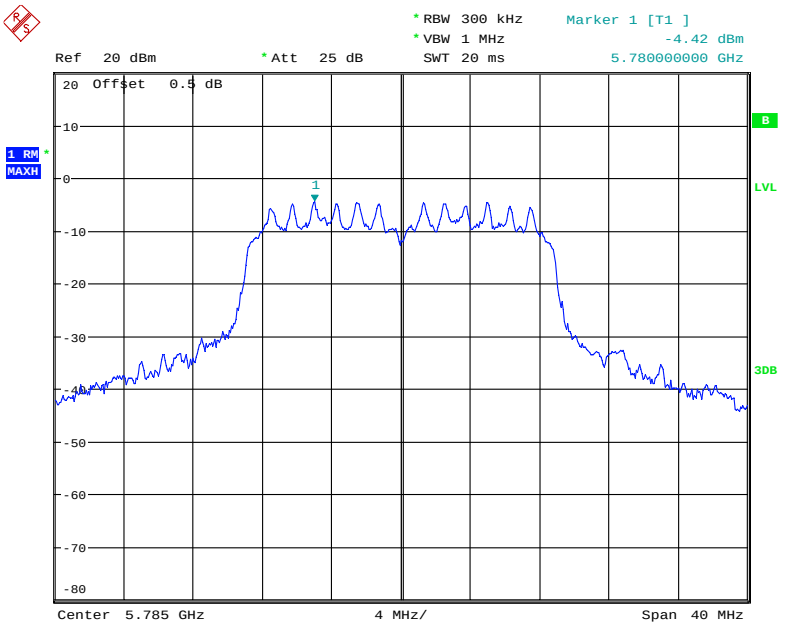

Date: 2.JUN.2020 10:17:44

802.11n ht20 High Channel

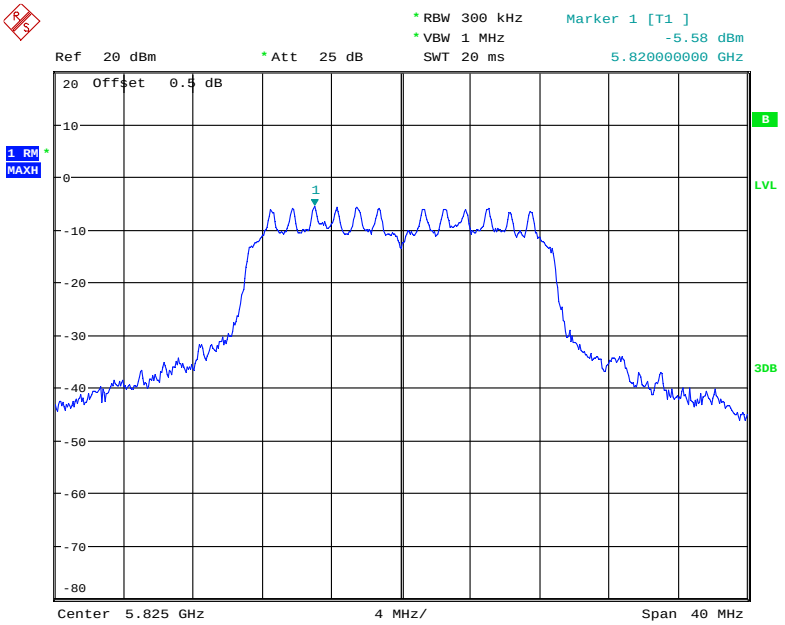

Date: 2.JUN.2020 10:18:51

802.11n ht40 Low Channel

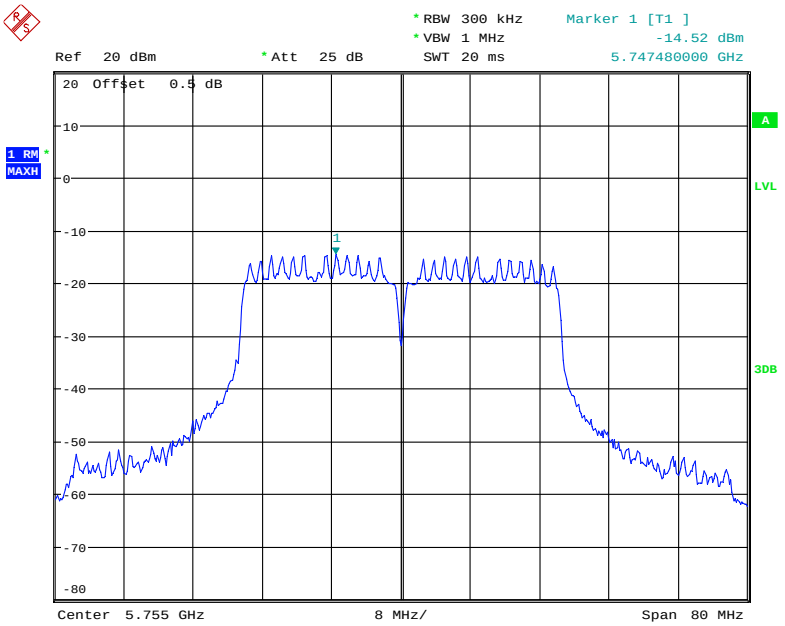

Date: 2.JUN.2020 10:29:41

802.11n ht40 High Channel

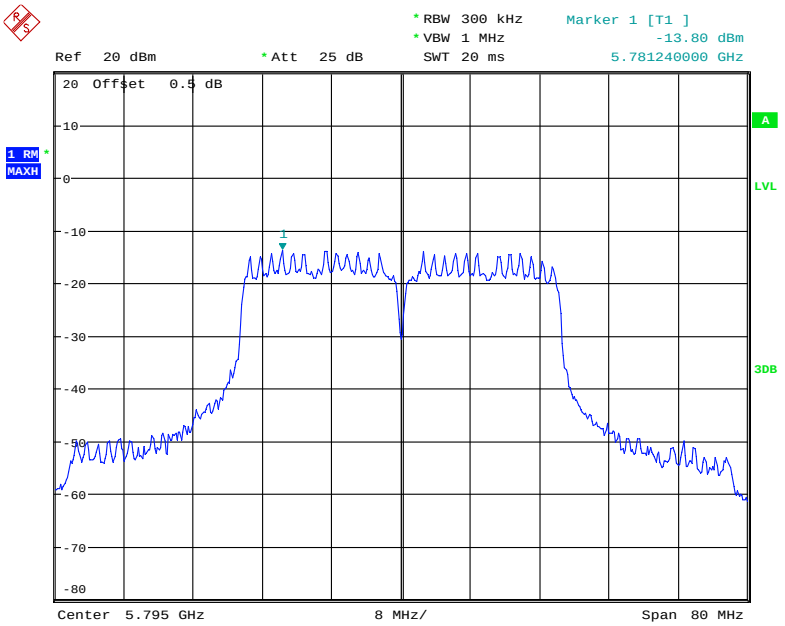

Date: 2.JUN.2020 10:30:37

Chain 1:

802.11a Low Channel

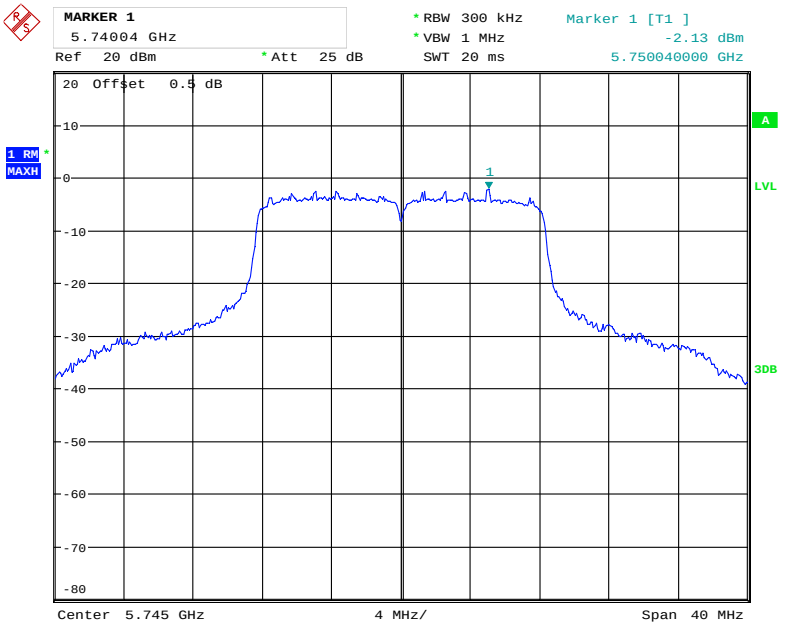

Date: 2.JUN.2020 10:36:28

802.11a Middle Channel

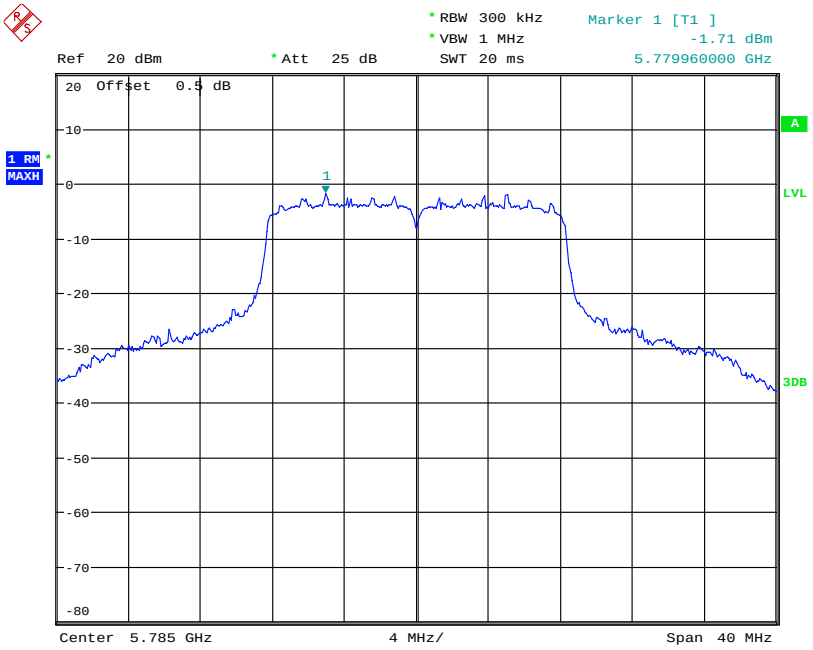

Date: 2.JUN.2020 10:37:11

802.11a High Channel

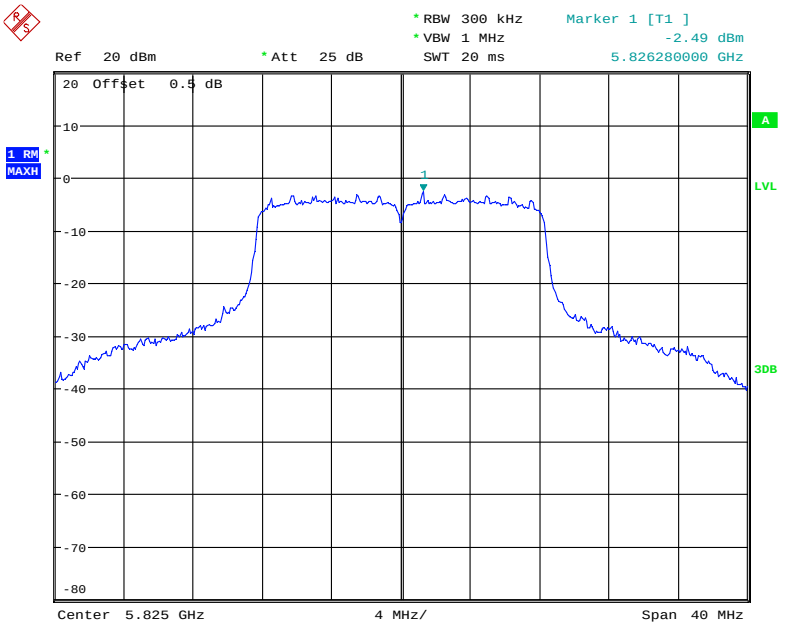

Date: 2.JUN.2020 10:37:36

802.11n ht20 Low Channel

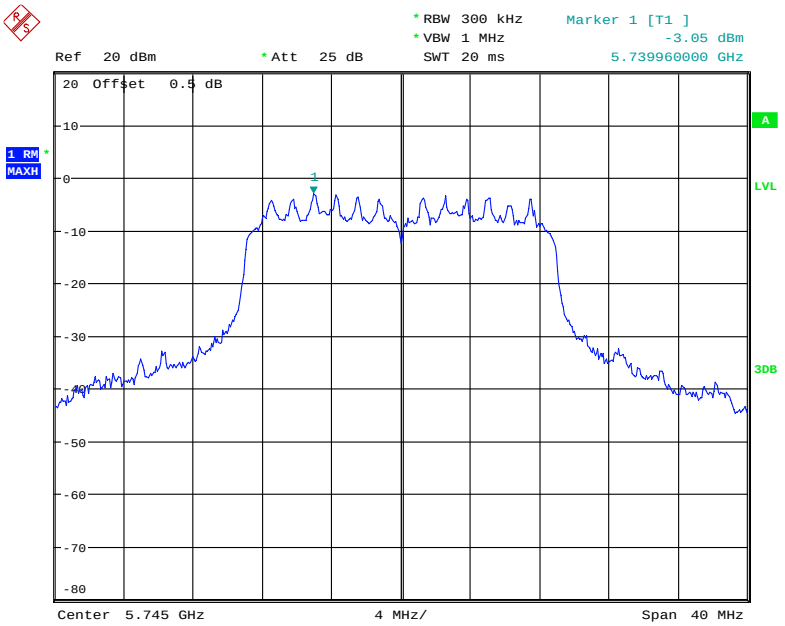

Date: 2.JUN.2020 10:32:47

802.11n ht20 Middle Channel

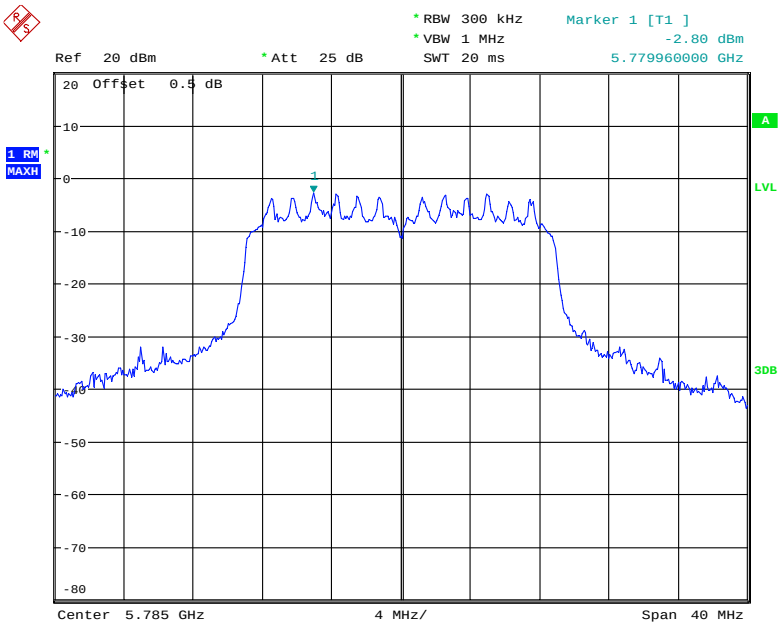

Date: 2.JUN.2020 10:33:40

802.11n ht20 High Channel

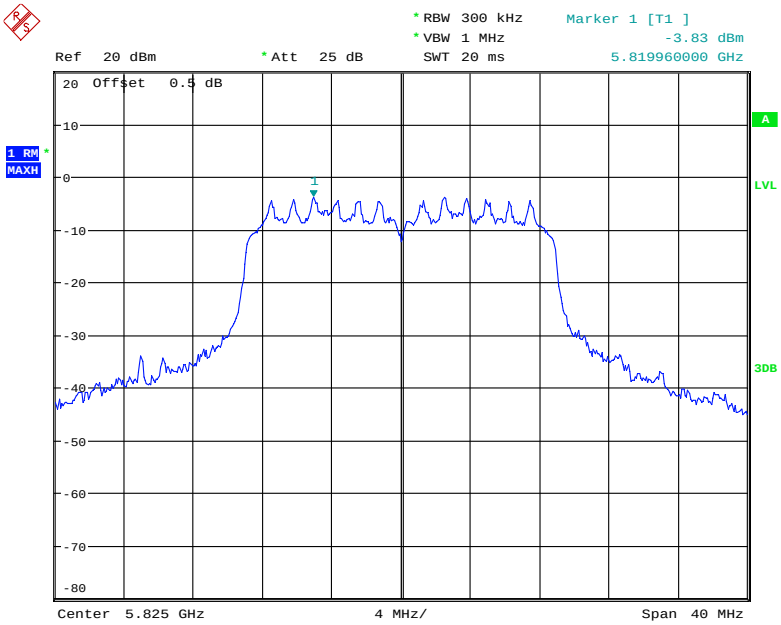

Date: 2.JUN.2020 10:34:14

802.11n ht40 Low Channel

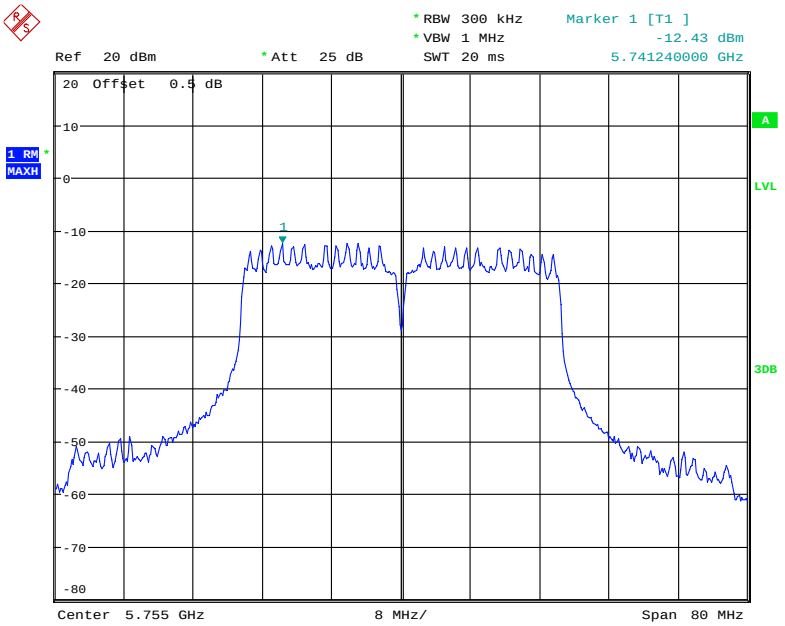

Date: 2.JUN.2020 10:32:07

802.11n ht40 High Channel

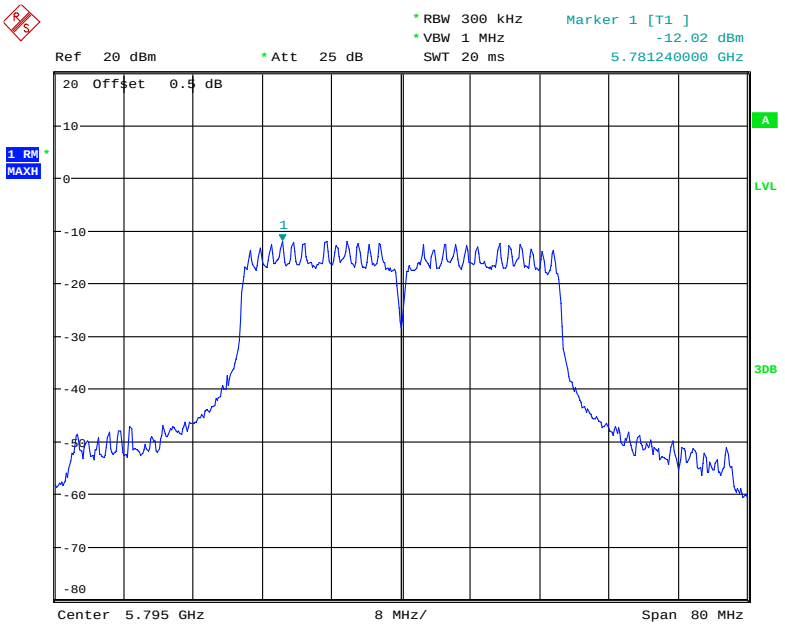

Date: 2.JUN.2020 10:31:27

******* END OF REPORT *******