


梓豪 揭杆

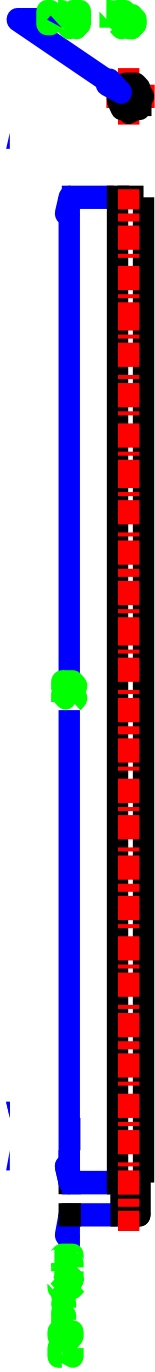

利達輝出了沙六有限公司

PART TITLE
錨玻璃備口

MATERIAL
閘口

UNITIN
等拿口

SCALE
掀瞰口

VER
喉磨口

錨玻璃備口

秦

口

機

口

Product Specification

A. Electrical Characteristics

Frequency 2400MHz ~2500MHz

VSWR <3.0

Efficiency >30%

Impedance 50 Ohm

Polarization Line

Gain 0DBi

B. Material & Mechanical Characteristics

Material of Radiator Cu

Cable Type 1.0 19P 白色

Connector Type : NO

Dimension

C. Environmental

Operation Temperature - 30 °C ~ + 80 °C

Storage Temperature - 30 °C ~ + 85 °C

Test Equipment & Conditions

1. Network Analyzers :




Agilent 8753D 5071B

2. Communications Test Set:

Agilent E5515C

3. 3D Chamber Test System

Efficiency & Gain

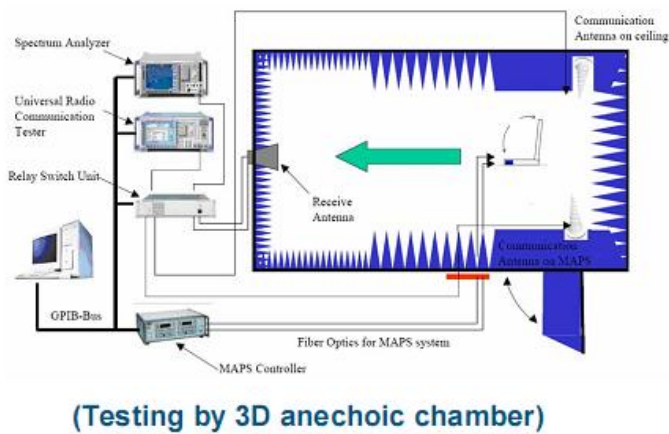

Efficiency & Gain

2.40 -0.00

2.440 -0.11

2.48 -0.13

Radiation Pattern:

