



Registration  
No.788871

---

# TEST REPORT FOR BLUETOOTH TESTING

---

Report No: SRTC2017-9004(F)-17083001(D)

Product Name: Joy Album

Product Model: K13

Applicant: Joy Home, Inc.

Manufacturer: Joy Home, Inc.

Specification: FCC Part 15, Subpart C (2017)

RSS-247 (February,2017 edition)

FCC ID: 2AMPA-GC125542

IC ID: 23004-GC125542

The State Radio\_monitoring\_center Testing Center (SRTC)

15th Building, No.30, Shixing Street, Shijingshan District,

Beijing, P.R.China

Tel: 86-10-57996183    Fax: 86-10-57996388

## CONTENTS

|                                                               |           |
|---------------------------------------------------------------|-----------|
| <b>1. GENERAL INFORMATION.....</b>                            | <b>2</b>  |
| 1.1 NOTES OF THE TEST REPORT .....                            | 2         |
| 1.2 INFORMATION ABOUT THE TESTING LABORATORY .....            | 2         |
| 1.3 APPLICANT'S DETAILS .....                                 | 2         |
| 1.4 MANUFACTURER'S DETAILS .....                              | 2         |
| 1.5 TEST ENVIRONMENT .....                                    | 3         |
| <b>2 DESCRIPTION OF THE DEVICE UNDER TEST.....</b>            | <b>4</b>  |
| 2.1 FINAL EQUIPMENT BUILD STATUS .....                        | 4         |
| 2.2 DESCRIPTION OF TEST MODES .....                           | 5         |
| 2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL ..... | 5         |
| 2.3 DUTY CYCLE OF TEST SIGNAL.....                            | 7         |
| 2.4 EUT OPERATING CONDITIONS .....                            | 7         |
| 2.5 SUPPORT EQUIPMENT.....                                    | 7         |
| <b>3 REFERENCE SPECIFICATION .....</b>                        | <b>8</b>  |
| <b>4 KEY TO NOTES AND RESULT CODES.....</b>                   | <b>9</b>  |
| <b>5 RESULT SUMMARY .....</b>                                 | <b>10</b> |
| <b>6 TEST RESULT .....</b>                                    | <b>11</b> |
| 6.1 OCCUPIED BANDWIDTH.....                                   | 11        |
| 6.2 CHANNEL SEPARATION.....                                   | 12        |
| 6.3 PEAK POWER OUTPUT.....                                    | 13        |
| 6.4 DWELL TIME .....                                          | 14        |
| 6.5 NUMBER OF HOPPING FREQUENCIES.....                        | 15        |
| 6.6 CONDUCTED OUT OF BAND EMISSION MEASUREMENT .....          | 16        |
| 6.7 BAND-EDGE MEASUREMENT .....                               | 17        |
| 6.8 SPURIOUS RADIATED EMISSIONS.....                          | 18        |
| 6.8 AC POWER LINE CONDUCTED EMISSION .....                    | 20        |
| <b>7 MEASUREMENT UNCERTAINTIES .....</b>                      | <b>21</b> |
| <b>8 TEST EQUIPMENTS .....</b>                                | <b>22</b> |
| <b>APPENDIX A – TEST DATA OF CONDUCTED EMISSION .....</b>     | <b>24</b> |
| <b>APPENDIX B – TEST DATA OF RADIATED EMISSION .....</b>      | <b>50</b> |
| <b>APPENDIX C – TEST SETUP .....</b>                          | <b>69</b> |

## **1. GENERAL INFORMATION**

### **1.1 Notes of the test report**

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio\_monitoring\_center Testing Center (SRTC).

The test results relate only to individual items of the samples which have been tested.

### **1.2 Information about the testing laboratory**

|                    |                                                                      |
|--------------------|----------------------------------------------------------------------|
| Company:           | The State Radio_monitoring_center Testing Center (SRTC)              |
| Address:           | 15th Building, No.30 Shixing Street, Shijingshan District, P.R.China |
| City:              | Beijing                                                              |
| Country or Region: | P.R.China                                                            |
| Contacted person:  | Liu Jia                                                              |
| Tel:               | +86 10 57996183                                                      |
| Fax:               | +86 10 57996388                                                      |
| Email:             | liujiaf@srtc.org.cn                                                  |

### **1.3 Applicant's details**

|                    |                                         |
|--------------------|-----------------------------------------|
| Company:           | Joy Home, Inc.                          |
| Address:           | 1788 Sutter St. #312, San Francisco,USA |
| City:              | San Francisco                           |
| Country or Region: | USA                                     |
| Grantee Code:      | 2AMPA                                   |
| Contacted person:  | Alan Chan                               |
| Tel:               | 646.784.1430                            |
| Fax:               | ---                                     |
| Email:             | Alan@joy.co                             |

### **1.4 Manufacturer's details**

|                    |                                         |
|--------------------|-----------------------------------------|
| Company:           | Joy Home, Inc.                          |
| Address:           | 1788 Sutter St. #312, San Francisco,USA |
| City:              | San Francisco                           |
| Country or Region: | USA                                     |
| Contacted person:  | Alan Chan                               |
| Tel:               | 646.784.1430                            |
| Fax:               | ---                                     |
| Email:             | Alan@joy.co                             |

## 1.5 Test Environment

|                                         |            |
|-----------------------------------------|------------|
| Date of Receipt of test sample at SRTC: | 2017-09-05 |
| Testing Start Date:                     | 2017-09-05 |
| Testing End Date:                       | 2017-09-30 |

| Environmental Data: | Temperature (°C) | Humidity (%) |
|---------------------|------------------|--------------|
| Ambient             | 25               | 38           |
| Maximum Extreme     | 45               | ---          |
| Minimum Extreme     | 0                | ---          |

|                                          |      |
|------------------------------------------|------|
| Normal Supply Voltage (V d.c.):          | 3.80 |
| Maximum Extreme Supply Voltage (V d.c.): | 4.20 |
| Minimum Extreme Supply Voltage (V d.c.): | 3.50 |

## **2 DESCRIPTION OF THE DEVICE UNDER TEST**

### **2.1 Final Equipment Build Status**

|                            |                            |
|----------------------------|----------------------------|
| Frequency Range            | 2.402GHz~2.480GHz          |
| Number of Channel          | 79                         |
| Modulation Type            | GFSK, $\pi/4$ DQPSK, 8DPSK |
| Duplex Mode                | TDD                        |
| Channel Spacing            | 1MHz                       |
| Data Rate                  | 1Mbps, 2 Mbps, 3 Mbps      |
| Power Supply               | Battery or Charger         |
| Rated Power Supply Voltage | 3.8V                       |
| HW Version                 | 5A                         |
| SW Version                 | V1.0                       |
| Serial Number:             | JT1-E1-061                 |
| Antenna type               | Refer to Note              |
| Antenna connector          | Refer to Note              |

#### **Note:**

**The antenna provide to the EUT, please refer to the following table:**

| Brand                         | Model            | Antenna gain | Frequency range(GHz) | Antenna type               | Connecter Type |
|-------------------------------|------------------|--------------|----------------------|----------------------------|----------------|
| Walsin Technology Corporation | RFECA321 6060L1T | 0.46dBi      | 2.402GHz~2.480GHz    | Multilayer ceramic antenna | fixed          |

## 2.2 Description of Test Modes

79 channels are provided to this EUT:

| CHANNEL | FREQ. (MHz) | CHANNEL | FREQ. (MHz) | CHANNEL | FREQ. (MHz) | CHANNEL | FREQ. (MHz) | CHANNEL | FREQ. (MHz) |
|---------|-------------|---------|-------------|---------|-------------|---------|-------------|---------|-------------|
| 0       | 2402        | 16      | 2418        | 32      | 2434        | 48      | 2450        | 64      | 2466        |
| 1       | 2403        | 17      | 2419        | 33      | 2435        | 49      | 2451        | 65      | 2467        |
| 2       | 2404        | 18      | 2420        | 34      | 2436        | 50      | 2452        | 66      | 2468        |
| 3       | 2405        | 19      | 2421        | 35      | 2437        | 51      | 2453        | 67      | 2469        |
| 4       | 2406        | 20      | 2422        | 36      | 2438        | 52      | 2454        | 68      | 2470        |
| 5       | 2407        | 21      | 2423        | 37      | 2439        | 53      | 2455        | 69      | 2471        |
| 6       | 2408        | 22      | 2424        | 38      | 2440        | 54      | 2456        | 70      | 2472        |
| 7       | 2409        | 23      | 2425        | 39      | 2441        | 55      | 2457        | 71      | 2473        |
| 8       | 2410        | 24      | 2426        | 40      | 2442        | 56      | 2458        | 72      | 2474        |
| 9       | 2411        | 25      | 2427        | 41      | 2443        | 57      | 2459        | 73      | 2475        |
| 10      | 2412        | 26      | 2428        | 42      | 2444        | 58      | 2460        | 74      | 2476        |
| 11      | 2413        | 27      | 2429        | 43      | 2445        | 59      | 2461        | 75      | 2477        |
| 12      | 2414        | 28      | 2430        | 44      | 2446        | 60      | 2462        | 76      | 2478        |
| 13      | 2415        | 29      | 2431        | 45      | 2447        | 61      | 2463        | 77      | 2479        |
| 14      | 2416        | 30      | 2432        | 46      | 2448        | 62      | 2464        | 78      | 2480        |
| 15      | 2417        | 31      | 2433        | 47      | 2449        | 63      | 2465        |         |             |

### 2.2.1 Test Mode Applicability and Tested Channel Detail

| EUT CONFIGURE MODE | APPLICABLE TO |       |     |      | DESCRIPTION |
|--------------------|---------------|-------|-----|------|-------------|
|                    | RE ≥ 1G       | RE<1G | PLC | APCM | -           |
| -                  | √             | √     | √   | √    | -           |

Where **RE** ☐ **1G**: Radiated Emission above 1GHz

**RE<1G**: Radiated Emission below 1GHz

**PLC**: Power Line Conducted Emission

**APCM**: Antenna Port Conducted Measurement

#### Radiated Emission Test (Above 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TYPE            | DATA RATE (Mbps)      |
|-------------------|----------------|----------------------------|-----------------------|
| 0 to 78           | 0, 39, 78      | GFSK, $\pi$ /4DQPSK, 8DPSK | 1Mbps, 2 Mbps, 3 Mbps |

#### Radiated Emission Test (Below 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TYPE            | DATA RATE (Mbps)      |
|-------------------|----------------|----------------------------|-----------------------|
| 0 to 78           | 0, 39, 78      | GFSK, $\pi/4$ DQPSK, 8DPSK | 1Mbps, 2 Mbps, 3 Mbps |

#### Power Line Conducted Emission Test:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TYPE            | DATA RATE (Mbps)      |
|-------------------|----------------|----------------------------|-----------------------|
| 0 to 78           | 0, 39, 78      | GFSK, $\pi/4$ DQPSK, 8DPSK | 1Mbps, 2 Mbps, 3 Mbps |

#### Antenna Port Conducted Measurement:

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TYPE            | DATA RATE (Mbps)      |
|-------------------|----------------|----------------------------|-----------------------|
| 0 to 78           | 0, 39, 78      | GFSK, $\pi/4$ DQPSK, 8DPSK | 1Mbps, 2 Mbps, 3 Mbps |

## 2.3 Duty Cycle of Test Signal

Duty cycle of test signal is < 98 %, duty factor shall be considered.

Duty cycle =  $0.373 \text{ ms} / 1.247 \text{ ms} = 0.299 * 100 \% = 29.9\%$

Correction factor =  $10 * \log (1/\text{duty cycle}) = 10 * \log (1/0.299) = 5.24 \text{ dB}$

## 2.4 EUT Operating conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually. EUT work with a fully -charged battery.

## 2.5 Support Equipment

The following support equipment was used to exercise the DUT during testing:

|               |                                             |
|---------------|---------------------------------------------|
| Equipment     | Charger                                     |
| Manufacturer  | Inventec Appliances (Jiangning) Corporation |
| Model Number  | S13                                         |
| Serial Number | ---                                         |

|               |                                     |
|---------------|-------------------------------------|
| Equipment     | Battery                             |
| Manufacturer  | DONGGUAN YONGWEI TECHNOLOGY CO.,LTD |
| Model Number  | K13                                 |
| Serial Number | ---                                 |

### **3 REFERENCE SPECIFICATION**




| Specification | Version       | Title                                                                                                                        |
|---------------|---------------|------------------------------------------------------------------------------------------------------------------------------|
| 15.35         | 2017          | Measurement detector functions and bandwidths.                                                                               |
| 15.209        | 2017          | Radiated emission limits; general requirements.                                                                              |
| 15.247        | 2017          | Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.                                                  |
| 15.203        | 2017          | Antenna requirement                                                                                                          |
| ANSI C63.10   | 2013          | Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices                                                 |
| RSS-247       | February,2017 | Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices |

## **4 KEY TO NOTES AND RESULT CODES**

| Code | Meaning                                                                                  |
|------|------------------------------------------------------------------------------------------|
| PASS | Test result shows that the requirements of the relevant specification have been met.     |
| FAIL | Test result shows that the requirements of the relevant specification have not been met. |
| N/T  | Test case is not tested.                                                                 |
| NTC  | Nominal voltage, Normal Temperature                                                      |
| HV   | High voltage, Normal Temperature                                                         |
| LV   | Low voltage, Normal Temperature                                                          |
| HTHV | high voltage, High Temperature                                                           |
| LTHV | High voltage, Low Temperature                                                            |
| HTLV | Low voltage, High Temperature                                                            |
| LTLV | Low voltage, Low Temperature                                                             |

## 5 RESULT SUMMARY

| No. | Test case                                  | Reference                           | Verdict                     |
|-----|--------------------------------------------|-------------------------------------|-----------------------------|
| 1   | Occupied Bandwidth                         | 15.247(a)(1) / RSS-247              | Pass                        |
| 2   | Channel Separation                         | 15.247(a)(1) / RSS-247              | Pass                        |
| 3   | Peak Power Output                          | 15.247(b)(1) / RSS-247              | Pass                        |
| 4   | Dwell Time                                 | 15.247(a)(1)(iii) / RSS-247         | Pass                        |
| 5   | Number of Hopping Frequencies              | 15.247(a)(1)(iii) / RSS-247         | Pass                        |
| 7   | Conducted out of band emission measurement | 15.247(d) / RSS-247                 | Pass                        |
| 8   | Band-edge                                  | 15.247(d) / RSS-247                 | Pass                        |
| 9   | Spurious Radiated Emissions                | 15.247(d)/15.35(b)/15.209 / RSS-247 | Pass                        |
| 10  | AC Power line Conducted Emission           | 15.207/ RSS-247                     | Pass                        |
| 11  | Antenna requirement                        | 15.203/ RSS-247                     | Pass (refer to section 2.1) |

|                                                                                                                                        |                                                                                                                    |
|----------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| This Test Report Is Issued by:<br>Mr. Peng Zhen<br> | Checked by:<br>Ms. Liu Jia<br> |
| Tested by:<br>Mr. He Dengshun<br>                   | Issued date:<br>20171016                                                                                           |

## **6 TEST RESULT**

### **6.1 Occupied Bandwidth**

#### **6.1.1 Ambient condition**

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 22°C        | 40%               | 101.5kPa |

#### **6.1.2 Test Description**

The bandwidth at 20dB down from the highest in-band spectral density is measured with a spectrum analyzer and Bluetooth test set via a power splitter with a known loss which connected to the transmitter antenna terminal of the EUT while the EUT is operating at maximum power and at the appropriate frequencies. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### **6.1.3 Test limit**


FCC Part15.247 (a)(1), RSS-247

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

#### **6.1.4 Test settings**

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 30dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.

#### **6.1.5 Test Setup**

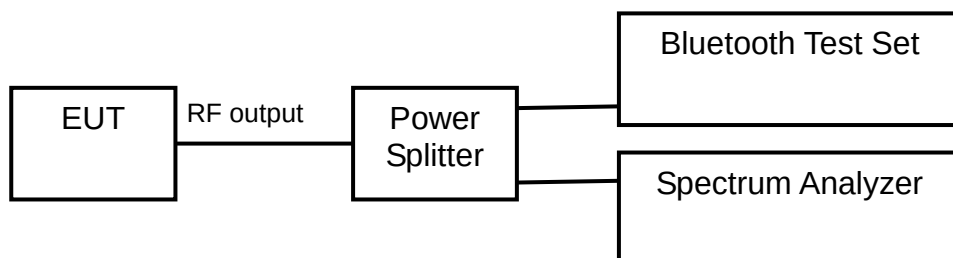

#### **6.1.6 Test result**

The test results are shown in Appendix A .

## 6.2 Channel Separation

### 6.2.1 Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 22°C        | 40%               | 101.5kPa |

### 6.2.2 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the channel separation measurements. The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss.

### 6.2.3 Test limit


FCC Part15.247 (a)(1) , RSS-247

Measurement is made with EUT operating in hopping mode. The minimum permissible channel separation for this system is 2/3 the value of the 20dB BW.

### 6.2.4 Test Settings

- a) Detector: Peak-Max hold
- b) Span: 3 MHz
- c) Centre Frequency: 2441 MHz
- d) Resolution Bandwidth (RBW): 30 kHz
- e) Video Bandwidth (VBW): 1 MHz
- f) Sweep Time: Coupled

### 6.2.5 Test Setup

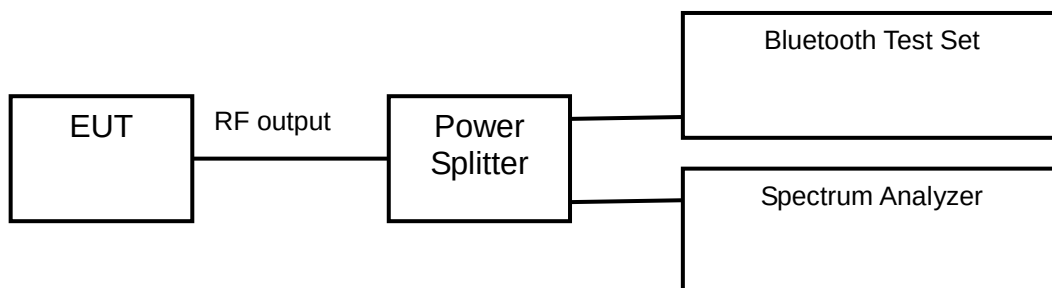

### 6.2.6 Test result

The test results are shown in Appendix A .

## 6.3 Peak Power Output

### 6.3.1 Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 22°C        | 40%               | 101.5kPa |

### 6.3.2 Test Description

Measurement is made while the EUT is operating in non-hopping transmission mode. The powers shown below were measured using a spectrum analyzer with a Bluetooth signaling test set used only to maintain a Bluetooth link with the EUT.

### 6.3.3 Test limit

FCC Part15.247(b)(1) , RSS-247:

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW) →

| Modulation type      | GFSK    | $\pi/4$ DQPSK | 8DPSK   |
|----------------------|---------|---------------|---------|
| Maximum Output Power | 30.0dBm | 30.0dBm       | 30.0dBm |

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.


Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW) →

| Modulation type      | GFSK    | $\pi/4$ DQPSK | 8DPSK   |
|----------------------|---------|---------------|---------|
| Maximum Output Power | 21.0dBm | 21.0dBm       | 21.0dBm |

### 6.3.4 Test Settings

| Hopping Mode | Modulation type | RBW  | VBW  | Span | Sweep time |
|--------------|-----------------|------|------|------|------------|
| Hopping OFF  | GFSK            | 2MHz | 3MHz | 8MHz | 1ms        |
| Hopping OFF  | $\pi/4$ DQPSK   | 2MHz | 3MHz | 8MHz | 1ms        |
| Hopping OFF  | 8DPSK           | 2MHz | 3MHz | 8MHz | 1ms        |

### 6.3.5 Test Setup

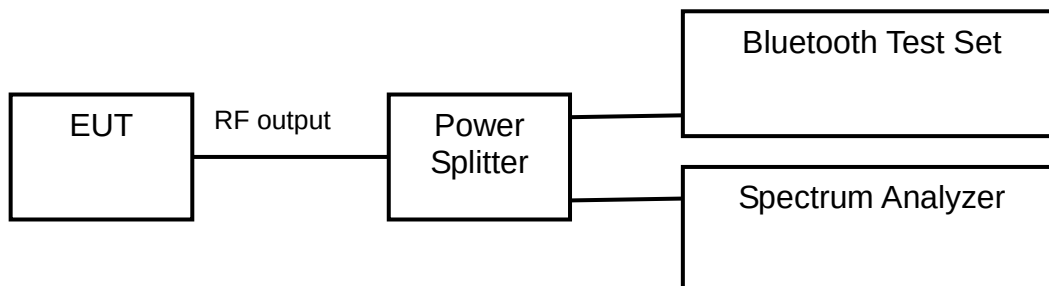

### 6.3.6 Test result

The test results are shown in Appendix A .

## 6.4 Dwell Time

### 6.4.1 Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 22°C        | 40%               | 101.5kPa |

### 6.4.2 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the dwell time measurements.

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss.

The time slot length is measured of three different packet types which are available in the Bluetooth technology. Those are DH1, DH3 and DH5 packets. The dwell time is calculated by:

Dwell time = time slot length \* hop rate \* 31.6/ number of hopping channels with:

- hop rate=1600/2 \* 1/s for DH1 packets =800
- hop rate=1600/4 \* 1/s for DH3 packets =400
- hop rate=1600/6 \* 1/s for DH5 packets =266.67
- number of hopping channels=79
- 31.6 s=0.4 seconds multiplied by the number of hopping channels=0.4s \* 79

### 6.4.3 Test limit

FCC Part15.247(a)(1)(iii) , RSS-247

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 6.4.4 Test Test Settings

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it

to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.


c. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.

d. Measure the time duration of one transmission on the measured frequency.

And then plot the result with time difference of this time duration.

e. Repeat above procedures until all different time-slot modes have been completed.

#### 6.4.5 Test Setup

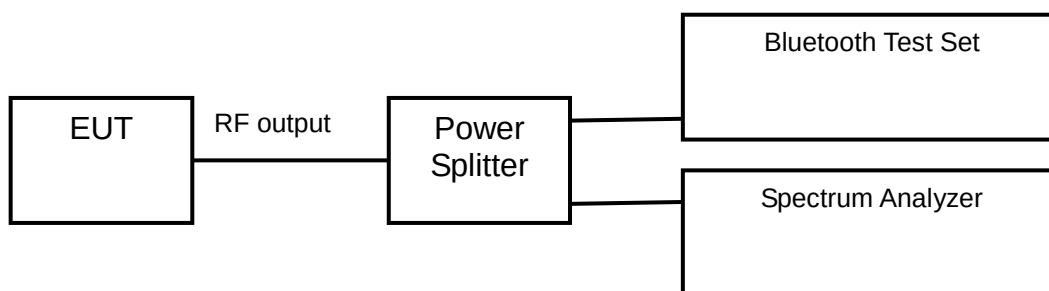

#### 6.4.6 Test result

The test results are shown in Appendix A .

### 6.5 Number of Hopping Frequencies

#### 6.5.1 Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 22°C        | 40%               | 101.5kPa |

#### 6.5.2 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the number of hopping frequencies measurement. The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss.

#### 6.5.3 Test limit


FCC Part15.247(a)(1)(iii) , RSS-247

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

#### 6.5.4 Test Settings

- Detector: Peak-Maxhold
- Start frequency: 2400 MHz
- Stop frequency: 2483.5 MHz
- Resolution Bandwidth (RBW): 30 kHz
- Video Bandwidth (VBW): 1 MHz
- Sweep Time: Coupled

### 6.5.5 Test Setup

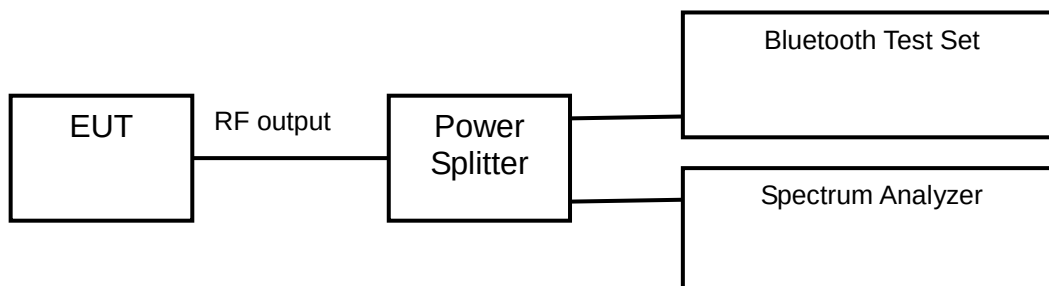

### 6.5.6 Test result

The test results are shown in Appendix A.

## 6.6 Conducted out of band emission measurement

### 6.6.1 Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 22°C        | 40%               | 101.5kPa |

### 6.6.2 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the spurious emissions measurements. The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss.

### 6.6.3 Test limit


FCC Part15.247(d) , RSS-247:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

### 6.6.4 Test Settings

- Set RBW = 100 kHz.
- Set VBW =300 kHz.
- Set span to encompass the spectrum to be examined
- Detector = peak.
- Trace Mode = max hold.
- Sweep = auto couple. Detector: Peak-Maxhold
- Frequency range: 30 ~25000 MHz

## 6.6.5 Test Setup

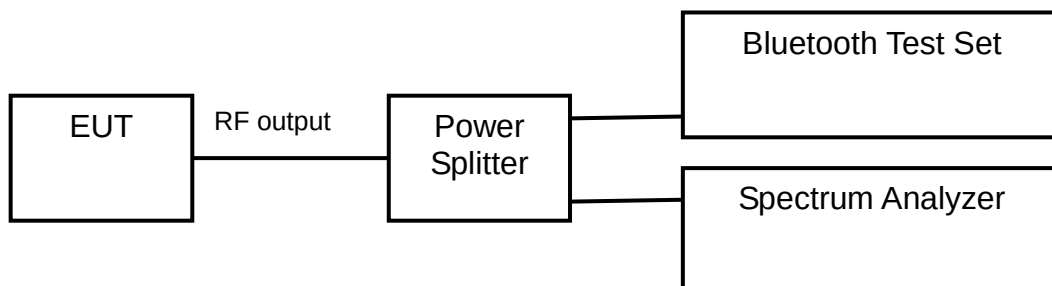

## 6.6.6 Test result

The test results are shown in Appendix A .

The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

## 6.7 Band-edge measurement

### 6.7.1 Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 22°C        | 40%               | 101.5kPa |

### 6.7.2 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the spurious emissions measurements. The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss.

### 6.7.3 Test limit


FCC Part15.247(d) , RSS-247:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

### 6.7.4 Test Settings

- h) Set RBW = 100 kHz.
- i) Set VBW =300 kHz.
- j) Set span to encompass the spectrum to be examined
- k) Detector = peak.
- l) Trace Mode = max hold.
- m) Sweep = auto couple. Detector: Peak-Maxhold
- n) Frequency range: 30 ~25000 MHz

## 6.7.5 Test Setup

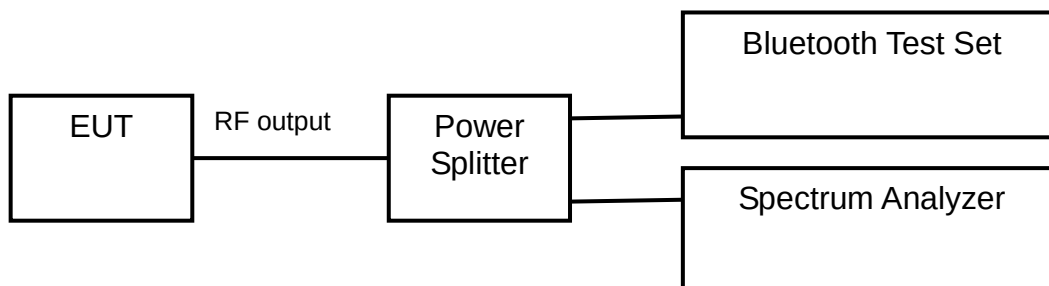

## 6.7.6 Test result

The test results are shown in Appendix A .

The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

## 6.8 Spurious Radiated Emissions

### 6.8.1 Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 20.8°C      | 36.5%             | 100.9kPa |

### 6.8.2 Test Description

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

### 6.8.3 Test limit

FCC Part15.247(d) , RSS-247:

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in below Table per Section 15.209.

| Frequency [MHz] | Field strength [ $\mu\text{V/m}$ ] | Measured Distance [meters] |
|-----------------|------------------------------------|----------------------------|
| 30~88           | 100                                | 3                          |
| 88~216          | 150                                | 3                          |
| 216~960         | 200                                | 3                          |
| Above 960       | 500                                | 3                          |

**Radiated Limits**

FCC Part15.35(b):

there is also a limit on the radio frequency emissions, as measured using

instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit

Used conversion factor:  $\text{Limit (dB}\mu\text{V/m)} = 20 \log (\text{Limit } (\mu\text{V/m})/1\mu\text{V/m})$

| Frequency of Emission(MHz)                                              | Limits     |                     |
|-------------------------------------------------------------------------|------------|---------------------|
|                                                                         | Detector   | Unit (dB $\mu$ V/m) |
| 30~88                                                                   | Quasi-peak | 40.0                |
| 88~216                                                                  | Quasi-peak | 43.5                |
| 216~960                                                                 | Quasi-peak | 46.0                |
| 960~1000                                                                | Quasi-peak | 54.0                |
| 1000~5th harmonic of the highest frequency or 40GHz, whichever is lower | Average    | 54.0                |
|                                                                         | Peak       | 74.0                |

#### Conversion Radiated limits

#### 6.7.4 Test Settings


The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration. During the test, the antenna height and EUT azimuth were varied in order to identify the maximum level of emission from the EUT. The height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

#### 6.7.5 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic

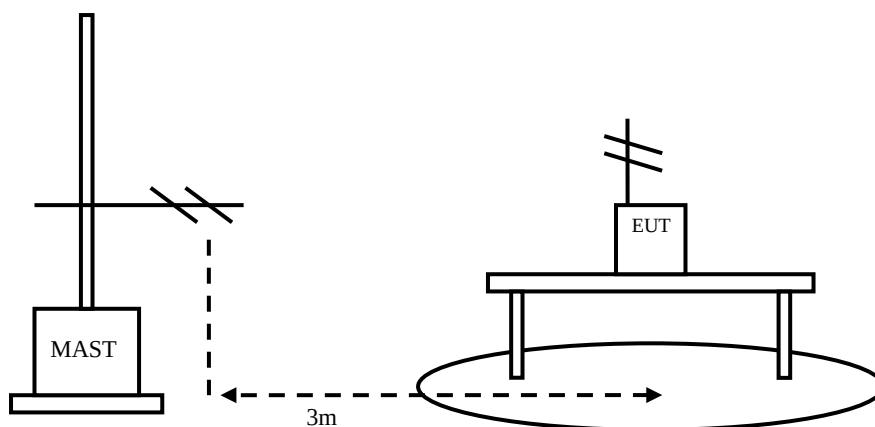

chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration. Then start the test software ES-K1. Sweep the whole frequency band through the range from 30MHz to 1GHz or above, using receive log period antenna HL562 or Ridge horn antenna HF906.

During the test, the antenna height and EUT azimuth were varied in order to identify the maximum

level of emission from the EUT. The height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees. The measurements shall be repeated with orthogonal polarization of the test antenna. The results shall be showed the worst case of the three orthogonal axes.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

### 6.7.6 Test result

The test results are shown in Appendix B.

## 6.8 AC Power line Conducted Emission

### 6.8.1 Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 20.8°C      | 36.5%             | 100.9kPa |

### 6.8.2 Test limit

FCC Part15.207, RSS-247

| Frequency of Emission (MHz) | Conducted Limit (dBuV) |            |
|-----------------------------|------------------------|------------|
| 0.15-0.5<br>0.5-5<br>5-30   | Quasi-peak             | Average    |
|                             | 66 to 56 *             | 56 to 46 * |
|                             | 56                     | 46         |
|                             | 60                     | 50         |

\* Decreases with the logarithm of the frequency.

The measurement is made according to ANSI C63.4-2014

### 6.8.3 Test result

The test results are shown in Appendix B .

## **7 MEASUREMENT UNCERTAINTIES**

| Items                | Uncertainty    |        |
|----------------------|----------------|--------|
| Occupied Bandwidth   | 3kHz           |        |
| Peak power output    | 0.67dB         |        |
| Band edge compliance | 1.20dB         |        |
| Spurious emissions   | 30MHz~1GHz     | 2.83dB |
|                      | 1GHz~12.75GHz  | 2.50dB |
|                      | 12.75GHz~25GHz | 2.75dB |

## **8 TEST EQUIPMENTS**

| No. | Name/ Model                                    | Manufacturer  | S/N        | Cal date   | Cal Due date |
|-----|------------------------------------------------|---------------|------------|------------|--------------|
| 1.  | Spectrum Analyzer FSV                          | ROHDE&SCHWARZ | 101065     | 2017.08.20 | 2018.08.19   |
| 2.  | Bluetooth Test Set<br>MT8852B                  | Anritsu       | 1142010    | 2017.03.01 | 2018.02.28   |
| 3.  | Cable 104EA                                    | SUCOFLEX      | 9272/4EA   | 2017.03.01 | 2018.02.28   |
| 4.  | Cable 104EA                                    | SUCOFLEX      | 9266/4EA   | 2017.03.01 | 2018.02.28   |
| 5.  | Power Splitter 11850C                          | Agilent       | 026057     | 2017.08.20 | 2018.08.19   |
| 6.  | 12.65m×8.03m×7.50m<br>Fully-Anechoic Chamber   | FRANKONIA     | -----      | -----      | -----        |
| 7.  | 23.18m×16.88m×9.60m<br>Semi-Anechoic Chamber   | FRANKONIA     | ---        | -----      | -----        |
| 8.  | Turn table Diameter:1m                         | HD            | -----      | -----      | -----        |
| 9.  | Turn table Diameter:5m                         | HD            | -----      | -----      | -----        |
| 10. | Antenna master<br>FAC(MA4.0)                   | MATURO        | -----      | -----      | -----        |
| 11. | Antenna master<br>SAC(MA4.0)                   | MATURO        | -----      | -----      | -----        |
| 12. | 9.080m×5.255m×3.525m<br>Shielding room         | FRANKONIA     | -----      | -----      | -----        |
| 13. | HF 906 Double-Ridged<br>Waveguide Horn Antenna | R&S           | 100030     | 2017.08.20 | 2018.08.19   |
| 14. | HF 906 Double-Ridged<br>Waveguide Horn Antenna | R&S           | 100029     | 2017.08.20 | 2018.08.19   |
| 15. | HL562 Ultra log antenna                        | R&S           | 100016     | 2017.08.20 | 2018.08.19   |
| 16. | 3160-09 Receive antenna                        | SCHWARZ-BECK  | 002058-002 | 2017.08.20 | 2018.08.19   |
| 17. | ESI 40 EMI test receiver                       | R&S           | 100015     | 2017.08.20 | 2018.08.19   |
| 18. | Radio tester                                   | CMU 200       | 114667     | 2017.08.20 | 2018.08.19   |
| 19. | ESCS30 EMI test receiver                       | R&S           | 100029     | 2017.08.20 | 2018.08.19   |
| 20. | HL562 Receive antenna                          | R&S           | 100167     | 2017.08.20 | 2018.08.19   |
| 21. | ESH3-Z5 LISN                                   | R&S           | 100020     | 2017.08.20 | 2018.08.19   |

---

## **APPENDIX A – TEST DATA OF CONDUCTED EMISSION**

Please refer to the attachment.

## **APPENDIX B – TEST DATA OF RADIATED EMISSION**

Please refer to the attachment.

## **APPENDIX C – TEST SETUP**

Please refer to the attachment.

## **APPENDIX A – TEST DATA OF CONDUCTED EMISSION**

### **Occupied Bandwidth**

Offset 10.5dB = Attenuator 10dB+ Temporary antenna connector loss 0.2dB+ Cable loss 0.3dB

Modulation type: GFSK


| Carrier frequency (MHz) | Channel No. | 20 dB bandwidth(kHz) |
|-------------------------|-------------|----------------------|
| 2402                    | 0           | 811.92               |
| 2441                    | 39          | 810.52               |
| 2480                    | 78          | 810.52               |

Modulation type:  $\pi/4$ DQPSK


| Carrier frequency (MHz) | Channel No. | 20 dB bandwidth(kHz) |
|-------------------------|-------------|----------------------|
| 2402                    | 0           | 1320.87              |
| 2441                    | 39          | 1320.47              |
| 2480                    | 78          | 1319.67              |

Modulation type: 8DPSK


| Carrier frequency (MHz) | Channel No. | 20 dB bandwidth(kHz) |
|-------------------------|-------------|----------------------|
| 2402                    | 0           | 1268.27              |
| 2441                    | 39          | 1268.67              |
| 2480                    | 78          | 1266.67              |

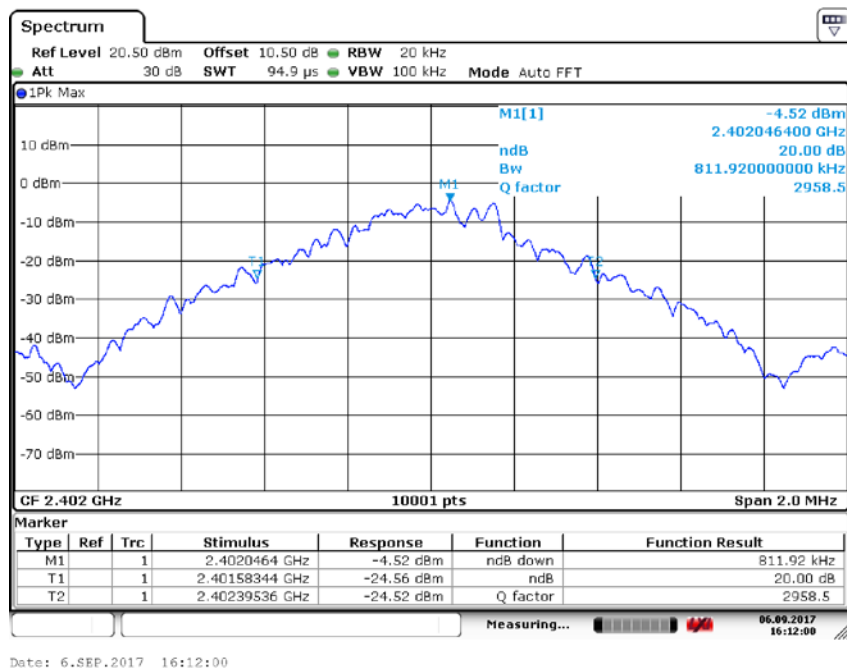


Carrier frequency (MHz): 2402  
Channel No.:0  
Modulation type: GFSK

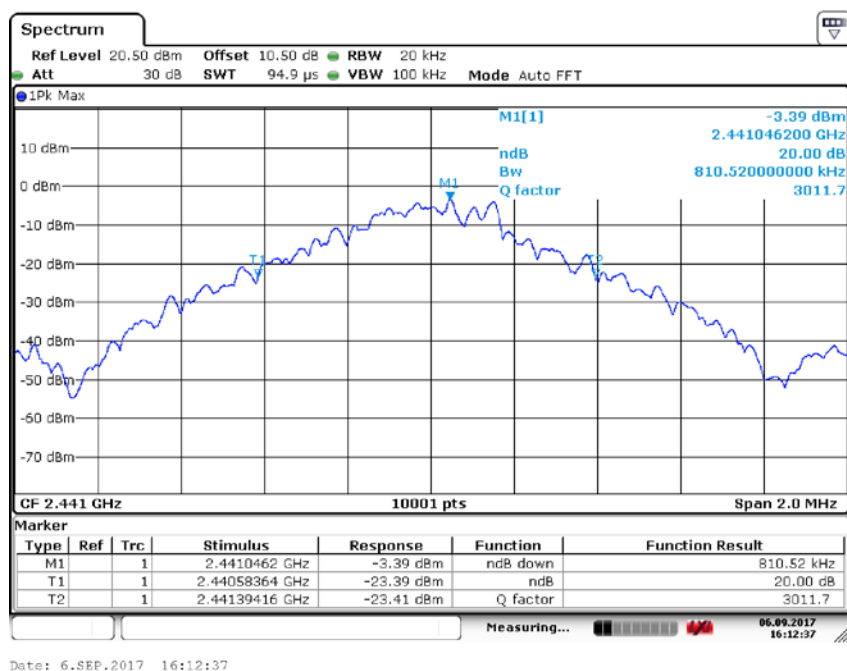


Carrier frequency (MHz): 2441  
Channel No.:39  
Modulation type: GFSK

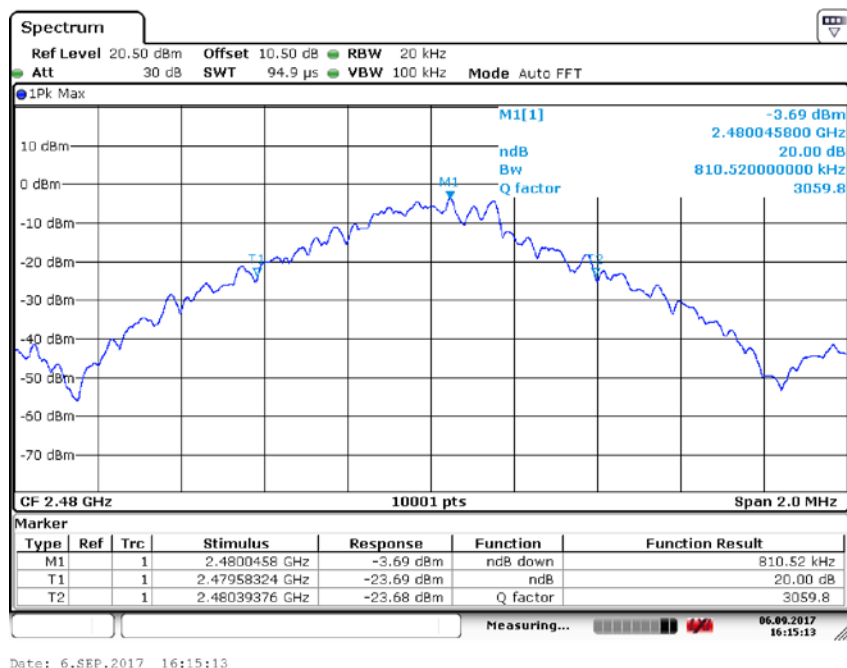

Carrier frequency (MHz): 2480  
Channel No.:78  
Modulation type: GFSK

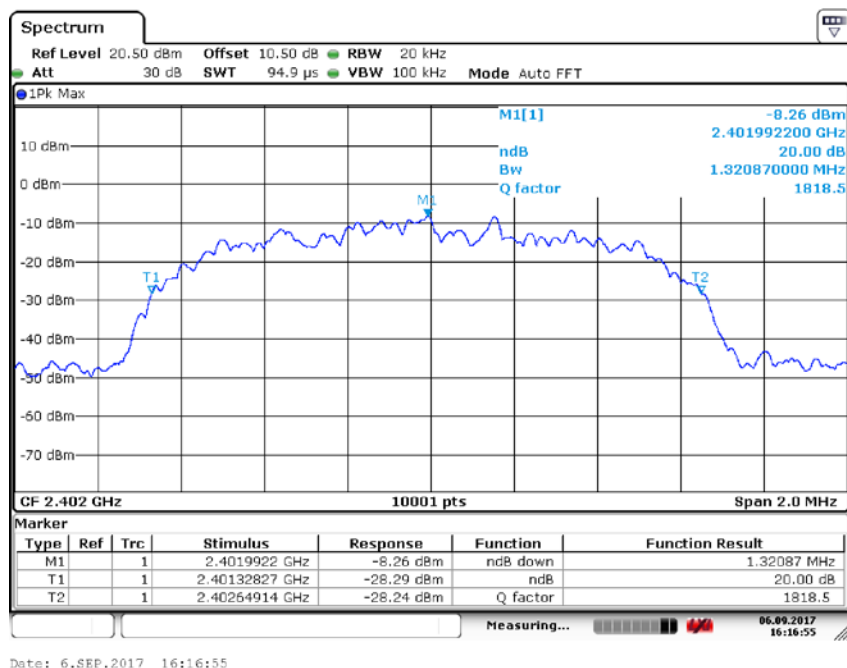


Carrier frequency (MHz): 2402  
Channel No.:0  
Modulation type:  $\pi/4$ DQPSK

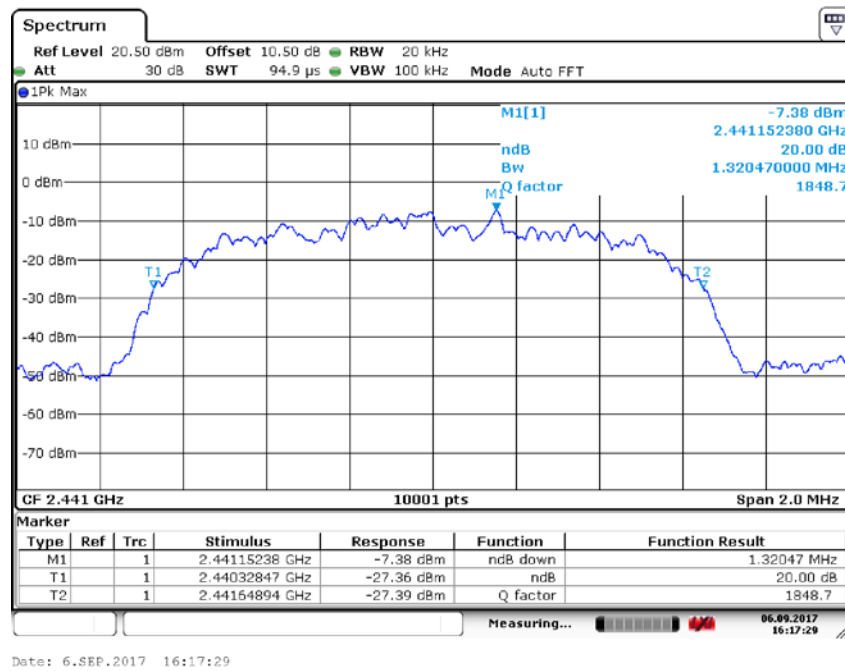

Carrier frequency (MHz): 2441

Channel No.:39


Modulation type:  $\pi/4$ DQPSK

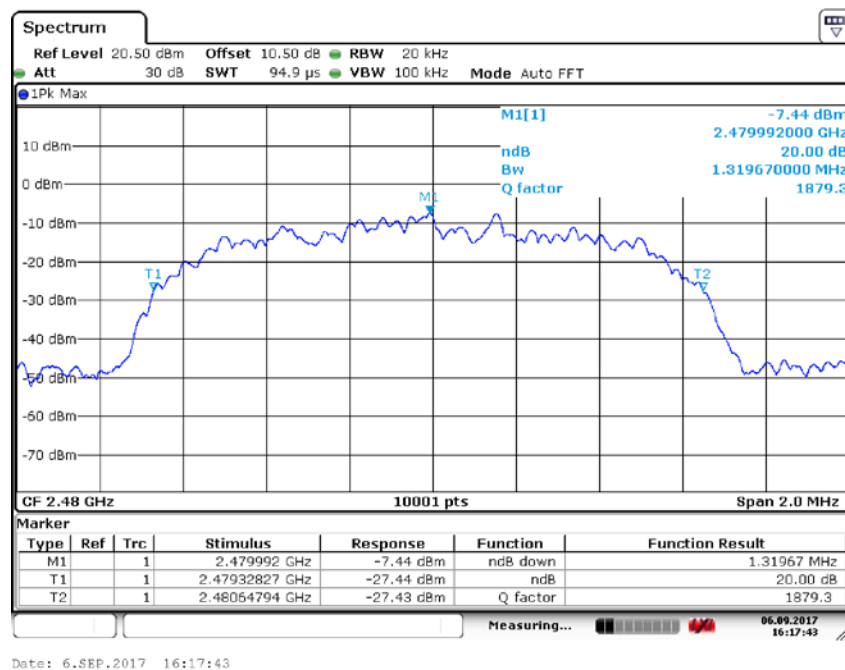


Carrier frequency (MHz): 2480

Channel No.:78


Modulation type:  $\pi/4$ DQPSK

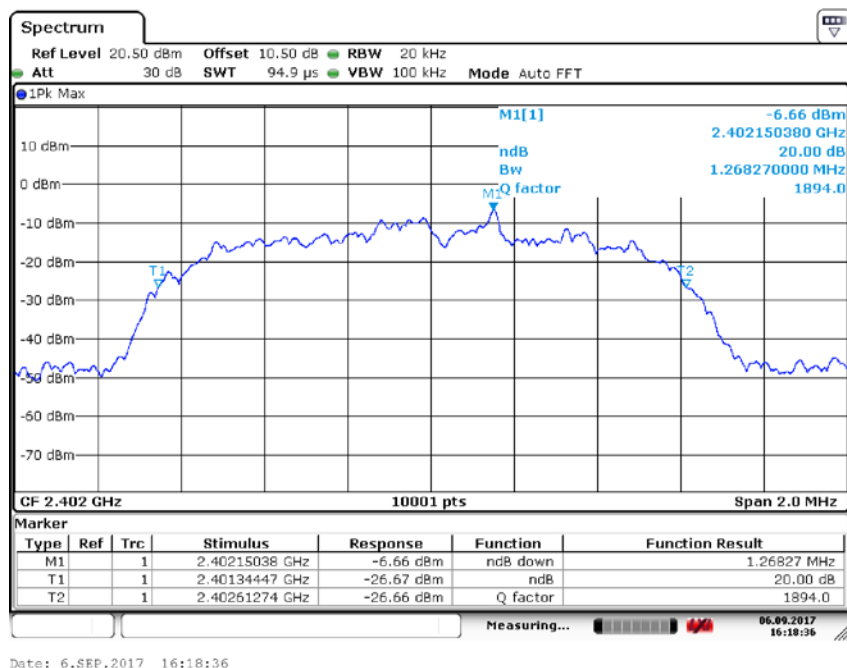

Carrier frequency (MHz): 2402  
Channel No.:0  
Modulation type: 8DPSK

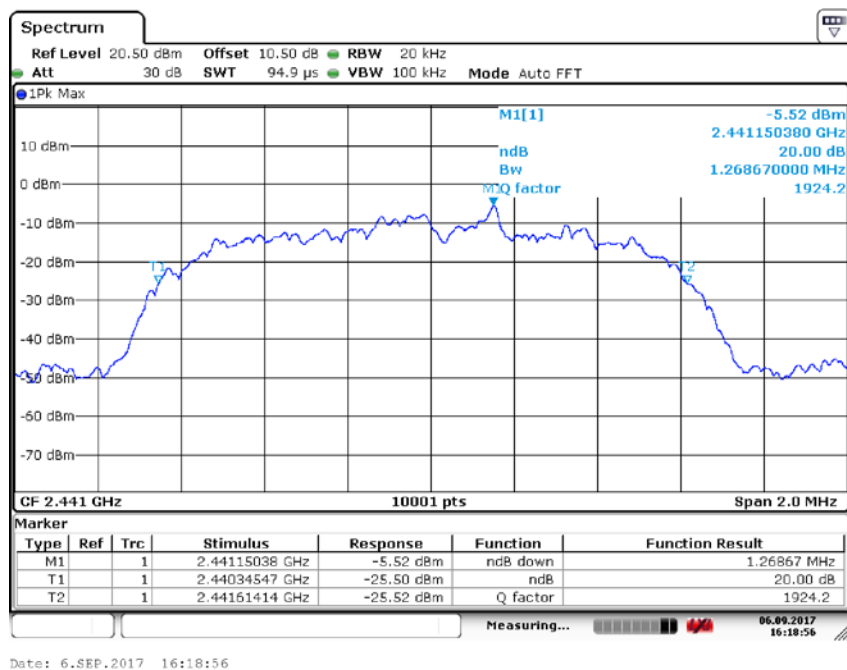

Carrier frequency (MHz): 2441  
Channel No.:39  
Modulation type: 8DPSK

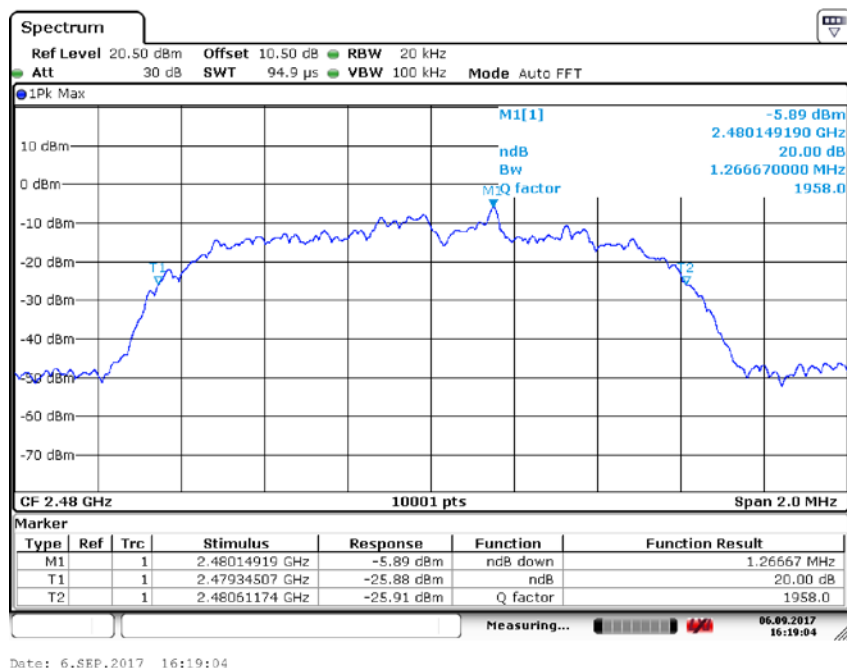


Date: 6.SEP.2017 16:19:04

Carrier frequency (MHz): 2480  
Channel No.:78  
Modulation type: 8DPSK

## Channel Separation

Offset 10.5dB = Attenuator 10dB+ Temporary antenna connector loss 0.2dB+ Cable loss 0.3dB

|              |                           |
|--------------|---------------------------|
| Op-mode      | Channel separation<br>MHz |
| Hopping mode | 1                         |

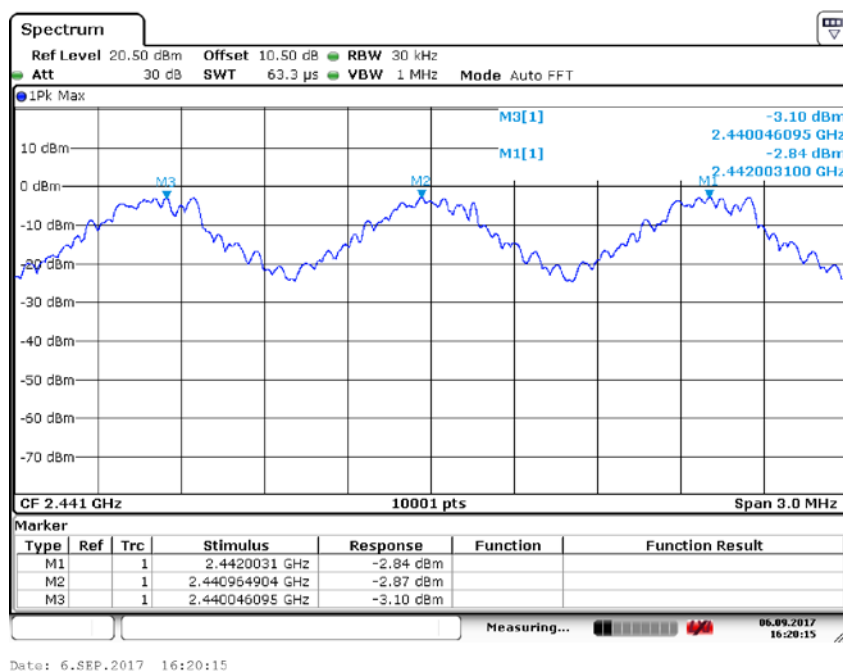


Op-mode: Hopping mode


## Peak Power Output

Offset 10.5dB = Attenuator 10dB+ Temporary antenna connector loss 0.2dB+ Cable loss 0.3dB


| Modulation type | Peak Power Output (dBm) |                   |                   |
|-----------------|-------------------------|-------------------|-------------------|
|                 | 2402MHz<br>(Ch0)        | 2441MHz<br>(Ch39) | 2480MHz<br>(Ch78) |
| GFSK            | -0.98                   | 0.14              | -0.11             |
| $\pi/4$ DQPSK   | -1.17                   | 0.17              | -0.48             |
| 8DPSK           | -0.67                   | 0.14              | -0.40             |

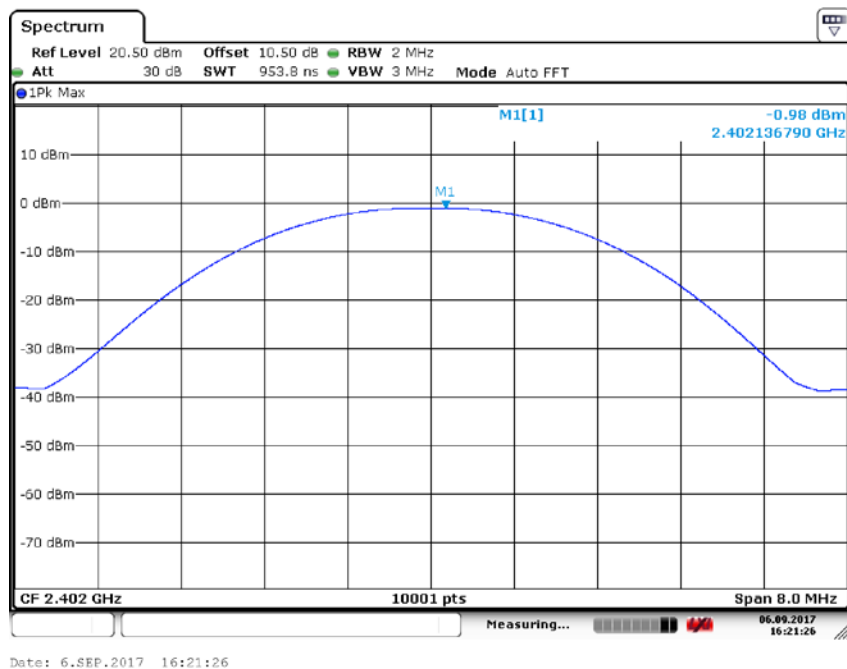


Carrier frequency (MHz): 2402  
Channel No.:0  
Modulation type: GFSK

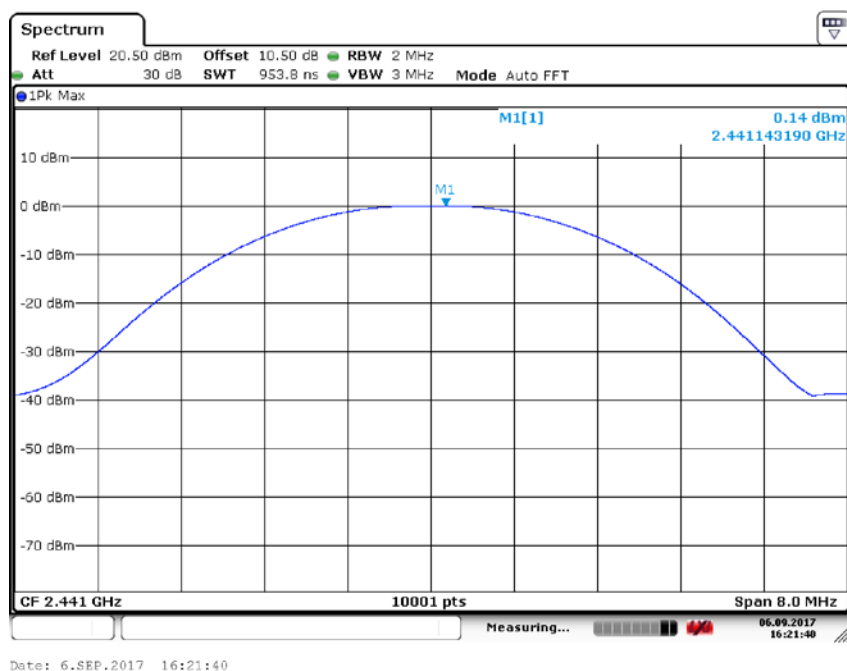


Carrier frequency (MHz): 2441  
Channel No.:39  
Modulation type: GFSK

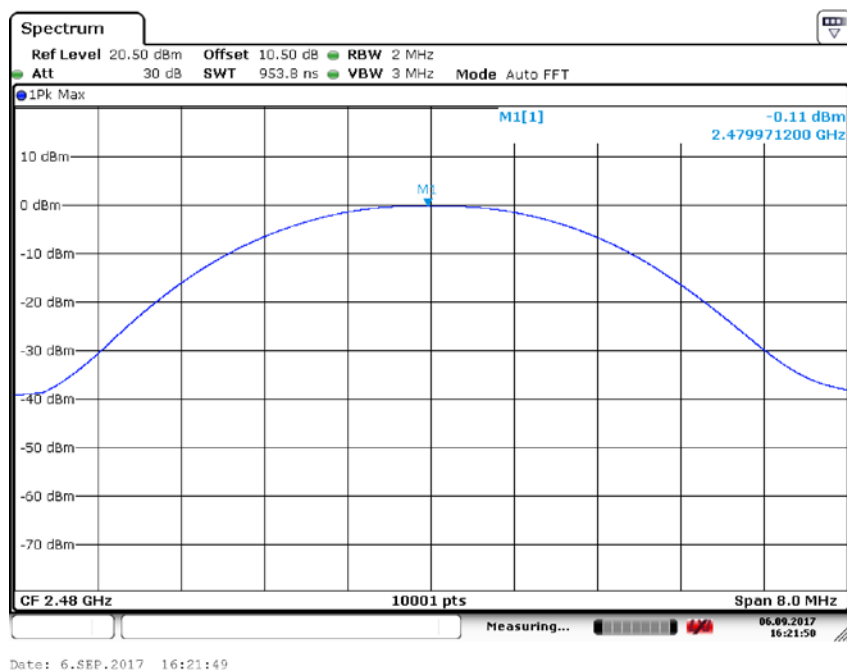


Carrier frequency (MHz): 2480  
Channel No.:78  
Modulation type: GFSK

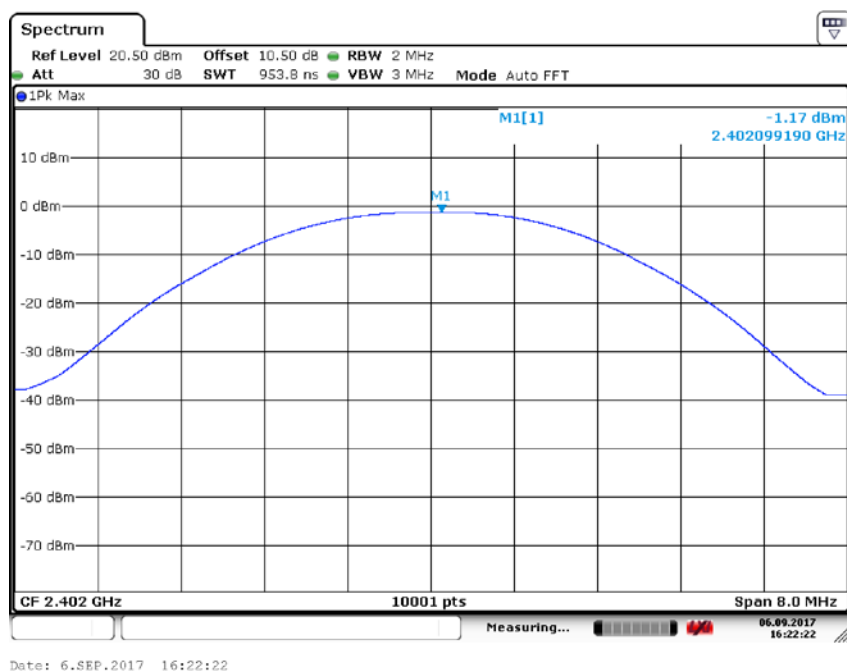


Carrier frequency (MHz): 2402  
Channel No.:0  
Modulation type:  $\pi/4$ DQPSK

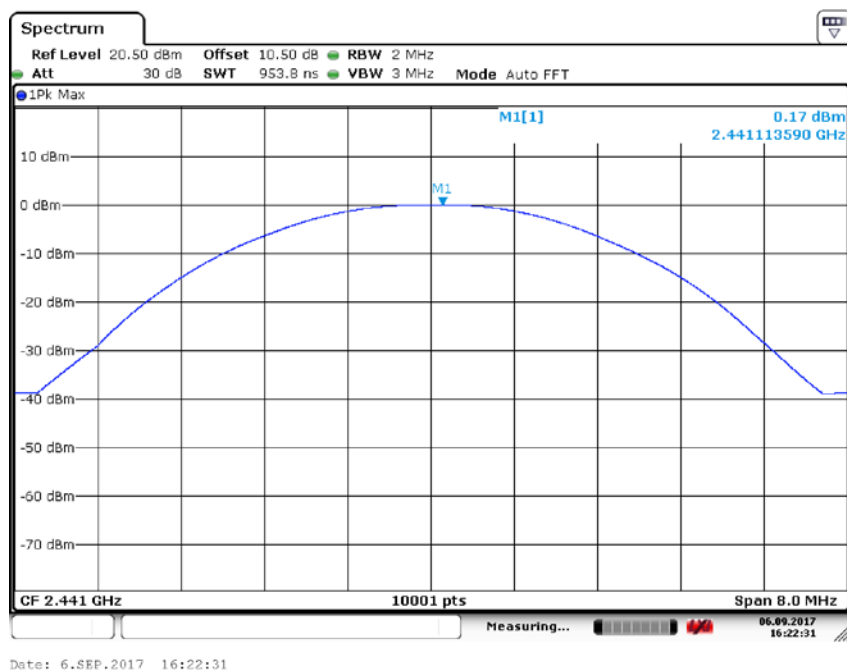


Carrier frequency (MHz): 2441  
Channel No.:39  
Modulation type:  $\pi/4$ DQPSK

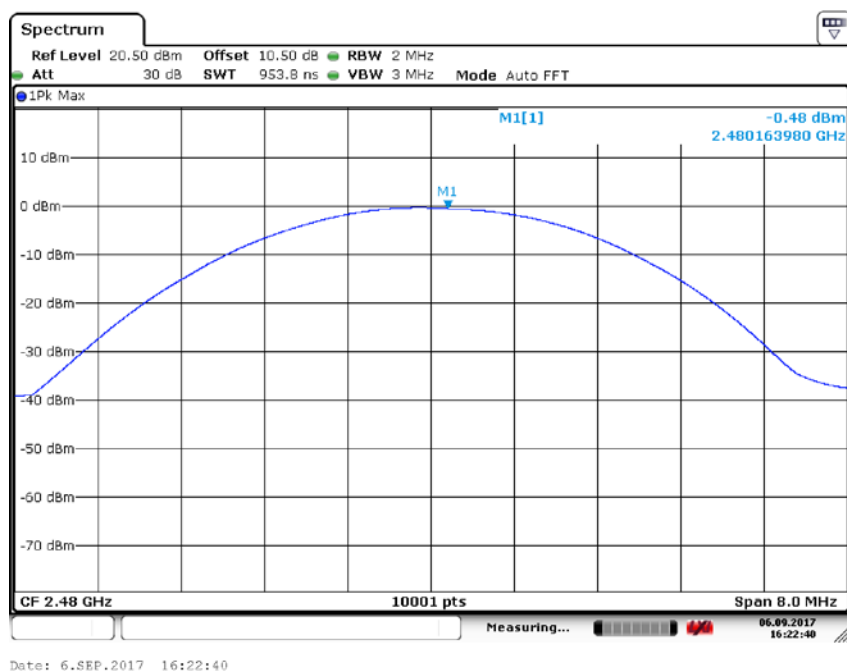


Carrier frequency (MHz): 2480  
Channel No.:78  
Modulation type:  $\pi/4$ DQPSK

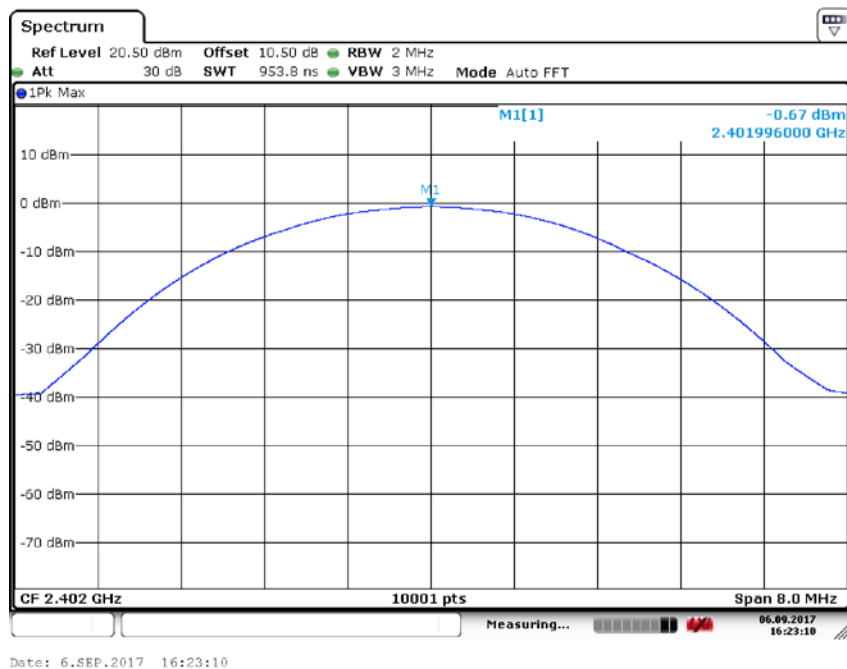

Carrier frequency (MHz): 2402  
Channel No.:0  
Modulation type: 8DPSK

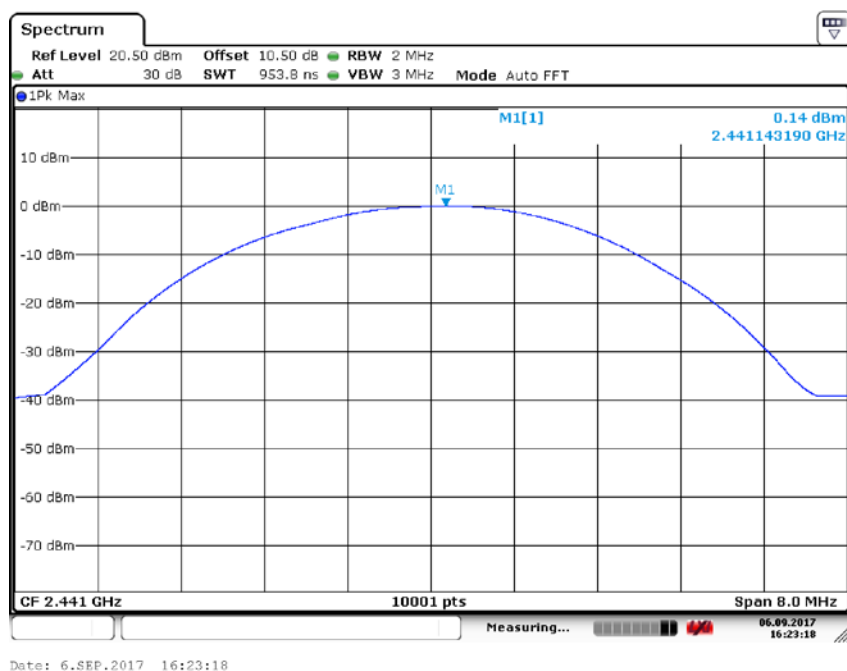

Carrier frequency (MHz): 2441  
Channel No.:39  
Modulation type: 8DPSK

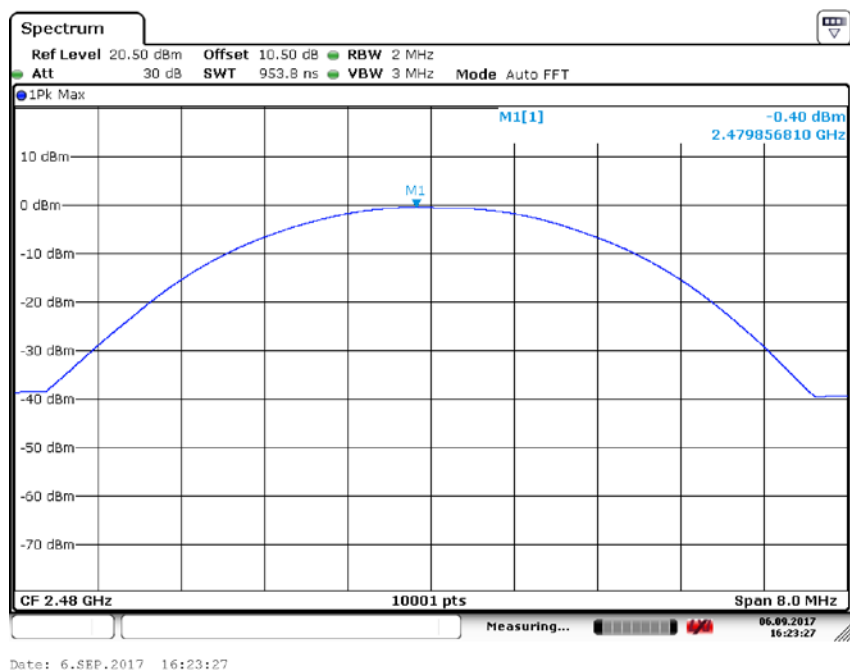


Carrier frequency (MHz): 2480  
Channel No.:78  
Modulation type: 8DPSK

## Dwell Time

Offset 10.5dB = Attenuator 10dB+ Temporary antenna connector loss 0.2dB+ Cable loss 0.3dB

Modulation type: GFSK


| Packet type | Time slot length<br>μs | Dwell time                             | Dwell time<br>ms |
|-------------|------------------------|----------------------------------------|------------------|
| DH1         | 371                    | time slot length *31.6<br>*1600/2 /79  | 118              |
| DH3         | 1631                   | time slot length * 31.6<br>*1600/4 /79 | 260              |
| DH5         | 2880                   | time slot length * 31.6<br>*1600/6 /79 | 307              |

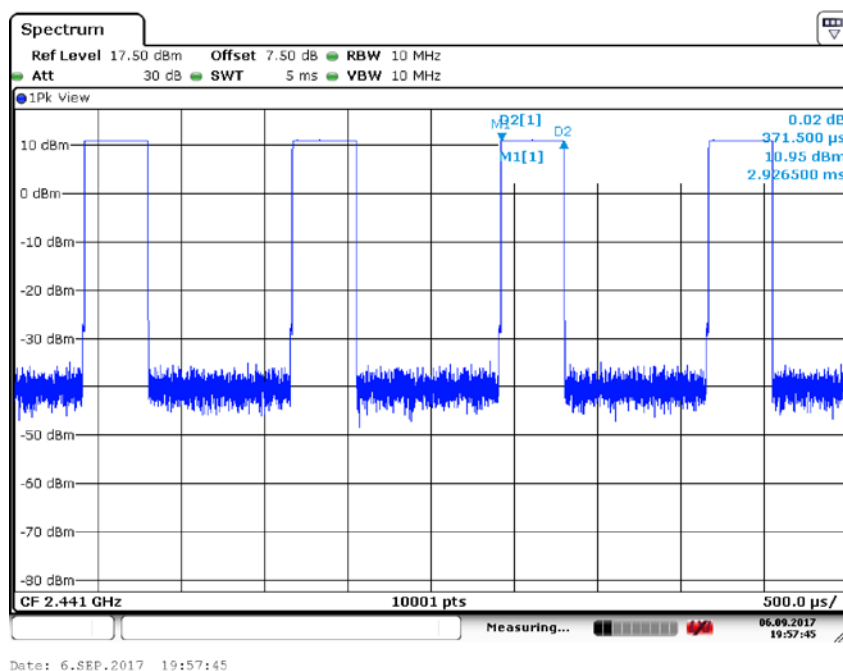


Carrier frequency (MHz): 2441

Packet type: DH1

Modulation type: GFSK

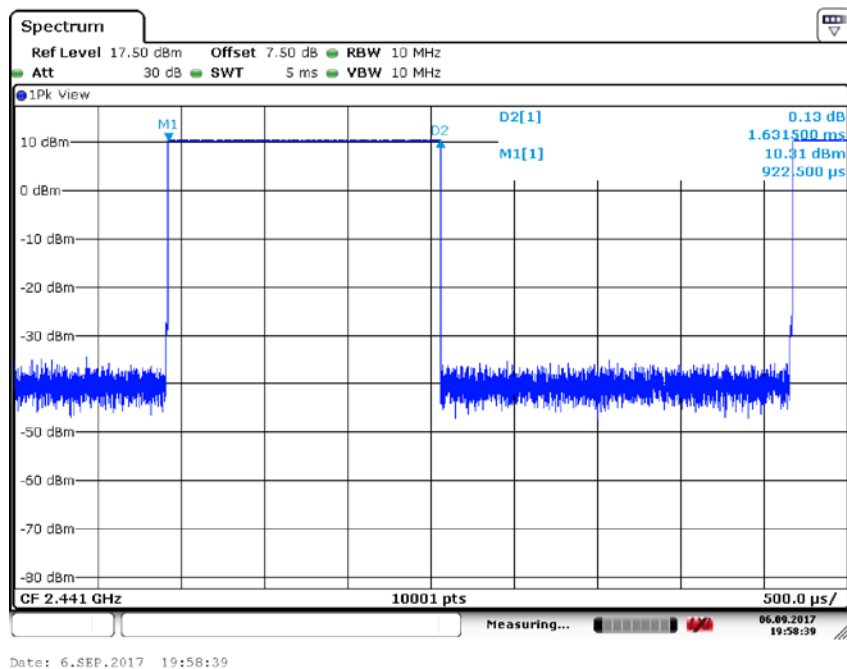


Carrier frequency (MHz): 2441  
Packet type: DH3  
Modulation type: GFSK

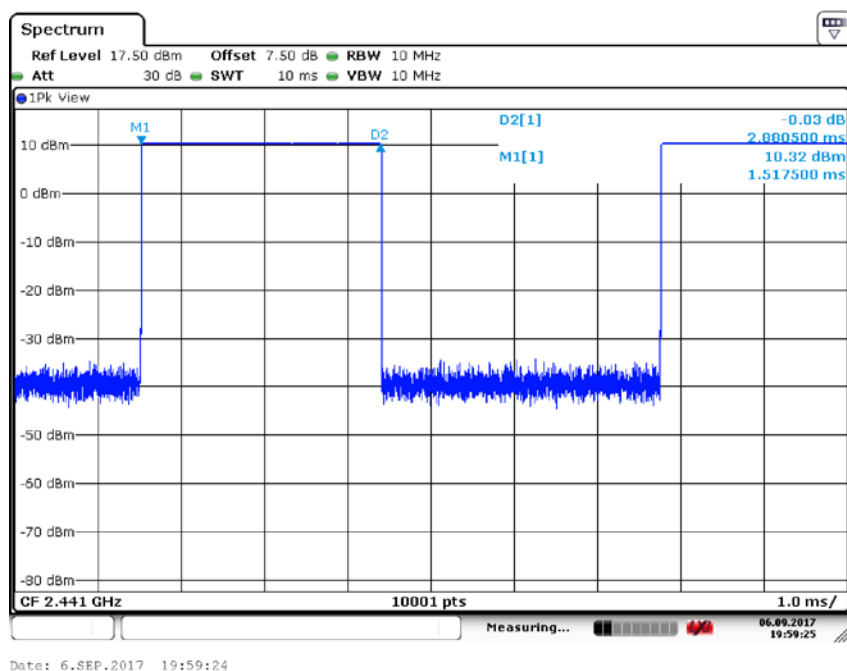


Carrier frequency (MHz): 2441  
Packet type: DH5  
Modulation type: GFSK

Modulation type:  $\pi/4$ DQPSK


| Packet type | Time slot length<br>$\mu$ s | Dwell time                             | Dwell time<br>ms |
|-------------|-----------------------------|----------------------------------------|------------------|
| DH1         | 384                         | time slot length *31.6<br>*1600/2 /79  | 123              |
| DH3         | 1626                        | time slot length * 31.6<br>*1600/4 /79 | 260              |
| DH5         | 2867                        | time slot length * 31.6<br>*1600/6 /79 | 306              |

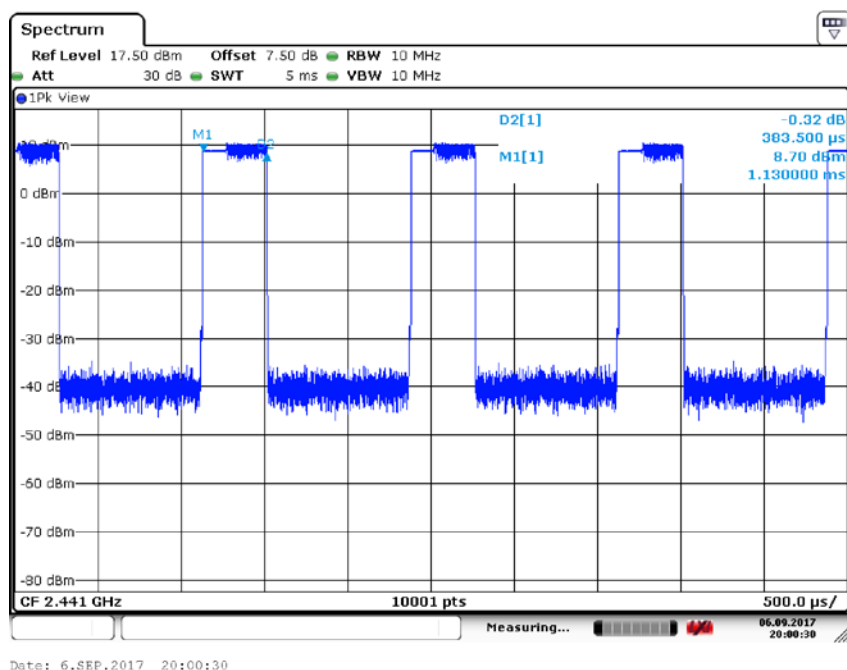

Carrier frequency (MHz): 2441  
Packet type: DH1  
Modulation type:  $\pi/4$ DQPSK

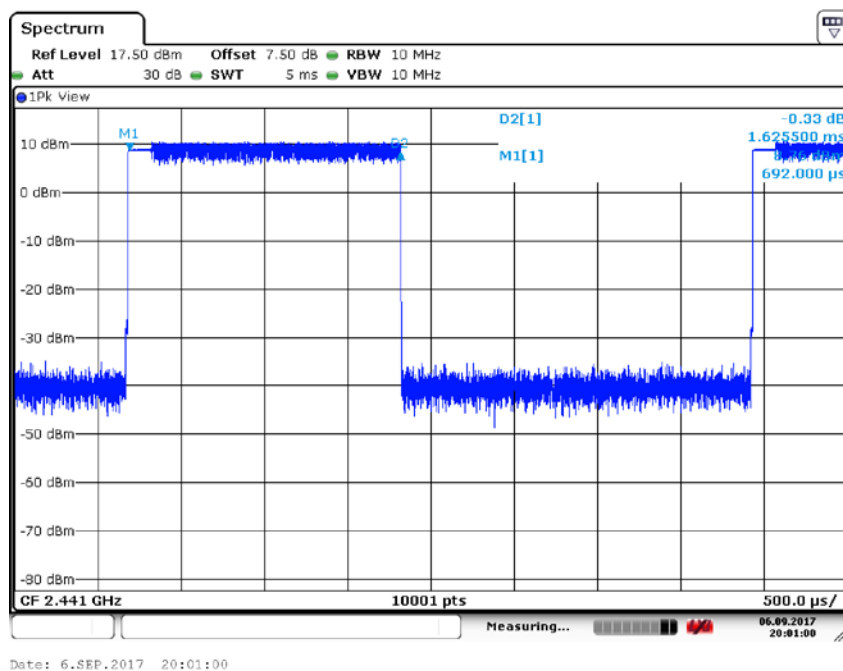


Carrier frequency (MHz): 2441  
Packet type: DH3  
Modulation type:  $\pi/4$ DQPSK

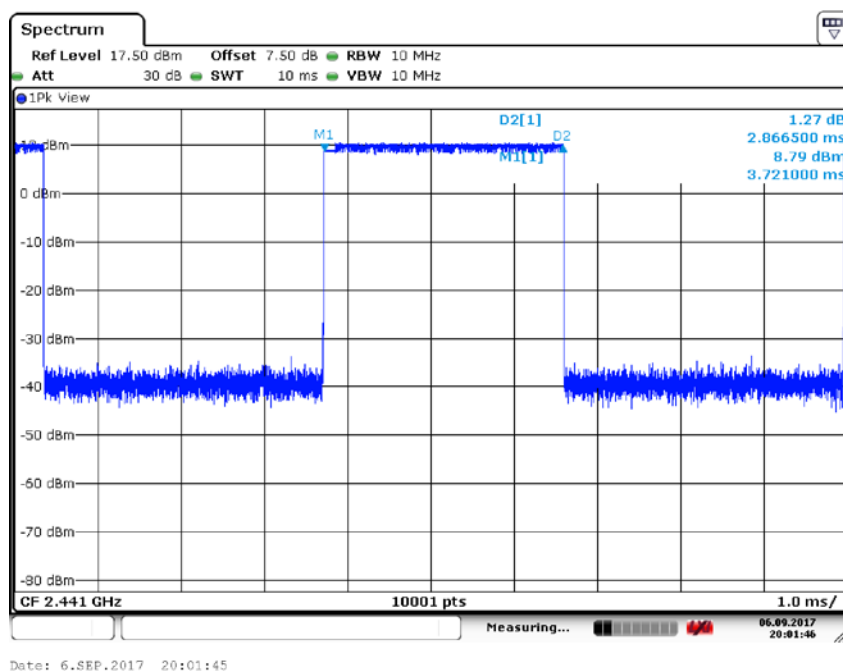


Carrier frequency (MHz): 2441  
Packet type: DH5  
Modulation type:  $\pi/4$ DQPSK

Modulation type: 8DPSK


| Packet type | Time slot length<br>$\mu$ s | Dwell time                             | Dwell time<br>ms |
|-------------|-----------------------------|----------------------------------------|------------------|
| DH1         | 383                         | time slot length *31.6<br>*1600/2 /79  | 123              |
| DH3         | 1636                        | time slot length * 31.6<br>*1600/4 /79 | 262              |
| DH5         | 2869                        | time slot length * 31.6<br>*1600/6 /79 | 306              |

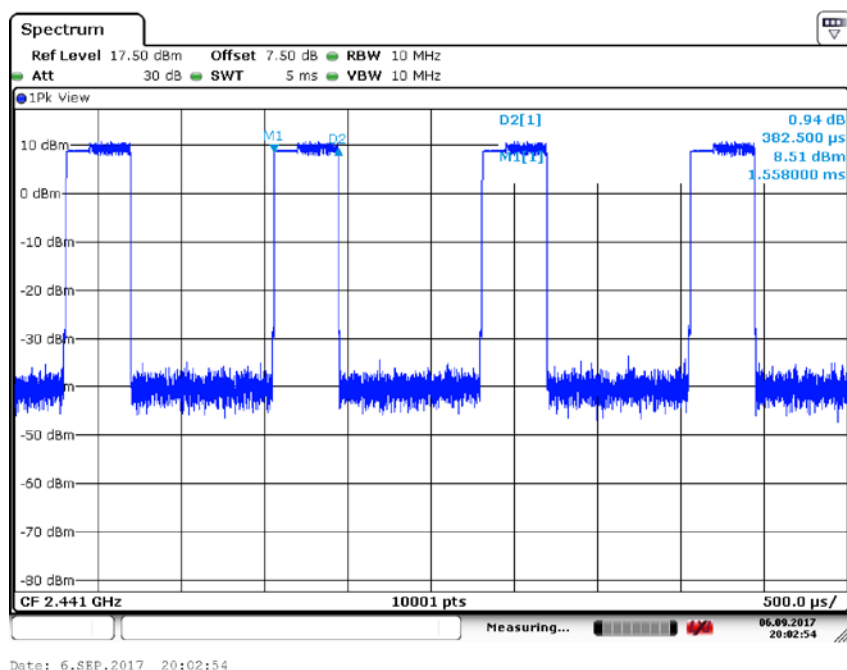

Carrier frequency (MHz): 2441  
Packet type:DH1  
Modulation type: 8DPSK

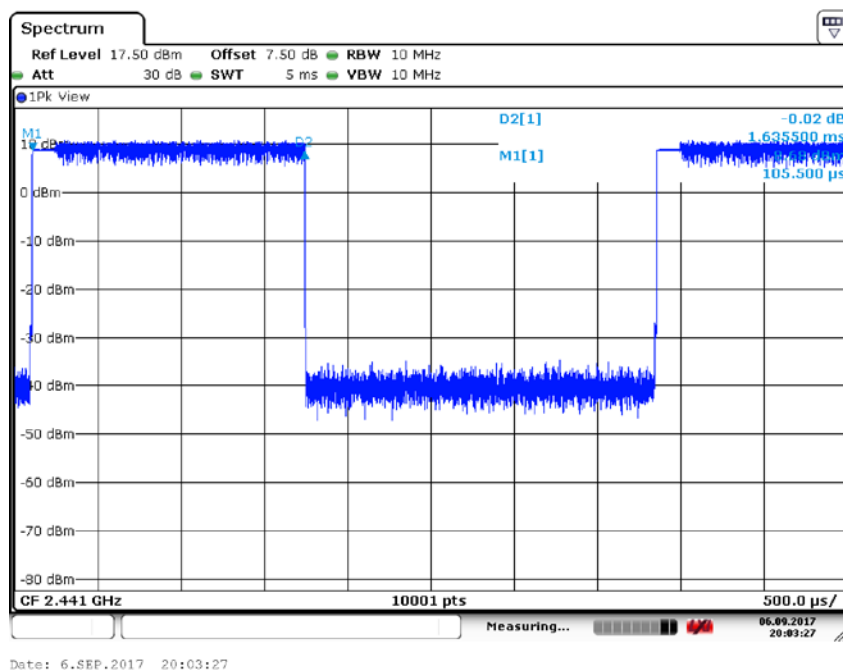

Carrier frequency (MHz): 2441  
Packet type:DH3  
Modulation type: 8DPSK

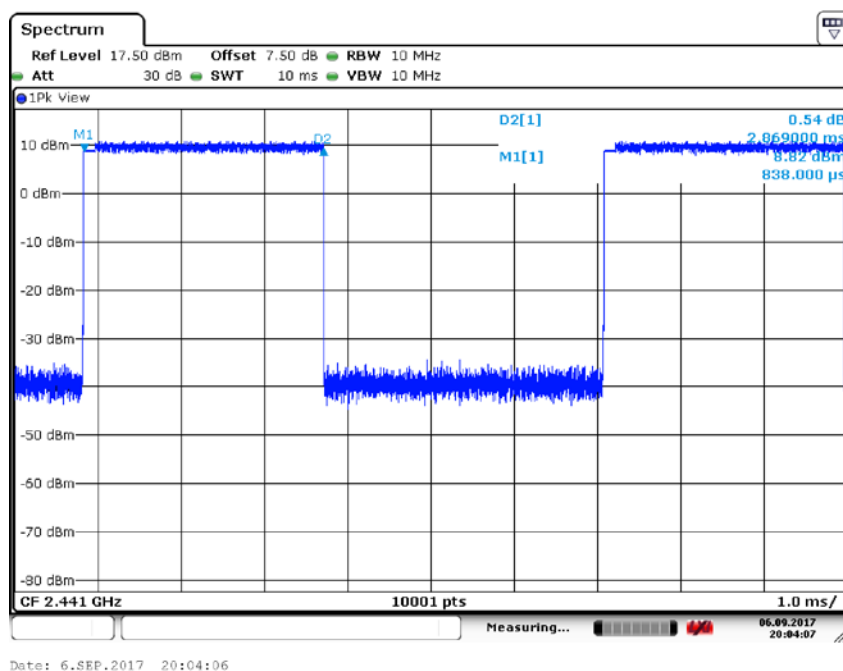


Carrier frequency (MHz): 2441  
Packet type:DH5  
Modulation type: 8DPSK

## Number of Hopping Frequencies

Offset 10.5dB = Attenuator 10dB+ Temporary antenna connector loss 0.2dB+ Cable loss 0.3dB

| Op-mode      | Result |
|--------------|--------|
| Hopping mode | 79     |

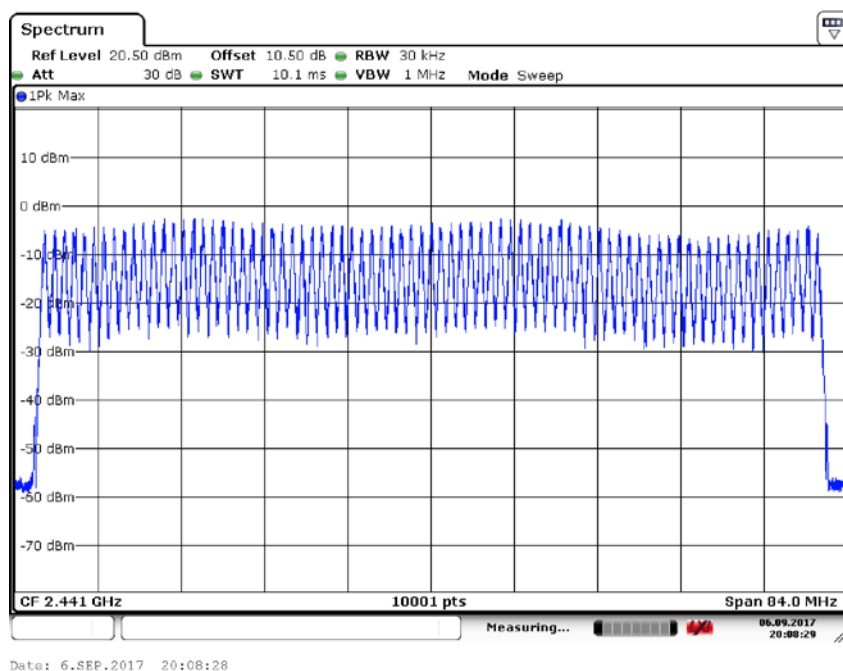


Op-mode: Hopping mode

## Conducted out of band emission measurement


Offset 10.5dB = Attenuator 10dB+ Temporary antenna connector loss 0.2dB+ Cable loss 0.3dB

**GFSK**


**CH0 (Hopping off)**

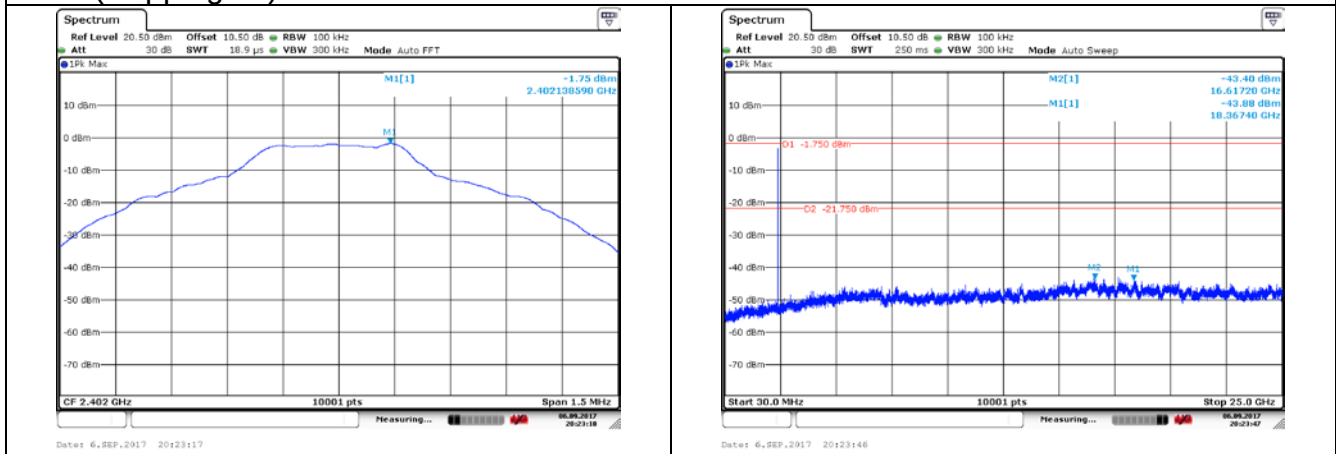

**CH39(Hopping off)**


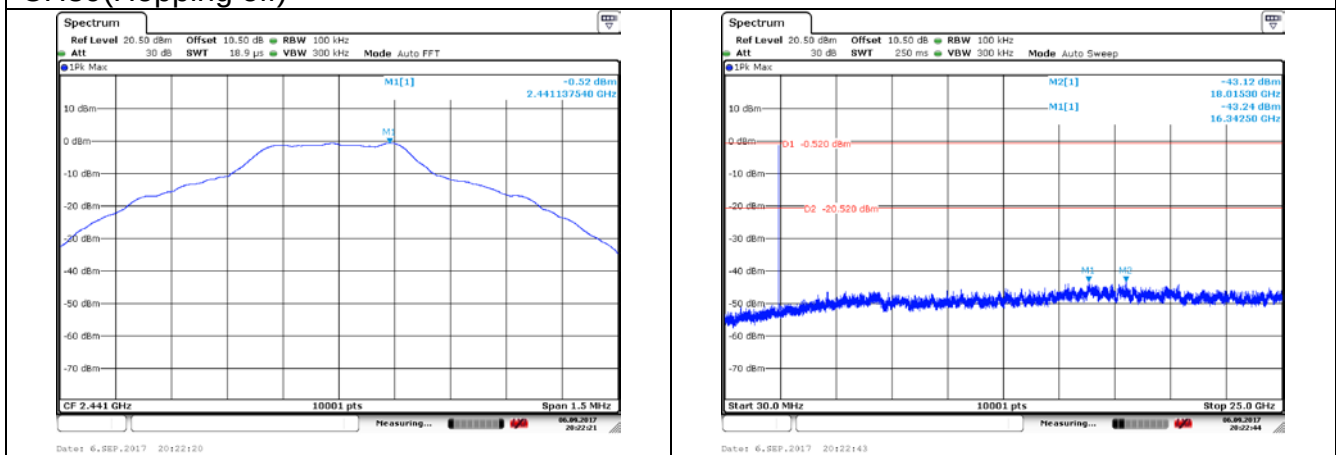


**CH78(Hopping off)**


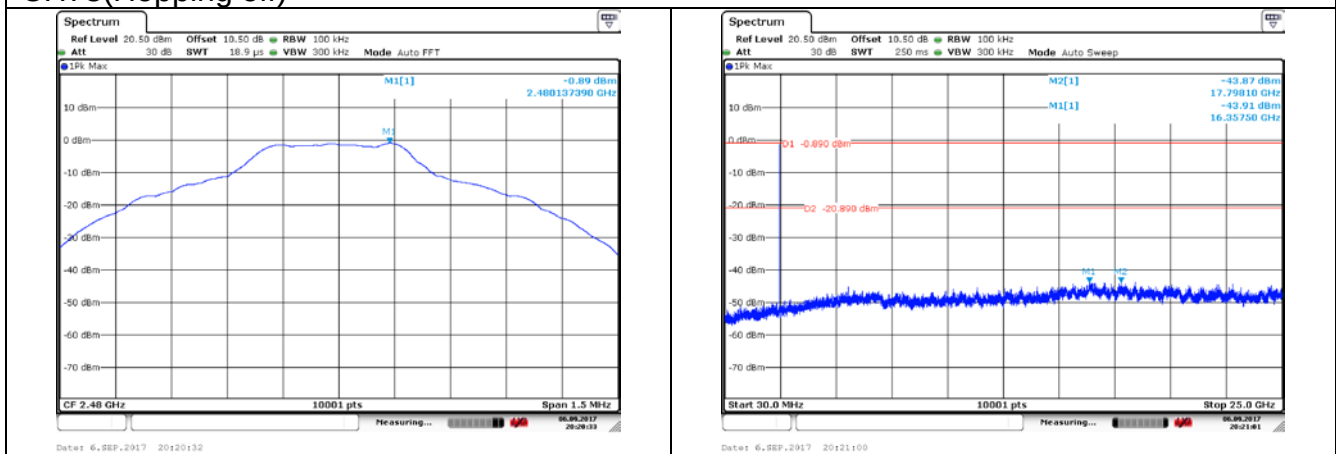


# $\pi$ /4DQPSK



## CH0 (Hopping off)

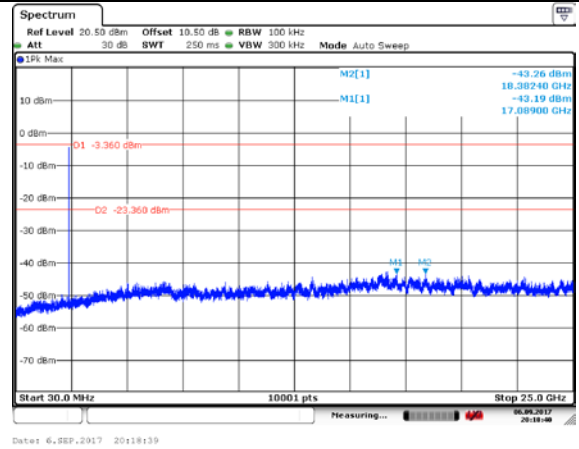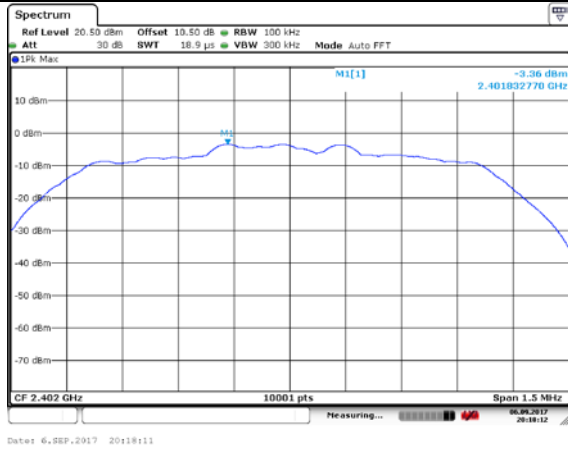

## CH39(Hopping off)

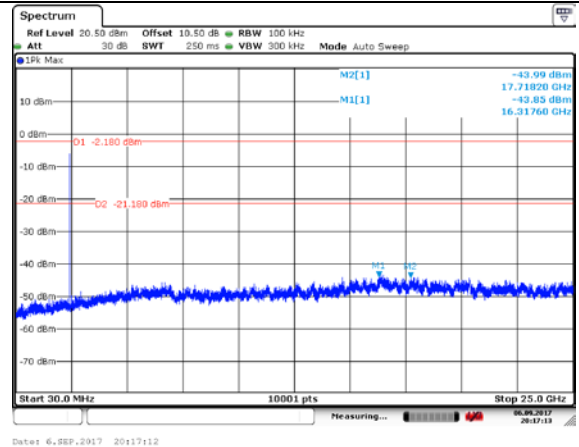
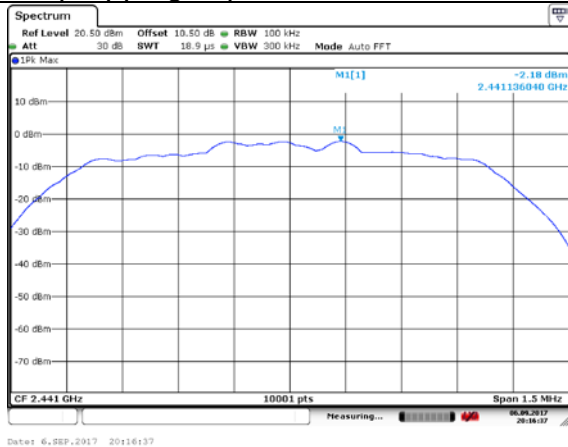


## CH78(Hopping off)

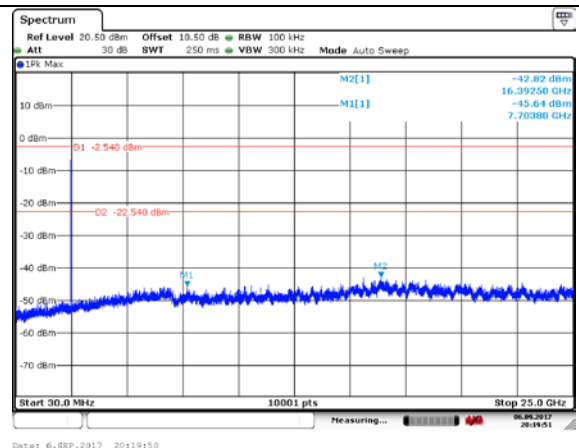
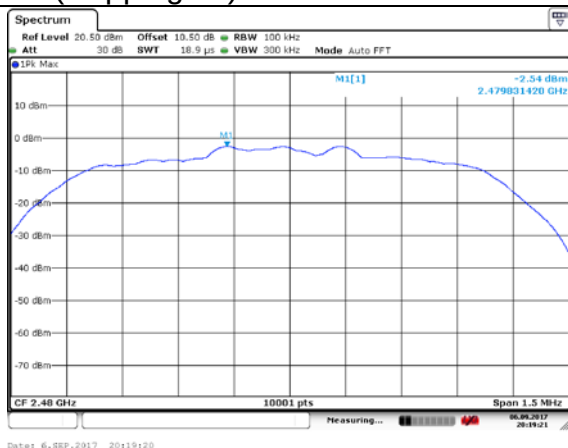


## 8DPSK



### CH0 (Hopping off)

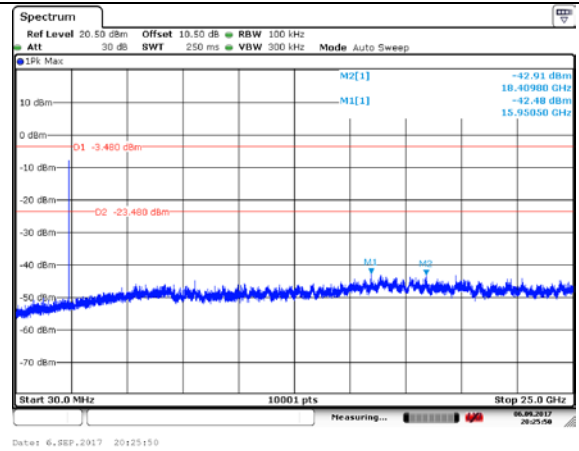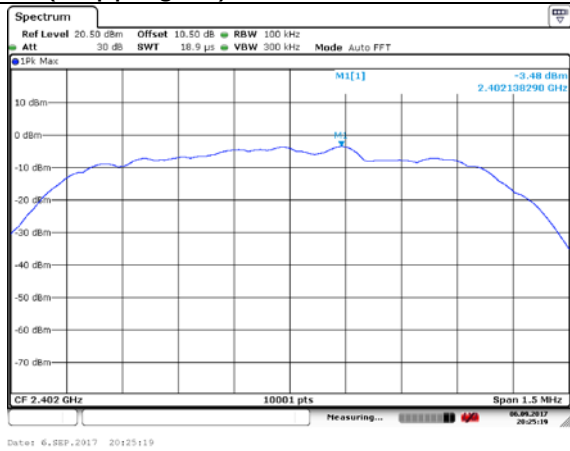

### CH39(Hopping off)

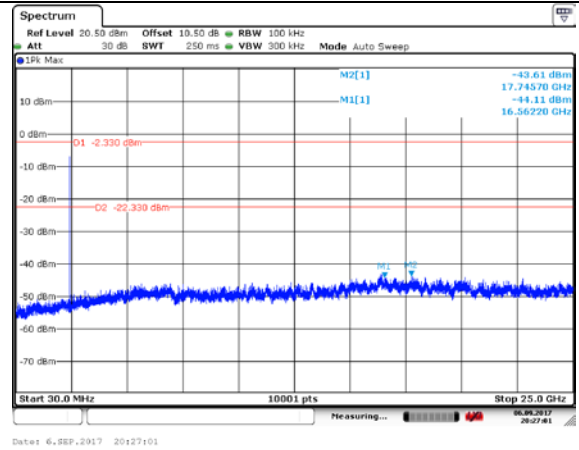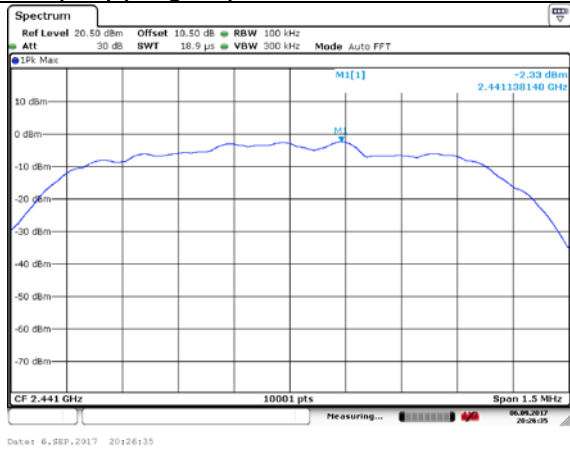

### CH78(Hopping off)

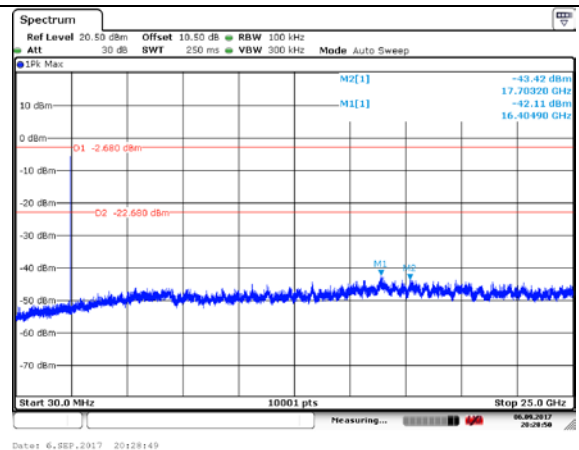
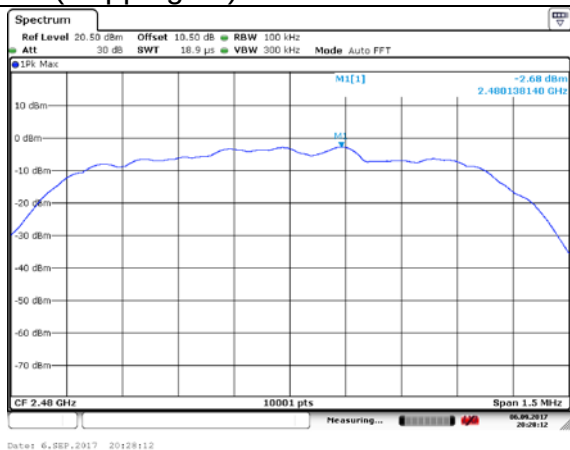


## Band Edge measurement



Offset 10.5dB = Attenuator 10dB+ Temporary antenna connector loss 0.2dB+ Cable loss 0.3dB

## GFSK


### CH0 (Hopping off)

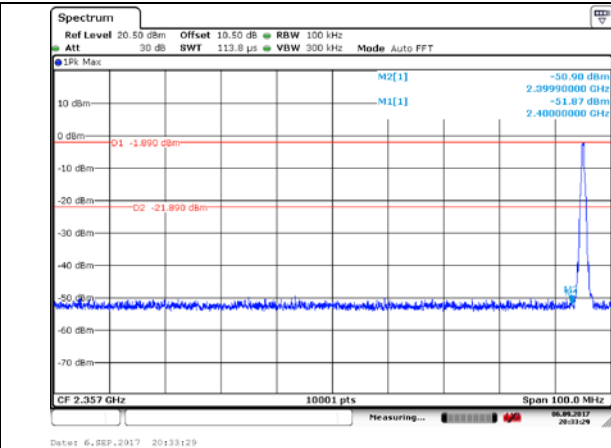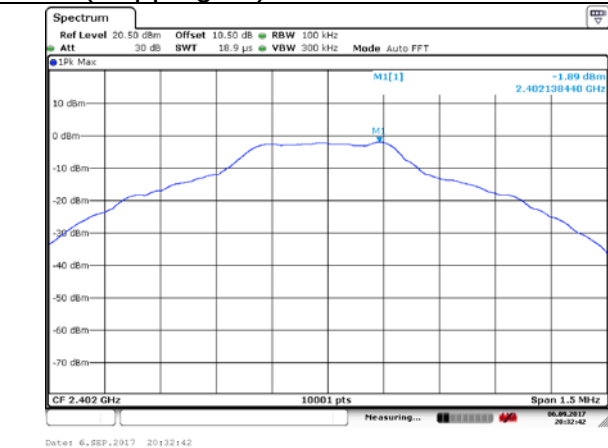


### CH78 (Hopping off)

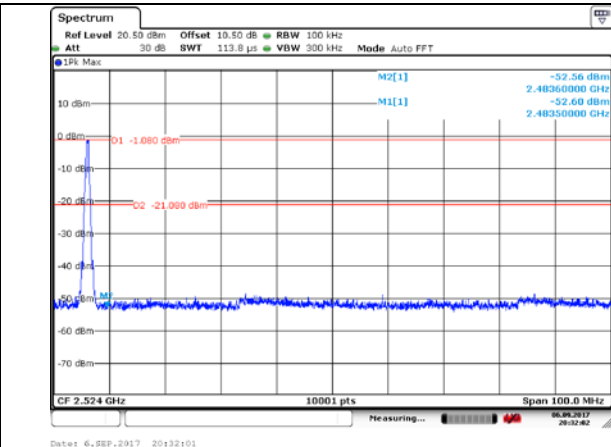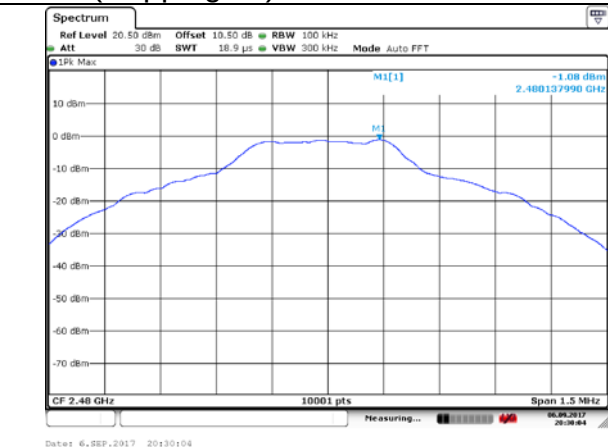

### CH0 (Hopping on)


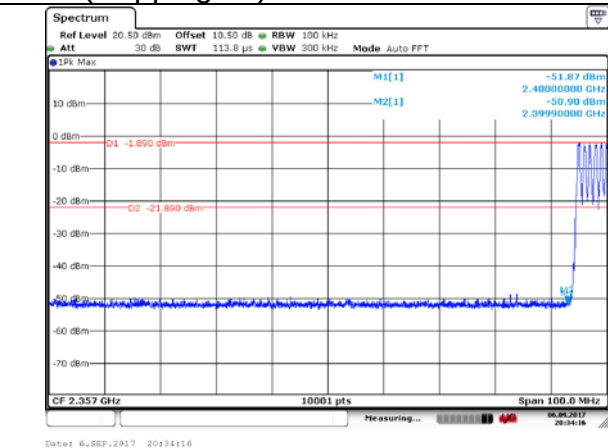


### CH78 (Hopping on)


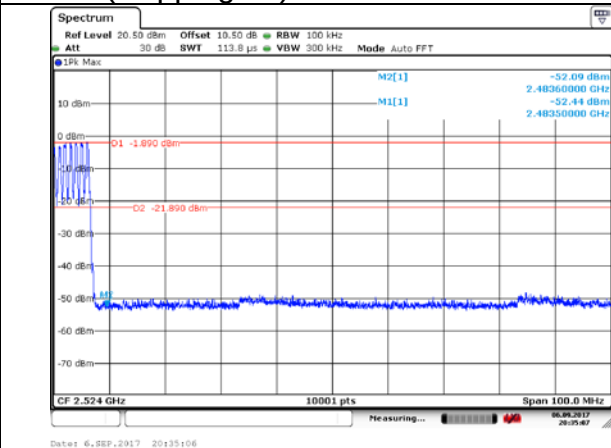


## $\pi/4$ DQPSK


### CH0 (Hopping off)

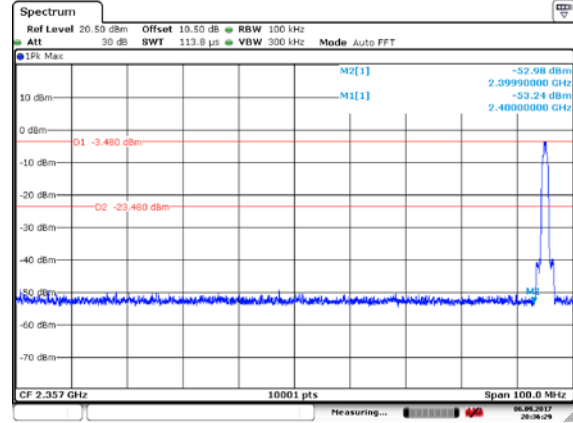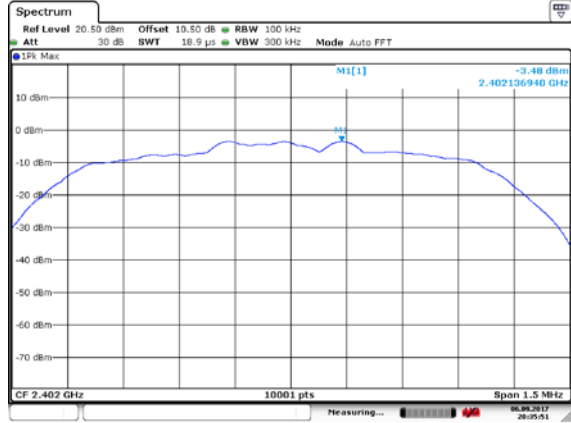


### CH78(Hopping off)

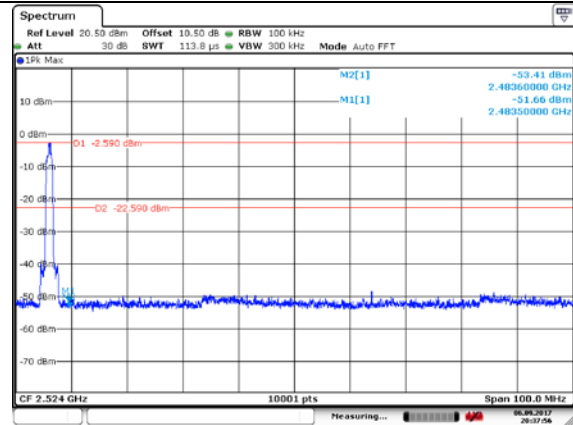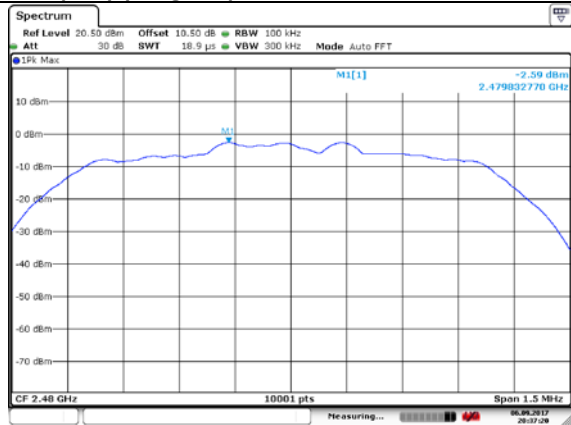

### CH0 (Hopping on)


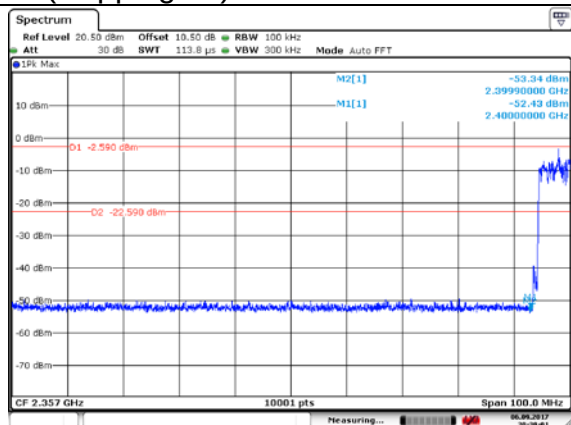


### CH78 (Hopping on)


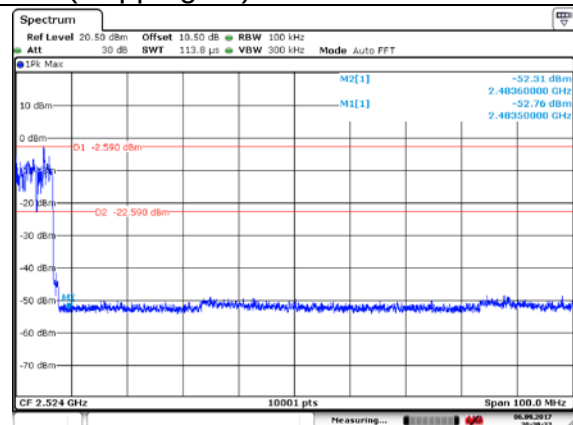


## 8DPSK


### CH0 (Hopping off)

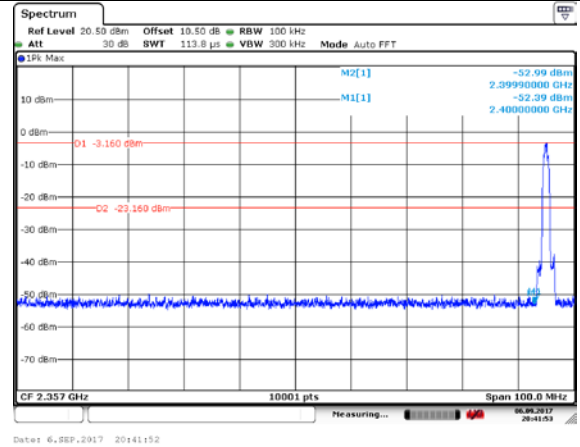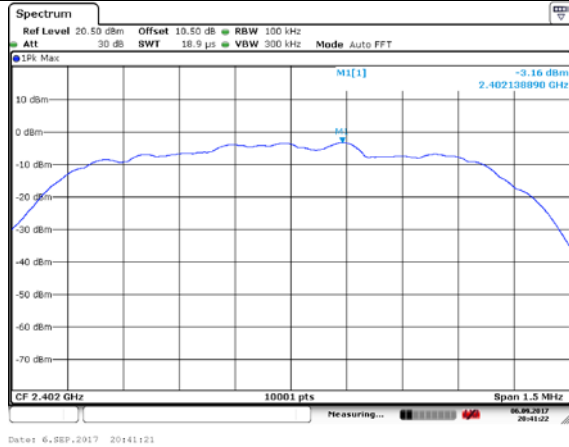


### CH78(Hopping off)

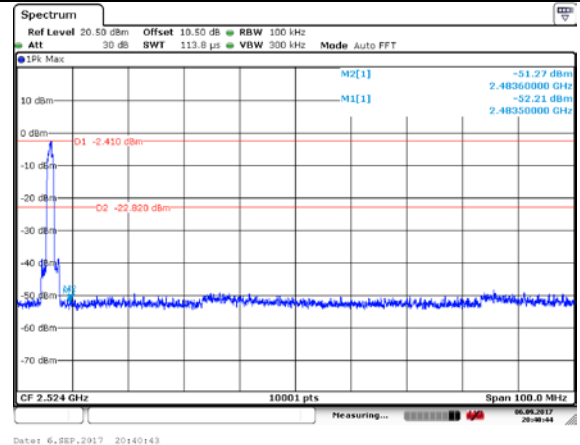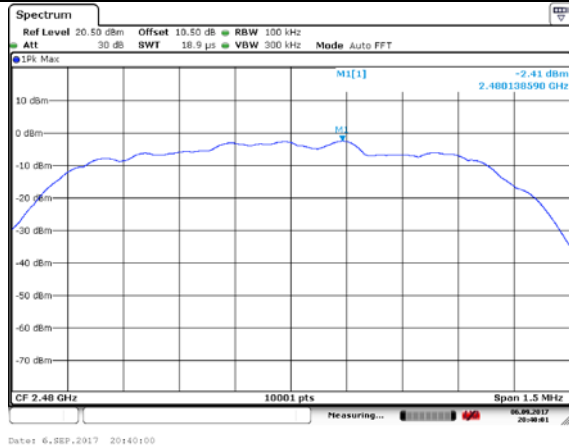

### CH0 (Hopping on)

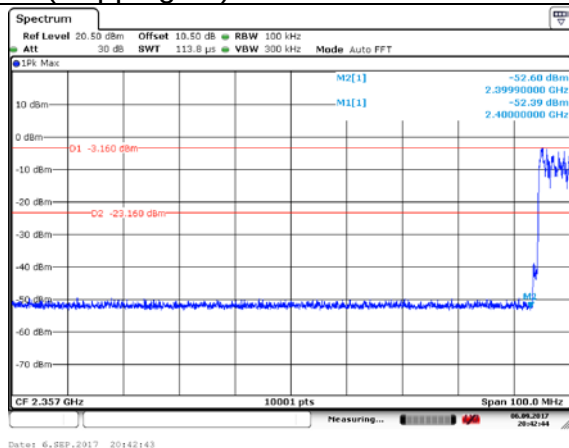

### CH78 (Hopping on)

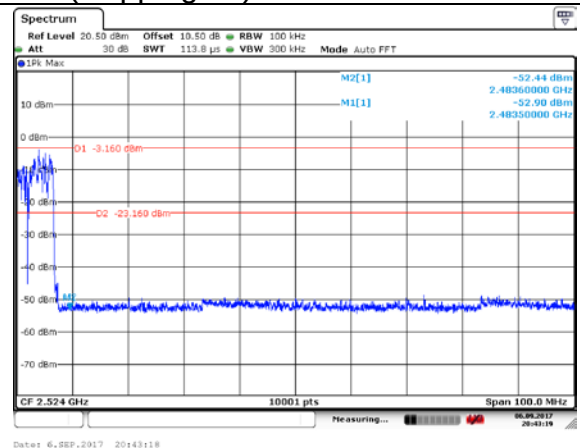

## **APPENDIX B – TEST DATA OF RADIATED EMISSION**

### **Spurious Radiated Emissions**

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK

Polarity: Vertical

Detector: Peak

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2402            | 100.14                 | 66.14                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2390            | 45.90                  | 11.90                | -28.10          | 74.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK

Polarity: Horizontal

Detector: Peak

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2402            | 93.99                  | 59.99                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2390            | 40.39                  | 6.39                 | -33.61          | 74.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK

Polarity: Vertical

Detector: Average

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2402            | 86.54                  | 52.54                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2390            | 34.27                  | 0.27                 | -19.73          | 54.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK

Polarity: Horizontal

Detector: Average

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2402            | 81.63                  | 47.63                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2390            | 32.93                  | -1.07                | -21.07          | 54.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: GFSK

Polarity: Vertical

Detector: Peak

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2480            | 100.34                 | 66.34                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2483.5          | 46.08                  | 12.08                | -27.92          | 74.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: GFSK

Polarity: Horizontal

Detector: Peak

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2480            | 95.16                  | 61.16                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2483.5          | 44.44                  | 10.44                | -29.56          | 74.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: GFSK

Polarity: Vertical

Detector: Average

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2480            | 93.03                  | 59.03                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2483.5          | 40.65                  | 6.65                 | -13.35          | 54.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2480  
Channel No.:78  
Test Mode: GFSK  
Polarity: Horizontal  
Detector: Average

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2480            | 85.90                  | 51.90                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2483.5          | 39.16                  | 5.16                 | -14.84          | 54.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2402  
Channel No.:0  
Test Mode:  $\pi/4$ DQPSK  
Polarity: Vertical  
Detector: Peak

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2402            | 98.98                  | 64.98                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2390            | 45.84                  | 11.84                | -28.16          | 74.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2402  
Channel No.:0  
Test Mode:  $\pi/4$ DQPSK  
Polarity: Horizontal  
Detector: Peak

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2402            | 94.68                  | 60.68                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2390            | 42.25                  | 8.25                 | -31.75          | 74.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2402  
Channel No.:0  
Test Mode:  $\pi/4$ DQPSK  
Polarity: Vertical  
Detector: Average

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2402            | 85.54                  | 51.54                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2390            | 33.75                  | -0.25                | -20.25          | 54.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2402  
Channel No.:0  
Test Mode:  $\pi/4$ DQPSK  
Polarity: Horizontal  
Detector: Average

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2402            | 84.29                  | 50.29                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2390            | 33.36                  | -0.64                | -20.64          | 54.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2480  
Channel No.:78  
Test Mode:  $\pi/4$ DQPSK  
Polarity: Vertical  
Detector: Peak

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2480            | 99.51                  | 65.51                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2483.5          | 46.56                  | 12.56                | -27.44          | 74.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2480  
Channel No.:78  
Test Mode:  $\pi/4$ DQPSK  
Polarity: Horizontal  
Detector: Peak

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2480            | 95.49                  | 61.49                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2483.5          | 44.32                  | 10.32                | -29.68          | 74.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2480  
Channel No.:78  
Test Mode:  $\pi/4$ DQPSK  
Polarity: Vertical  
Detector: Average

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2480            | 93.08                  | 59.08                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2483.5          | 39.71                  | 5.71                 | -14.29          | 54.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2480  
Channel No.:78  
Test Mode:  $\pi/4$ DQPSK  
Polarity: Horizontal  
Detector: Average

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2480            | 86.58                  | 52.58                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2483.5          | 39.60                  | 5.60                 | -14.40          | 54.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2402  
Channel No.:0  
Test Mode: 8DPSK  
Polarity: Vertical  
Detector: Peak

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2402            | 100.95                 | 66.95                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2390            | 45.63                  | 11.63                | -28.37          | 74.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2402  
Channel No.:0  
Test Mode: 8DPSK  
Polarity: Horizontal  
Detector: Peak

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2402            | 95.56                  | 61.56                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2390            | 44.81                  | 10.81                | -29.19          | 74.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2402  
Channel No.:0  
Test Mode: 8DPSK  
Polarity: Vertical  
Detector: Average

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2402            | 93.19                  | 59.19                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2390            | 41.37                  | 7.37                 | -12.63          | 54.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2402  
Channel No.:0  
Test Mode: 8DPSK  
Polarity: Horizontal  
Detector: Average

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2402            | 85.79                  | 51.79                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2390            | 40.12                  | 6.12                 | -13.88          | 54.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2480  
Channel No.:78  
Test Mode: 8DPSK  
Polarity: Vertical  
Detector: Peak

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2480            | 101.64                 | 67.64                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2483.5          | 47.69                  | 13.69                | -26.31          | 74.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2480  
Channel No.:78  
Test Mode: 8DPSK  
Polarity: Horizontal  
Detector: Peak

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2480            | 95.42                  | 61.42                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2483.5          | 45.10                  | 11.10                | -28.90          | 74.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2480  
Channel No.:78  
Test Mode: 8DPSK  
Polarity: Vertical  
Detector: Average

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2480            | 94.99                  | 60.99                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2483.5          | 40.26                  | 6.26                 | -13.74          | 54.00          | 8.90            | 25.10               |

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: 8DPSK

Polarity: Horizontal

Detector: Average

| No | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | cable loss (dB) | antenna factor (dB) |
|----|-----------------|------------------------|----------------------|-----------------|----------------|-----------------|---------------------|
| 1  | 2480            | 87.78                  | 53.78                | N/A             | N/A            | 8.90            | 25.10               |
| 2  | 2483.5          | 39.96                  | 5.96                 | -14.04          | 54.00          | 8.90            | 25.10               |

### Sample Calculations

Determining Spurious Emissions Levels

A “reference path loss” is established and the  $A_{Rpl}$  is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

Result=  $P_{mea} + A_{Rpl}$

Channel No.:39

| Frequency (MHz) | Result (dBuV/m) | ARpl (dB) | Pmea (dBuV/m) | Polarity   | Limit (dBuV/m) |
|-----------------|-----------------|-----------|---------------|------------|----------------|
| 31.96           | 21.30           | 19.7      | 1.6           | Horizontal | 40.0           |
| 49.51           | 22.30           | 9.5       | 12.8          | Vertical   | 40.0           |
| 84.11           | 27.90           | 11.6      | 16.3          | Horizontal | 43.5           |
| 420.64          | 18.40           | 19.8      | -1.4          | Vertical   | 43.5           |
| 540.08          | 29.10           | 22.4      | 6.7           | Horizontal | 43.5           |
| 955.91          | 28.60           | 28.9      | -0.3          | Vertical   | 43.5           |


For  $\pi/4$ DQPSK  
Channel No.:39

| Frequency (MHz) | Result (dBuV/m) | ARpl (dB) | Pmea (dBuV/m) | Polarity   | Limit (dBuV/m) |
|-----------------|-----------------|-----------|---------------|------------|----------------|
| 31.12           | 20.50           | 20.2      | 0.3           | Vertical   | 40.0           |
| 47.95           | 22.80           | 10.2      | 12.6          | Horizontal | 40.0           |
| 87.09           | 14.60           | 11.8      | 2.8           | Vertical   | 43.5           |
| 420.64          | 18.50           | 19.8      | -1.3          | Vertical   | 43.5           |
| 540.08          | 25.00           | 22.4      | 2.6           | Horizontal | 43.5           |
| 947.89          | 28.50           | 28.7      | -0.2          | Vertical   | 43.5           |


For 8DPSK  
Channel No.:39

| Frequency (MHz) | Result (dBuV/m) | ARpl (dB) | Pmea (dBuV/m) | Polarity   | Limit (dBuV/m) |
|-----------------|-----------------|-----------|---------------|------------|----------------|
| 31.96           | 20.10           | 19.7      | 0.4           | Vertical   | 40.0           |
| 46.97           | 23.60           | 10.8      | 12.8          | Vertical   | 40.0           |
| 86.25           | 23.80           | 11.8      | 12.0          | Vertical   | 43.5           |
| 459.91          | 19.30           | 20.8      | -1.5          | Horizontal | 43.5           |
| 540.08          | 21.90           | 22.4      | -0.5          | Vertical   | 43.5           |
| 940.88          | 28.40           | 28.7      | -0.3          | Vertical   | 43.5           |


Carrier frequency (MHz): 2441  
Channel No.:39

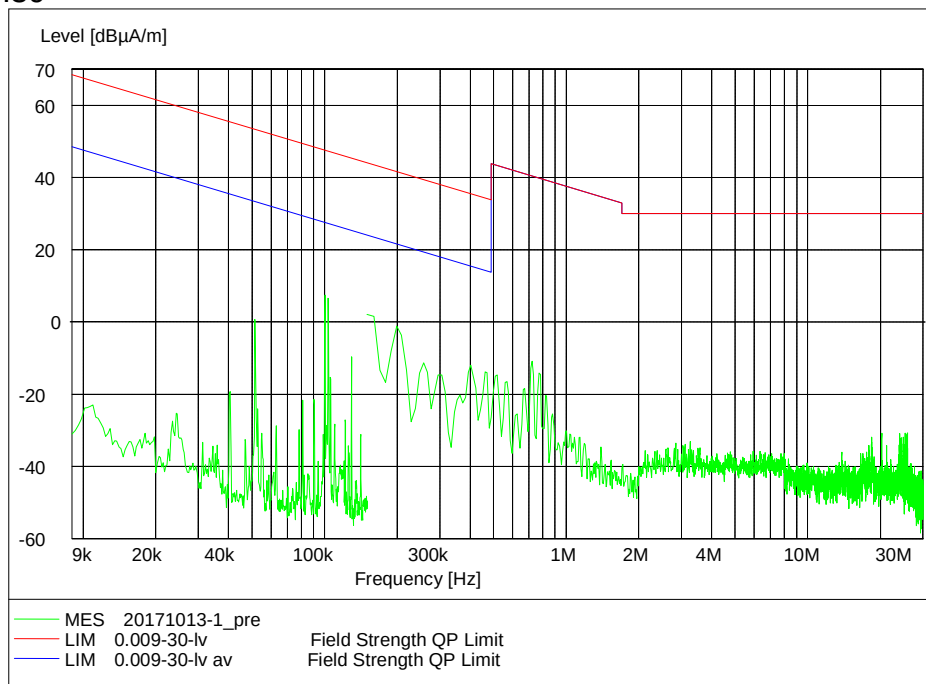


Frequency Range: 9KHz-30MHz  
Detector: QP mode  
Modulation type: GFSK

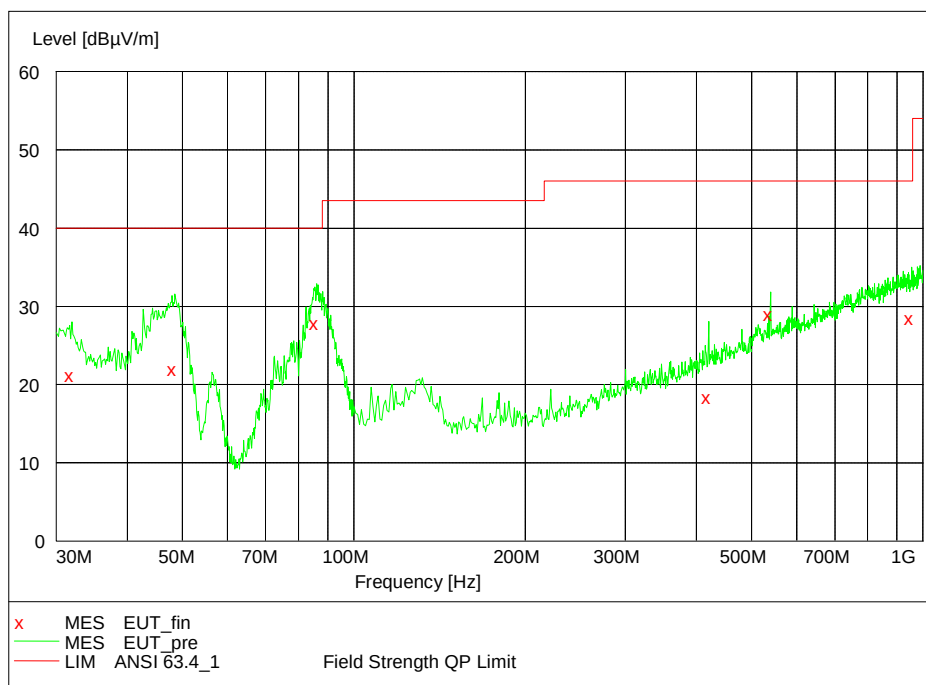


Frequency Range: 30MHz-1000MHz  
Detector: QP mode  
Modulation type: GFSK

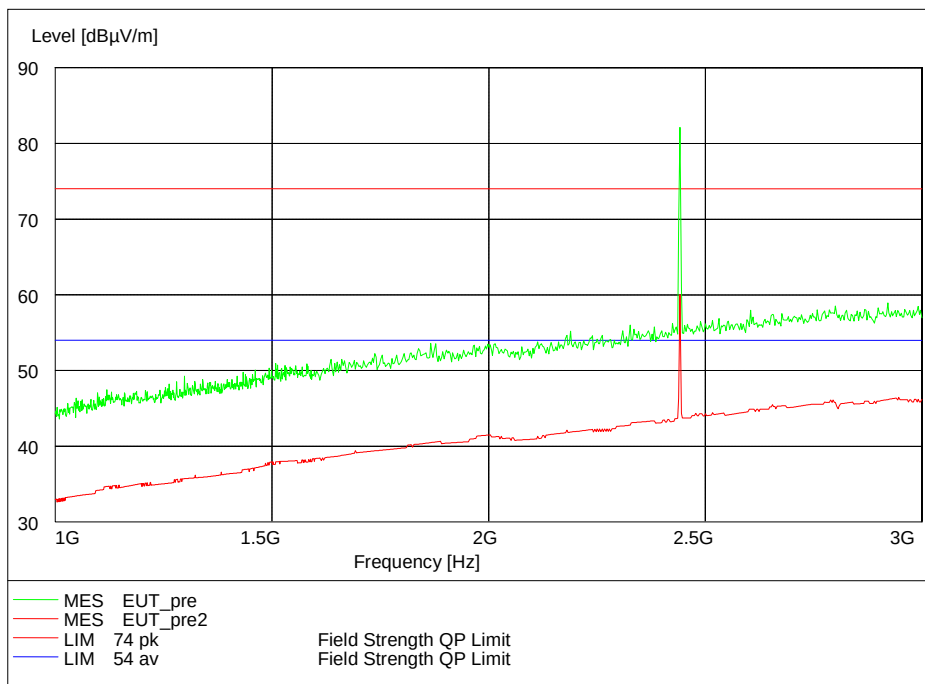


Frequency Range: 1GHz-3GHz  
Detector: Av mode and PK mode  
Modulation type: GFSK

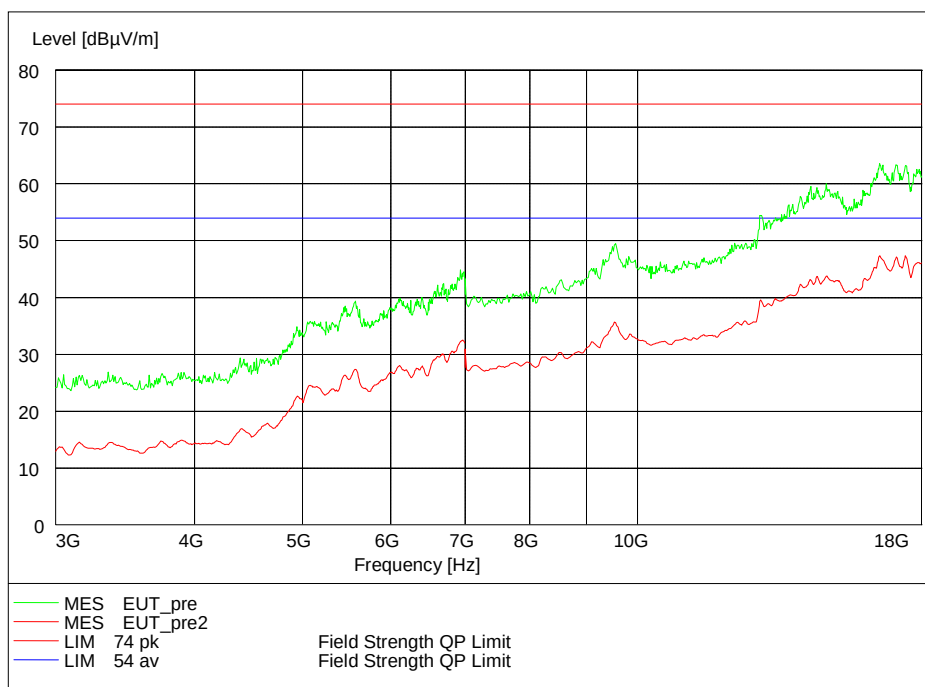


Frequency Range: 3GHz-18GHz  
Detector: Av mode and PK mode  
Modulation type: GFSK

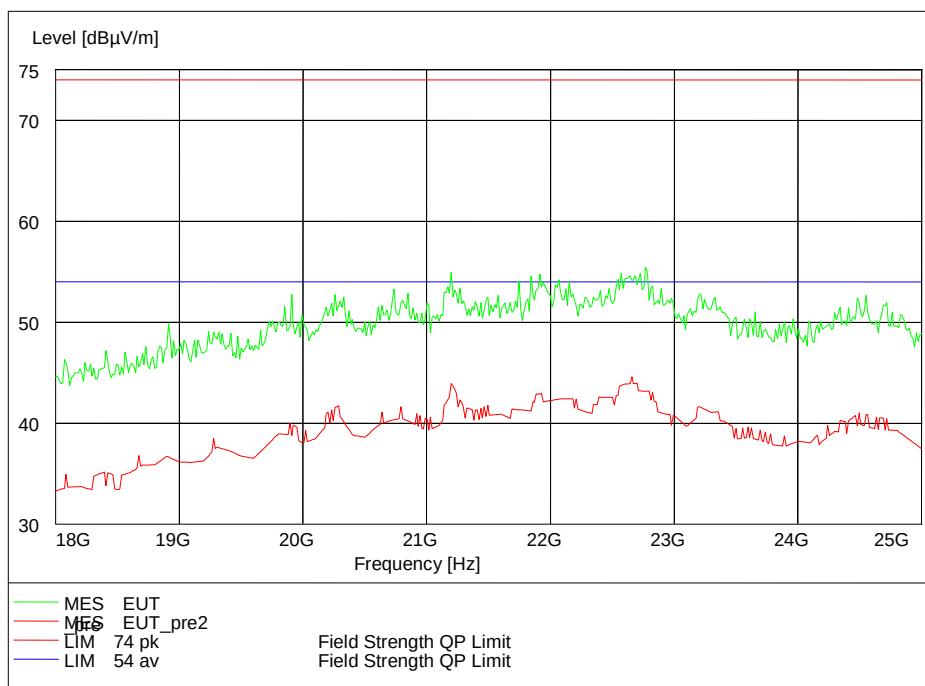


Frequency Range: 18GHz-25GHz  
Detector: Av mode and PK mode  
Modulation type: GFSK

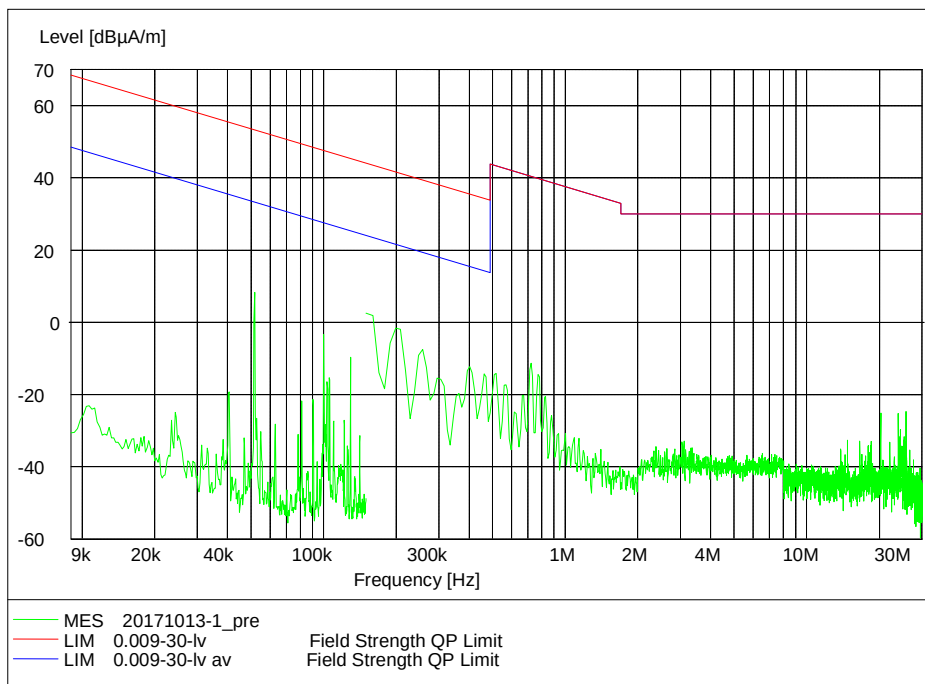


Frequency Range: 9KHz-30MHz  
Detector: QP mode  
Modulation type:  $\pi/4$ DQPSK

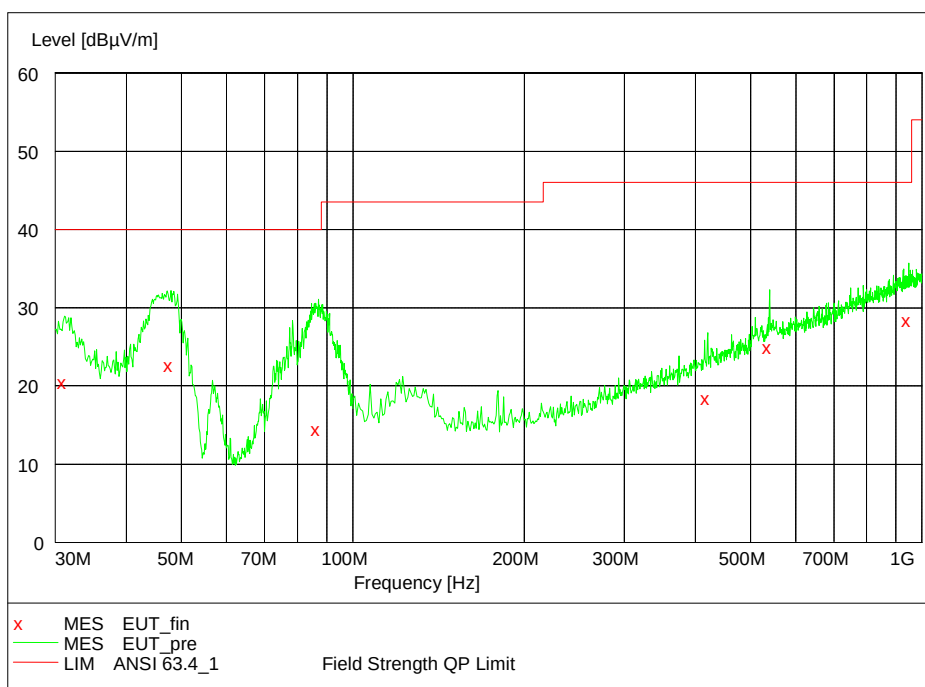


Frequency Range: 30MHz-1000 MHz  
Detector: QP mode  
Modulation type:  $\pi/4$ DQPSK

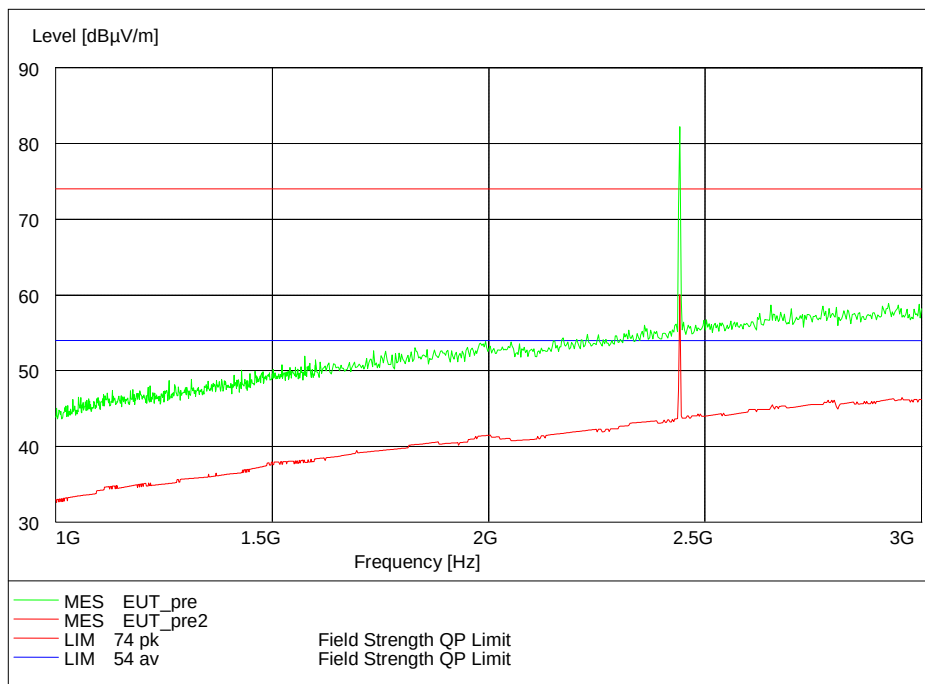


Frequency Range: 1GHz-3GHz  
Detector: Av mode and PK mode  
Modulation type:  $\pi/4$ DQPSK

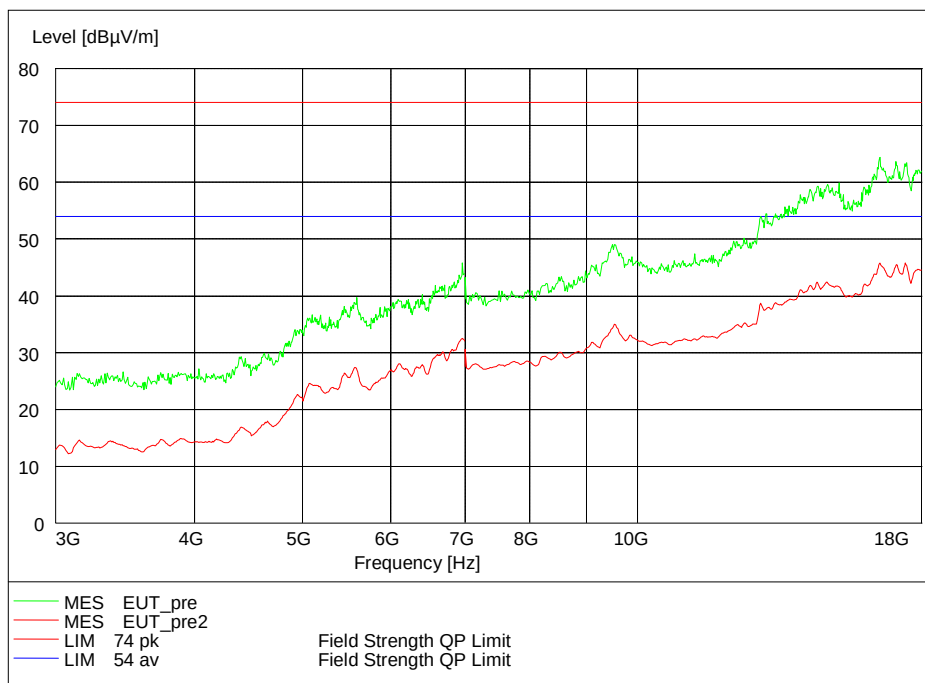


Frequency Range: 3GHz-18GHz  
Detector: Av mode and PK mode  
Modulation type:  $\pi/4$ DQPSK

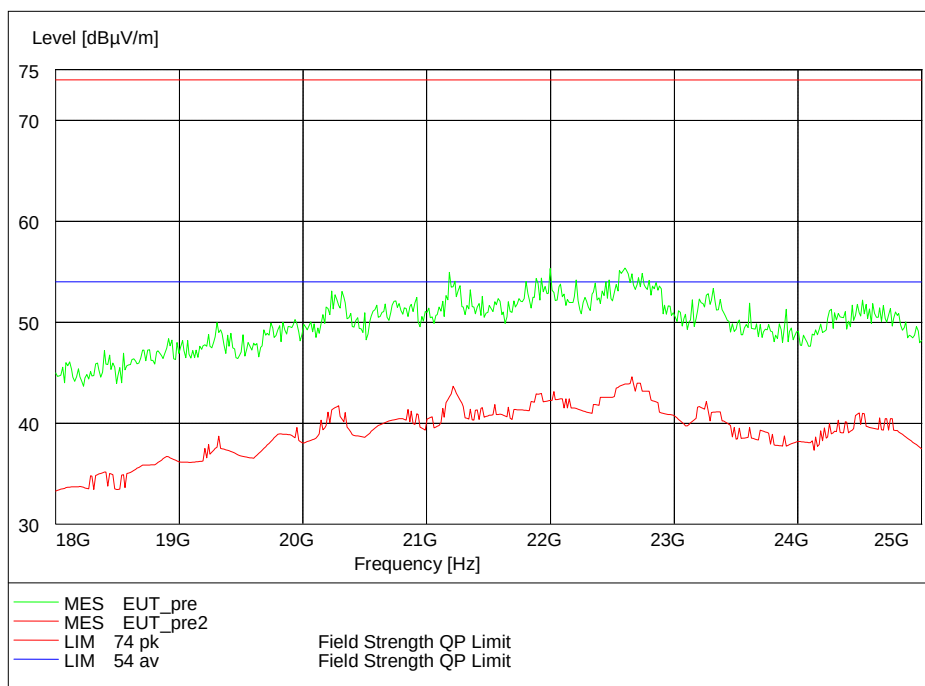


Frequency Range: 18GHz-25GHz  
Detector: Av mode and PK mode  
Modulation type:  $\pi/4$ DQPSK

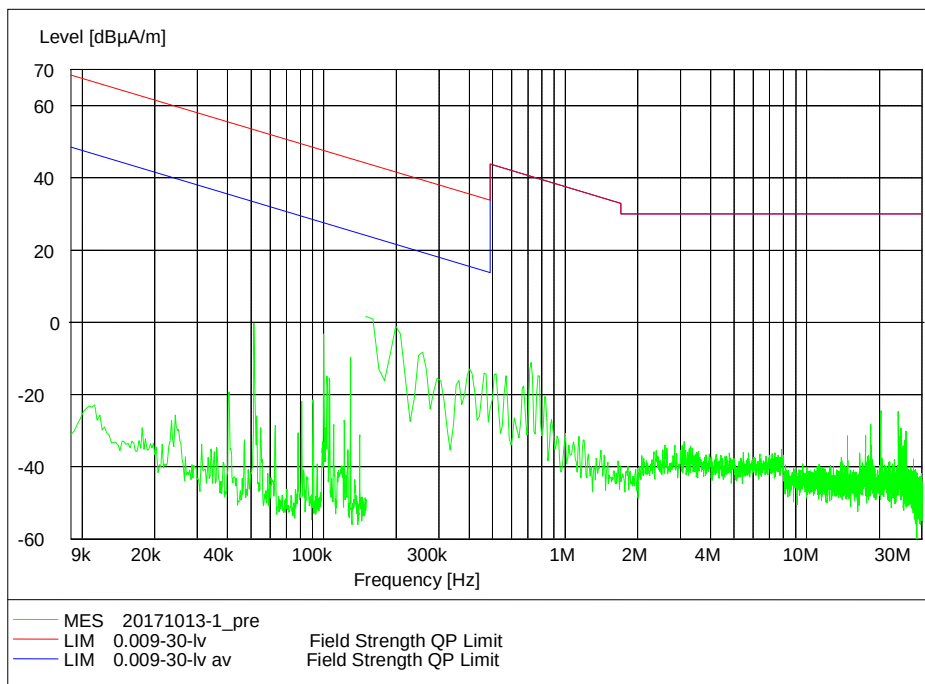


Frequency Range: 9KHz-30MHz  
Detector: QP mode  
Modulation type: 8DPSK

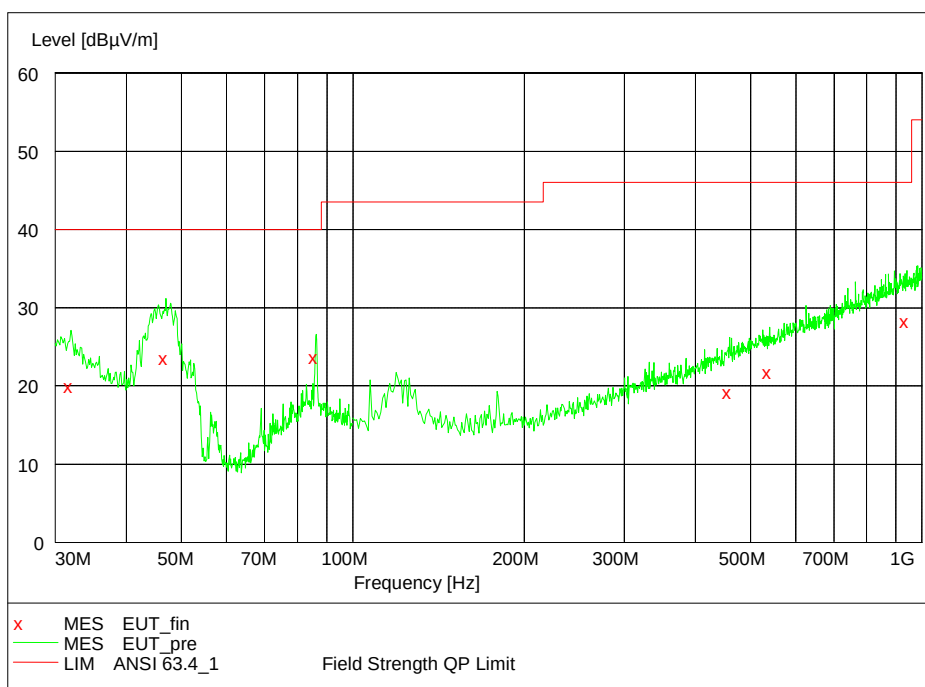


Frequency Range: 30MHz-1000 MHz  
Detector: QP mode  
Modulation type: 8DPSK

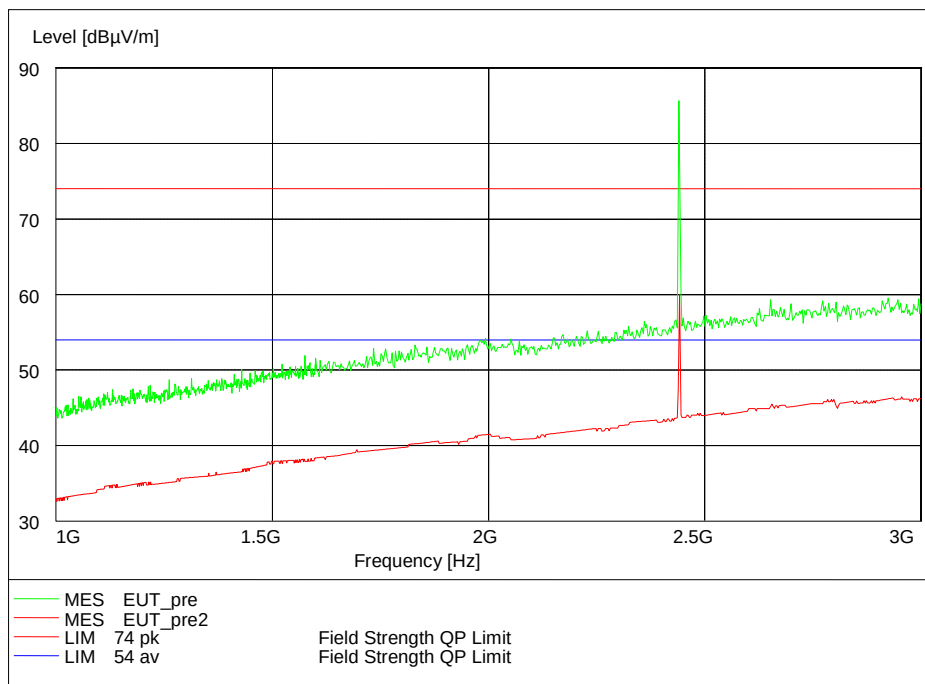

Frequency Range: 1GHz-3GHz  
Detector: Av mode and PK mode  
Modulation type: 8DPSK

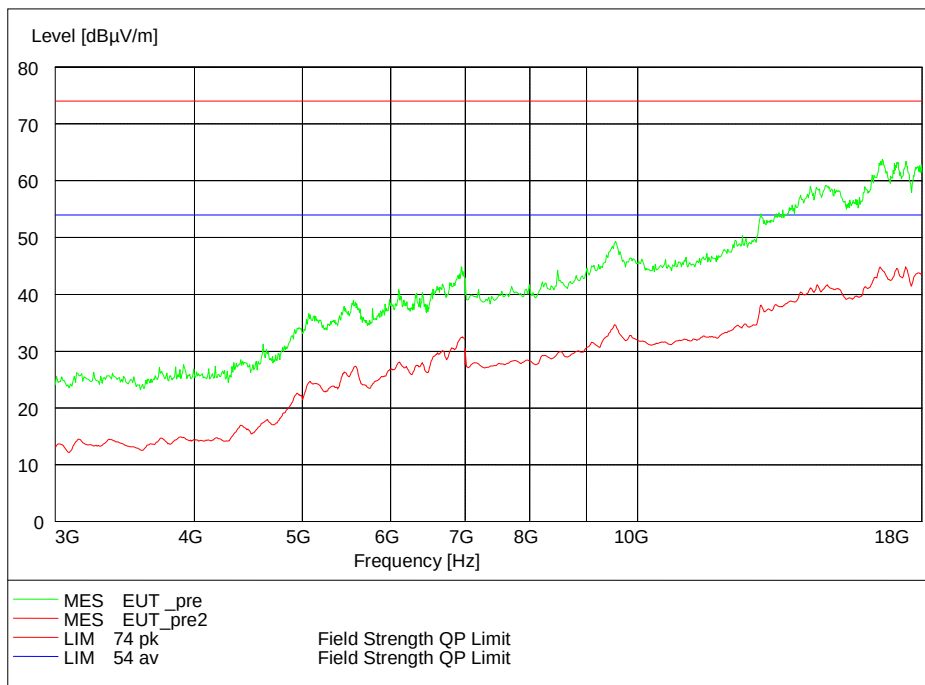


Frequency Range: 3GHz-18GHz  
Detector: Av mode and PK mode  
Modulation type: 8DPSK

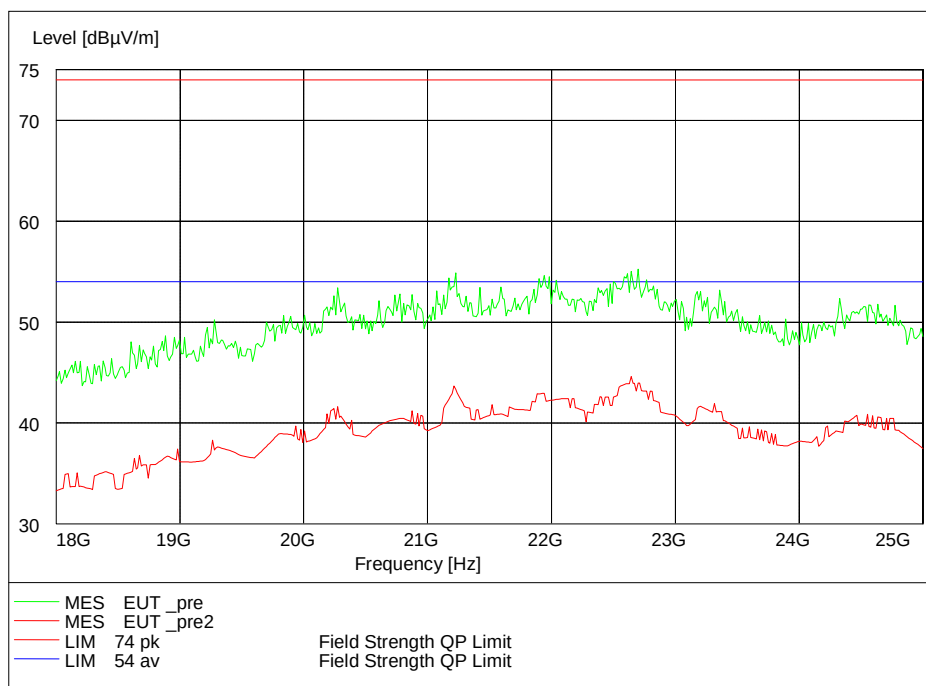

Frequency Range: 18GHz-25GHz  
Detector: Av mode and PK mode  
Modulation type: 8DPSK

## AC Power line Conducted Emission

Full Spectrum

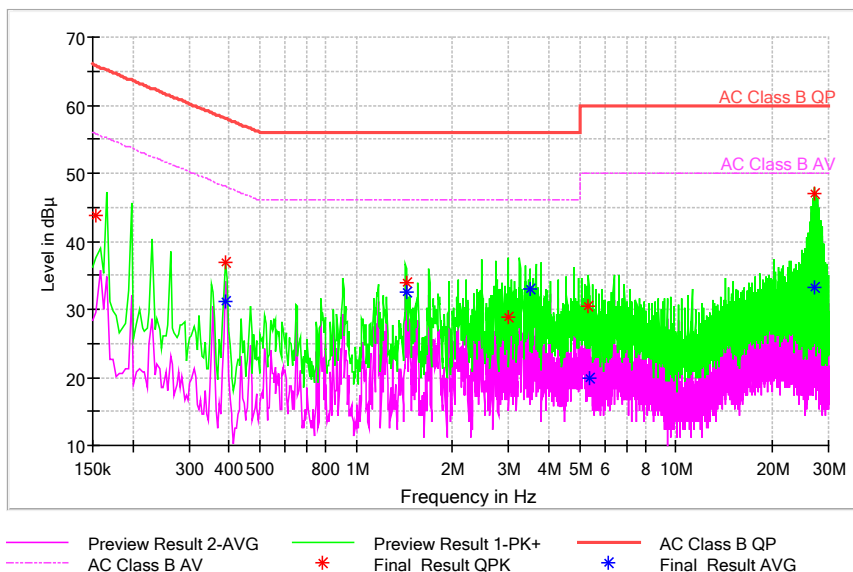

Comment

L Line


### MEASUREMENT RESULT: "MOBILE\_fin QP"

| Frequency<br>MHz | QuasiPeak<br>dBμV | Limit<br>dBμV | Margin<br>dB |
|------------------|-------------------|---------------|--------------|
| 0.154000         | 43.69             | 65.78         | 22.09        |
| 0.391000         | 36.83             | 58.04         | 21.21        |
| 1.435000         | 33.99             | 56.00         | 22.01        |
| 2.991000         | 28.78             | 56.00         | 27.22        |
| 5.335000         | 30.52             | 60.00         | 29.48        |
| 27.251000        | 46.98             | 60.00         | 13.02        |

### MEASUREMENT RESULT: "MOBILE\_fin AV"

| Frequency<br>MHz | Average<br>dBμV | Limit<br>dBμV | Margin<br>dB |
|------------------|-----------------|---------------|--------------|
| 0.391000         | 31.19           | 48.04         | 16.85        |
| 1.435000         | 32.51           | 46.00         | 13.49        |
| 3.519000         | 32.94           | 46.00         | 13.06        |
| 5.351000         | 19.94           | 50.00         | 30.06        |
| 27.247000        | 33.29           | 50.00         | 16.71        |

Full Spectrum

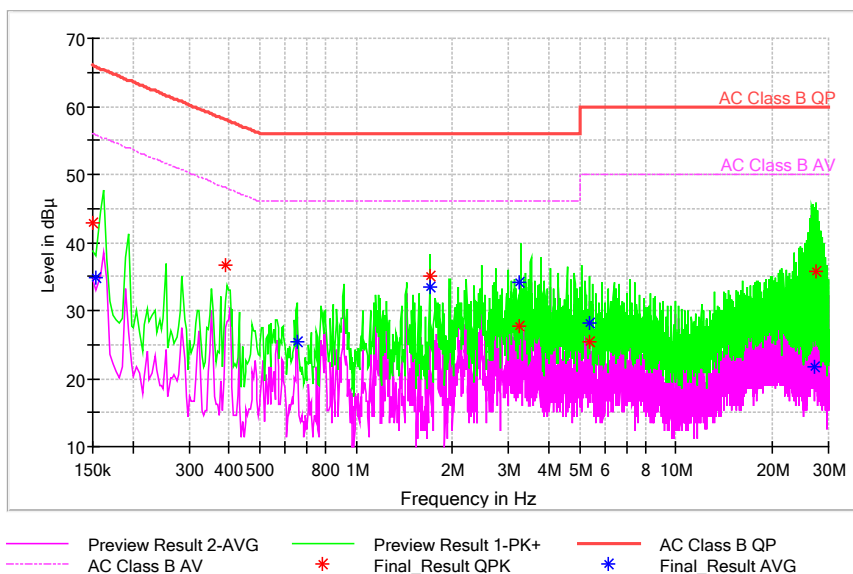

Comment

N Line


**MEASUREMENT RESULT: "MOBILE\_fin QP"**

| Frequency<br>MHz | QuasiPeak<br>dBμV | Limit<br>dBμV | Margin<br>dB |
|------------------|-------------------|---------------|--------------|
| 0.150000         | 42.92             | 66.00         | 23.08        |
| 0.391000         | 36.76             | 58.04         | 21.28        |
| 1.695000         | 35.00             | 56.00         | 21.00        |
| 3.251000         | 27.73             | 56.00         | 28.27        |
| 5.343000         | 25.39             | 60.00         | 34.61        |
| 27.299000        | 35.70             | 60.00         | 24.30        |


**MEASUREMENT RESULT: "MOBILE\_fin AV"**

| Frequency<br>MHz | Average<br>dBμV | Limit<br>dBμV | Margin<br>dB |
|------------------|-----------------|---------------|--------------|
| 0.154000         | 34.86           | 55.78         | 20.92        |
| 0.655000         | 25.47           | 46.00         | 20.53        |
| 1.699000         | 33.34           | 46.00         | 12.66        |
| 3.251000         | 34.19           | 46.00         | 11.81        |
| 5.355000         | 28.16           | 50.00         | 21.84        |
| 27.243000        | 21.66           | 50.00         | 28.34        |

## **APPENDIX C – TEST SETUP**

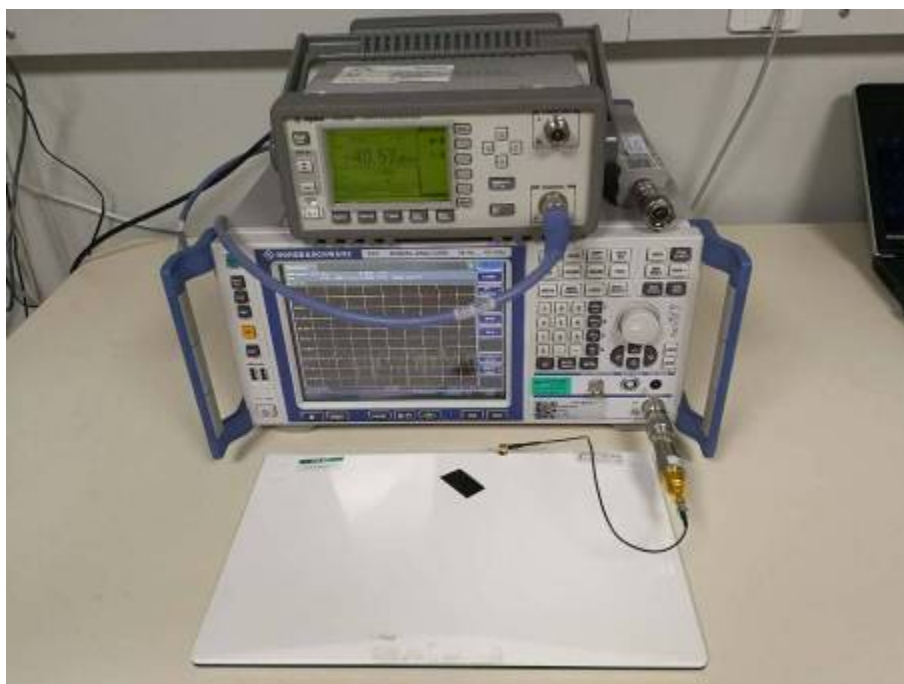


Spurious RF Conducted Emissions Test setup

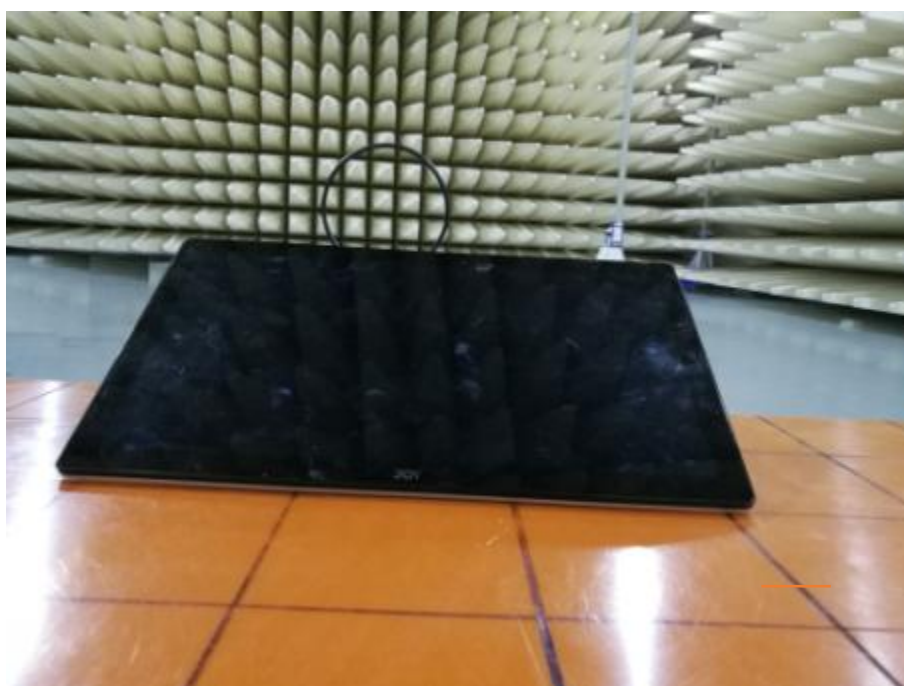


Spurious Radiated Emissions Test setup (below 30MHz)



Spurious Radiated Emissions Test setup (30MHz~1GHz)

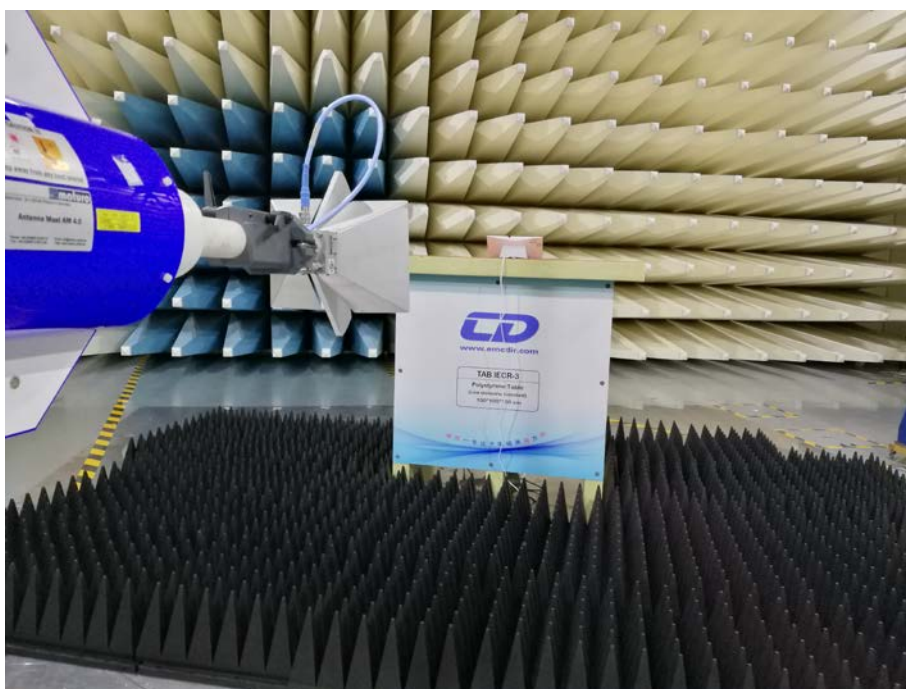

Spurious Radiated Emissions Test setup (1GHz~25GHz)

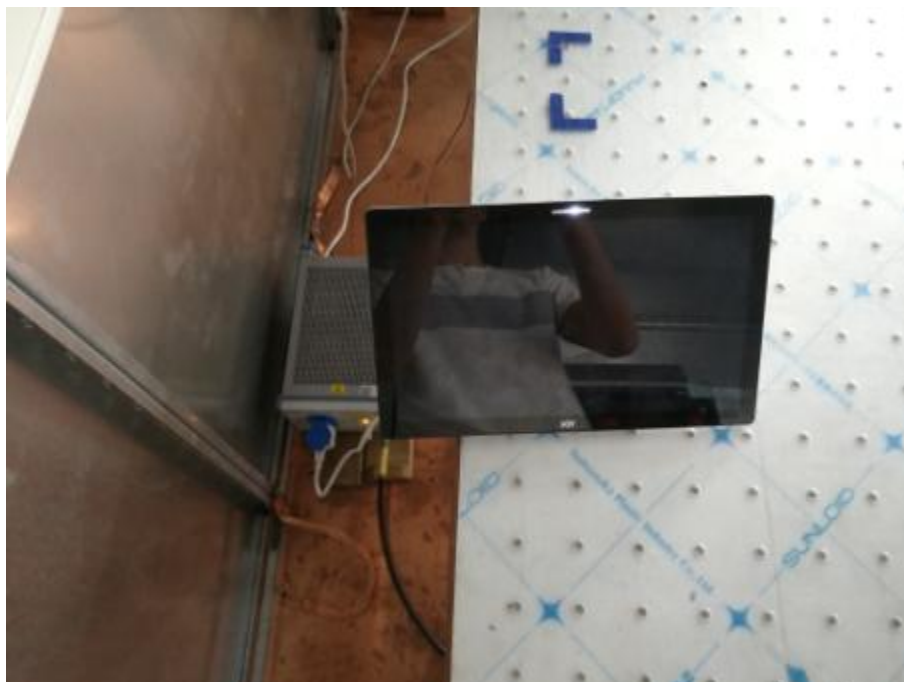

Conducted Emissions Test Setup (with charger)

---End of Test Report---