


EMC TEST REPORT



Report No.: 17020787-FCC-E1

Supersede Report No.: N/A

Applicant	RayMeasure Medical Technology Co., Ltd	
Product Name	Femtosecond Clock Distribution System	
Model No.	R1	
Serial No.	N/A	
Test Standard	FCC Part 15 Subpart B Class B:2016, ANSI C63.4: 2014	
Test Date	July 25 to July 26, 2017	
Issue Date	July 28, 2017	
Test Result	☒ Pass ☐ Fail	
Equipment complied with the specification	☒	
Equipment did not comply with the specification	☐	
		
Peter Wei Test Engineer	Deon Dai Engineer Reviewer	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (Nanjing-China) Laboratories

2-1 Longcang Avenue Yuhua Economic and
Technology Development Park, Nanjing, China

Tel: +86(25)86730128/86730129 Fax: +86(25)86730127 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report No.	17020787-FCC-E1
Page	3 of 31

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY.....	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. T ST SUMMA Y.....	7
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	8
6.1 AC POWER LINE CONDUCTED EMISSIONS.....	8
6.2 RADIATED EMISSIONS.....	14
ANNEX A. TEST INSTRUMENT	18
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS	19
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	27
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST.....	30
ANNEX E. DECLARATION OF SIMILARITY	31

1. Report Revision History

Report No.	Report Version	Description	Issue Date
17020787-FCC-E1	NONE	Original	July 28, 2017

2. Customer information

Applicant Name	RayMeasure Medical Technology Co., Ltd
Applicant Add	2F Building 17, 8 Jinfeng Road. Suzhou New District, Suzhou, Jiangsu province, China
Manufacturer	RayMeasure Medical Technology Co., Ltd
Manufacturer Add	2F Building 17, 8 Jinfeng Road. Suzhou New District, Suzhou, Jiangsu province, China

3. Test site information

Lab performing tests	SIEMIC (Nanjing-China) Laboratories
Lab Address	2-1 Longcang Avenue Yuhua Economic and Technology Development Park, Nanjing, China
FCC Test Site No.	694825
IC Test Site No.	4842B-1
Test Software	EZ EMC

4. Equipment under Test (EUT) Information

Description of EUT:	Femtosecond Clock Distribution System
Date EUT received:	June 30, 2017
Test Date(s):	July 25 to July 26, 2017
Main Model:	R1
Serial Model:	N/A
Input Power:	XP Power: Model:VEP36US12 Input Power:100-240V~0.9A,50/60Hz Output:12V,3A
Port:	Power Port、LAN Port、USB Port
Trade Name :	DexClcok
Test Software Version	1.1.2.0
FCC ID:	2AMPU-010000

5. Test Summary

The product was tested in accordance with the following specifications.
All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.107; ANSI C63.4: 2014	AC Power Line Conducted Emissions	Compliance
§15.109; ANSI C63.4: 2014	Radiated Emissions	Compliance

Measurement Uncertainty


Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB

6. Measurements, Examination And Derived Results

6.1 AC Power Line Conducted Emissions

Temperature	24°C
Relative Humidity	56%
Atmospheric Pressure	1023mbar
Test date :	July 25, 2017
Tested By :	Peter Wei

Requirement(s):

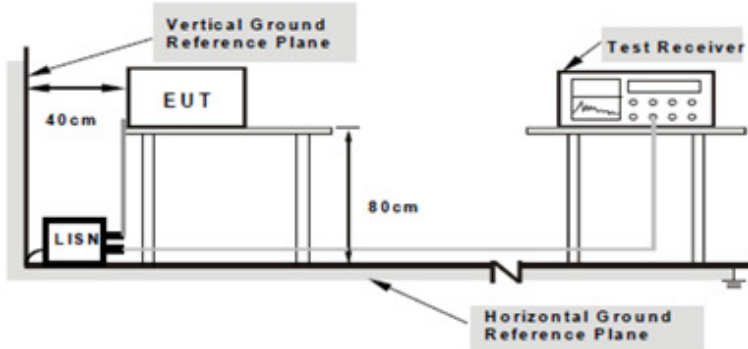Spec	Item	Requirement	Applicable														
47CFR§15.107	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu] H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.	☒														
		<table><tr><th rowspan="2">Frequency ranges (MHz)</th><th colspan="2">Limit (dBµV)</th></tr><tr><th>QP</th><th>Average</th></tr><tr><td>0.15 ~ 0.5</td><td>66 – 56</td><td>56 – 46</td></tr><tr><td>0.5 ~ 5</td><td>56</td><td>46</td></tr><tr><td>5 ~ 30</td><td>60</td><td>50</td></tr></table>		Frequency ranges (MHz)	Limit (dBµV)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50
		Frequency ranges (MHz)			Limit (dBµV)												
				QP	Average												
		0.15 ~ 0.5		66 – 56	56 – 46												
0.5 ~ 5	56	46															
5 ~ 30	60	50															
Test Setup																	
		Note: 1.Support units were connected to second LISN.															
		2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.															
Procedure	1.	The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.															
	2.	The power supply for the EUT was fed through a 50Ω/50mH EUT LISN, connected to filtered mains.															
	3.	The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.															
	4.	All other supporting equipment were powered separately from another main supply.															
	5.	The EUT was switched on and allowed to warm up to its normal operating condition.															
	6.	A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.															
	7.	High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz.															
	8.	Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).															
Remark																	
Result	☒ Pass ☐ Fail																

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Data sample

No.	Frequency (MHz)	Reading (dBμV)	Detector	Lisn/Isn (dB)	Ps_Lmt (dB)	Cab_L (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)
-----	--------------------	-------------------	----------	------------------	----------------	---------------	------------------	-----------------	----------------

Frequency (MHz) = Emission frequency in MHz

Reading (dBμV) = Receiver Reading Value

Detector=Quasi Peak Detector or Average Detector

Lisn/Isn= Insertion loss of LISN

Ps_Lmt= Insertion loss of transient limiter (The transient limiter included 10dB attenuation)

Cab_L= cable loss


Result (dBμV) = Reading Value + Corrected Value

Limit (dBμV) = Limit stated in standard

Calculation Formula:

Margin (dB) = Result (dBμV) – limit (dBμV)

Test Mode : Normal Working Mode

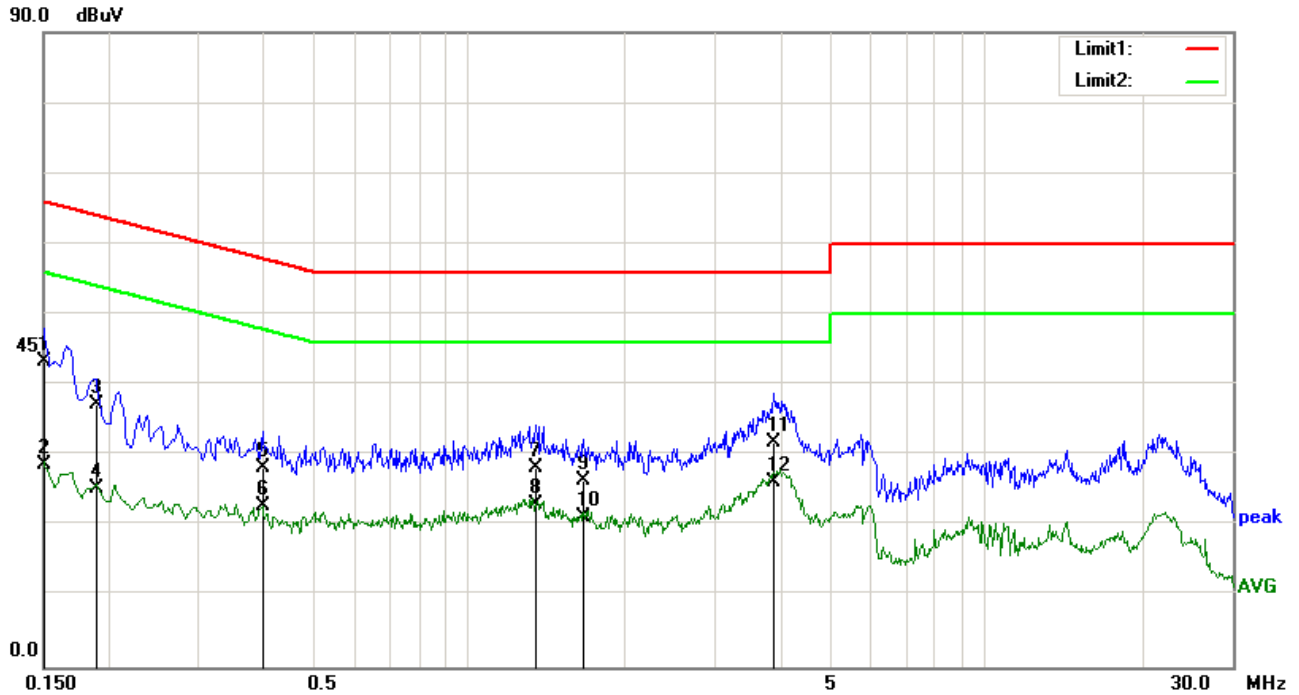


Test Data

Phase Line Plot at 120Vac, 60Hz

No.	Frequency (MHz)	Reading (dBuV)	Detector	Lisn/Isn (dB)	Ps Lmt (dB)	Cab L (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	0.1500	32.91	QP	0.10	-10.00	0.36	43.37	66.00	-22.63
2	0.1500	18.20	AVG	0.10	-10.00	0.36	28.66	56.00	-27.34
3	0.1900	26.91	QP	0.10	-10.00	0.30	37.31	64.04	-26.73
4	0.1900	15.00	AVG	0.10	-10.00	0.30	25.40	54.04	-28.64
5	0.3980	17.97	QP	0.11	-10.00	0.21	28.29	57.90	-29.61
6	0.3980	12.44	AVG	0.11	-10.00	0.21	22.76	47.90	-25.14
7	1.3460	17.98	QP	0.15	-10.00	0.21	28.34	56.00	-27.66
8	1.3460	12.71	AVG	0.15	-10.00	0.21	23.07	46.00	-22.93
9	1.6660	16.01	QP	0.15	-10.00	0.21	26.37	56.00	-29.63
10	1.6660	10.91	AVG	0.15	-10.00	0.21	21.27	46.00	-24.73
11	3.8980	21.26	QP	0.23	-10.00	0.26	31.75	56.00	-24.25
12	3.8980	15.66	AVG	0.23	-10.00	0.26	26.15	46.00	-19.85

Test Mode : Normal Working Mode

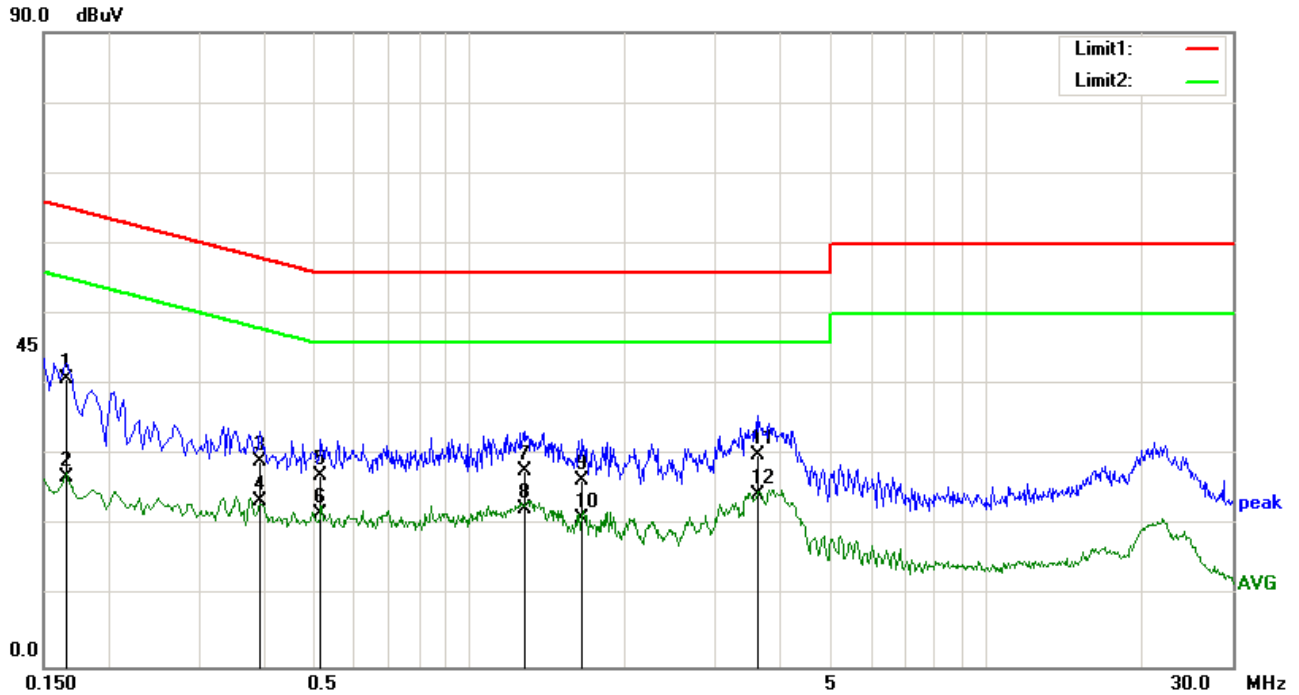


Test Data

Phase Neutral Plot at 120Vac, 60Hz

No.	Frequency (MHz)	Reading (dBuV)	Detector	Lisn/Isn (dB)	Ps Lmt (dB)	Cab L (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	0.1660	30.37	QP	0.11	-10.00	0.33	40.81	65.16	-24.35
2	0.1660	16.50	AVG	0.11	-10.00	0.33	26.94	55.16	-28.22
3	0.3940	18.86	QP	0.11	-10.00	0.21	29.18	57.98	-28.80
4	0.3940	13.26	AVG	0.11	-10.00	0.21	23.58	47.98	-24.40
5	0.5180	16.70	QP	0.11	-10.00	0.21	27.02	56.00	-28.98
6	0.5180	11.33	AVG	0.11	-10.00	0.21	21.65	46.00	-24.35
7	1.2860	17.34	QP	0.14	-10.00	0.21	27.69	56.00	-28.31
8	1.2860	12.01	AVG	0.14	-10.00	0.21	22.36	46.00	-23.64
9	1.6540	15.98	QP	0.16	-10.00	0.21	26.35	56.00	-29.65
10	1.6540	10.63	AVG	0.16	-10.00	0.21	21.00	46.00	-25.00
11	3.6300	19.62	QP	0.23	-10.00	0.25	30.10	56.00	-25.90
12	3.6300	14.02	AVG	0.23	-10.00	0.25	24.50	46.00	-21.50

Test Mode : Normal Working Mode

90.0 dBuV

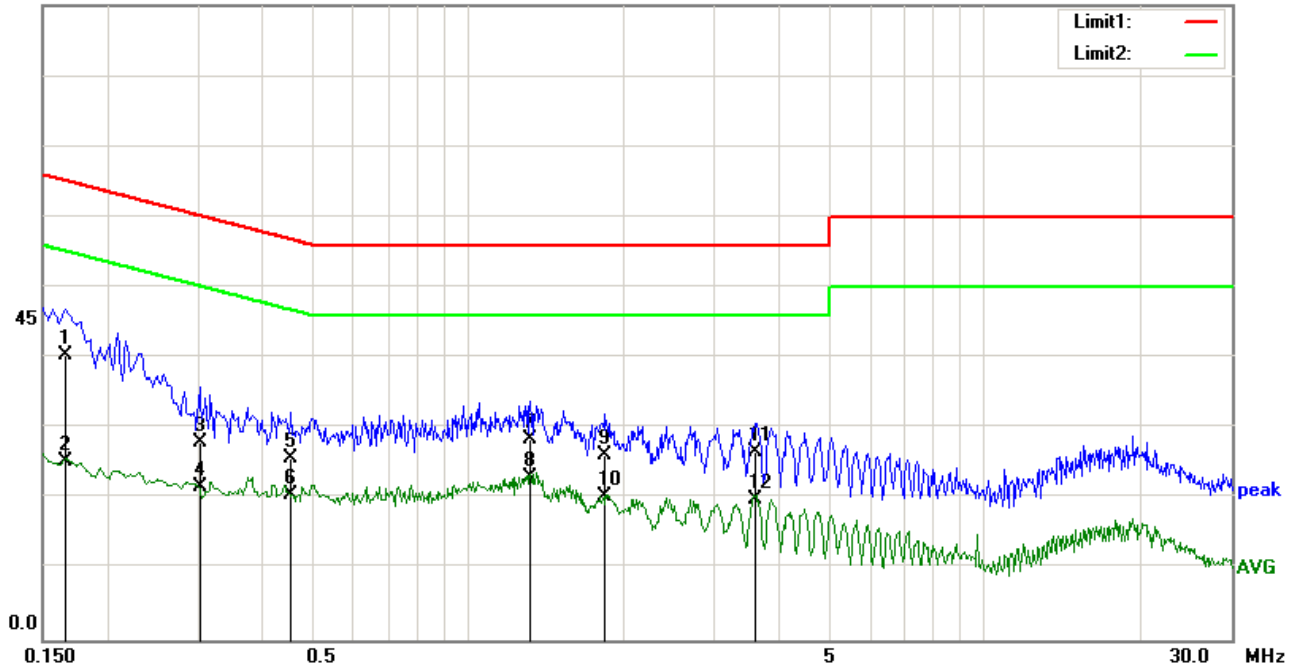


Test Data

Phase Line Plot at 230Vac, 50Hz

No.	Frequency (MHz)	Reading (dBuV)	Detector	Lisn/Isn (dB)	Ps_Lmt (dB)	Cab_L (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	0.1660	29.99	QP	0.10	-10.00	0.33	40.42	65.16	-24.74
2	0.1660	14.93	AVG	0.10	-10.00	0.33	25.36	55.16	-29.80
3	0.3020	17.75	QP	0.11	-10.00	0.20	28.06	60.19	-32.13
4	0.3020	11.43	AVG	0.11	-10.00	0.20	21.74	50.19	-28.45
5	0.4540	15.53	QP	0.12	-10.00	0.21	25.86	56.80	-30.94
6	0.4540	10.35	AVG	0.12	-10.00	0.21	20.68	46.80	-26.12
7	1.3220	18.18	QP	0.15	-10.00	0.21	28.54	56.00	-27.46
8	1.3220	12.66	AVG	0.15	-10.00	0.21	23.02	46.00	-22.98
9	1.8460	15.87	QP	0.16	-10.00	0.20	26.23	56.00	-29.77
10	1.8460	9.96	AVG	0.16	-10.00	0.20	20.32	46.00	-25.68
11	3.6020	16.24	QP	0.22	-10.00	0.25	26.71	56.00	-29.29
12	3.6020	9.50	AVG	0.22	-10.00	0.25	19.97	46.00	-26.03

Test Mode : Normal Working Mode

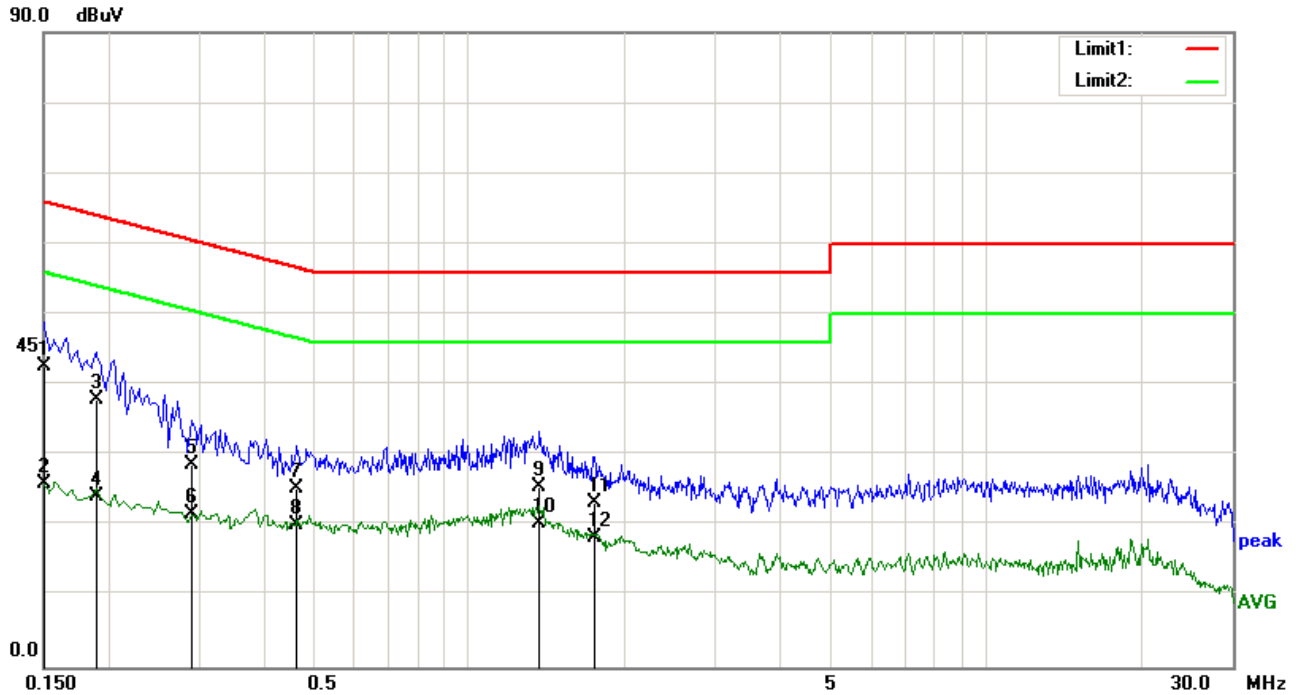

Test Data

Phase Neutral Plot at 230Vac, 50Hz


No.	Frequency (MHz)	Reading (dBuV)	Detector	Lisn/Isn (dB)	Ps_Lmt (dB)	Cab_L (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	0.1500	32.23	QP	0.11	-10.00	0.36	42.70	66.00	-23.30
2	0.1500	15.49	AVG	0.11	-10.00	0.36	25.96	56.00	-30.04
3	0.1900	27.55	QP	0.10	-10.00	0.30	37.95	64.04	-26.09
4	0.1900	13.85	AVG	0.10	-10.00	0.30	24.25	54.04	-29.79
5	0.2900	18.33	QP	0.10	-10.00	0.20	28.63	60.52	-31.89
6	0.2900	11.41	AVG	0.10	-10.00	0.20	21.71	50.52	-28.81
7	0.4660	15.02	QP	0.11	-10.00	0.21	25.34	56.58	-31.24
8	0.4660	9.92	AVG	0.11	-10.00	0.21	20.24	46.58	-26.34
9	1.3700	15.20	QP	0.14	-10.00	0.21	25.55	56.00	-30.45
10	1.3700	10.04	AVG	0.14	-10.00	0.21	20.39	46.00	-25.61
11	1.7500	12.98	QP	0.16	-10.00	0.21	23.35	56.00	-32.65
12	1.7500	7.91	AVG	0.16	-10.00	0.21	18.28	46.00	-27.72

6.2 Radiated Emissions

Temperature	24°C
Relative Humidity	56%
Atmospheric Pressure	1023mbar
Test date :	July 26, 2017
Tested By :	Peter Wei

Requirement(s):

Spec	Item	Requirement	Applicable	
47CFR§15.109(d)	a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges	☐	
		Frequency range (MHz)		Field Strength (µV/m)
		30 – 88		100
		88 – 216		150
		216 960		200
		Above 960		500

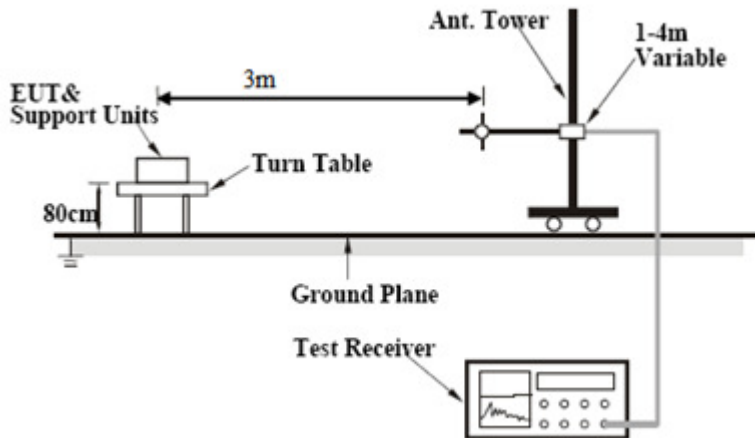Test Setup	
------------	--

Procedure	- The EUT was switched on and allowed to warm up to its normal operating condition. - The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: - Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen. - The EUT was then rotated to the direction that gave the maximum emission. - Finally, the antenna height was adjusted to the height that gave the maximum emission. - The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi Peak detection at frequency below 1GHz. - The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth with Peak detection for Average Measurement as below at frequency above 1GHz. ■ 1 kHz (Duty cycle < 98%) □ 10 Hz (Duty cycle > 98%) - Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.
Remark	

Result	☒ Pass ☐ Fail
--------	--

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Data sample

No.	Frequency	Reading	Detector	Ant_F	PA_G	Cab_L	Result	Limit	Margin	Height	Degree
	(MHz)	(dBμV/m)		(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(cm)	(°)

Frequency (MHz) = Emission frequency in MHz

Reading (dBμV/m) = Receiver Reading Value

Detector= Peak Detector or Quasi Peak Detector

Ant_F=Antenna Factor

PA_G=Pre-Amplifier Gain

Cab_L=Cable Loss

Result (dBμV/m) = Reading Value + Corrected Value

Limit (dBμV/m) = Limit stated in standard

Height (cm) = Height of Receiver antenna


Degree = Turn table degree

Calculation Formula:

Margin (dB) = Result (dBμV/m) – limit (dBμV/m)

Test Mode : Normal Working Mode

Below 1GHz

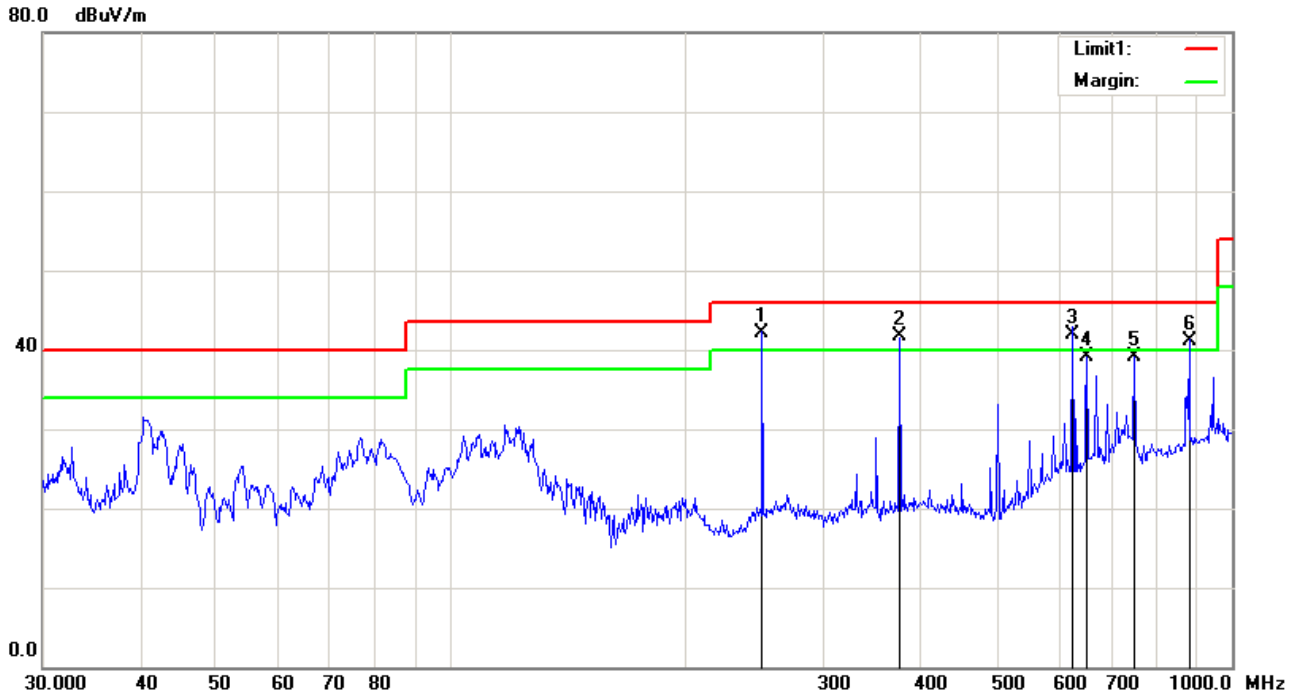


Test Data

Vertical Polarity Plot @3m

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Ant F (dB/m)	PA G (dB)	Cab L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	250.3012	72.43	QP	14.90	47.74	2.51	42.10	46.00	-3.90	100	326
2	375.9385	70.94	QP	16.51	48.77	3.12	41.80	46.00	-4.20	200	143
3	625.0780	64.12	QP	20.84	46.97	4.01	42.00	46.00	-4.00	100	214
4	651.9417	61.61	peak	21.47	48.15	4.10	39.03	46.00	-6.97	100	165
5	750.1083	57.71	peak	22.07	45.02	4.40	39.16	46.00	-6.84	100	280
6	881.4067	58.97	QP	23.28	45.95	4.80	41.10	46.00	-4.90	200	289

Test Mode : Normal Working Mode

Below 1GHz

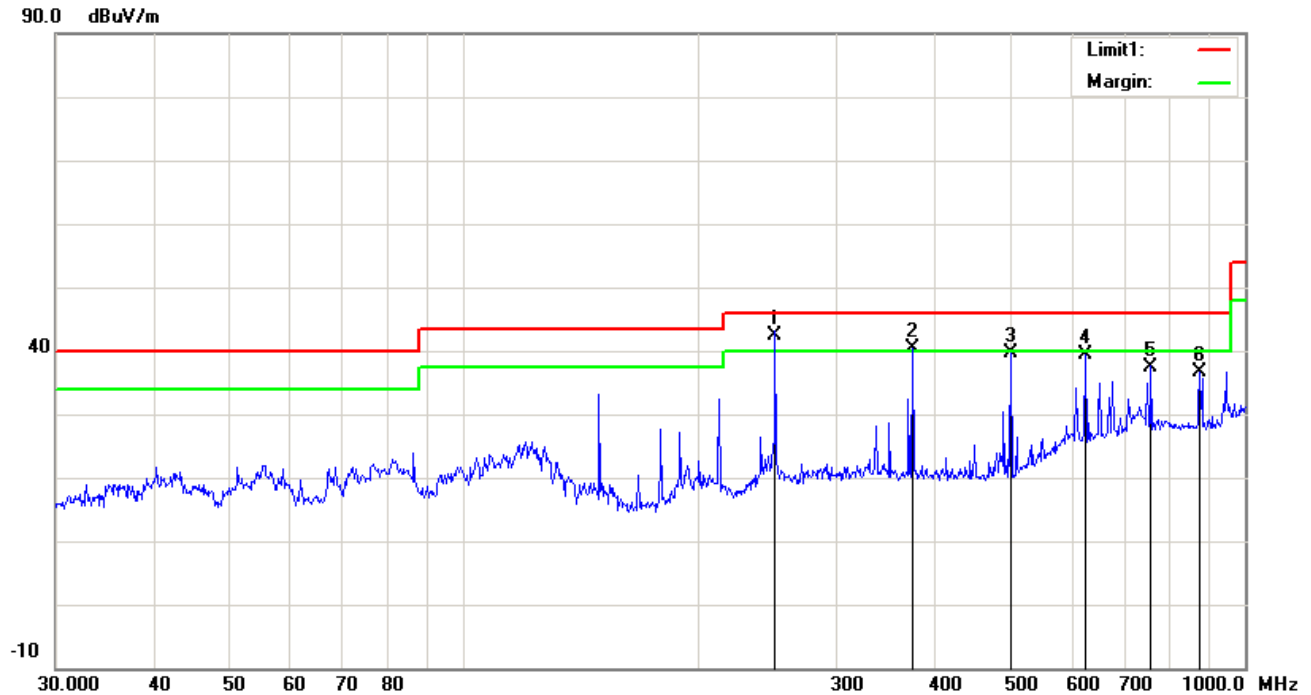

Test Data

Horizontal Polarity Plot @3m

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	250.3012	72.57	QP	15.16	47.74	2.51	42.50	46.00	-3.50	200	120
2	375.9385	69.86	QP	16.22	48.77	3.12	40.43	46.00	-5.57	300	185
3	501.1790	69.33	peak	16.06	49.27	3.56	39.68	46.00	-6.32	200	219
4	625.0780	60.70	peak	21.55	46.97	4.01	39.29	46.00	-6.71	200	46
5	758.0408	55.29	peak	22.75	44.96	4.42	37.50	46.00	-8.50	300	82
6	875.2470	55.07	peak	22.77	46.00	4.78	36.62	46.00	-9.38	300	286

Note: The highest frequency of the internal sources of the EUT is less than 108MHz, so the measurement shall only be made up to 1GHz.

Annex A. TEST INSTRUMENT


Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted Emissions					
R&S EMI Test Receiver	ESPI3	101216	05/03/2017	05/02/2018	☒
V-LISN	ESH3-Z5	838979/005	05/15/2017	05/14/2018	☒
SIEMIC EZ EMC Conducted Emissions	Ver.ICP- 03A1	N/A	N/A	N/A	☒
Radiated Emissions					
Spectrum Analyzer	N9010A	MY47191130	05/03/2017	05/02/2018	☐
R&S EMI Receiver	ESPI3	101216	05/03/2017	05/02/2018	☒
Antenna (30MHz~6GHz)	JB6	A121411	10/31/2016	10/31/2017	☒
EMCO Horn Antenna (1 ~18GHz)	3115	N/A	11/15/2016	11/14/2017	☐
Hp Pre-Amplifier	8447F	1937A01160	10/31/2016	10/30/2017	☒
Agilent Pre-Amplifier	8449B	N/A	10/31/2016	10/30/2017	☐
SIEMIC EZ EMC Radiated Emissions software	Ver.ICP- 03A1	N/A	N/A	N/A	☒

Annex B. EUT And Test Setup Photographs


Annex B.i. Photograph: EUT External Photo



The Whole of EUT - Front View

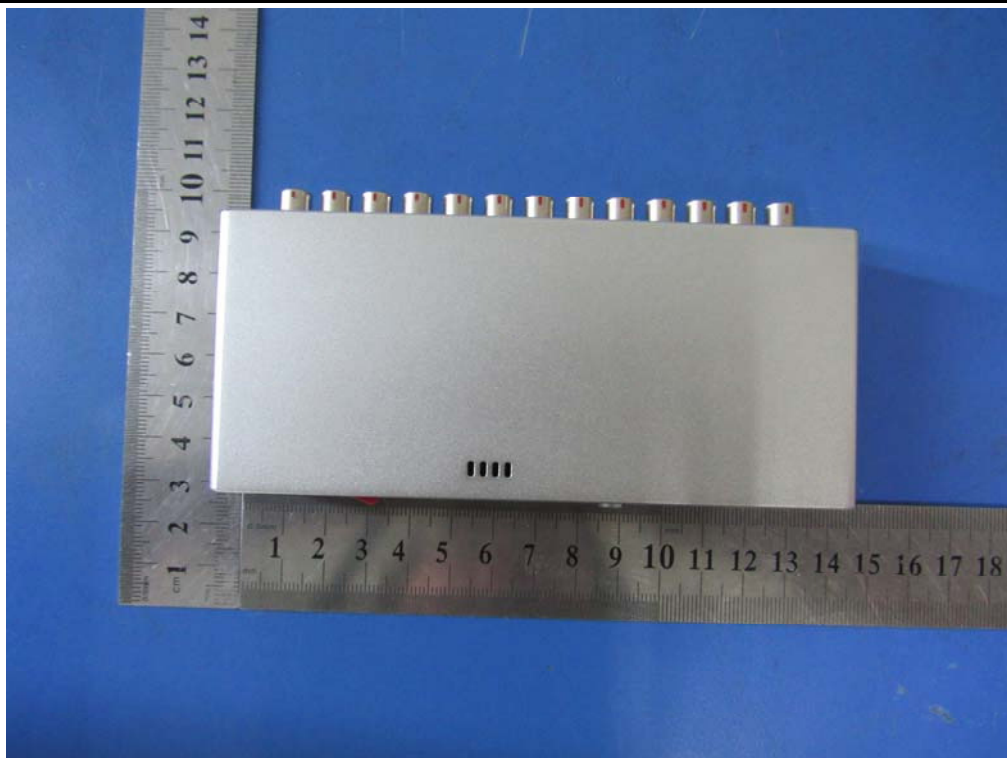

EUT - Top View

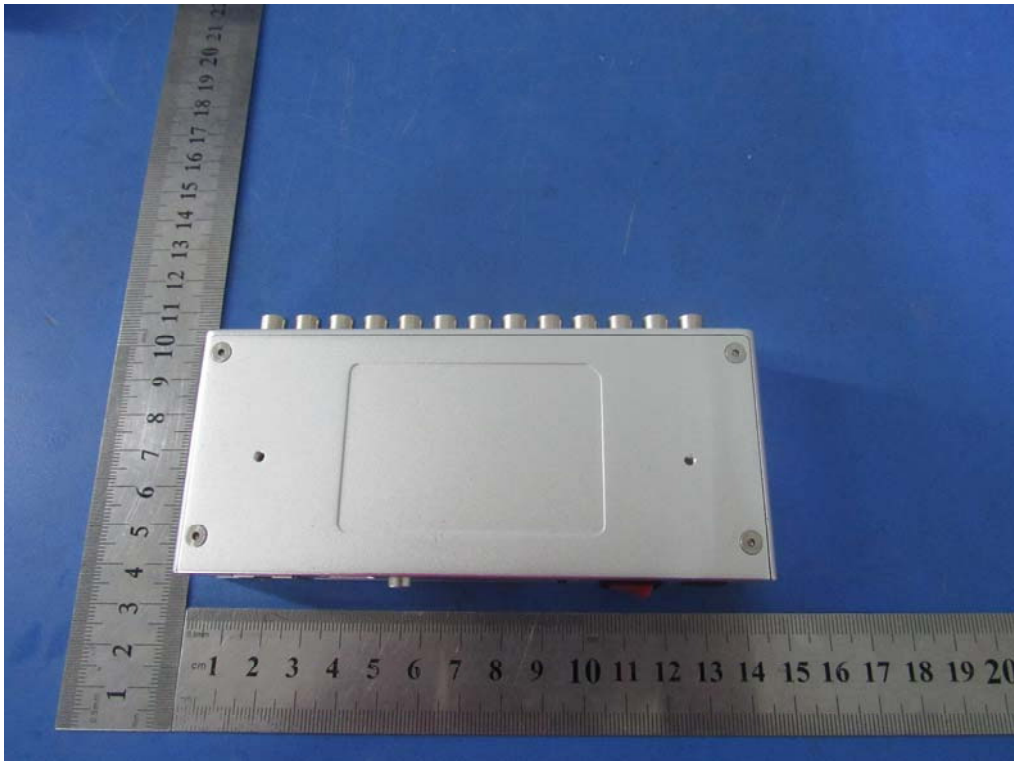


EUT - Bottom View




EUT - Front View



EUT - Rear View

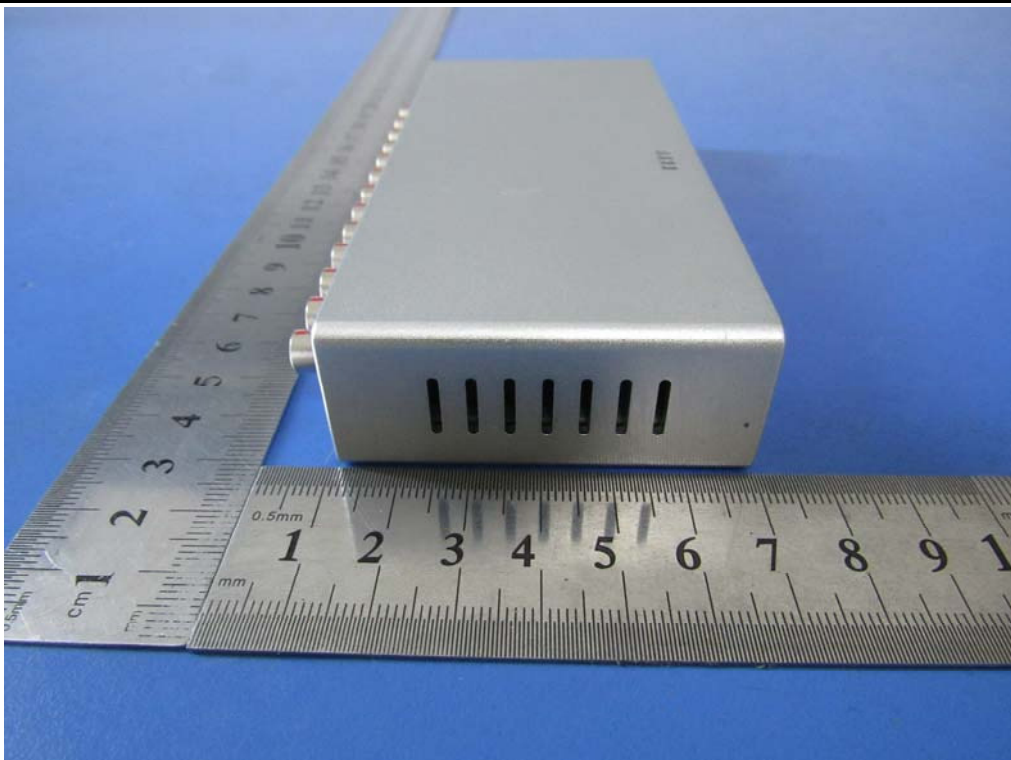


EUT - Left View

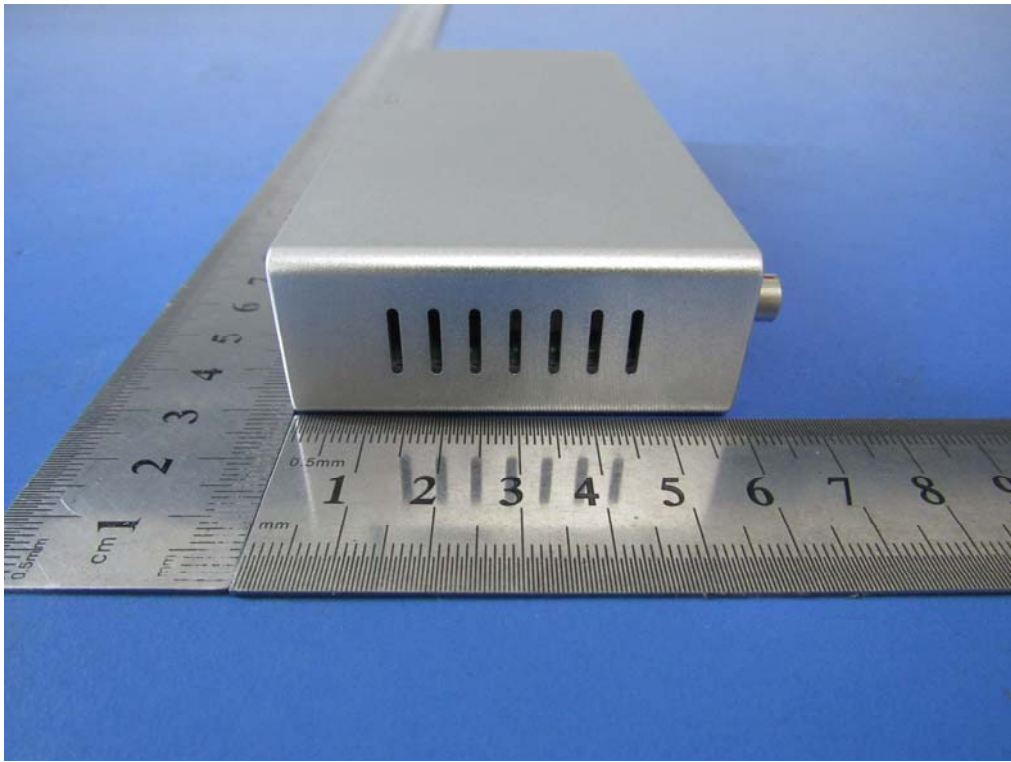


EUT - Right View


Annex B.ii. Photograph: EUT Internal Photo

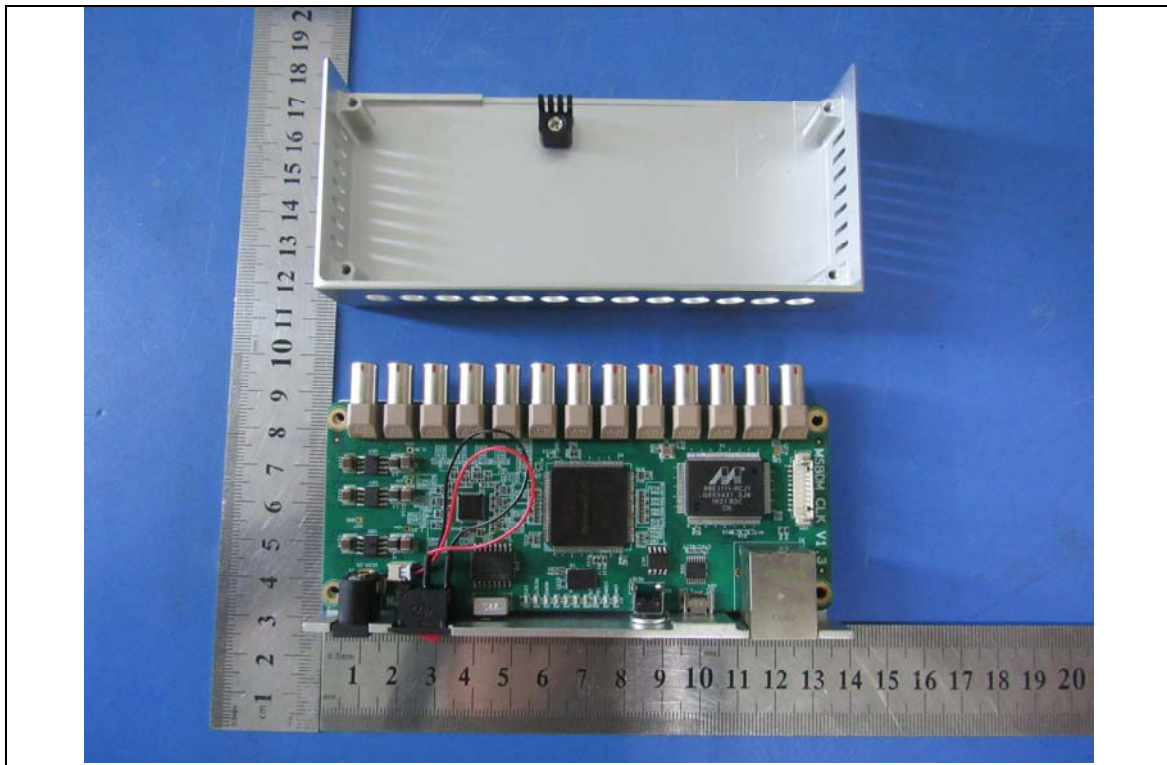

EUT Uncover – Front View

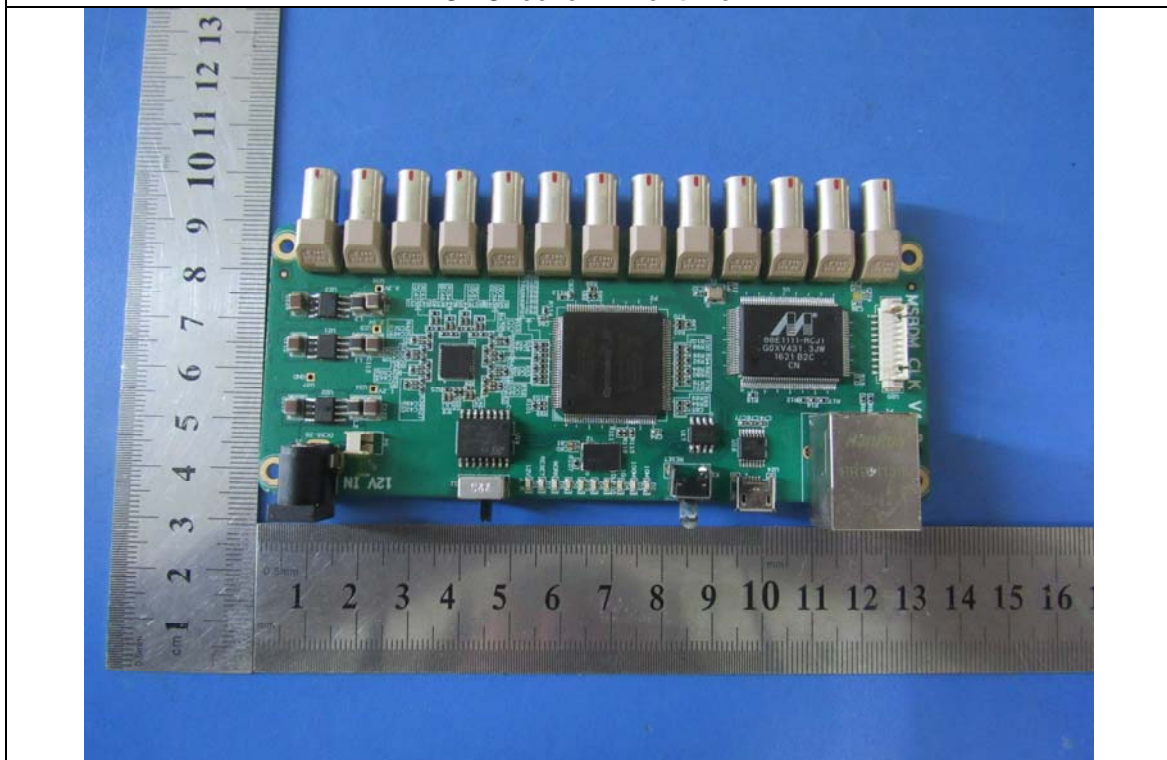

EUT PCBA – Front View

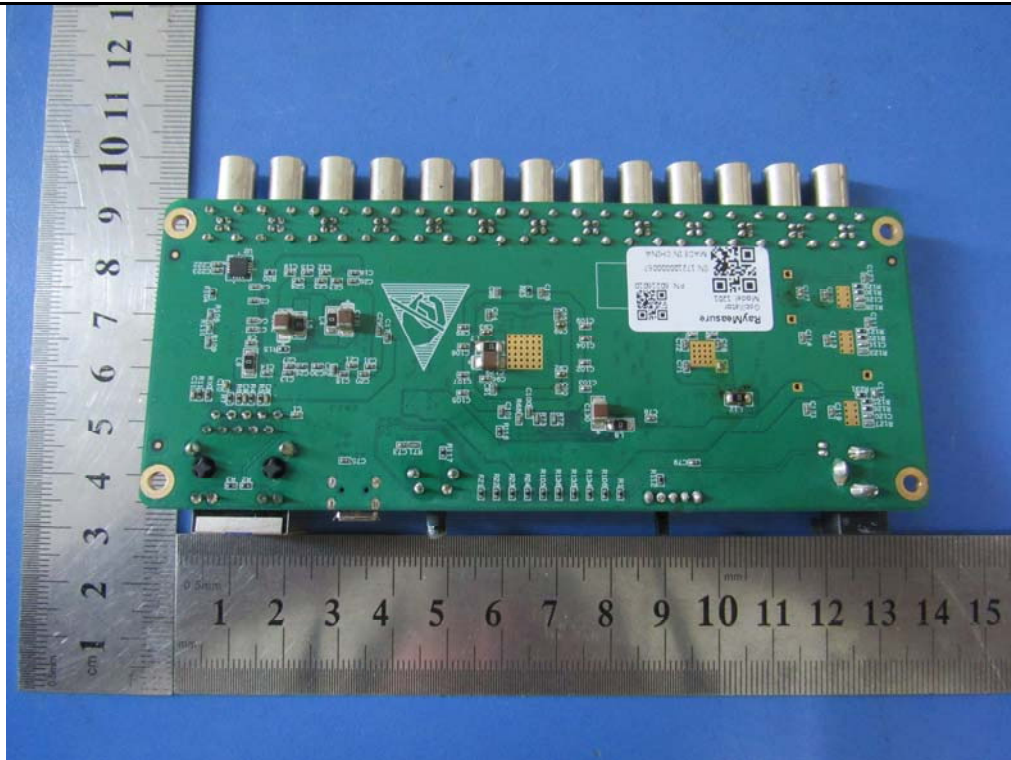

EUT PCBA – Rear View


Annex B.iii. Photograph: Test Setup Photo




Conducted Emissions Test Setup Front View



Conducted Emissions Test Setup Side View

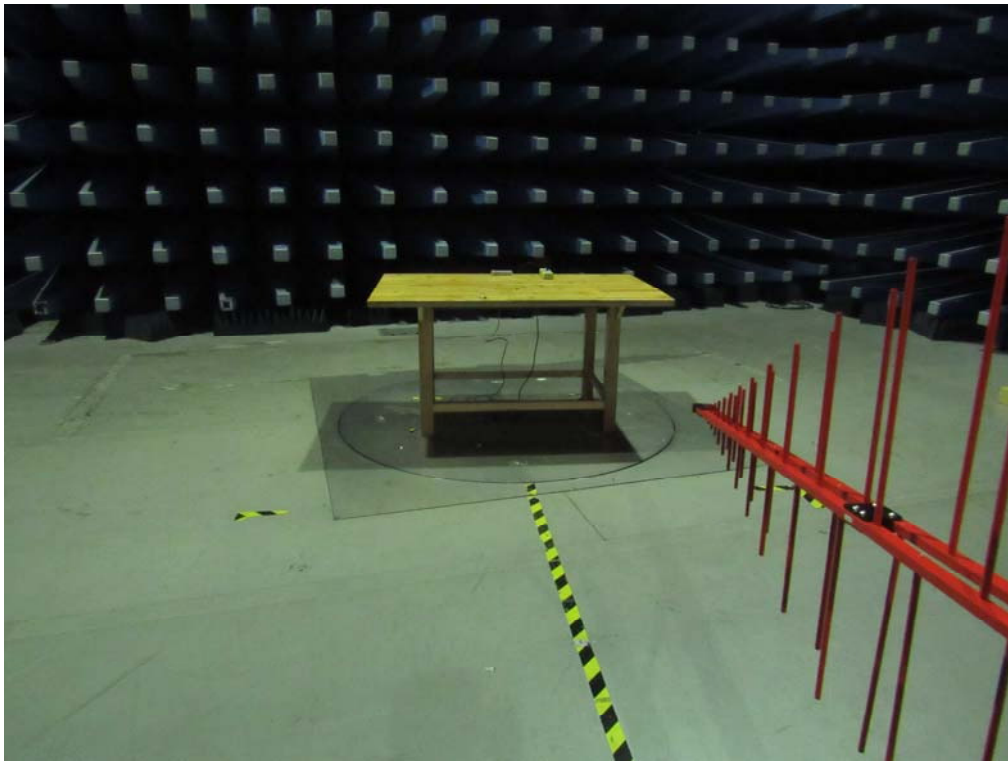

Radiated Spurious Emissions Test Setup Below 1GHz

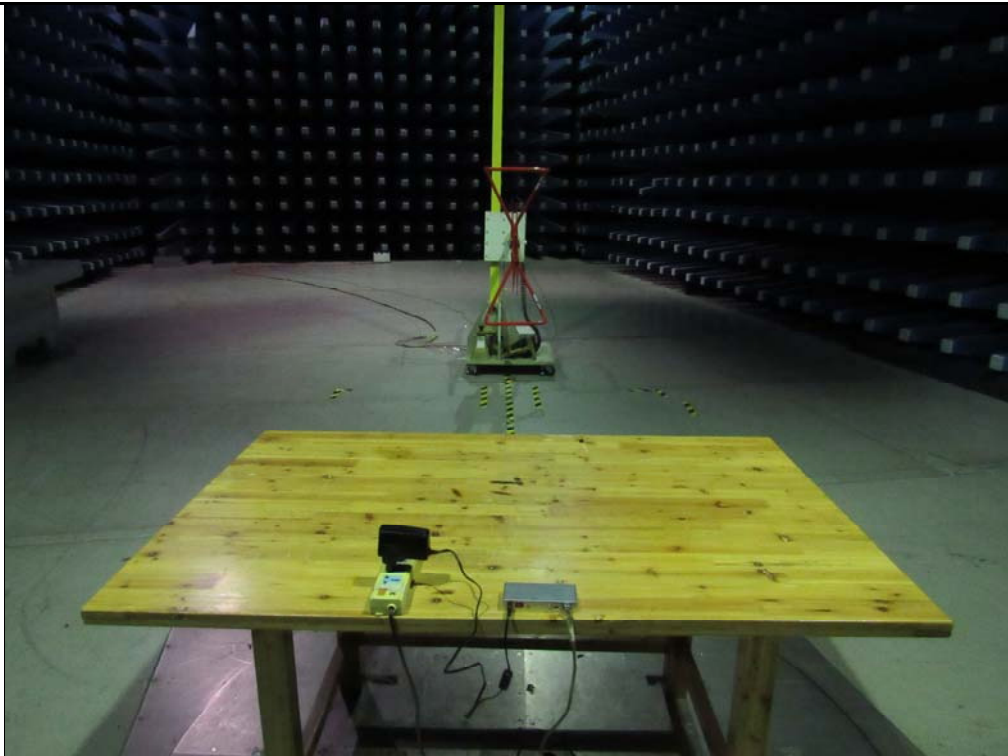


Radiated Spurious Emissions Test Setup Below 1GHz


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for Conducted Emissions

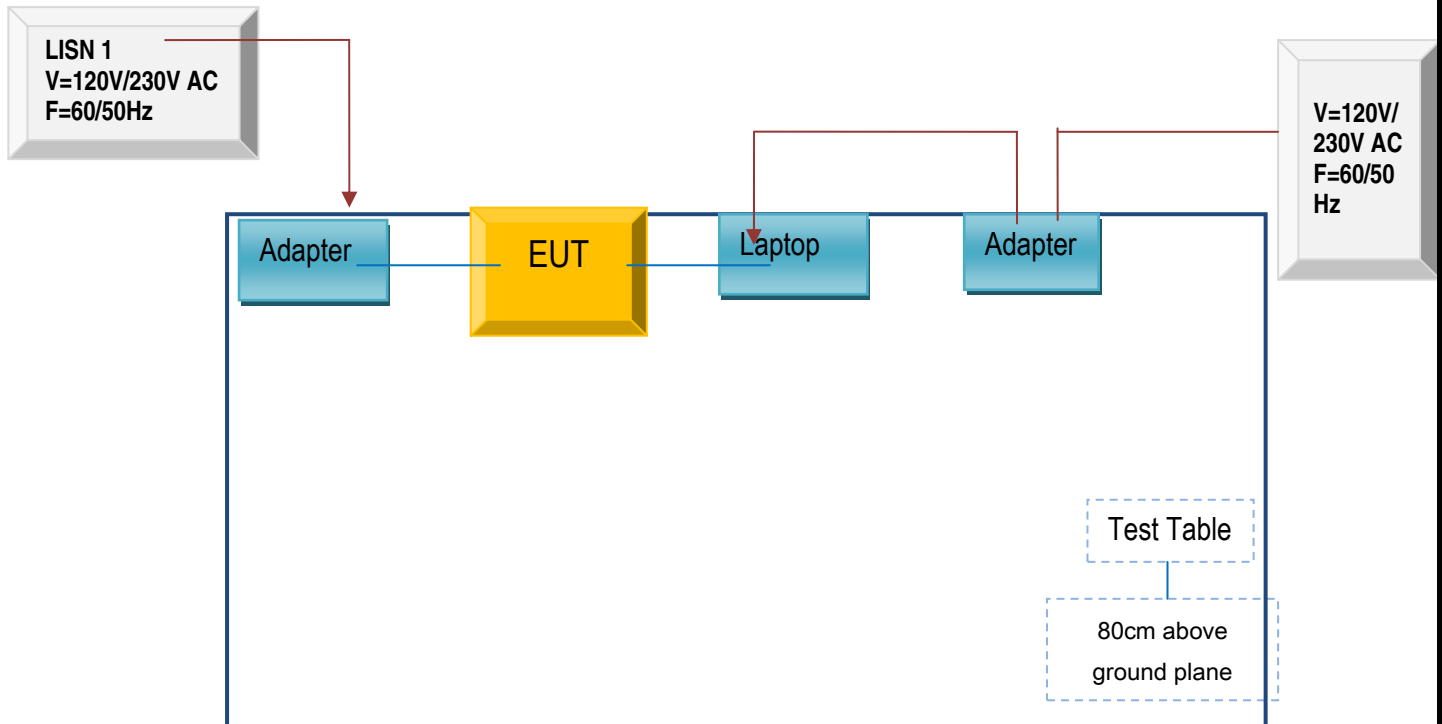

Block Configuration Diagram for Radiated Emissions

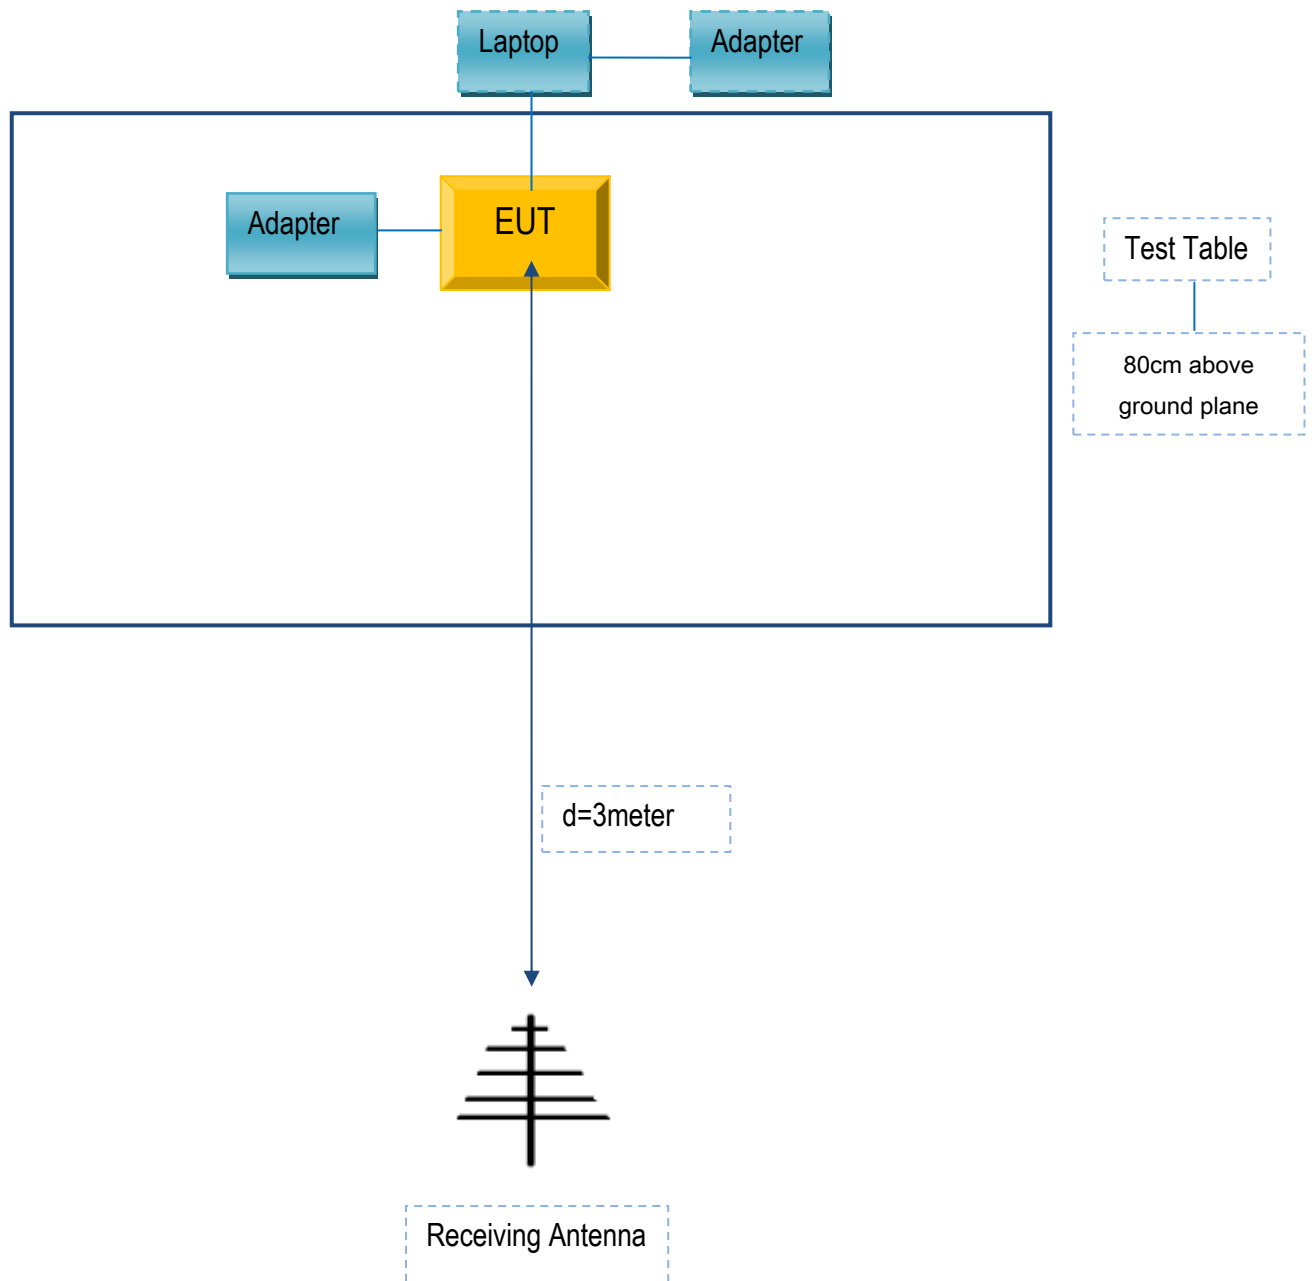

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
DELL	Laptop	4321S	N/A

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
Power Cable	Un-shielding	No	0.8m	N/A

Test Report No.	17020787-FCC-E1
Page	30 of 31

Annex D. User Manual / Block Diagram / Schematics / Partlist

See attachment

Test Report No.	17020787-FCC-E1
Page	31 of 31

Annex E. DECLARATION OF SIMILARITY

N/A