


15.4 TEST DATA

[TestMode: TX low channel]; [Polarity: Horizontal]

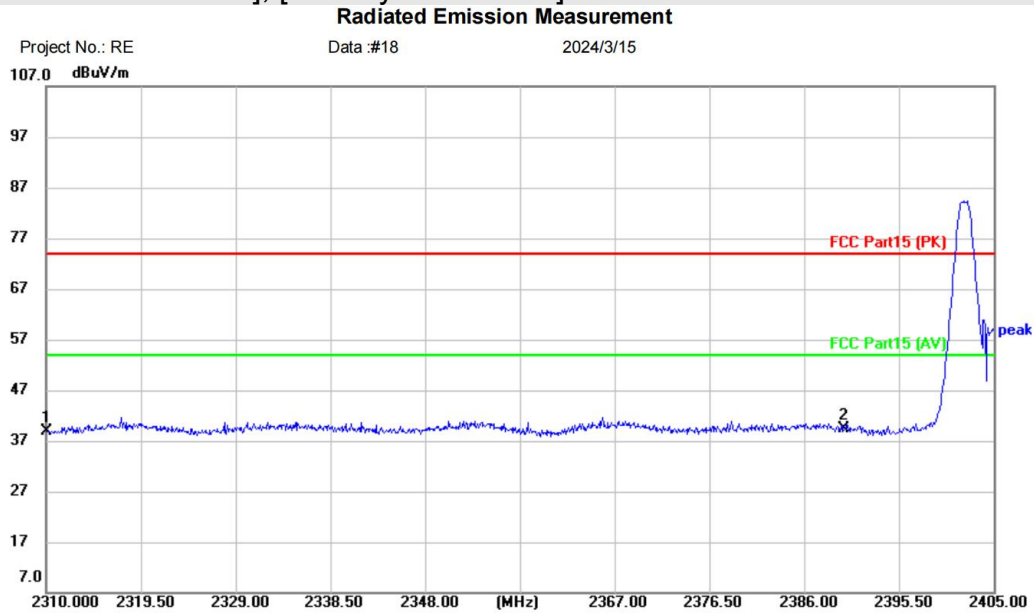


Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: Filwans GTS		
M/N: Filwans GTS		
Mode: BLE-TX-2402		
Note:		

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	2310.000	41.89	-2.89	39.00	74.00	-35.00	peak	
2 *	2390.000	41.98	-2.70	39.28	74.00	-34.72	peak	


Test Result: Pass

[TestMode:TX low channel]; [Polarity: Vertical]

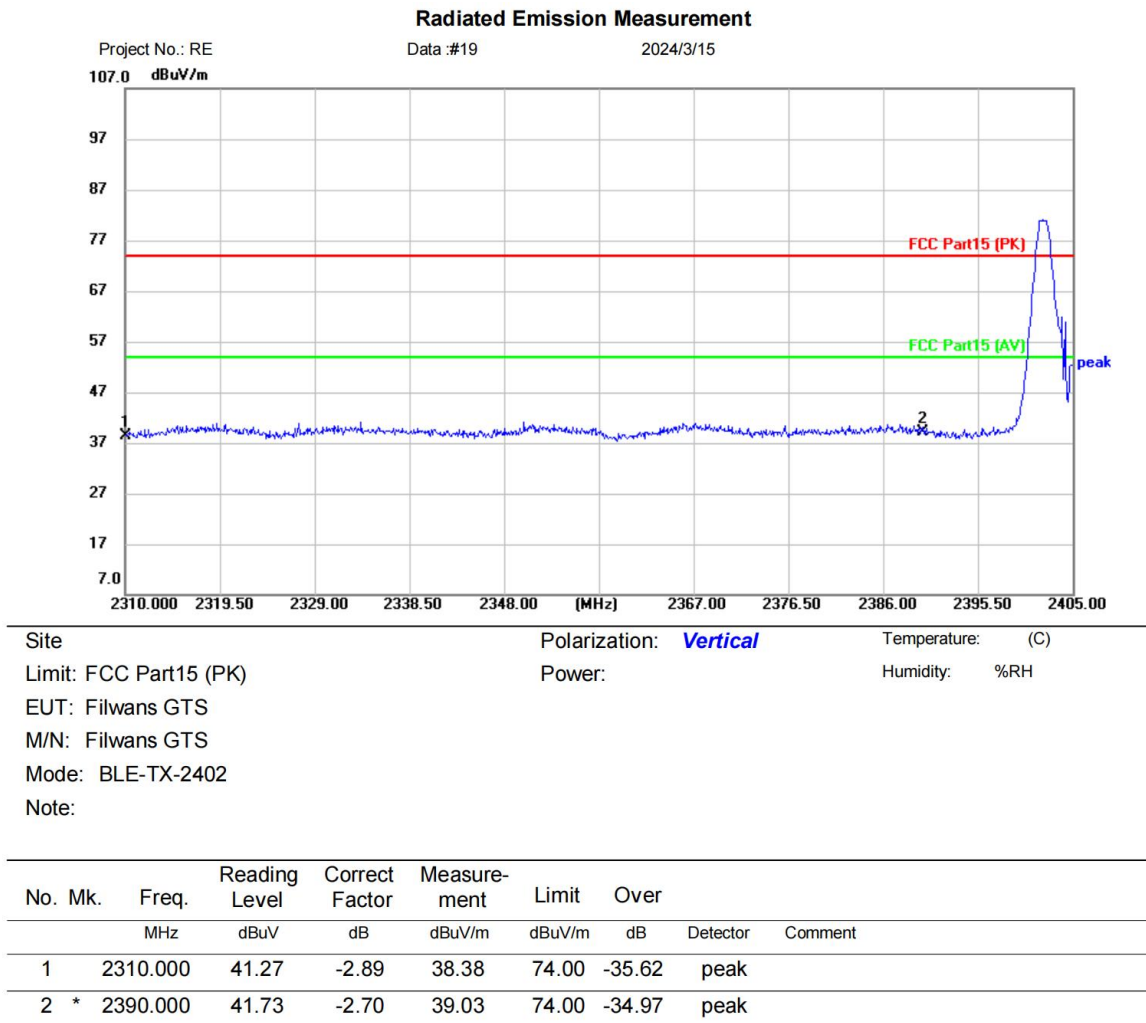

Test Result: Pass


[TestMode: TX High channel]; [Polarity: Horizontal]

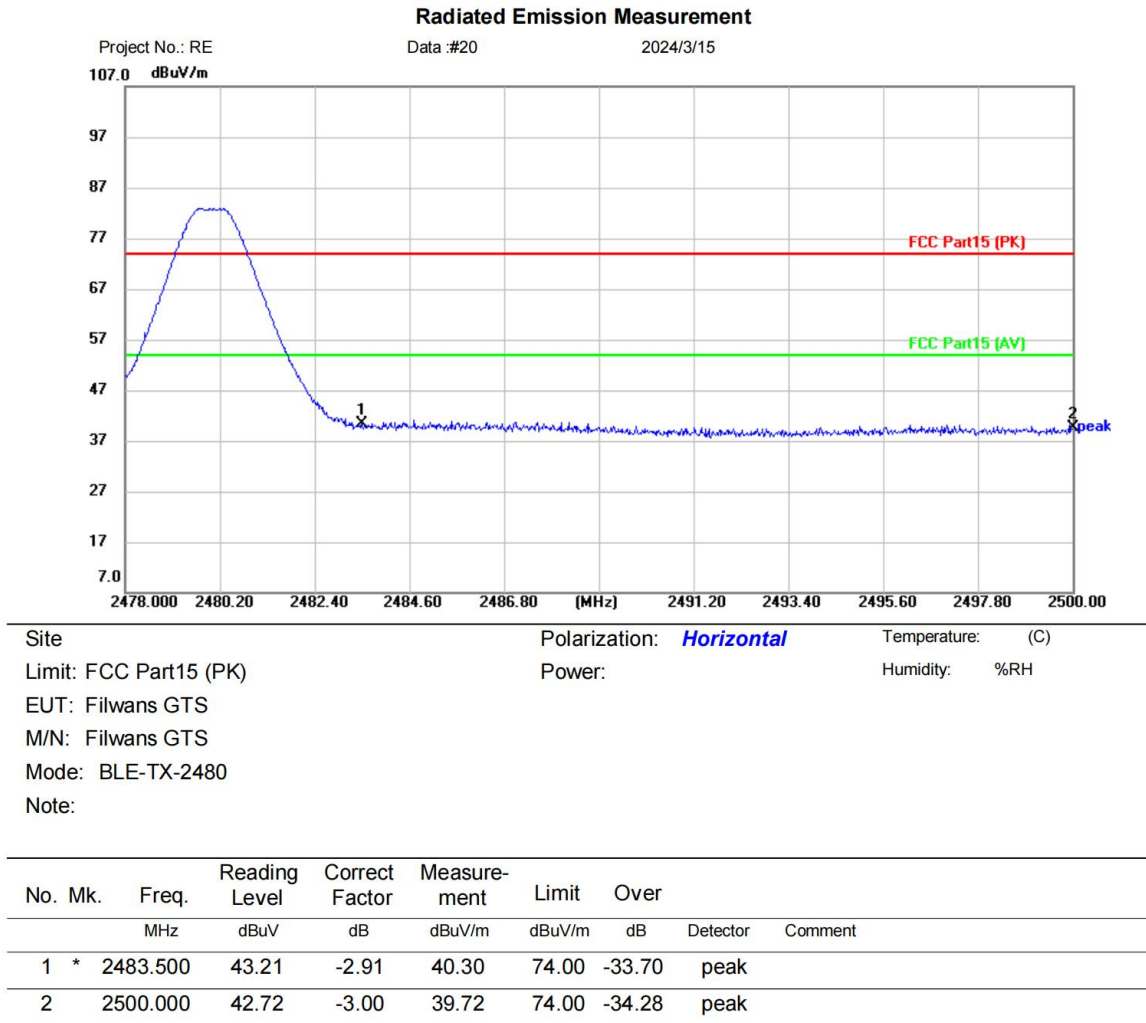

Test Result: Pass

[TestMode:TX High channel]; [Polarity: Vertical]

Radiated Emission Measurement

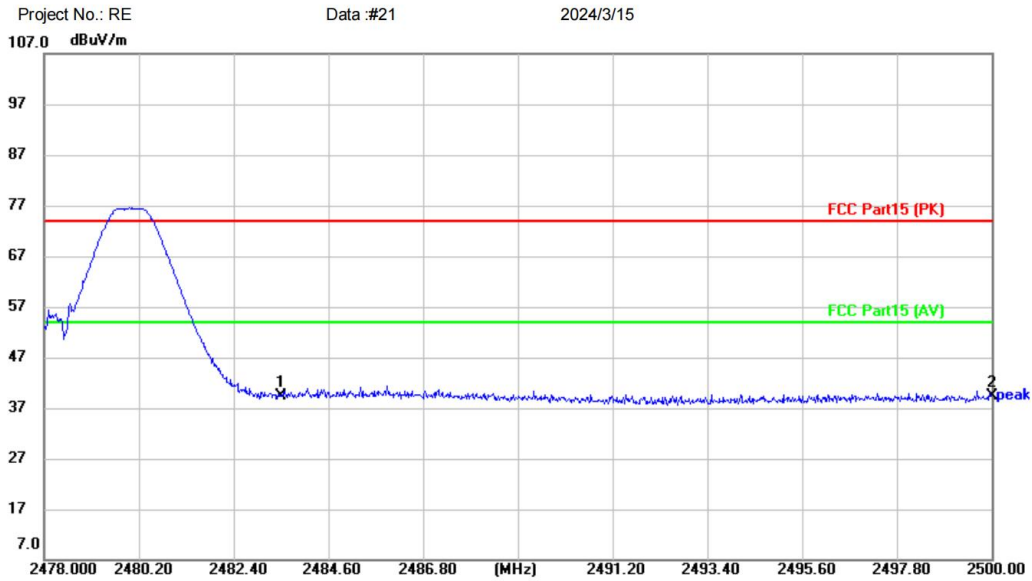

Site: Limit: FCC Part15 (PK) EUT: Filwans GTS M/N: Filwans GTS Mode: BLE-TX-2480 Note:

Polarization: **Vertical** Power:

Temperature: (C) Humidity: %RH

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	42.29	-2.91	39.38	74.00	-34.62	peak	
2		2500.000	42.28	-3.00	39.28	74.00	-34.72	peak	

Test Result: Pass


16 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Miata
Temperature	23°C
Humidity	50%

16.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	---

16.2 BLOCK DIAGRAM OF TEST SETUP

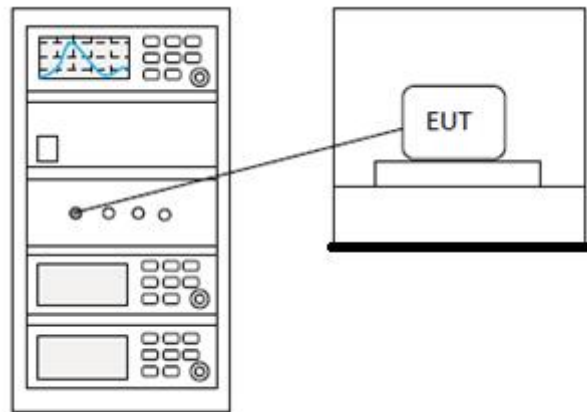

16.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


17 POWER SPECTRUM DENSITY

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.10.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Miata
Temperature	23℃
Humidity	50%

17.1 LIMITS

Limit:	≤8dBm in any 3 kHz band during any time interval of continuous transmission
---------------	---

17.2 BLOCK DIAGRAM OF TEST SETUP

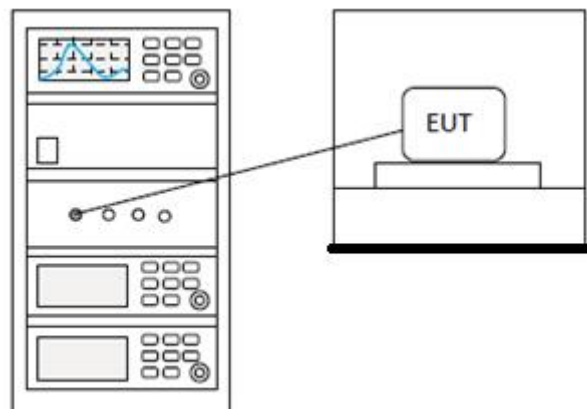

17.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details
--


18 CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Miata
Temperature	23℃
Humidity	50%

18.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq \text{hopping channels} < 50$
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

18.2 BLOCK DIAGRAM OF TEST SETUP

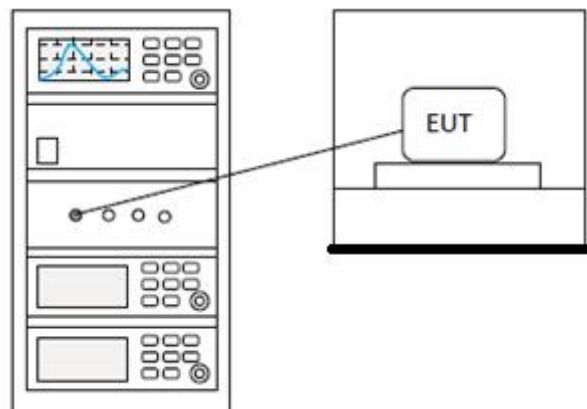

18.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


19 MINIMUM 6DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.8.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Miata
Temperature	23℃
Humidity	50%

19.1 LIMITS

Limit:	≥500 kHz
--------	----------

19.2 BLOCK DIAGRAM OF TEST SETUP

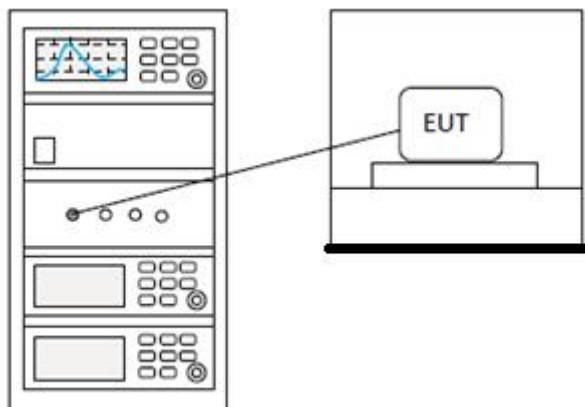

19.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


20 APPENDIX

Appendix1


20.1 MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	5.582	30	Pass
NVNT	BLE 1M	2442	Ant1	5.381	30	Pass
NVNT	BLE 1M	2480	Ant1	4.066	30	Pass


Power NVNT BLE 1M 2402MHz Ant1

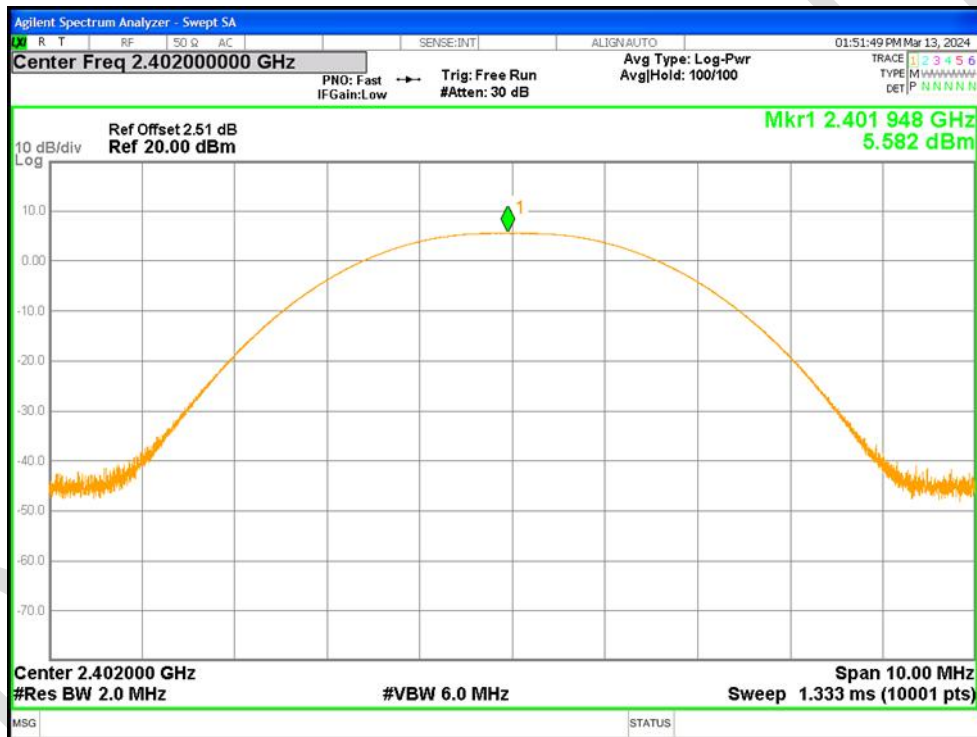

Power NVNT BLE 1M 2442MHz Ant1

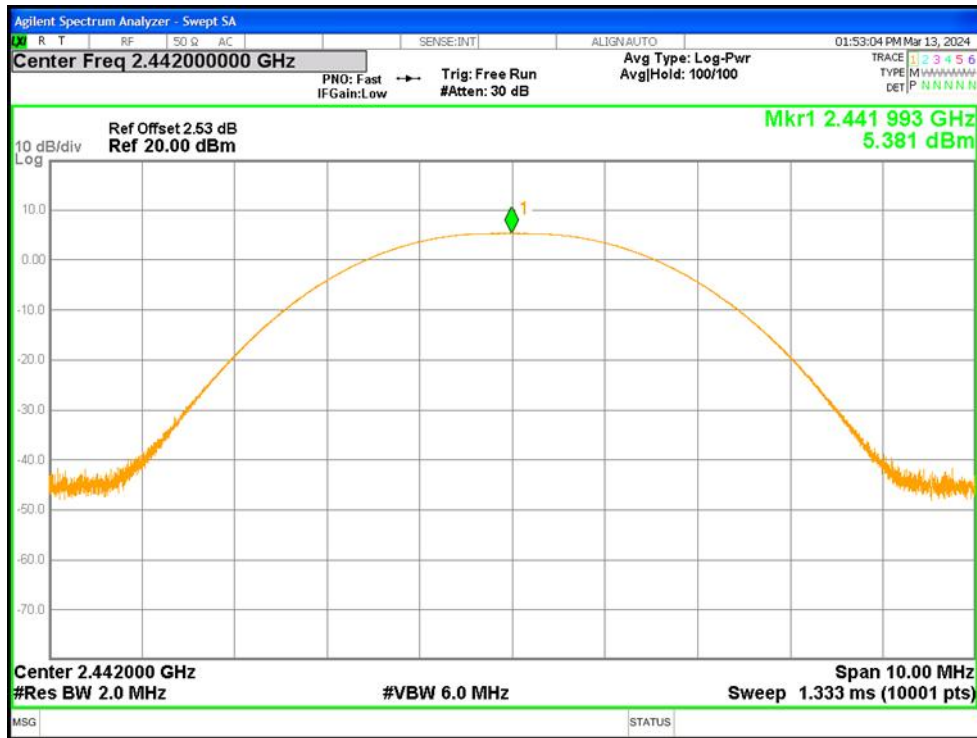


Power NVNT BLE 1M 2480MHz Ant1

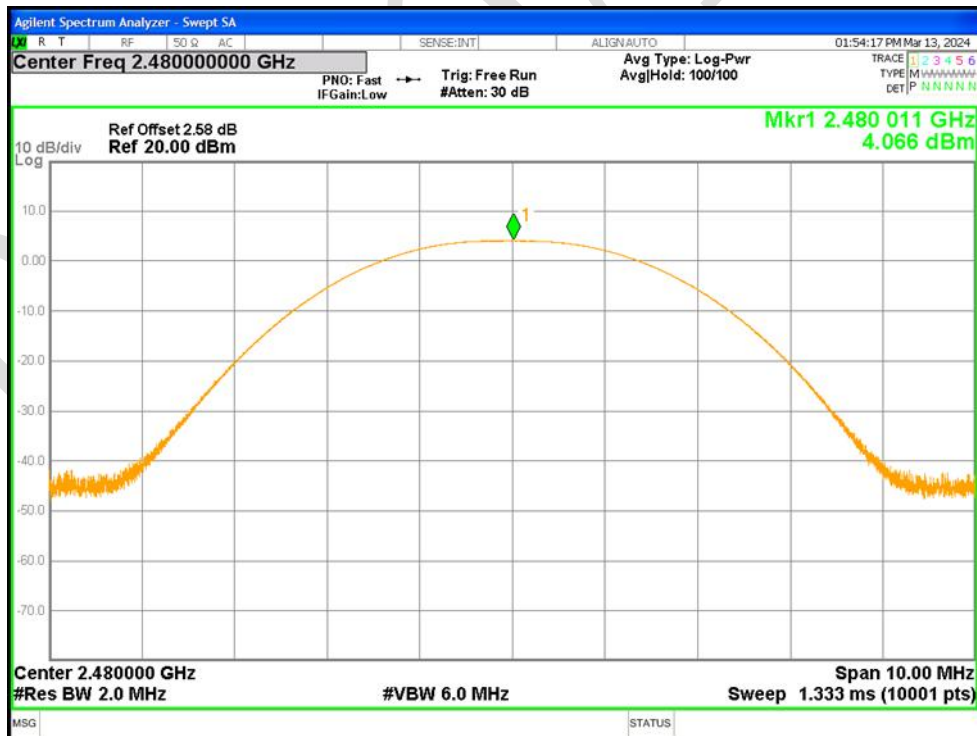


20.2 -6DB BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.6479	0.5	Pass
NVNT	BLE 1M	2442	Ant1	0.6553	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.6515	0.5	Pass


-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

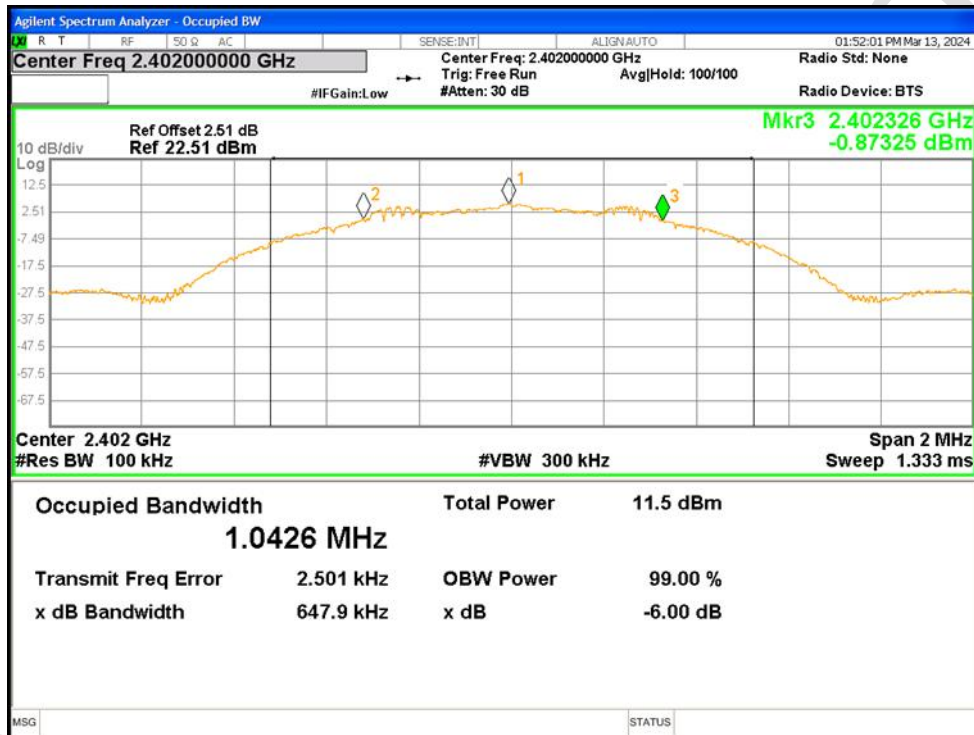

-6dB Bandwidth NVNT BLE 1M 2442MHz Ant1

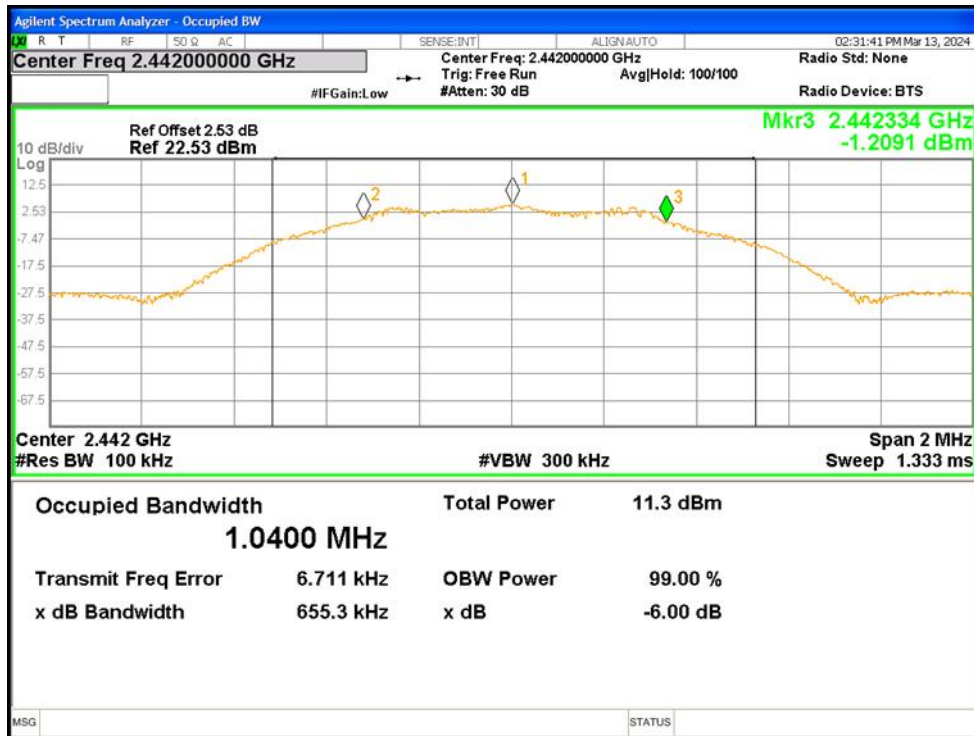


-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1

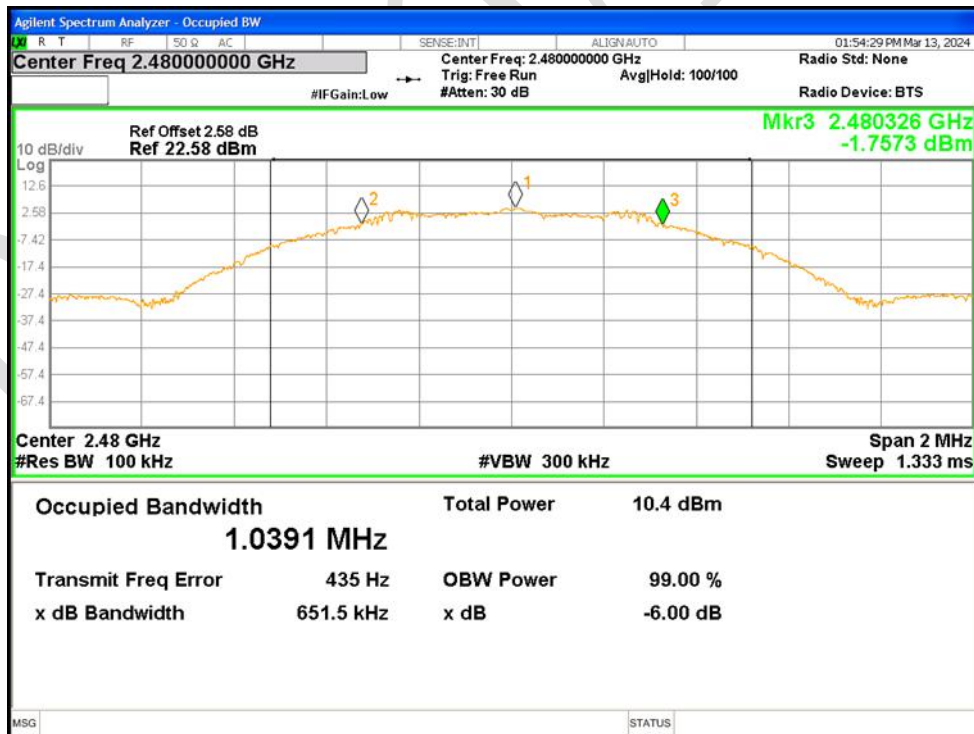


20.3 OCCUPIED CHANNEL BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1M	2402	Ant1	1.0384
NVNT	BLE 1M	2442	Ant1	1.0381
NVNT	BLE 1M	2480	Ant1	1.0275


OBW NVNT BLE 1M 2402MHz Ant1

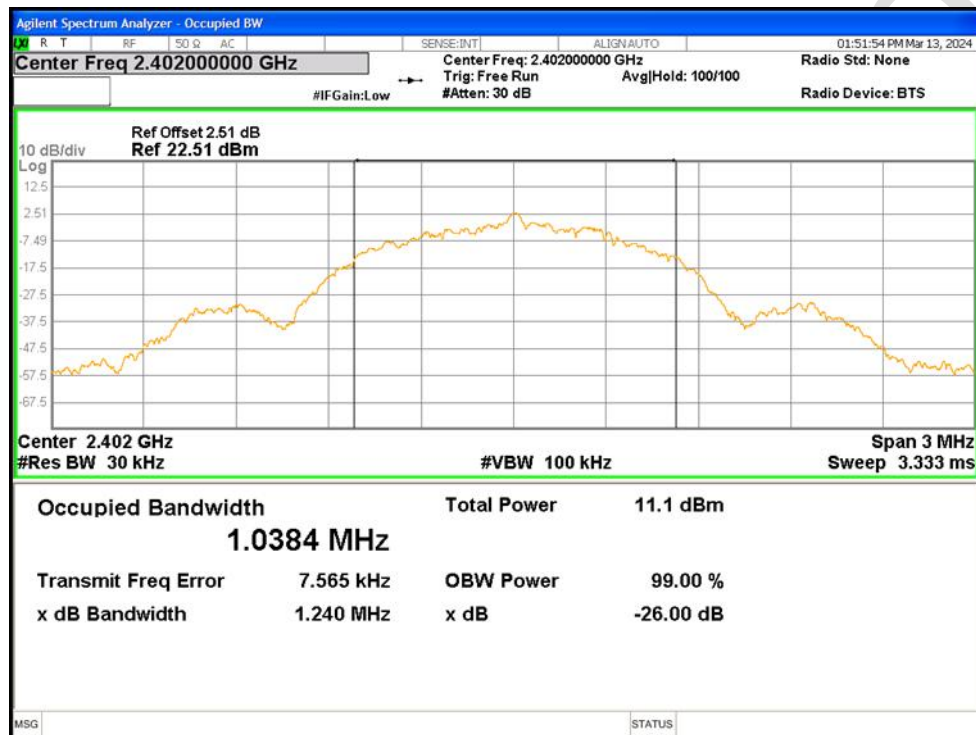

OBW NVNT BLE 1M 2442MHz Ant1

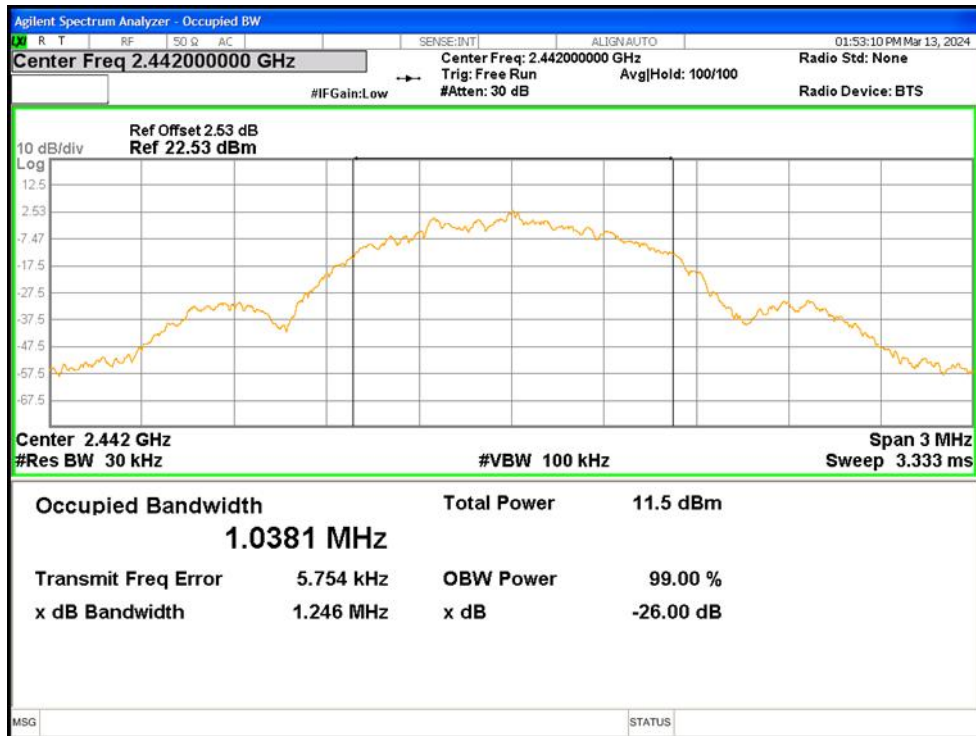


OBW NVNT BLE 1M 2480MHz Ant1

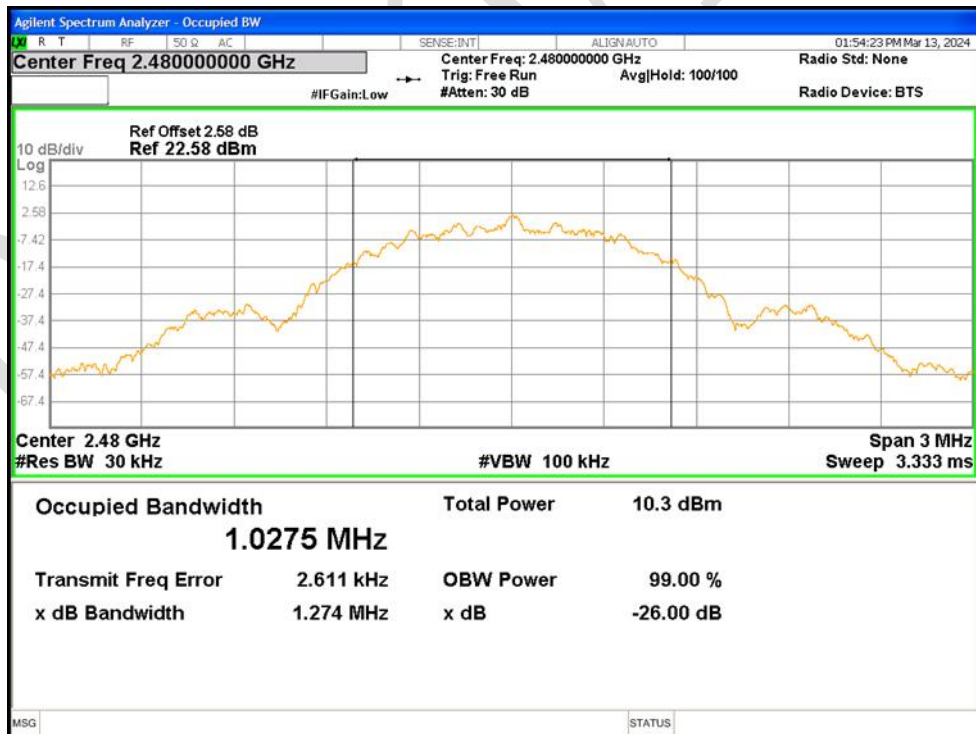

20.4 MAXIMUM POWER SPECTRAL DENSITY LEVEL

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-10.693	8	Pass
NVNT	BLE 1M	2442	Ant1	-9.616	8	Pass
NVNT	BLE 1M	2480	Ant1	-11.394	8	Pass


PSD NVNT BLE 1M 2402MHz Ant1

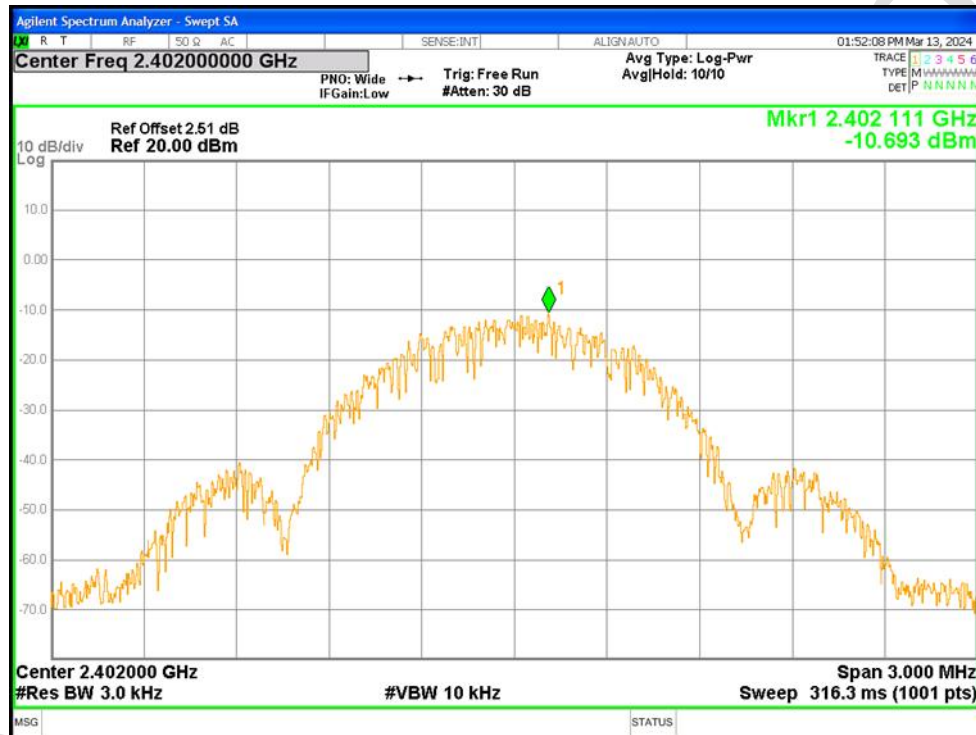

PSD NVNT BLE 1M 2442MHz Ant1



PSD NVNT BLE 1M 2480MHz Ant1

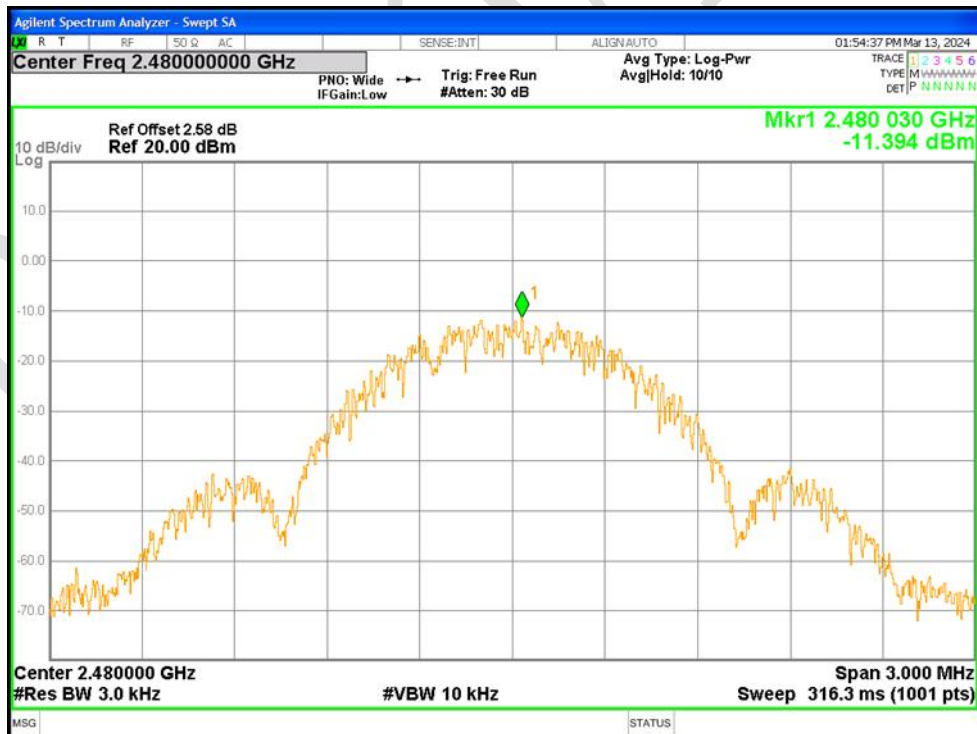


20.5 BAND EDGE

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-59.64	-20	Pass
NVNT	BLE 1M	2480	Ant1	-58.91	-20	Pass

Band Edge NVNT BLE 1M 2402MHz Ant1 Ref




Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

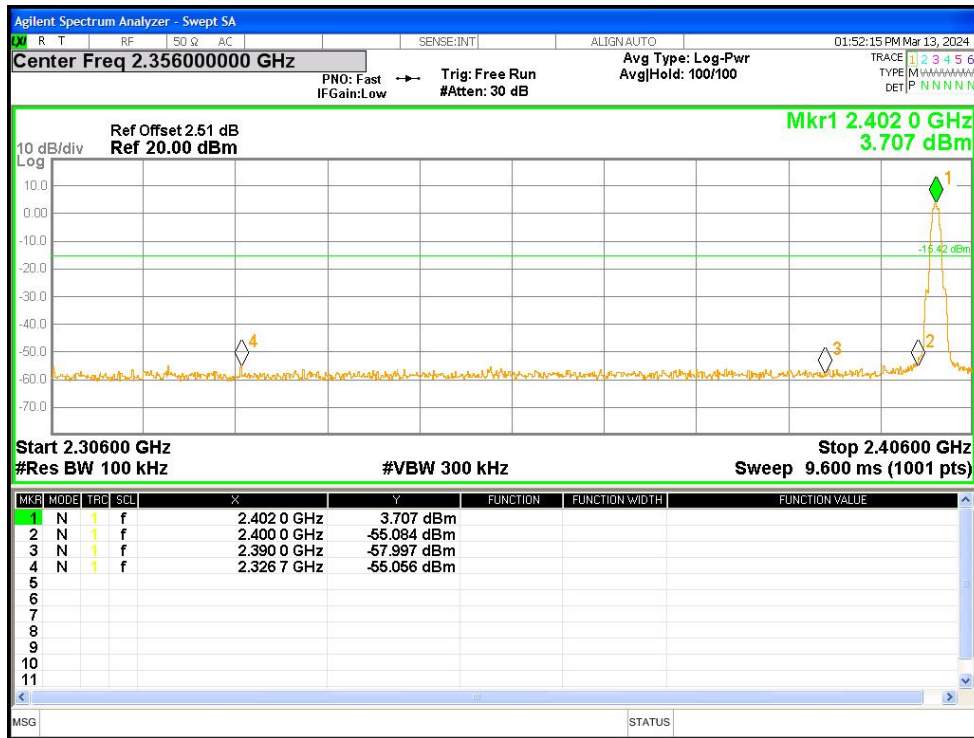

Band Edge NVNT BLE 1M 2480MHz Ant1 Ref




Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

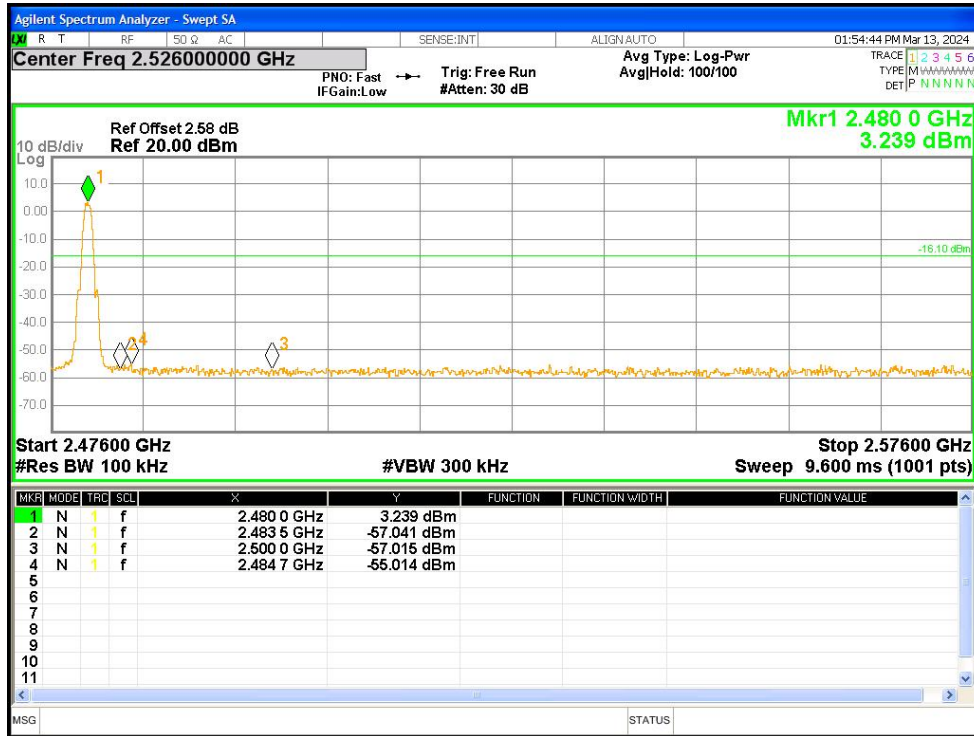


20.6 CONDUCTED RF SPURIOUS EMISSION

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-49.74	-20	Pass
NVNT	BLE 1M	2442	Ant1	-49.98	-20	Pass
NVNT	BLE 1M	2480	Ant1	-49.49	-20	Pass


Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref

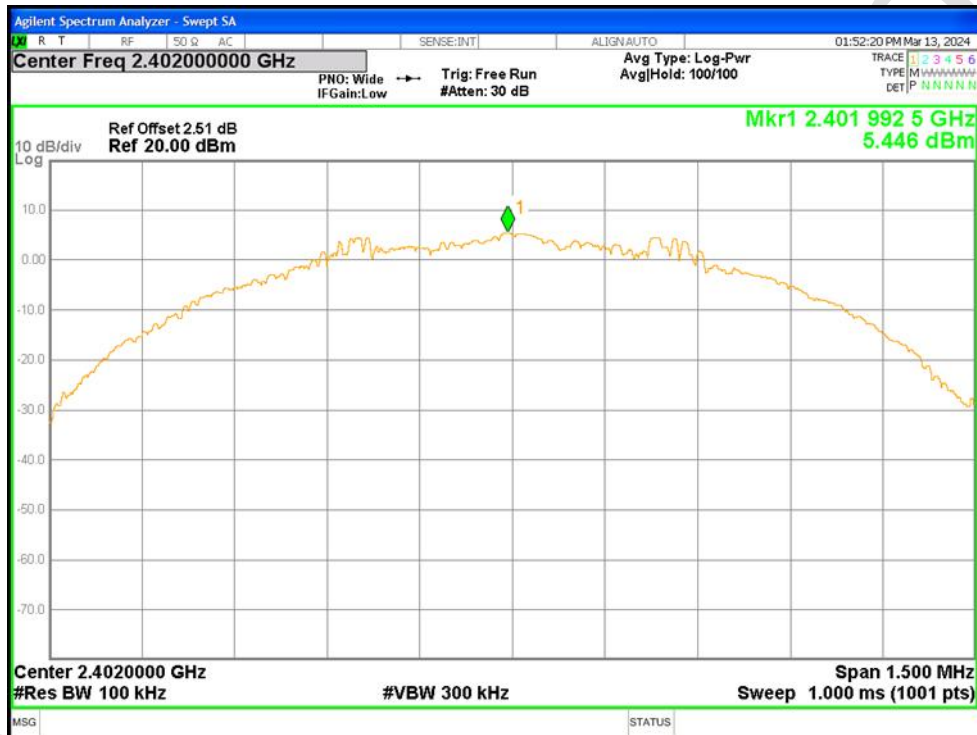


Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

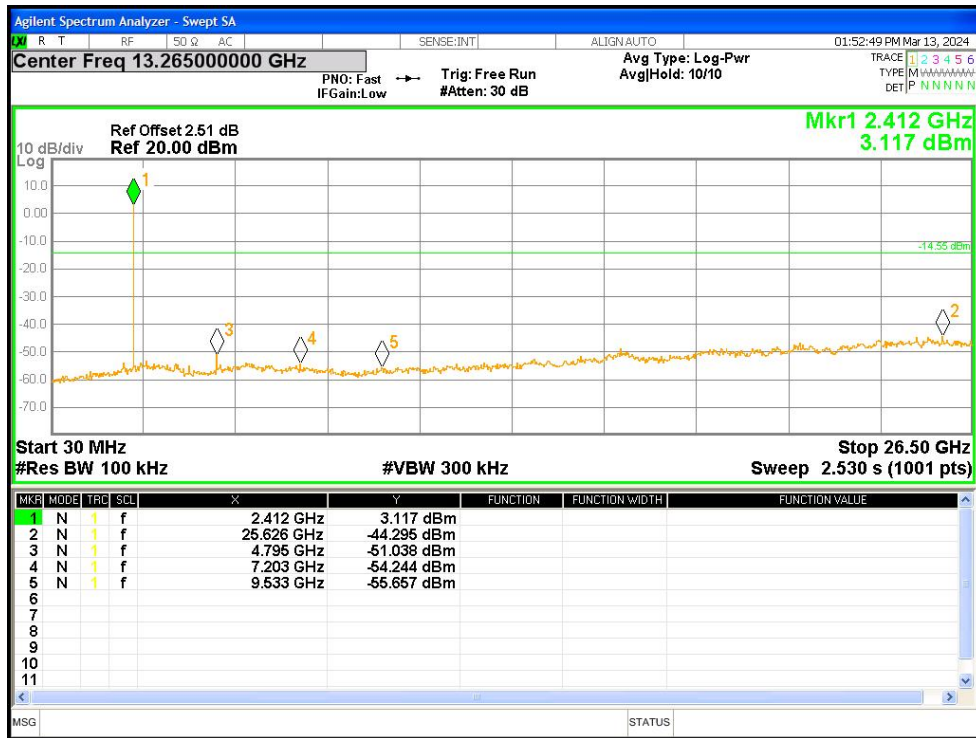


Tx. Spurious NVNT BLE 1M 2442MHz Ant1 Ref

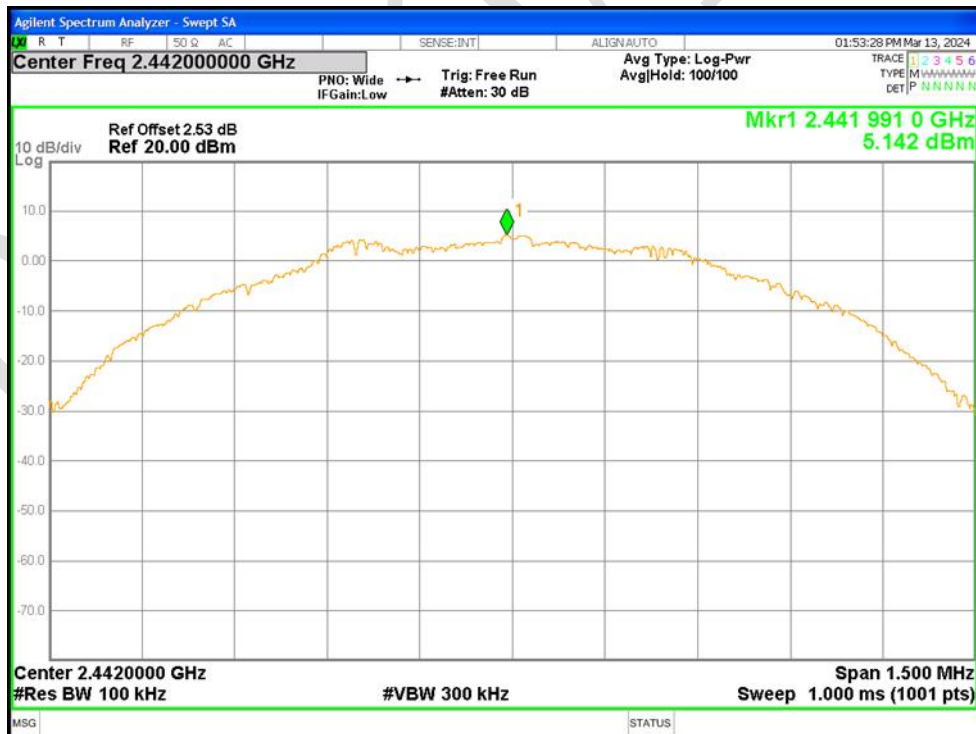


Tx. Spurious NVNT BLE 1M 2442MHz Ant1 Emission

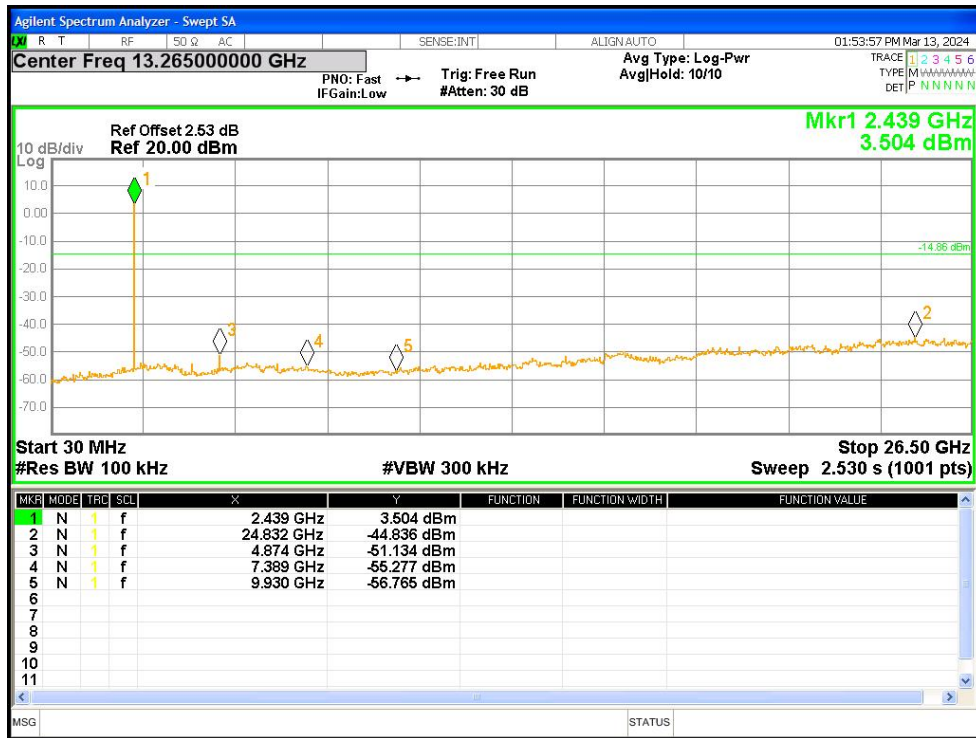

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref

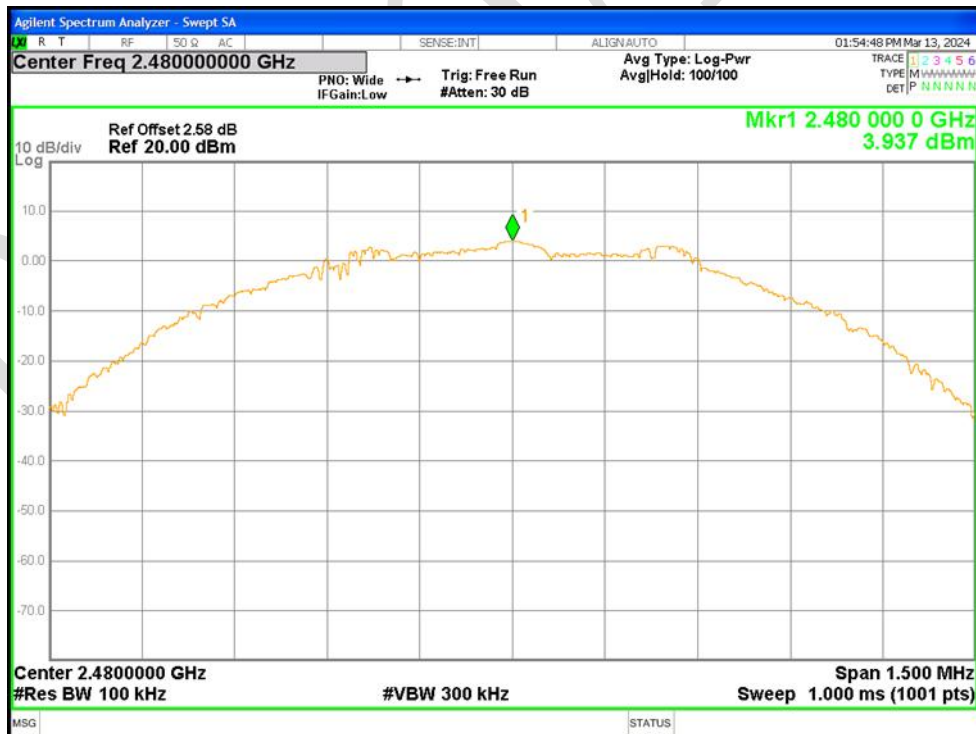

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission

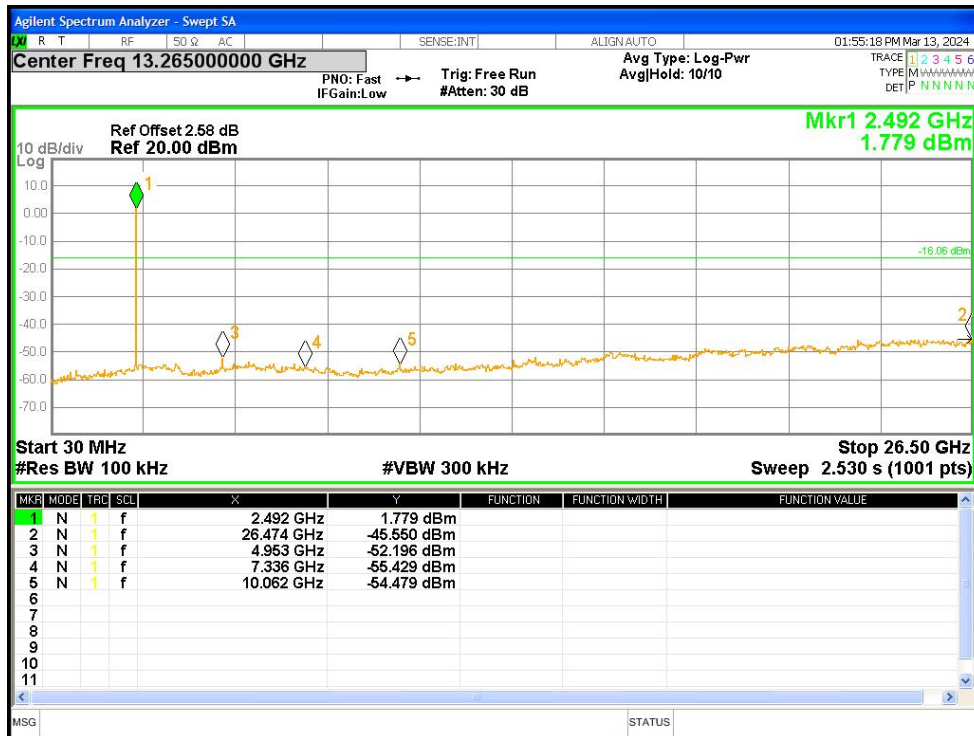


APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Conducted Emissions at AC Power Line (150kHz-30MHz)



Radiated Spurious Emissions

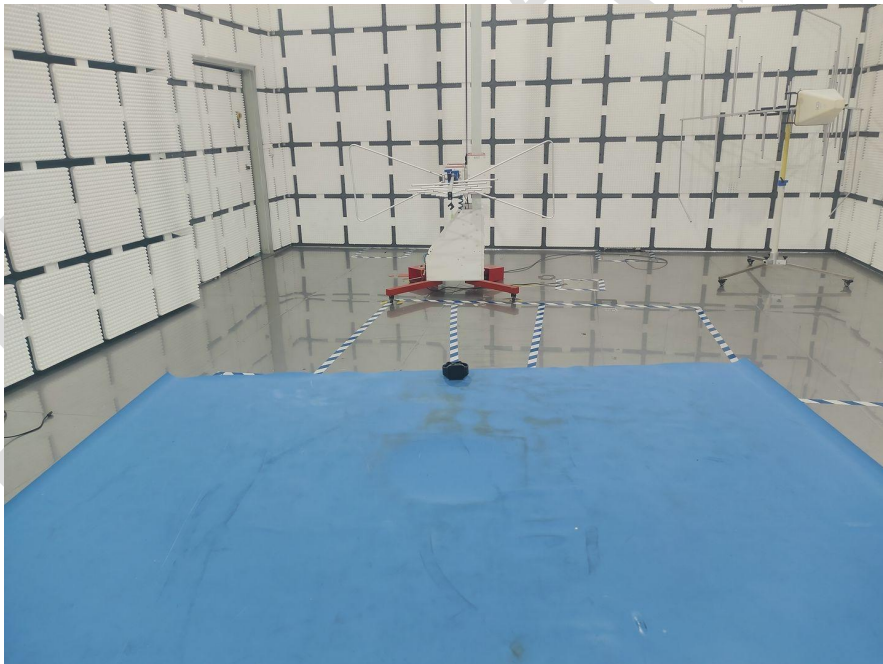

APPENDIX B: PHOTOGRAPHS OF EUT

Reference to the test report No. BLA-EMC-202403-A2801

----END OF REPORT----

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.