[Test mode: TX High channel]; [Polarity: Horizontal]

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Over | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 4960.000 | 37.41 | 7.41 | 44.82 | 74.00 | -29.18 | peak | |
| 2 | | 5876.250 | 38.57 | 8.99 | 47.56 | 74.00 | -26.44 | peak | |
| 3 | | 7440.000 | 38.63 | 11.03 | 49.66 | 74.00 | -24.34 | peak | |
| 4 | | 8461.250 | 39.44 | 11.47 | 50.91 | 74.00 | -23.09 | peak | |
| 5 | | 9920.000 | 35.15 | 13.16 | 48.31 | 74.00 | -25.69 | peak | |
| 6 | * | 11375.25 | 38.31 | 14.56 | 52.87 | 74.00 | -21.13 | peak | |

**Test Result: Pass**

[Test mode: TX High channel]; [Polarity: Vertical]

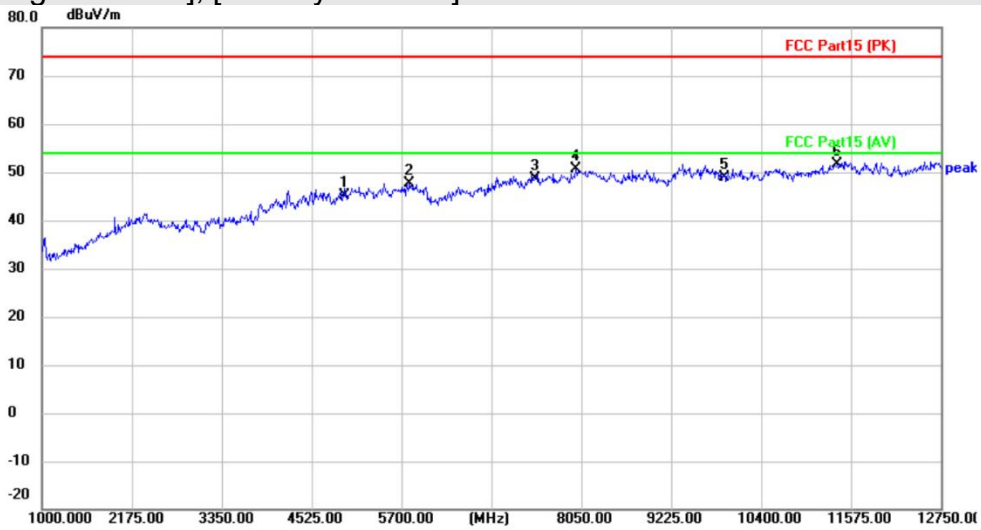


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Over | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 4960.000 | 37.74 | 7.41 | 45.15 | 74.00 | -28.85 | peak | |
| 2 | | 5805.750 | 38.54 | 9.00 | 47.54 | 74.00 | -26.46 | peak | |
| 3 | | 7440.000 | 37.56 | 11.03 | 48.59 | 74.00 | -25.41 | peak | |
| 4 | | 7979.500 | 39.27 | 11.47 | 50.74 | 74.00 | -23.26 | peak | |
| 5 | | 9920.000 | 35.67 | 13.16 | 48.83 | 74.00 | -25.17 | peak | |
| 6 | * | 11398.75 | 36.86 | 14.81 | 51.67 | 74.00 | -22.33 | peak | |

**Test Result: Pass**

## 6.9 Radiated emissions which fall in the restricted bands

| | |
|---|---|
| **Test Standard** | 47 CFR Part 15, Subpart C 15.247 |
| **Test Method** | ANSI C63.10 (2013) Section 6.10.5 |
| **Test Mode (Pre-Scan)** | TX |
| **Test Mode (Final Test)** | TX |

### 6.9.1 Limit

| Frequency(MHz) | Field strength(microvolts/meter) | Measurement distance(meters) |
|---|---|---|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30.0 | 30 | 30 |
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

*Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.*

BlueAsia

### 6.9.2 Test setup

Below 1GHz：

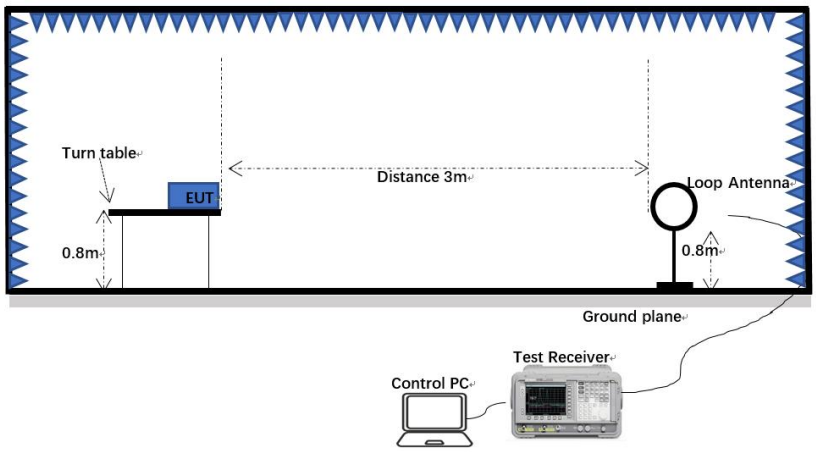


30MHz-1GHz：

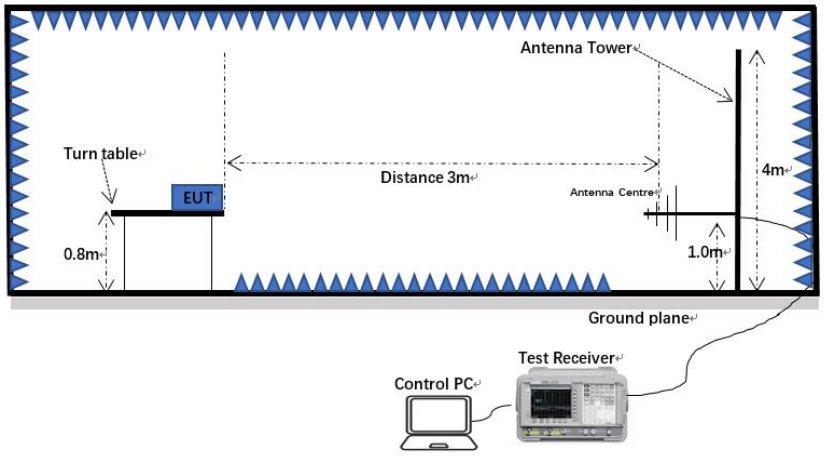


Above 1GHz：

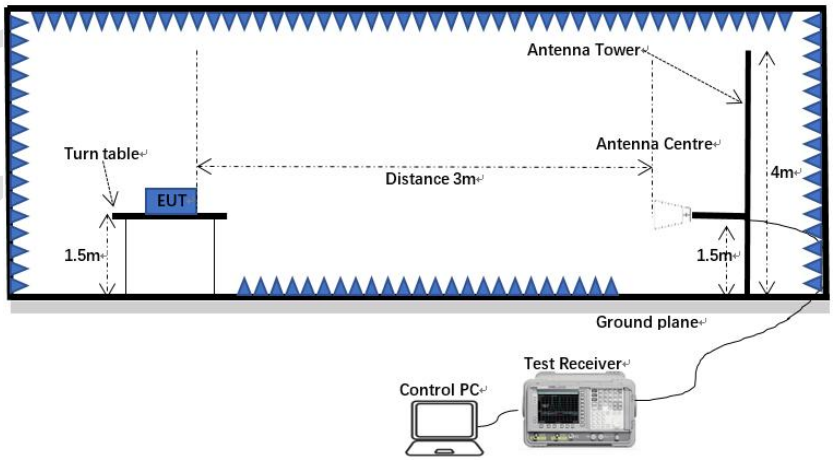

### 6.9.3 Procedure

a) For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

b) For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

c) The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

d) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

e) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

f) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

g) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

h) Test the EUT in the lowest channel, the middle channel, the highest channel.

i) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.

j) Repeat above procedures until all frequencies measured was complete.

*Note 1: Level (dBuV) = Reading (dBuV) + Factor (dB/m)*
*Note 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.*

### 6.9.4 Test data

*Remark: During the test, pre-scan the BLE1M/BLE2M mode, and found the BLE1M mode which it is worse case.*

[Test mode: TX low channel]; [Polarity: Horizontal]

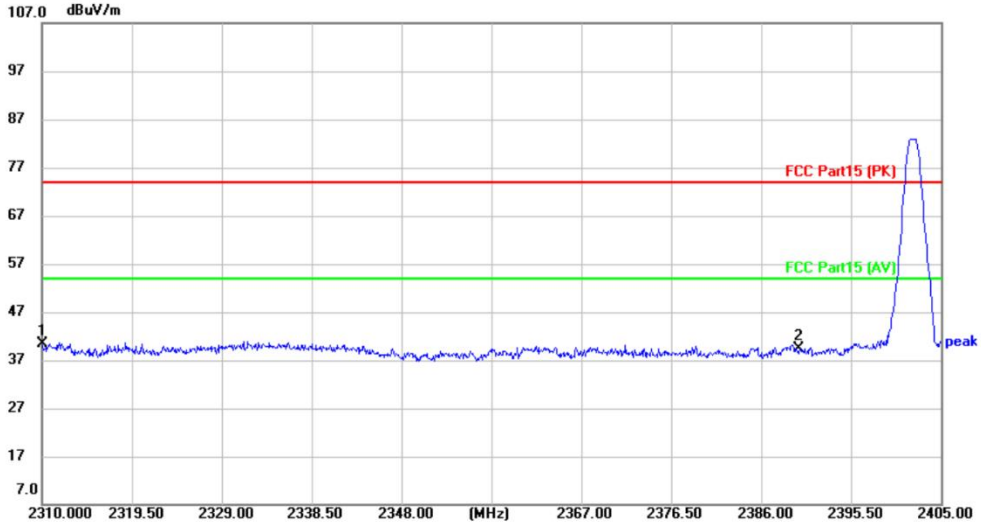


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Over | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | * | 2310.000 | 43.36 | -2.87 | 40.49 | 74.00 | -33.51 | peak | |
| 2 | | 2390.000 | 41.74 | -2.44 | 39.30 | 74.00 | -34.70 | peak | |

**Test Result: Pass**

[Test mode:TX low channel]; [Polarity: Vertical]

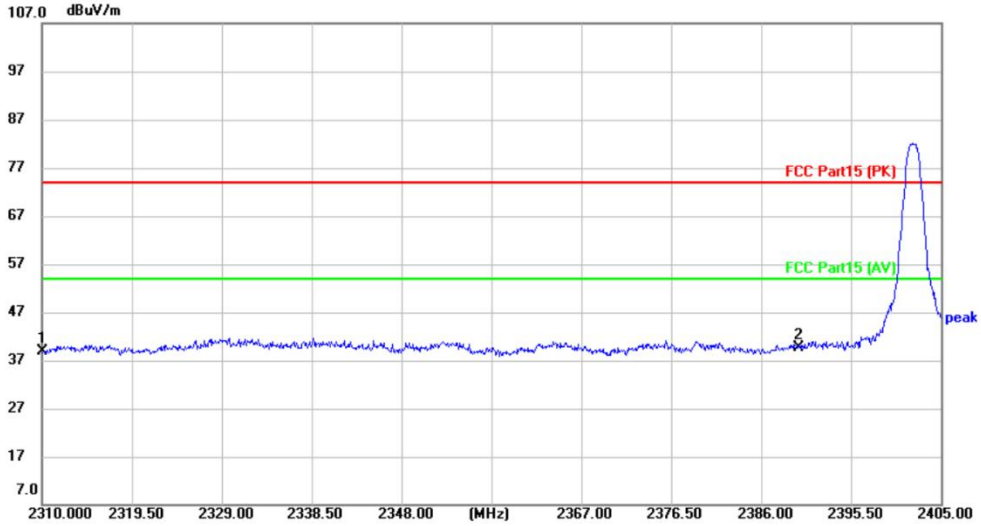


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Over | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 2310.000 | 41.82 | -2.87 | 38.95 | 74.00 | -35.05 | peak | |
| 2 | * | 2390.000 | 42.10 | -2.44 | 39.66 | 74.00 | -34.34 | peak | |

**Test Result: Pass**

[Test mode: TX High channel]; [Polarity: Horizontal]

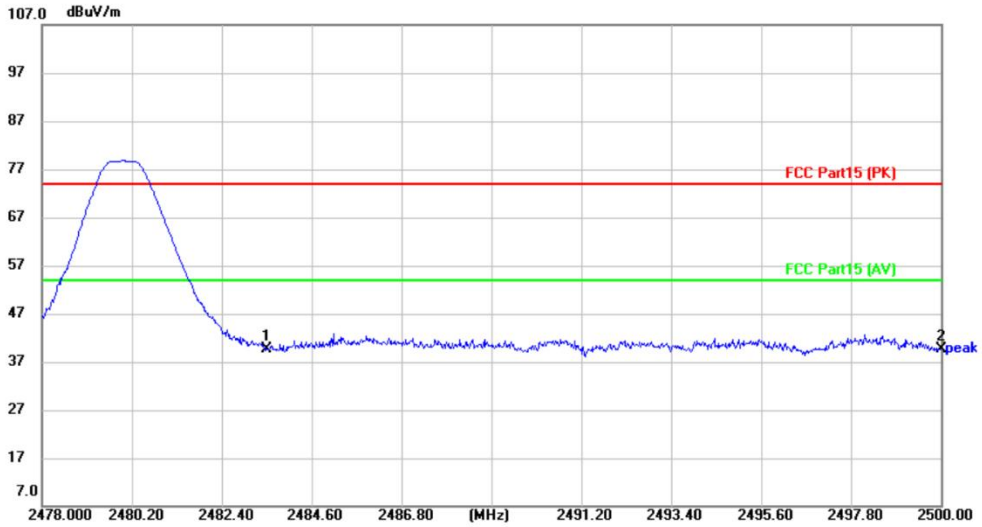


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Over | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 2483.500 | 42.54 | -2.91 | 39.63 | 74.00 | -34.37 | peak | |
| 2 | * | 2500.000 | 42.64 | -3.00 | 39.64 | 74.00 | -34.36 | peak | |

**Test Result: Pass**

[Test mode:TX High channel]; [Polarity: Vertical]

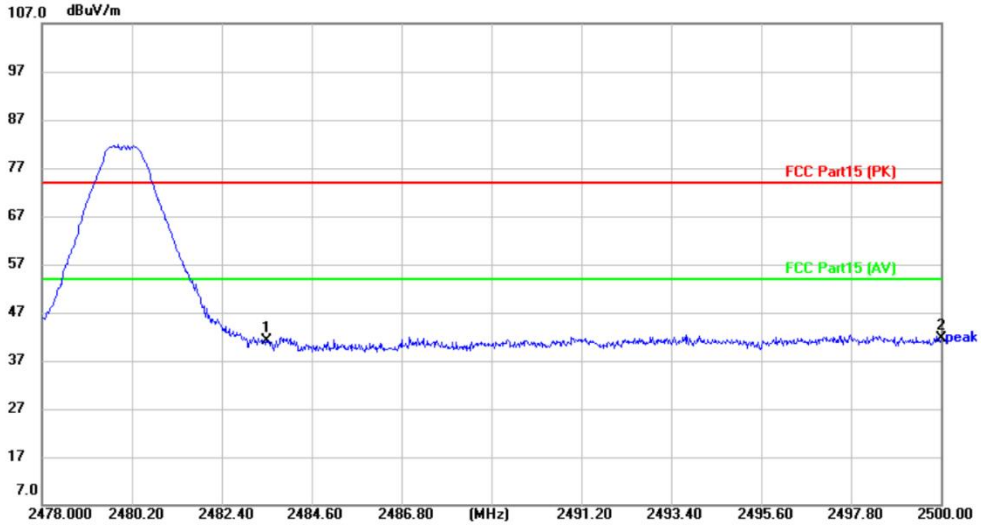


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Over | | |
|---|---|---|---|---|---|---|---|---|---|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 2483.500 | 43.92 | -2.91 | 41.01 | 74.00 | -32.99 | peak | |
| 2 | * | 2500.000 | 44.51 | -3.00 | 41.51 | 74.00 | -32.49 | peak | |

**Test Result: Pass**

# 7 Appendix A

**Maximum Conducted Output Power**

| Condition | Mode | Frequency (MHz) | Antenna | Conducted Power (dBm) | Limit (dBm) | Verdict |
|---|---|---|---|---|---|---|
| NVNT | BLE 1M | 2402 | Ant1 | -5.262 | 30 | Pass |
| NVNT | BLE 1M | 2442 | Ant1 | -4.852 | 30 | Pass |
| NVNT | BLE 1M | 2480 | Ant1 | -4.736 | 30 | Pass |
| NVNT | BLE 2M | 2402 | Ant1 | -5.25 | 30 | Pass |
| NVNT | BLE 2M | 2442 | Ant1 | -4.888 | 30 | Pass |
| NVNT | BLE 2M | 2480 | Ant1 | -4.78 | 30 | Pass |

BlueAsia

Power NVNT BLE 1M 2402MHz Ant1

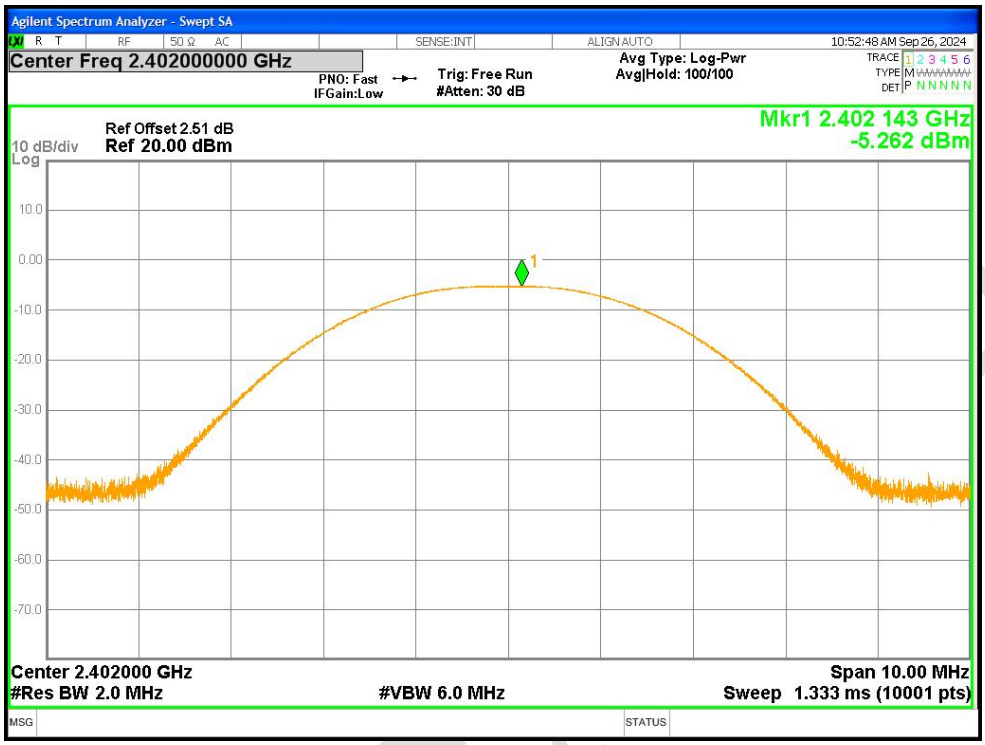


Power NVNT BLE 1M 2442MHz Ant1

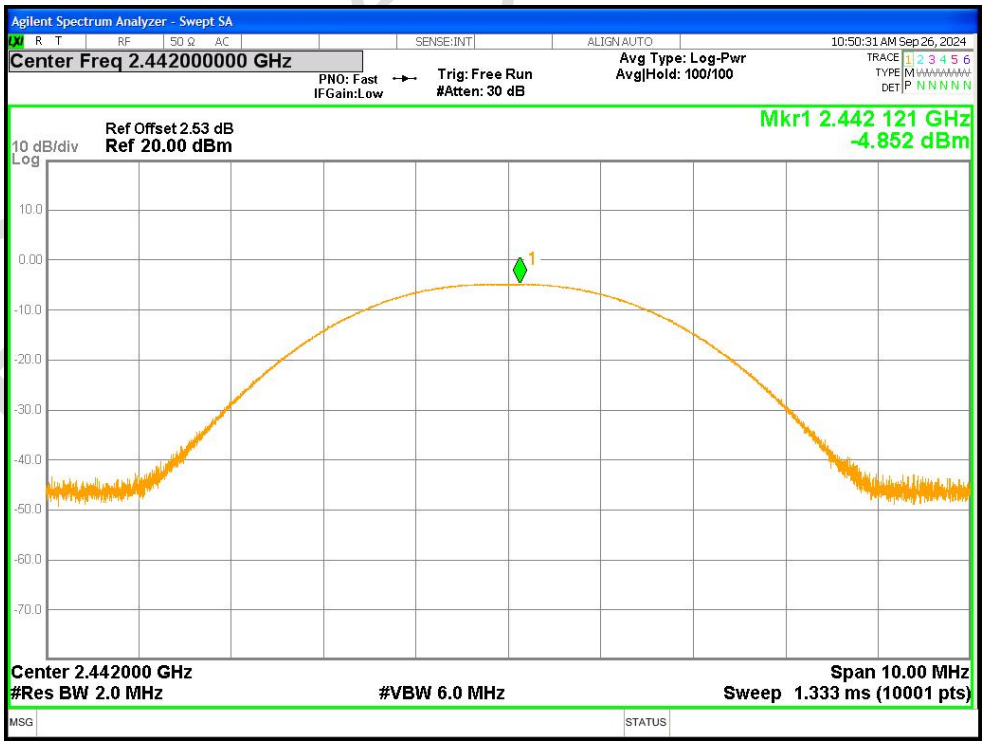


Power NVNT BLE 1M 2480MHz Ant1

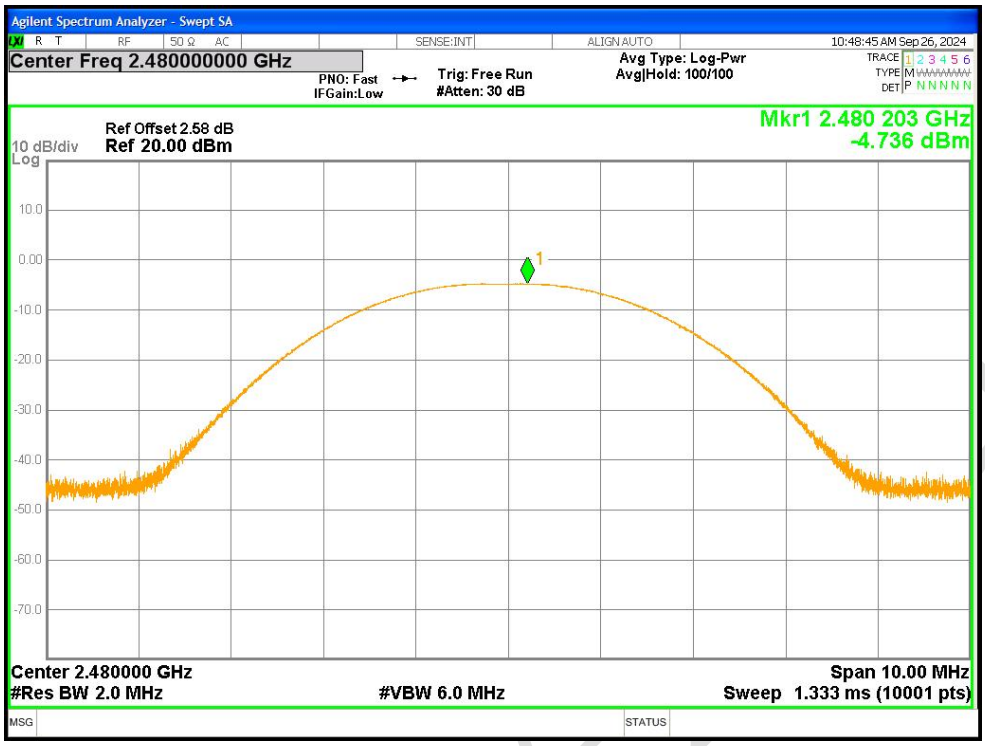


Power NVNT BLE 2M 2402MHz Ant1

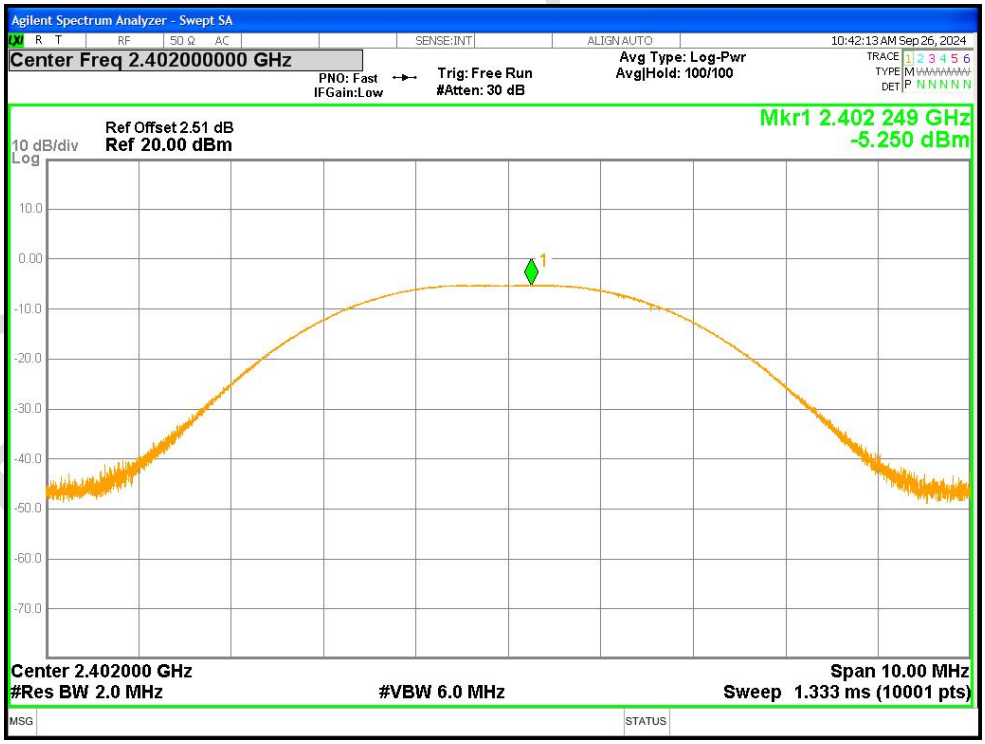


Power NVNT BLE 2M 2442MHz Ant1

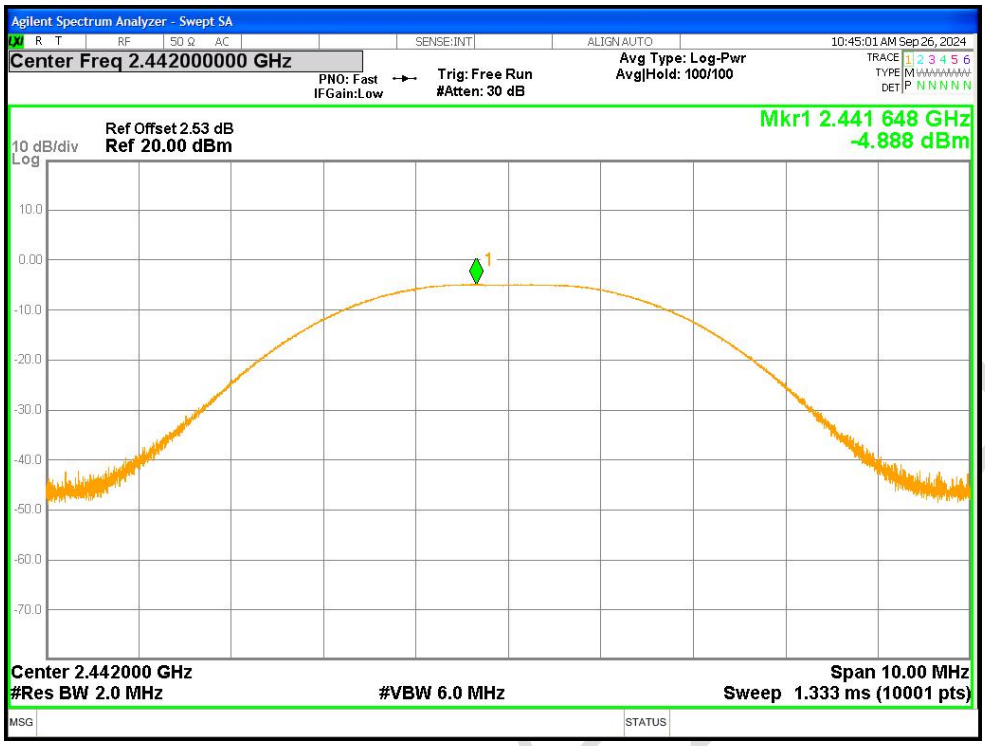


Power NVNT BLE 2M 2480MHz Ant1

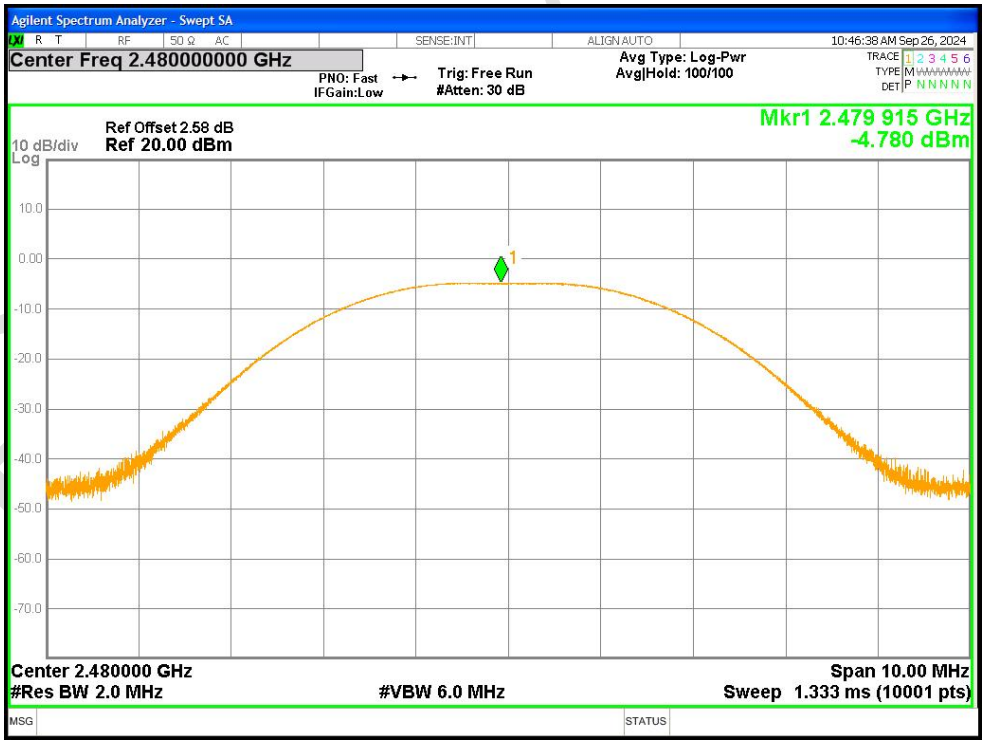

**-6dB Bandwidth**

| Condition | Mode | Frequency (MHz) | Antenna | -6 dB Bandwidth (MHz) | Limit -6 dB Bandwidth (MHz) | Verdict |
|---|---|---|---|---|---|---|
| NVNT | BLE 1M | 2402 | Ant1 | 0.666 | 0.5 | Pass |
| NVNT | BLE 1M | 2442 | Ant1 | 0.672 | 0.5 | Pass |
| NVNT | BLE 1M | 2480 | Ant1 | 0.657 | 0.5 | Pass |
| NVNT | BLE 2M | 2402 | Ant1 | 1.078 | 0.5 | Pass |
| NVNT | BLE 2M | 2442 | Ant1 | 1.089 | 0.5 | Pass |
| NVNT | BLE 2M | 2480 | Ant1 | 1.107 | 0.5 | Pass |

-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

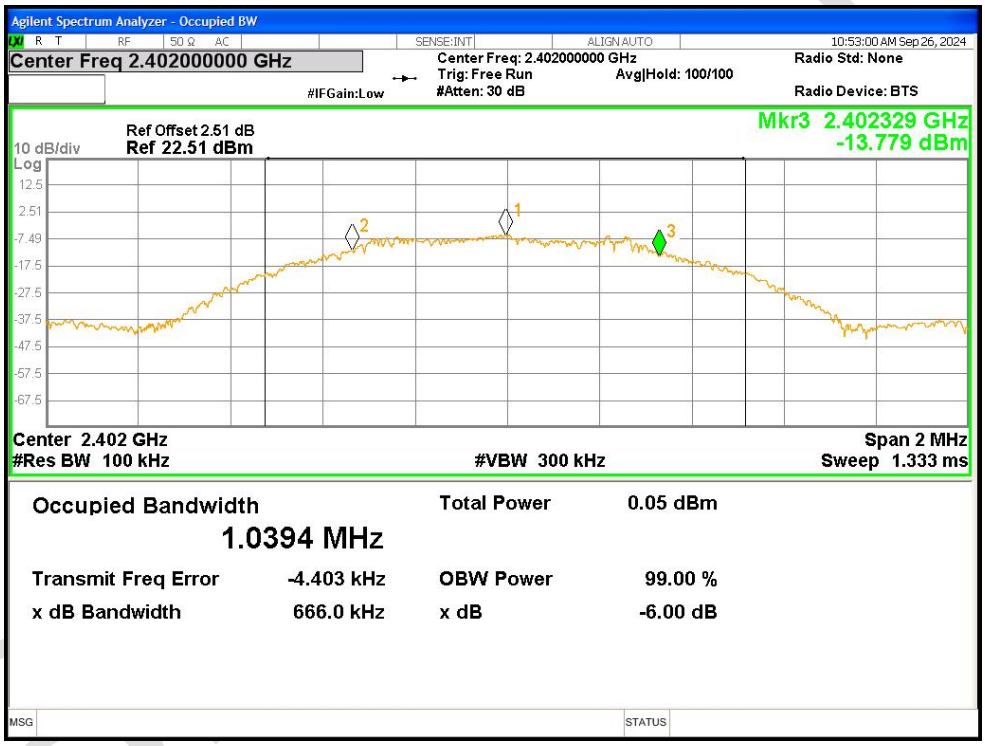


-6dB Bandwidth NVNT BLE 1M 2442MHz Ant1

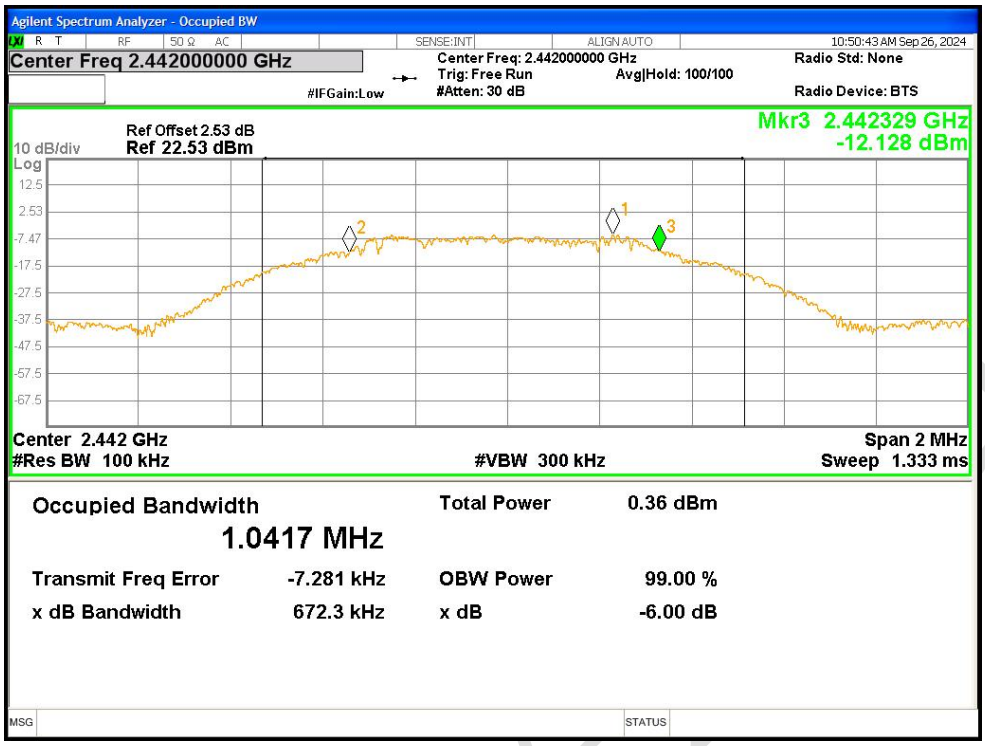


-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1

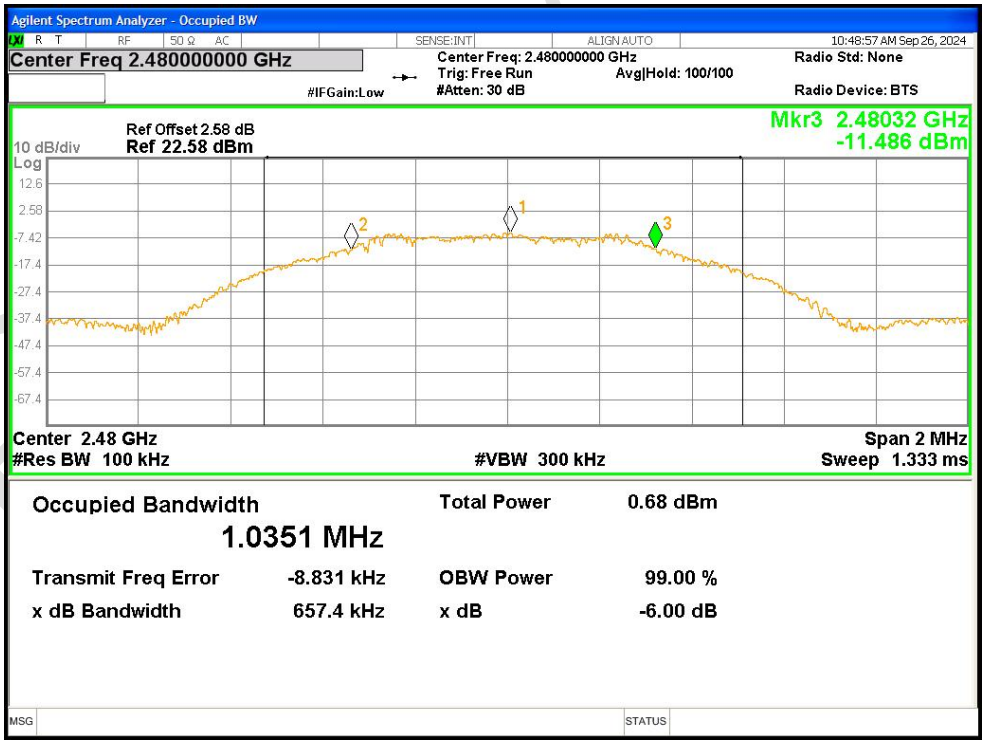


-6dB Bandwidth NVNT BLE 2M 2402MHz Ant1

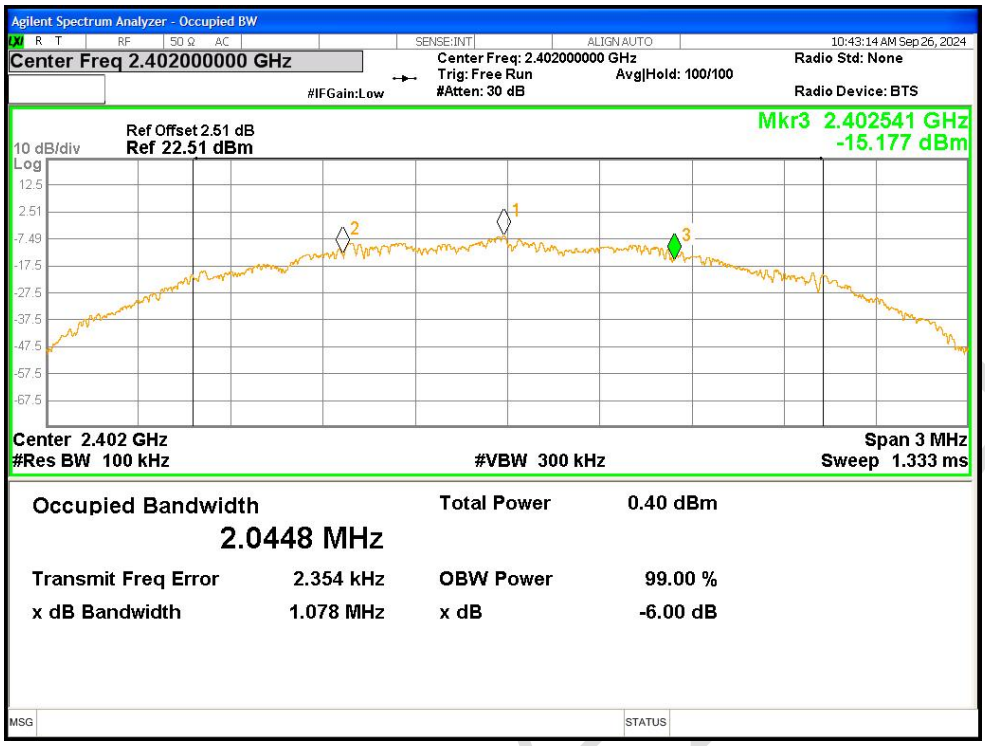


-6dB Bandwidth NVNT BLE 2M 2442MHz Ant1

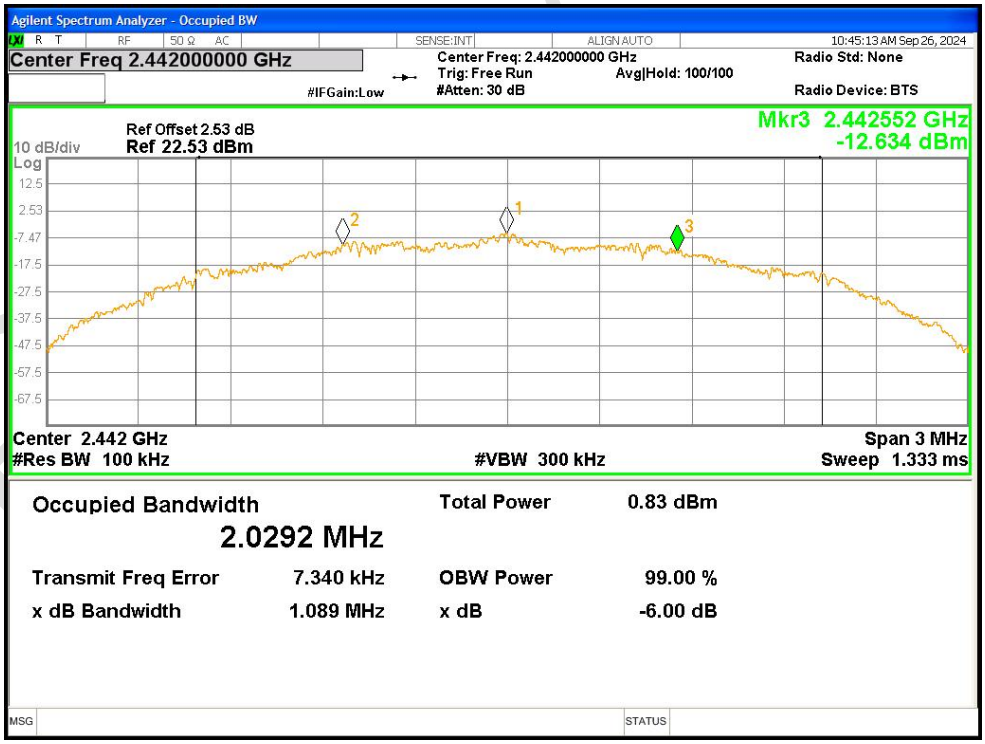


-6dB Bandwidth NVNT BLE 2M 2480MHz Ant1

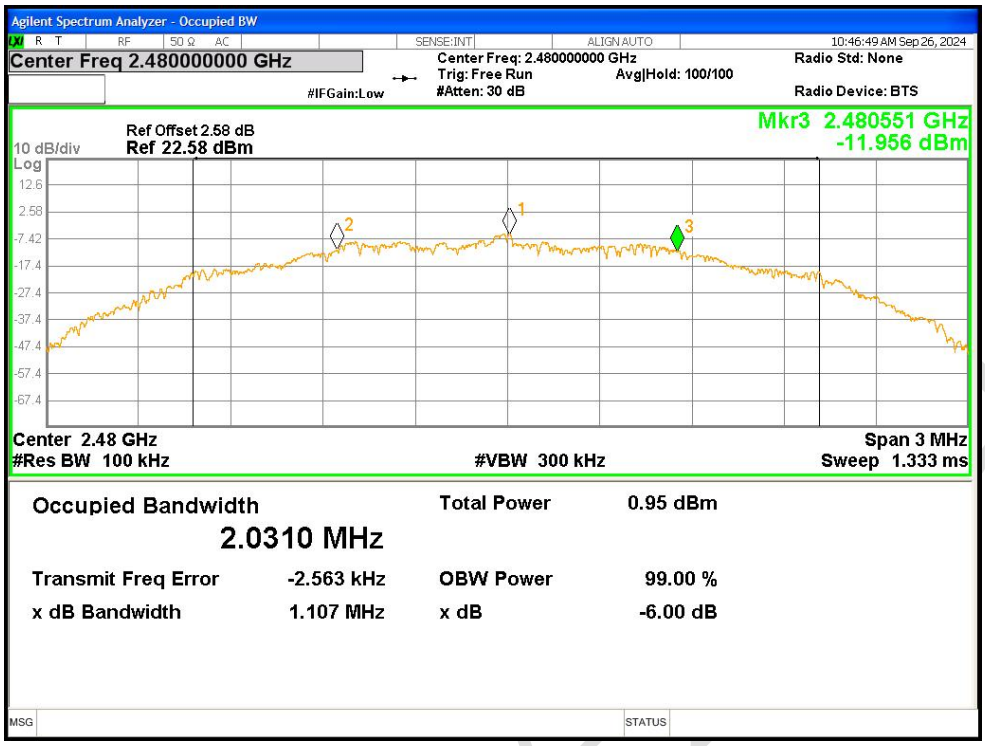
Agilent Spectrum Analyzer - Occupied BW
Center Freq 2.480000000 GHz
Center Freq: 2.480000000 GHz
Trig: Free Run
#Atten: 30 dB
Avg|Hold: 100/100
Radio Std: None
Radio Device: BTS
#IFGain:Low
Ref Offset 2.58 dB
10 dB/div
Ref 22.58 dBm
Mkr3 2.480551 GHz
-11.956 dBm
Center 2.48 GHz
#Res BW 100 kHz
#VBW 300 kHz
Span 3 MHz
Sweep 1.333 ms
Occupied Bandwidth
2.0310 MHz
Total Power 0.95 dBm
Transmit Freq Error -2.563 kHz
OBW Power 99.00 %
x dB Bandwidth 1.107 MHz
x dB -6.00 dB

**Occupied Channel Bandwidth**

| Condition | Mode | Frequency (MHz) | Antenna | 99% OBW (MHz) |
|---|---|---|---|---|
| NVNT | BLE 1M | 2402 | Ant1 | 1.0313 |
| NVNT | BLE 1M | 2442 | Ant1 | 1.0393 |
| NVNT | BLE 1M | 2480 | Ant1 | 1.0423 |
| NVNT | BLE 2M | 2402 | Ant1 | 2.0344 |
| NVNT | BLE 2M | 2442 | Ant1 | 2.0300 |
| NVNT | BLE 2M | 2480 | Ant1 | 2.0225 |

OBW NVNT BLE 1M 2402MHz Ant1

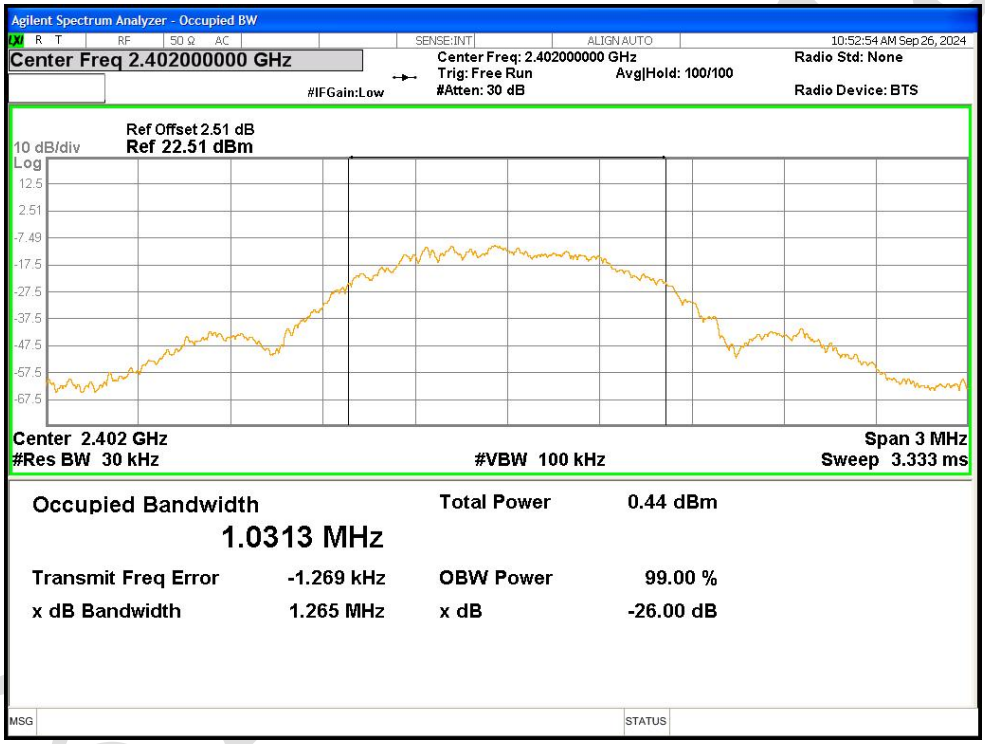


OBW NVNT BLE 1M 2442MHz Ant1

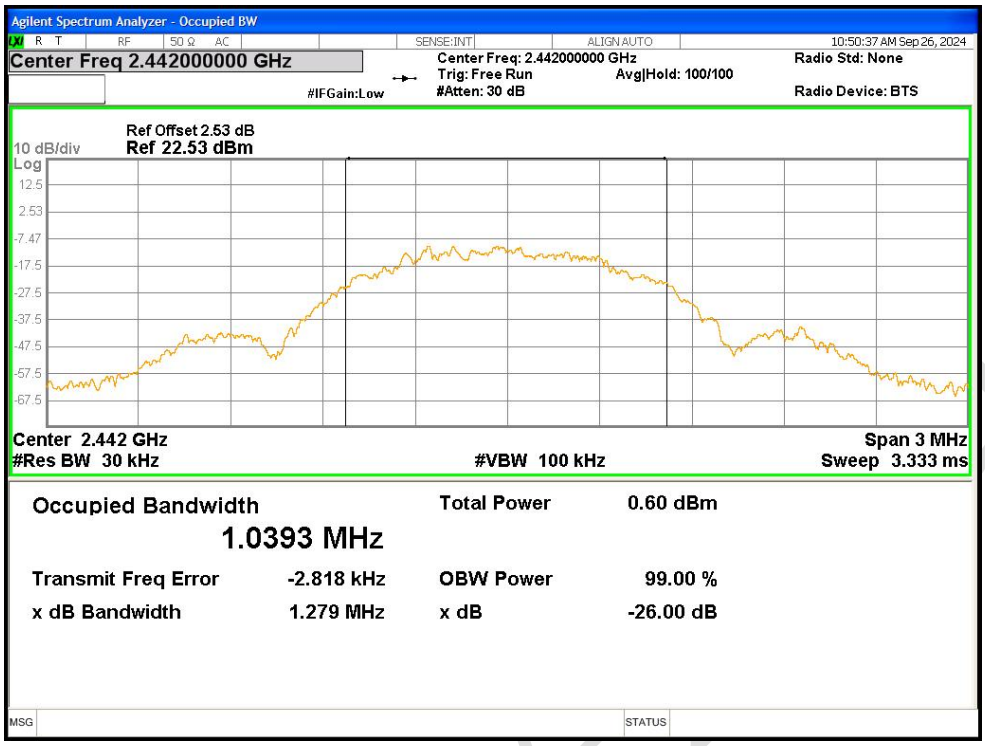


OBW NVNT BLE 1M 2480MHz Ant1

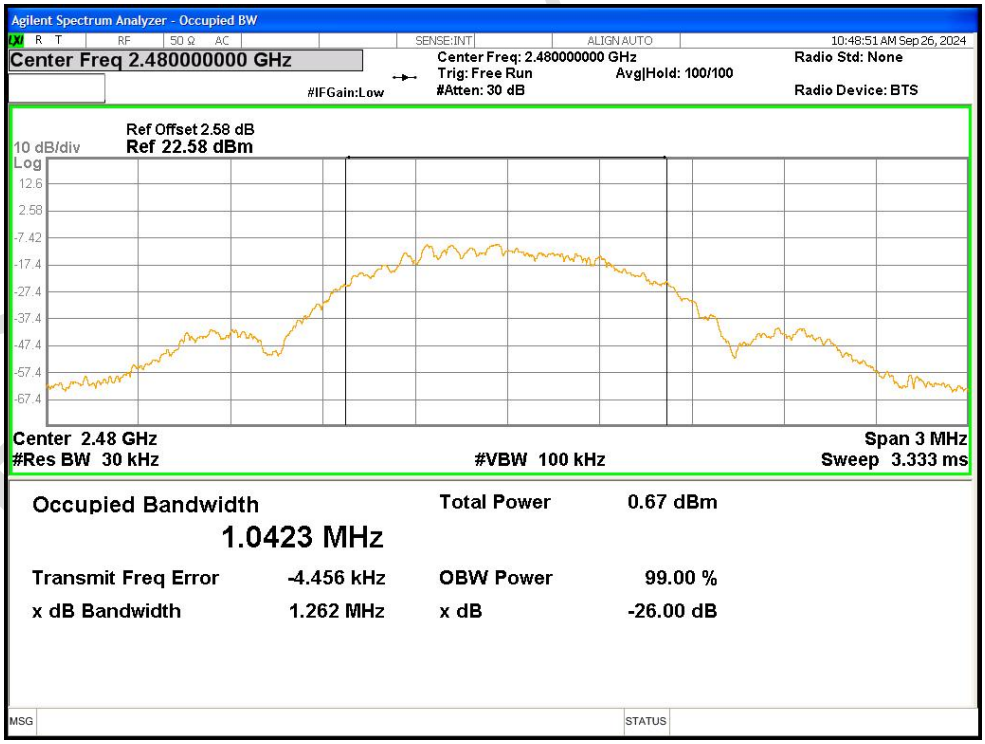


OBW NVNT BLE 2M 2402MHz Ant1

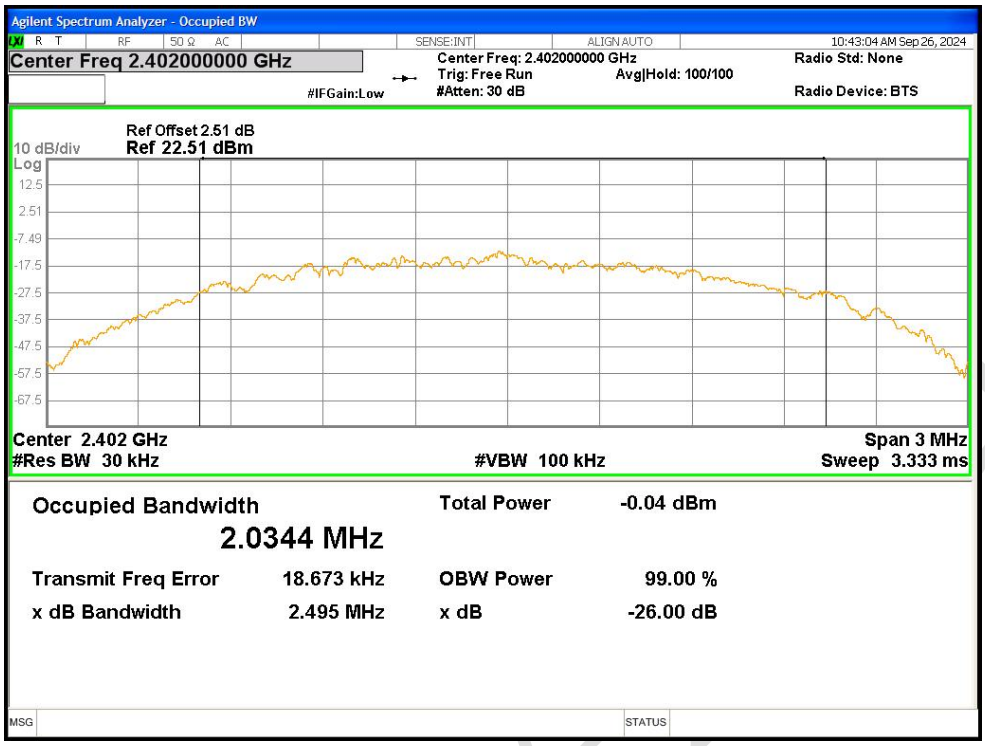


OBW NVNT BLE 2M 2442MHz Ant1

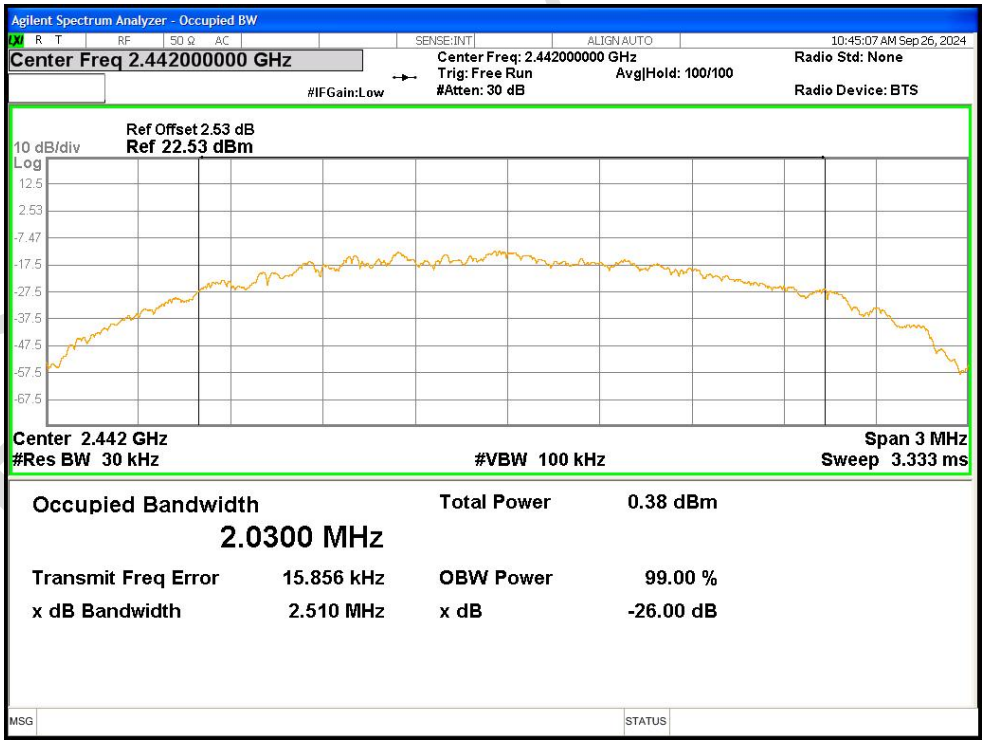


OBW NVNT BLE 2M 2480MHz Ant1

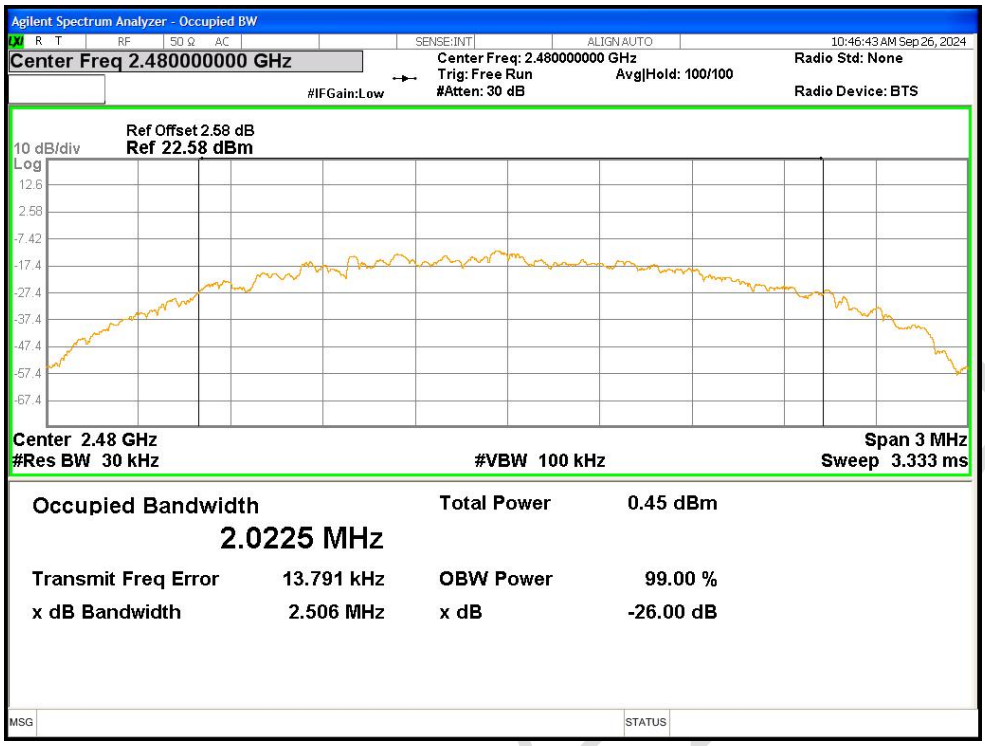
Agilent Spectrum Analyzer - Occupied BW
Center Freq 2.480000000 GHz
Center Freq: 2.480000000 GHz
Trig: Free Run
#Atten: 30 dB
Avg|Hold: 100/100
Radio Std: None
Radio Device: BTS
10:46:43 AM Sep 26, 2024
#IFGain:Low
Ref Offset 2.58 dB
10 dB/div
Ref 22.58 dBm
Log
12.6
2.58
-7.42
-17.4
-27.4
-37.4
-47.4
-57.4
-67.4
Center 2.48 GHz
#Res BW 30 kHz
#VBW 100 kHz
Span 3 MHz
Sweep 3.333 ms
Occupied Bandwidth
2.0225 MHz
Total Power 0.45 dBm
Transmit Freq Error 13.791 kHz
OBW Power 99.00 %
x dB Bandwidth 2.506 MHz
x dB -26.00 dB
MSG
STATUS

**Maximum Power Spectral Density Level**

| Condition | Mode | Frequency (MHz) | Antenna | Max PSD (dBm) | Limit (dBm) | Verdict |
|---|---|---|---|---|---|---|
| NVNT | BLE 1M | 2402 | Ant1 | -21.443 | 8 | Pass |
| NVNT | BLE 1M | 2442 | Ant1 | -20.595 | 8 | Pass |
| NVNT | BLE 1M | 2480 | Ant1 | -20.979 | 8 | Pass |
| NVNT | BLE 2M | 2402 | Ant1 | -23.926 | 8 | Pass |
| NVNT | BLE 2M | 2442 | Ant1 | -23.858 | 8 | Pass |
| NVNT | BLE 2M | 2480 | Ant1 | -23.731 | 8 | Pass |

PSD NVNT BLE 1M 2402MHz Ant1

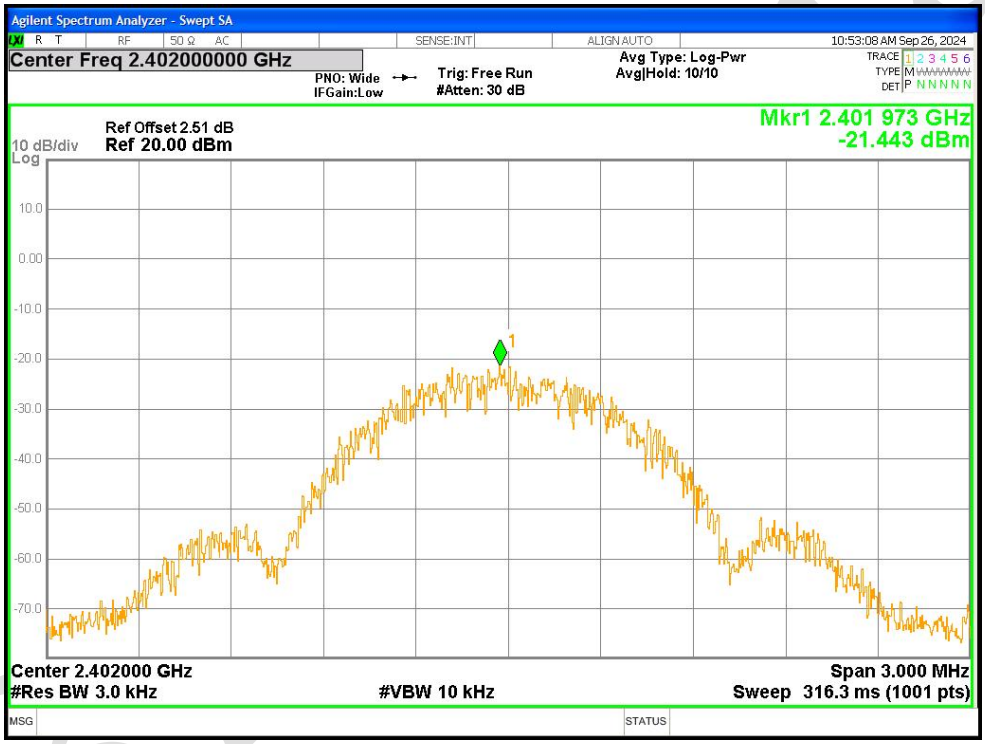


PSD NVNT BLE 1M 2442MHz Ant1

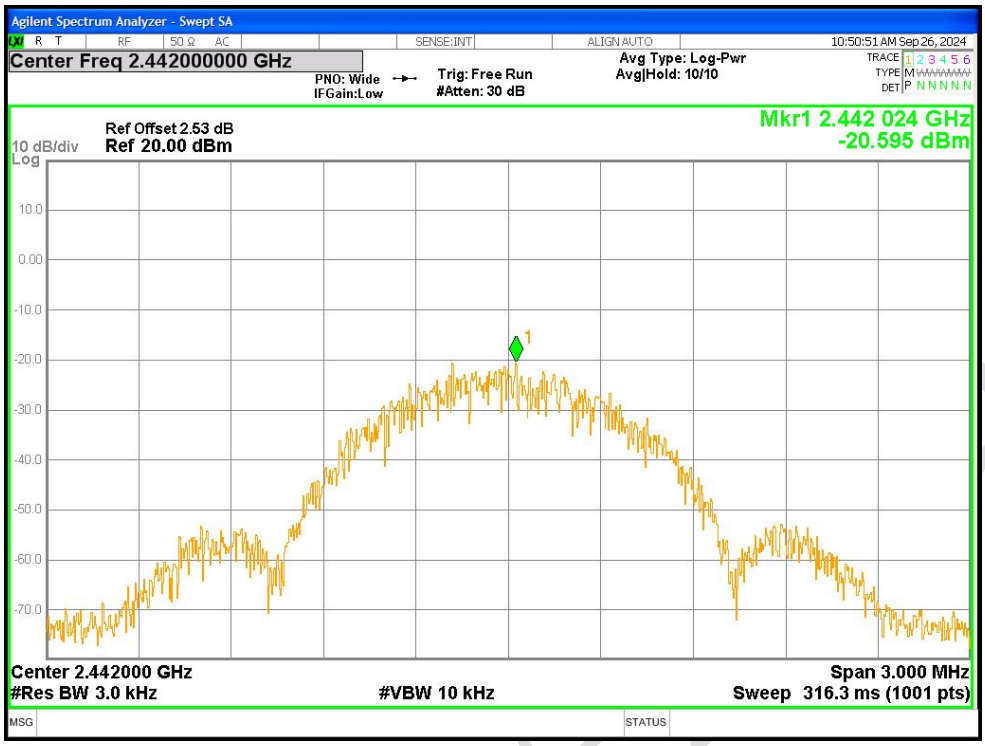


PSD NVNT BLE 1M 2480MHz Ant1

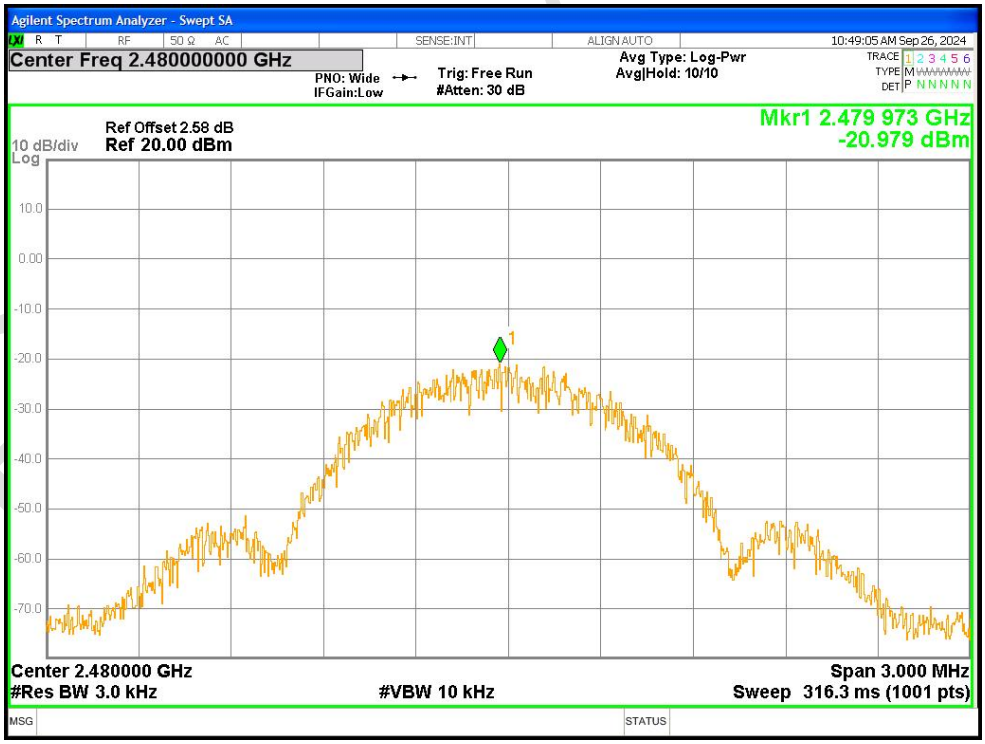


PSD NVNT BLE 2M 2402MHz Ant1

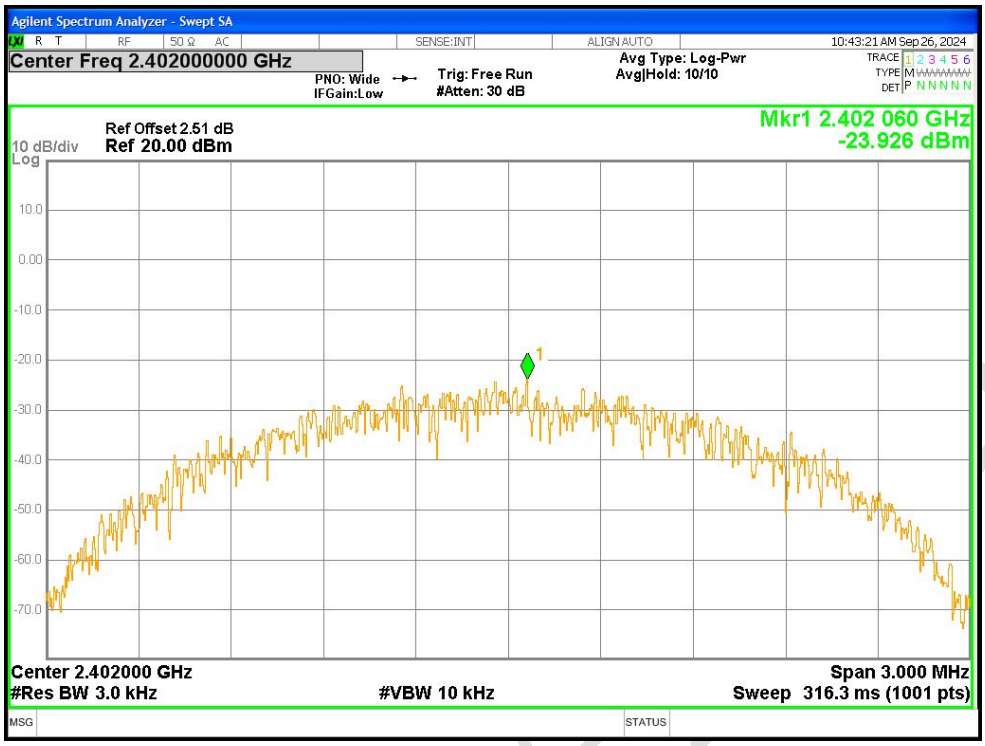


PSD NVNT BLE 2M 2442MHz Ant1

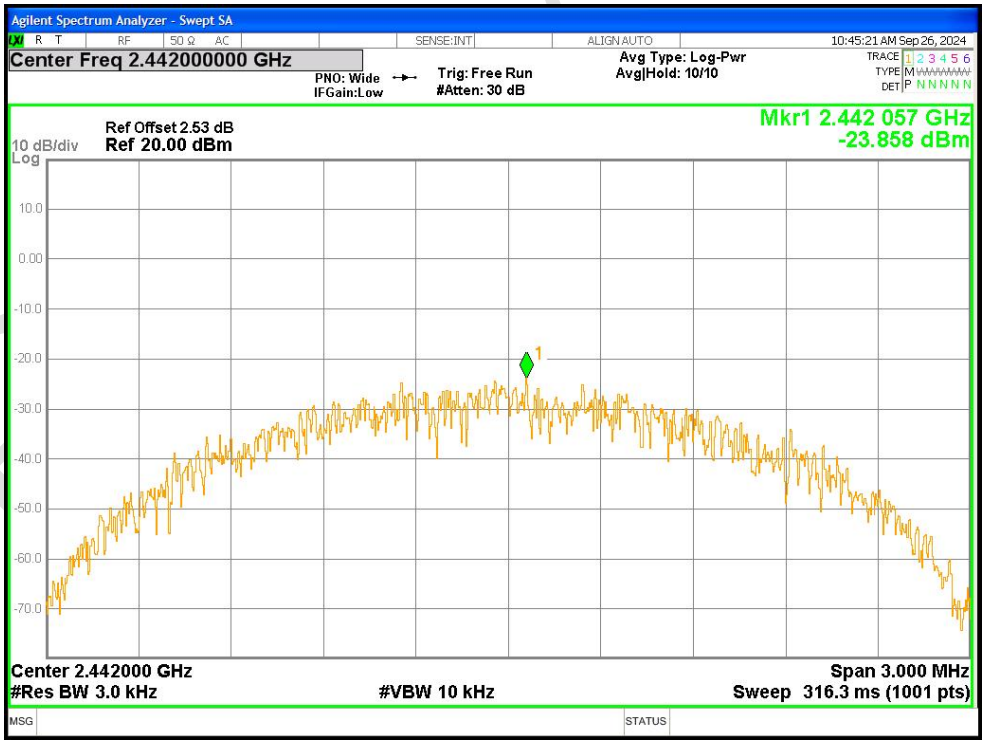


PSD NVNT BLE 2M 2480MHz Ant1

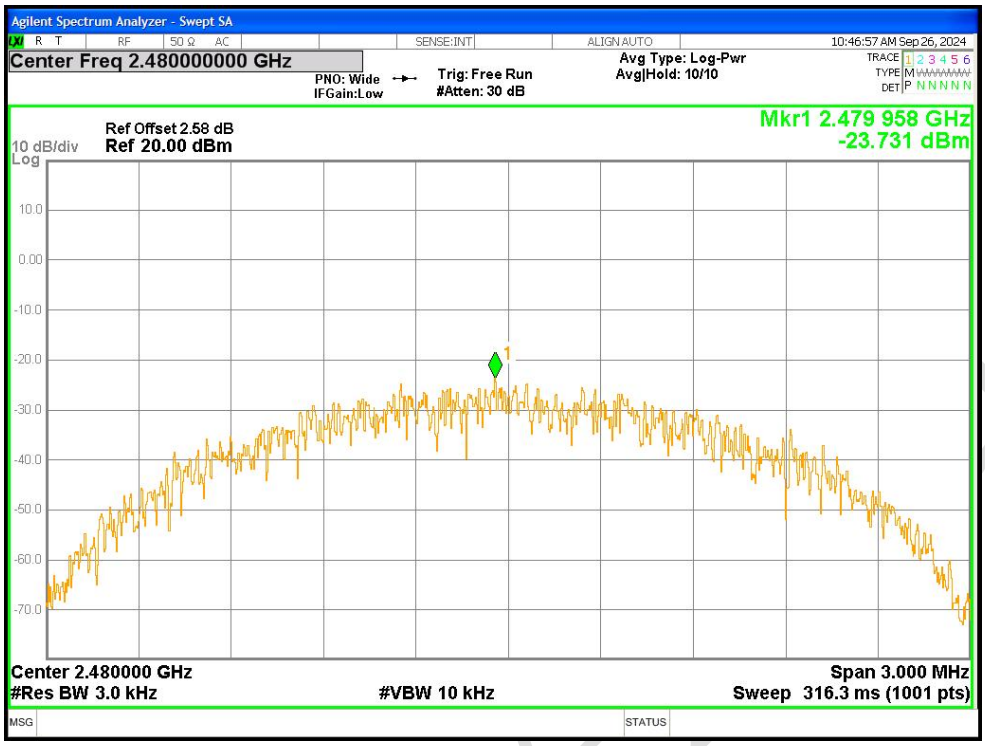
Agilent Spectrum Analyzer - Swept SA
Center Freq 2.480000000 GHz
PNO: Wide
IFGain:Low
Trig: Free Run
#Atten: 30 dB
Avg Type: Log-Pwr
Avg|Hold: 10/10
10:46:57 AM Sep 26, 2024
Ref Offset 2.58 dB
10 dB/div
Ref 20.00 dBm
Log
Mkr1 2.479 958 GHz
-23.731 dBm
Center 2.480000 GHz
#Res BW 3.0 kHz
#VBW 10 kHz
Span 3.000 MHz
Sweep 316.3 ms (1001 pts)

**Band Edge**

| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|---|---|---|---|---|---|---|
| NVNT | BLE 1M | 2402 | Ant1 | -48.35 | -30 | Pass |
| NVNT | BLE 1M | 2480 | Ant1 | -50.19 | -30 | Pass |
| NVNT | BLE 2M | 2402 | Ant1 | -48.72 | -30 | Pass |
| NVNT | BLE 2M | 2480 | Ant1 | -49.15 | -30 | Pass |

Band Edge NVNT BLE 1M 2402MHz Ant1 Ref

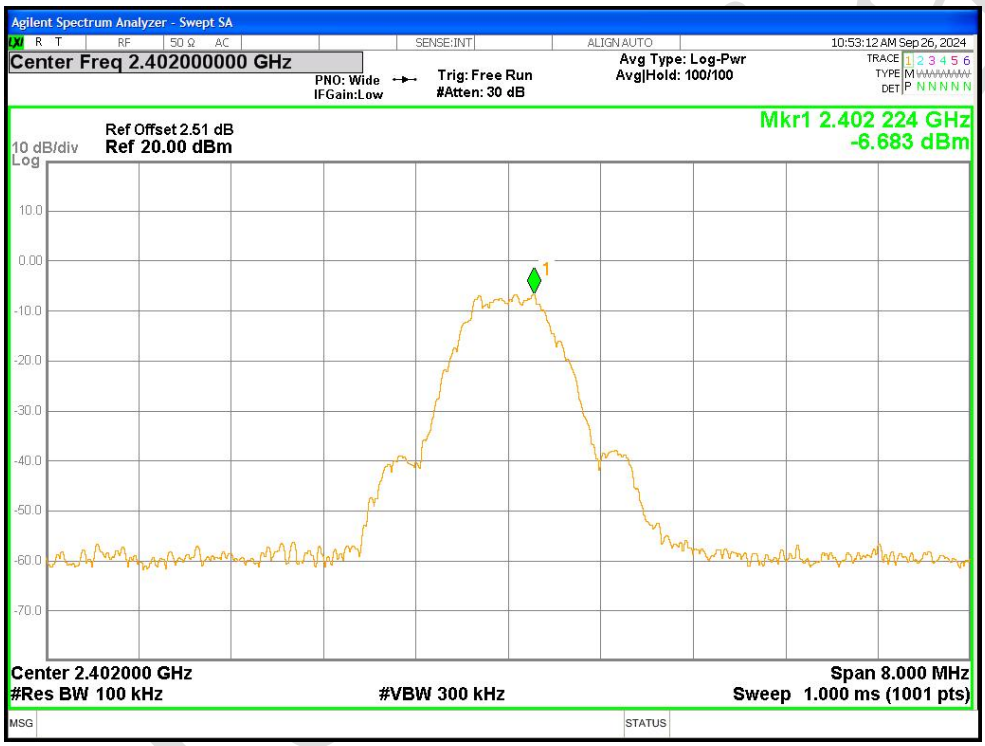


Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

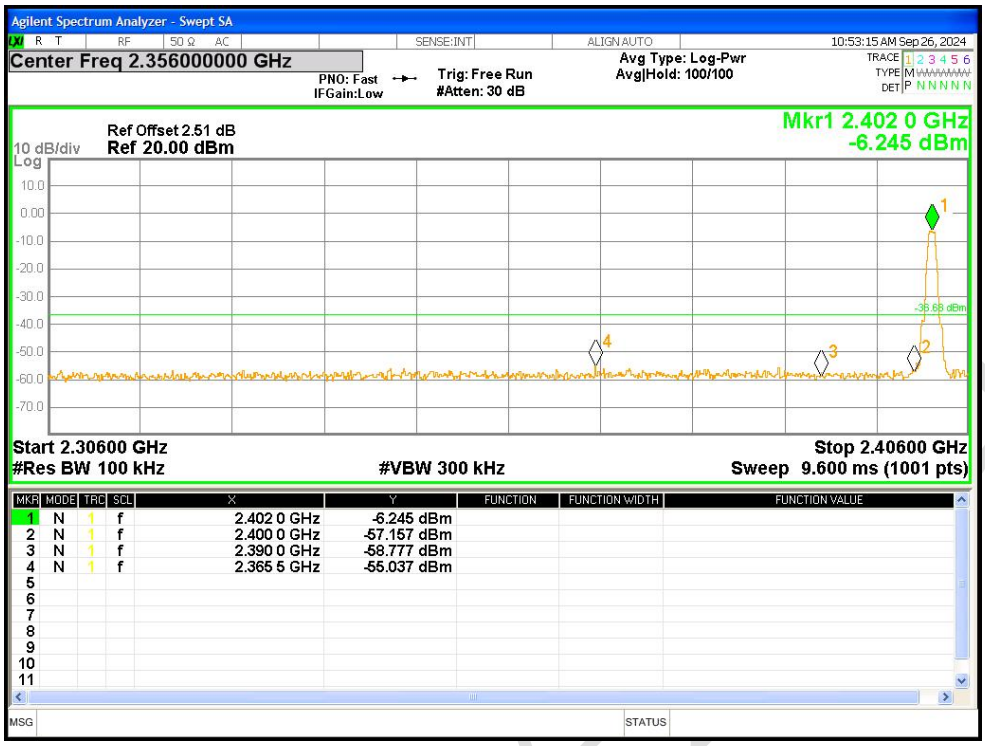


Band Edge NVNT BLE 1M 2480MHz Ant1 Ref

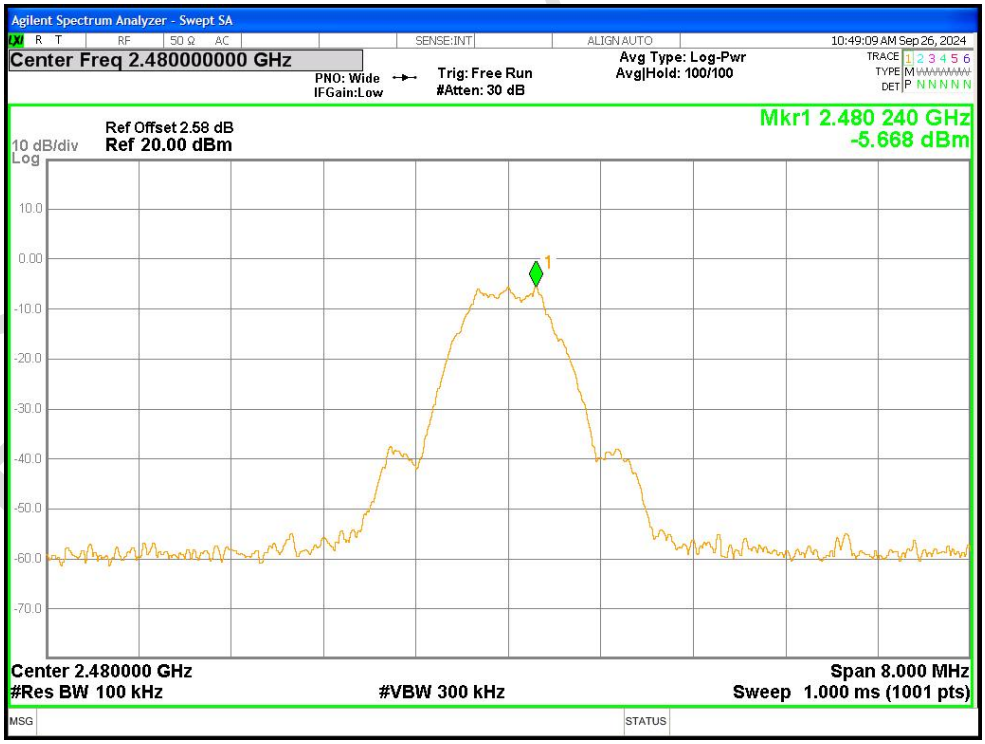


Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

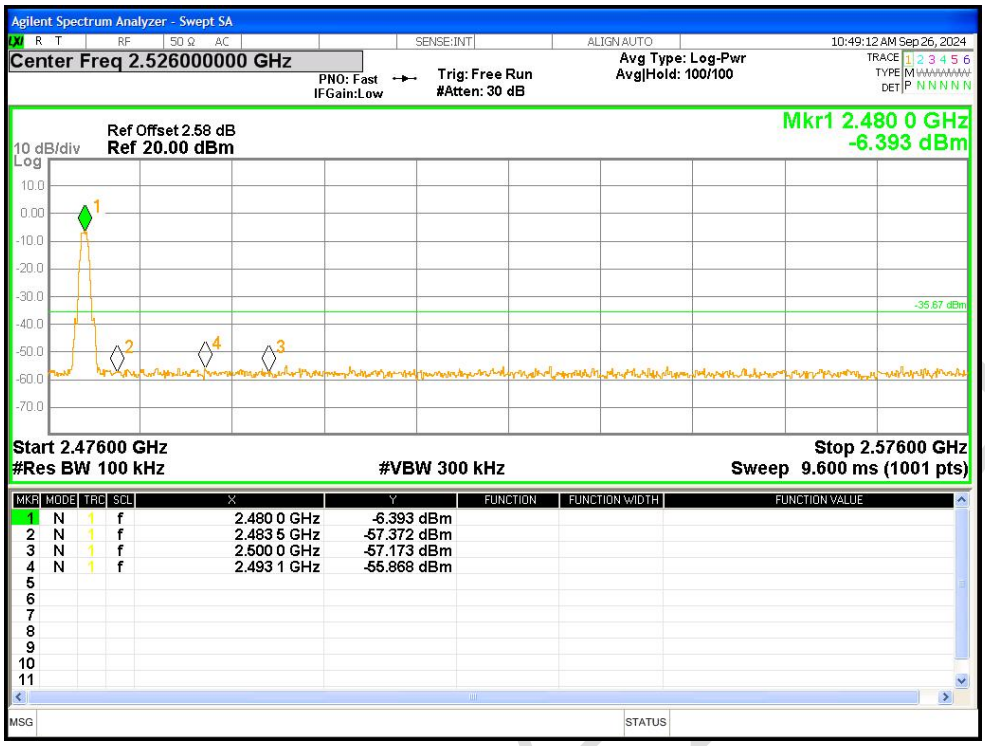


Band Edge NVNT BLE 2M 2402MHz Ant1 Ref

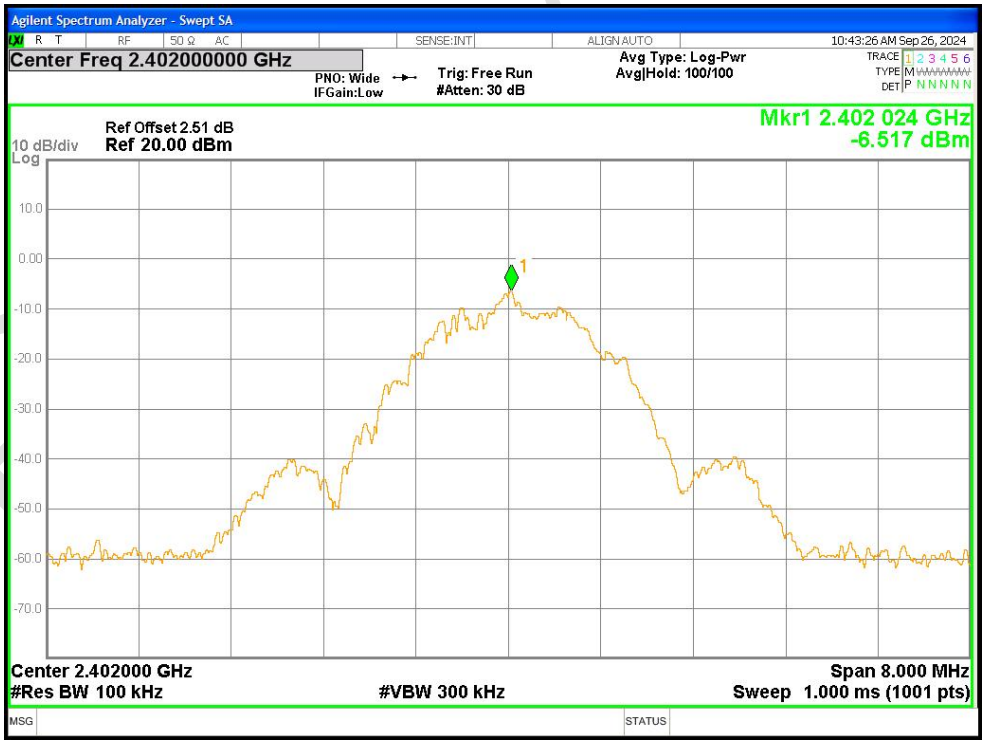


Band Edge NVNT BLE 2M 2402MHz Ant1 Emission

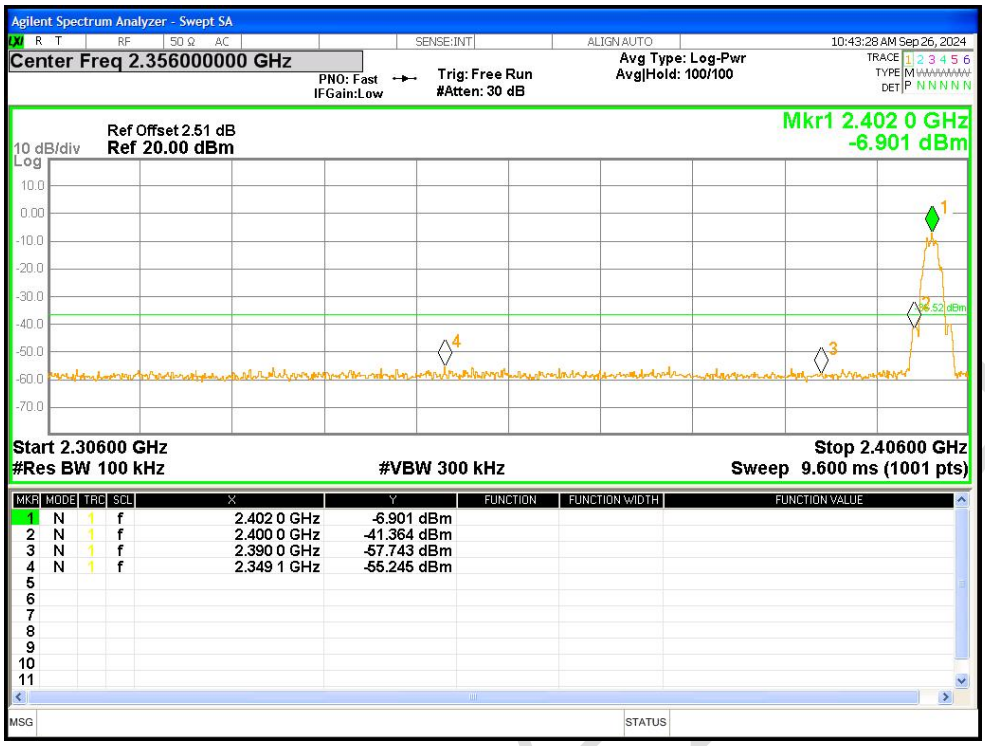


Band Edge NVNT BLE 2M 2480MHz Ant1 Ref

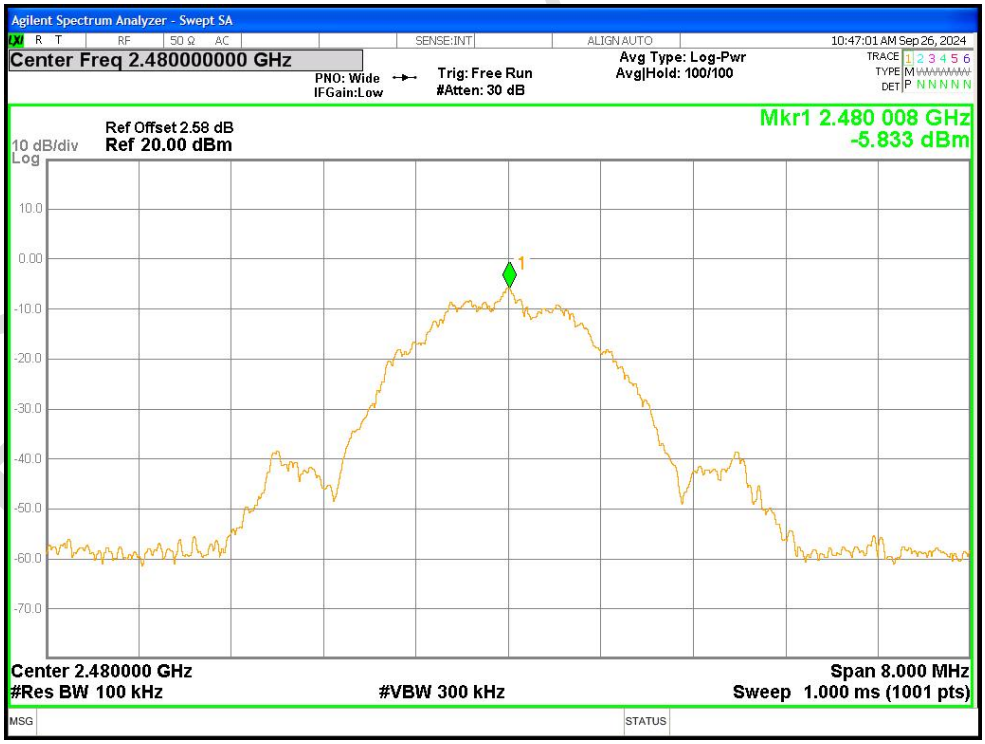


Band Edge NVNT BLE 2M 2480MHz Ant1 Emission

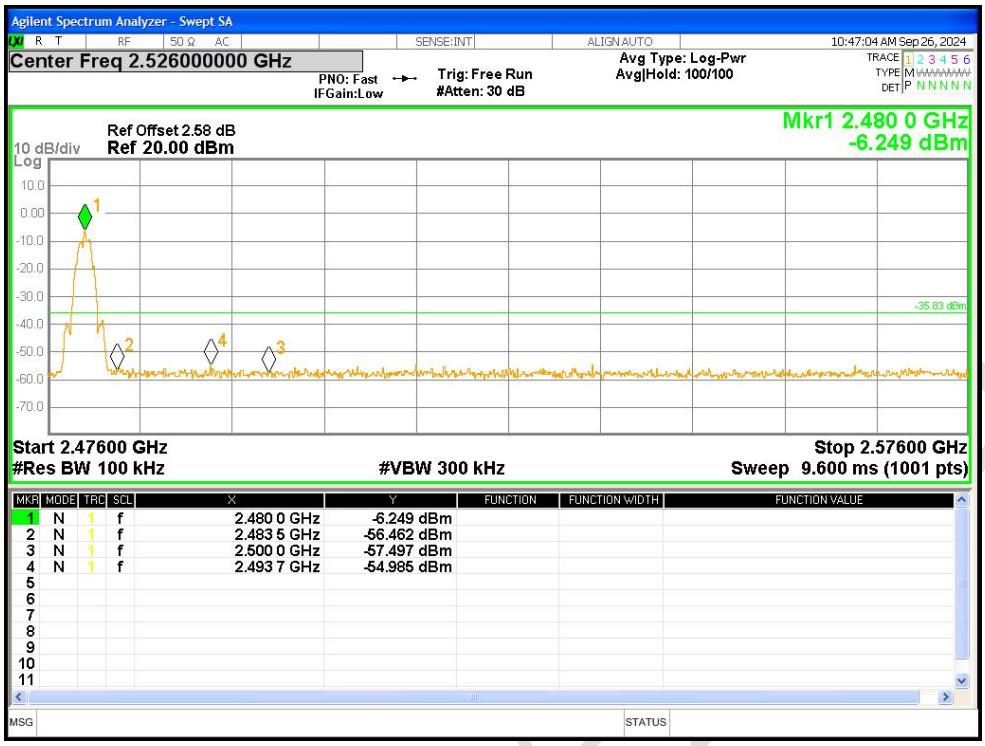
Agilent Spectrum Analyzer - Swept SA
Center Freq 2.526000000 GHz
PNO: Fast
IFGain:Low
Trig: Free Run
#Atten: 30 dB
Avg Type: Log-Pwr
Avg|Hold: 100/100
10:47:04 AM Sep 26, 2024
Ref Offset 2.58 dB
10 dB/div
Ref 20.00 dBm
Log
Mkr1 2.480 0 GHz
-6.249 dBm
-35.83 dBm
Start 2.47600 GHz
#Res BW 100 kHz
#VBW 300 kHz
Stop 2.57600 GHz
Sweep 9.600 ms (1001 pts)
1 N 1 f 2.480 0 GHz -6.249 dBm
2 N 1 f 2.483 5 GHz -56.462 dBm
3 N 1 f 2.500 0 GHz -57.497 dBm
4 N 1 f 2.493 7 GHz -54.985 dBm