



FCC PART 15.247 TEST REPORT

For

HPI Racing Ltd

19 William Nadin Way, Swadlincote, United Kingdom

FCC ID: 2AMRU-TF-41

Report Type: Original Report	Product Type: 2.4GHz FHSS Digital RC System
Test Engineer: Kyle Xu 	
Report Number: RKS170606003-00B	
Report Date: 2017-06-22	
Reviewed By: Oscar Ye RF Leader 	
Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road,Kunshan,Jiangsu province,China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST	9
FCC§15.247 (i), §1.1310 &§2.1093 –RF EXPOSURE	10
APPLICABLE STANDARD	10
MEASUREMENT RESULT	11
FCC §15.203 – ANTENNA REQUIREMENT	12
APPLICABLE STANDARD	12
ANTENNA INFORMATION	12
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	13
APPLICABLE STANDARD	13
MEASUREMENT UNCERTAINTY	13
EUT SETUP	13
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	14
TEST PROCEDURE	14
CORRECTED AMPLITUDE & MARGIN CALCULATION	15
TEST RESULTS SUMMARY	15
TEST DATA	15
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	18
APPLICABLE STANDARD	18
TEST PROCEDURE	18
TEST DATA	18
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....	21
APPLICABLE STANDARD	21
TEST PROCEDURE	21
TEST DATA	21
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	24
APPLICABLE STANDARD	24
TEST PROCEDURE	24

TEST DATA	24
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	26
APPLICABLE STANDARD	26
TEST PROCEDURE	26
TEST DATA	26
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	29
APPLICABLE STANDARD	29
TEST PROCEDURE	29
TEST DATA	29
FCC §15.247(d) - BAND EDGES TESTING	32
APPLICABLE STANDARD	32
TEST PROCEDURE	32
TEST DATA	32

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	HPI Racing Ltd
Tested Model	TF-41
Product Type	2.4GHz FHSS Digital RC System
Dimension	148mm(L)×120 mm(W)×219 mm(H)
Power Supply	DC 6V (supplied from 1.5V*4cell “AA” alkaline battery)

**All measurement and test data in this report was gathered from production sample serial number: 20170606003. (Assigned by the BACL. The EUT supplied by the applicant was received on 2017-06-06)*

Objective

This test report is prepared on behalf of HPI Racing Ltd in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No Related Submittal(s)/Grant(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and DA 00-705 March 30, 2000.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
Occupied Bandwidth		0.5kHz
Temperature		1.0℃
Humidity		6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road,Kunshan,Jiangsu province,China.

Test site at Bay Area Compliance Laboratories Corp. (Kunshan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 06, 2014. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For GFSK Modulation, 46 channels are provided for testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2405	25	2429
2	2406	...	
...		...	
...		45	2449
24	2428	46	2450

EUT was tested with Channel 1, 24 and 46.

EUT Exercise Software

The EUT was tested in the engineering mode, EUT can be setup for fixed channel mode and hopping mode

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable


Cable Description	Shielding Type	Length (m)	From Port	To
/	/	/	/	/

Block Diagram of Test Setup

For Radiated Emissions (Below 1GHz):

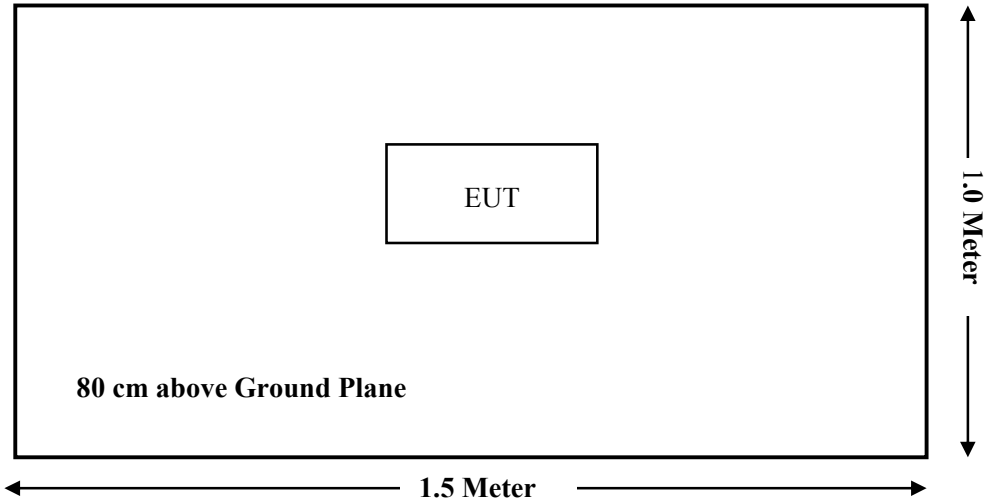

For Radiated Emissions (Above 1GHz):

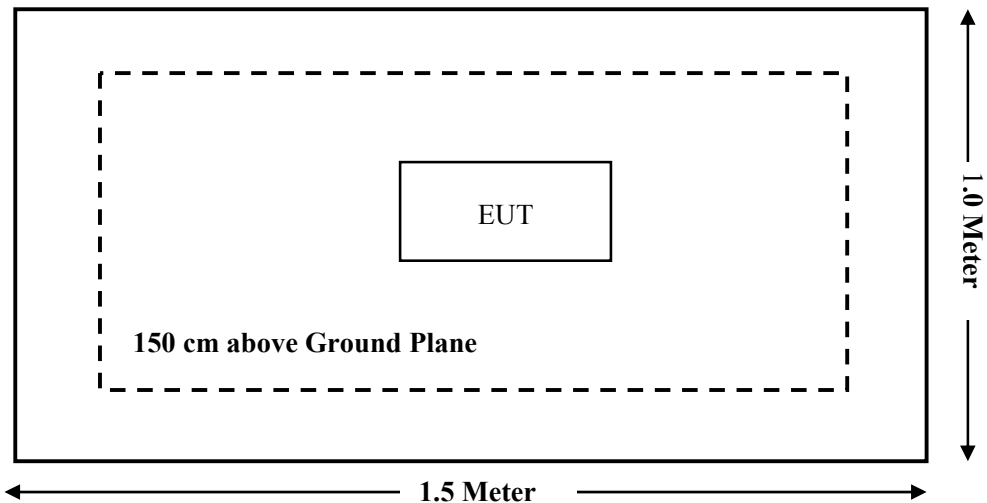

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i)§1.1307(b)(1) & §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Not Applicable
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

Note: The EUT is powered by batterys only.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2016-11-25	2017-11-24
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2016-11-25	2017-11-24
Sunol Sciences	Broadband Antenna	JB3	A090314-2	2016-01-09	2019-01-08
ETS	Horn Antenna	3115	6229	2016-01-11	2019-01-10
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-10-18	2019-10-17
Sonoma Instrunent	Pre-amplifier	330	171377	2016-12-12	2017-12-11
Narda	Pre-amplifier	AFS42-00101800	2001270	2016-12-12	2017-12-11
R&S	Auto test Software	EMC32	100361	/	/
Haojintech	Coaxial Cable	Cable-1	001	2016-12-12	2017-12-11
Haojintech	Coaxial Cable	Cable-2	002	2016-12-12	2017-12-11
Haojintech	Coaxial Cable	Cable-3	003	2016-12-12	2017-12-11
MICRO-COAX	Coaxial Cable	Cable-4	004	2016-12-12	2017-12-11
MICRO-COAX	Coaxial Cable	Cable-5	005	2016-12-12	2017-12-11
RF Conducted Test					
Rohde & Schwarz	FSV40 Signal Analyzer	FSV40	101116	2016-07-04	2017-07-03
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2016-09-21	2017-09-20
Hobbico	RF Cable	N/A	N/A	2017-06-19	2018-06-18

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1310 & §2.1093 –RF EXPOSURE

Applicable Standard

According to §2.1093 and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

b: For 100 MHz to 6 GHz and *test separation distances* > 50 mm, the 1-g and 10-g SAR *test exclusion thresholds* are determined by the following (also illustrated in Appendix B):³²

- 1) {[Power allowed at *numeric threshold* for 50 mm in step a)] + [(test separation distance – 50 mm)·(f_(MHz)/150)]} mW, for 100 MHz to 1500 MHz
- 2) {[Power allowed at *numeric threshold* for 50 mm in step a)] + [(test separation distance – 50 mm)·10]} mW, for > 1500 MHz and ≤ 6 GHz

Appendix B

SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and > 50 mm

Approximate SAR test exclusion power thresholds at selected frequencies and test separation distances are illustrated in the following table. The equation and threshold in 4.3.1 must be applied to determine SAR test exclusion.

MHz	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	mm
100	474	481	487	494	501	507	514	521	527	534	541	547	554	561	567	mW
150	387	397	407	417	427	437	447	457	467	477	487	497	507	517	527	
300	274	294	314	334	354	374	394	414	434	454	474	494	514	534	554	
450	224	254	284	314	344	374	404	434	464	494	524	554	584	614	644	
835	164	220	275	331	387	442	498	554	609	665	721	776	832	888	943	
900	158	218	278	338	398	458	518	578	638	698	758	818	878	938	998	
1500	122	222	322	422	522	622	722	822	922	1022	1122	1222	1322	1422	1522	
1900	109	209	309	409	509	609	709	809	909	1009	1109	1209	1309	1409	1509	
2450	96	196	296	396	496	596	696	796	896	996	1096	1196	1296	1396	1496	
3600	79	179	279	379	479	579	679	779	879	979	1079	1179	1279	1379	1479	
5200	66	166	266	366	466	566	666	766	866	966	1066	1166	1266	1366	1466	
5400	65	165	265	365	465	565	665	765	865	965	1065	1165	1265	1365	1465	
5800	62	162	262	362	462	562	662	762	862	962	1062	1162	1262	1362	1462	

Measurement Result

Frequency Range	Conducted Peak power	Antenna Gain	EIRP		Minimum Test Separation Distances	SAR Test Exclusion Thresholds	Result
(MHz)	(dBm)	(dBi)	(dBm)	(mW)	(mm)	(mW)	
2405-2450	17.50	2.0	19.50	89.12	95	546	Compliance

Note:

1. Turn up power 16.5 ± 1 dBm, which is declared by the manufacturer.
2. Minimum test separation distance is 95mm, as follow photo:



FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Information

The EUT has a Dipole antenna arrangement, which the antenna gain is 2.0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard


FCC §15.205; §15.209; §15.247(d)


Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

EUT Setup

Below 1 GHz:

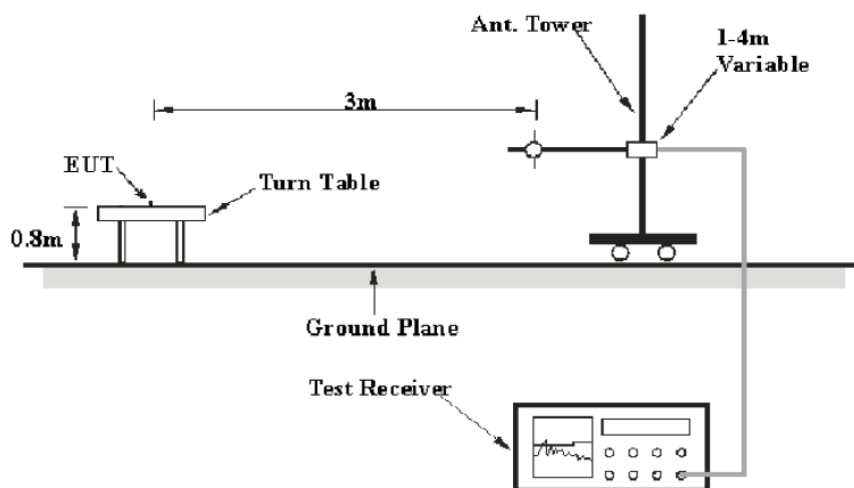

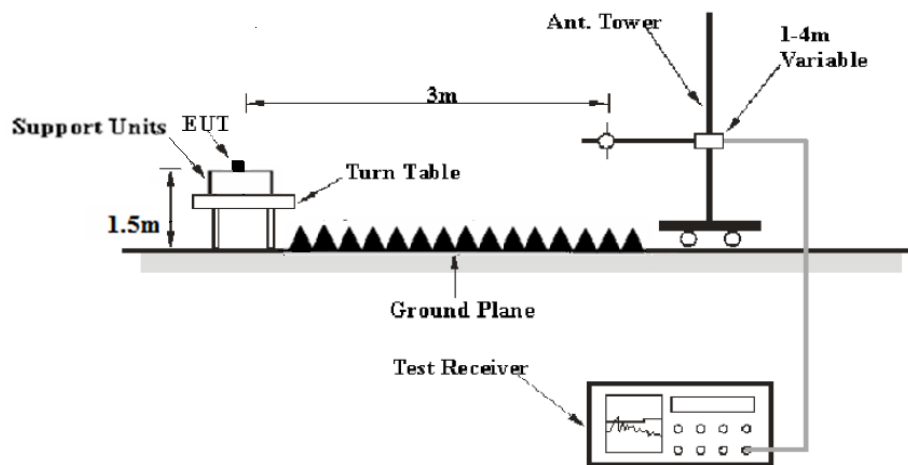Above 1GHz:

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP

Frequency Range	RBW	Video B/W	Detector
1GHz – 25GHz	1MHz	3 MHz	PK
	1MHz	10 Hz	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data

Environmental Conditions

Temperature:	24.1 °C
Relative Humidity:	51%
ATM Pressure:	101.3 kPa

The testing was performed by Kyle Xu on 2017-06-19.

EUT operation mode: Transmitting(Scan with X-Axis, Y-Axis and Z-Axis position, the worst case was recorded)

30MH -25 GHz:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
Low Channel (2405 MHz)									
50.97	20.2	QP	3	144	V	-5.57	14.63	40	25.37
2405.00	119.63	PK	200	177	V	-6.19	113.44	/	/
2405.00	102.08	Ave	200	177	V	-6.19	95.89	/	/
2405.00	109.69	PK	275	112	H	-6.19	103.50	/	/
2405.00	92.22	Ave	275	112	H	-6.19	86.03	/	/
2390.00	62.39	PK	202	111	V	-6.22	56.17	74.00	17.83
2390.00	46.36	Ave	202	111	V	-6.22	40.14	54.00	13.86
2400.00	66.73	PK	137	245	V	-6.19	60.54	74.00	13.46
2400.00	50.12	Ave	137	245	V	-6.19	43.93	54.00	10.07
1503.23	41.36	PK	77	116	V	-9.31	32.05	74.00	41.95
1503.23	29.35	Ave	77	116	V	-9.31	20.04	54.00	33.96
4810.00	59.72	PK	144	151	H	1.61	61.33	74.00	12.67
4810.00	42.92	Ave	144	151	H	1.61	44.53	54.00	9.47
7215.00	48.59	PK	278	103	V	7.55	56.14	74.00	17.86
7215.00	32.73	Ave	278	103	V	7.55	40.28	54.00	13.72
Middle Channel (2428 MHz)									
50.97	20.13	QP	252	162	V	-5.57	14.56	40	25.44
2428.00	118.06	PK	175	246	V	-6.10	111.96	/	/
2428.00	101.23	Ave	175	246	V	-6.10	95.13	/	/
2428.00	108.54	PK	293	199	H	-6.10	102.44	/	/
2428.00	91.02	Ave	293	199	H	-6.10	84.92	/	/
1531.12	43.21	PK	33	214	V	-9.31	33.90	74.00	40.10
1531.12	29.03	Ave	33	214	V	-9.31	19.72	54.00	34.28
4012.35	40.35	PK	185	120	V	-0.27	40.08	74.00	33.92
4012.35	28.67	Ave	185	120	V	-0.27	28.40	54.00	25.60
4856.00	57.18	PK	124	160	H	1.79	58.97	74.00	15.03
4856.00	40.19	Ave	124	160	V	1.79	41.98	54.00	12.02
6601.36	41.03	PK	314	171	H	6.20	47.23	74.00	26.77
6601.36	29.36	Ave	314	171	H	6.20	35.56	54.00	18.44
7284.00	44.76	PK	65	112	V	7.67	52.43	74.00	21.57
7284.00	30.03	Ave	65	112	V	7.67	37.70	54.00	16.30

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
High Channel (2450 MHz)									
50.97	20.03	QP	220	122	V	-5.57	14.46	40	25.54
2450.00	117.31	PK	288	209	V	-6.01	111.30	/	/
2450.00	99.69	Ave	288	209	V	-6.01	93.68	/	/
2450.00	107.58	PK	98	179	H	-6.01	101.57	/	/
2450.00	90.39	Ave	98	179	H	-6.01	84.38	/	/
2483.50	53.58	PK	111	115	V	-6.01	47.57	74.00	26.43
2483.50	38.72	Ave	111	115	V	-6.01	32.71	54.00	21.29
1151.82	43.22	PK	253	250	V	-11.62	31.60	74.00	42.40
1151.82	29.91	Ave	253	250	V	-11.62	18.29	54.00	35.71
4900.00	54.56	PK	174	227	H	1.97	56.53	74.00	17.47
4900.00	38.01	Ave	174	227	H	1.97	39.98	54.00	14.02
6621.32	40.36	PK	279	237	V	6.26	46.62	74.00	27.38
6621.32	28.78	Ave	279	237	V	6.26	35.04	54.00	18.96
7350.00	43.93	PK	154	182	V	7.79	51.72	74.00	22.28
7350.00	29.16	Ave	154	182	V	7.79	36.95	54.00	17.05

Note: The fundamental test is without Amplifier

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	24.1 °C
Relative Humidity:	51%
ATM Pressure:	101.3 kPa

The testing was performed by Kyle Xu on 2017-06-19.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


Modulation	Channel	Frequency (MHz)	Channel Separation (kHz)	Limit (kHz)	Result
GFSK	Low	2405	1002	261.86	Pass
	Adjacent	2406			
	Middle	2428	1002	264.53	Pass
	Adjacent	2429			
	Adjacent	2449	1002	261.86	Pass
	High	2450			

The limit = 20dB Bandwidth*2/3


Low Channel

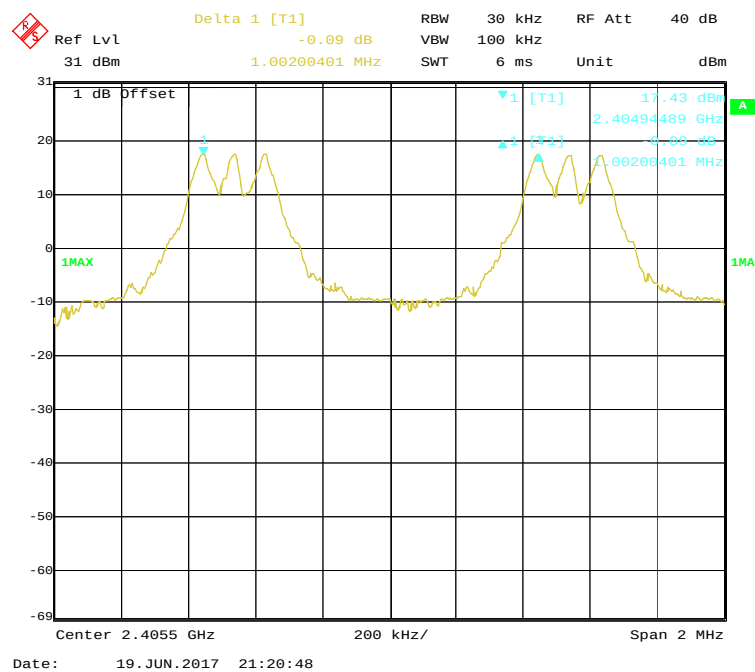

Middle Channel

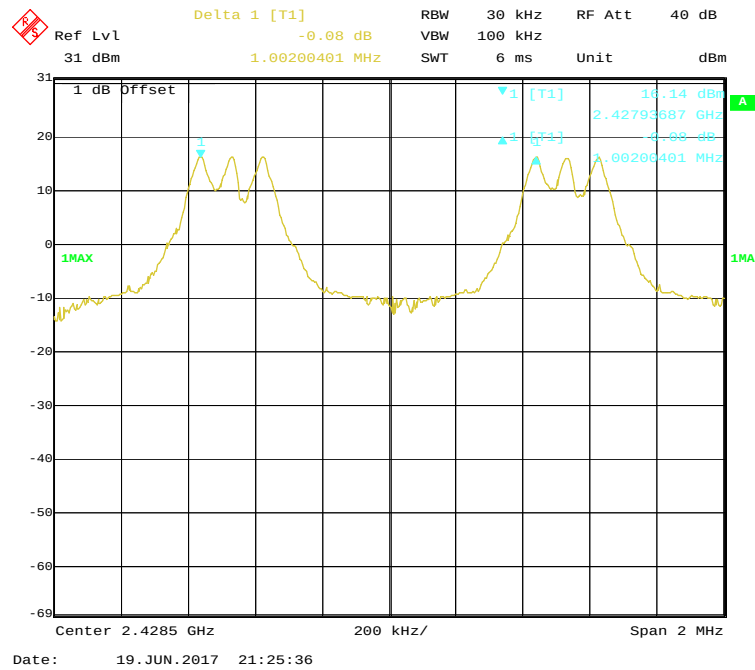

High Channel

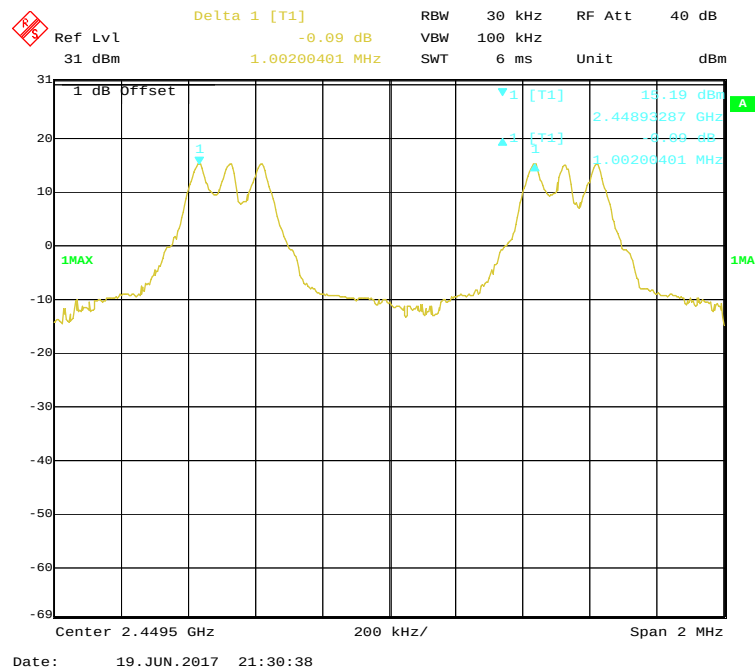

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH**Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data**Environmental Conditions**

Temperature:	24.1 °C
Relative Humidity:	51%
ATM Pressure:	101.3 kPa


The testing was performed by Kyle Xu on 2017-06-19.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following tables and plots

Modulation	Channel	Frequency (MHz)	20 dB Emission Bandwidth (kHz)
GFSK	Low	2405	392.79
	Middle	2428	396.79
	High	2450	392.79


Low Channel

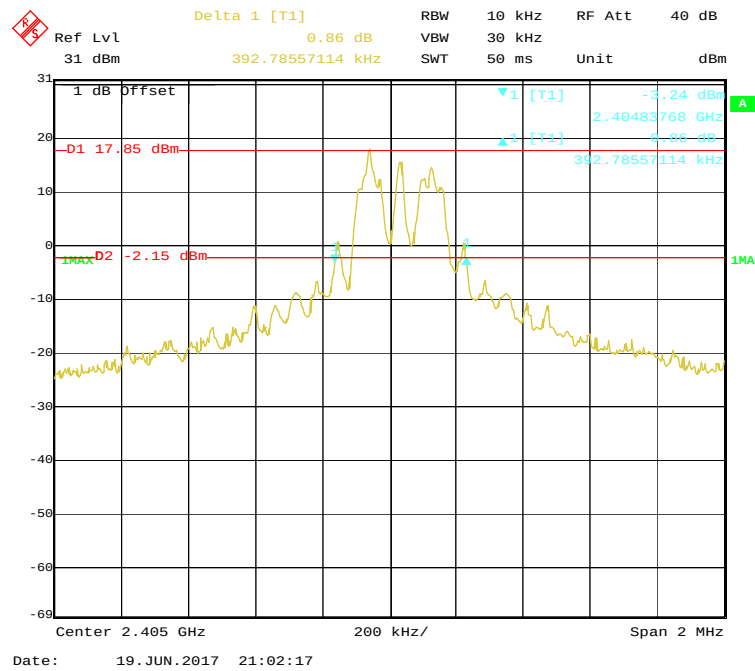

Middle Channel

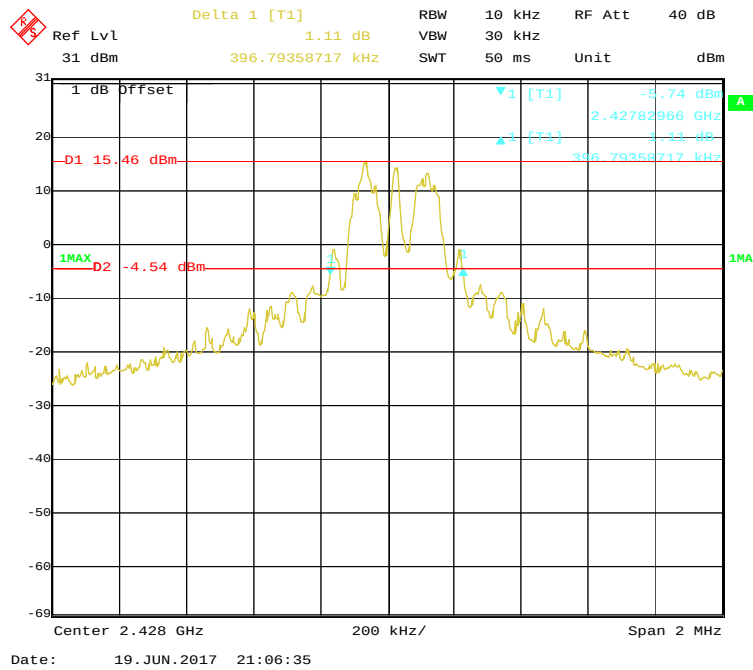

High Channel

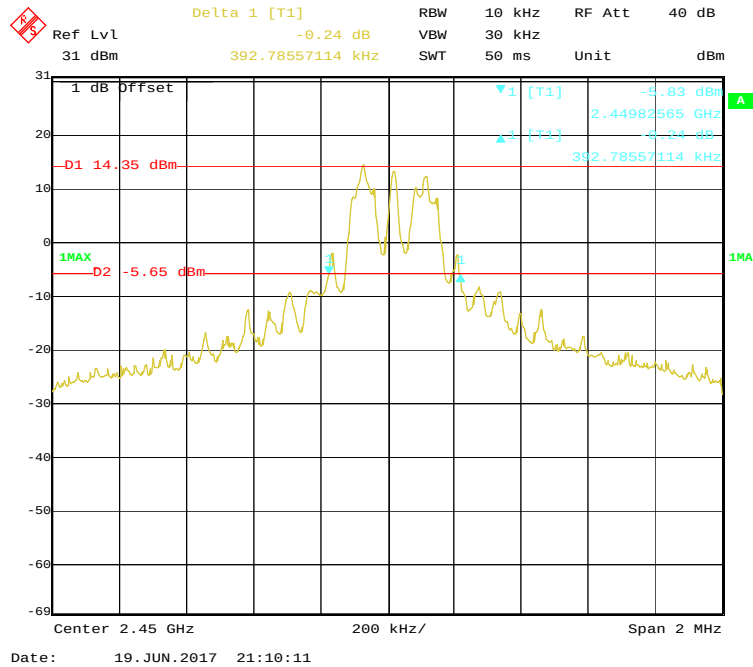

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Data**Environmental Conditions**

Temperature:	24.1 °C
Relative Humidity:	51%
ATM Pressure:	101.3 kPa


The testing was performed by Kyle Xu on 2017-06-19.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots

Modulation	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
GFSK	2405-2450	46	≥15

Number of Hopping Channels

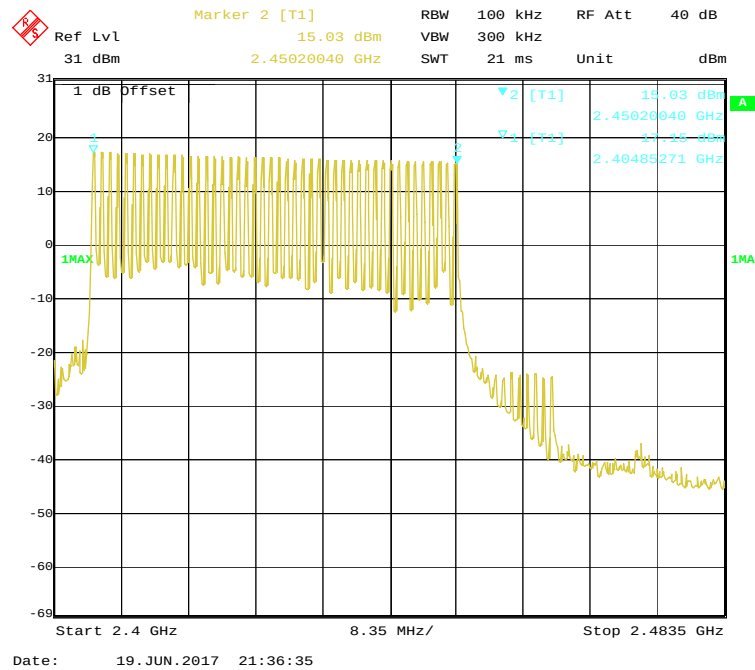

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Test Data

Environmental Conditions

Temperature:	24.1 °C
Relative Humidity:	51%
ATM Pressure:	101.3 kPa

The testing was performed by Kyle Xu on 2017-06-19.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following tables and plots

Modulation	Channel	Pulse Width	Pulse Number	Dwell Time	Limit	Result
		(ms)		(S)	(S)	
GFSK	Middle	1.50	15*3	0.0675	≤0.4	Pass
	Note: Dwell time = Pulse time*N; Observed time = 0.4s* hopping number= 0.4s*46=18.4s					


Number of pusles



Zoom in A

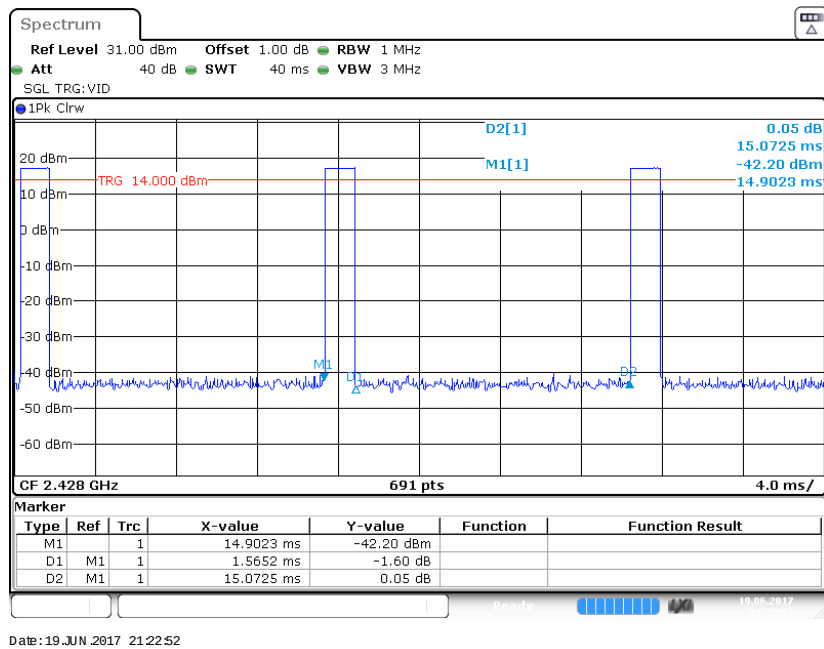

Single Pusle

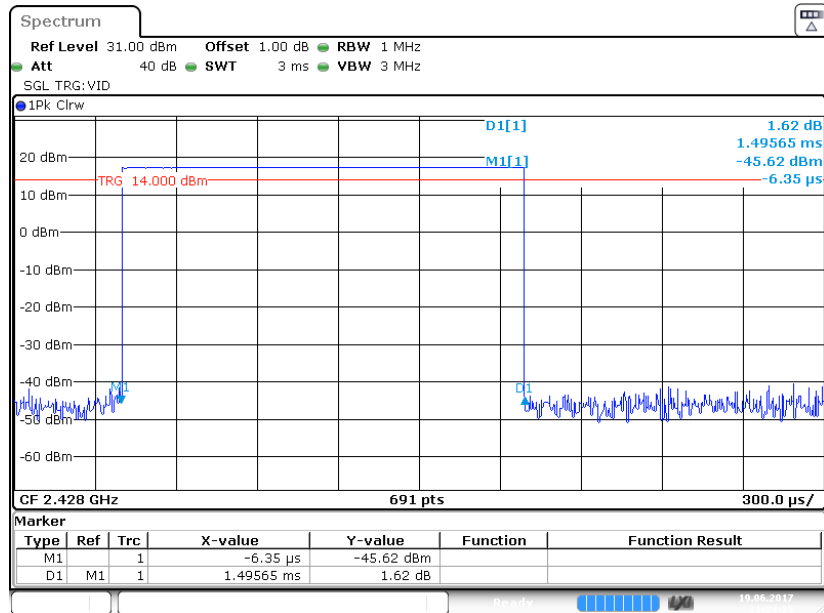

Date: 19 JUN 2017 21:24:24

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Data

Environmental Conditions

Temperature:	24.1 °C
Relative Humidity:	51%
ATM Pressure:	101.3 kPa


The testing was performed by Kyle Xu on 2017-06-19.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following tables and plots

Modulation	Channel	Frequency (MHz)	Output Power		Limit (mW)
			(dBm)	(mW)	
GFSK	Low	2405	17.48	55.98	125
	Middle	2428	16.47	44.36	125
	High	2450	15.62	36.48	125


Low Channel

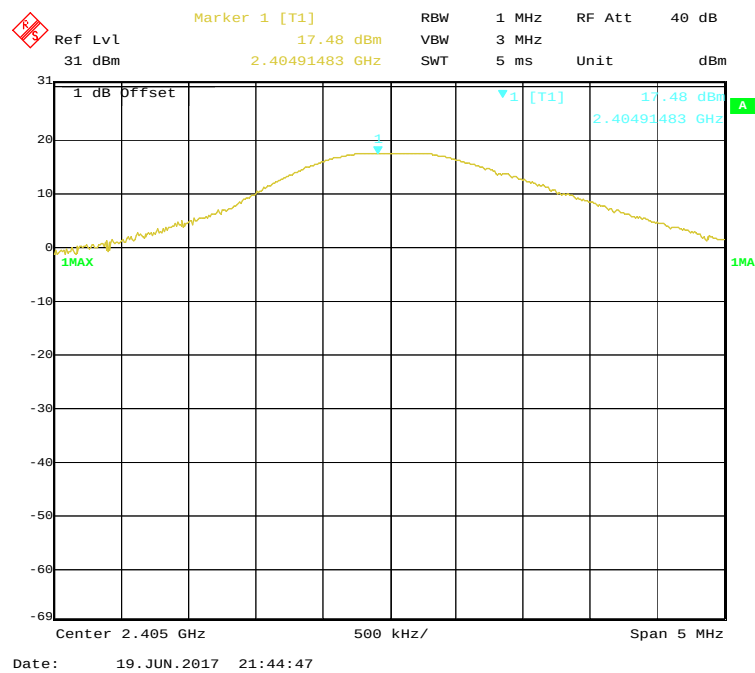

Middle Channel

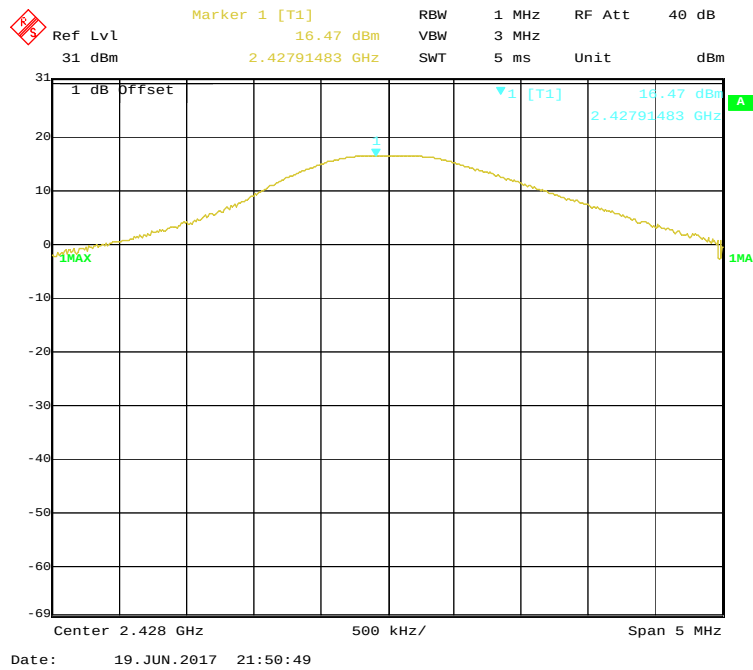

High Channel

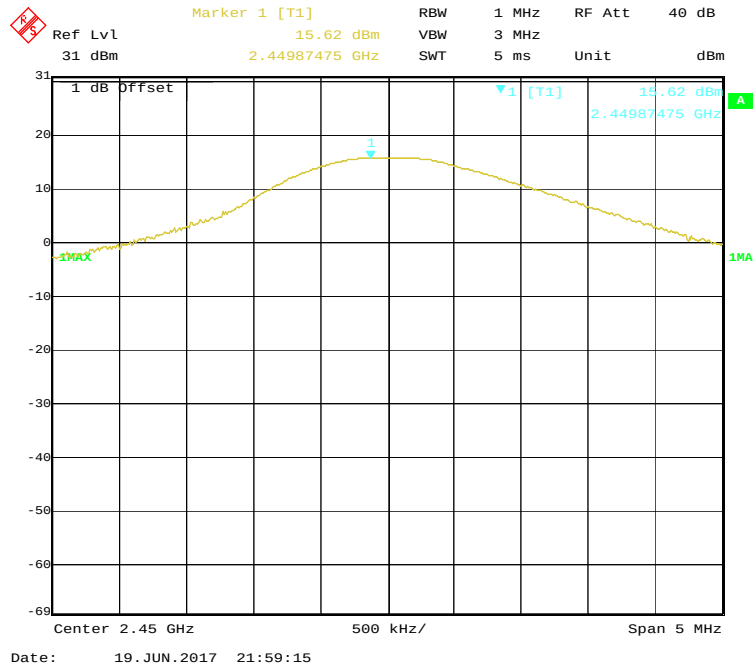

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	24.1 °C
Relative Humidity:	51%
ATM Pressure:	101.3 kPa

The testing was performed by Kyle Xu on 2017-06-19.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following plots.

Ref Lvl 31 dBm
 RBW 100 kHz
 VBW 300 kHz
 SWT 5 ms
 RF Att 40 dB
 Unit dBm

Marker 2 [T1]
 -21.48 dBm
 2.39296593 GHz

1 dB Offset
 D1 17.51 dBm
 D2 -2.49 dBm

2 [T1]
 -21.48 dBm
 2.39296593 GHz
 3 [T1]
 -21.48 dBm
 2.40002904 GHz

Center 2.4 GHz
 2 MHz/
 Span 20 MHz

Date: 19. JUN. 2017 21:14:39

RBW 100 kHz RF Att 40 dB
 Ref Lvl 31 dBm Unit dBm
 Marker 1 [T1] -46.00 dBm
 2.48350060 GHz
 VBW 300 kHz
 SWT 25 ms
 1 dB Offset
 10 MHz/
 Span 100 MHz
 Date: 19. JUN. 2017 21:12:24

Page 33 of 33