

## FCC TEST REPORT

For

AtGames Digital Media Inc.

Legends Ultimate Home Arcade

Model No.: HA8800

List Model No.: Please refer to page 6

|                                |   |                                                                                                         |
|--------------------------------|---|---------------------------------------------------------------------------------------------------------|
| Prepared for                   | : | AtGames Digital Media Inc.                                                                              |
| Address                        | : | 2228 E Maple Ave, El Segundo, CA 90245, USA                                                             |
| Prepared by                    | : | Shenzhen LCS Compliance Testing Laboratory Ltd.                                                         |
| Address                        | : | 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China |
| Tel                            | : | (+86)755-82591330                                                                                       |
| Fax                            | : | (+86)755-82591332                                                                                       |
| Web                            | : | www.LCS-cert.com                                                                                        |
| Mail                           | : | webmaster@LCS-cert.com                                                                                  |
| Date of receipt of test sample | : | December 31, 2019                                                                                       |
| Number of tested samples       | : | 1                                                                                                       |
| Serial number                  | : | Prototype                                                                                               |
| Date of Test                   | : | December 31, 2019 ~ January 10, 2020                                                                    |
| Date of Report                 | : | January 14, 2020                                                                                        |

**FCC TEST REPORT**  
**FCC CFR 47 PART 15 C(15.247)****Report Reference No.** ..... : **LCS191217060AEC****Date of Issue** ..... : January 14, 2020**Testing Laboratory Name**..... : **Shenzhen LCS Compliance Testing Laboratory Ltd.****Address** ..... : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,  
Bao'an District, Shenzhen, Guangdong, China**Testing Location/ Procedure** ..... : Full application of Harmonised standards ■  
Partial application of Harmonised standards □  
Other standard testing method □**Applicant's Name**..... : **AtGames Digital Media Inc.****Address** ..... : 2228 E Maple Ave, El Segundo, CA 90245, USA**Test Specification****Standard**..... : FCC CFR 47 PART 15 C(15.247)**Test Report Form No.** ..... : LCSEMC-1.0**TRF Originator** ..... : Shenzhen LCS Compliance Testing Laboratory Ltd.**Master TRF** ..... : Dated 2011-03**Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**EUT Description.** ..... : **Legends Ultimate Home Arcade****Trade Mark**..... : N/A**Model/ Type reference** ..... : HA8800**Ratings** ..... : Input: AC100-240V, 50/60Hz 2A  
Output: DC12V/5A**Result** ..... : **Positive****Compiled by:**

Jayden Zhuo/ File administrators

**Supervised by:**

Jin Wang / Technique principal

**Approved by:**

Gavin Liang/ Manager

## FCC -- TEST REPORT

|                                   |                                   |
|-----------------------------------|-----------------------------------|
| Test Report No. : LCS191217060AEC | January 14, 2020<br>Date of issue |
|-----------------------------------|-----------------------------------|

|                          |                                               |
|--------------------------|-----------------------------------------------|
| EUT.....                 | : Legends Ultimate Home Arcade                |
| Type / Model.....        | : HA8800                                      |
| <b>Applicant.....</b>    | <b>: AtGames Digital Media Inc.</b>           |
| Address.....             | : 2228 E Maple Ave, El Segundo, CA 90245, USA |
| Telephone.....           | : /                                           |
| Fax.....                 | : /                                           |
| <b>Manufacturer.....</b> | <b>: AtGames Digital Media Inc.</b>           |
| Address.....             | : 2228 E Maple Ave, El Segundo, CA 90245, USA |
| Telephone.....           | : /                                           |
| Fax.....                 | : /                                           |
| <b>Factory.....</b>      | <b>: AtGames Digital Media Inc.</b>           |
| Address.....             | : 2228 E Maple Ave, El Segundo, CA 90245, USA |
| Telephone.....           | : /                                           |
| Fax.....                 | : /                                           |

|             |          |
|-------------|----------|
| Test Result | Positive |
|-------------|----------|

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Revision History

| Revision | Issue Date       | Revisions     | Revised By  |
|----------|------------------|---------------|-------------|
| 000      | January 14, 2020 | Initial Issue | Gavin Liang |
|          |                  |               |             |
|          |                  |               |             |

## TABLE OF CONTENTS

|                                                       |           |
|-------------------------------------------------------|-----------|
| <b>1. GENERAL INFORMATION .....</b>                   | <b>6</b>  |
| 1.2. HOST SYSTEM CONFIGURATION LIST AND DETAILS ..... | 7         |
| 1.3. EXTERNAL I/O CABLE .....                         | 7         |
| 1.4. DESCRIPTION OF TEST FACILITY .....               | 7         |
| 1.5. STATEMENT OF THE MEASUREMENT UNCERTAINTY .....   | 7         |
| 1.6. MEASUREMENT UNCERTAINTY .....                    | 8         |
| 1.7. DESCRIPTION OF TEST MODES .....                  | 8         |
| 1.8. CHANNEL LIST AND FREQUENCY .....                 | 8         |
| <b>2. TEST METHODOLOGY .....</b>                      | <b>9</b>  |
| 2.1. EUT CONFIGURATION .....                          | 9         |
| 2.2. EUT EXERCISE .....                               | 9         |
| 2.3. GENERAL TEST PROCEDURES .....                    | 9         |
| <b>3. SYSTEM TEST CONFIGURATION .....</b>             | <b>10</b> |
| 3.1. JUSTIFICATION .....                              | 10        |
| 3.2. EUT EXERCISE SOFTWARE .....                      | 10        |
| 3.3. SPECIAL ACCESSORIES .....                        | 10        |
| 3.4. BLOCK DIAGRAM/SCHEMATICS .....                   | 10        |
| 3.5. EQUIPMENT MODIFICATIONS .....                    | 10        |
| 3.6. TEST SETUP .....                                 | 10        |
| <b>4. SUMMARY OF TEST RESULTS .....</b>               | <b>11</b> |
| <b>5. TEST RESULT .....</b>                           | <b>12</b> |
| 5.1. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT ..... | 12        |
| 5.2. RADIATED EMISSIONS MEASUREMENT .....             | 13        |
| 5.3. AC POWER LINE CONDUCTED EMISSIONS .....          | 24        |
| <b>6. LIST OF MEASURING EQUIPMENTS .....</b>          | <b>27</b> |
| <b>7. TEST SETUP PHOTOGRAPHS OF EUT .....</b>         | <b>28</b> |
| <b>8. EXTERIOR PHOTOGRAPHS OF THE EUT .....</b>       | <b>28</b> |
| <b>9. INTERIOR PHOTOGRAPHS OF THE EUT .....</b>       | <b>28</b> |

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EUT               | : Legends Ultimate Home Arcade                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Test Model        | : HA8800<br>HA8800S,HA8800B,HA8800C;HA8800D,HA8801,HA8801S,HA8801B,<br>HA8801C,HA8801D,HA8802,HA8802S,HA8802B,HA8802C;HA8803,<br>HA8803S,HA8803B,HA8803C,HA8804,HA8804S,HA8804B,HA8804C,<br>HA8805,HA8805S,HA8805B,HA8805C,HA8810,HA8810S,HA8810B,<br>HA8810C,HA8810D,HA8811,HA8811S,HA8811B,HA8811C,HA8812,<br>HA8812S,HA8812B,HA8812C,HA8813,HA8813S,HA8813B,HA8813C,<br>HA8814,HA8814S,HA8814B,HA8814C,HA8815,HA8815S,HA8815B,<br>HA8815C,HA8820,HA8820S,HA8820B,HA8820C,HA2800,HA2800S,<br>HA2800B,HA2800C,HA2800D,HA2801,HA2801S,HA2801B,HA2801C,<br>HA2801D |
| Model Number      | : HA8800S,HA8800B,HA8800C;HA8800D,HA8801,HA8801S,HA8801B,<br>HA8801C,HA8801D,HA8802,HA8802S,HA8802B,HA8802C;HA8803,<br>HA8803S,HA8803B,HA8803C,HA8804,HA8804S,HA8804B,HA8804C,<br>HA8805,HA8805S,HA8805B,HA8805C,HA8810,HA8810S,HA8810B,<br>HA8810C,HA8810D,HA8811,HA8811S,HA8811B,HA8811C,HA8812,<br>HA8812S,HA8812B,HA8812C,HA8813,HA8813S,HA8813B,HA8813C,<br>HA8814,HA8814S,HA8814B,HA8814C,HA8815,HA8815S,HA8815B,<br>HA8815C,HA8820,HA8820S,HA8820B,HA8820C,HA2800,HA2800S,<br>HA2800B,HA2800C,HA2800D,HA2801,HA2801S,HA2801B,HA2801C,<br>HA2801D           |
| Model Declaration | : PCB board, structure and internal of these model(s) are the same,<br>Only the model name is different for these models.                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Power Supply      | : Input: AC100-240V, 50/60Hz 2A<br>Output: DC12V/5A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Hardware Version  | : HA8800-V2.2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Software Version  | : HA8800_Wifi_V2.0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Bluetooth         | :                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Frequency Range   | : 2402-2480MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Channel Number    | : 79 channels for Bluetooth V4.1 (BDR/EDR)<br>40 channels for Bluetooth V4.1 (BT LE)                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Channel Spacing   | : 1MHz for Bluetooth V4.1 (BDR/EDR)<br>2MHz for Bluetooth V4.1 (BT LE)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Modulation Type   | : GFSK, $\pi/4$ -DQPSK, 8-DPSK for Bluetooth V4.1 (BDR/EDR)<br>GFSK for Bluetooth V4.1 (BT LE)                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Bluetooth Version | : V4.1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| WIFI(2.4G Band)   | :                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Frequency Range   | : 2412-2462MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Channel Spacing   | : 5MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Channel Number    | : 11 channels for 20MHz bandwidth(2412~2462MHz)<br>7 channels for 40MHz bandwidth(2422~2452MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Modulation Type   | : IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK);<br>IEEE 802.11g/n: OFDM(64QAM, 16QAM, QPSK, BPSK)                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| WIFI (5.2G Band)  | :                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Frequency Range   | : 5180-5240MHz<br>4 channels for 20MHz bandwidth(5180-5240MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Channel Number    | : 2 channels for 40MHz bandwidth(5190~5230MHz)<br>1 channels for 80MHz bandwidth(5210MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Modulation Type   | : IEEE 802.11a/n/ac: OFDM(64QAM, 16QAM, QPSK, BPSK)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| WIFI (5.8G Band)  | :                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Frequency Range   | : 5745-5825MHz<br>5 channels for 20MHz bandwidth(5745-5825MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Channel Number    | : 2 channels for 40MHz bandwidth(5755~5795MHz)<br>1 channels for 80MHz bandwidth(5775MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

Modulation Type : IEEE 802.11a/n/ac: OFDM(64QAM, 16QAM, QPSK, BPSK)

2.4G Function :

Frequency Range : 2407- 2469MHz  
(2407 MHz, 2413 MHz, 2420 MHz, 2426 MHz, 2431 MHz, 2436 MHz,  
2439 MHz ,2442 MHz, 2447 MHz, 2449 MHz, 2452 MHz, 2454 MHz,  
2459 MHz, 2462 MHz, 2467 MHz, 2469 MHz)

Channel Number : 16

Modulation Type : GFSK

Antenna Description :

One External Antenna(ANT0), for Bluetooth, 2.4G WLAN, 5.2G WLAN and  
5.8G WLAN 2.0dBi (Max.)  
One PCB Antenna(ANT1) used for 2.4G Function TX/RX, 2.0dBi(max.)  
One PCB Antenna(ANT2) used for 2.4G Function TX/RX, 2.0dBi(max.)

## 1.2. Host System Configuration List and Details

| Manufacturer | Description | Model | Serial Number | Certificate |
|--------------|-------------|-------|---------------|-------------|
| --           | --          | --    | --            | --          |

## 1.3. External I/O Cable

| I/O Port Description | Quantity | Cable |
|----------------------|----------|-------|
| Charge Port          | 1        | N/A   |

## 1.4. Description of Test Facility

FCC Registration Number is 254912.  
Industry Canada Registration Number is 9642A-1.  
EMSD Registration Number is ARCB0108.  
UL Registration Number is 100571-492.  
TUV SUD Registration Number is SCN1081.  
TUV RH Registration Number is UA 50296516-001.  
NVLAP Accreditation Code is 600167-0.  
FCC Designation Number is CN5024.  
CAB identifier: CN0071.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

## 1.5. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

## 1.6. Measurement Uncertainty

| Test Item              | Frequency Range | Uncertainty | Note |
|------------------------|-----------------|-------------|------|
| Radiation Uncertainty  | 9KHz~30MHz      | ±3.10dB     | (1)  |
|                        | 30MHz~200MHz    | ±2.96dB     | (1)  |
|                        | 200MHz~1000MHz  | ±3.10dB     | (1)  |
|                        | 1GHz~26.5GHz    | ±3.80dB     | (1)  |
|                        | 26.5GHz~40GHz   | ±3.90dB     | (1)  |
| Conduction Uncertainty | 150kHz~30MHz    | ±1.63dB     | (1)  |
| Power disturbance      | 30MHz~300MHz    | ±1.60dB     | (1)  |

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 1.7. Description of Test Modes

The EUT has been tested under operating condition.

This test was performed with EUT in X, Y, Z position and the worst case was found when EUT in X position.

AC power line conducted emission pre-test at both at AC 120V/60Hz and AC 240V/60Hz modes, recorded worst case.

AC conducted emission pre-test at both at charge from PC and power adapter modes, recorded worst case.

Worst-case mode and channel used for 150 KHz-30 MHz power line conducted emissions was the mode and channel with the highest output power, which was determined to be IEEE 802.11n HT40 mode (Middle Channel).

Worst-case mode and channel used for 9 KHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be IEEE 802.11n HT40 mode (Middle Channel).

Worst-Case data rates were utilized from preliminary testing of the Chipset, worst-case data rates used during the testing are as follows:

IEEE 802.11b Mode: 1 Mbps, DSSS.

IEEE 802.11g Mode: 6 Mbps, OFDM.

IEEE 802.11n Mode HT20: MCS0, OFDM.

IEEE 802.11n Mode HT40: MCS0, OFDM.

## 1.8. Channel List and Frequency

### IEEE 802.11b/g/n HT20

| Frequency Band | Channel No. | Frequency(MHz) | Channel No. | Frequency(MHz) |
|----------------|-------------|----------------|-------------|----------------|
| 2412~2462MHz   | 1           | 2412           | 7           | 2442           |
|                | 2           | 2417           | 8           | 2447           |
|                | 3           | 2422           | 9           | 2452           |
|                | 4           | 2427           | 10          | 2457           |
|                | 5           | 2432           | 11          | 2462           |
|                | 6           | 2437           | --          | --             |

### IEEE 802.11b/g/n HT40

| Frequency Band | Channel No. | Frequency(MHz) | Channel No. | Frequency(MHz) |
|----------------|-------------|----------------|-------------|----------------|
| 2422~2452MHz   | 1           | --             | 7           | 2442           |
|                | 2           | --             | 8           | 2447           |
|                | 3           | 2422           | 9           | 2452           |
|                | 4           | 2427           | 10          | --             |
|                | 5           | 2432           | 11          | --             |
|                | 6           | 2437           | --          | --             |

## 2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd.

### 2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to FCC's request, Test Procedure KDB558074 D01 DTS Meas. Guidance and KDB 662911 are required to be used for this kind of FCC 15.247 digital modulation device.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

### 2.3. General Test Procedures

#### 2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

#### 2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013.

### **3. SYSTEM TEST CONFIGURATION**

#### **3.1. Justification**

The system was configured for testing in a continuous transmit condition.

#### **3.2. EUT Exercise Software**

The system was configured for testing in a continuous transmits condition and change test channels by software (Secure CRT and MPTool) provided by applicant.

#### **3.3. Special Accessories**

N/A.

#### **3.4. Block Diagram/Schematics**

Please refer to the related document

#### **3.5. Equipment Modifications**

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

#### **3.6. Test Setup**

Please refer to the test setup photo.

#### 4. SUMMARY OF TEST RESULTS

| Applied Standard: FCC Part 15 Subpart C |                                |           |        |
|-----------------------------------------|--------------------------------|-----------|--------|
| FCC Rules                               | Description of Test            | Result    | Remark |
| §15.247(b)                              | Maximum Conducted Output Power | Compliant | Note 1 |
| §15.209, §15.247(d)                     | Radiated Spurious Emissions    | Compliant | Note 1 |
| §15.207(a)                              | AC Conducted Emissions         | Compliant | Note 1 |
| §15.247(i)§2.1091                       | RF Exposure                    | Compliant | Note 2 |

*Remark:*

1. Note 1 – Test results inside test report;
2. Note 2 – Test results in other test report (RF Exposure Evaluation Report);

## 5. TEST RESULT

### 5.1. Maximum Conducted Output Power Measurement

#### 5.1.1. Standard Applicable

According to §15.247(b): For systems using digital modulation in the 2400-2483.5 MHz and 5725-5850 MHz band, the limit for maximum peak conducted output power is 30dBm. The limit has to be reduced by the amount in dB that the gain of the antenna exceeds 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter peak output power.


#### 5.1.2. Measuring Instruments and Setting

Please refer to equipment's list in this report. The following table is the setting of the power meter.

#### 5.1.3. Test Procedures

According to KDB558074 D01 DTS Measurement Guidance Section 9.1 Maximum peak conducted output power, 9.1.2 The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

#### 5.1.4. Test Setup Layout

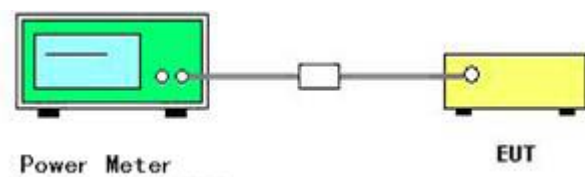

#### 5.1.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 5.1.6. Test Result of Maximum Conducted Output Power

| Mode      | Channel | Meas.Level [dBm] | Limit [dBm] | Verdict |
|-----------|---------|------------------|-------------|---------|
| 11B       | LCH     | 18.57            | 30          | PASS    |
|           | MCH     | 17.53            | 30          | PASS    |
|           | HCH     | 16.63            | 30          | PASS    |
| 11G       | LCH     | 18.17            | 30          | PASS    |
|           | MCH     | 17.05            | 30          | PASS    |
|           | HCH     | 16.16            | 30          | PASS    |
| 11N20SISO | LCH     | 18.17            | 30          | PASS    |
|           | MCH     | 17.16            | 30          | PASS    |
|           | HCH     | 16.61            | 30          | PASS    |
| 11N40SISO | LCH     | 18.67            | 30          | PASS    |
|           | MCH     | 17.54            | 30          | PASS    |
|           | HCH     | 17.59            | 30          | PASS    |

*Remark:*

- 1). Measured output power at difference data rate for each mode and recorded worst case for each mode.
- 2). Test results including cable loss;
- 3). Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40;

## 5.2. Radiated Emissions Measurement

### 5.2.1. Standard Applicable

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz               | MHz                 | MHz           | GHz         |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110       | 16.42-16.423        | 399.9-410     | 4.5-5.15    |
| \1\ 0.495-0.505   | 16.69475-16.69525   | 608-614       | 5.35-5.46   |
| 2.1735-2.1905     | 16.80425-16.80475   | 960-1240      | 7.25-7.75   |
| 4.125-4.128       | 25.5-25.67          | 1300-1427     | 8.025-8.5   |
| 4.17725-4.17775   | 37.5-38.25          | 1435-1626.5   | 9.0-9.2     |
| 4.20725-4.20775   | 73-74.6             | 1645.5-1646.5 | 9.3-9.5     |
| 6.215-6.218       | 74.8-75.2           | 1660-1710     | 10.6-12.7   |
| 6.26775-6.26825   | 108-121.94          | 1718.8-1722.2 | 13.25-13.4  |
| 6.31175-6.31225   | 123-138             | 2200-2300     | 14.47-14.5  |
| 8.291-8.294       | 149.9-150.05        | 2310-2390     | 15.35-16.2  |
| 8.362-8.366       | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4   |
| 8.37625-8.38675   | 156.7-156.9         | 2690-2900     | 22.01-23.12 |
| 8.41425-8.41475   | 162.0125-167.17     | 3260-3267     | 23.6-24.0   |
| 12.29-12.293      | 167.72-173.2        | 3332-3339     | 31.2-31.8   |
| 12.51975-12.52025 | 240-285             | 3345.8-3358   | 36.43-36.5  |
| 12.57675-12.57725 | 322-335.4           | 3600-4400     | (12\)       |
| 13.36-13.41       |                     |               |             |

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

According to §15.247 (d): 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009~0.490       | 2400/F(KHz)                       | 300                           |
| 0.490~1.705       | 24000/F(KHz)                      | 30                            |
| 1.705~30.0        | 30                                | 30                            |
| 30~88             | 100                               | 3                             |
| 88~216            | 150                               | 3                             |
| 216~960           | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

### 5.2.2. Measuring Instruments and Setting

Please refer to section 6 of equipment list in this report. The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter                        | Setting                                           |
|-------------------------------------------|---------------------------------------------------|
| Attenuation                               | Auto                                              |
| Start Frequency                           | 1000 MHz                                          |
| Stop Frequency                            | 10 <sup>th</sup> carrier harmonic                 |
| RB / VB (Emission in restricted band)     | 1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average |
| RB / VB (Emission in non-restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average |

| Receiver Parameter     | Setting                                    |
|------------------------|--------------------------------------------|
| Attenuation            | Auto                                       |
| Start ~ Stop Frequency | 9kHz~150kHz / RB/VB 200Hz/1KHz for QP/AVG  |
| Start ~ Stop Frequency | 150kHz~30MHz / RB/VB 9kHz/30KHz for QP/AVG |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB/VB 120kHz/1MHz for QP   |

### 5.2.3. Test Procedures

This report shall not be reproduced except in full, without the written approval of Shenzhen LCS Compliance Testing Laboratory Ltd.

## 1) Sequence of testing 9 kHz to 30 MHz

### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

### Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

## 2) Sequence of testing 30 MHz to 1 GHz

### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

### 3) Sequence of testing 1 GHz to 18 GHz

#### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

#### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

#### 4) Sequence of testing above 18 GHz

**Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.




**Premeasurement:**

- The antenna is moved spherical over the EUT in different polarizations of the antenna.

**Final measurement:**

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

#### 5.2.4. Test Setup Layout

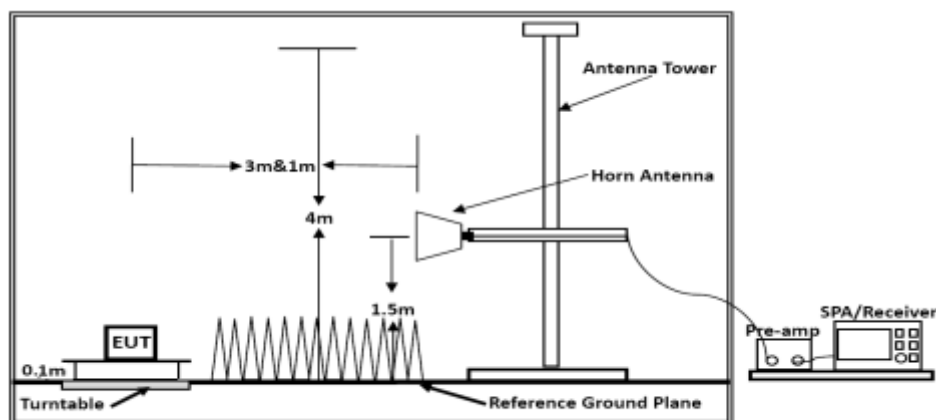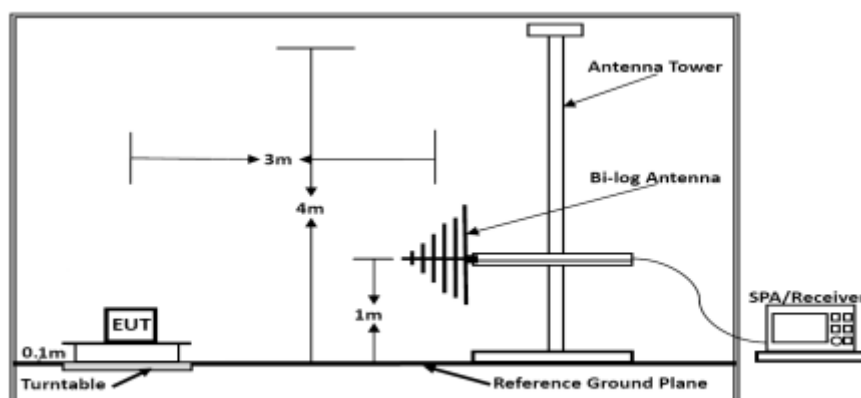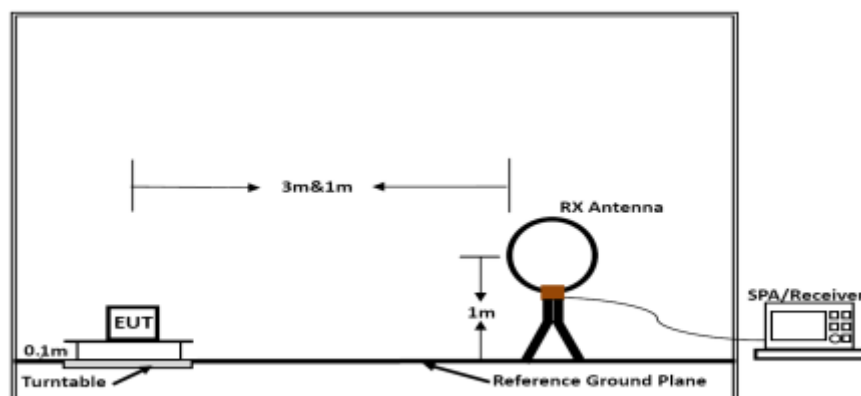

Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

#### 5.2.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 5.2.6. Results of Radiated Emissions (9 KHz~30MHz)

|               |         |                |                  |
|---------------|---------|----------------|------------------|
| Temperature   | 23.6°C  | Humidity       | 53.8%            |
| Test Engineer | Jk Zhou | Configurations | IEEE 802.11b/g/n |

| Freq.<br>(MHz) | Level<br>(dBuV) | Over Limit<br>(dB) | Over Limit<br>(dBuV) | Remark   |
|----------------|-----------------|--------------------|----------------------|----------|
| -              | -               | -                  | -                    | See Note |

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = 40 log (specific distance / test distance) (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.

## 5.2.7. Results of Radiated Emissions (30MHz~1GHz)

|               |         |                |                               |
|---------------|---------|----------------|-------------------------------|
| Temperature   | 23.7°C  | Humidity       | 53.8%                         |
| Test Engineer | Jk Zhou | Configurations | IEEE 802.11n HT40 (Middle CH) |


Test result for IEEE 802.11n HT40 (Middle Channel)

Vertical

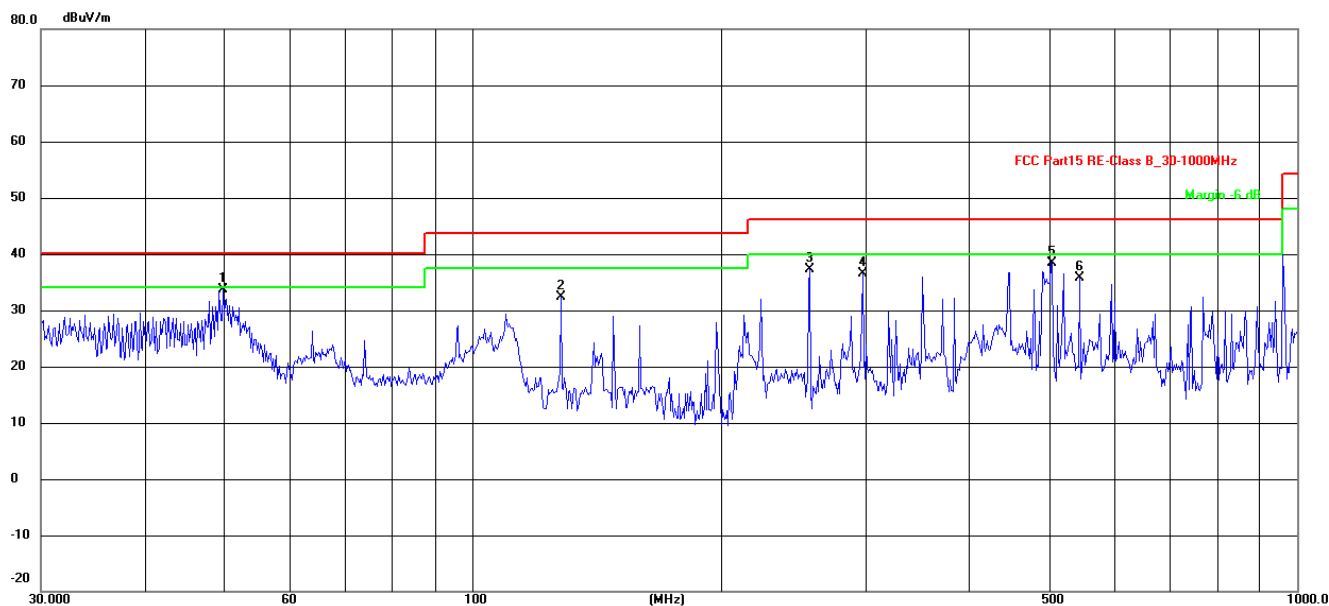

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Factor<br>(dB/m) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Det. | Height<br>(cm) | Azimuth<br>(deg) | Remark |
|-----|--------------------|-------------------|------------------|-------------------|-------------------|----------------|------|----------------|------------------|--------|
| 1 * | 49.8813            | 49.36             | -15.66           | 33.70             | 40.00             | -6.30          | QP   |                |                  |        |
| 2   | 128.1125           | 52.78             | -20.45           | 32.33             | 43.50             | -11.17         | QP   |                |                  |        |
| 3   | 256.5210           | 53.09             | -15.78           | 37.31             | 46.00             | -8.69          | QP   |                |                  |        |
| 4   | 297.2238           | 51.29             | -14.87           | 36.42             | 46.00             | -9.58          | QP   |                |                  |        |
| 5   | 504.7062           | 48.52             | -10.03           | 38.49             | 46.00             | -7.51          | QP   |                |                  |        |
| 6   | 545.1825           | 44.78             | -9.05            | 35.73             | 46.00             | -10.27         | QP   |                |                  |        |

## Horizontal

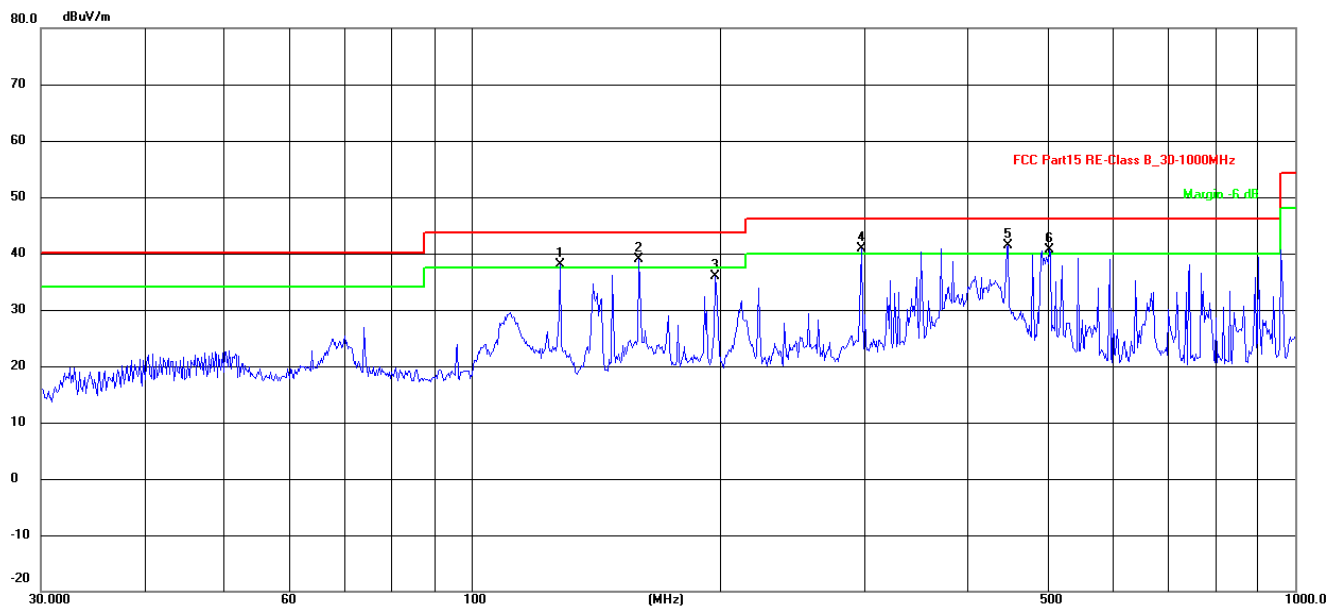

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | Height (cm) | Azimuth (deg) | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|------|-------------|---------------|--------|
| 1 ! | 128.1125        | 58.41          | -20.45        | 37.96          | 43.50          | -5.54       | QP   |             |               |        |
| 2 * | 159.7844        | 59.34          | -20.46        | 38.88          | 43.50          | -4.62       | QP   |             |               |        |
| 3   | 197.8925        | 53.58          | -17.56        | 36.02          | 43.50          | -7.48       | QP   |             |               |        |
| 4 ! | 297.2238        | 55.64          | -14.87        | 40.77          | 46.00          | -5.23       | QP   |             |               |        |
| 5 ! | 447.9821        | 52.53          | -11.20        | 41.33          | 46.00          | -4.67       | QP   |             |               |        |
| 6 ! | 502.9395        | 50.65          | -10.07        | 40.58          | 46.00          | -5.42       | QP   |             |               |        |

## Note:

Pre-scan all modes and recorded the worst case results in this report (IEEE 802.11n HT40 mode (Middle Channel)).

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level = Level.

## 5.2.8. Results for Radiated Emissions (1- 26 GHz)

## IEEE 802.11b

## Channel 1 / 2412 MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4824.00   | 56.47        | 33.06          | 35.04        | 3.94         | 58.43           | 74.00        | -15.57    | Peak    | Horizontal |
| 4824.00   | 42.52        | 33.06          | 35.04        | 3.94         | 44.48           | 54.00        | -9.52     | Average | Horizontal |
| 4824.00   | 58.72        | 33.06          | 35.04        | 3.94         | 60.68           | 74.00        | -13.32    | Peak    | Vertical   |
| 4824.00   | 40.71        | 33.06          | 35.04        | 3.94         | 42.67           | 54.00        | -11.33    | Average | Vertical   |

## Channel 6 / 2437 MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4874.00   | 52.75        | 33.16          | 35.15        | 3.96         | 54.72           | 74.00        | -19.28    | Peak    | Horizontal |
| 4874.00   | 41.32        | 33.16          | 35.15        | 3.96         | 43.29           | 54.00        | -10.71    | Average | Horizontal |
| 4874.00   | 59.56        | 33.16          | 35.15        | 3.96         | 61.53           | 74.00        | -12.47    | Peak    | Vertical   |
| 4874.00   | 45.02        | 33.16          | 35.15        | 3.96         | 46.99           | 54.00        | -7.01     | Average | Vertical   |

## Channel 11 / 2462 MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4924.00   | 56.50        | 33.26          | 35.14        | 3.98         | 58.60           | 74.00        | -15.40    | Peak    | Horizontal |
| 4924.00   | 41.68        | 33.26          | 35.14        | 3.98         | 43.78           | 54.00        | -10.22    | Average | Horizontal |
| 4924.00   | 58.37        | 33.26          | 35.14        | 3.98         | 60.47           | 74.00        | -13.53    | Peak    | Vertical   |
| 4924.00   | 44.26        | 33.26          | 35.14        | 3.98         | 46.36           | 54.00        | -7.64     | Average | Vertical   |

## IEEE 802.11g

## Channel 1 / 2412 MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4824.00   | 53.61        | 33.06          | 35.04        | 3.94         | 55.57           | 74.00        | -18.43    | Peak    | Horizontal |
| 4824.00   | 40.50        | 33.06          | 35.04        | 3.94         | 42.46           | 54.00        | -11.54    | Average | Horizontal |
| 4824.00   | 54.73        | 33.06          | 35.04        | 3.94         | 56.69           | 74.00        | -17.31    | Peak    | Vertical   |
| 4824.00   | 45.35        | 33.06          | 35.04        | 3.94         | 47.31           | 54.00        | -6.69     | Average | Vertical   |

## Channel 6 / 2437 MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4874.00   | 54.96        | 33.16          | 35.15        | 3.96         | 56.93           | 74.00        | -17.07    | Peak    | Horizontal |
| 4874.00   | 41.24        | 33.16          | 35.15        | 3.96         | 43.21           | 54.00        | -10.79    | Average | Horizontal |
| 4874.00   | 58.72        | 33.16          | 35.15        | 3.96         | 60.69           | 74.00        | -13.31    | Peak    | Vertical   |
| 4874.00   | 41.64        | 33.16          | 35.15        | 3.96         | 43.61           | 54.00        | -10.39    | Average | Vertical   |

## Channel 11 / 2462 MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4924.00   | 53.87        | 33.26          | 35.14        | 3.98         | 55.97           | 74.00        | -18.03    | Peak    | Horizontal |
| 4924.00   | 40.82        | 33.26          | 35.14        | 3.98         | 42.92           | 54.00        | -11.08    | Average | Horizontal |
| 4924.00   | 54.47        | 33.26          | 35.14        | 3.98         | 56.57           | 74.00        | -17.43    | Peak    | Vertical   |
| 4924.00   | 44.78        | 33.26          | 35.14        | 3.98         | 46.88           | 54.00        | -7.12     | Average | Vertical   |

## IEEE 802.11n HT20

## Channel 1 / 2412 MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4824.00   | 52.76        | 33.06          | 35.04        | 3.94         | 54.72           | 74.00        | -19.28    | Peak    | Horizontal |
| 4824.00   | 43.84        | 33.06          | 35.04        | 3.94         | 45.80           | 54.00        | -8.20     | Average | Horizontal |
| 4824.00   | 51.52        | 33.06          | 35.04        | 3.94         | 53.48           | 74.00        | -20.52    | Peak    | Vertical   |
| 4824.00   | 40.09        | 33.06          | 35.04        | 3.94         | 42.05           | 54.00        | -11.95    | Average | Vertical   |

## Channel 6 / 2437 MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4874.00   | 52.52        | 33.16          | 35.15        | 3.96         | 54.49           | 74.00        | -19.51    | Peak    | Horizontal |
| 4874.00   | 44.44        | 33.16          | 35.15        | 3.96         | 46.41           | 54.00        | -7.59     | Average | Horizontal |
| 4874.00   | 51.24        | 33.16          | 35.15        | 3.96         | 53.21           | 74.00        | -20.79    | Peak    | Vertical   |
| 4874.00   | 39.82        | 33.16          | 35.15        | 3.96         | 41.79           | 54.00        | -12.21    | Average | Vertical   |

## Channel 11 / 2462 MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4924.00   | 54.56        | 33.26          | 35.14        | 3.98         | 56.66           | 74.00        | -17.34    | Peak    | Horizontal |
| 4924.00   | 40.29        | 33.26          | 35.14        | 3.98         | 42.39           | 54.00        | -11.61    | Average | Horizontal |
| 4924.00   | 56.90        | 33.26          | 35.14        | 3.98         | 59.00           | 74.00        | -15.00    | Peak    | Vertical   |
| 4924.00   | 40.15        | 33.26          | 35.14        | 3.98         | 42.25           | 54.00        | -11.75    | Average | Vertical   |

## IEEE 802.11n HT40

## Channel 3 / 2422 MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4844.00   | 53.38        | 33.06          | 35.04        | 3.94         | 55.34           | 74.00        | -18.66    | Peak    | Horizontal |
| 4844.00   | 44.52        | 33.06          | 35.04        | 3.94         | 46.48           | 54.00        | -7.52     | Average | Horizontal |
| 4844.00   | 56.26        | 33.06          | 35.04        | 3.94         | 58.22           | 74.00        | -15.78    | Peak    | Vertical   |
| 4844.00   | 42.37        | 33.06          | 35.04        | 3.94         | 44.33           | 54.00        | -9.67     | Average | Vertical   |

## Channel 6 / 2437 MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4874.00   | 57.88        | 33.16          | 35.15        | 3.96         | 59.85           | 74.00        | -14.15    | Peak    | Horizontal |
| 4874.00   | 40.60        | 33.16          | 35.15        | 3.96         | 42.57           | 54.00        | -11.43    | Average | Horizontal |
| 4874.00   | 55.06        | 33.16          | 35.15        | 3.96         | 57.03           | 74.00        | -16.97    | Peak    | Vertical   |
| 4874.00   | 40.27        | 33.16          | 35.15        | 3.96         | 42.24           | 54.00        | -11.76    | Average | Vertical   |

## Channel 9 / 2452 MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4904.00   | 58.90        | 33.26          | 35.14        | 3.98         | 61.00           | 74.00        | -13.00    | Peak    | Horizontal |
| 4904.00   | 42.21        | 33.26          | 35.14        | 3.98         | 44.31           | 54.00        | -9.69     | Average | Horizontal |
| 4904.00   | 58.10        | 33.26          | 35.14        | 3.98         | 60.20           | 74.00        | -13.80    | Peak    | Vertical   |
| 4904.00   | 41.26        | 33.26          | 35.14        | 3.98         | 43.36           | 54.00        | -10.64    | Average | Vertical   |

**Notes:**

- 1). Measuring frequencies from 9 KHz - 10<sup>th</sup> harmonic or 26.5GHz (which is less), No emission found between lowest internal used/generated frequency to 30MHz.
- 2). *Radiated emissions measured in frequency range from 9 KHz~10<sup>th</sup> harmonic or 26.5GHz (which is less) were made with an instrument using Peak detector mode.*
- 3). *Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
- 4). *Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40;*
- 5). *Measured = Reading + Ant. Fac - Pre. Fac + Cab.Los.*

### 5.3. AC Power Line Conducted Emissions


#### 5.3.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

| Frequency Range (MHz) | Limits (dB $\mu$ V) |          |
|-----------------------|---------------------|----------|
|                       | Quasi-peak          | Average  |
| 0.15 to 0.50          | 66 to 56            | 56 to 46 |
| 0.50 to 5             | 56                  | 46       |
| 5 to 30               | 60                  | 50       |

\* Decreasing linearly with the logarithm of the frequency

#### 5.3.2 Block Diagram of Test Setup

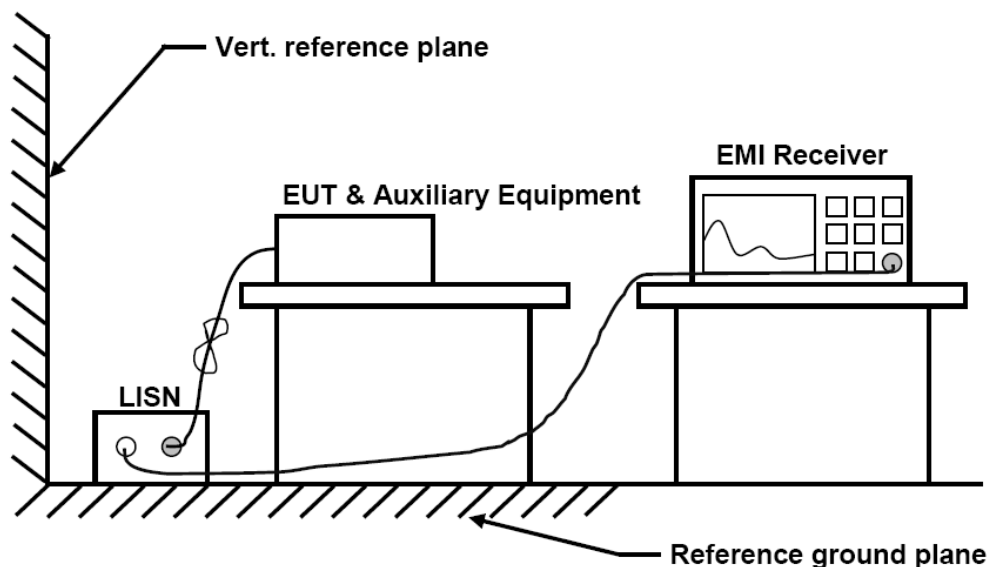


#### 5.3.3 Test Results

**PASS.**

The test data please refer to following page.


**AC Conducted Emission of power adapter @ AC 120V/60Hz@ IEEE 802.11n HT40**

Line

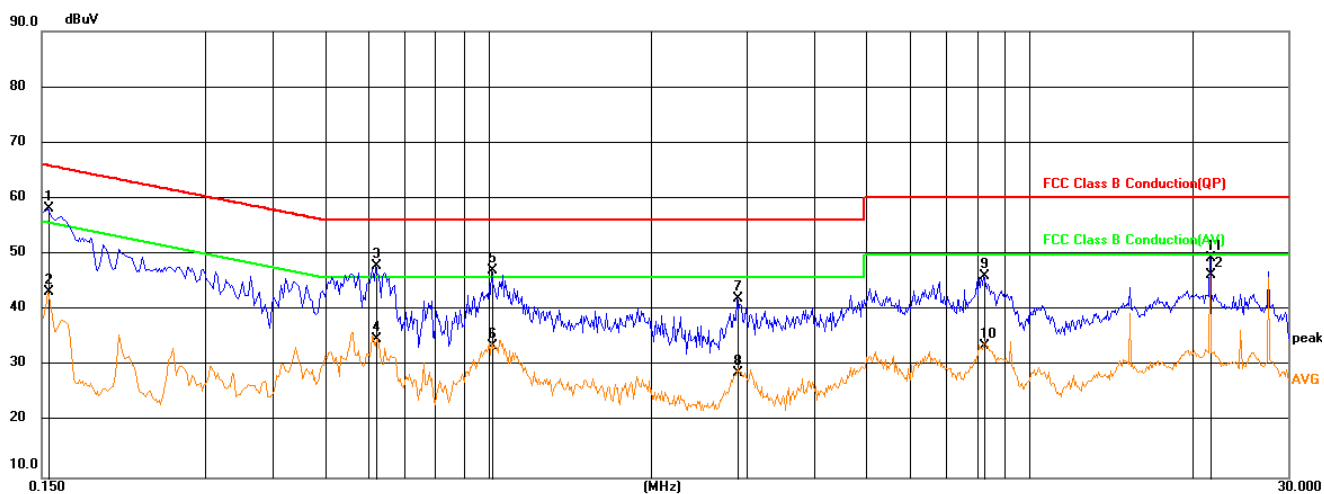

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB) | Result<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-----------------|------------------|-----------------|----------------|--------|
| 1   | 0.1544             | 39.12             | 19.14           | 58.26            | 65.76           | -7.50          | QP     |
| 2   | 0.1544             | 24.17             | 19.14           | 43.31            | 55.76           | -12.45         | AVG    |
| 3   | 0.6219             | 28.76             | 19.20           | 47.96            | 56.00           | -8.04          | QP     |
| 4   | 0.6219             | 15.68             | 19.20           | 34.88            | 46.00           | -11.12         | AVG    |
| 5   | 1.0181             | 27.93             | 19.26           | 47.19            | 56.00           | -8.81          | QP     |
| 6   | 1.0181             | 14.50             | 19.26           | 33.76            | 46.00           | -12.24         | AVG    |
| 7   | 2.8995             | 22.75             | 19.47           | 42.22            | 56.00           | -13.78         | QP     |
| 8   | 2.8995             | 9.31              | 19.47           | 28.78            | 46.00           | -17.22         | AVG    |
| 9   | 8.2725             | 26.50             | 19.65           | 46.15            | 60.00           | -13.85         | QP     |
| 10  | 8.2725             | 14.09             | 19.65           | 33.74            | 50.00           | -16.26         | AVG    |
| 11  | 21.5069            | 29.18             | 20.29           | 49.47            | 60.00           | -10.53         | QP     |
| 12  | 21.5069            | 26.05             | 20.29           | 46.34            | 50.00           | -3.66          | AVG    |

## Neutral

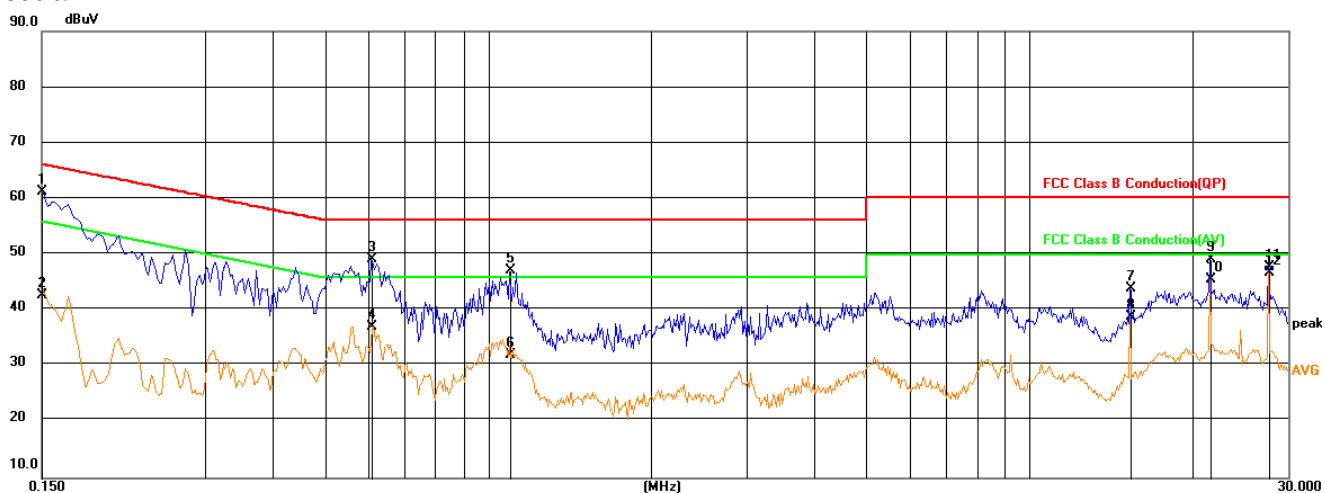

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB) | Result<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-----------------|------------------|-----------------|----------------|--------|
| 1   | 0.1507             | 42.08             | 19.14           | 61.22            | 65.96           | -4.74          | QP     |
| 2   | 0.1507             | 23.58             | 19.14           | 42.72            | 55.96           | -13.24         | AVG    |
| 3   | 0.6088             | 29.92             | 19.19           | 49.11            | 56.00           | -6.89          | QP     |
| 4   | 0.6088             | 18.00             | 19.19           | 37.19            | 46.00           | -8.81          | AVG    |
| 5   | 1.0987             | 27.82             | 19.26           | 47.08            | 56.00           | -8.92          | QP     |
| 6   | 1.0987             | 12.75             | 19.26           | 32.01            | 46.00           | -13.99         | AVG    |
| 7   | 15.3600            | 23.80             | 20.17           | 43.97            | 60.00           | -16.03         | QP     |
| 8   | 15.3600            | 18.75             | 20.17           | 38.92            | 50.00           | -11.08         | AVG    |
| 9   | 21.5069            | 29.08             | 20.07           | 49.15            | 60.00           | -10.85         | QP     |
| 10  | 21.5069            | 25.52             | 20.07           | 45.59            | 50.00           | -4.41          | AVG    |
| 11  | 27.6493            | 27.66             | 20.13           | 47.79            | 60.00           | -12.21         | QP     |
| 12  | 27.6493            | 26.62             | 20.13           | 46.75            | 50.00           | -3.25          | AVG    |

\*\*\*Note: Pre-scan all mode and recorded the worst case results.

## 6. LIST OF MEASURING EQUIPMENTS

| Item | Equipment                | Manufacturer    | Model No.       | Serial No.      | Cal Date   | Due Date   |
|------|--------------------------|-----------------|-----------------|-----------------|------------|------------|
| 1    | Power Meter              | R&S             | NRVS            | 100444          | 2019-06-11 | 2020-06-10 |
| 2    | Power Sensor             | R&S             | NRV-Z81         | 100458          | 2019-06-11 | 2020-06-10 |
| 3    | Power Sensor             | R&S             | NRV-Z32         | 10057           | 2019-06-11 | 2020-06-10 |
| 4    | Test Software            | Tonscend        | JS1120-2        | /               | N/A        | N/A        |
| 5    | RF Control Unit          | Tonscend        | JS0806-2        | N/A             | 2019-06-11 | 2020-06-10 |
| 6    | MXA Signal Analyzer      | Agilent         | N9020A          | MY50510140      | 2019-11-22 | 2020-11-21 |
| 7    | DC Power Supply          | Agilent         | E3642A          | N/A             | 2019-11-14 | 2020-11-13 |
| 8    | EMI Test Software        | AUDIX           | E3              | /               | N/A        | N/A        |
| 9    | 3m Full Anechoic Chamber | MRDIANZI        | FAC-3M          | MR009           | 2019-09-27 | 2020-09-26 |
| 10   | Positioning Controller   | MF              | MF-7082         | N/A             | 2019-06-12 | 2020-06-11 |
| 11   | Active Loop Antenna      | SCHWARZBEC<br>K | FMZB 1519B      | 00005           | 2019-07-25 | 2020-07-24 |
| 12   | By-log Antenna           | SCHWARZBEC<br>K | VULB9163        | 9163-470        | 2019-07-25 | 2020-07-24 |
| 13   | Horn Antenna             | SCHWARZBEC<br>K | BBHA 9120D      | 9120D-1925      | 2019-07-01 | 2020-06-30 |
| 14   | Broadband Horn Antenna   | SCHWARZBEC<br>K | BBHA 9170       | 791             | 2017-09-21 | 2020-09-20 |
| 15   | Broadband Preamplifier   | SCHWARZBEC<br>K | BBV 9719        | 9719-025        | 2019-06-17 | 2020-06-16 |
| 16   | EMI Test Receiver        | R&S             | ESR 7           | 101181          | 2019-06-12 | 2020-06-11 |
| 17   | RS SPECTRUM ANALYZER     | R&S             | FSP40           | 100503          | 2019-11-14 | 2020-11-13 |
| 18   | Broadband Preamplifier   | /               | BP-01M18G       | P190501         | 2019-07-01 | 2020-06-30 |
| 19   | RF Cable-R03m            | Jye Bao         | RG142           | CB021           | 2019-06-12 | 2020-06-11 |
| 20   | RF Cable-HIGH            | SUHNER          | SUCOFLEX<br>106 | 03CH03-HY       | 2019-06-12 | 2020-06-11 |
| 21   | 6dB Attenuator           | /               | 100W/6dB        | 1172040         | 2019-06-11 | 2020-06-10 |
| 22   | 3dB Attenuator           | /               | 2N-3dB          | /               | 2019-06-11 | 2020-06-10 |
| 23   | EMI Test Receiver        | R&S             | ESPI            | 101840          | 2019-06-11 | 2020-06-10 |
| 24   | Artificial Mains         | R&S             | ENV216          | 101288          | 2019-06-12 | 2020-06-11 |
| 25   | 10dB Attenuator          | SCHWARZBEC<br>K | MTS-IMP-136     | 261115-001-0032 | 2019-06-11 | 2020-06-10 |

Note: All equipment is calibrated through CHINA CEPREI LABORATORY and GUANGZHOU LISAI CALIBRATION AND TEST CO., LTD.

## **7. TEST SETUP PHOTOGRAPHS OF EUT**

Please refer to separated files for Test Setup Photos of the EUT.

## **8. EXTERIOR PHOTOGRAPHS OF THE EUT**

Please refer to separated files for External Photos of the EUT.

## **9. INTERIOR PHOTOGRAPHS OF THE EUT**

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----