


HR-X3 User Manual

1. Remote control

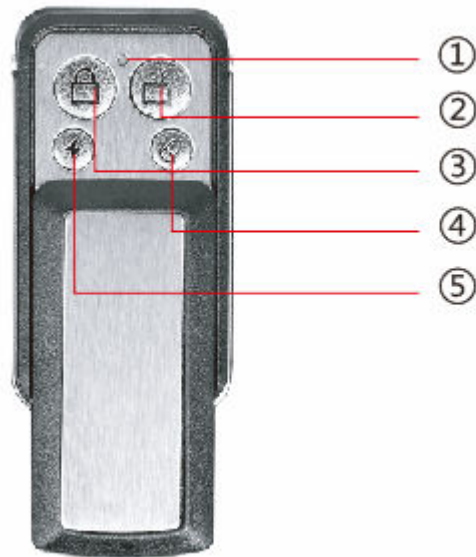

2. Introduction of keys on the remote control

- ① Indicator light: the light will be on when any key is pressed, and the light will be off if the battery of the remote control is low, and the battery shall be replaced.
- ② Play key: automatically play the car cover.
- ③ Collect key: automatically collect the car cover.
- ④ Voice control key: turn off/turn on alarm voice; turn off/turn on prompt.
- ⑤ Set key: match the remote controller with

mainframe, match the car cover with the vehicle body and save the data.

2.1 The remote control is powered by one high energy battery, and the battery can be replaced by loosening the screw on the back of the remote control with a cross screwdriver.

2.2 The mainframe is equipped with wireless remote control system, so the remote control can unfold and fold the car cover and disable the alarm function at the longest distance of about 10m away from the mainframe.

FCC Warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.