



REPORT No.: SZ25120020W03

TEST REPORT

APPLICANT : Acer India Private Limited

PRODUCT NAME : Smartphone

MODEL NAME : Acerone Liquid S262F5

BRAND NAME : acerpure

FCC ID : 2AMY3-S262F5

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2025-12-01

TEST DATE : 2025-12-01 to 2026-01-12

ISSUE DATE : 2026-03-12

Edited by:

Zeng Xiaoying
Zeng Xiaoying (Rapporteur)

Approved by:

Shen Junsheng
Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Summary of Test Result	4
1.1. Testing Applied Standards	5
1.2. Test Equipment List	6
1.3. Measurement Uncertainty	8
1.4. Testing Laboratory	8
2. General Description	9
2.1. Information of Applicant and Manufacturer	9
2.2. Information of EUT	9
2.3. Channel List of EUT	10
2.4. Test Configuration of EUT	11
2.5. Test Conditions	11
2.6. Test Setup Layout Diagram	12
3. Test Results	15
3.1. Antenna Requirement	15
3.2. Duty Cycle of Test Signal	16
3.3. Maximum Peak and Average Conducted Output Power	17
3.4. 6 dB Bandwidth	18
3.5. Conducted Spurious Emissions and Band Edge	19
3.6. Power Spectral Density	20
3.7. Conducted Emission	21
3.8. Restricted Frequency Bands	22
3.9. Radiated Emission	23
Annex A Test Data and Result	25



REPORT No.: SZ25120020W03

Change History		
Version	Date	Reason for change
1.0	2026-03-12	First edition



1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	/
2	N/A	Duty Cycle of Test Signal	Dec. 25, 2025	Li Xinpeng	PASS	/
3	15.247(b)	Maximum Peak Conducted Output Power	Dec. 25, 2025	Li Xinpeng	PASS	/
4	15.247(b)	Maximum Average Conducted Output Power	Dec. 25, 2025	Li Xinpeng	PASS	/
5	15.247(a)	Bandwidth	Mar. 12, 2026	Li Xinpeng	PASS	/
6	15.247(d)	Conducted Spurious Emission and Band Edge	Dec. 25, 2025	Li Xinpeng	PASS	/
7	15.247(e)	Power Spectral Density	Dec. 25, 2025	Li Xinpeng	PASS	/
8	15.207	Conducted Emission	Dec. 16, 2025 to Jan. 12, 2026	Wang Yapeng	PASS	/
9	15.247(d)	Restricted Frequency Bands	Dec. 16, 2025 to Jan. 12, 2026	Zhong Xiangyun	PASS	/
10	15.209, 15.247(d)	Radiated Emission	Dec. 16, 2025 to Jan. 12, 2026	Zhong Xiangyun	PASS	/

Note 1: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2020 and KDB 558074 D01 v05r02.

Note 2: Any additions, deviation, or exclusions from the method shall be noted in the "Remark".



1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C Radio Frequency Devices



1.2. Test Equipment List

1.2.1 Conducted Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2025.01.15 2026.01.14	2026.01.14 2027.01.13
Power Sensor	MY54180008	U2021XA	Agilent	2025.09.03	2026.09.02
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.2.2 Conducted Emission Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	101052	ESPI	R&S	2025.05.15	2026.05.14
LISN	103131	ENV 216	R&S	2025.03.20	2026.03.19
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	R&S	2025.05.13	2026.05.12
RF Coaxial Cable (DC-100MHz)	EMC-CE-0051 4	N/A	N/A	2025.05.06	2026.05.05

1.2.3 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
JS32-RE	Tonscend	5.0.0
TS+ -[JS32-CE]	Tonscend	2.5.0.0

**1.2.4 Radiated Test Equipment**

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Signal Analyzer	MY56060145	N9020A	Agilent	2025.05.13	2026.05.12
Test Antenna - Bi-Log	9163-274	VULB 9163	Schwarzbeck	2025.06.28	2026.06.27
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2025.05.16	2026.05.15
Test Antenna – Horn	9120D-963	BBHA 9120D	Schwarzbeck	2025.05.16	2026.05.15
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2025.06.20	2026.06.19
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2025.05.13	2026.05.12
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2025.05.13	2026.05.12
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-K K-0.5	Qualwave	2025.09.03	2026.09.02
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-K KF-2	Qualwave	2025.09.03	2026.09.02
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-N N-5	Qualwave	2025.09.03	2026.09.02
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2025.06.21	2028.06.20
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.11.30	2025.11.29



1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Peak Output Power	$\pm 2.22\text{dB}$	Confidence levels of 95%
Power Spectral Density	$\pm 2.22\text{dB}$	Confidence levels of 95%
Bandwidth	$\pm 5\%$	Confidence levels of 95%
Conducted Spurious Emission	$\pm 2.77\text{dB}$	Confidence levels of 95%
Restricted Frequency Bands	$\pm 5\%$	Confidence levels of 95%
Radiated Emission	$\pm 2.95\text{dB}$	Confidence levels of 95%
Conducted Emission	$\pm 2.44\text{dB}$	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525
FCC Designation Number:	CN1192
FCC Test Firm Registration Number:	226174

2. General Description

2.1. Information of Applicant and Manufacturer

Applicant:	Acer India Private Limited
Applicant Address:	Embassy Heights, 6th Floor, No.13, Magrath Road, Bangalore560025. INDIA
Manufacturer:	BHAGWATI PRODUCTS LIMITED
Manufacturer Address:	SP1 1 INDUSTRIAL AREA KAROLI, KHUSHKHERA, ALWAR , 301707,INDIA
Factory:	BHAGWATI PRODUCTS LIMITED
Factory Address:	SP1 1 INDUSTRIAL AREA KAROLI, KHUSHKHERA, ALWAR , 301707,INDIA

2.2. Information of EUT

Product Name:	Smartphone	
Sample No.:	1#	
Hardware Version:	M155-MUB-V2	
Software Version:	20251015_V03	
Modulation Technology:	DSSS, OFDM	
Modulation Type:	Refer to section 2.4.1	
Wireless Technology:	802.11b, 802.11g, 802.11n (HT20), 802.11n (HT40)	
Operating Frequency Range:	2412MHz–2462MHz	
Antenna Type:	FPC Antenna	
Antenna Gain:	1.7dBi	
Accessory Information:	Battery	
	Capacity:	5000mAh
	Rated Voltage:	3.85V
	AC Adapter	
	Rated Output:	5V2A;9V2A
	Rated Input:	100-240V~50/60Hz

Note 1: The EUT description presented in the report are provided by applicant and/or manufacturer, and the test laboratory is not responsible for the accuracy of the information. For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

2.3.Channel List of EUT

Nominal Channel Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	1	2412	8	2447
	2	2417	9	2452
	3	2422	10	2457
	4	2427	11	2462
	5	2432		
	6	2437		
	7	2442		
Nominal Channel Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
40MHz	3	2422	9	2452
	4	2427		
	5	2432		
	6	2437		
	7	2442		
	8	2422		

Note 1: The black bold channels were selected for test.

2.4. Test Configuration of EUT

2.4.1. Modulation Type and Data Rate of EUT

Mode	Bandwidth (MHz)	Modulation Technology	Modulation Type	Data Rate
802.11b	20	DSSS	DBPSK	1/2/5.5/11Mbps
			DQPSK	
			CCK	
802.11g	20	OFDM	BPSK	6/9/12/18/24/36/48/54Mbps
			QPSK	
			16QAM	
			64QAM	
802.11n	20&40 (HT20)&(HT40)	OFDM	BPSK	MCS0~MCS7
			QPSK	
			16QAM	
			64QAM	

Note1: The worst-case mode (bold face) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.


Note2: The RF signal transmission of EUT is controlled by the build-in engineering mode which is provided by the manufacturer. The recorded power setting value is the maximum that the engineering mode has configuration during testing.

2.5. Test Conditions


Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106

2.6. Test Setup Layout Diagram

2.6.1. Conducted Measurement

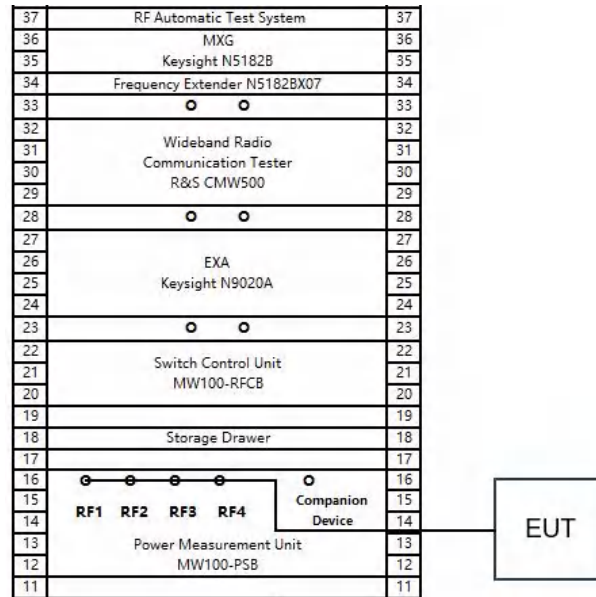


2.6.2. Conducted Emission Measurement

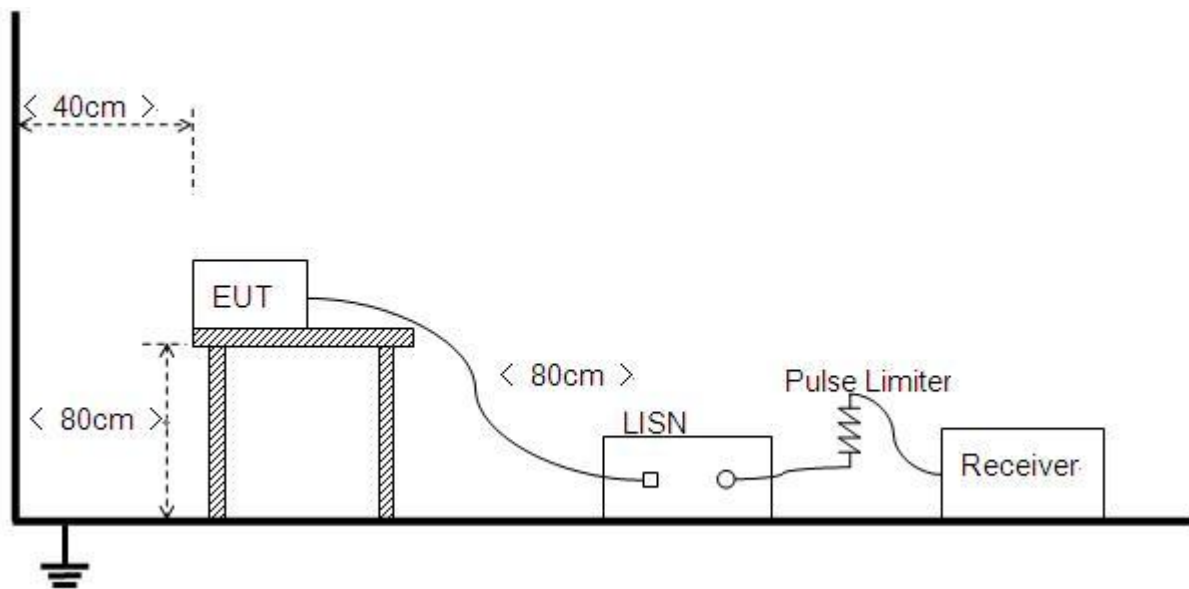


2.6.3.Radiation Measurement


- 1) For radiated emissions from 9kHz to 30MHz

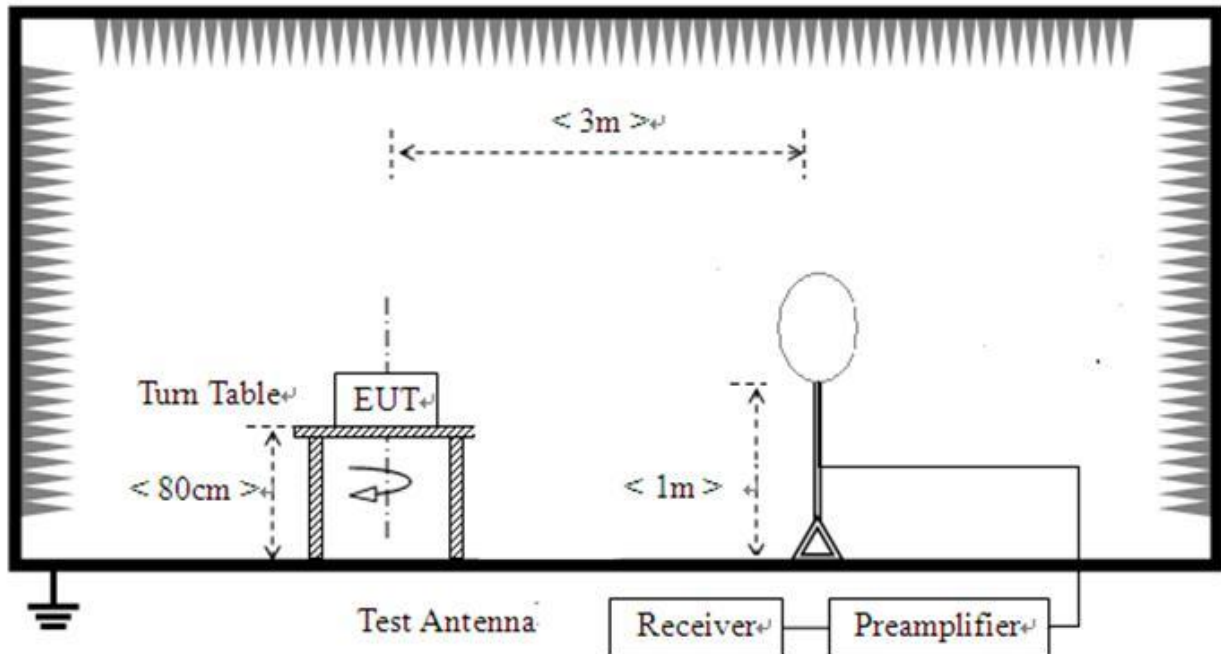

- 2) For radiated emissions from 30MHz to 1GHz

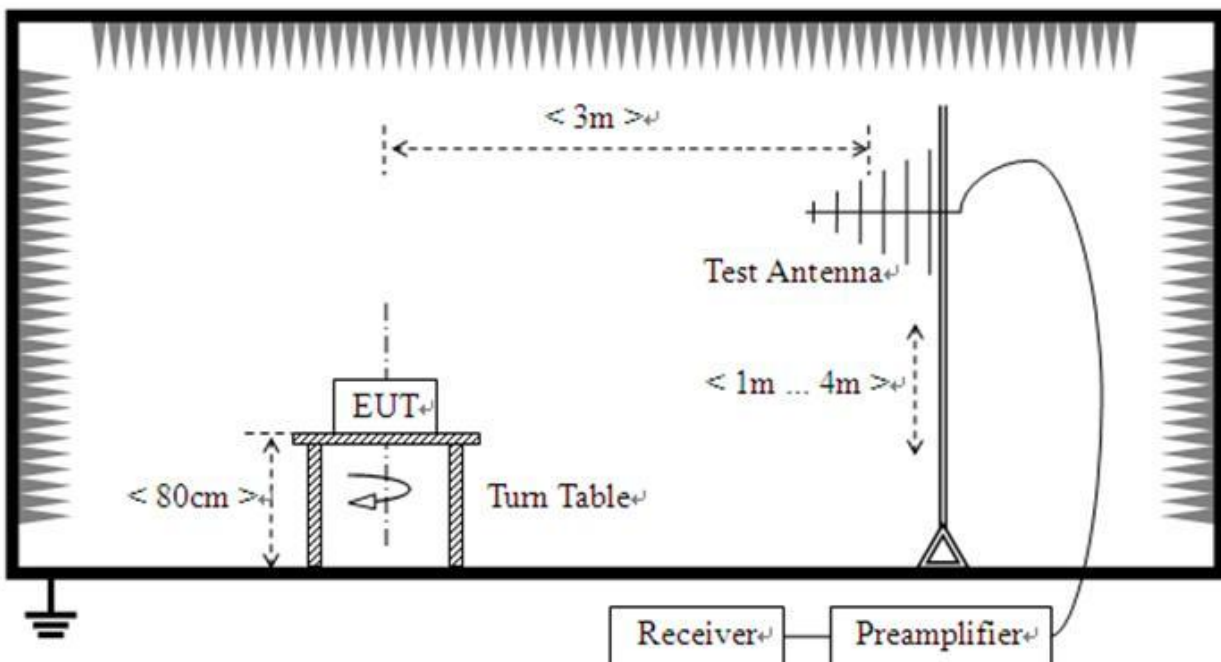

3) For radiated emissions above 1GHz

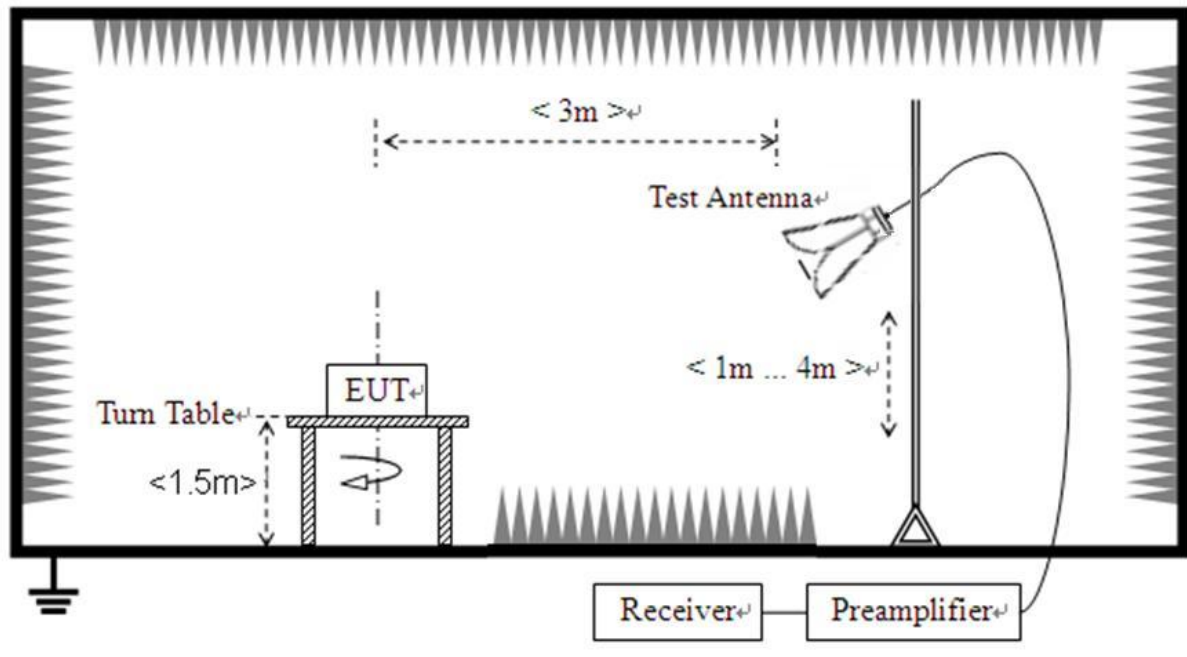



3. Test Results

3.1. Antenna Requirement

3.1.1. Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2. Test Result

Antenna location	Antenna Type	Coupling Method
☒ Internal ☐ External	☒ FPC Antenna ☐ Spring Antenna ☐ Ceramic Antenna ☐ Integrated Antenna ☐ Dipole Antenna ☐ PCB Antenna ☐ PIFA Antenna ☐ Inverted F Antenna	☒ I-PEX Connector ☐ SMA Connector ☐ RP-SMA Connector ☐ Metal Shrapnel ☐ Layout

3.2. Duty Cycle of Test Signal

3.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be non constant.

3.2.2. Test Result

Refer to Annex A.1 in this report.



3.3. Maximum Peak and Average Conducted Output Power

3.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum conducted output power of the intentional radiator shall not exceed 1 Watt.

3.3.2. Test Procedures

The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

1. PKPM1 Peak power meter measurement

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

3.3.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.3.4. Test Result

Refer to Annex A.2 in this report.



3.4.6 dB Bandwidth

3.4.1.Requirement

According to FCC section 15.247(a) (2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

3.4.1.Test Procedures

- a) Set RBW = 1% to 5% of the OBW but not less than 100 kHz
- b) Set the VBW $\geq [3 \times \text{RBW}]$.
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.4.2.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.4.3.Test Result

Refer to Annex A.3 in this report.



3.5. Conducted Spurious Emissions and Band Edge

3.5.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.5.2. Test Procedures

- a) Set RBW = 100KHz.
- b) Set VBW = 300KHz.
- c) Sweep time = auto couple.
- d) Detector = peak.
- e) Trace mode = max hold.
- f) Allow trace to fully stabilize.
- g) Use peak marker function to determine the peak amplitude level.

3.5.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.4. Test Result

Refer to Annex A.4 and A.5 in this report.



3.6. Power Spectral Density

3.6.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

3.6.2. Test Procedures

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to $3 \text{ kHz} < \text{RBW} < 100 \text{ kHz}$.
- d) Set the VBW $> [3 \times \text{RBW}]$.
- e) Detector = power averaging (rms) or sample detector (when rms not available).
- f) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (rms) mode over a minimum of 100 traces..
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this might require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

3.6.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.6.4. Test Result

Refer to Annex A.6 in this report.

3.7. Conducted Emission

3.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.7.2. Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10.

3.7.3. Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.7.4. Test Result

Refer to Annex A.7 in this report.



3.8.Restricted Frequency Bands

3.8.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

3.8.2.Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$

VBW = 3 MHz

Sweep = auto

Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

3.8.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.8.4.Test Result

Refer to Annex A.8 in this report.

3.9. Radiated Emission

3.9.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

Note2: For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK). In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).



3.9.2.Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.9.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.9.4.Test Result

Refer to Annex A.9 in this report.




Annex A Test Data and Result

A.1. Duty Cycle of Test Signal


TestMode	Antenna	Frequency [MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Factor
11B	Ant1	2412	100.00	100.00	100.00	0.00
11B	Ant1	2437	100.00	100.00	100.00	0.00
11B	Ant1	2462	100.00	100.00	100.00	0.00
11G	Ant1	2412	1.39	1.43	97.20	0.12
11G	Ant1	2437	1.39	1.43	97.20	0.12
11G	Ant1	2462	1.39	1.43	97.20	0.12
11N20SISO	Ant1	2412	1.30	1.34	97.01	0.13
11N20SISO	Ant1	2437	1.30	1.34	97.01	0.13
11N20SISO	Ant1	2462	1.30	1.34	97.01	0.13
11N40SISO	Ant1	2422	0.64	0.68	94.12	0.26
11N40SISO	Ant1	2437	0.64	0.68	94.12	0.26
11N40SISO	Ant1	2452	0.64	0.68	94.12	0.26




Test Graphs

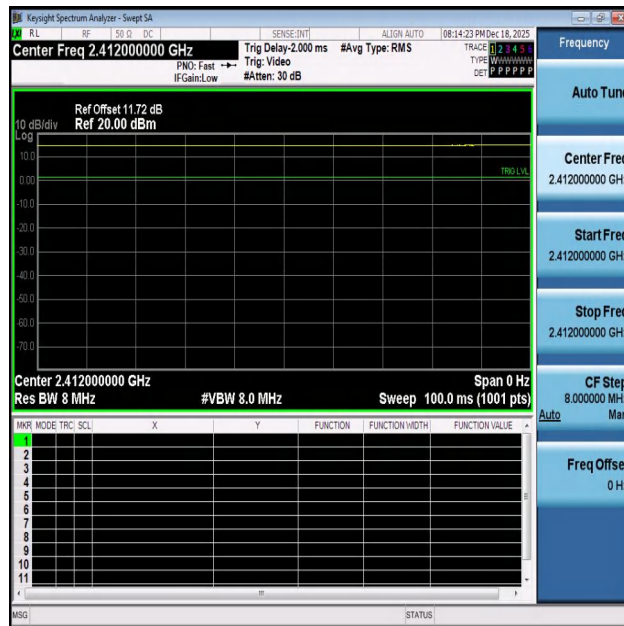


NTNV-11B-Ant1-2412

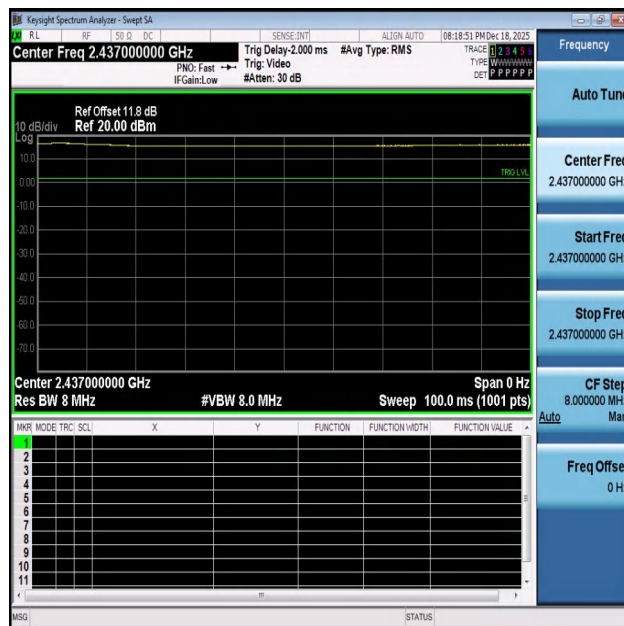


NTNV-11B-Ant1-2437

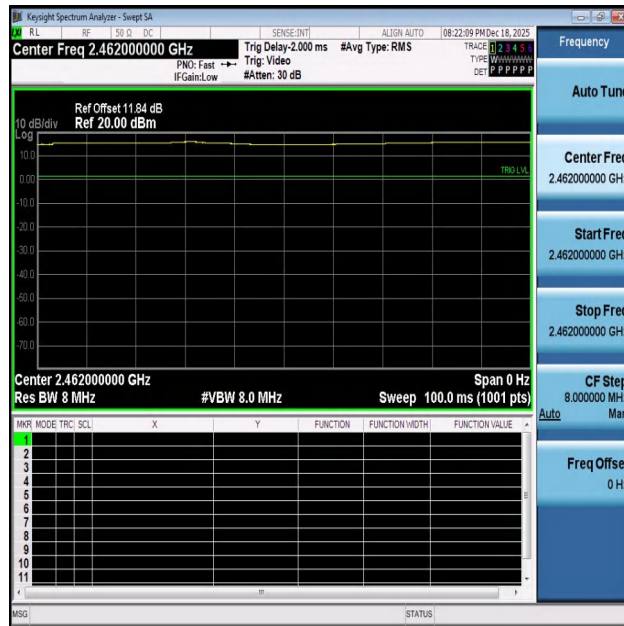


NTNV-11B-Ant1-2462

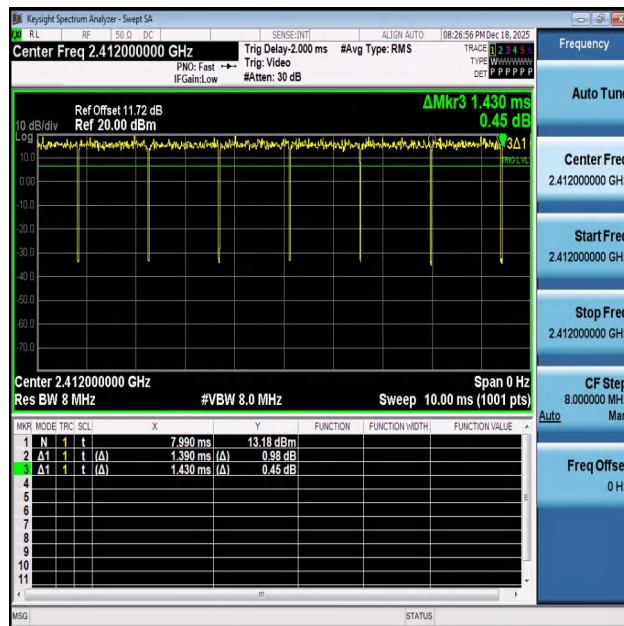


NTNV-11G-Ant1-2412

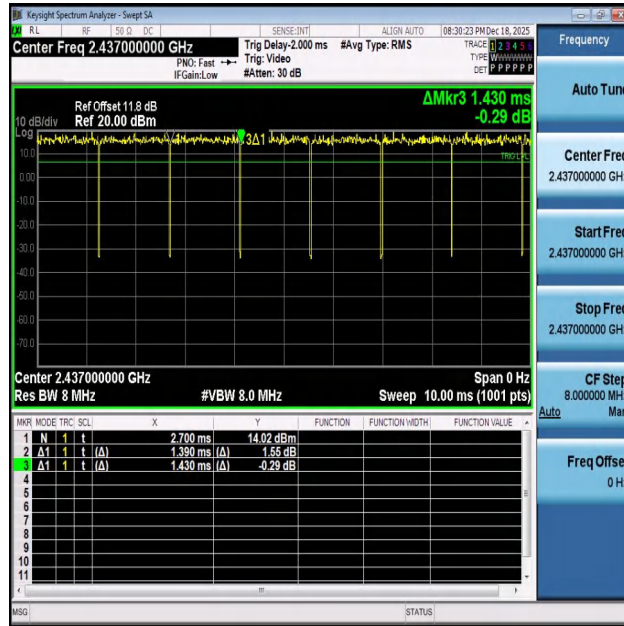


NTNV-11G-Ant1-2437

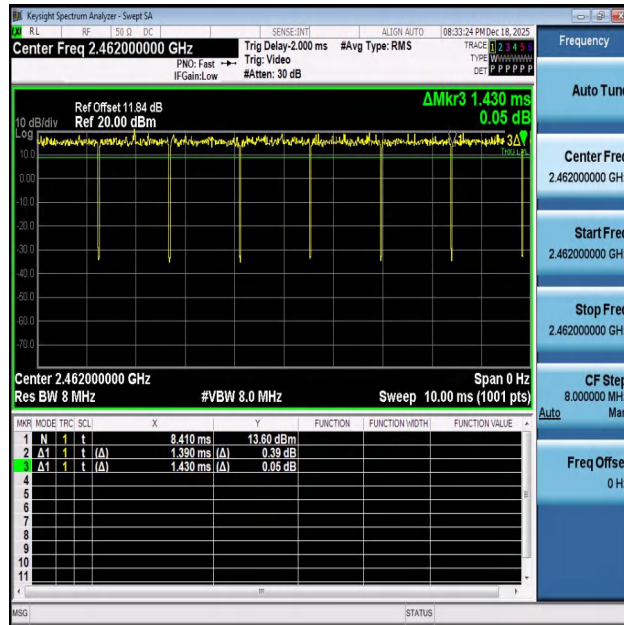


NTNV-11G-Ant1-2462

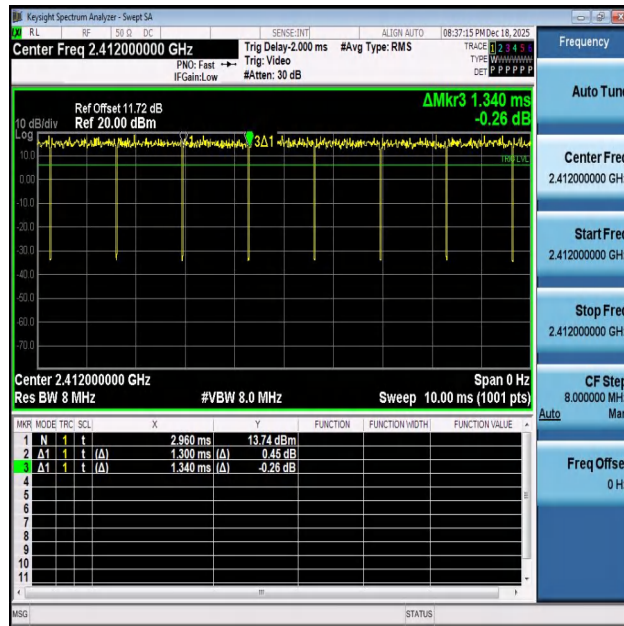


NTNV-11N20SISO-Ant1-2412

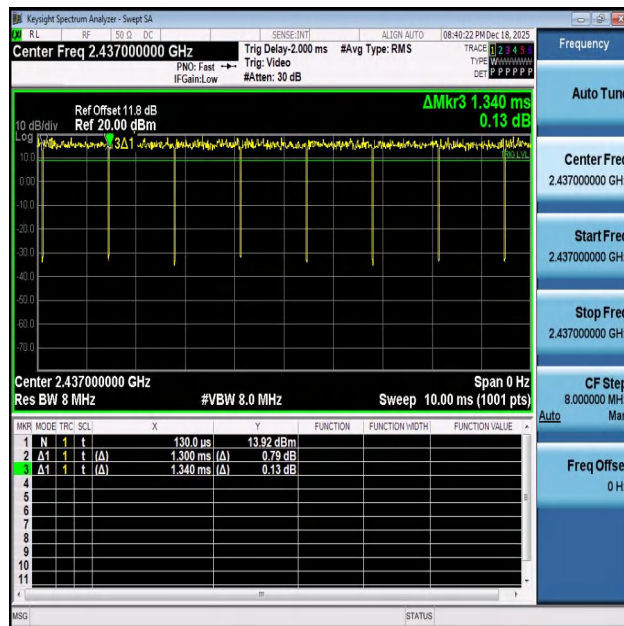


NTNV-11N20SISO-Ant1-2437

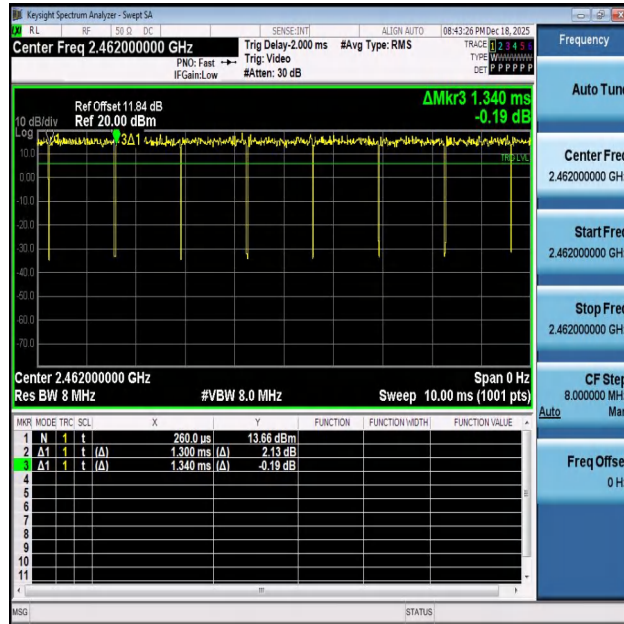


NTNV-11N20SISO-Ant1-2462

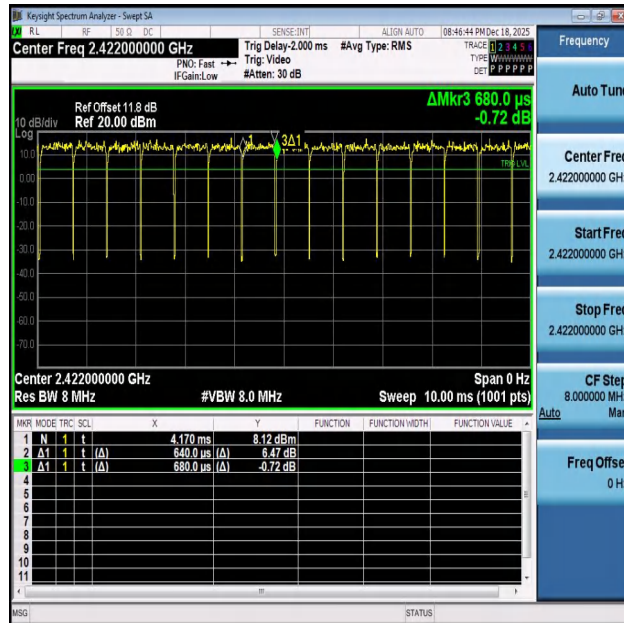

NTNV-11N40SISO-Ant1-2422

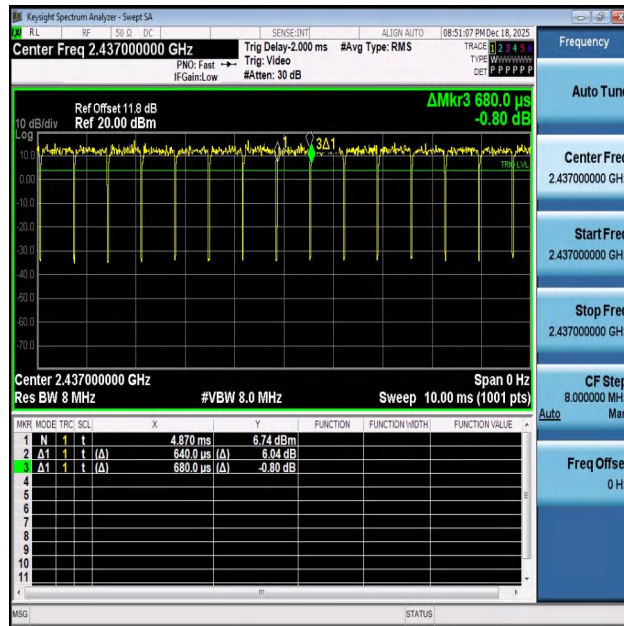

NTNV-11N40SISO-Ant1-2437

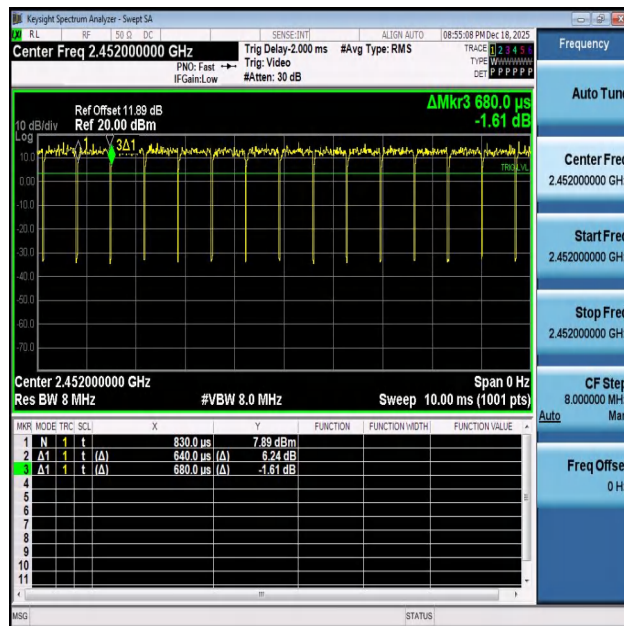

NTNV-11N40SISO-Ant1-2452

**A.2. Maximum Peak Conducted Output Power**

TestMode	Antenna	Frequency[MHz]	Peak Power[dBm]	Conducted Limit[dBm]	Verdict
11B	Ant1	2412	11.87	≤30.00	PASS
11B	Ant1	2437	12.30	≤30.00	PASS
11B	Ant1	2462	11.41	≤30.00	PASS
11G	Ant1	2412	11.85	≤30.00	PASS
11G	Ant1	2437	12.19	≤30.00	PASS
11G	Ant1	2462	11.82	≤30.00	PASS
11N20SISO	Ant1	2412	11.75	≤30.00	PASS
11N20SISO	Ant1	2437	12.02	≤30.00	PASS
11N20SISO	Ant1	2462	11.75	≤30.00	PASS
11N40SISO	Ant1	2422	12.26	≤30.00	PASS
11N40SISO	Ant1	2437	12.12	≤30.00	PASS
11N40SISO	Ant1	2452	12.05	≤30.00	PASS

**A.3. 6 dB Bandwidth**

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	8.160	2407.960	2416.120	0.5	PASS
11B	Ant1	2437	8.160	2432.960	2441.120	0.5	PASS
11B	Ant1	2462	8.120	2457.960	2466.080	0.5	PASS
11G	Ant1	2412	16.160	2403.920	2420.080	0.5	PASS
11G	Ant1	2437	16.160	2429.000	2445.160	0.5	PASS
11G	Ant1	2462	16.080	2453.920	2470.000	0.5	PASS
11N20SISO	Ant1	2412	17.360	2403.360	2420.720	0.5	PASS
11N20SISO	Ant1	2437	17.400	2428.320	2445.720	0.5	PASS
11N20SISO	Ant1	2462	17.200	2453.360	2470.560	0.5	PASS
11N40SISO	Ant1	2422	34.160	2405.680	2439.840	0.5	PASS
11N40SISO	Ant1	2437	36.320	2418.920	2455.240	0.5	PASS
11N40SISO	Ant1	2452	34.240	2434.400	2468.640	0.5	PASS



Test Graphs



11B-Ant1-2412-PASS



11B-Ant1-2437-PASS



11B-Ant1-2462-PASS



11G-Ant1-2412-PASS



11G-Ant1-2437-PASS



11G-Ant1-2462-PASS



11N20SISO-Ant1-2412-PASS



11N20SISO-Ant1-2437-PASS



11N20SISO-Ant1-2462-PASS



11N40SISO-Ant1-2422-PASS



11N40SISO-Ant1-2437-PASS



11N40SISO-Ant1-2452-PASS

**A.4. Conducted Spurious Emissions**

TestMode	Antenna	Frequency [MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	0~Reference	2.02	2.02	---	PASS
11B	Ant1	2412	30~1000	2.02	-59.69	≤-17.98	PASS
11B	Ant1	2412	1000~26500	2.02	-50.81	≤-17.98	PASS
11B	Ant1	2437	0~Reference	2.28	2.28	---	PASS
11B	Ant1	2437	30~1000	2.28	-59.22	≤-17.72	PASS
11B	Ant1	2437	1000~26500	2.28	-49.53	≤-17.72	PASS
11B	Ant1	2462	0~Reference	3.60	3.60	---	PASS
11B	Ant1	2462	30~1000	3.60	-59.33	≤-16.4	PASS
11B	Ant1	2462	1000~26500	3.60	-51.25	≤-16.4	PASS
11G	Ant1	2412	0~Reference	-0.19	-0.19	---	PASS
11G	Ant1	2412	30~1000	-0.19	-58.75	≤-20.19	PASS
11G	Ant1	2412	1000~26500	-0.19	-51.81	≤-20.19	PASS
11G	Ant1	2437	0~Reference	-2.48	-2.48	---	PASS
11G	Ant1	2437	30~1000	-2.48	-58.32	≤-22.48	PASS
11G	Ant1	2437	1000~26500	-2.48	-51.25	≤-22.48	PASS
11G	Ant1	2462	0~Reference	-0.15	-0.15	---	PASS
11G	Ant1	2462	30~1000	-0.15	-58.82	≤-20.15	PASS
11G	Ant1	2462	1000~26500	-0.15	-51.77	≤-20.15	PASS
11N20SISO	Ant1	2412	0~Reference	-0.85	-0.85	---	PASS
11N20SISO	Ant1	2412	30~1000	-0.85	-58.82	≤-20.85	PASS
11N20SISO	Ant1	2412	1000~26500	-0.85	-51.67	≤-20.85	PASS
11N20SISO	Ant1	2437	0~Reference	-0.94	-0.94	---	PASS
11N20SISO	Ant1	2437	30~1000	-0.94	-59.55	≤-20.94	PASS
11N20SISO	Ant1	2437	1000~26500	-0.94	-51.36	≤-20.94	PASS
11N20SISO	Ant1	2462	0~Reference	-0.71	-0.71	---	PASS
11N20SISO	Ant1	2462	30~1000	-0.71	-59.86	≤-20.71	PASS
11N20SISO	Ant1	2462	1000~26500	-0.71	-51.29	≤-20.71	PASS
11N40SISO	Ant1	2422	0~Reference	-1.74	-1.74	---	PASS
11N40SISO	Ant1	2422	30~1000	-1.74	-58.83	≤-21.74	PASS
11N40SISO	Ant1	2422	1000~26500	-1.74	-51.75	≤-21.74	PASS
11N40SISO	Ant1	2437	0~Reference	-2.83	-2.83	---	PASS
11N40SISO	Ant1	2437	30~1000	-2.83	-58.76	≤-22.83	PASS




REPORT No.: SZ25120020W03


11N40SISO	Ant1	2437	1000~26500	-2.83	-51.78	≤ -22.83	PASS
11N40SISO	Ant1	2452	0~Reference	-3.34	-3.34	---	PASS
11N40SISO	Ant1	2452	30~1000	-3.34	-59.96	≤ -23.34	PASS
11N40SISO	Ant1	2452	1000~26500	-3.34	-51.66	≤ -23.34	PASS




Test Graphs

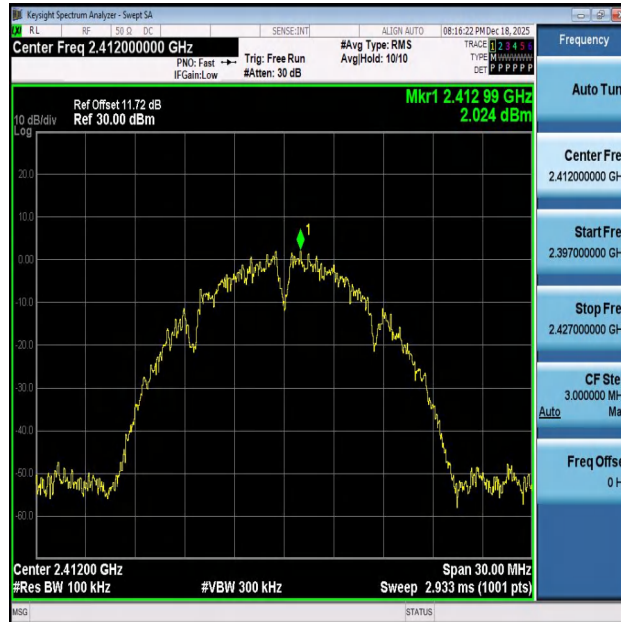


11B-Ant1-2412-0~Reference-PASS

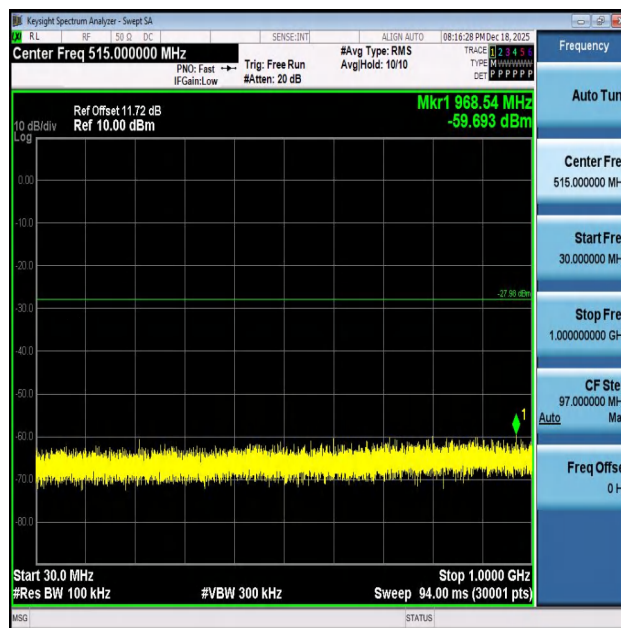


11B-Ant1-2412-30~1000-PASS

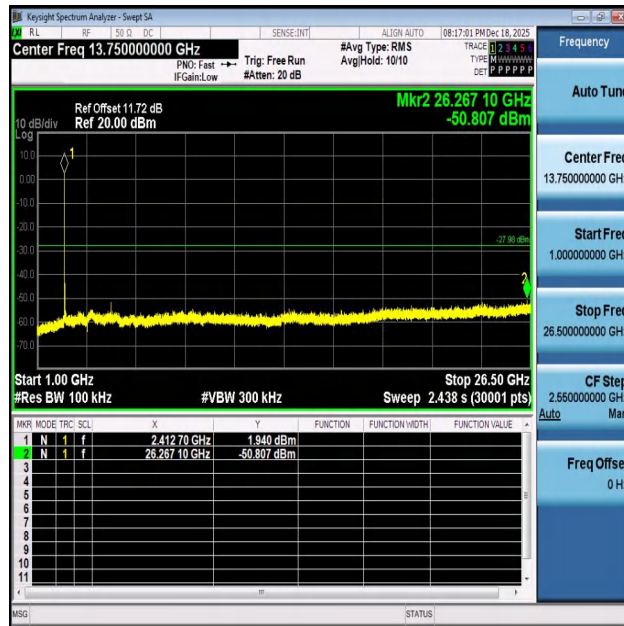


11B-Ant1-2412-1000~26500-PASS

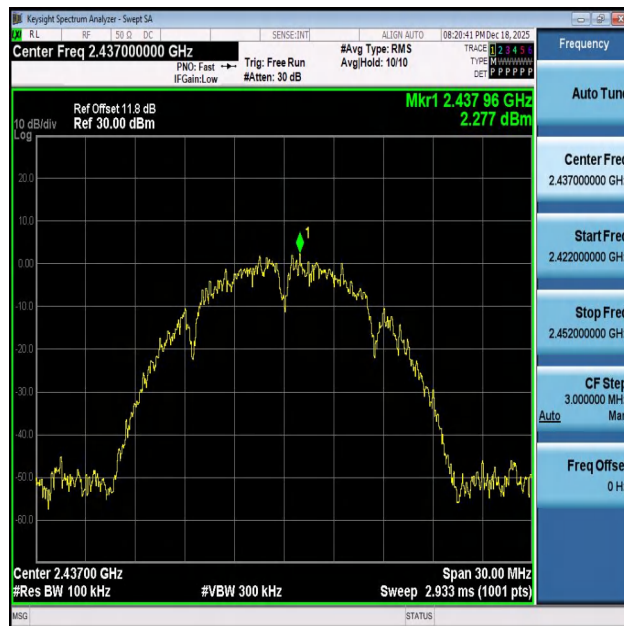


11B-Ant1-2437-0~Reference-PASS

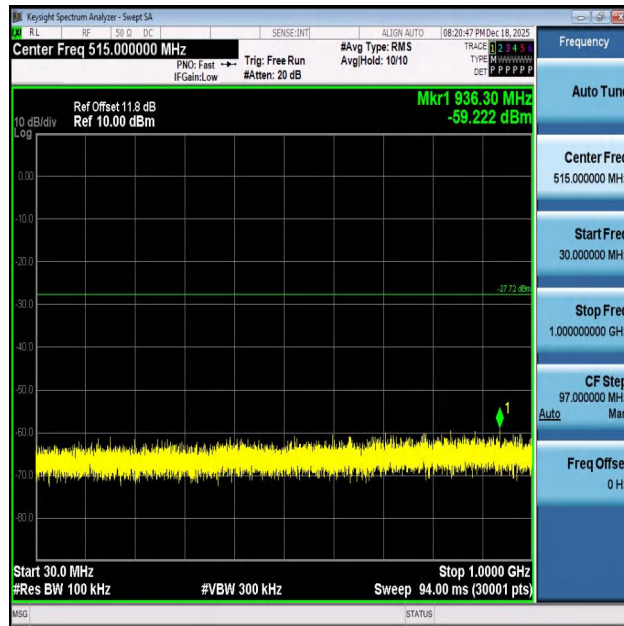


11B-Ant1-2437-30~1000-PASS

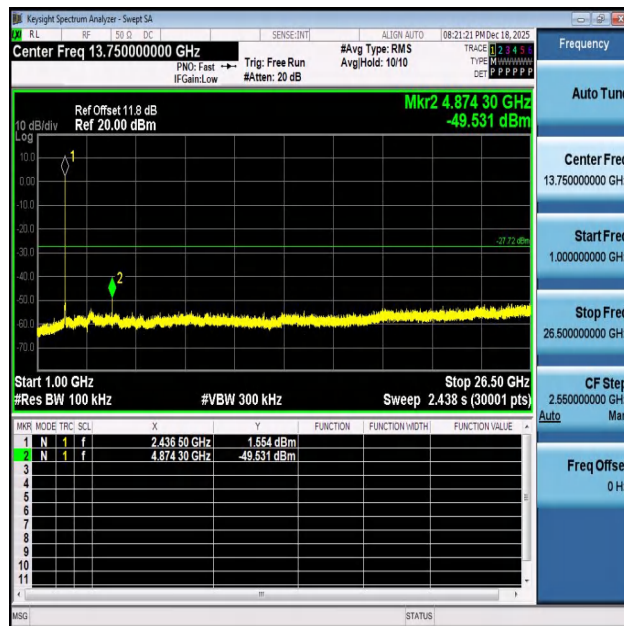


11B-Ant1-2437-1000~26500-PASS

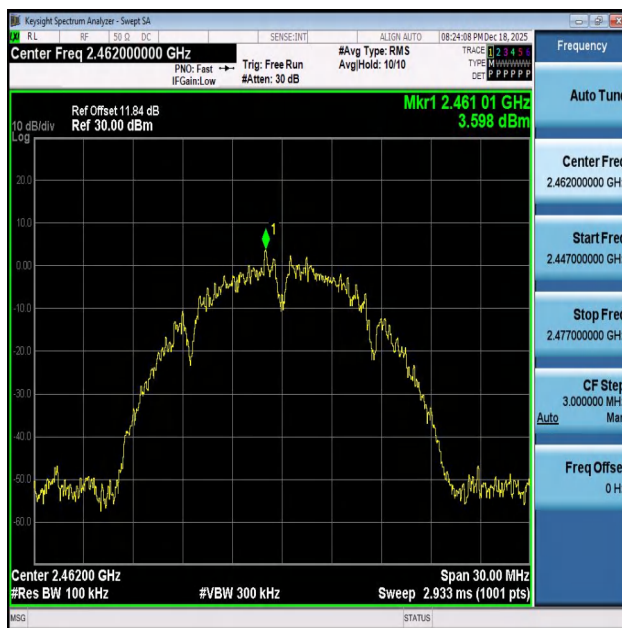

11B-Ant1-2462-0~Reference-PASS

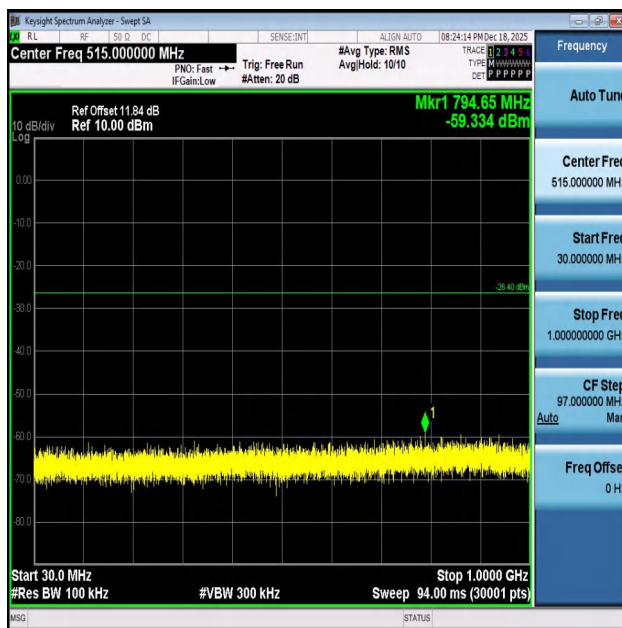


11B-Ant1-2462-30~1000-PASS

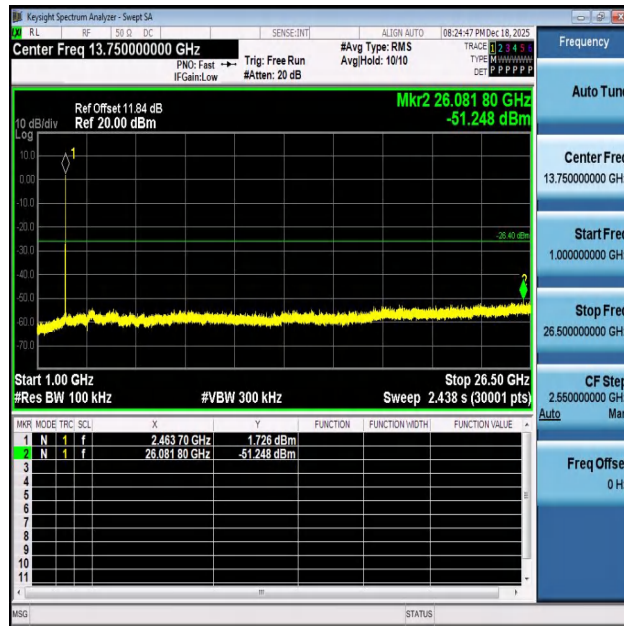


11B-Ant1-2462-1000~26500-PASS




11G-Ant1-2412-0~Reference-PASS

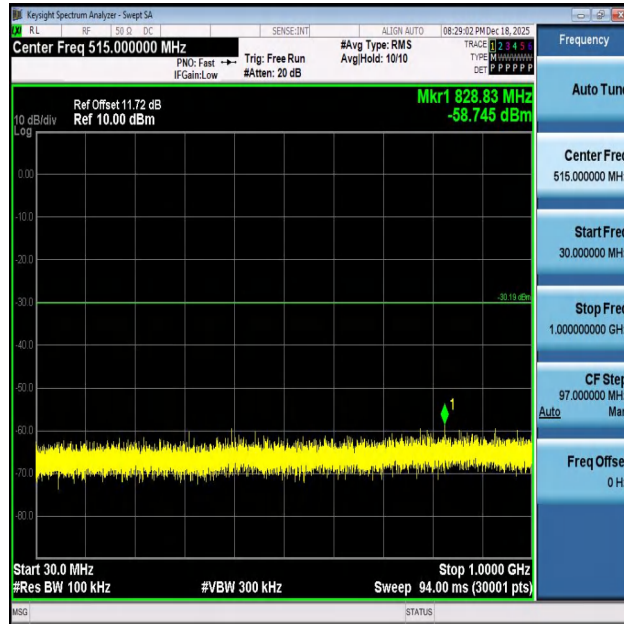


11G-Ant1-2412-30~1000-PASS

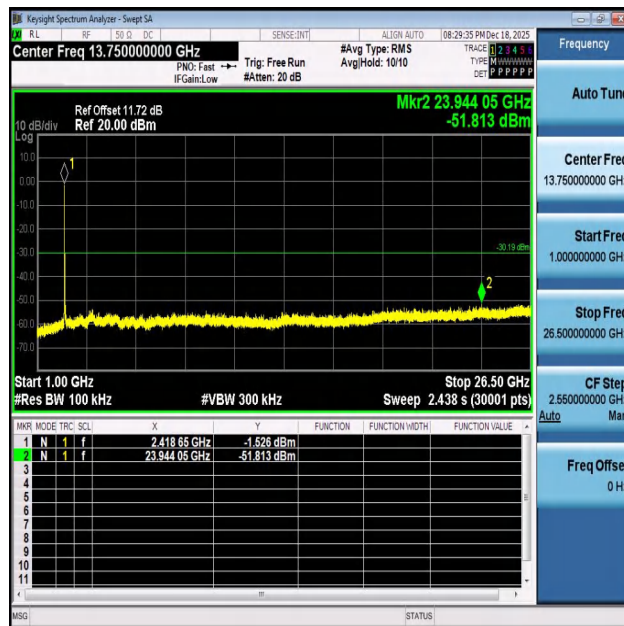


11G-Ant1-2412-1000~26500-PASS

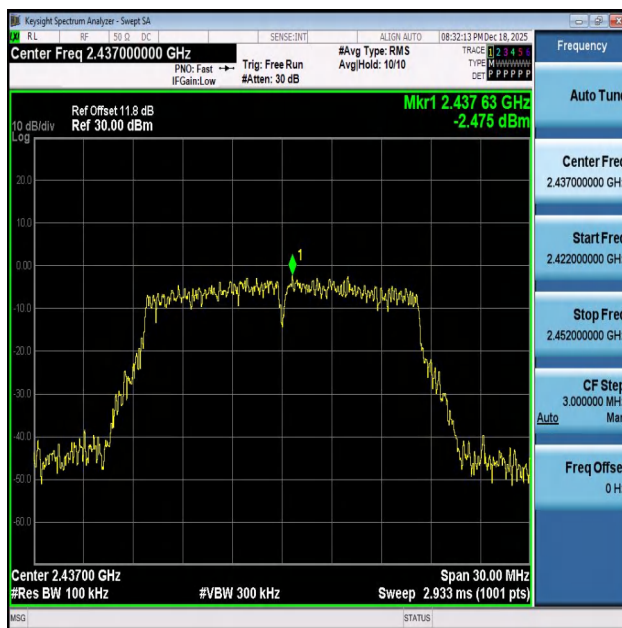


11G-Ant1-2437-0~Reference-PASS

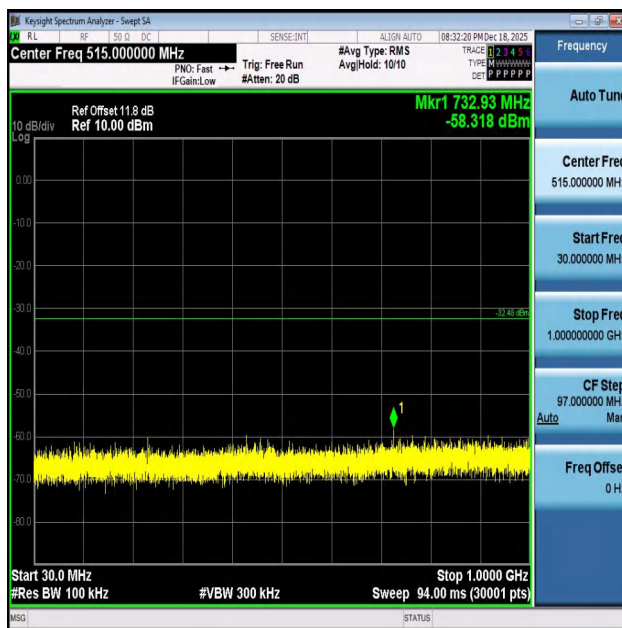


11G-Ant1-2437-30~1000-PASS

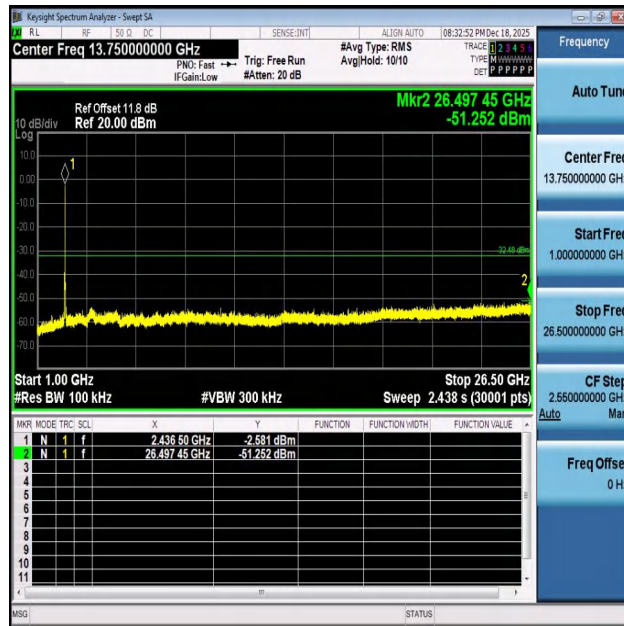


11G-Ant1-2437-1000~26500-PASS

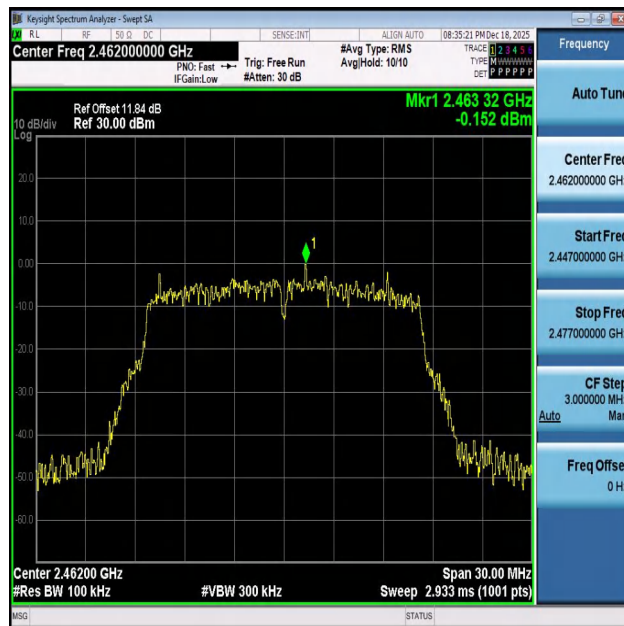

11G-Ant1-2462-0~Reference-PASS

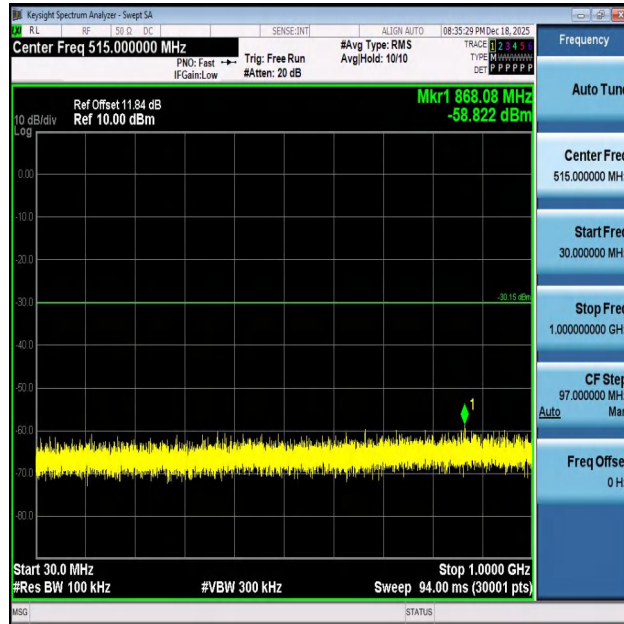


11G-Ant1-2462-30~1000-PASS

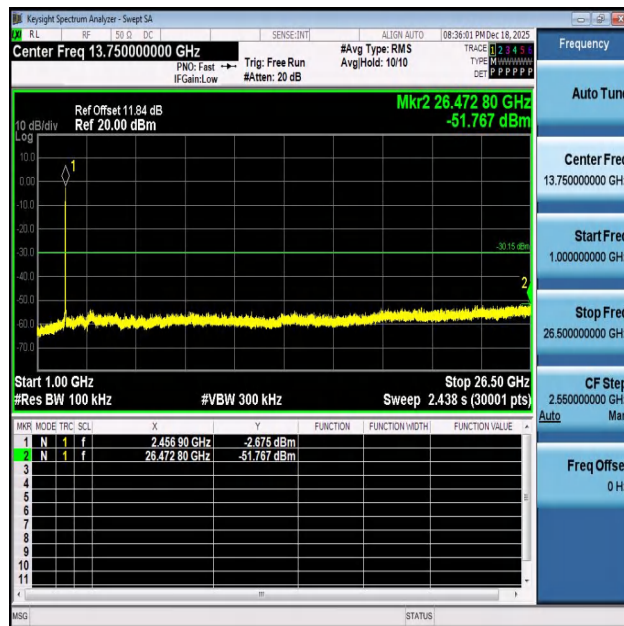


11G-Ant1-2462-1000~26500-PASS



11N20SISO-Ant1-2412-0~Reference-PASS

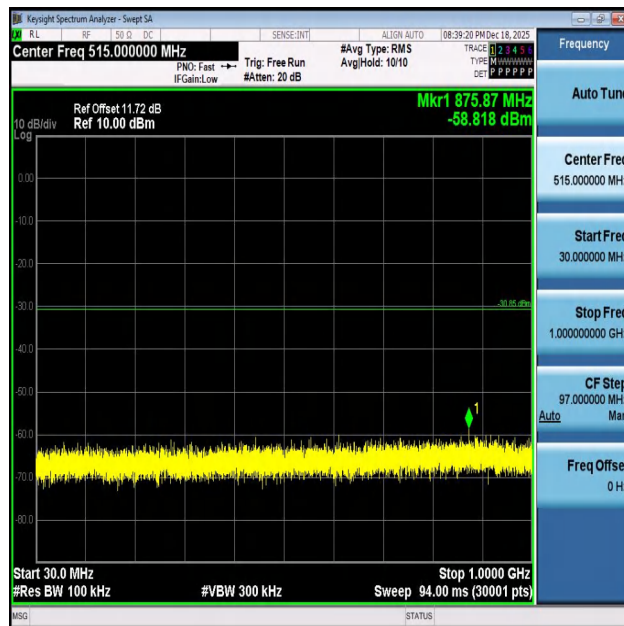


11N20SISO-Ant1-2412-30~1000-PASS

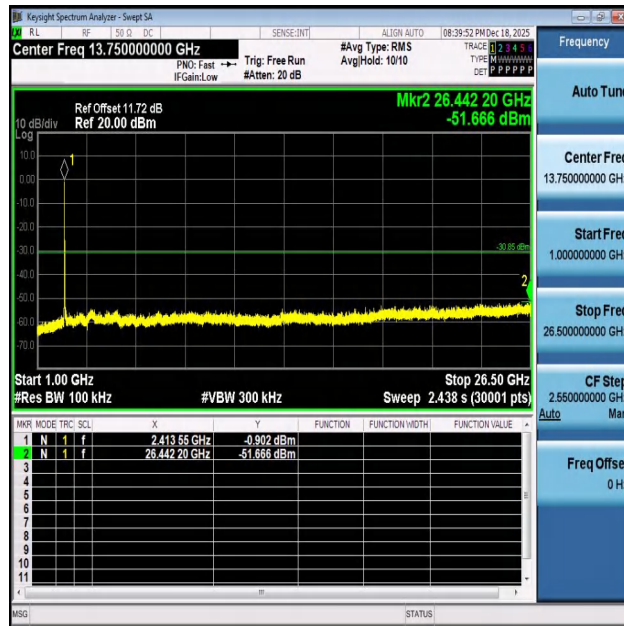


11N20SISO-Ant1-2412-1000~26500-PASS



11N20SISO-Ant1-2437-0~Reference-PASS

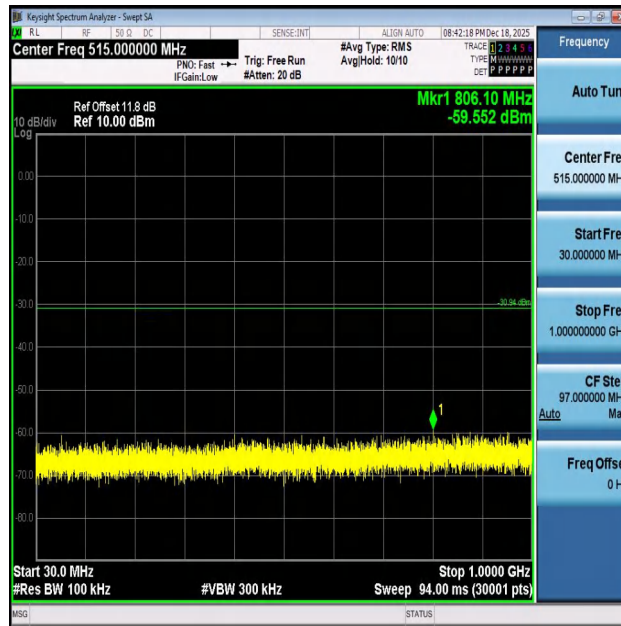


11N20SISO-Ant1-2437-30~1000-PASS

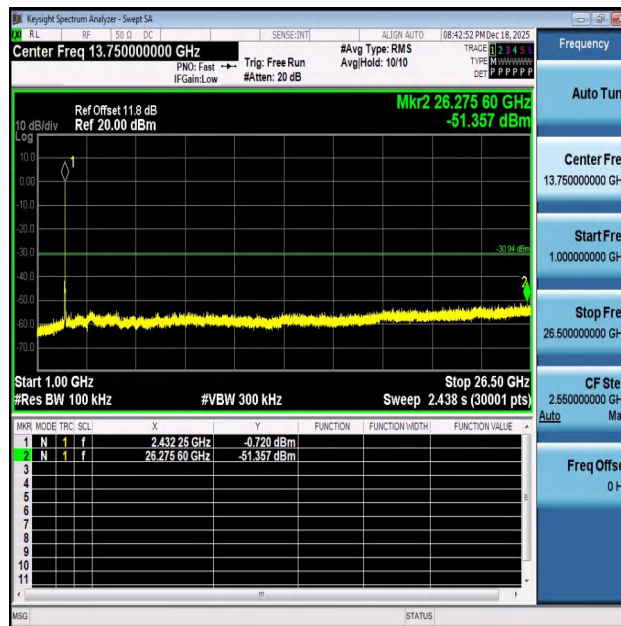


11N20SISO-Ant1-2437-1000~26500-PASS




11N20SISO-Ant1-2462-0~Reference-PASS

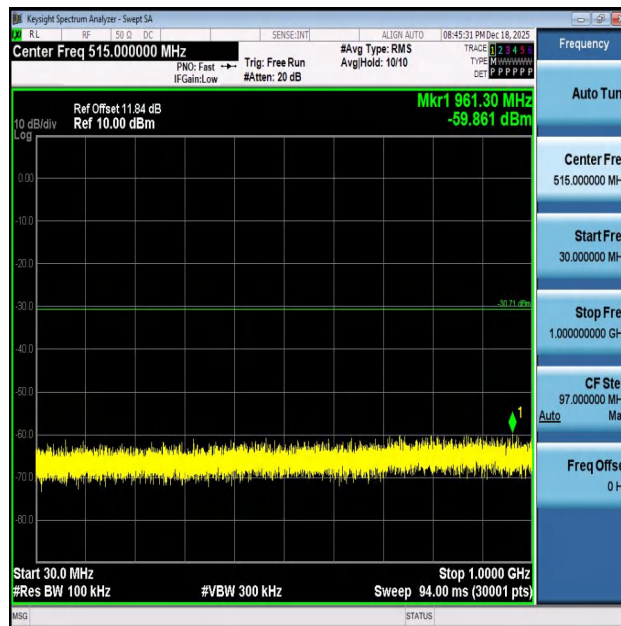


11N20SISO-Ant1-2462-30~1000-PASS

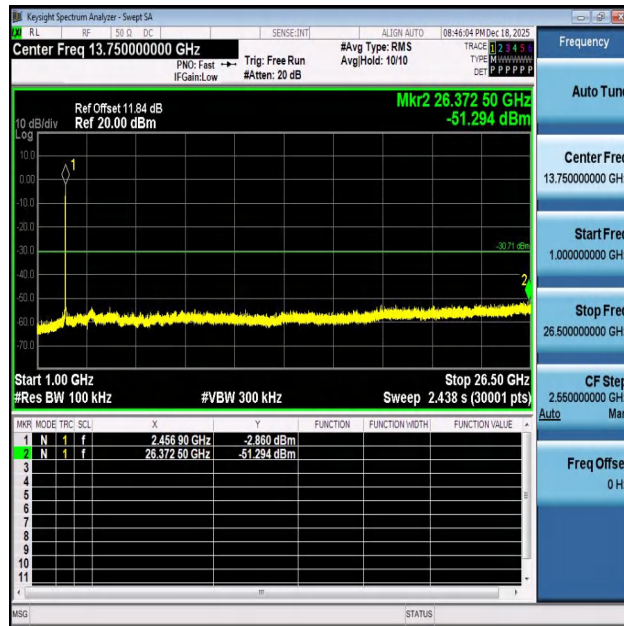


11N20SISO-Ant1-2462-1000~26500-PASS

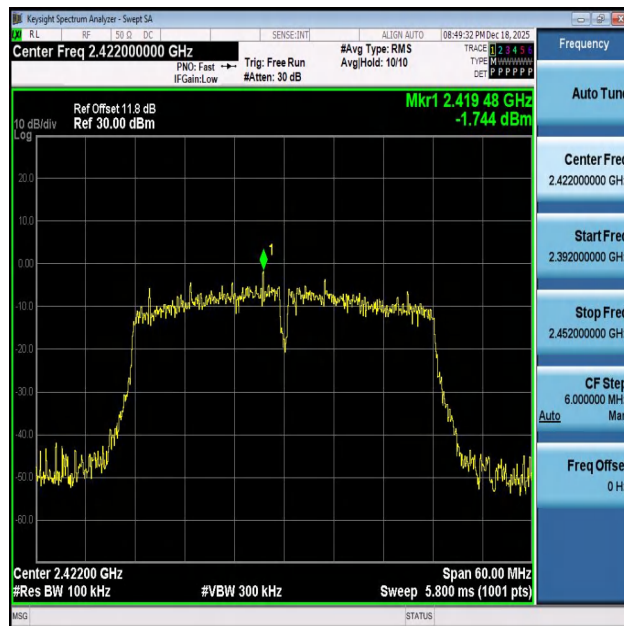


11N40SISO-Ant1-2422-0~Reference-PASS

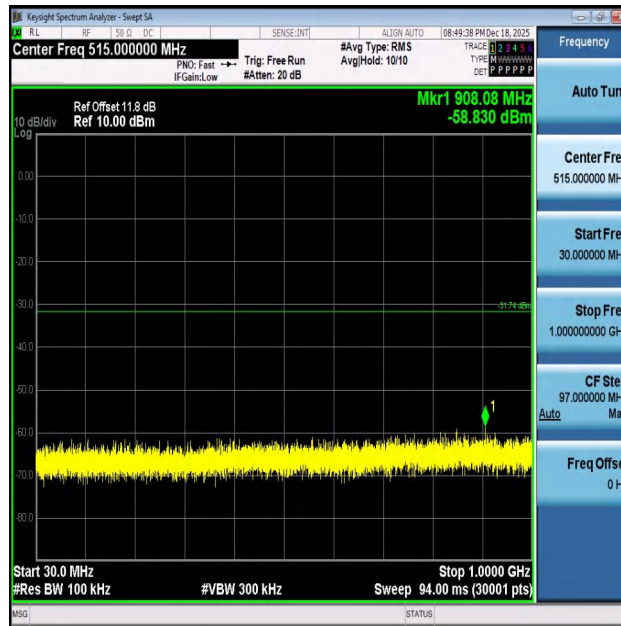


11N40SISO-Ant1-2422-30~1000-PASS

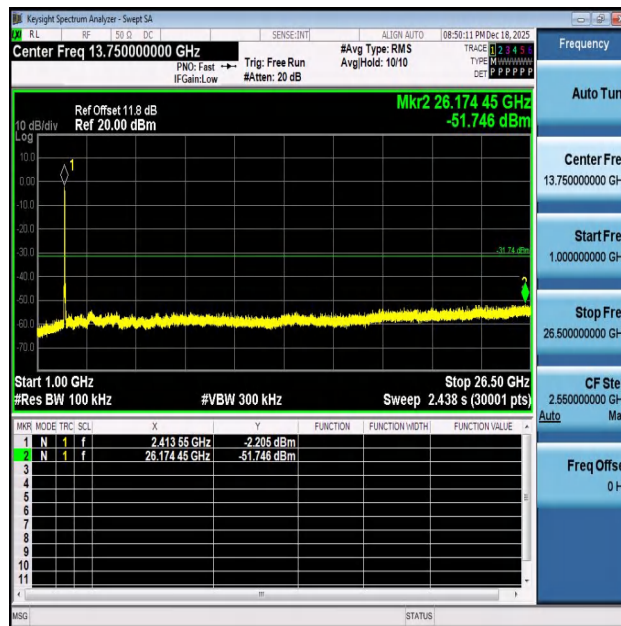


11N40SISO-Ant1-2422-1000~26500-PASS

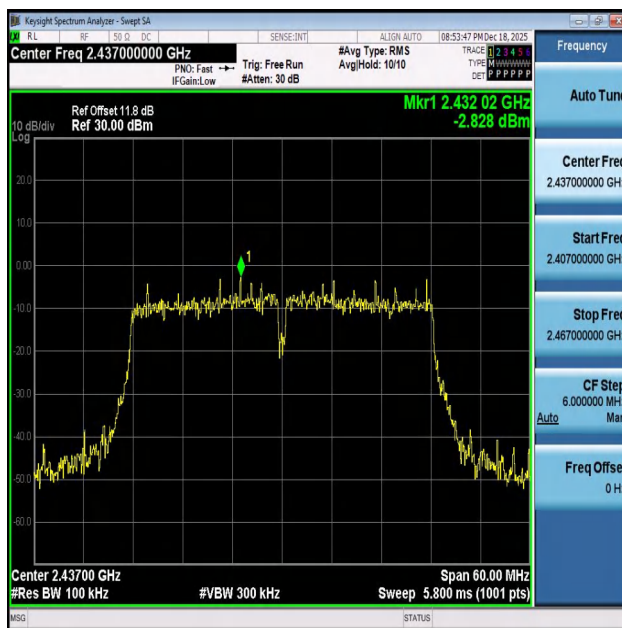


11N40SISO-Ant1-2437-0~Reference-PASS

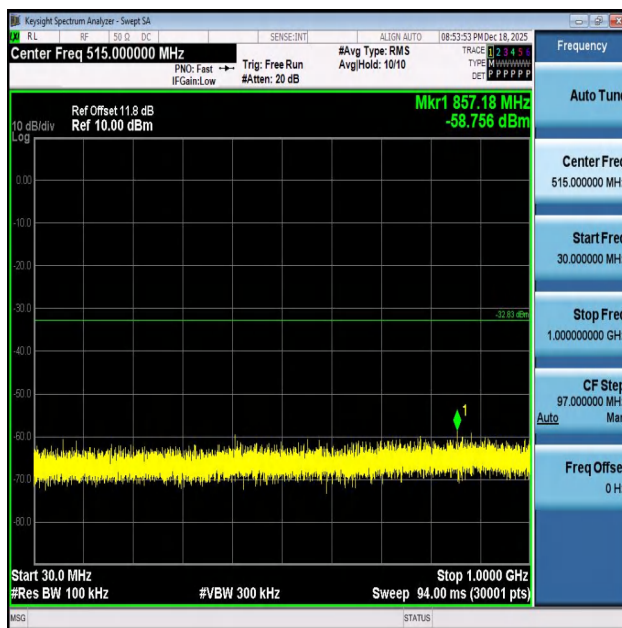


11N40SISO-Ant1-2437-30~1000-PASS

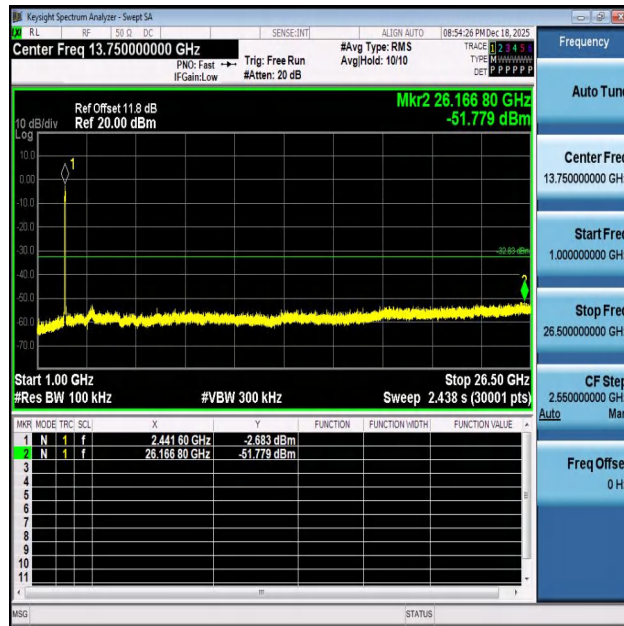


11N40SISO-Ant1-2437-1000~26500-PASS

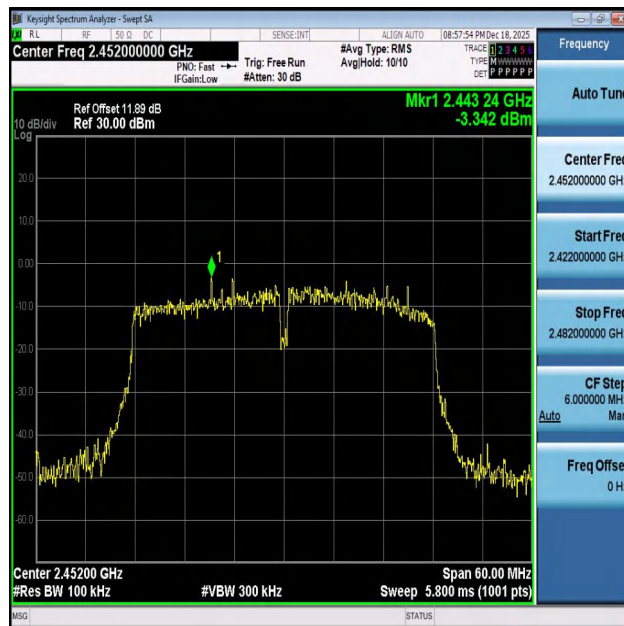

11N40SISO-Ant1-2452-0~Reference-PASS

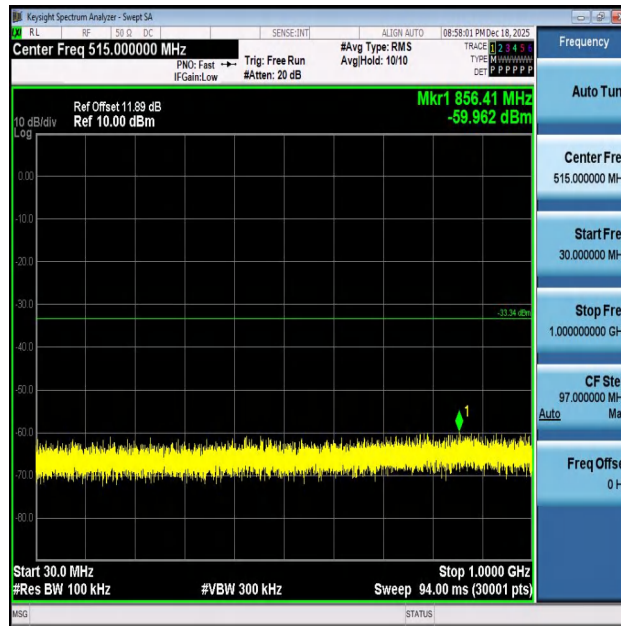

11N40SISO-Ant1-2452-30~1000-PASS

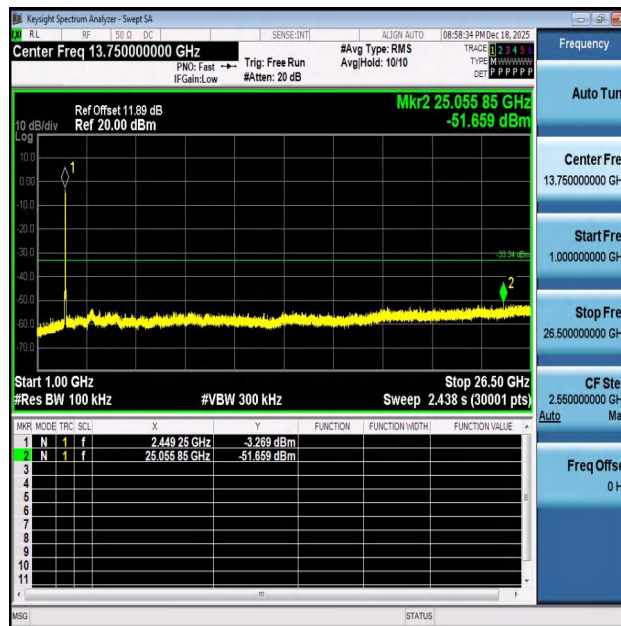


11N40SISO-Ant1-2452-1000~26500-PASS

**A.5. Band Edge**


TestMode	Antenna	ChName	Frequency [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	Low	2412	2.70	-47.14	≤-17.3	PASS
11B	Ant1	High	2462	3.01	-47.37	≤-17	PASS
11G	Ant1	Low	2412	1.27	-43.06	≤-18.73	PASS
11G	Ant1	High	2462	0.56	-46.59	≤-19.44	PASS
11N20SISO	Ant1	Low	2412	-0.01	-41.49	≤-20.01	PASS
11N20SISO	Ant1	High	2462	0.52	-47.45	≤-19.48	PASS
11N40SISO	Ant1	Low	2422	-0.89	-41.33	≤-20.89	PASS
11N40SISO	Ant1	High	2452	-1.40	-43.4	≤-21.4	PASS



Test Graphs

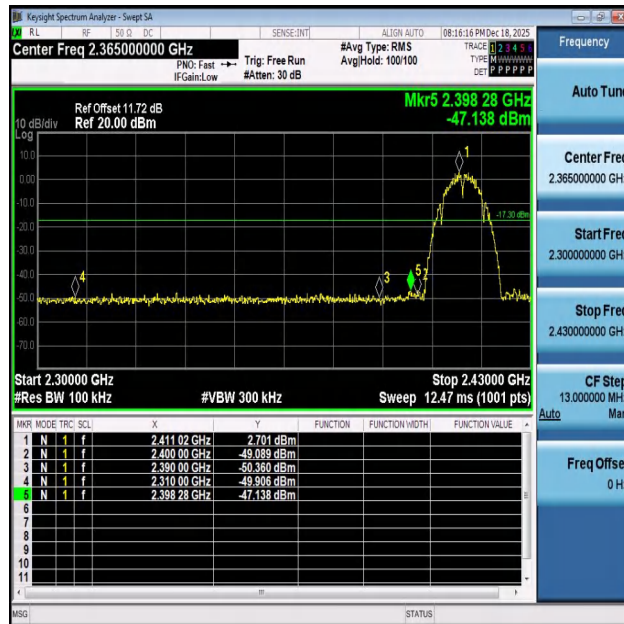

11B-Ant1-2412-PASS

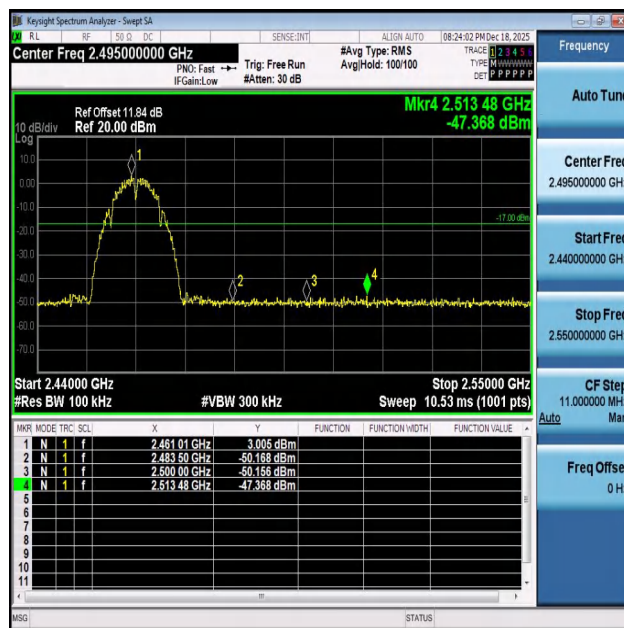

11B-Ant1-2462-PASS