



REPORT No. : SZ17110124S01

RF EXPOSURE EVALUATION REPORT

APPLICANT : Golden Mark (HK) Limited

PRODUCT NAME : Multi Sensor

MODEL NAME : MS100,HS-FS100+ ,
HS-FSL100+ ,HS-FSW100+ ,
ZWP-LD-100,WLD-100

BRAND NAME : N/A

FCC ID : 2AMY9MS100

STANDARD(S) : 47CFR 2.1093
KDB 447498

ISSUE DATE : 2018-02-05

Tested by:

Peng Fuwei (Test engineer)

Approved by:

Peng Huarui (Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Technical Information	3
1.1 Applicant and Manufacturer Information	3
1.2 Equipment Under Test (EUT) Description	3
1.3 Photographs of the EUT	4
1.4 Applied Reference Documents	5
2. Device Category And RF Exposure Limit	6
3. SAR Evaluation	7
4. RF Exposure Evaluation	8
Annex A General Information	9

Change History		
Issue	Date	Reason for change
1.0	2018-02-05	First edition



1. Technical Information

Note: Provide by manufacturer.

1.1 Applicant and Manufacturer Information

Applicant:	Golden Mark (HK) Limited
Applicant Address:	6/F., Kimberley Plaza, 45-47 Kimberley Road, Tsim Sha Tsui, Kowloon, Hong Kong
Manufacturer:	Golden Mark (HK) Limited
Manufacturer Address:	6/F., Kimberley Plaza, 45-47 Kimberley Road, Tsim Sha Tsui, Kowloon, Hong Kong

1.2 Equipment Under Test (EUT) Description

EUT Type:	Multi Sensor
Hardware Version:	N/A
Software Version:	N/A
Frequency Bands:	908.4MHz;916.0MHz
Antenna type:	PCB Antenna;
Antenna Gain:	-3.0dBi


Note 1: According to the certificate holder, they declared that the models: MS100 / HS-FS100+ / HS-FSL100+ / HS-FSW100+ / ZWP-LD-100 / WLD-100 are accordant in both hardware and software. These models only differ in application information. The detail difference for Multi Sensor application is as below:

Model Number	Feature Description
MS100	Light Sensor, Water Sensor, Temperature Sensor
HS-FS100+	Light Sensor, Water Sensor, Temperature Sensor
HS-FSL100+	Light Sensor, Temperature Sensor
HS-FSW100+	Water Sensor, Temperature Sensor
ZWP-LD-100	Water Sensor, Temperature Sensor
WLD-100	Water Sensor, Temperature Sensor

The main measuring model is MS100, only the results for MS100 were recorded in this report.

1.3 Photographs of the EUT

1. EUT front view

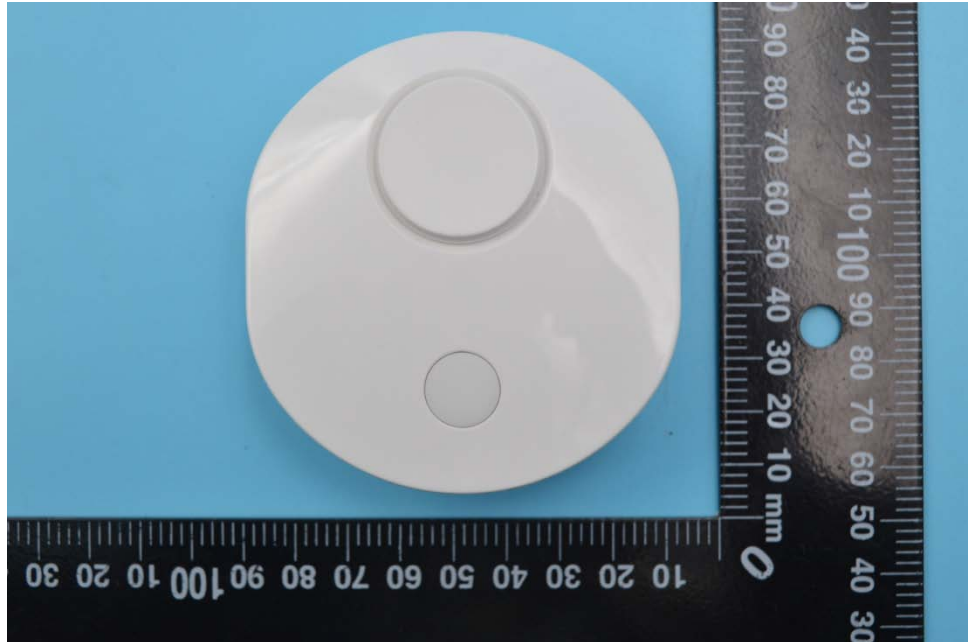

2. EUT rear view





1.3.1 Identification of all used EUT

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
1#	N/A	N/A

1.4 Applied Reference Documents

Leading reference documents for testing:

No.	Identity	Document Title
1	47 CFR§2.1093	Radio frequency Radiation Exposure Evaluation: portable devices
2	KDB 447498 D01v06	General RF Exposure Guidance



2. Device Category And RF Exposure Limit

Per user manual, this device is a Multi Sensor. Based on 47CFR 2.1093, this device belongs to portable device category with General Population/Uncontrolled exposure.

Portable Devices:

47CFR 2.1093(b)

For purposes of this section, a portable device is defined as a transmitting device designed to be used so that the radiating structure(s) of the device is/are within 20 centimeters of the body of the user.

GENERAL POPULATION / UNCONTROLLED EXPOSURE

47CFR 2.1093(d) (2)

Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their exposure. Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section.



3. SAR Evaluation

EIRP evaluation

Frequency (MHz)	Max Emission (dBuV/m)	measurement distance (cm)	EIRP (mW)
908.4	85.00	300	0.0949
916.0	75.50	300	0.0106

Where: $EIRP = (E \cdot d)^2 / 30$

E = electric field strength in V/m

d = measurement distance in meters (m).



4. RF Exposure Evaluation

The device only incorporates a Z-Wave, so standalone SAR evaluation is required for Z-Wave and simultaneous SAR is not required.

Standalone transmission SAR evaluation

According to KDB 447498 section 4.3.1, the 1-g SAR test exclusion thresholds at test separation Distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$

The maximum tune-up limit power is **1.12mW @ 0.9084GHz**

When Multi Sensor is used on the body, so use **5mm** as the most conservative minimum test separation distance,

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] = \mathbf{0.35} \leq 3.0$$

So SAR evaluation is not required for this device.

Note: Maximum Tune-up Limit is **0.5dBm**.



Annex A General Information

1. Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

_____ END OF REPORT _____