



Phoenix connector for power

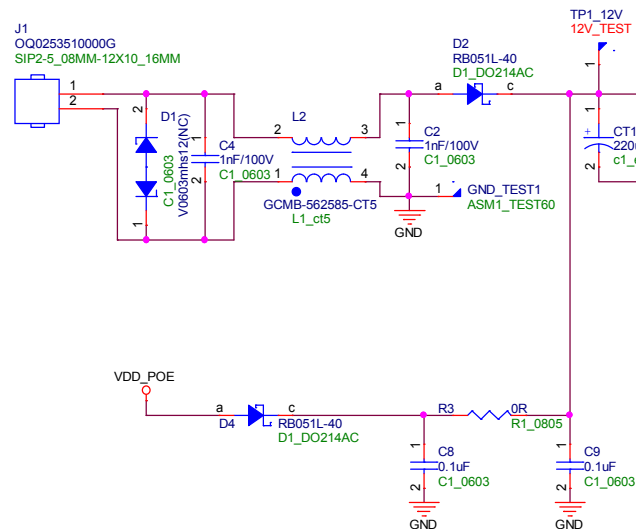

New POE +12V Connector

USE the new one, POE REV 2 conn

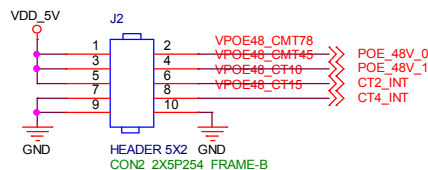


12V TO 5V max 3A SWITCH POWER

+12V power for LED backlight


+5V power for CPU BD

+5V power for PA

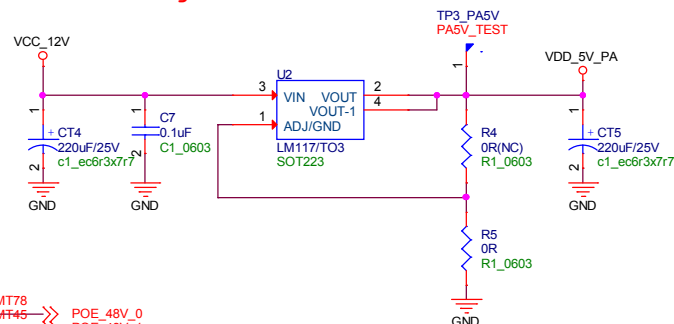


AmRoad Technology Inc.


Title			
Power In			
Size B	Document Number	Rev E	
DB3101R_Power			
Date:	Thursday, February 25, 2016	Sheet	1 of 4

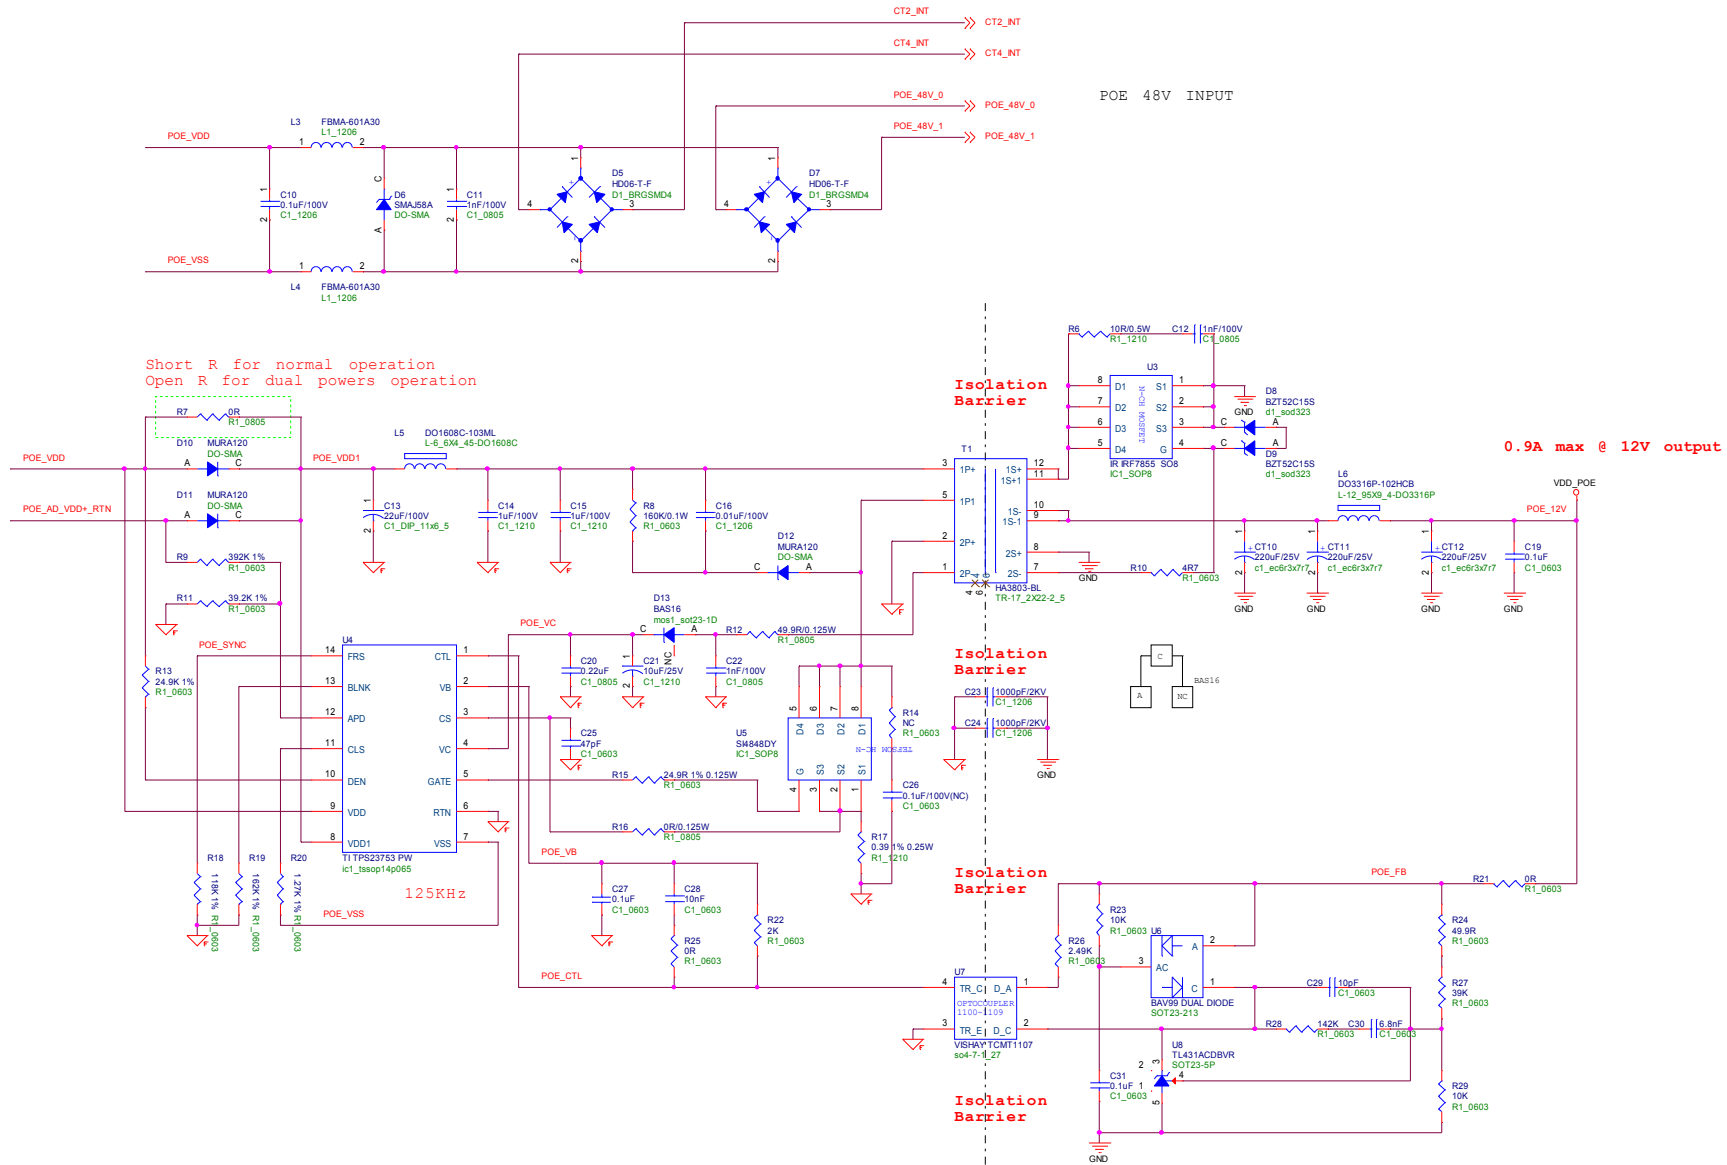

Indicator LED

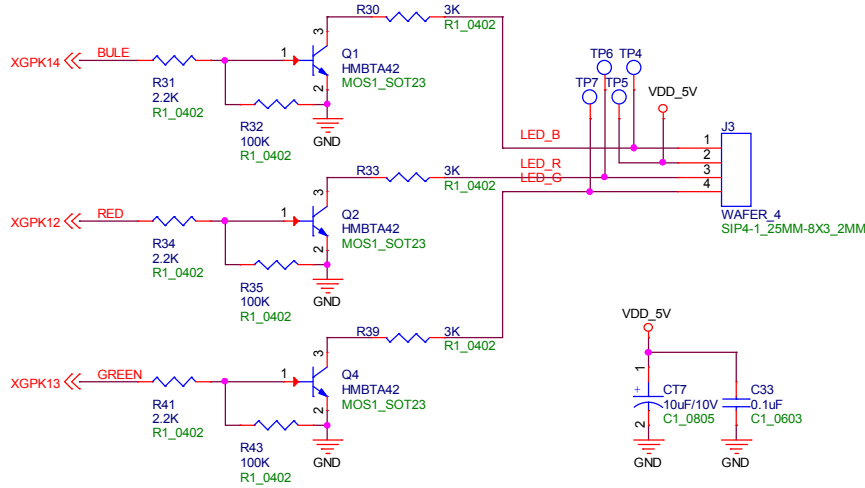


RFID UART

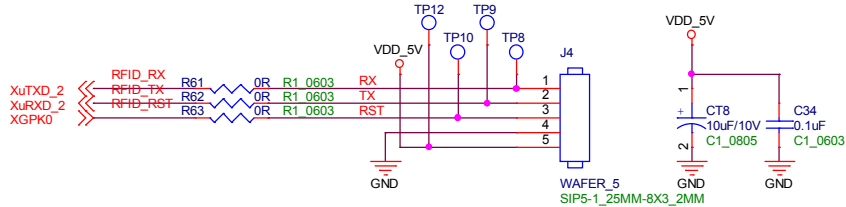


CHECK PIN ASSIGNMENT AND POWER VOLTAGE


GPIO Interface

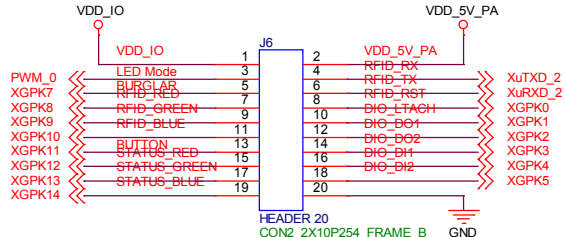


RFID LED

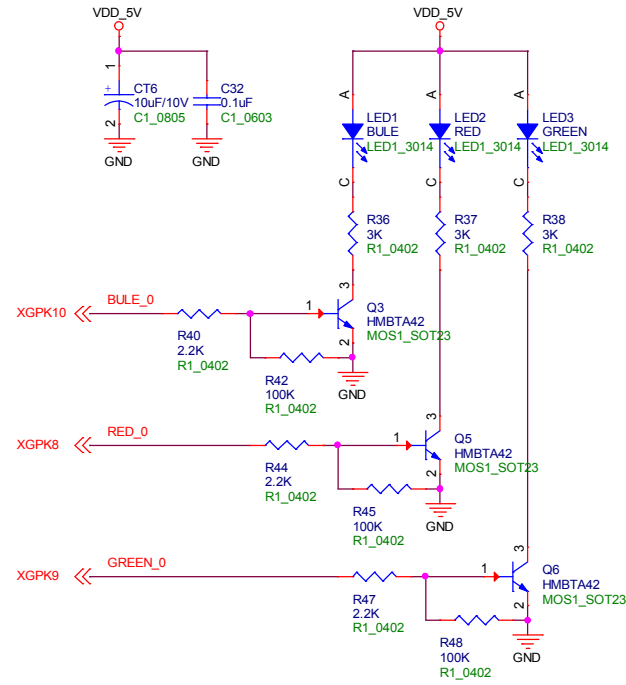


But t on



Burglar








Background Control


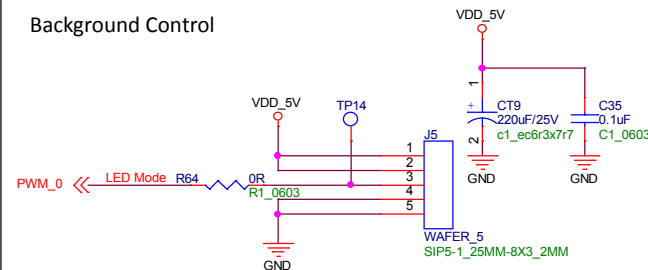


AmRoad Technology Inc.

Title		Function Key	
Size	Document Number	Rev	
B	DB3101R_Power	E	
Date:	Thursday, February 25, 2016	Sheet	3 of 4

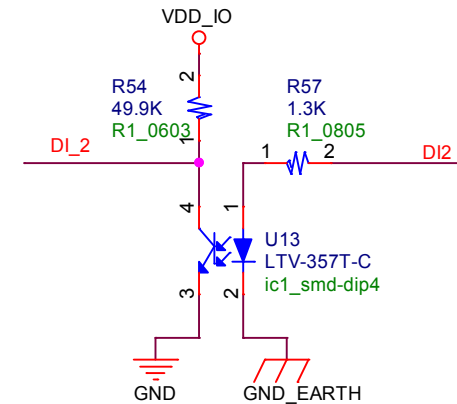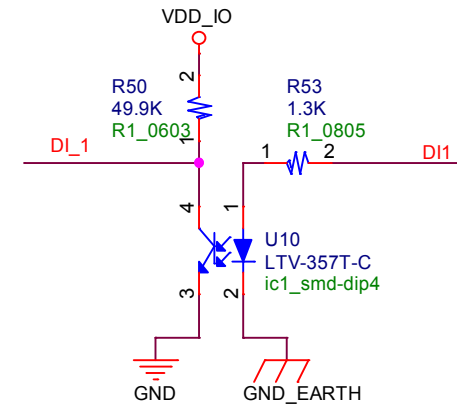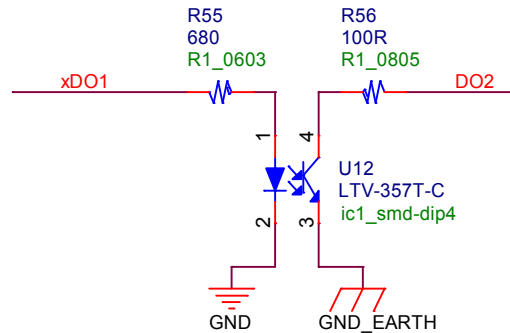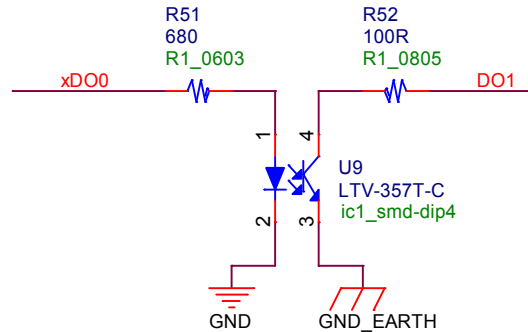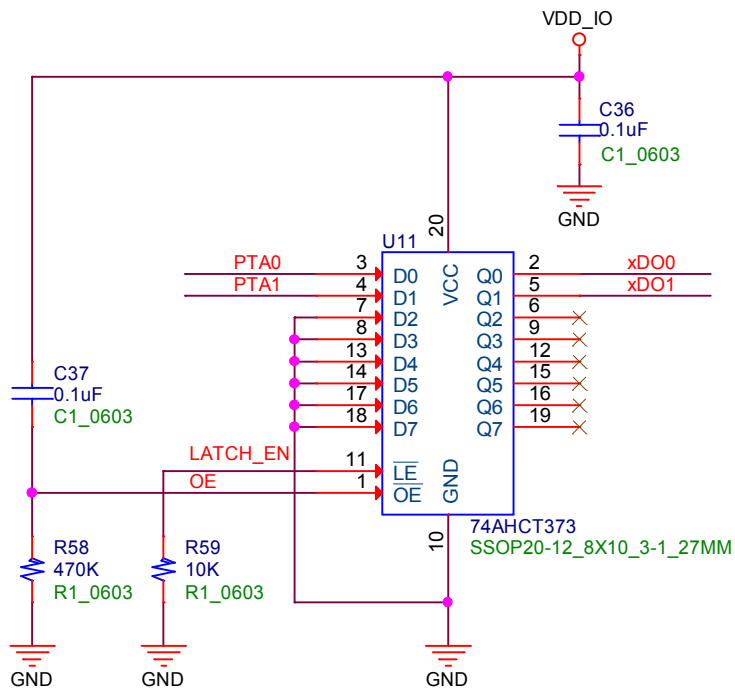

XGPK1 << LATCH_EN
 XGPK2 << PTA0
 XGPK3 << PTA1
 XGPK4 << DI_1
 XGPK5 << DI_2

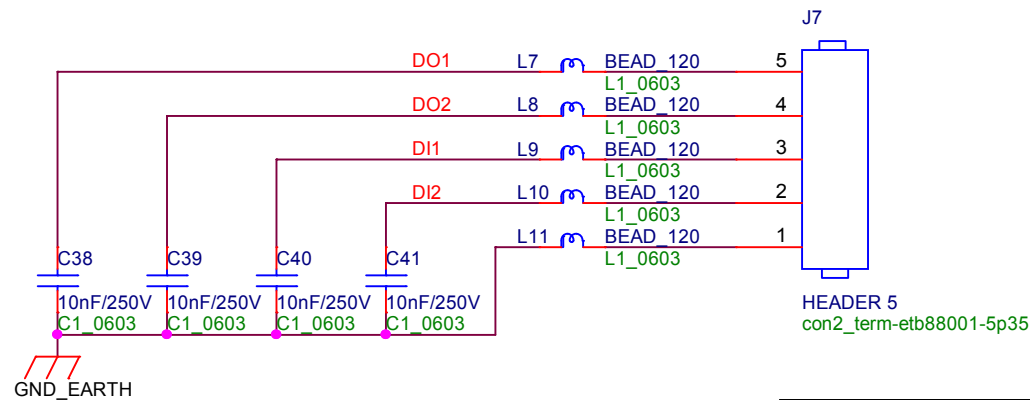

AmRoad Technology Inc.		
Title		
Digital I/O Port		
Size A	Document Number	Rev E
Date:	Thursday, February 25, 2016	Sheet 4 of 4